



Report No.: TW2202033-03E File reference No.: 2022-03-03

Applicant: Shenzhen Bilian Electronic Co.,Ltd.

Product: IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB

Combo Module

Model No.: BL-M7663BU4

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry long

Terry Tang

Manager

Dated: March 03, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2202033-03E Page 2 of 87

Date: 2022-03-03



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAL-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## **Test Report Conclusion**

## Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit	10
5.6	Test Result	10
6.0	Radiated Emission test	13
6.1	Test Method and Test Procedure	13
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit	14
7.0	6dB Bandwidth Measurement	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement	47
10.0	Out of Band Measurement	66
11.0	Antenna Requirement	84
12.0	FCC ID Label	85
13.0	Photo of Test Setup and EUT View	86

Date: 2022-03-03



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Shenzhen Bilian Electronic Co.,Ltd.

Address: Room 501, Building 3, No. 32, Dafu Road, Zhangge Community, Fucheng Street, Longhua

District, Shenzhen City

Telephone: -Fax: --

#### 1.3 Description of EUT

Product: IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module

Manufacturer: Shenzhen Bilian Electronic Co.,Ltd.

Address: Room 501, Building 3, No. 32, Dafu Road, Zhangge Community, Fucheng Street,

Longhua District, Shenzhen City

Trademark: N/A

Model Number: BL-M7663BU4

Additional Model Number: N/A
Hardware Version: V1.0
Software Version: V1.0
Rating: DC5.0V

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz;

IEEE 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2202033-03E Page 5 of 87

Date: 2022-03-03



IEEE 802.11n HT20/HT40: mcs0-mcs15

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels;

IEEE 802.11n (HT40): 7 Channels;

Antenna: Two PIFA antennas. The gain of the antennas is 2.0dBi maximum for each one.

(Get from the antenna specification provided the applicant)

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2022-02-15 to 2022-03-03

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy -xing

Page 6 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	ANT01060660	2021-07-02	2024-07-02
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-02
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04

## 2.2 Automation Test Software

#### For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

## For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 3. DESCRIPTION OF TEST MODES

#### IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

#### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	<b>Conducted Emission Test</b>	Pass	Complies
	Spectrum bandwidth of a	Pass	Complies
ECC Dout 15 Submont C	Orthogonal Frequency		
FCC Part 15 Subpart C	<b>Division Multiplex System</b>		
Paragraph 15.247(a)(2) Limit	Limit: 6dB		
	bandwidth>500kHz		
ECC Part 15 Paragraph	Maximum peak output	Pass	
FCC Part 15, Paragraph 15.247(b)	power		Complies
13.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	Pass	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	<b>Power Spectral Density</b>	Pass	Complies
15.247(e)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	Pass	Complies
15.247(d)	<b>Restricted Band</b>		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	<b>Table 15.209</b>		

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2202033-03E

Date: 2022-03-03



#### 5.0 Power Line Conducted Emission Test

#### 5.1 Schematics of the test

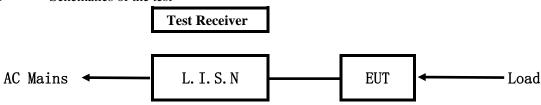


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: DC5.0V, 60Hz Block diagram of Test setup

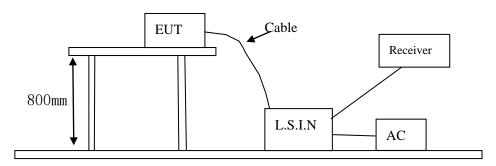

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

Device	Manufacturer	Model	FCC ID	
IEEE 802.11a/b/g/n/ac 867Mbps WLAN	Shenzhen Bilian	BL-M7663BU4	241 (VDI M7662DII4	
+ Bluetooth v5.1 USB Combo Module	Electronic Co.,Ltd.	BL-M1/003BU4	2AL6KBL-M7663BU4	

#### B. Internal Device

Dev	ice	Manufacturer	Model	FCC ID/DOC
N/A				

## C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2202033-03E Page 10 of 87

Date: 2022-03-03



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	5 .0		

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Only the worst case was recorded in the test report.

Date: 2022-03-03



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

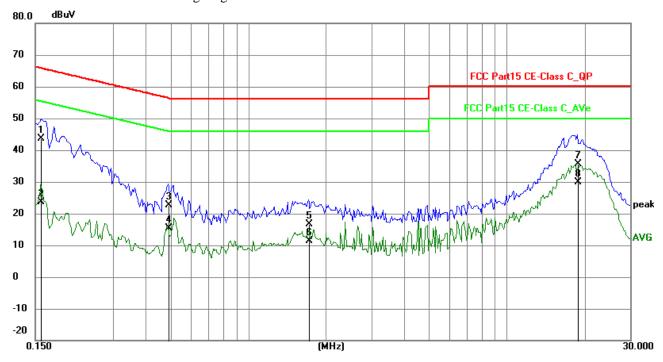

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1578	33.97	9.78	43.75	65.58	-21.83	QP	Р
2	0.1578	13.96	9.78	23.74	55.58	-31.84	AVG	Р
3	0.4893	12.91	9.77	22.68	56.18	-33.50	QP	Р
4	0.4893	5.72	9.77	15.49	46.18	-30.69	AVG	Р
5	1.7139	6.89	9.80	16.69	56.00	-39.31	QP	Р
6	1.7139	1.65	9.80	11.45	46.00	-34.55	AVG	Р
7	18.7365	24.95	10.60	35.55	60.00	-24.45	QP	Р
8	18.7365	19.32	10.60	29.92	50.00	-20.08	AVG	Р

Date: 2022-03-03



#### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

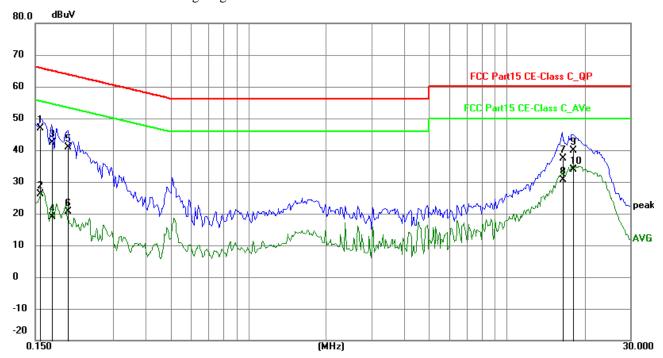

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1565	36.98	9.78	46.76	65.65	-18.89	QP	Р
2	0.1565	16.32	9.78	26.10	55.65	-29.55	AVG	Р
3	0.1734	32.72	9.77	42.49	64.80	-22.31	QP	Р
4	0.1734	9.19	9.77	18.96	54.80	-35.84	AVG	Р
5	0.2007	31.18	9.75	40.93	63.58	-22.65	QP	Р
6	0.2007	10.98	9.75	20.73	53.58	-32.85	AVG	Р
7	16.4238	26.83	10.47	37.30	60.00	-22.70	P Q	Р
8	16.4238	20.15	10.47	30.62	50.00	-19.38	AVG	Р
9	17.9565	29.20	10.56	39.76	60.00	-20.24	QP	Р
10	17.9565	23.34	10.56	33.90	50.00	-16.10	AVG	Р

Report No.: TW2202033-03E Page 13 of 87

Date: 2022-03-03




#### 6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

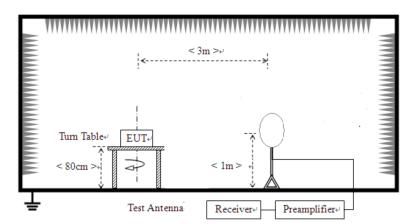


Report No.: TW2202033-03E


Date: 2022-03-03



For radiated emissions from 30MHz to1GHz

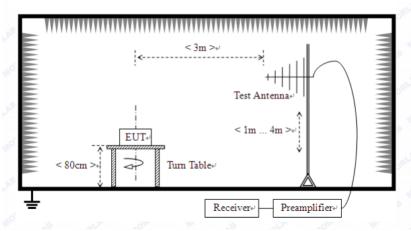

For radiated emissions above 1GHz

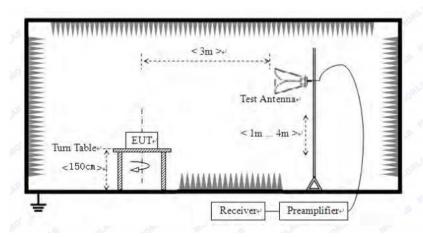

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2202033-03E Page 15 of 87

Date: 2022-03-03



## Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Note: Only the worst case was recorded in the test report.

Page 16 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

#### Radiated Emission In Horizontal (30MHz----1000MHz)

**Keep Transmitting EUT set Condition:** 

**Results: Pass** 

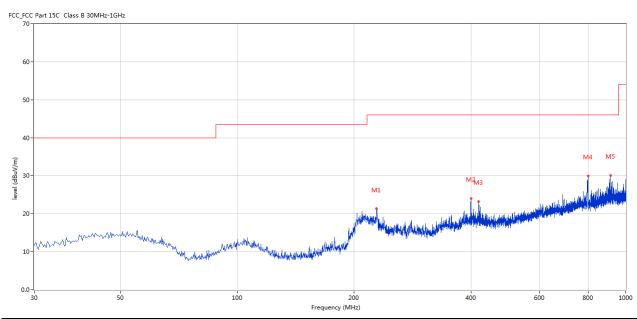

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	228.558	21.30	-12.74	46.0	-24.70	Peak	57.00	100	Horizontal	Pass
2	399.720	23.99	-8.57	46.0	-22.01	Peak	0.00	100	Horizontal	Pass
3	418.630	23.24	-8.22	46.0	-22.76	Peak	65.00	100	Horizontal	Pass
4	799.745	29.98	-2.97	46.0	-16.02	Peak	118.00	100	Horizontal	Pass
5	914.661	30.09	-1.75	46.0	-15.91	Peak	232.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 17 of 87

Date: 2022-03-03




# Test result General Radiated Emission Data and Harmonics Radiated Emission Data

#### Radiated Emission In Vertical (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

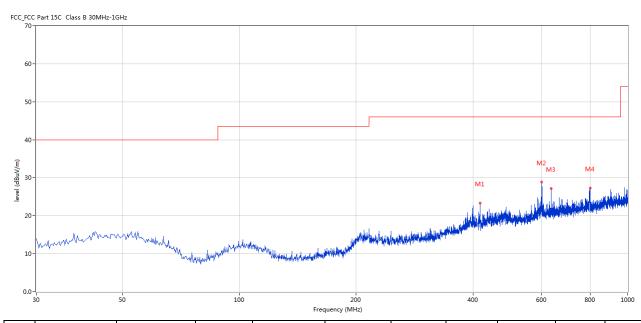

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	416.448	23.37	-8.31	46.0	-22.63	Peak	339.00	100	Vertical	Pass
2	599.490	28.91	-5.01	46.0	-17.09	Peak	51.00	100	Vertical	Pass
3	634.886	27.21	-4.83	46.0	-18.79	Peak	68.00	100	Vertical	Pass
4	799.745	27.25	-2.97	46.0	-18.75	Peak	177.00	100	Vertical	Pass

Page 18 of 87


Report No.: TW2202033-03E

Date: 2022-03-03



## Please refer to the following test plots for details:

## CH01 for 11g at 6Mbps: Horizontal

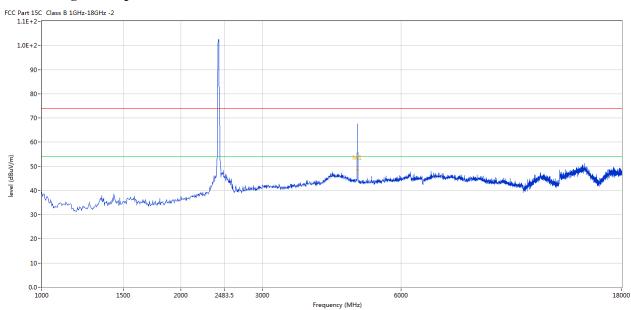


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	4824.044	67.56	3.14	74.0	-6.44	Peak	196.00	100	Horizontal	Pass
1**	4824.044	48.57	3.14	54.0	-5.43	AV	196.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 19 of 87

Date: 2022-03-03



## CH01 for 11g at 6Mbps: Vertical

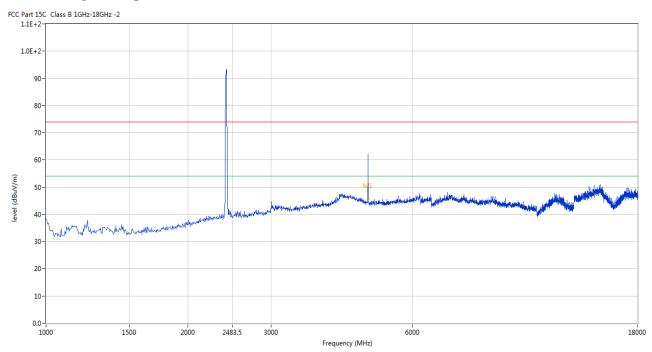


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4824.044	62.18	3.14	74.0	-11.82	Peak	130.00	100	Vertical	Pass
1**	4824.044	45.60	3.14	54.0	-8.40	AV	130.00	100	Vertical	Pass

Report No.: TW2202033-03E Page 20 of 87

Date: 2022-03-03



## CH06 for 11g at 6Mbps: Horizontal

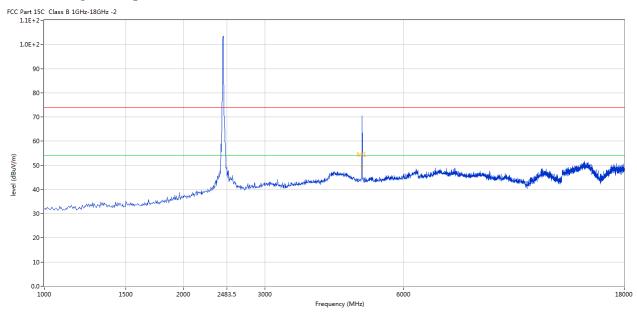


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	4875.031	70.30	3.19	74.0	-3.70	Peak	219.00	100	Horizontal	Pass
1**	4875.031	49.53	3.19	54.0	-4.47	AV	219.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 21 of 87

Date: 2022-03-03



## CH06 for 11g at 6Mbps: Vertical

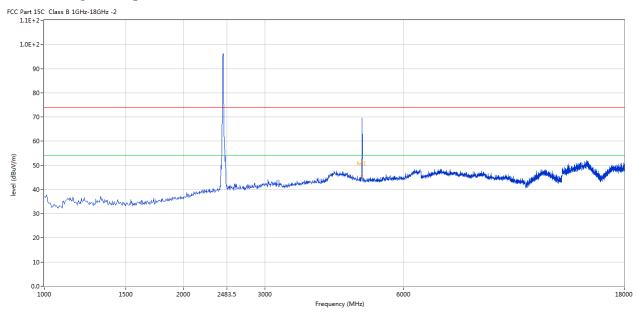


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4875.031	69.51	3.19	74.0	-4.49	Peak	156.00	100	Vertical	Pass
1**	4875.031	45.84	3.19	54.0	-8.16	AV	156.00	100	Vertical	Pass

Report No.: TW2202033-03E Page 22 of 87

Date: 2022-03-03



## CH11 for 11g at 6Mbps: Horizontal

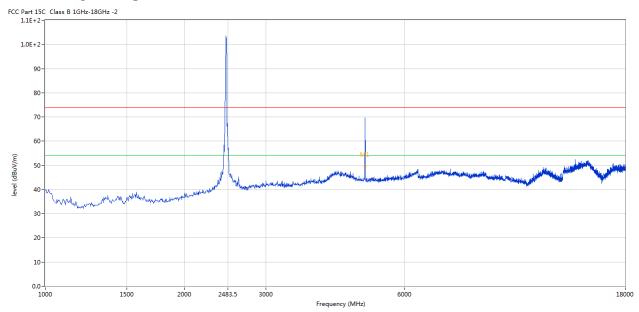


No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	4921.770	69.63	3.27	74.0	-4.37	Peak	218.00	100	Horizontal	Pass
1**	4921.770	49.55	3.27	54.0	-4.45	AV	218.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 23 of 87

Date: 2022-03-03



#### CH11 for 11g at 6Mbps: Vertical

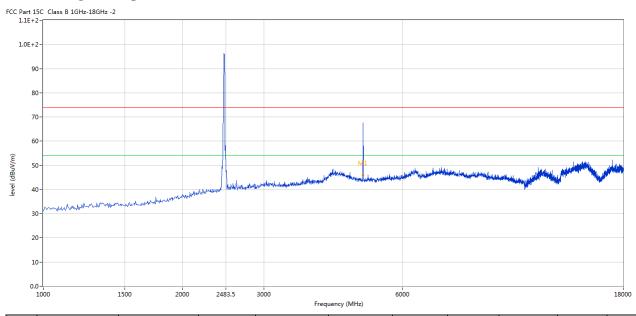

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4921.770	67.51	3.27	74.0	-6.49	Peak	153.00	100	Vertical	Pass
1**	4921.770	45.91	3.27	54.0	-8.09	AV	153.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result

Page 24 of 87


Report No.: TW2202033-03E

Date: 2022-03-03



## 7.0 6dB Bandwidth Measurement

## 7.1 Test Setup



#### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

#### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth  $(VBW) \ge 3 \times RBW$ .
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.4 Test Result

Report No.: TW2202033-03E Page 25 of 87

Date: 2022-03-03



## 6dB Occupied Bandwidth

EUT			•	867Mbps WLAN	Model	BL-N	M7663BU4
Mode		+ Bluetooth	802.111	Combo Module	Test Voltage	Г	OC5.0V
Temperati	ure		24 deg. (		Humidity		6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum (MHz		Pass/ Fail
1		2412	1	10.04	0.5		Pass
6		2437	1	10.04	0.5		Pass
11		2462	1	10.04	0.5		Pass
1		2412	11	10.04	0.5		Pass
6		2437	11	10.04	0.5		Pass
11	2462		11	10.04	0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. ANTO was the worst case.


Page 26 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 1. 802.11b at 1Mbps of CH01

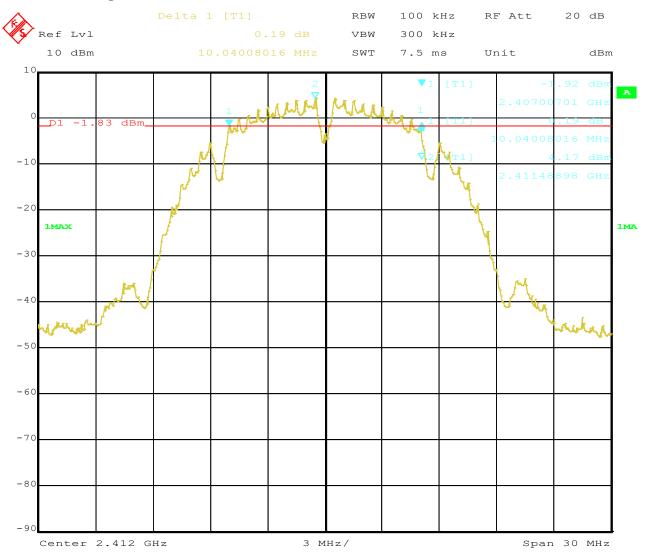

3.MAR.2022 17:20:44 Date:


Page 27 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 2. 802.11b at 1Mbps of CH06

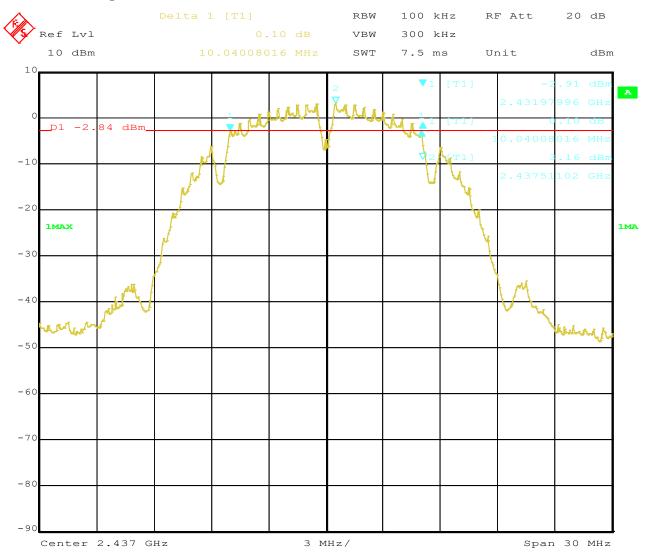

3.MAR.2022 17:36:25 Date:


Page 28 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 3. 802.11b at 1Mbps of CH11

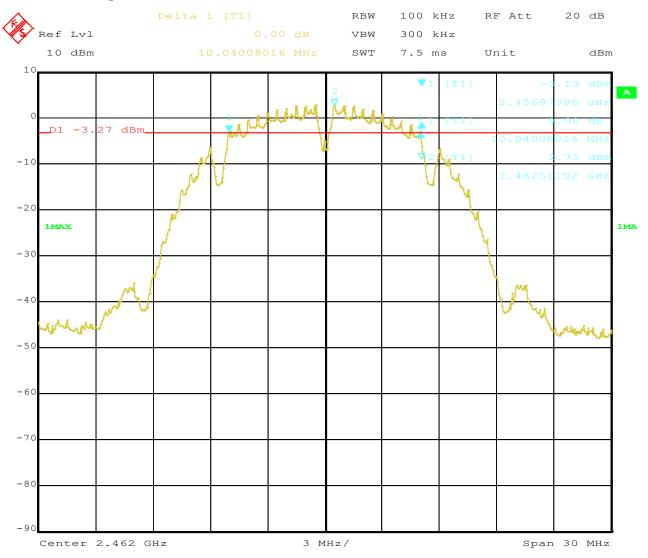

3.MAR.2022 17:39:35 Date:


Page 29 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 4. 802.11b at 11Mbps of CH01

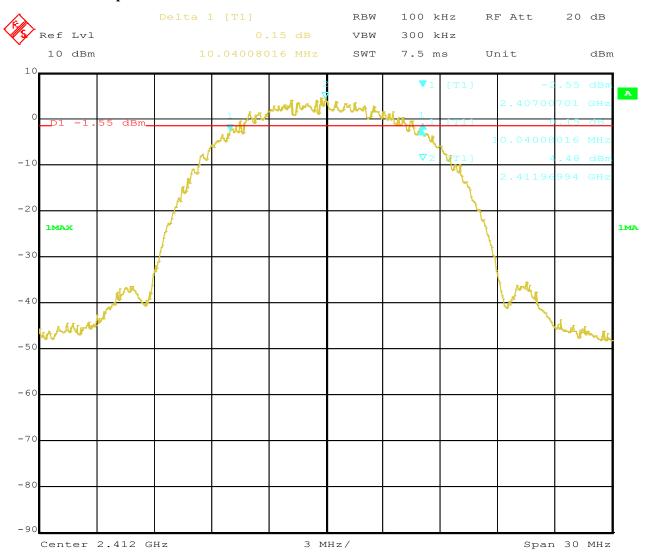


3.MAR.2022 17:26:40 Date:

Report No.: TW2202033-03E Page 30 of 87

Date: 2022-03-03



## 5. 802.11b at 11Mbps of CH06

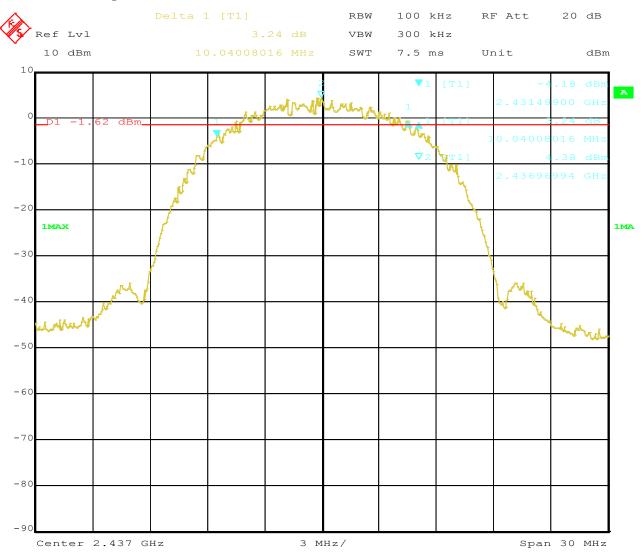


3.MAR.2022 17:31:18 Date:

Report No.: TW2202033-03E Page 31 of 87

Date: 2022-03-03



## 6. 802.11b at 11Mbps of CH11

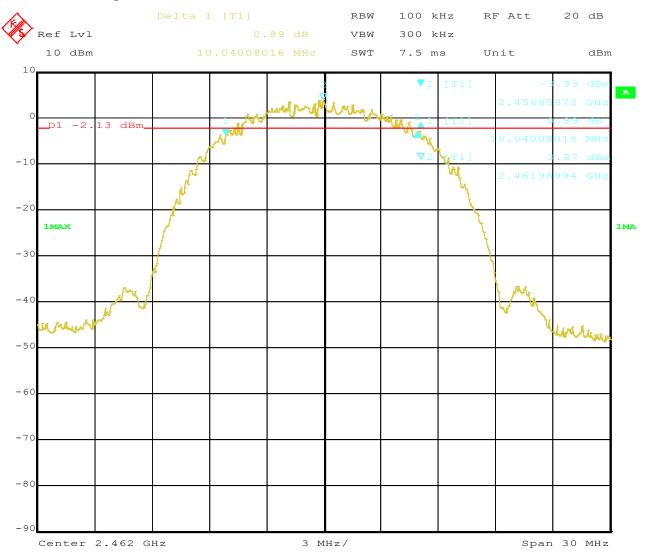

3.MAR.2022 17:42:08 Date:

Report No.: TW2202033-03E Page 32 of 87

Date: 2022-03-03



## 6dB Occupied Bandwidth

EUT		IEEE 802.11a	a/b/g/n/ac 8	67Mbps WLAN +	Model	BL-M7663BU4
		Bluetooth	v5.1 USB	Combo Module		
Mode			802.11	g	Test Voltage	DC5.0V
Temperati	ure		24 deg.	C,	Humidity	56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimum Lim (MHz)	it Pass/ Fail
1		2412	6	16.41	0.5	Pass
6		2437	6	16.41	0.5	Pass
11		2462	6	16.41	0.5	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. ANTO was the worst case.

Page 33 of 87

Report No.: TW2202033-03E


Date: 2022-03-03



#### **Test Plots:**

Date:

## 1. 802.11g at 6Mbps of CH01

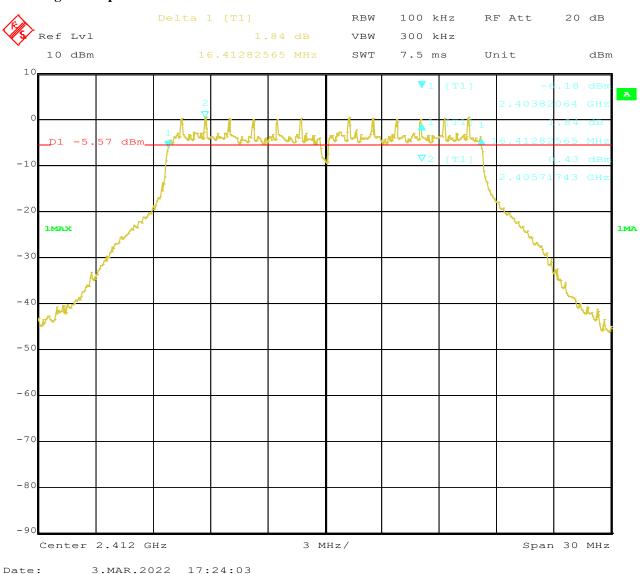


Page 34 of 87

Date: 2022-03-03

Report No.: TW2202033-03E



## 2. 802.11g at 6Mbps of CH06

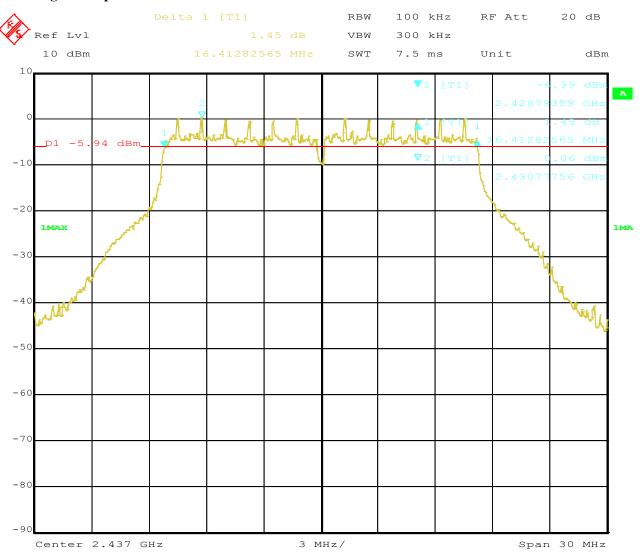

3.MAR.2022 17:33:38 Date:


Page 35 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 3. 802.11g at 6Mbps of CH11

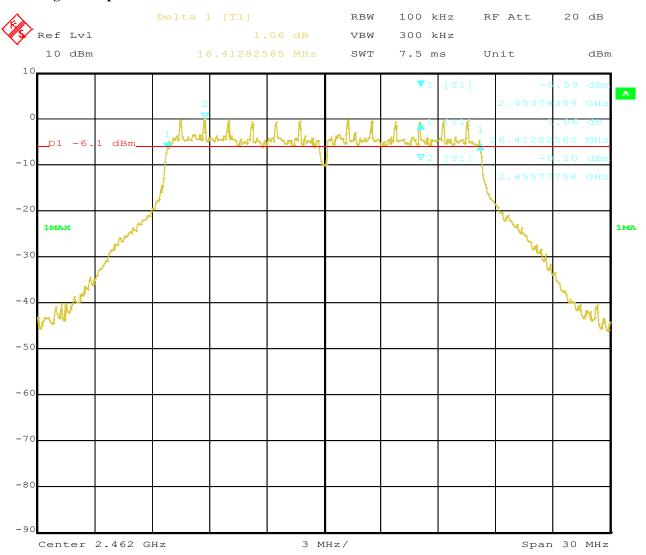

3.MAR.2022 17:40:53 Date:

Page 36 of 87 Report No.: TW2202033-03E

Date: 2022-03-03



## 6dB Occupied Bandwidth

EUT		IEEE 802.11a/b/g/n/ac 867Mbps WLAN			Model	BL-M7663BU4	
		+ Bluetooth v5.1 USB Combo Module					
Mode		802.11n HT20			Test Voltage	DC5.0V	
Temperature		24 deg. C,			Humidity 5		56% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	
1		2412	mcs0	17.56	0.5	0.5	
6		2437	mcs0	17.56	0.5		Pass
11		2462	mcs0	17.56	0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. ANTO was the worst case.

Page 37 of 87


Report No.: TW2202033-03E

Date: 2022-03-03



#### **Test Plots:**

## 1. 802.11n at HT20 of CH01

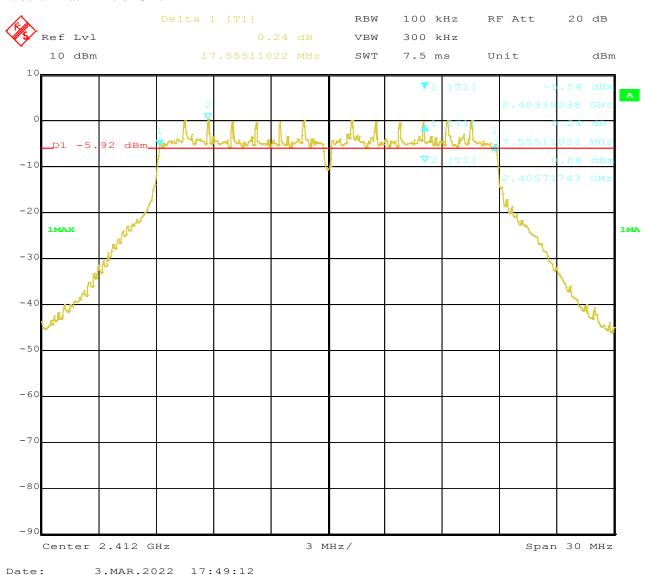

The report refers only to the sample tested and does not apply to the bulk.


Page 38 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



### 2. 802.11n at HT20 of CH06

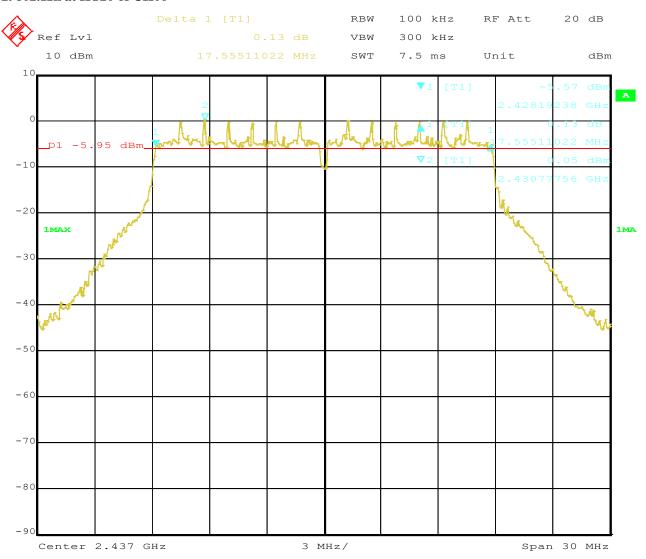

3.MAR.2022 17:47:11 Date:


Page 39 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



### 3. 802.11n at HT20 of CH11

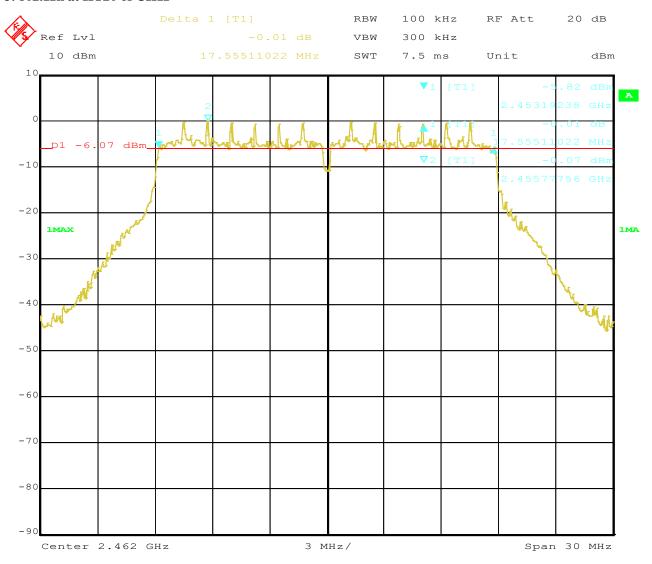

3.MAR.2022 17:43:40 Date:

Report No.: TW2202033-03E Page 40 of 87

Date: 2022-03-03



## 6dB Occupied Bandwidth

EUT		IEEE 802.11	a/b/g/n/ac 8	867Mbps WLAN	Model	BI	L-M7663BU4
		+ Bluetooth	v5.1 USB	Combo Module			
Mode			802.11n H	T40	Test Voltage		DC5.0V
Temperate	ure		24 deg. (	C,	Humidity	idity 56% RH	
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)	Minimui (MI		Pass/ Fail
3		2422	mcs0	36.19	0.	5	Pass
6		2437		36.19	0.	5	Pass
9	2452		mcs0	36.19	0.	5	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. ANTO was the worst case.

Page 41 of 87


Report No.: TW2202033-03E

Date: 2022-03-03



#### **Test Plots:**

# 1. 802.11n at HT40 of CH03

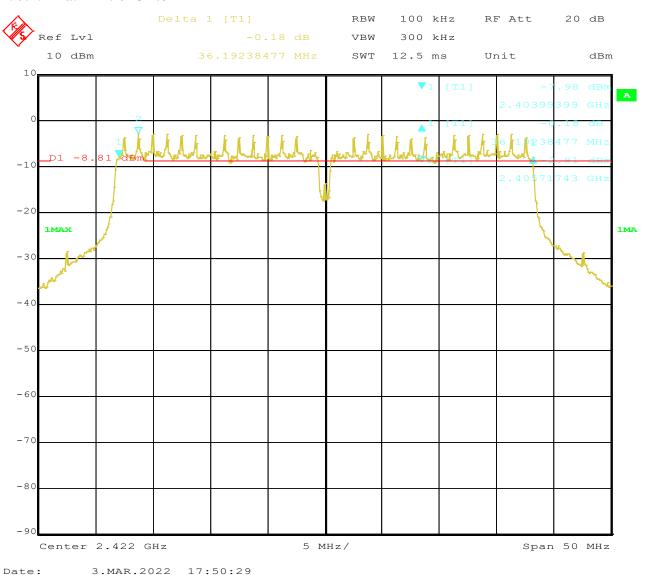


Report No.: TW2202033-03E Page 42 of 87

Date: 2022-03-03



### 2. 802.11n at HT40 of CH06

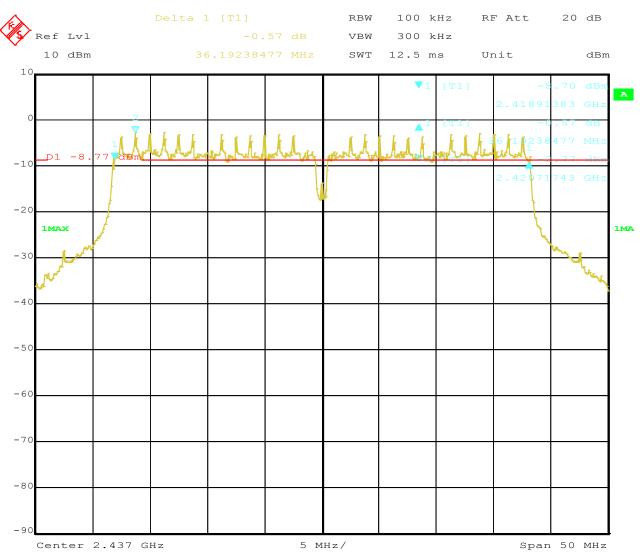


3.MAR.2022 17:52:24 Date:

Report No.: TW2202033-03E Page 43 of 87

Date: 2022-03-03



### 3. 802.11n at HT40 of CH09

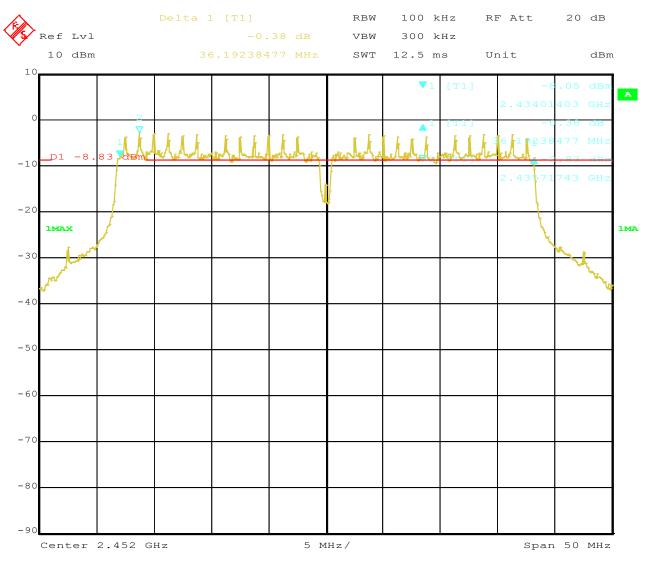

3.MAR.2022 17:53:54 Date:

Report No.: TW2202033-03E


Date: 2022-03-03



Page 44 of 87

## 8. Maximum Output Power

# 8.1 Test Setup



### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power was measured

Report No.: TW2202033-03E

Date: 2022-03-03



#### **8.4Test Results**

EUT		IEEE	802.11a	/b/g/n/ac 8	367Mbps	WLAN +	Mode	el	BL-	M7663BU4
		Bl	uetooth	v5.1 USB	Combo l	Module				
Mode		802.11b			Test Vol	tage		DC5.0V		
Temperat	ure			24 deg.	C,		Humid	ity	56% RH	
Channel	Frequency		ANT0	Power	ANT1	Power	Total Max. Power	Power	Limit	Pass/ Fail
Chamer	(MH	z)	dBm	mW	dBm	mW	Output (dBm)	(dB	Sm)	1 435/ 1 411
1	2412		18.54	71.45	18.32	67.92	21.44	30		Pass
6	2437	1	18.46	70.15	18.25	66.83	21.37	3	0	Pass
11	2462		18.18	65.77	18.01	63.24	21.11	3	0	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		IEE	E 802.11	a/b/g/n/ac	867Mbp	s WLAN	+	Mo	del	BL	-M7663BU4
		В	luetooth	v5.1 USB	Combo	Module					
Mode		802.11g					Test Voltage		DC5.0V		
Temperat	ure			24 deg	. C,			Humidity			56% RH
Channel	Freq	uency	ANT0	Power	ANT1	Power	Total Pov		Power L	imit	Pass/ Fail
Chamiei	(MH	z)	dBm	mW	dBm	mW	Out (dB	-	(dBm	)	1 455/ 1 411
1	2412	,	18.66	73.45	18.48	70.47	21.	58	30		Pass
6	2437		18.57	71.94	18.31	67.76	21.	45	30		Pass
11	2462	,	18.34	68.23	18.09	64.42	21.	23	30		Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:
  - Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

Page 46 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



EUT				/b/g/n/ac 8	•		Mod	lel	BI	M7663BU4
		BI	uetooth	v5.1 USB	Combo I	Module				
Mode			802.11n (HT20)			Test Vo	Test Voltage		DC5.0V	
Temperat	ure			24 deg.	C,		Humi	dity		56% RH
Channel	Frequ (MH	uency z)	ANT0	Power mW	ANT1	Power	Total Max. Power Output	Power L		Pass/ Fail
			UDIII	111 <b>vv</b>	UDIII	111 <b>VV</b>	(dBm)			
1	2412	,	18.62	72.78	18.43	69.66	21.54	30		Pass
6	2437		18.56	71.78	18.25	66.83	21.42	30		Pass
11	2462	r	18.29	67.45	18.01	63.24	21.16	30		Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		IEEE	802.11a	/b/g/n/ac 8	867Mbps	WLAN +	Mode	el	BL-	M7663BU4	
		Bl	uetooth	v5.1 USB	Combo l	Module					
Mode		802.11n (HT40)			Test Vol	tage	ge DC5.0V				
Temperat	ure			24 deg.	C,		Humid	ity	56% RH		
Channel	Freq	uency	ANT0	Power	ANT1	Power	Total Max. Power	Power Limit		Pass/ Fail	
Chamier	(MH	z)	dBm	mW	dBm	mW	Output (dBm)	(dB	Sm)	1 455/ 1 411	
3	2422		18.45	69.98	18.23	66.53	21.35	30	0	Pass	
6	2437	,	18.35	68.39	18.17	65.61	21.27	30	0	Pass	
9	2452		18.22	66.37	18.11	64.71	21.18	30	0	Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:

 $Power\ Output = Power\ Reading + Cable\ loss + Attenuator$ 

3. The worse case was recorded


Report No.: TW2202033-03E Page 47 of 87

Date: 2022-03-03



## 9. Power Spectral Density Measurement

## 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8 \text{ dBm/3kHz}$ .

Report No.: TW2202033-03E

Date: 2022-03-03



#### 9.4Test Result

EUT		IEEE	802.11a/b/g/n/ac 86	7Mbps WLA	N +	Model	BL-M	7663BU4
		Blu	Bluetooth v5.1 USB Combo Module					
Mode	e 802.11b 11Mbps			Test Voltage	D	C5.0V		
Temperat	ure		24 deg. C	· ,	Humidity		56	% RH
Channel	Freq	uency	ANT0 Power	Factor	Total Power Spectral		Limit	Pass/ Fail
	(M	(Hz)	Spectral Density		Der	nsity (dBm/10kHz)	(dBm/3kHz)	)
1	24	112	-5.09	3.01	3.01 -2.08		8	Pass
6	24	137	-5.33	3.01		-2.32 8		Pass
1	24	2462 -5.54 3.01 -2.53		-2.53	8	Pass		

Note: 1. Total Power Spectral Density = ANTO Power Spectral Density + Factor

<sup>3.</sup> ANT0 and ANT1 were tested and ANT0 was the worst case

EUT		IEEE	802.11a/b/g/n/ac 86	7Mbps WLA	N +	Model	BL-M76	663BU4
		Blı	Bluetooth v5.1 USB Combo Module					
Mode	802.11b 1Mbps		Test Voltage	DC5	.0V			
Temperat	ure		24 deg. C	· •	Humidity		56% RH	
Channel	Freq	uency	ANT0 Power	Factor	Total Power Spectral		Limit	Pass/ Fail
	(M	IHz)	Spectral Density		Der	nsity (dBm/10kHz)	(dBm/3kHz)	
1	24	412	-4.54	3.01		-1.53	8	Pass
6	24	437	-4.54	3.01	-1.53		8	Pass
1	24	462	-4.89	3.01	-1.88		8	Pass

Note: 1. Total Power Spectral Density = ANT1 Power Spectral Density + Factor

<sup>2.</sup> Factor=10log2=3.01

<sup>2.</sup> Factor=10log2=3.01

<sup>3.</sup> ANT0 and ANT1 were tested and ANT0 was the worst case

Report No.: TW2202033-03E Page 49 of 87

Date: 2022-03-03



EUT		IEEE	802.11a/b/g/n/ac 8	67Mbps WLA	AN +	Model	BL-M76	663BU4
		Bl	Bluetooth v5.1 USB Combo Module					
Mode		802.11g 6Mbps			Test Voltage	DC5	.0V	
Temperat	ure	24 deg. C,		Humidity	56%	RH		
Channel	Freq	uency	ANT0 Power	Factor	Tota	l Power Spectral	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density		Dens	ity (dBm/10kHz)	(dBm/3kHz)	
1	24	412	-9.56 3.01 -6		-6.55	8	Pass	
6	24	137	-9.72	3.01	-6.71		8	Pass
1	24	162	-9.77	3.01		-6.76	8	Pass

Note: 1. Total Power Spectral Density = ANT1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. ANT0 and ANT1 were tested and ANT0 was the worst case

EUT		IEEE	802.11a/b/g/n/ac 80	67Mbps WLA	AN +	Model	BL-M76	663BU4
		Bl	Bluetooth v5.1 USB Combo Module					
Mode			802.11n HT20 mcs0			Test Voltage	DC5	.0V
Temperat	ure	24 deg. C,		Humidity	56%	RH		
Channel	Freq	uency	ANT0 Power	Factor	Tota	l Power Spectral	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density		Dens	ity (dBm/10kHz)	(dBm/3kHz)	
1	24	-8.71 3.01 -5.		-5.70	8	Pass		
6	24	137	-8.91	3.01		-5.90	8	Pass
1	24	162	-9.17	3.01		-6.16	8	Pass

Note: 1. Total Power Spectral Density = ANT1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. ANT0 and ANT1 were tested and ANT0 was the worst case

Page 50 of 87 Report No.: TW2202033-03E

Date: 2022-03-03



EUT		IEEE	802.11a/b/g/n/ac 8	67Mbps WLA	AN +	Model	BL-M76	663BU4
		Bl	Bluetooth v5.1 USB Combo Module					
Mode		802.11n HT40 mcs0			Test Voltage	DC5	.0V	
Temperat	ure	24 deg. C,		Humidity	56%	RH		
Channel	Freq	uency	ANT0 Power	Factor	Total Power Spectral		Limit	Pass/ Fail
	(M	(Hz)	Spectral Density		Dens	ity (dBm/10kHz)	(dBm/3kHz)	
3	24	422 -11.73 3.01		-8.72	8	Pass		
6	24	137	-11.65	3.01	-8.64		8	Pass
9	24	452	-11.54	3.01		-8.53	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

<sup>2.</sup> Factor=10log2=3.01

<sup>3.</sup> ANT0 and ANT1 were tested and ANT0 was the worst case


Report No.: TW2202033-03E Page 51 of 87

Date: 2022-03-03



## 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

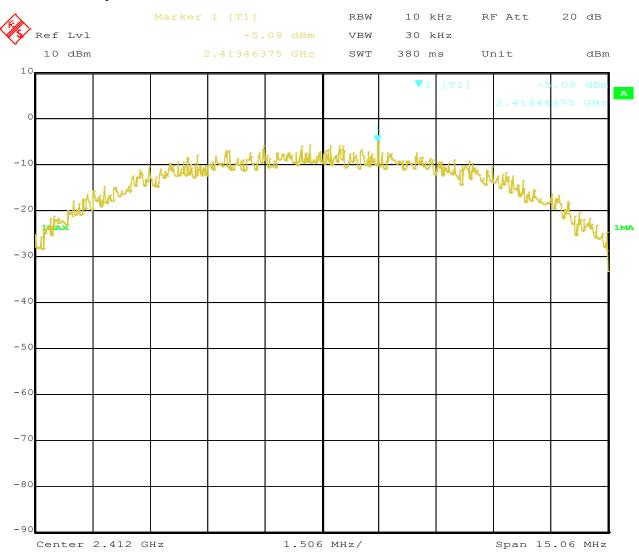

3.MAR.2022 18:11:29 Date:


Page 52 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



### 2. 802.11b at 11Mbps at CH06

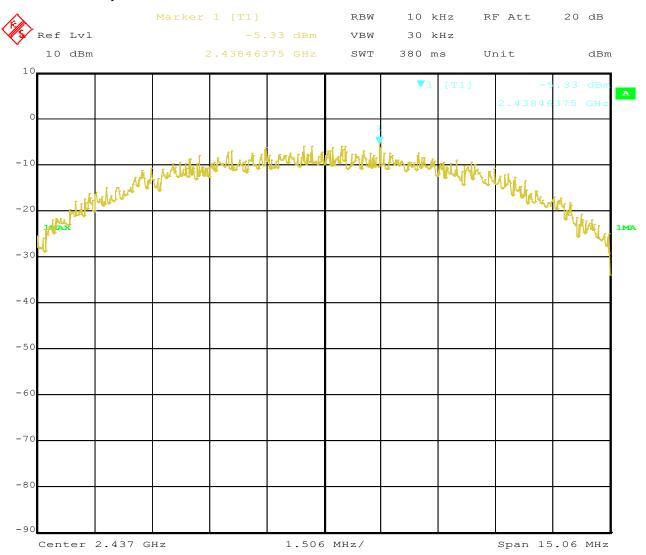

3.MAR.2022 18:11:50 Date:


Page 53 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 3. 802.11b at 11Mbps of CH11

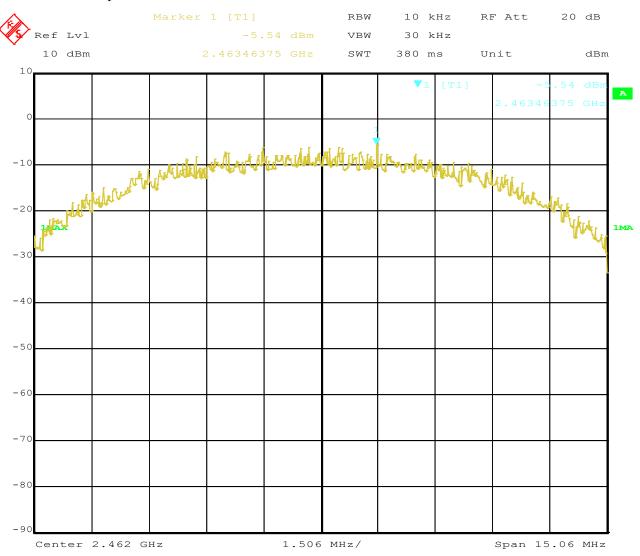

3.MAR.2022 18:13:21 Date:


Page 54 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 4. 802.11b at 1Mbps of CH1

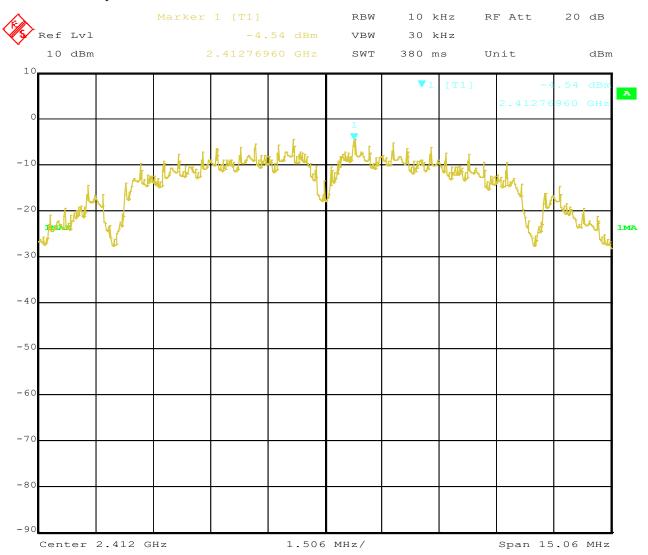

3.MAR.2022 18:11:00 Date:


Page 55 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 5. 802.11b at 1Mbps of CH6

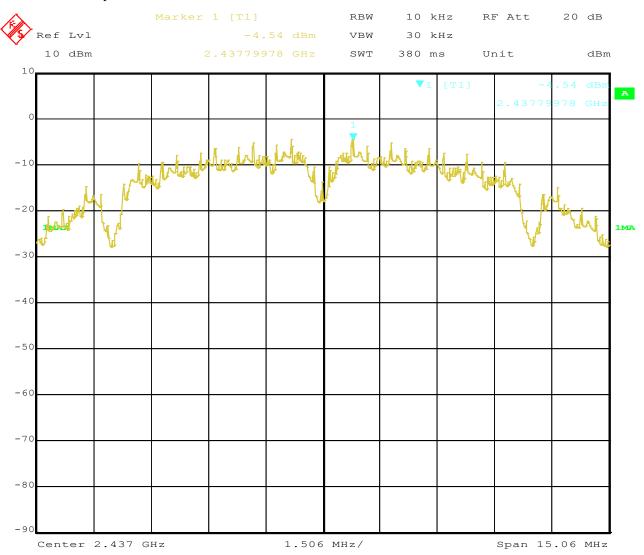

3.MAR.2022 18:12:23 Date:


Page 56 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 6. 802.11b at 1Mbps of CH11

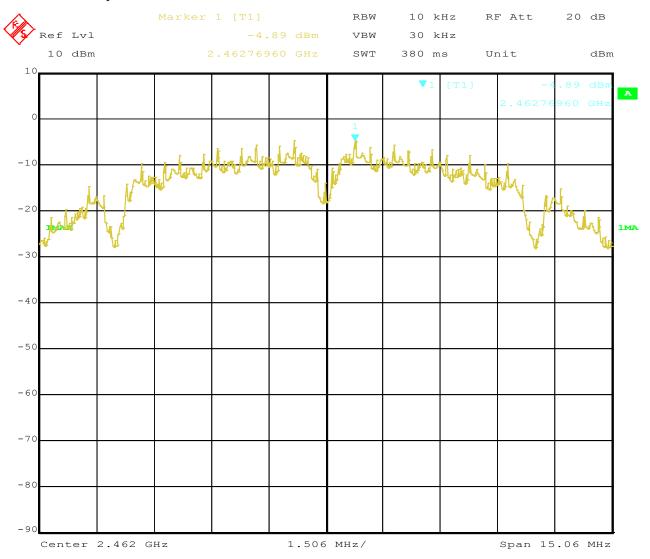

3.MAR.2022 18:12:52 Date:


Page 57 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 7. 802.11g at 6Mbps of CH1

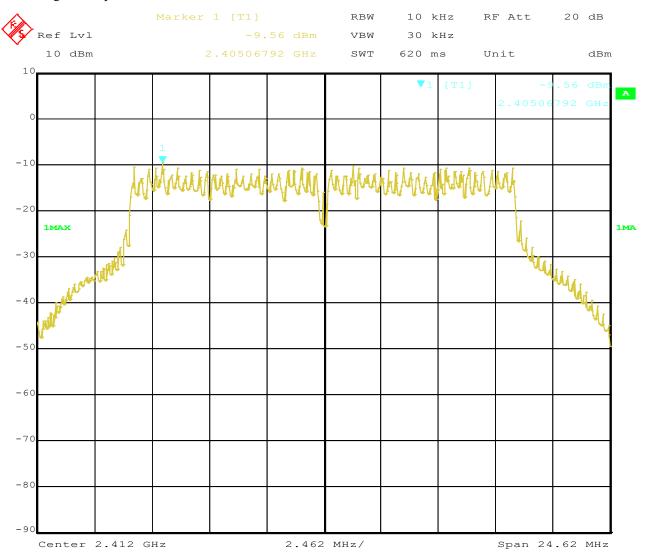

3.MAR.2022 18:10:31 Date:


Page 58 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 8. 802.11g at 6Mbps of CH6

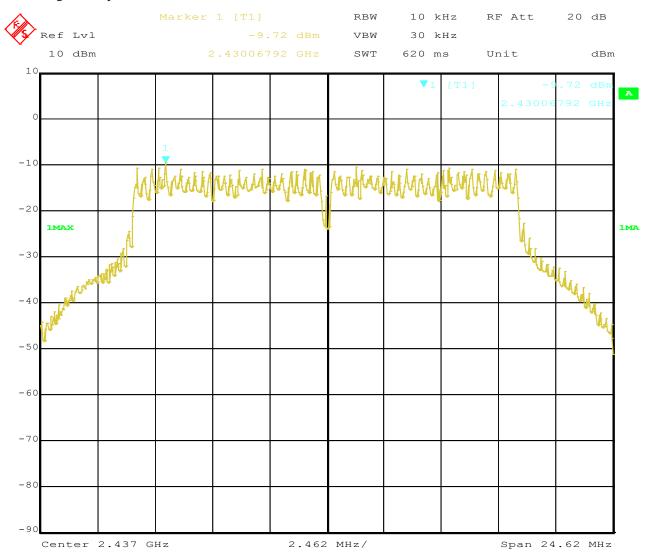

3.MAR.2022 18:09:53 Date:


Page 59 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



## 9. 802.11g at 6Mbps of CH11

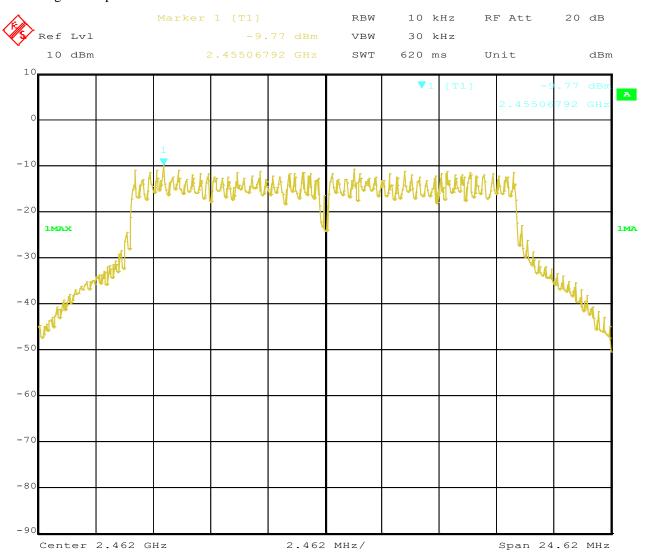

3.MAR.2022 18:09:24 Date:


Page 60 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 10. 802.11n at HT20 of CH01

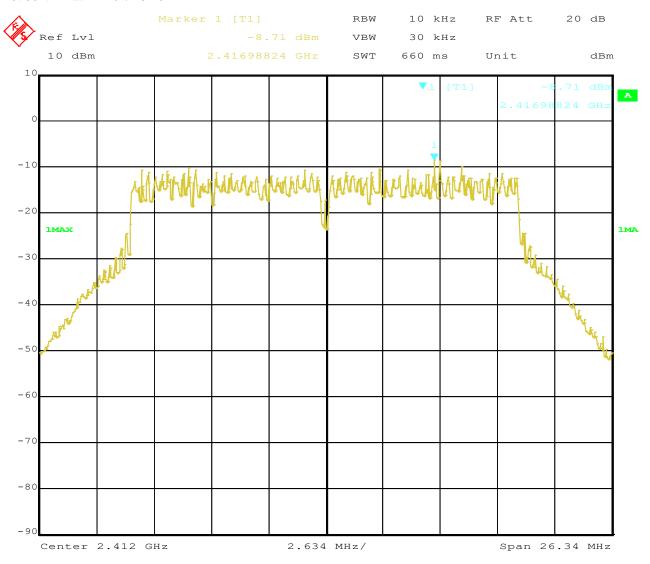


3.MAR.2022 18:14:56 Date:

Report No.: TW2202033-03E Page 61 of 87

Date: 2022-03-03



#### 11. 802.11n at HT20 of CH06

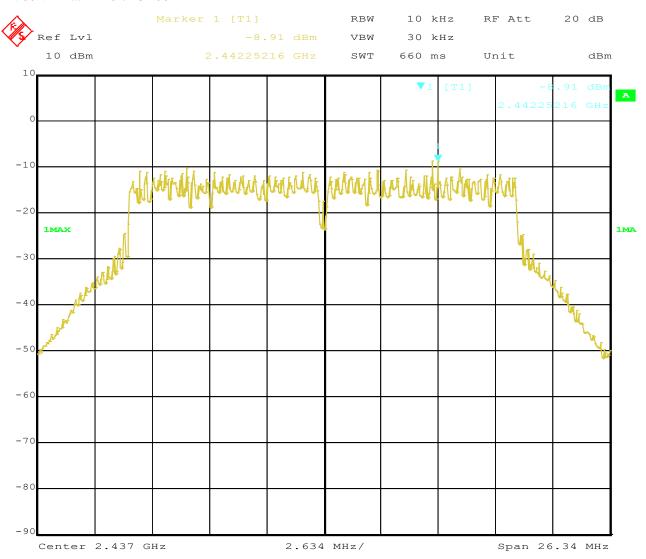

3.MAR.2022 18:14:27 Date:


Page 62 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 12. 802.11n at HT20 of CH11

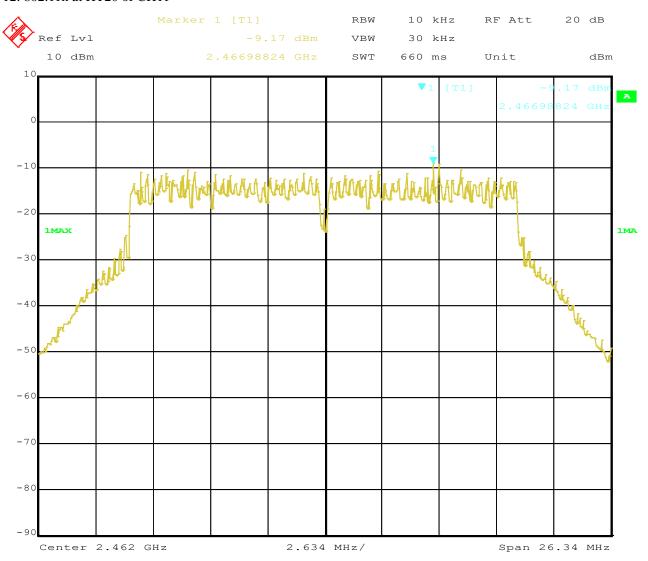

3.MAR.2022 18:14:04 Date:


Page 63 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 13. 802.11n at HT40 of CH03

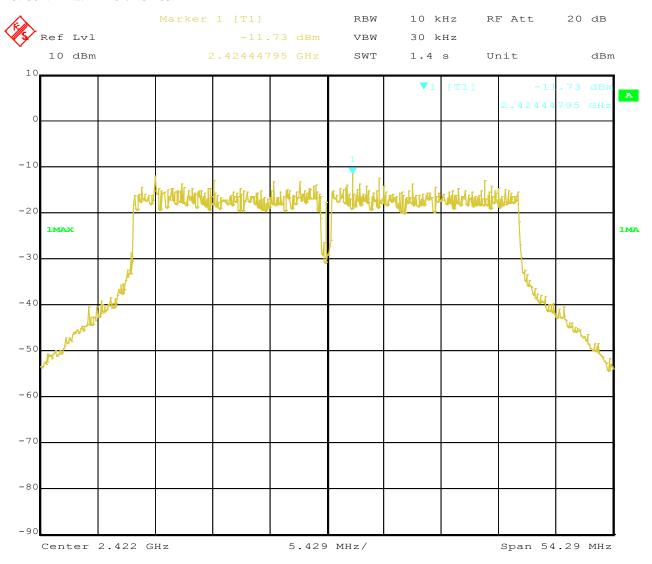

3.MAR.2022 18:15:33 Date:


Page 64 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 14. 802.11n at HT40 of CH06

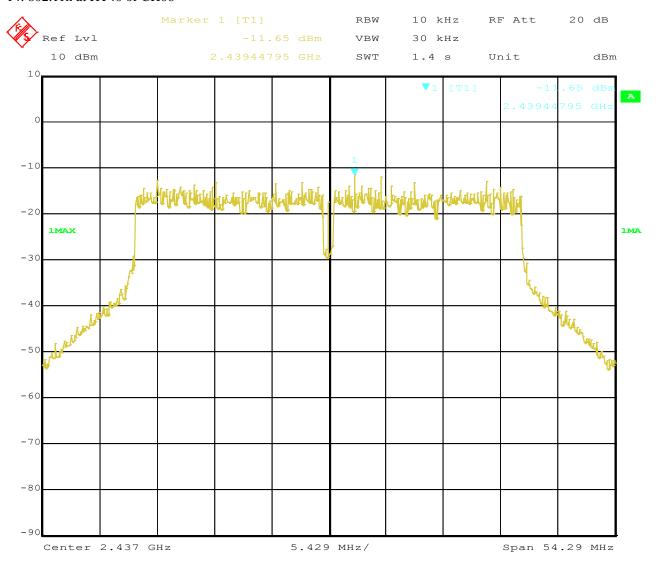

3.MAR.2022 18:15:57 Date:


Page 65 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



#### 15. 802.11n at HT40 of CH09

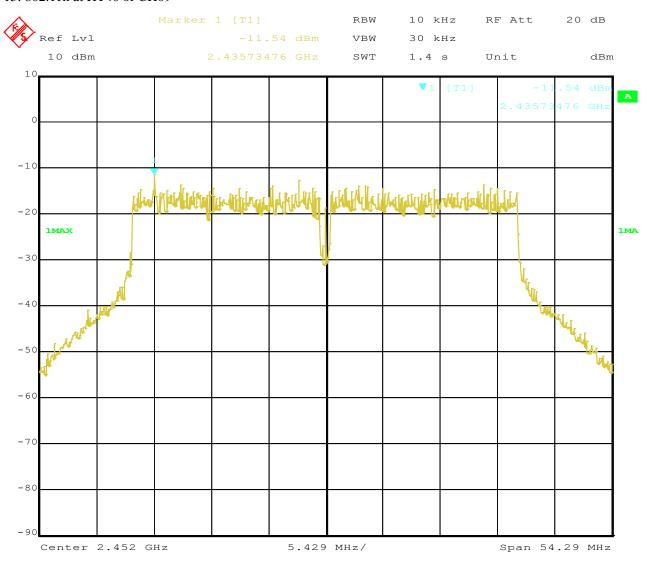

3.MAR.2022 18:16:29 Date:


Page 66 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



# 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. Two antennas were tested and only the worst cased was recorded in the test report. ANTO was the worst case.

Page 67 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




### For 802.11b mode

## CH01 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

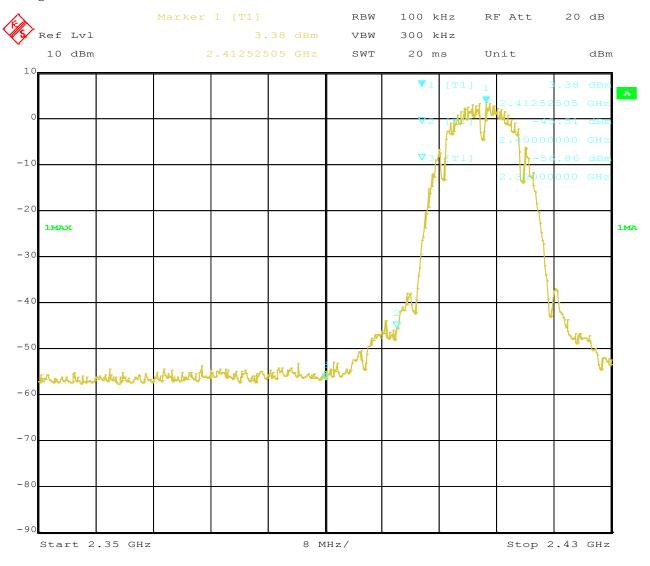

3.MAR.2022 18:19:12 Date:

Page 68 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## CH11 at 1Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Test Result: Pass		PK

## **Test Figure:**

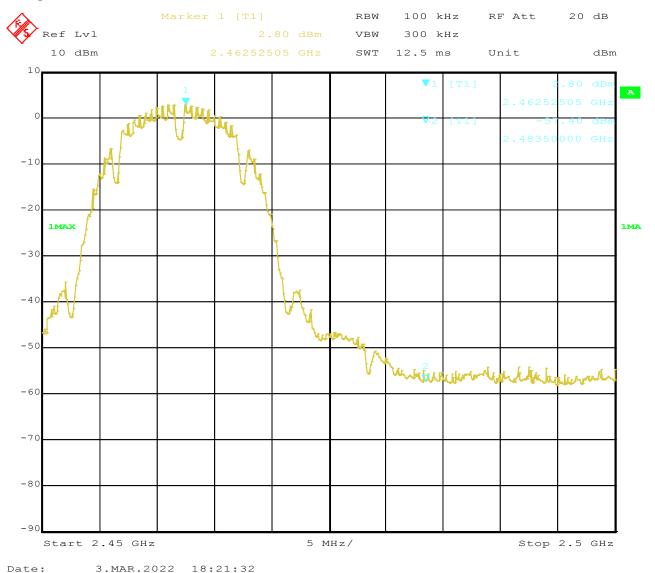

Page 69 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## For 802.11b mode

## CH01 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

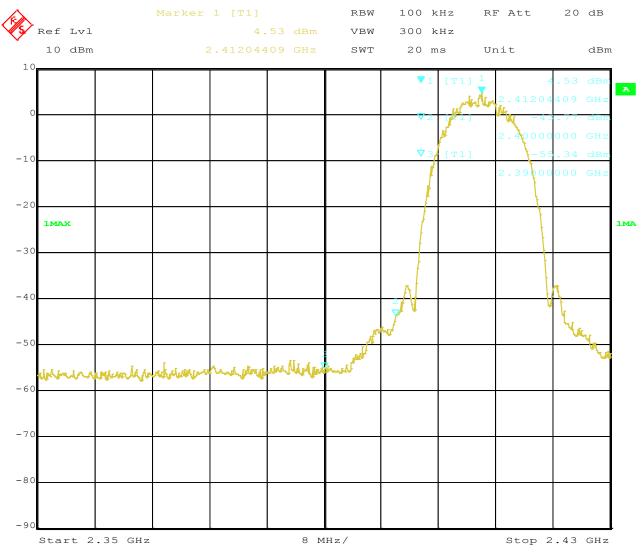

3.MAR.2022 18:20:05 Date:

Page 70 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## CH11 at 11Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

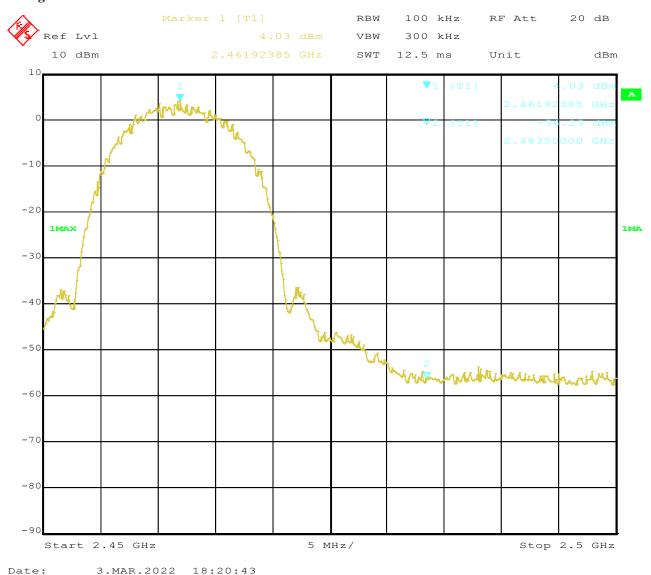

Page 71 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




### For 802.11g mode

## CH01 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

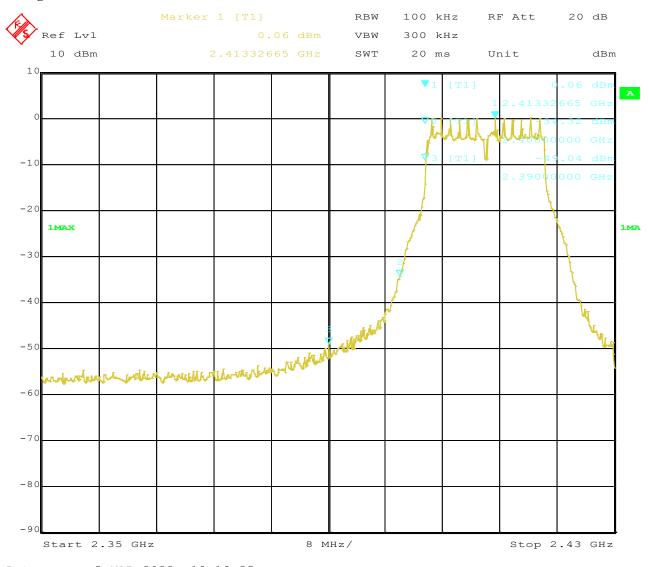

3.MAR.2022 18:19:35 Date:

Page 72 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## CH11 at 6Mbps

#### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

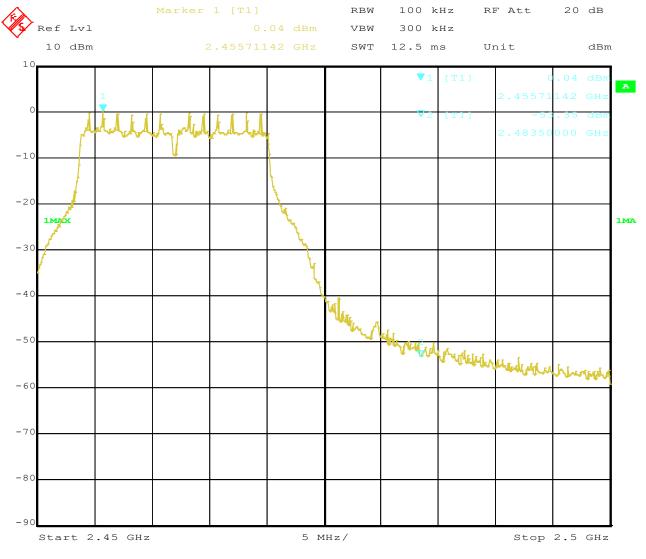

Date: 3.MAR.2022 18:21:12

Page 73 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## For 802.11n (HT20) mode

CH01 at mcs0

### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

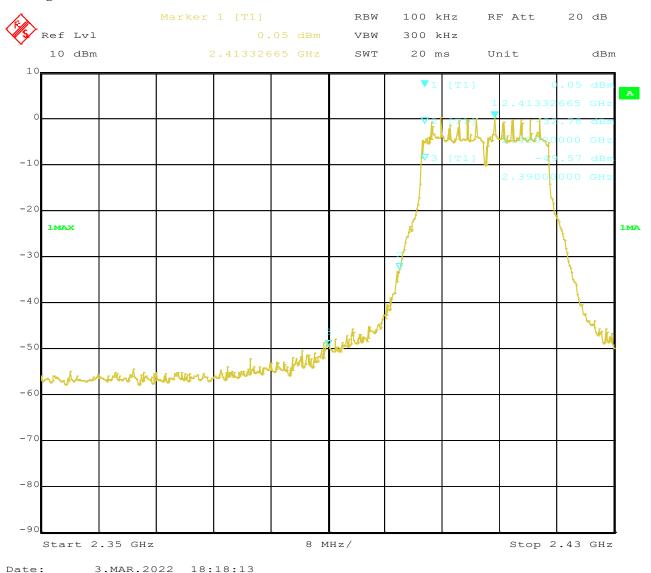

Page 74 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




### CH11 at mcs0

### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

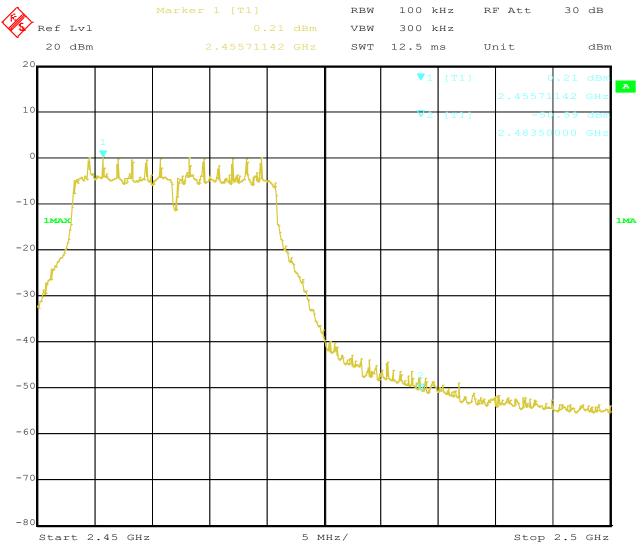

Date: 25.FEB.2022 09:52:34

Page 75 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




## For 802.11n (HT40) mode

CH03 at msc0

## **10.4** Band-edge and Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

# **Test Figure:**

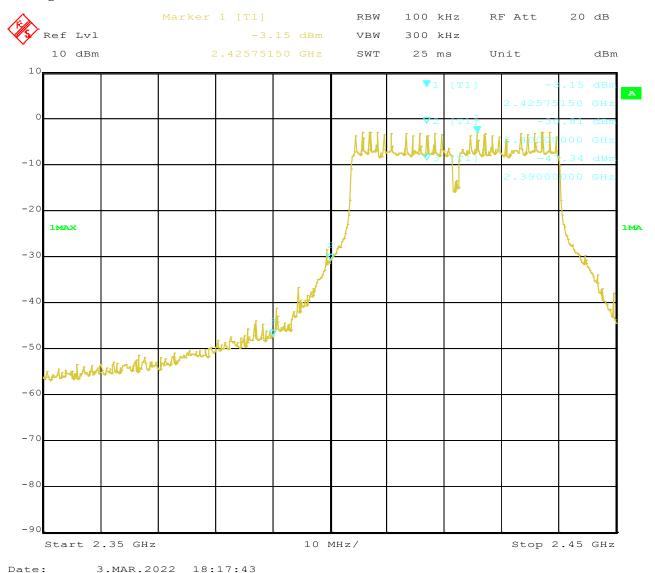

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 76 of 87

Report No.: TW2202033-03E

Date: 2022-03-03




### CH09 at msc0

### 10.4 Band-edge and Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +	Model	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module		
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

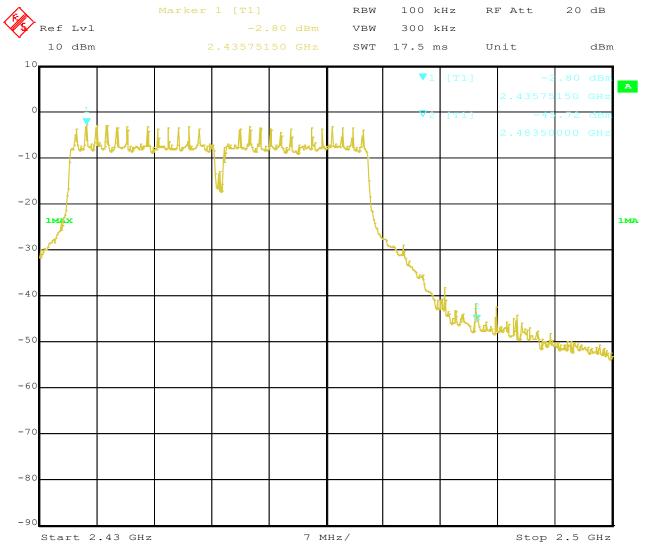

Date: 3.MAR.2022 18:17:00

Page 77 of 87 Report No.: TW2202033-03E

Date: 2022-03-03



#### 10.5 Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +			Mod	del	BL-M7663BU4	
	Bluetooth v5.1 USB Combo Module						
Mode	Keej	Keeping Transmitting			oltage	DC5.0V	
Temperature		24 deg. C,		Humi	idity	56% RH	
Test Result:	Pass			Dete	ctor	PK	
	802.11b mode, Low Channel				1		
2390	PK (dBμV/m)	62.53	_	::4		$74(dB\mu V/m)$	
	AV (dBμV/m)	42.96		imit		54(dBµV/m)	
		802.11b mod	e, Vertic	cal			
2390	PK (dBμV/m)	60.08		::4	$74(dB\mu V/m)$		
	AV (dBμV/m)	41.25	] <u>L</u>	imit		54(dBµV/m)	

10.5 Restricted	bana wicasaremen						
EUT	IEEE 802.11a/	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +				BL-M7663BU4	
	Bluetooth v	le					
Mode	Keeping Transmitting			Test Voltage		DC5.0V	
Temperature		24 deg. C,			dity	56% RH	
Test Result:	Pass			Dete	ctor	PK	
802.11b mode, High Channel, Horizontal							
2483.5	PK (dBμV/m)	60.87		<b>T</b> • • •		74(dBµV/m)	
	AV (dBμV/m)	40.33		Limit		54(dBμV/m)	
		802.11b mode, High	Channe	el, Vertical			
2483.5	PK (dBμV/m) 57.65 74(dBμV					74(dBμV/m)	
	AV (dBμV/m)	39.43		imit		54(dBμV/m)	

Report No.: TW2202033-03E Page 78 of 87

Date: 2022-03-03



#### 10.5 Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +			Mod	del	BL-M7663BU4	
	Bluetooth v5.1 USB Combo Module						
Mode	Keeping Transmitting			Test Vo	oltage	DC5.0V	
Temperature		24 deg. C,		Humi	dity	56% RH	
Test Result:	Pass			Dete	ctor	PK	
	802.11g mode, Low Channel				1		
2390	PK (dBμV/m)	65.82	т.	::4		$74(dB\mu V/m)$	
	AV (dBμV/m)	46.71		imit		54(dBµV/m)	
		802.11g mod	e, Vertic	cal			
2390	PK (dBμV/m)	64.02	т	::4	74(dBμV/m)		
	AV (dBμV/m)	44.87		imit		54(dBµV/m)	

10.5 Restricted	bana wieasaremer							
EUT	IEEE 802.11a/	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +				BL-M7663BU4		
	Bluetooth v	5.1 USB Combo Modu	le					
Mode	Kee		Test Voltage		DC5.0V			
Temperature		24 deg. C,			dity	56% RH		
Test Result:	Pass			Dete	ctor	PK		
802.11g mode, High Channel, Horizontal								
2483.5	PK (dBμV/m)	67.59		*		74(dBμV/m)		
	AV (dBμV/m)	48.13		Limit		54(dBμV/m)		
		802.11g mode, High	Channe	el, Vertical				
2483.5	PK (dBμV/m) 63.10 74(dBμV/					74(dBμV/m)		
	AV (dBμV/m)	44.76		imit		54(dBμV/m)		

Page 79 of 87 Report No.: TW2202033-03E

Date: 2022-03-03



#### 10.5 Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +			Mo	odel	BL-M7663BU4	
	Bluetooth v5.1 USB Combo Module						
Mode	Keeping Transmitting			Test V	/oltage	DC5.0V	
Temperature		24 deg. C,		Hun	nidity	56% RH	
Test Result:	Pass			Det	ector	PK	
	802.11n HT20 mode, Low Channel				ntal		
2390	PK (dBμV/m)	66.53	т:.	:4		$74(dB\mu V/m)$	
	AV (dBμV/m)	47.35	Lli	mit		54(dBµV/m)	
	8	302.11n HT20 mode, Lo	ow Chan	nel, Verti	cal		
2390	PK (dBμV/m)	64.18	т:.	:4	74(dBμV/m)		
	AV (dBμV/m)	45.22		mit		54(dBµV/m)	

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +			M	odel	BL-M7663BU4
	Bluetooth v5.1 USB Combo Module					
Mode	Ke	Keeping Transmitting			Voltage	DC5.0V
Temperature		24 deg. C,		Hur	nidity	56% RH
Test Result:	Pass			Det	ector	PK
	802.11n HT20 mode, High Chann					
2483.5	PK (dBµV/m)	68.18	T :			$74(dB\mu V/m)$
	AV (dBμV/m)	49.03	Limi	IT		$54(dB\mu V/m)$
	8	302.11n HT20 mode, Hi	igh Channe	l, Verti	cal	
2483.5	PK (dBµV/m)	63.25	25			74(dBμV/m)
	AV (dBμV/m)	45.18	Limi	ll		54(dBμV/m)

Page 80 of 87

Report No.: TW2202033-03E


Date: 2022-03-03



### 10.5 Restricted band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN +			M	odel	BL-M7663BU4	
	Bluetooth v5.1 USB Combo Module						
Mode	Keeping Transmitting				Voltage	DC5.0V	
Temperature		24 deg. C,		Huı	nidity	56% RH	
Test Result:		Pass	Pass Detector			PK	
	802.11n HT40 mode, Low Chann				ntal		
2390	PK (dBµV/m)	69.63	т:.	:4		$74(dB\mu V/m)$	
	AV (dBμV/m)	48.29	Lli	mit		54(dBμV/m)	
	8	302.11n HT40 mode, L	ow Chan	nel Vertic	al		
2390	PK (dBμV/m)	69.81	Τ.:.	:4	74(dBμV/m)		
	AV (dBμV/m)	48.36		mit		54(dBμV/m)	

## **Test Plots**

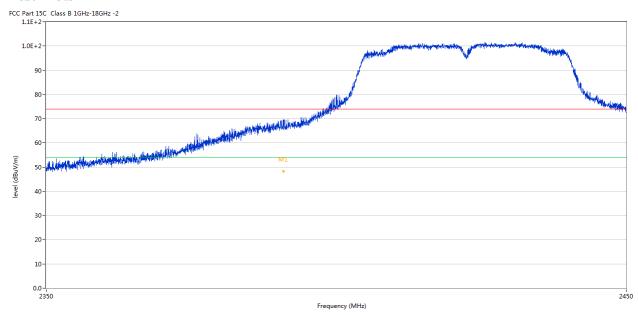

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2390.365	69.63	-3.53	74.0	-4.37	Peak	189.00	100	Horizontal	Pass
1**	2390.365	48.29	-3.53	54.0	-5.71	AV	189.00	100	Horizontal	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 81 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



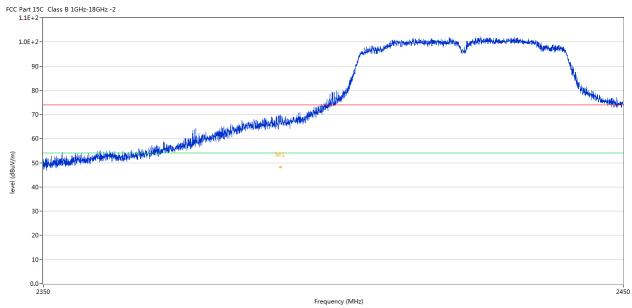

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2390.415	69.81	-3.53	74.0	-4.19	Peak	198.00	100	Horizontal	Pass
1**	2390.415	48.36	-3.53	54.0	-5.64	AV	198.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 82 of 87

Date: 2022-03-03



EUT	IEEE 802.11	a/b/g/n/ac 867Mbps Wl	N	Model (	BL-M7663BU4					
	Bluetooth	v5.1 USB Combo Moo								
Mode	Ke	eeping Transmitting	Test	Voltage	DC5.0V					
Temperature		24 deg. C,	Hu	midity	56% RH					
Test Result:		Pass	De	etector	PK					
802.11n HT40 mode, High Channel, Horizontal										
2483.5	PK (dBμV/m)	72.55		•,	74(dBμV/m)					
	AV (dBμV/m)	50.09	Lim	Limit		54(dBμV/m)				
802.11n HT40 mode, High Channel, Vertical										
2483.5	PK (dBμV/m)	65.59	T :	• • •		74(dBμV/m)				
	AV (dBμV/m)	46.10	Limit			54(dBμV/m)				




No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2482.487	72.55	-3.57	74.0	-1.45	Peak	194.00	100	Horizontal	Pass
1**	2482.487	50.09	-3.57	54.0	-3.91	AV	194.00	100	Horizontal	Pass

Report No.: TW2202033-03E Page 83 of 87

Date: 2022-03-03



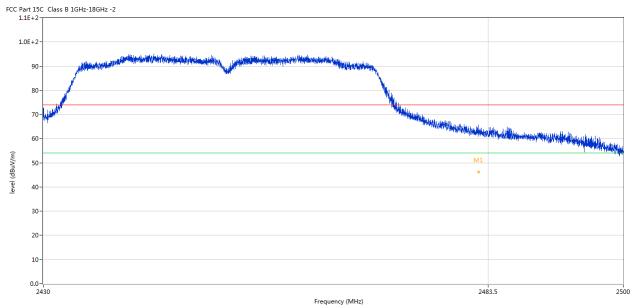

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2482.347	65.59	-3.57	74.0	-8.41	Peak	156.00	100	Vertical	Pass
1**	2482.347	46.10	-3.57	54.0	-7.90	AV	156.00	100	Vertical	Pass

Report No.: TW2202033-03E

Date: 2022-03-03



Page 84 of 87

## 11.0 Antenna Requirement

## 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

Two PIFA antennas used. The gain of the antennas is 2.0dBi maximum for each one. (Get from the antenna specification provided the applicant)

Report No.: TW2202033-03E Page 85 of 87

Date: 2022-03-03




## 12.0 FCC ID Label

# FCC ID: 2AL6KBL-M7663BU4

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

## **Mark Location:**

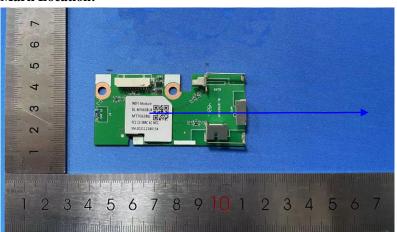

**Label Location** 

Page 86 of 87

Report No.: TW2202033-03E

Date: 2022-03-03



### 13.0 **Photo of testing**

Conducted Emission Test Setup:




Report No.: TW2202033-03E

Date: 2022-03-03



## Radiated Emission Test Setup:

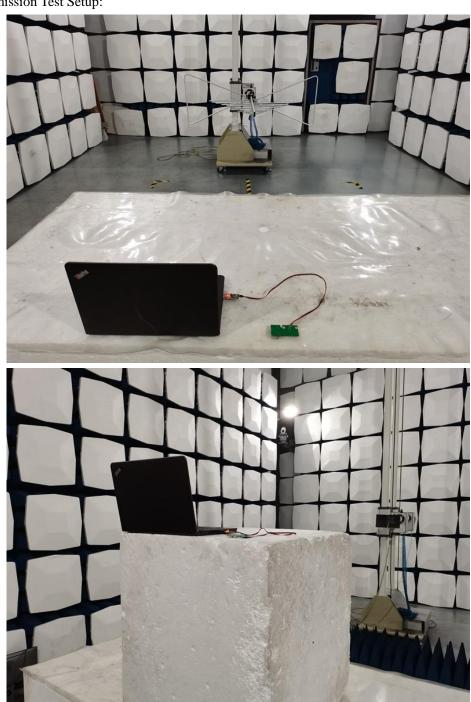

# Photographs - EUT

Please refer test report TW2202033-01E

# -End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

adopt any other remedies which may be appropriate.