

T06_802.11b_CH1_Horizontal-Down_0.5cm

DUT: Dongle;

Communication System: UID 0, IEEE 802.11b WiFi 2.4GHz (DSSS,1Mbps) (0); Frequency: 2412 MHz;
Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 51.806$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2°C ; Liquid Temperature : 22.5°C

DASY Configuration:

- Probe: ES3DV3 - SN3162; ConvF(4.3, 4.3, 4.3) @ 2412 MHz; Calibrated: 2019/4/12
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1405; Calibrated: 2019/2/26
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x11x1): Interpolated grid: $dx=12 \text{ mm}$, $dy=12 \text{ mm}$

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.61 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.878 W/kg ; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 0.975 W/kg

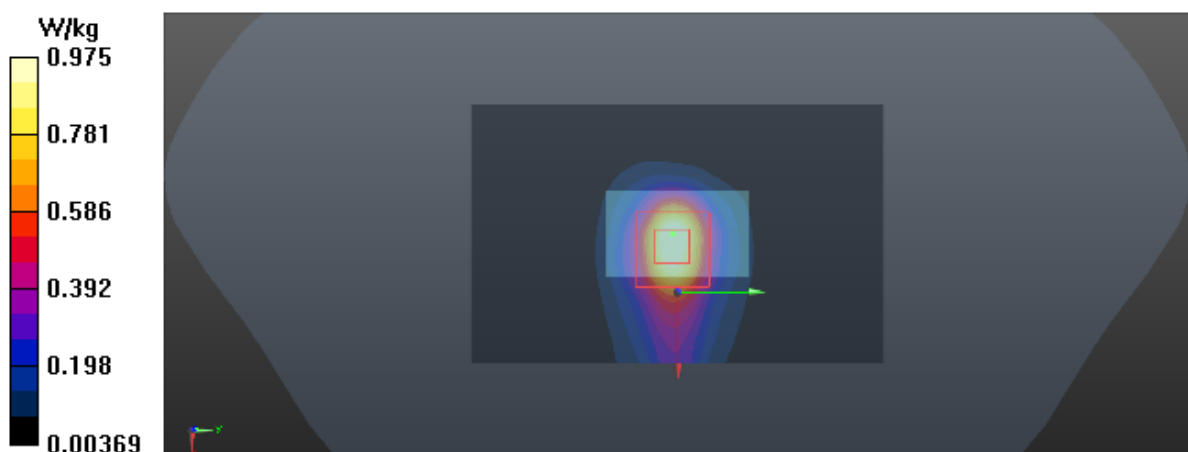

T10_802.11ac80_CH58_Horizontal-Down_0.5cm

DUT: Dongle;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz,64-QAM,99pc duty cycle) (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 5.55 \text{ S/m}$; $\epsilon_r = 47.542$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(5.05, 5.05, 5.05) @ 5290 MHz; Calibrated: 2018/5/29
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn536; Calibrated: 2018/10/15
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 1.49 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.194 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 0.813 W/kg ; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

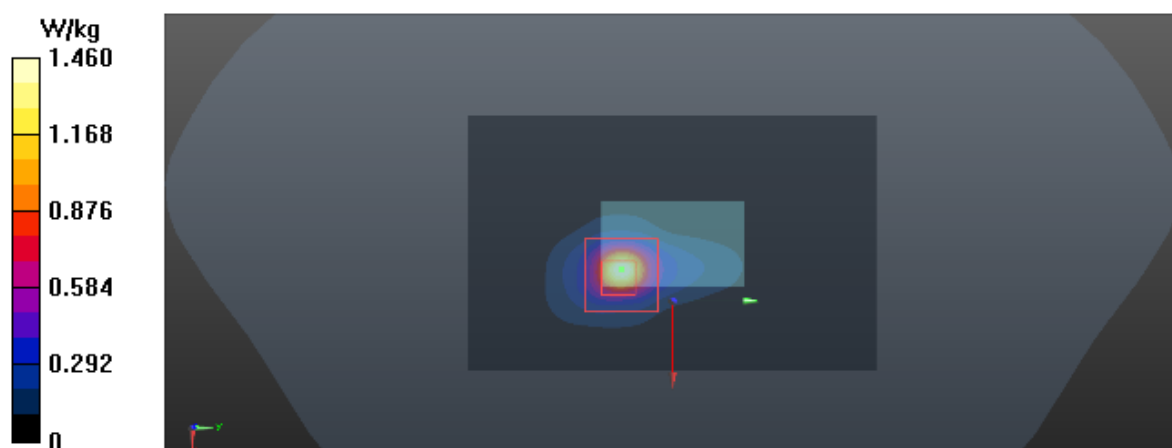

T20_802.11ac80_CH122_Horizontal-Down_0.5cm

DUT: Dongle;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz,64-QAM,99pc duty cycle) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 6 \text{ S/m}$; $\epsilon_r = 46.893$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.38, 4.38, 4.38) @ 5610 MHz; Calibrated: 2018/5/29
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn536; Calibrated: 2018/10/15
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 1.88 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.410 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.70 W/kg

SAR(1 g) = 1.08 W/kg ; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 1.97 W/kg

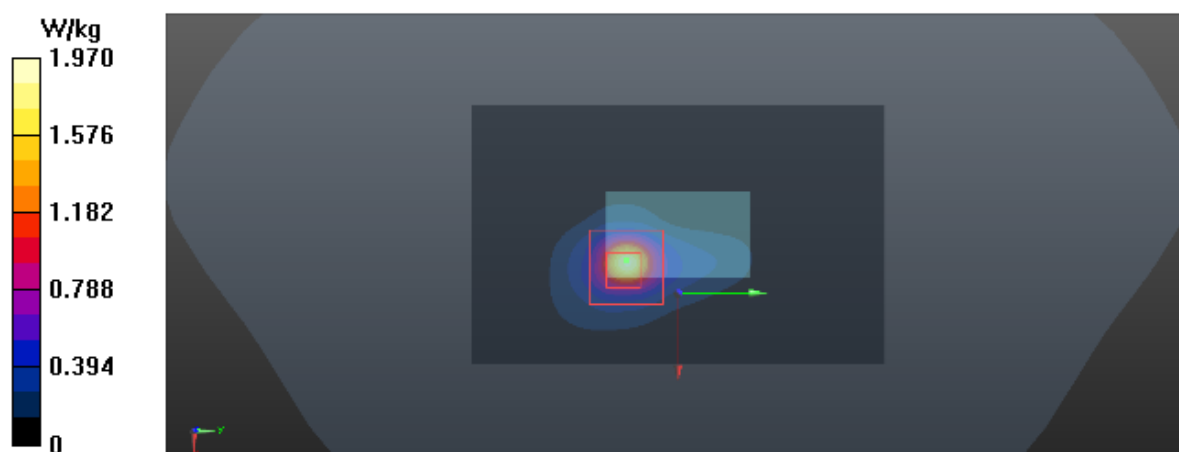

T23_802.11ac80_CH155_Horizontal-Down_0.5cm

DUT: Dongle;

Communication System: UID 0, IEEE 802.11ac WIFI (80MHz,64-QAM,99pc duty cycle) (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 6.228 \text{ S/m}$; $\epsilon_r = 46.603$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1°C ; Liquid Temperature : 22.4°C

DASY Configuration:

- Probe: EX3DV4 - SN7396; ConvF(4.5, 4.5, 4.5) @ 5775 MHz; Calibrated: 2018/5/29
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE3 Sn536; Calibrated: 2018/10/15
- Phantom: SAM Right; Type: Twin SAM; Serial: 1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 1.93 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.522 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 4.87 W/kg

SAR(1 g) = 0.962 W/kg ; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

