



## 7.7.2 SISO Antenna-2 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

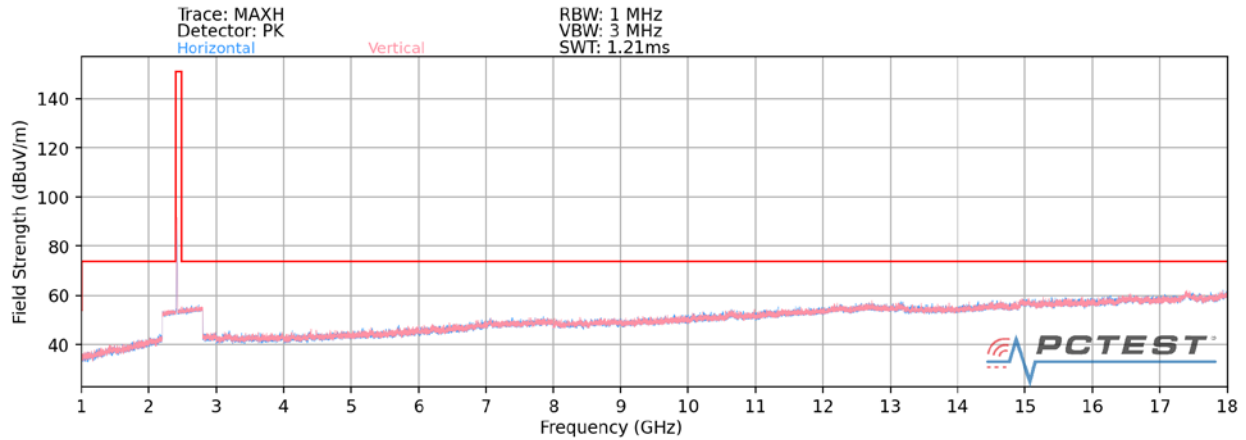

**Plot 7-92. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)**

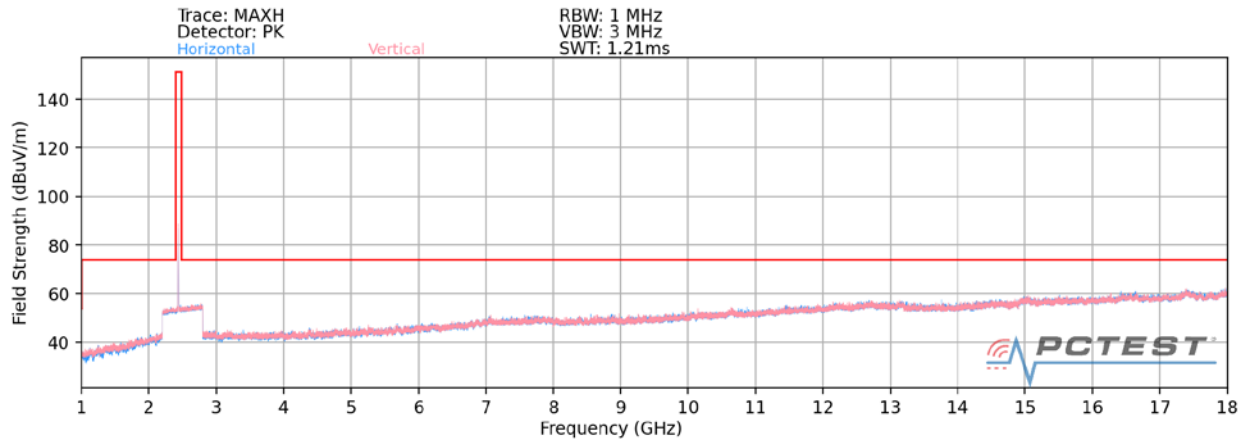

**Plot 7-93. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)**

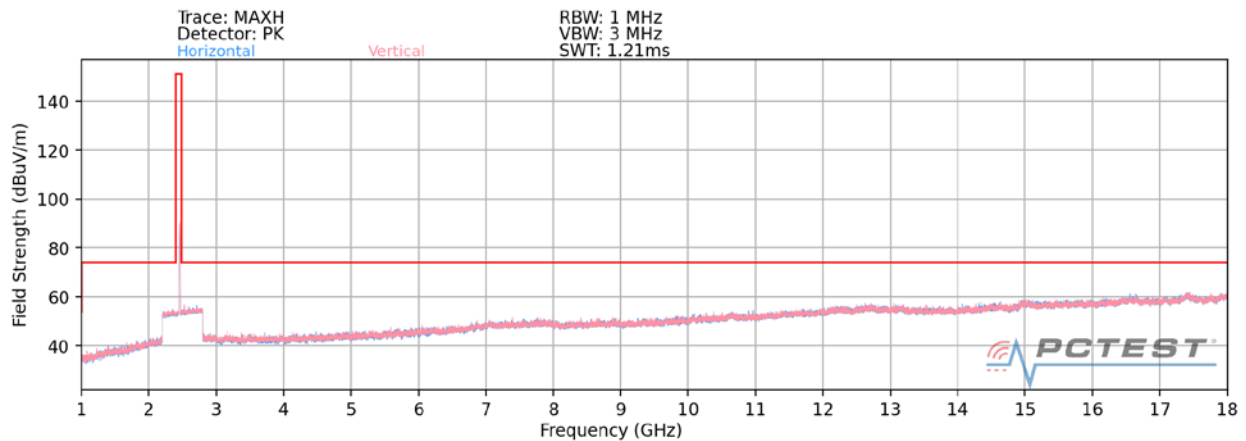


**Plot 7-94. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 78 of 98

## SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

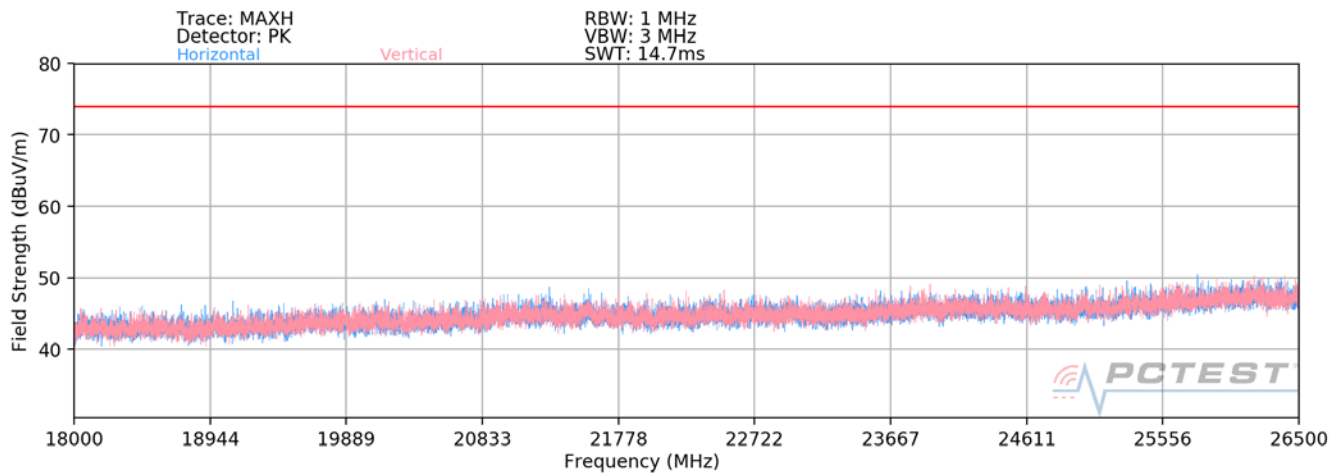

**Plot 7-95. Radiated Spurious Plot above 18GHz SISO ANT2**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 79 of 98

## SISO Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4824.00	Avg	V	-	-	-79.94	6.64	33.70	53.98	-20.27
4824.00	Peak	V	-	-	-68.17	6.64	45.47	73.98	-28.50
12060.00	Avg	V	-	-	-82.21	18.57	43.36	53.98	-10.62
12060.00	Peak	V	-	-	-69.50	18.57	56.07	73.98	-17.91

Table 7-17. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4874.00	Avg	V	-	-	-80.16	7.36	34.20	53.98	-19.78
4874.00	Peak	V	-	-	-68.56	7.36	45.80	73.98	-28.18
7311.00	Avg	V	-	-	-80.60	12.48	38.88	53.98	-15.10
7311.00	Peak	V	-	-	-68.98	12.48	50.50	73.98	-23.48
12185.00	Avg	V	-	-	-82.27	19.14	43.87	53.98	-10.11
12185.00	Peak	V	-	-	-70.57	19.14	55.57	73.98	-18.41

Table 7-18. Radiated Measurements SISO ANT2

FCC ID: PY7-95324M		MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07-PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 80 of 98

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	-	-	-80.02	7.43	34.41	53.98	-19.57
4924.00	Peak	V	-	-	-67.88	7.43	46.55	73.98	-27.43
7386.00	Avg	V	-	-	-80.78	12.73	38.95	53.98	-15.03
7386.00	Peak	V	-	-	-68.77	12.73	50.96	73.98	-23.02
12310.00	Avg	V	-	-	-82.44	19.24	43.80	53.98	-10.18
12310.00	Peak	V	-	-	-71.15	19.24	55.09	73.98	-18.89

**Table 7-19. Radiated Measurements SISO ANT2**


FCC ID: PY7-95324M		MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 81 of 98

### 7.7.3 CDD Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

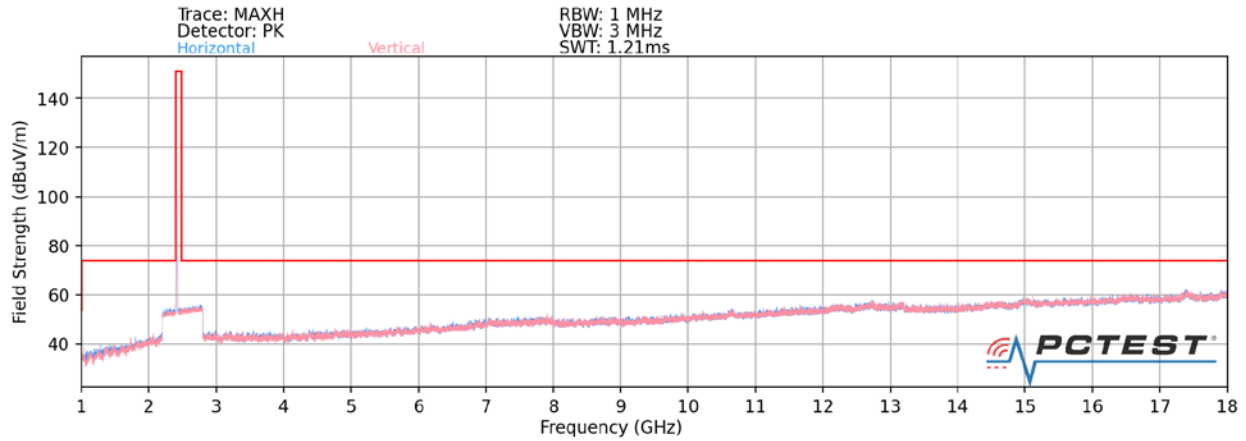

Plot 7-96. Radiated Spurious Plot above 1GHz CDD (802.11b – Ch. 1)

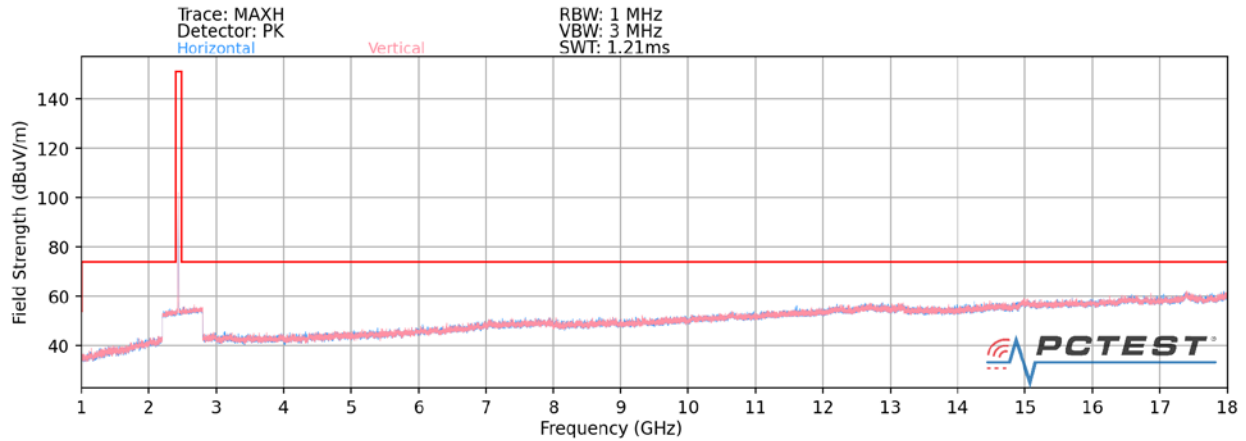

Plot 7-97. Radiated Spurious Plot above 1GHz CDD (802.11b – Ch. 6)

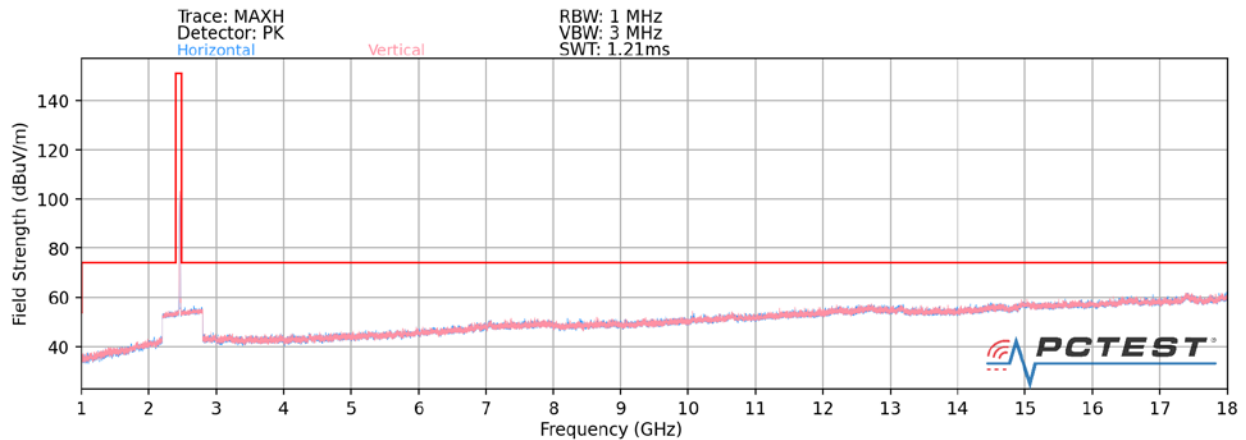


Plot 7-98. Radiated Spurious Plot above 1GHz CDD (802.11b – Ch. 11)

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 82 of 98

## CDD Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]

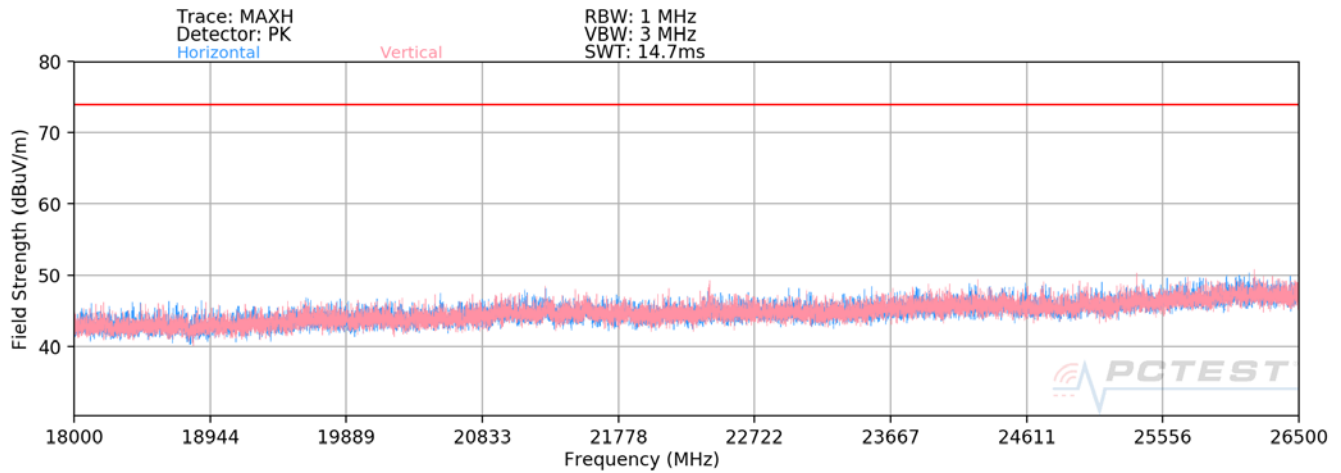

**Plot 7-99. Radiated Spurious Plot above 18GHz CDD**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 83 of 98

## CDD Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2412MHz  
Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	V	102	1	-76.65	6.64	36.99	53.98	-16.98
4824.00	Peak	V	102	1	-67.88	6.64	45.76	73.98	-28.21
12060.00	Avg	V	-	-	-82.28	18.57	43.29	53.98	-10.69
12060.00	Peak	V	-	-	-70.40	18.57	55.17	73.98	-18.81

Table 7-20. Radiated Measurements CDD

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2437MHz  
Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	V	100	353	-77.75	7.36	36.61	53.98	-17.37
4874.00	Peak	V	100	353	-67.84	7.36	46.52	73.98	-27.46
7311.00	Avg	V	-	-	-80.61	12.48	38.87	53.98	-15.11
7311.00	Peak	V	-	-	-69.02	12.48	50.46	73.98	-23.52
12185.00	Avg	V	-	-	-82.36	19.14	43.78	53.98	-10.20
12185.00	Peak	V	-	-	-70.46	19.14	55.68	73.98	-18.30

Table 7-21. Radiated Measurements CDD

FCC ID: PY7-95324M		MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07-PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 84 of 98

Worst Case Mode: 802.11g  
Worst Case Transfer Rate: 6 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	Avg	V	101	346	-75.79	7.43	38.64	53.98	-15.34
4924.00	Peak	V	101	346	-67.37	7.43	47.06	73.98	-26.92
7386.00	Avg	V	-	-	-80.80	12.73	38.93	53.98	-15.05
7386.00	Peak	V	-	-	-68.60	12.73	51.13	73.98	-22.85
12310.00	Avg	V	-	-	-82.45	19.24	43.79	53.98	-10.19
12310.00	Peak	V	-	-	-70.18	19.24	56.06	73.98	-17.92

**Table 7-22. Radiated Measurements CDD**

FCC ID: PY7-95324M	 <b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 85 of 98




## 7.7.4 SISO Antenna-1 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

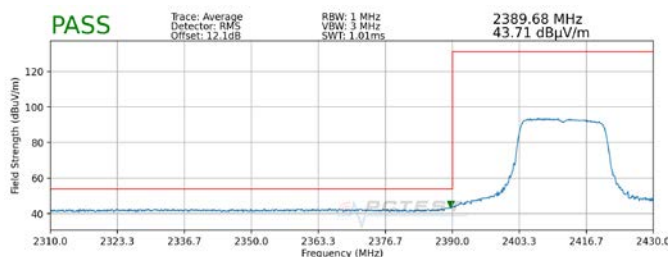


**Plot 7-100. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Average)**

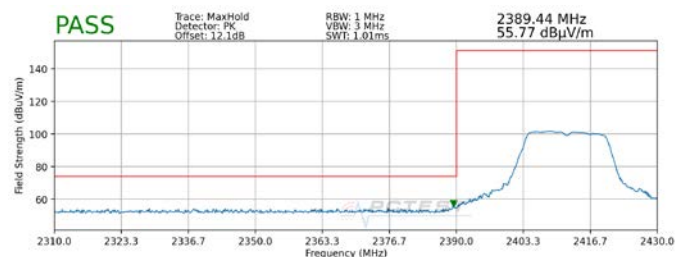


**Plot 7-101. Radiated Restricted Lower Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

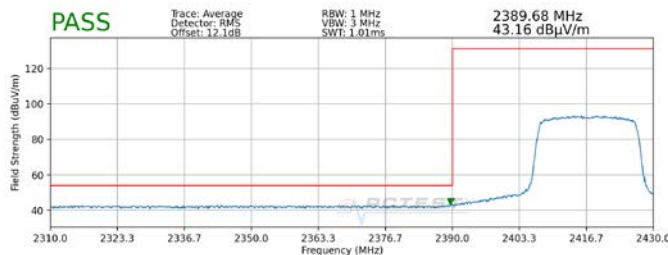


**Plot 7-102. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

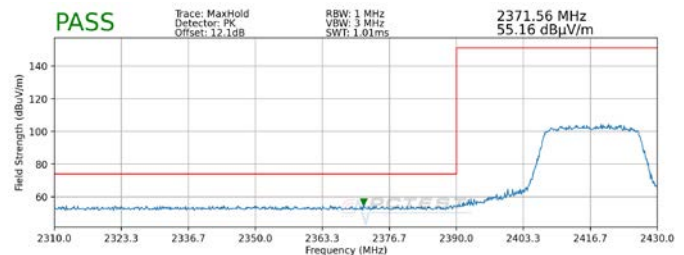


**Plot 7-103. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 86 of 98

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2452MHz  
Channel: 9

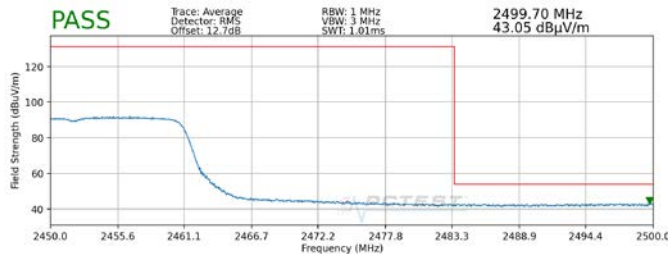


**Plot 7-104. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

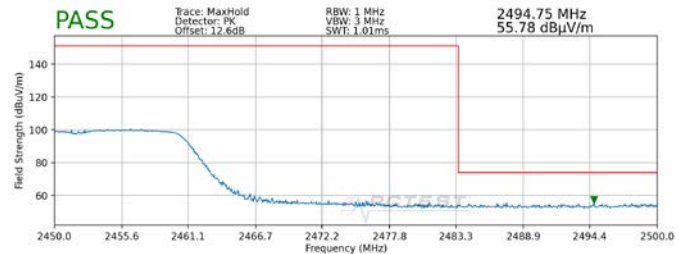


**Plot 7-105. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2457MHz  
Channel: 10

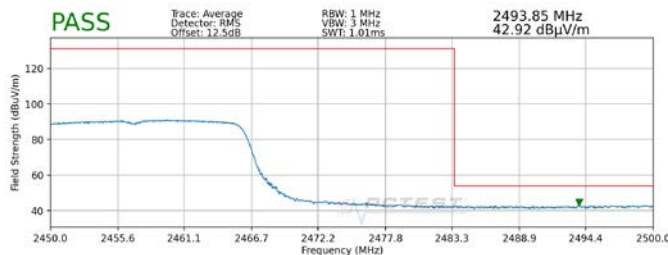


**Plot 7-106. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

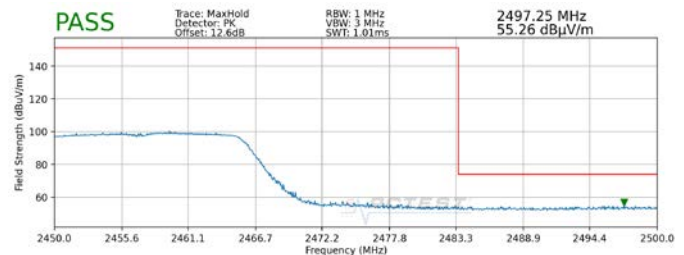


**Plot 7-107. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 87 of 98

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

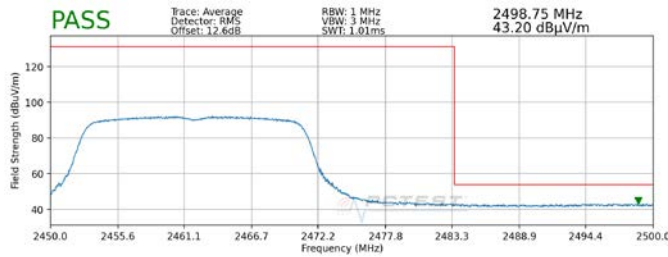

**Plot 7-108. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

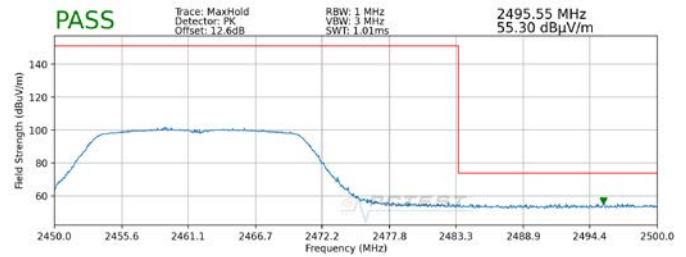

**Plot 7-109. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**


FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 88 of 98

## 7.7.5 SISO Antenna-2 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

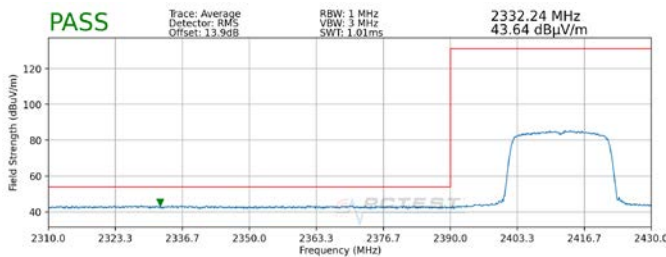


**Plot 7-110. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)**

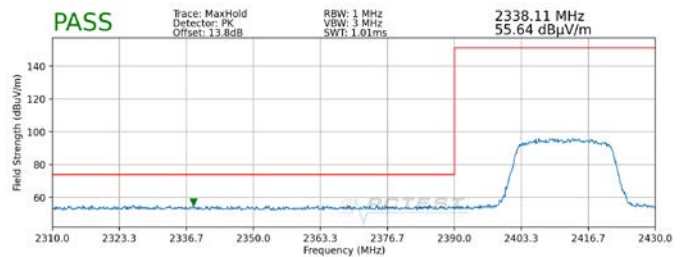


**Plot 7-111. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

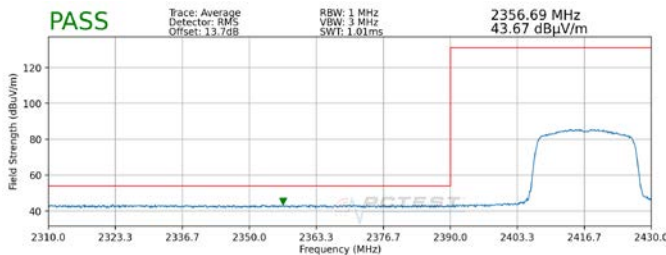


**Plot 7-112. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

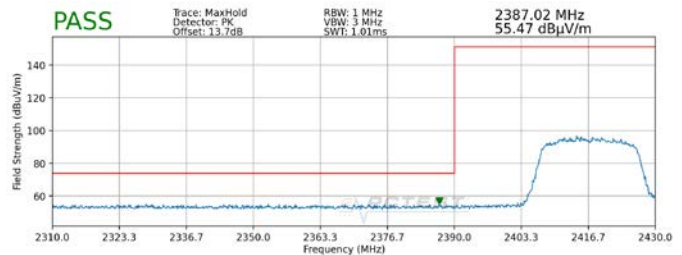


**Plot 7-113. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 89 of 98

Worst Case Mode: 802.11ax  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2452MHz  
Channel: 9

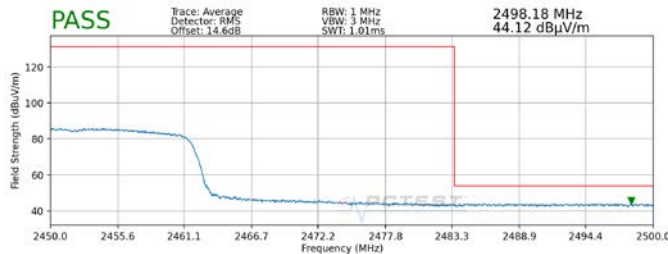


**Plot 7-114. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

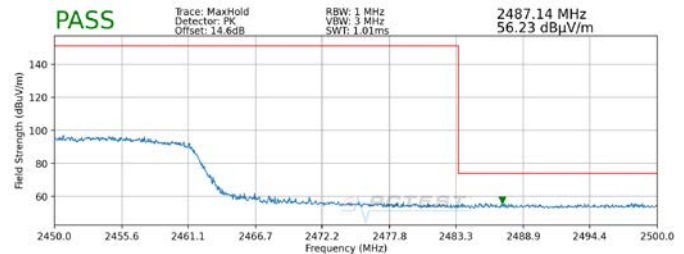


**Plot 7-115. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2457MHz  
Channel: 10

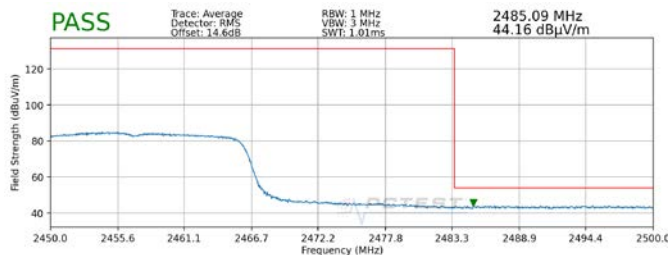


**Plot 7-116. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Average)**

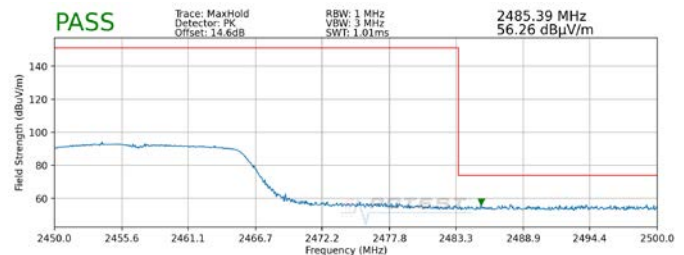


**Plot 7-117. Radiated Restricted Upper Band Edge Measurement SISO ANT1 (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 90 of 98

Worst Case Mode: 802.11n  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

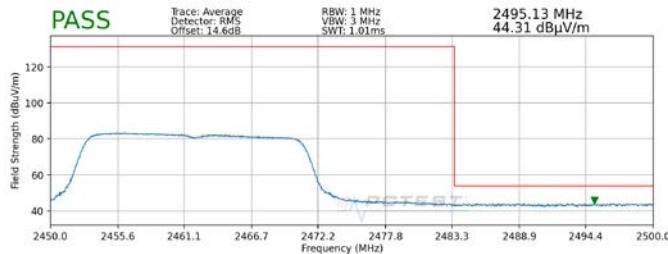

**Plot 7-118. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

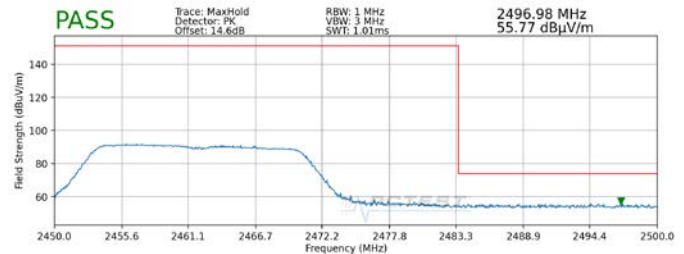

**Plot 7-119. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**


FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 91 of 98

## 7.7.6 MIMO Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

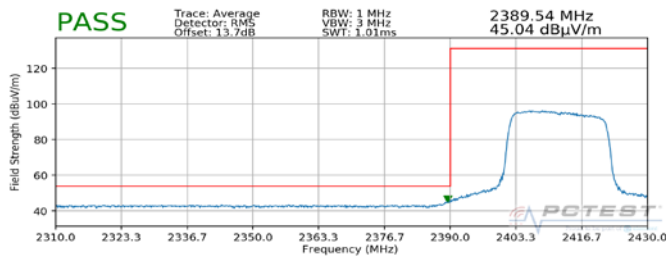


**Plot 7-120. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

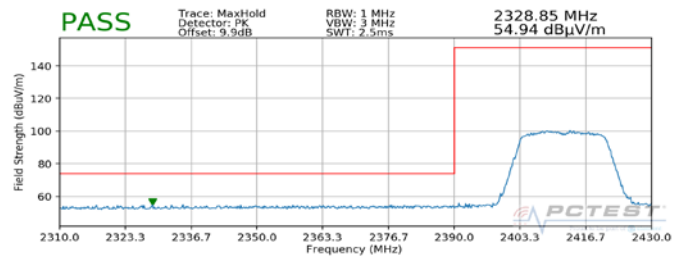


**Plot 7-121. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2417MHz
Channel:	2

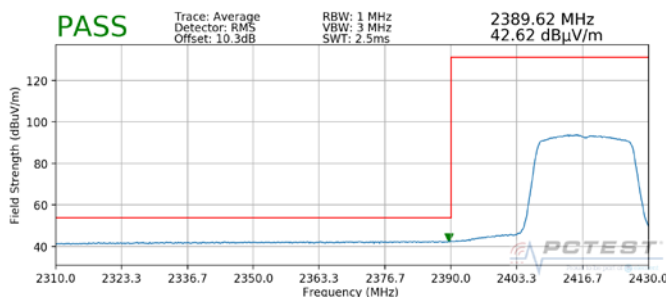


**Plot 7-122. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

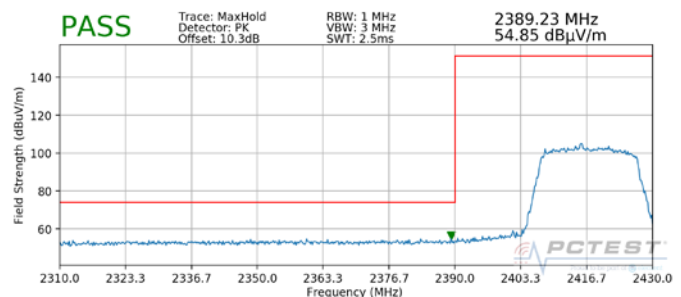


**Plot 7-123. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 92 of 98

Worst Case Mode: 802.11ax  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2452MHz  
Channel: 9

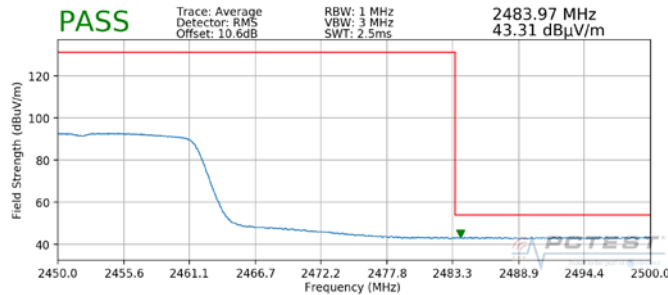


**Plot 7-124. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

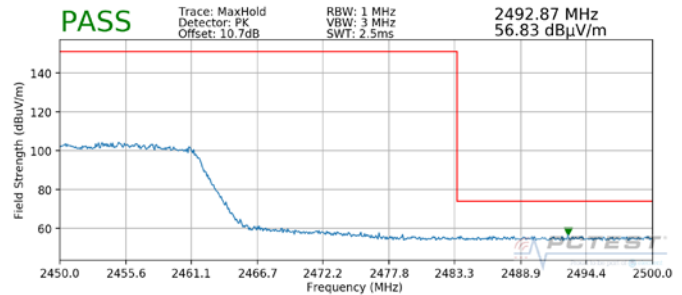


**Plot 7-125. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

Worst Case Mode: 802.11ax  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2457MHz  
Channel: 10

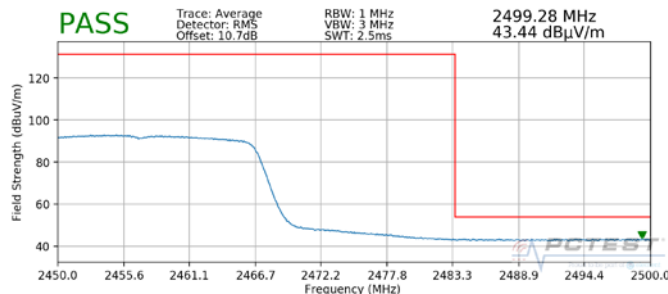

**Plot 7-126. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

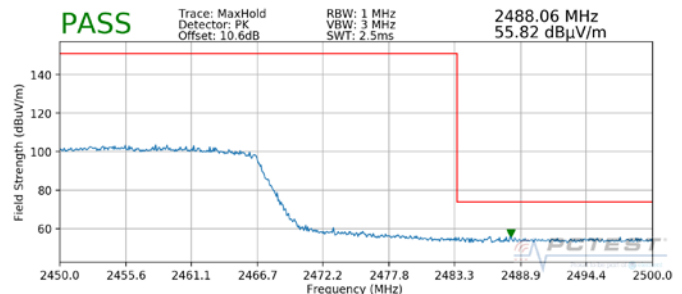


**Plot 7-127. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**


FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 93 of 98



Worst Case Mode: 802.11ax  
Worst Case Transfer Rate: MCS0  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

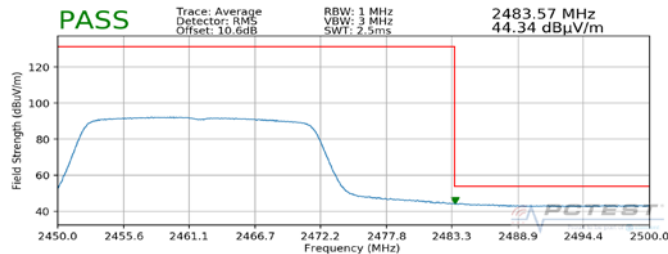

**Plot 7-128. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

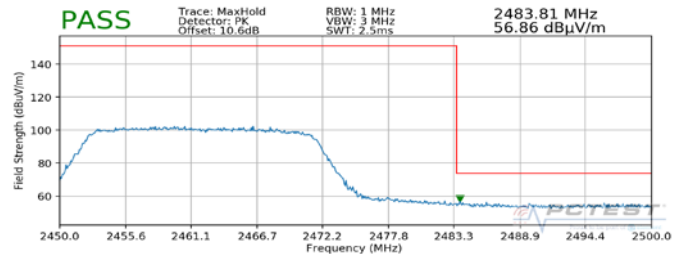

**Plot 7-129. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 94 of 98

## 7.8 Line-Conducted Test Data

### §15.207; RSS-Gen [8.8]

#### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-23. Conducted Limits**

\*Decreases with the logarithm of the frequency.

#### Test Procedures Used

ANSI C63.10-2013, Section 6.2

#### Test Settings

##### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


##### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: PY7-95324M	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07-PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 95 of 98

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

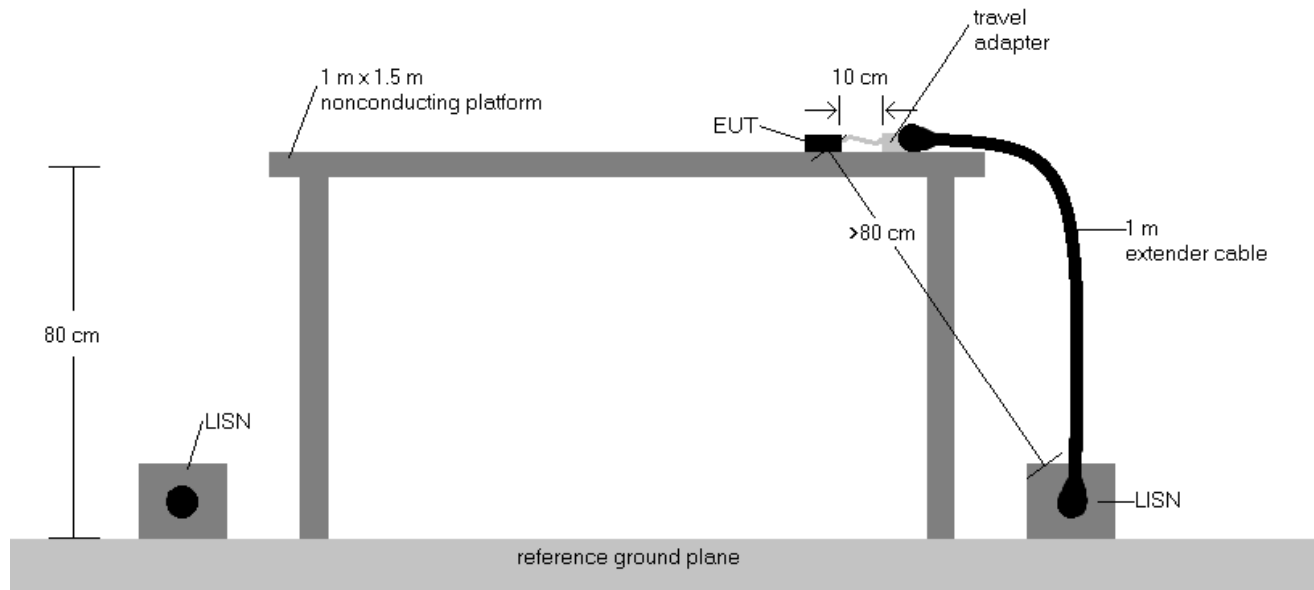


**Figure 7-7. Test Instrument & Measurement Setup**


## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 96 of 98

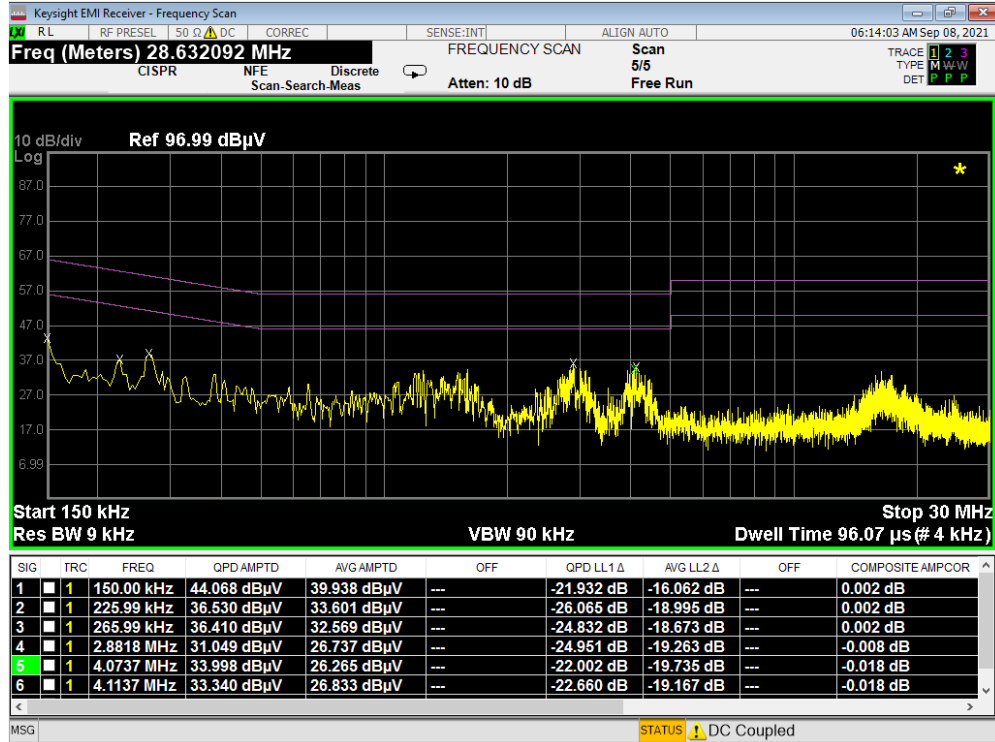

Plot 7-130. Line Conducted Plot with 802.11b (L1)

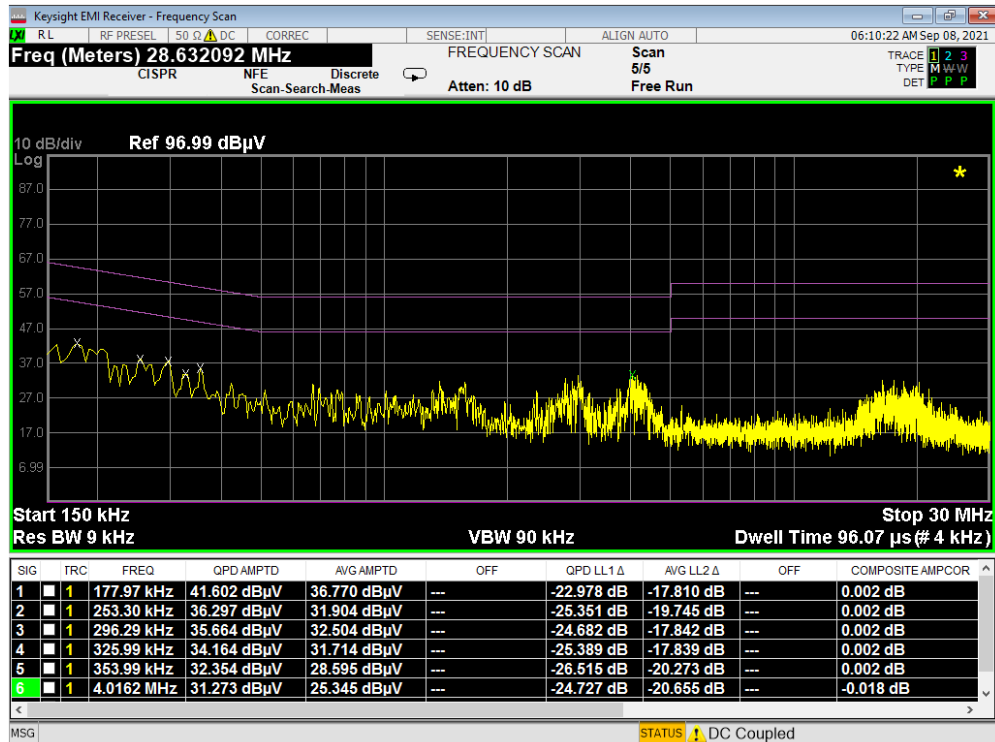

Plot 7-131. Line Conducted Plot with 802.11b (N)

FCC ID: PY7-95324M	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07-PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 97 of 98

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **SONY Portable Handset FCC ID: PY7-95324M** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: PY7-95324M	 <b>PCTEST</b> Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b>	Approved by: Technical Manager
Test Report S/N: 1M2108040087-07.PY7	Test Dates: 8/2/2021 - 9/10/2021	EUT Type: Portable Handset		Page 98 of 98