



**FCC PART 15 SUBPART C
CERTIFICATION REPORT**

FOR

433 MHz WIRELESS REMOTE CONTROL DEVICE

MODEL: EV-F433P

FCC ID NO: QNPEV-F433P

REPORT NO: 04U2637-1

ISSUE DATE: APRIL 8, 2004

Prepared for

**SECURE WIRELESS, INC.
1185 PARK CENTER DRIVE
VISTA, CA. 92083
U.S.A**

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

COMPLIANCE CERTIFICATION SERVICES

**561F MONTEREY ROAD
MORGAN HILL, CA 95037 USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE	3
3. TEST FACILITY	4
4. MEASUREMENT STANDARD	4
5. TEST METHODOLOGY	4
6. MEASUREMENT EQUIPMENT USED	4
7. POWERLINE RFI LIMIT	5
8. RADIATED EMISSION LIMITS	5
9. SYSTEM TEST CONFIGURATION	6
10. TEST PROCEDURE	7
11. EQUIPMENT MODIFICATIONS	8
12. TEST RESULT	9
12.1 MAXIMUM MODULATION PERCENTAGE (M%)	9
12.2 EMISSION BANDWIDTH	9

TEST DATA

- Maximum Modulation Percentage Plot
- Emission Bandwidth Plot
- Radiated Emission Worksheet for Peak Measurement
- Radiated Emission Worksheet for Average Measurement

ATTACHMENT

- EUT Photographs
- Proposed FCC ID Label
- Schematics & Block Diagram
- User Manual

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : SECURE WIRELES SYSTEMS INC.
1185 PARK CENTER DRIVE
VISTA, CA. 92083, USA

EUT DESCRIPTION : 433 MHz WIRELESS REMOTE CONTROL DEVICE
MODEL NO : EV-F433P
FCC ID : QNPEV-F433P
DATE TESTED : April 8, 2004
REPORT NUMBER : 04U2637-1

TYPE OF EQUIPMENT	WIRELESS REMOTE CONTROL
EQUIPMENT TYPE	433.92MHz TRANSMITTER
MEASUREMENT PROCEDURE	ANSI C63.4 / 2001
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:



THANH NGUYEN
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

Approved & Released By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

2. PRODUCT DESCRIPTION

Fundamental Frequency	433.92 MHz
Power Source	6V Battery
Transmitting Time	Periodic \leq 5 seconds
Associated Receiver	NA
Manufacturer	Secure Wireless, Inc.

3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

4. MEASUREMENT STANDARD

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/2001.

5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Bilog Antenna	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	4/25/2004
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	10/1/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	12/26/2004
Spectrum Analyzer	Agilent	E4446A	MY43360112	1/13/2005

7. POWERLINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 150 KHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 - 40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231(b)

9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.



X-Axis



Y-Axis



Z-Axis

Radiated Open Site Test Set-up

10. TEST PROCEDURE

Radiated Emissions, 15.231(4)(b)


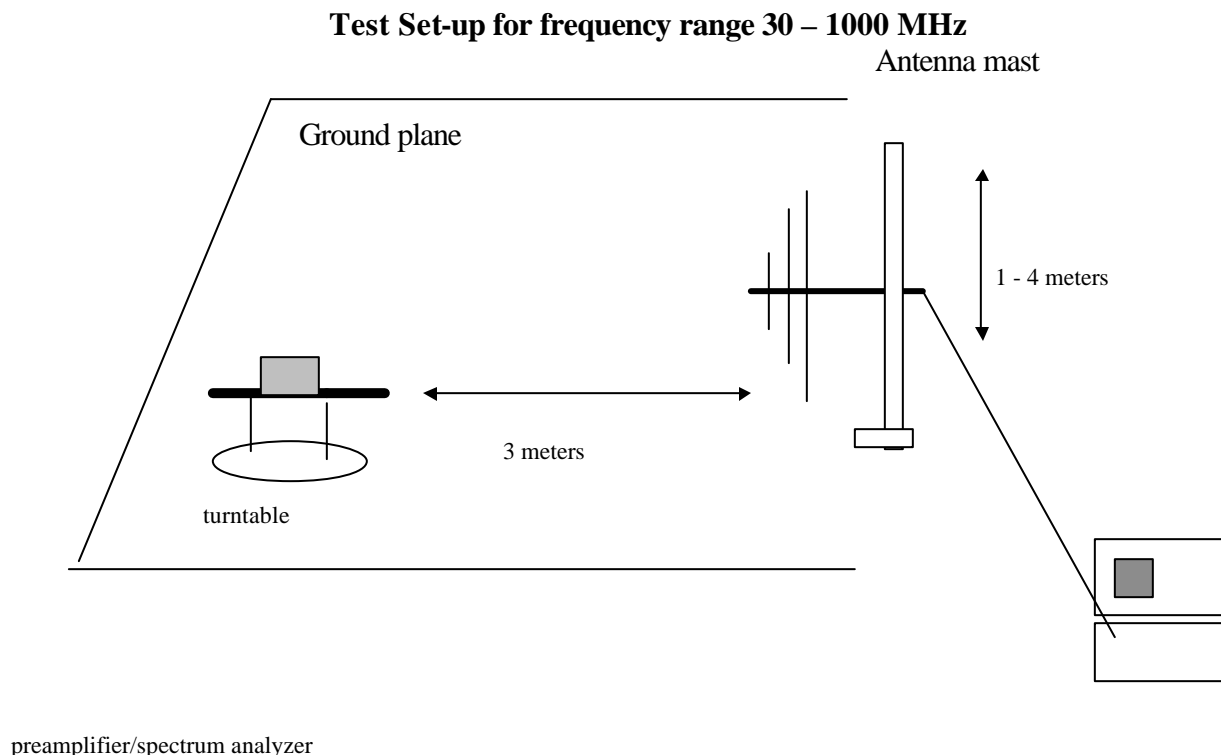


Fig. 1

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

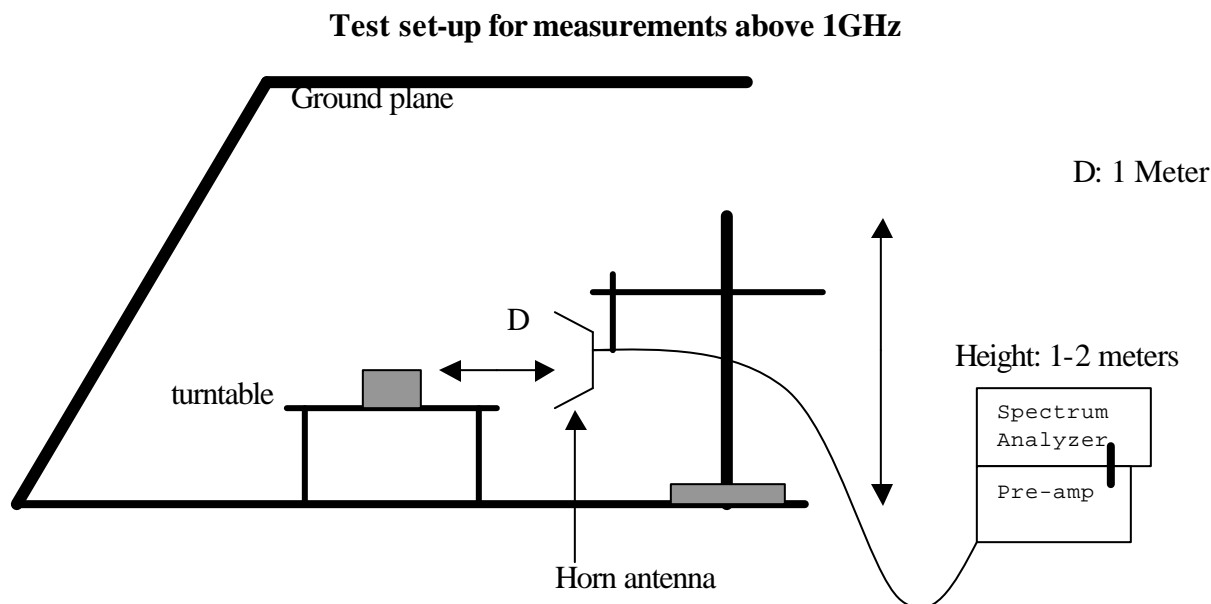

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

11. EUT MODIFICATIONS

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

Changed R2 value from 22K Ohm to 47 K Ohm.

12. TEST RESULT

Powerline RFI Class B	EUT	Radiated Emission Limits	EUT
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	X
BATTERY POWER	X	SECTION 15.231 (b)	X

12.1 MAXIMUM MODULATION PERCENTAGE (M%)

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured:

WHERE 1 Period = 180.8ms
 Long pulse = 2.5 ms
 Medium pulse =0.250
 Short pulse =0.200 ms
 No of Long pulse = 1
 No of Medium pulse =19
 No of Short pulse =7

Duty Cycle = (N1L1+N2L2+...+Nn-1Ln-1+NnLn)/100 or T

Duty Cycle = ((1x2.5)+(19x0.25)+(7x0.200))/100=0.0865=8.65%


For duty cycle refer to plot #1, 2, 3,4, 5.

12.2 EMISSION BANDWIDTH


The bandwidth of the emissions were investigated per 15.231(c)

Center Frequency	Measured	Limits
433.92 MHz	390 KHz (refer to plot)	433.92 x 0.25%= 1.0848MHz


DUTY CYCLE 1

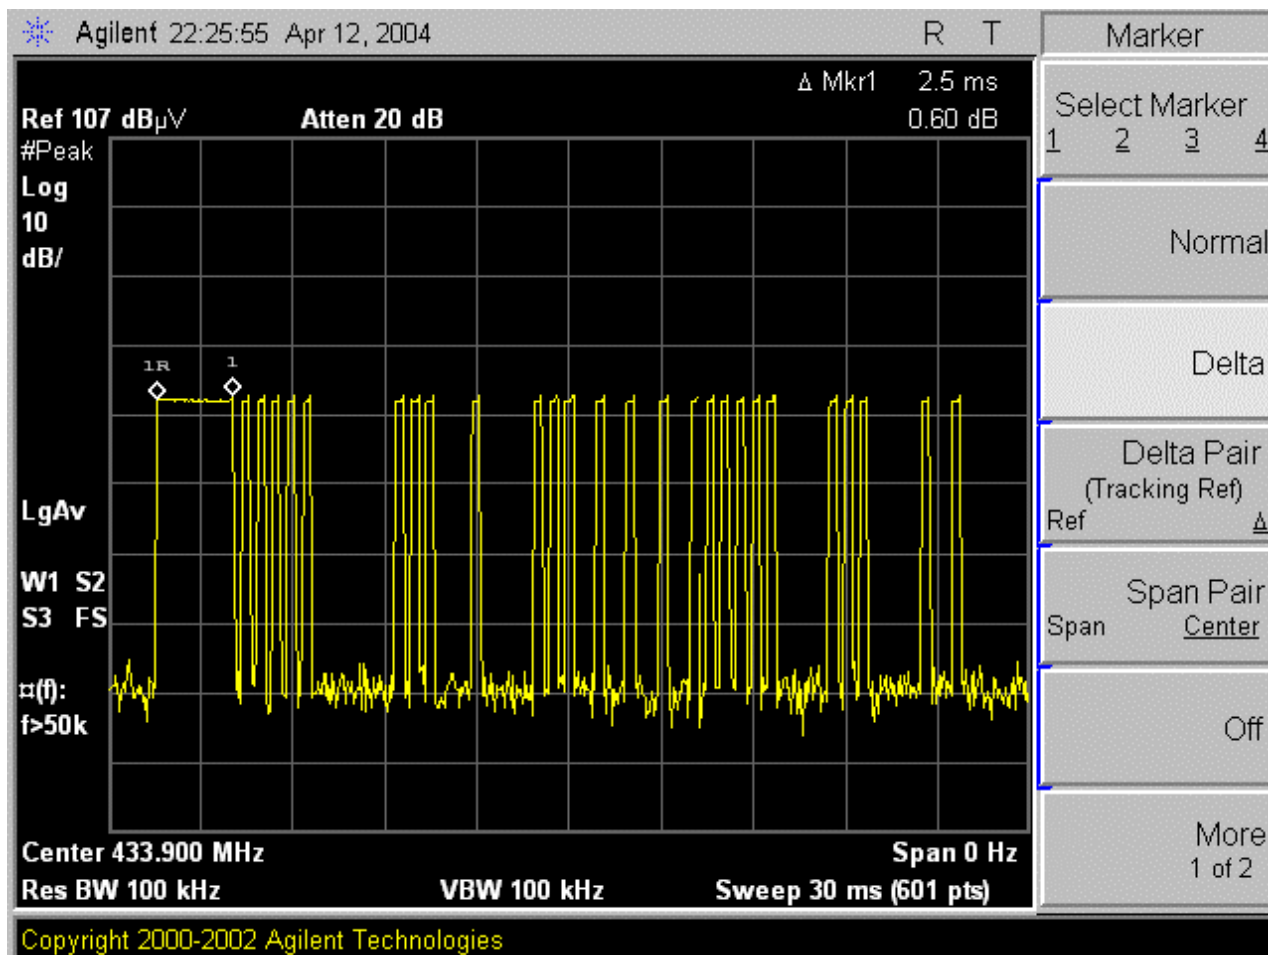


DUTY CYCLE 2

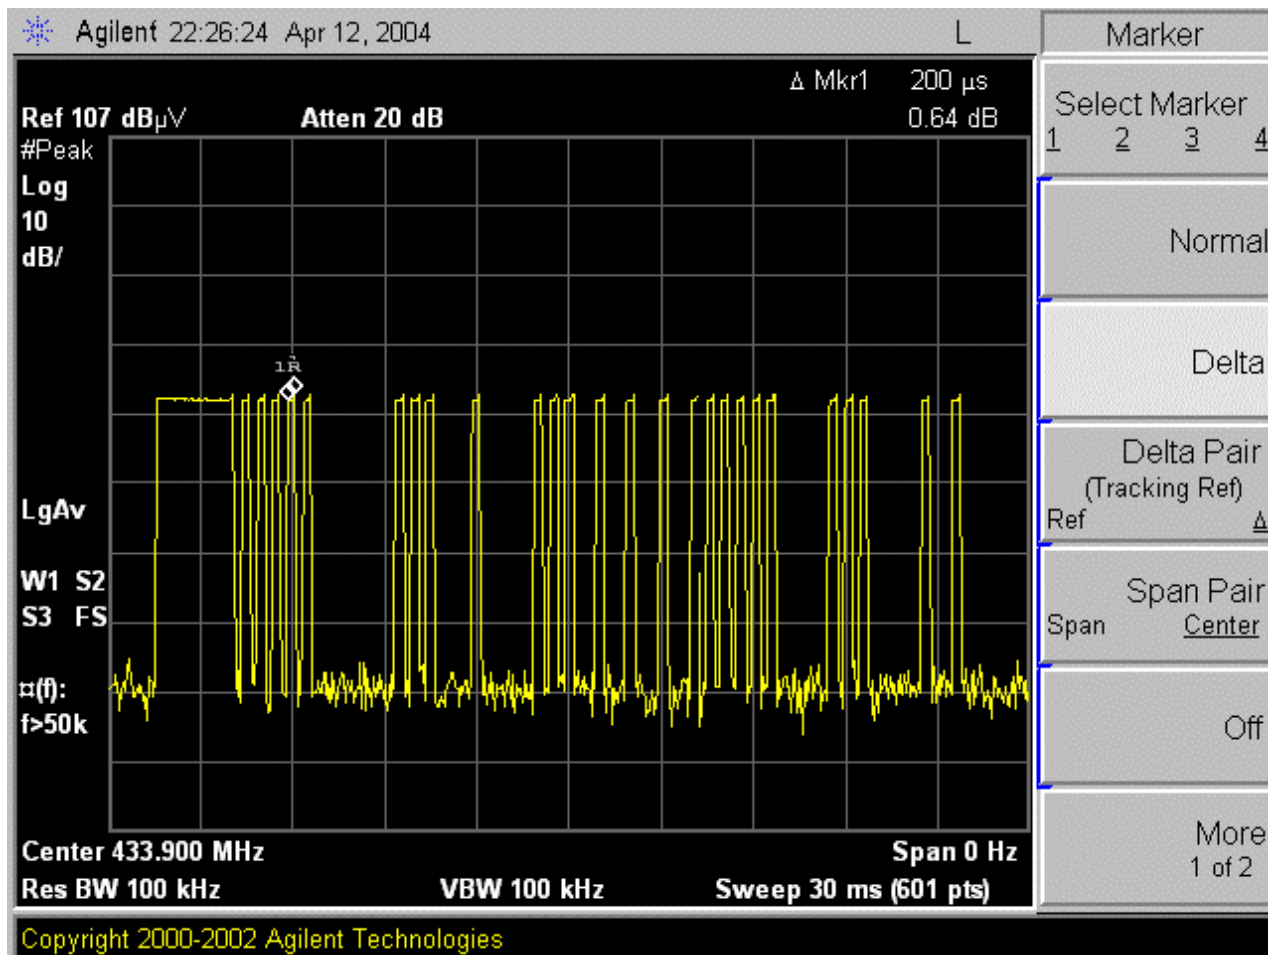


DUTY CYCLE 3

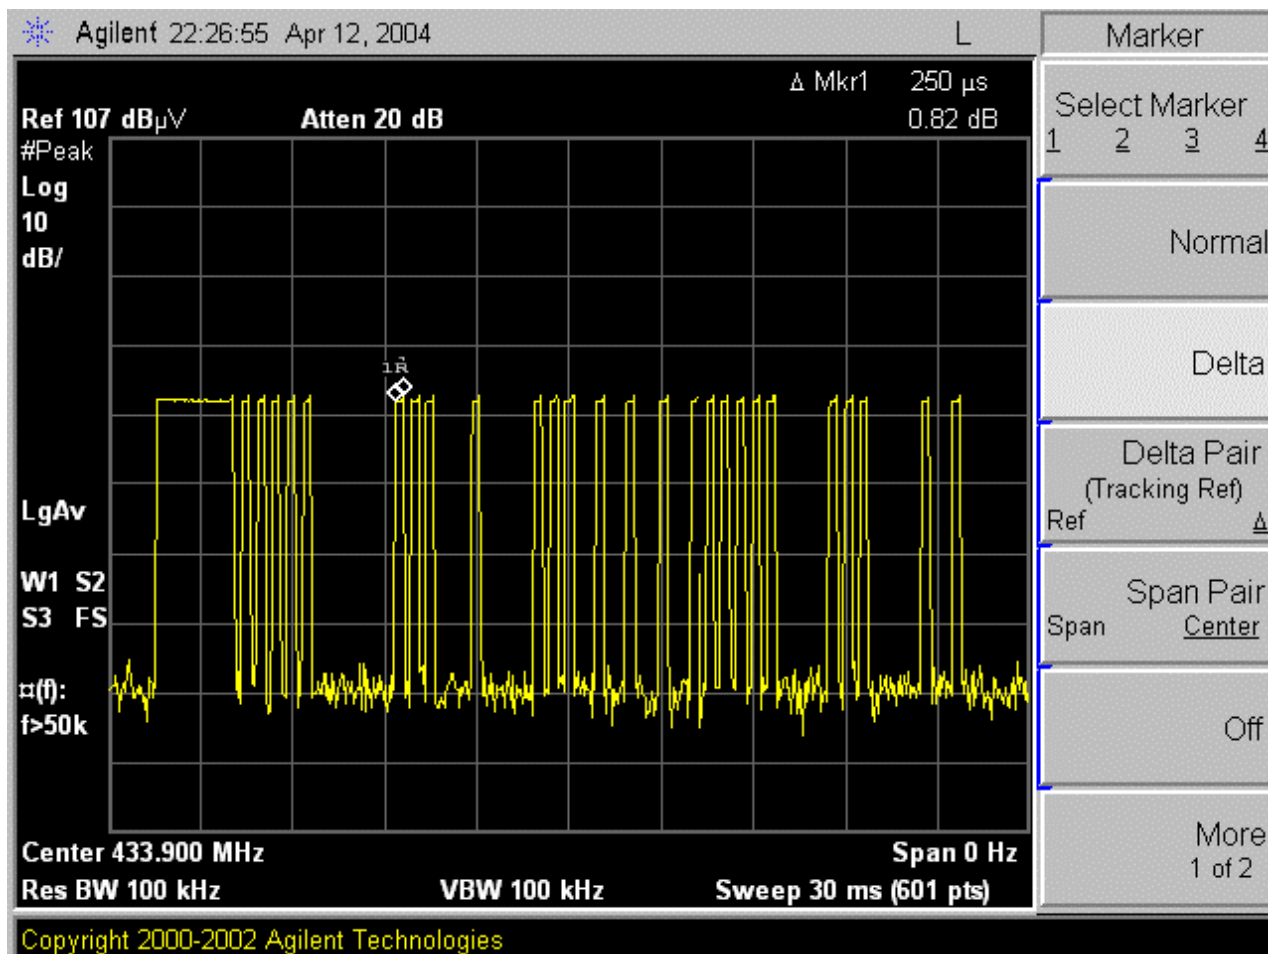


DUTY CYCLE 4

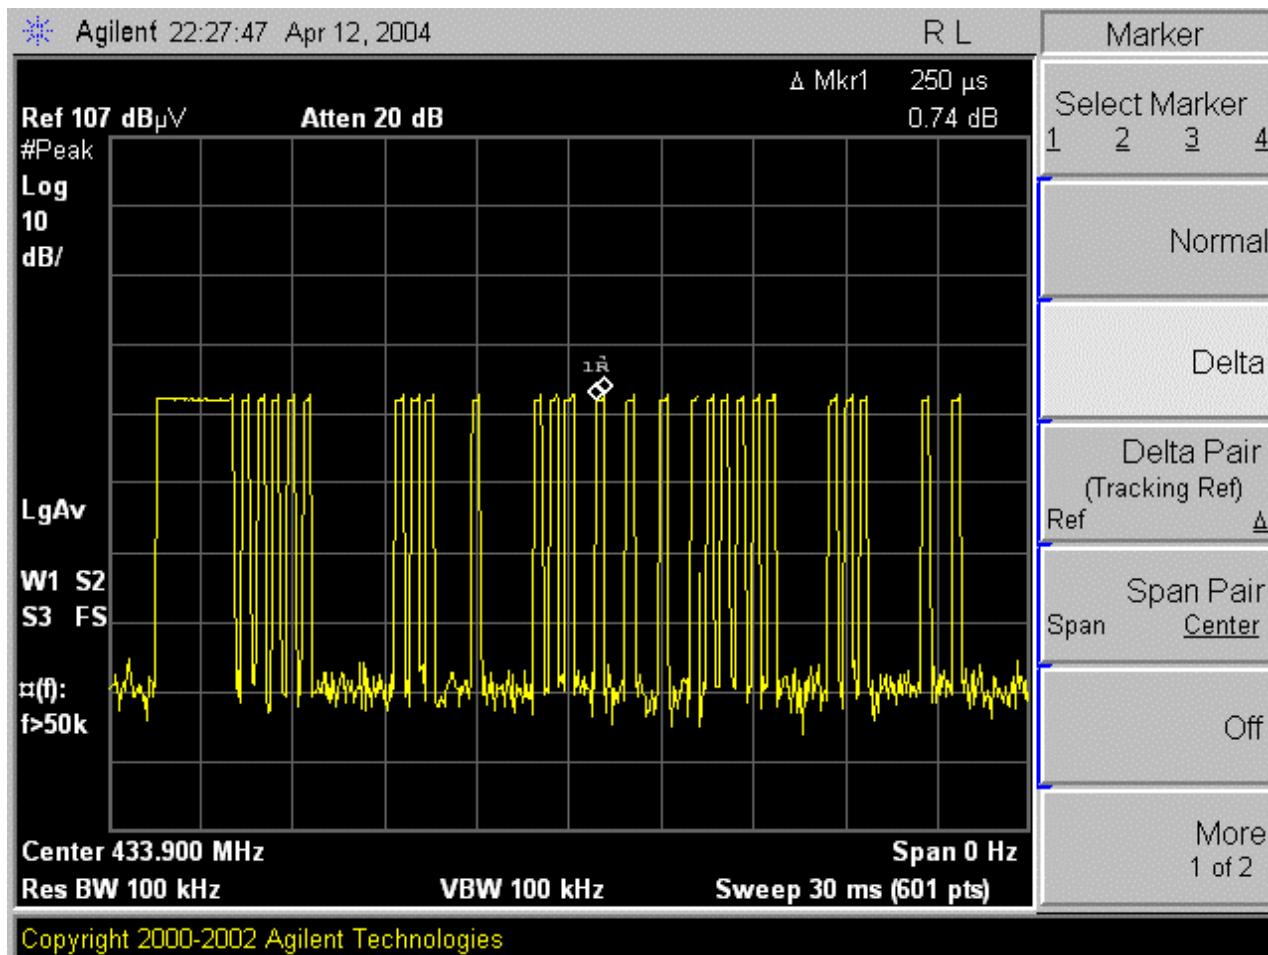


DUTY CYCLE 5

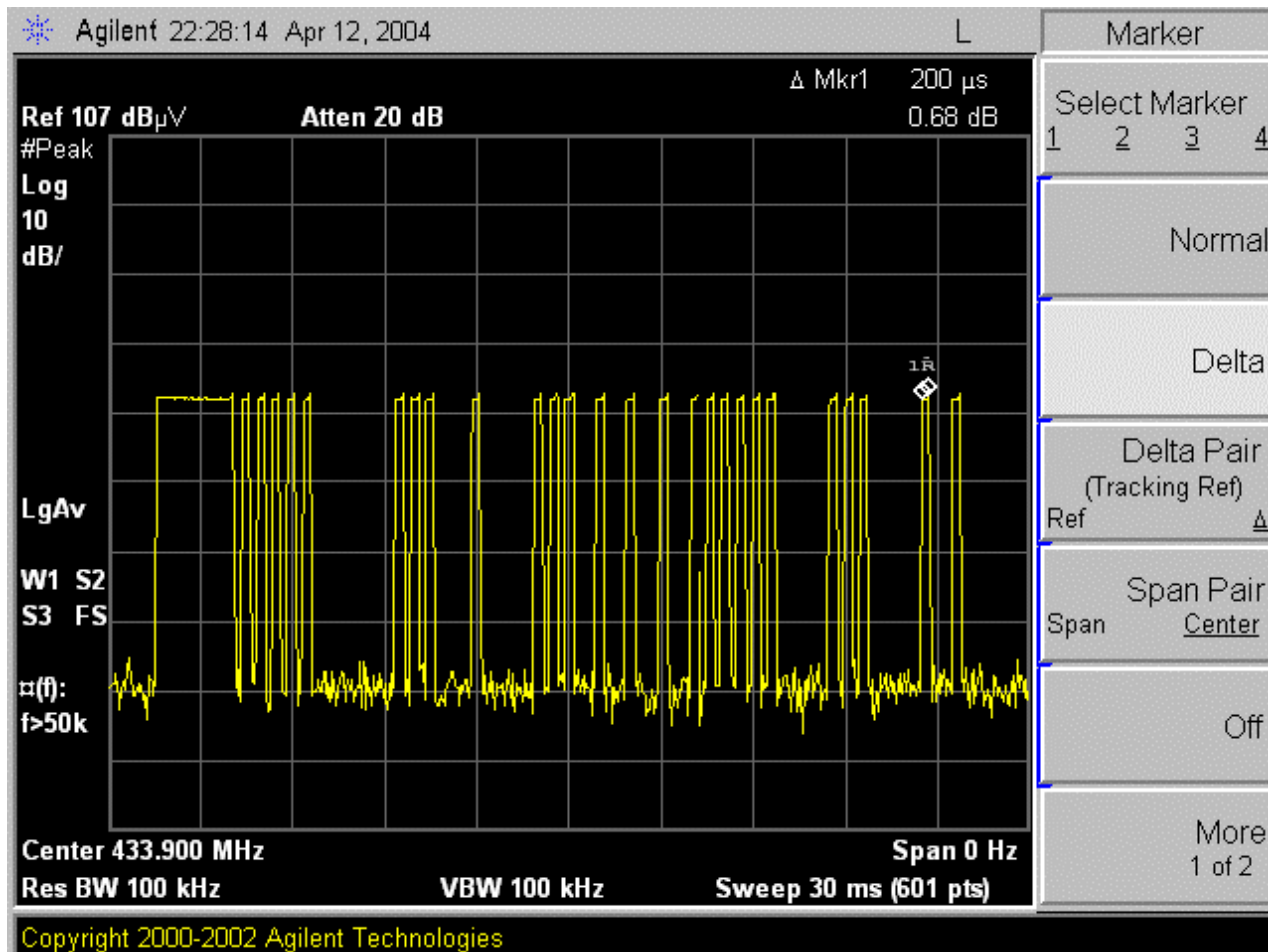


DUTY CYCLE 6

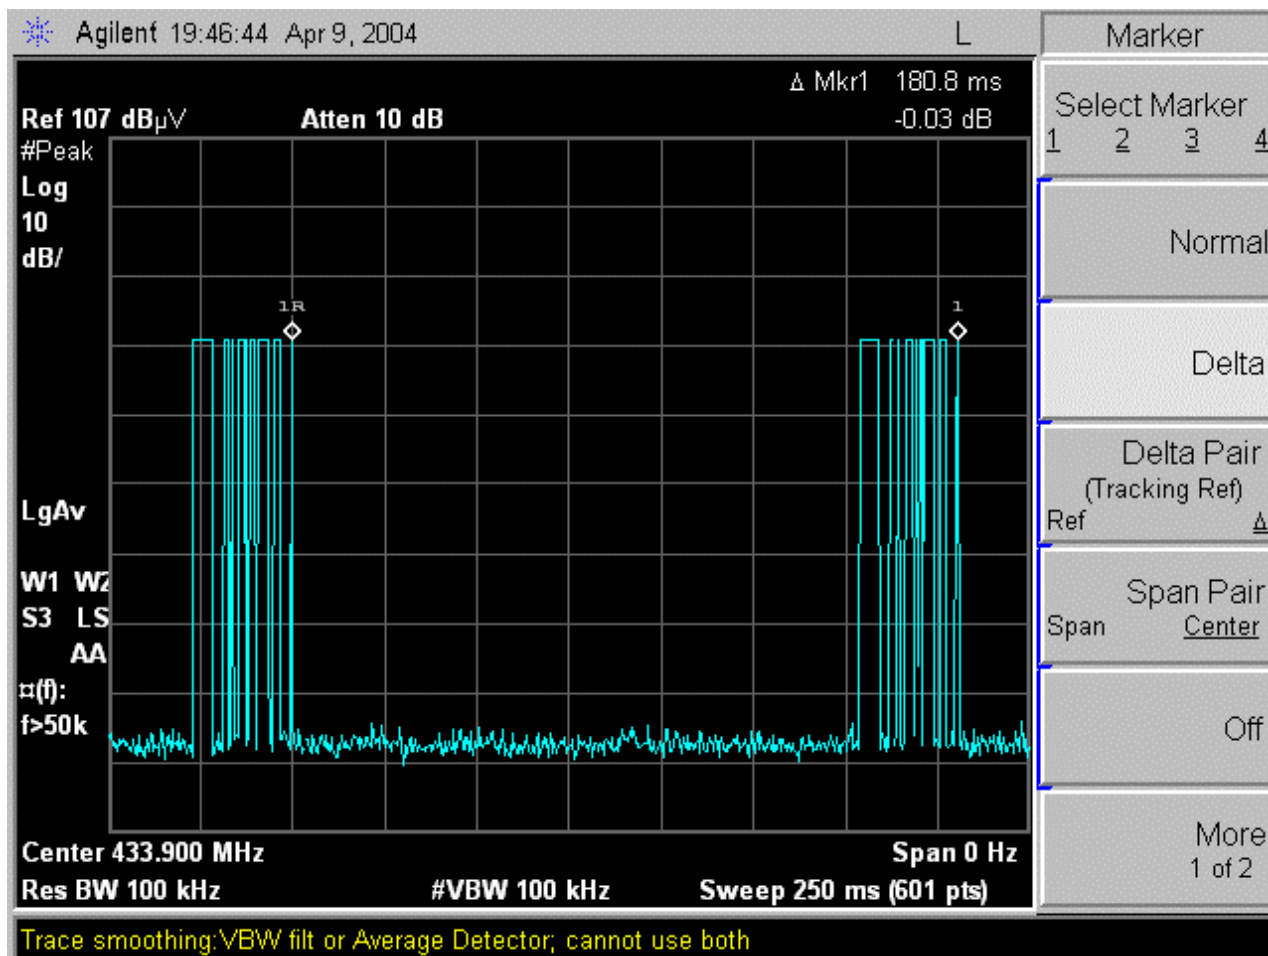

EMISSION BANDWIDTH

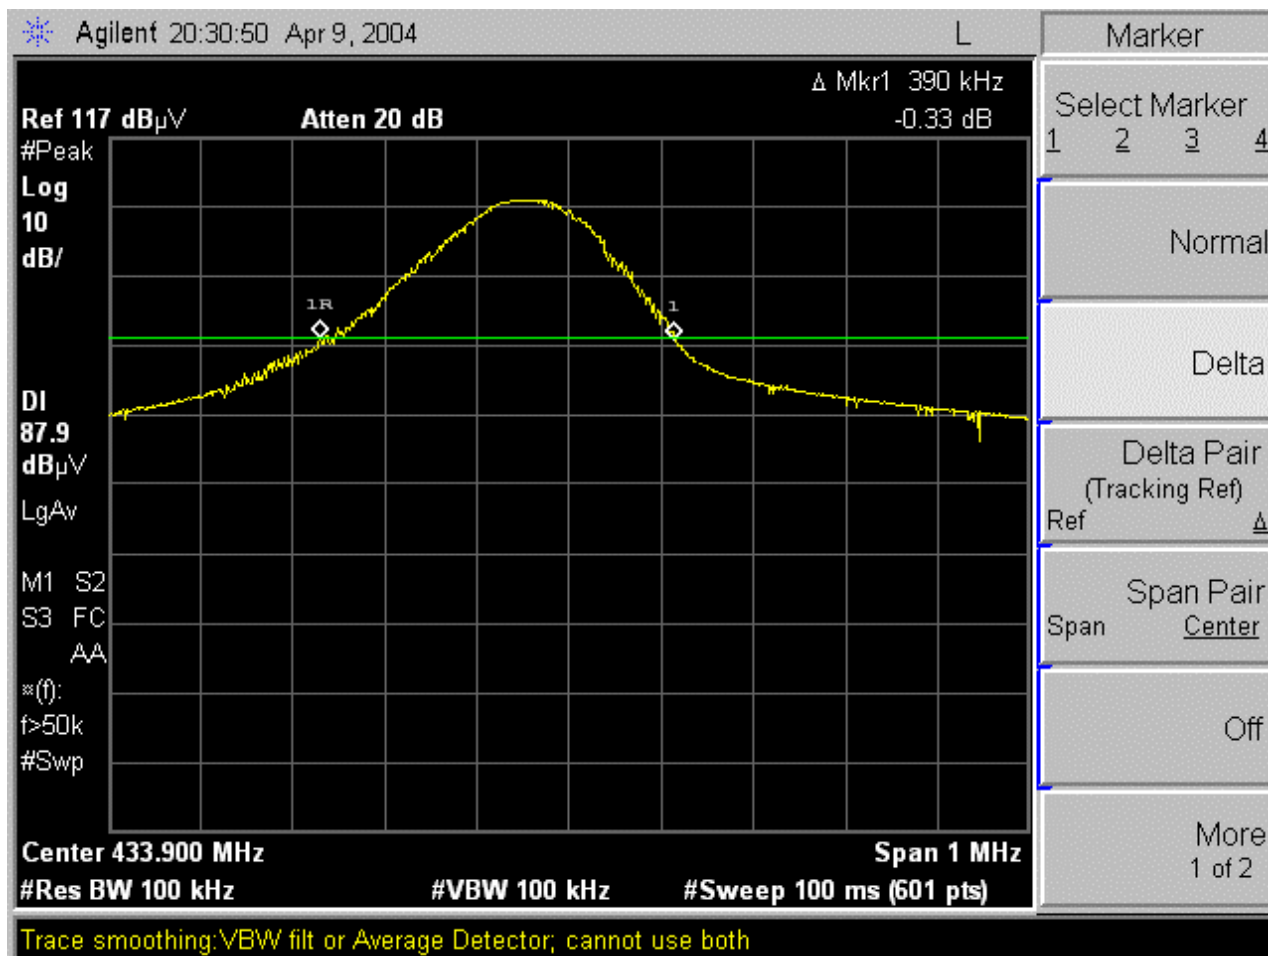

RADIATED DATA

 <p>FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP</p> <p>561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888</p>		<p><i>Project #:</i> 04U2637-1</p> <p><i>Report #:</i> 040408B1</p> <p><i>Date & Time:</i> 4/8/2004 11:30AM</p> <p><i>Test Engr:</i> Thanh Nguyen</p>										
<p><i>Company:</i> Secure Wireless, Inc.</p> <p><i>EUT Description:</i> 433.92MHz Security Remote Control</p> <p><i>Test Configuration:</i> EUT only</p> <p><i>Type of Test:</i> FCC 15.231</p> <p><i>Mode of Operation:</i> Transmitting</p>												
<p>M% = ((t1+t2+t3+...)/T)*100% = 8.65%</p>		<p>Av Reading = Pk Reading + 20*log(M%)</p> <p>20*log(M%) = -21.26</p>										
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Cross (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
433.92Mhz Fundamental frequency												
X-Position (Lay Down)												
433.92	95.60	75.60	16.90	5.14	28.99	68.65	80.83	-12.18	3mV	0.00	1.00	P
433.92	91.40	71.40	16.90	5.14	28.99	64.45	80.83	-16.38	3mH	0.00	2.00	P
Y-Position (Standup)												
433.92	97.20	77.20	16.90	5.14	28.99	70.25	80.83	-10.58	3mV	0.00	1.00	P
433.92	90.00	70.00	16.90	5.14	28.99	63.05	80.83	-17.78	3mH	0.00	2.00	P
Z-Position (Side Way)												
433.92	95.40	75.40	16.90	5.14	28.99	68.45	80.83	-12.38	3mV	0.00	1.00	P
433.92	92.00	72.00	16.90	5.14	28.99	65.05	80.83	-15.78	3mH	0.00	1.75	P
The Data show Y-Position is the worst case												
867.86	69.80	49.80	22.45	7.38	28.34	51.29	60.83	-9.54	3mV	0.00	1.00	P
867.86	66.30	46.30	22.45	7.38	28.34	47.79	60.83	-13.04	3mH	0.00	2.00	P


RADIATED EMISSIONS (HARMONIC)


04/08/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Chin Pang Project #: 04U2637-1 Company: Secure Wireless Inc. EUT Descr.: 433.93MHz Security Remote Control EUT M/N: EV-F433P Test Target: FCC 15.231 Mode Oper: TX																
Test Equipment:																
EMCO Horn 1-18GHz T73; S/N: 6717 @ 3m		Spectrum Analyzer Agilent E4446A Analyzer		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz								
RF Frequency Calibers: (2 - 3 ft) (4 - 6 ft) (12 ft)																
Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth																
Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																
Average Reading=Peak reading-Duty Cycle																
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
1.302	9.8	90.0	70.0	25.0	1.5	-43.4	0.0	0.0	73.0	53.0	74.0	54.0	-1.0	-1.0	V	
1.736	9.8	83.5	63.5	27.0	1.6	-43.3	0.0	0.0	68.8	48.8	74.0	54.0	-5.2	-5.2	V	
2.170	9.8	77.8	57.8	28.6	1.8	-43.2	0.0	0.0	64.9	44.9	74.0	54.0	-9.1	-9.1	V	
2.604	9.8	72.4	52.4	29.7	2.0	-43.2	0.0	0.0	60.8	40.8	74.0	54.0	-13.2	-13.2	V	
3.038	9.8	73.3	53.3	30.7	2.2	-43.2	0.0	0.0	63.0	43.0	74.0	54.0	-11.0	-11.0	V	
3.471	9.8	71.7	51.7	31.5	2.3	-43.5	0.0	0.0	62.0	42.0	74.0	54.0	-12.0	-12.0	V	
3.905	9.8	71.2	51.2	32.3	2.5	-43.9	0.0	0.0	62.2	42.1	74.0	54.0	-11.8	-11.9	V	
4.339	9.8	66.5	46.5	32.9	2.7	-44.3	0.0	0.0	57.8	37.8	74.0	54.0	-16.2	-16.2	V	
1.302	9.8	84.9	64.9	25.0	1.5	-43.4	0.0	0.0	67.9	47.9	74.0	54.0	-6.1	-6.1	H	
1.736	9.8	80.2	60.2	27.0	1.6	-43.3	0.0	0.0	65.5	45.5	74.0	54.0	-8.5	-8.5	H	
2.170	9.8	81.0	61.0	28.6	1.8	-43.2	0.0	0.0	68.1	48.1	74.0	54.0	-5.9	-5.9	H	
2.604	9.8	76.5	56.5	29.7	2.0	-43.2	0.0	0.0	64.9	44.9	74.0	54.0	-9.1	-9.1	H	
3.038	9.8	73.9	53.9	30.7	2.2	-43.2	0.0	0.0	63.5	43.6	74.0	54.0	-10.5	-10.4	H	
3.471	9.8	66.7	46.7	31.5	2.3	-43.5	0.0	0.0	57.0	37.0	74.0	54.0	-17.0	-17.0	H	
3.905	9.8	64.5	44.5	32.3	2.5	-43.9	0.0	0.0	55.4	35.4	74.0	54.0	-18.6	-18.6	H	
4.339	9.8	60.8	40.8	32.9	2.7	-44.3	0.0	0.0	52.1	32.1	74.0	54.0	-21.9	-21.9	H	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

EUT PHOTOGRAPHS





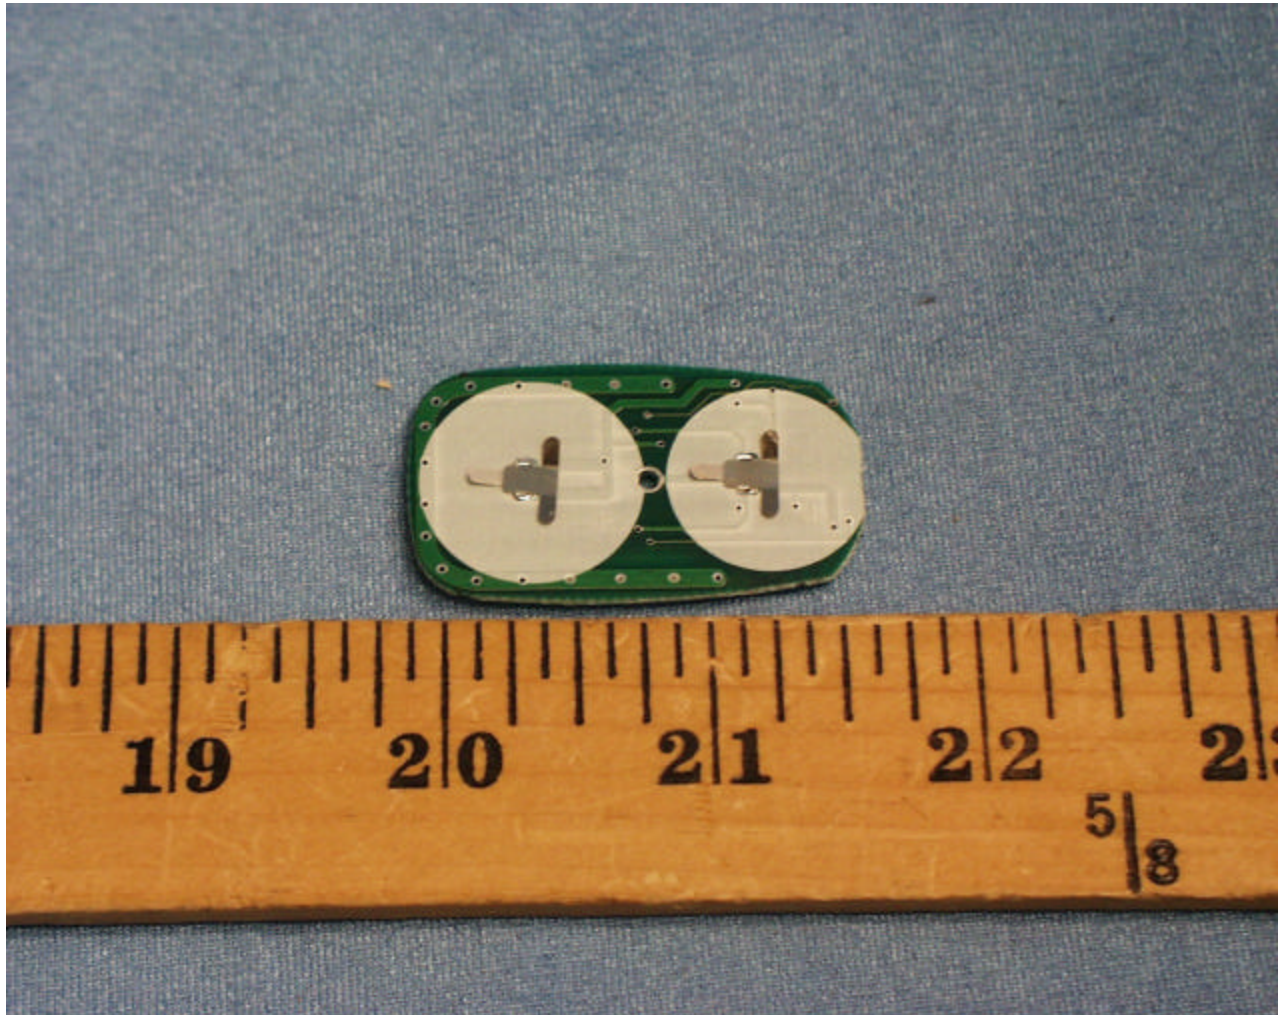

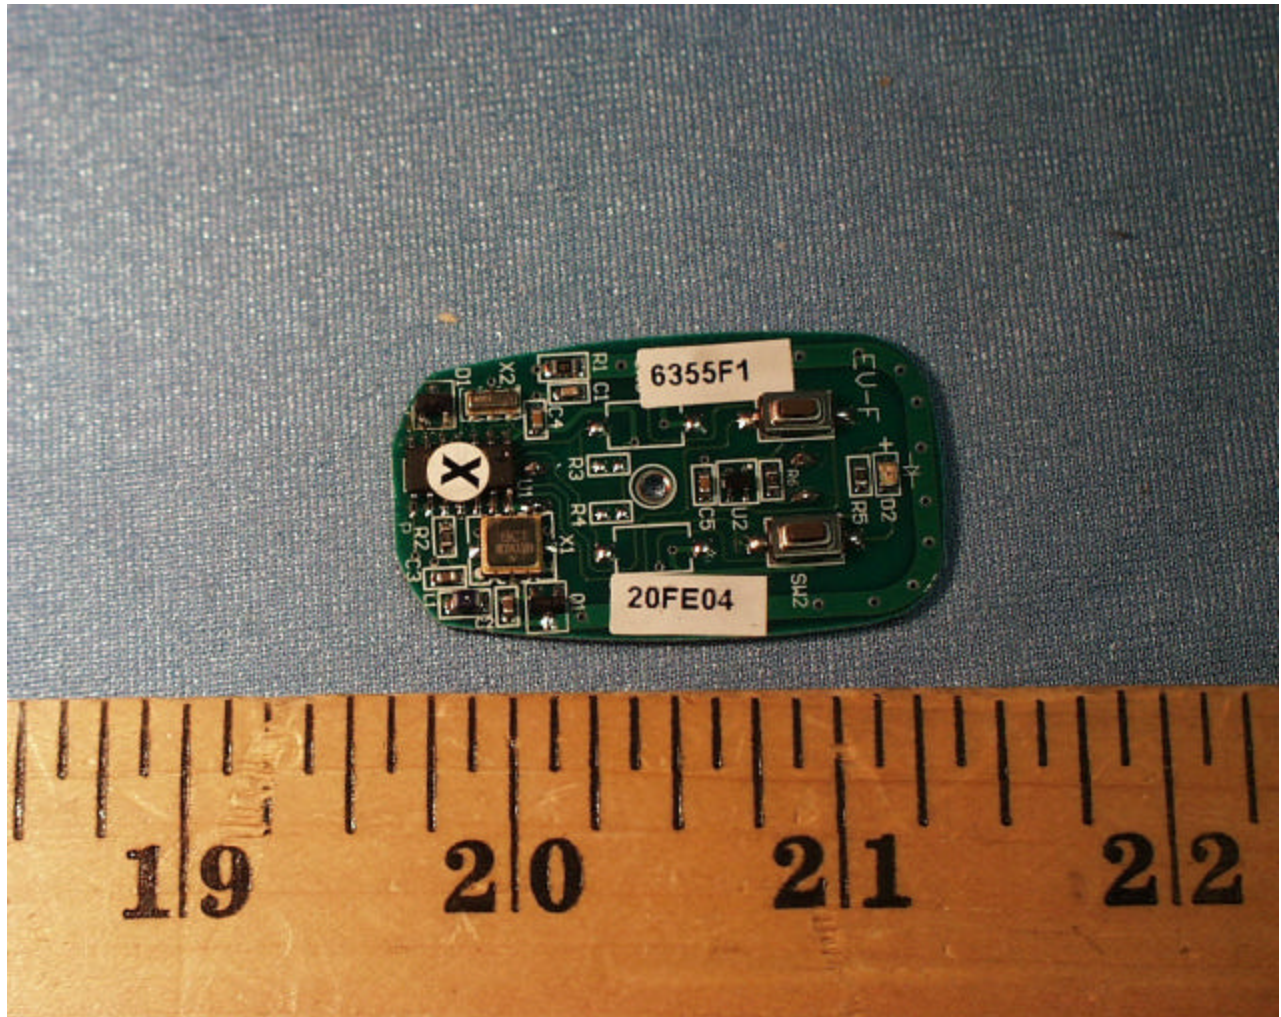

END OF REPORT