

Page 1 of 59

FCC Test Report

Report No.: AGC04138180502FE03

FCC ID	: 2AAXO-SMM475
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: Duet Karaoke Microphone
BRAND NAME	: Singing Machine
MODEL NAME	: See page 4
CLIENT	: The Singing Machine Company, Inc.
DATE OF ISSUE	: Jun. 05, 2018
STANDARD(S) TEST PROCEDURE(S)	: FCC Part 15 Subpart C Section 15.249
REPORT VERSION	: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.

Attestation of Global Compliance



Report No.: AGC04138180502FE03 Page 2 of 59

and the star				IN come In amount of the
Report Version	Revise Time	Issued Date Valid Version		Notes
V1.0		Jun. 05, 2018	Valid	Initial release

Report Revise Record





Report No.: AGC04138180502FE03 Page 3 of 59

TABLE OF CONTENTS

2. GENERAL INFORMATION 2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS	5 5 6
2.1. PRODUCT DESCRIPTION	6 6
2.2. TABLE OF CARRIER FREQUENCYS	6 6
	6
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS	8 9
6. TEST FACILITY	
7. TEST METHOD	
8. TEST EQUIPMENT LIST	11
9. RADIATED EMISSION	12
9.1. TEST LIMIT. 9.2. MEASUREMENT PROCEDURE.	12
9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP	13
9.3. TEST SETUP 9.4. TEST RESULT	17
10. BAND EDGE EMISSION	37
10.1. MEASUREMENT PROCEDURE	37
10.2 TEST SETUP	37
11. 20DB BANDWIDTH	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SET-UP	42
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	47
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	47 48
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	48
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	51
APPENDIX B: PHOTOGRAPHS OF EUT	54

The results showing the streport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance

AGC [®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 4 of 59

Applicant	The Singing Machine Company, Inc.				
Address	6301 NW 5th Way, Suite 2900, Fort Lauderdale, FL 33309, USA				
Manufacturer	Zhuhai Fullwing Electronic Co., Ltd Zhongshan Branch				
Address	4/F & 5/F, No 10, Xing Ye Road, Xin Xu, San Xiang, Zhongshan, China				
Product Designation	Duet Karaoke Microphone				
Brand Name	Singing Machine				
Test Model	SMM475				
Series Model	SMM475XX, SMM465B, SMM465P, SMM465XX (X is reserved for future color change. It can be replaced by 0-9, A-Z or N/A)				
Difference description	All the same except for the model name and appearance color				
Date of test	May 23, 2018 to Jun. 04, 2018				
Deviation	None None				
Condition of Test Sample	Normal				
Report Template	AGCRT-US-BR/RF				

1. VERIFICATION OF CONFORMITY

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By

Jonhan Wang

Jonhen Wang(Wang Yonghuan) Jun. 04, 2018

we chang

Reviewed By

Cool Cheng(Cheng Mengguo) Jun.

Jun. 05, 2018

Forresto en

Approved By

Forrest Lei(Lei Yonggang) Authorized Officer

Jun. 05, 2018

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.ceit.com.

Attestation of Global Compliance



Report No.: AGC04138180502FE03 Page 5 of 59

2. GENERAL INFORMATION 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-6.93dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, □8DPSK BLE □GFSK
Number of channels	79
Hardware Version	smc475hw_v0.1
Software Version	smc475hw_v0.1
Antenna Designation	PCB Antenna
Antenna Gain	-0.58dBi
Power Supply	DC 3.7V by battery
Note: The USB port only u	sed for charging and can't be used to transfer data with PC.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Channel Number	Frequency		
C F	0	2402MHz		
The Barrense	· *****	2403MHz		
C Standard Color	GC : CC			
	38	2440 MHz		
2400~2483.5MHz	39	2441 MHz		
The transferrer @ The Transferrer Contractor	40 0	2442 MHz		
of colored and a				
	77	2479 MHz		
The Hannes	78	2480 MHz		



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, $Uc = \pm 3.2 dB$
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1 The Convince	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5 5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
G 7	BT Link with charging
8	BT Link
Nata	

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. The EUT used fully-charged battery when tested.





Report No.: AGC04138180502FE03 Page 7 of 59

		So	ftware Setting	C 5	of Globa	Find Global
FCCAssist 1.5						
- Parameter						
MODE	TX 💌					
Channel	78 💌	Packet typ	e 2-DH3 💌	Data Types	Pn9	~
Transmit Power	10 💌	Hopping	OFF 💌	Serial Port	СОМЗ	<mark>∽</mark> 🖗
open COM3 succeed Channel: 78 Transmit Power : 10 Send configuration inf	Data Types: Pn9 Packet type: 2 ormation successf			L	Send configura	ation
		De	scription:			
		1,	Channel: range 0-	-78, corresponding	g frequency 2.	402GHz-2.480GHZ
1		2.	Transmit Power	range 0-10, 0 is th	ne minimum, n	naximum 10
		2.			,	



AGC[®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 8 of 59

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Adapter or PC

Note: Owing to the EUT has own battery, and testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

ltem	Equipment	Mfr/Brand	Model/Type No.	Remark
9	Duet Karaoke Microphone	Singing Machine	SMM475	EUT
2	Battery	EXL	18650	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	GZUT	N/A	A.E
5	Adapter	IPRO	NTR-S01	A.E
6	USB Cable	N/A	1m unshielded	A.E
7	IPOD	APPLE	Touch 5	A.E





Report No.: AGC04138180502FE03 Page 9 of 59

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B		Mar. 01, 2018	Feb. 28, 2019
Filter (2.4-2.483GHz)	Micro-tronics	087	F A Coont Congliance	Jun.20, 2017	Jun.19, 2018





9. RADIATED EMISSION

9.1. TEST LIMIT

Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50 6 6	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Str	engths Limit
(MHz)	Meters	μ V/m	dB(µV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	E England Con Call
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3 South States	Other:74.0 dB(µV)/m (Average)	(Peak) 54.0 dB(µV)/m

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



AGC [®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 13 of 59

9.2. MEASUREMENT PROCEDURE

- The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)





Report No.: AGC04138180502FE03 Page 14 of 59

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The following table is the setting of spectrum analyzer and receiver.




ACC [®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 15 of 59


9.3. TEST SETUP

RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHz

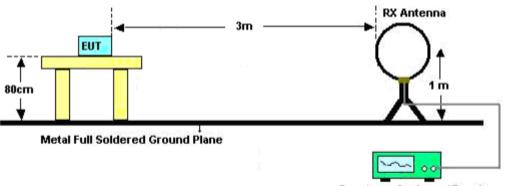

Spectrum Analyzer / Receiver

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

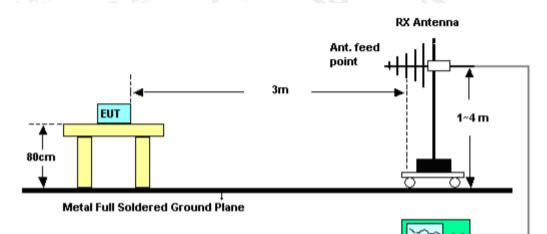


Spectrum Analyzer / Receiver





Report No.: AGC04138180502FE03 Page 16 of 59

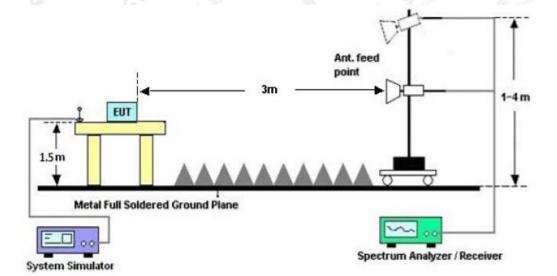

RADIATED EMISSION TEST SETUP ABOVE 1000MHz



AGC[®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 17 of 59

9.4. TEST RESULT


(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

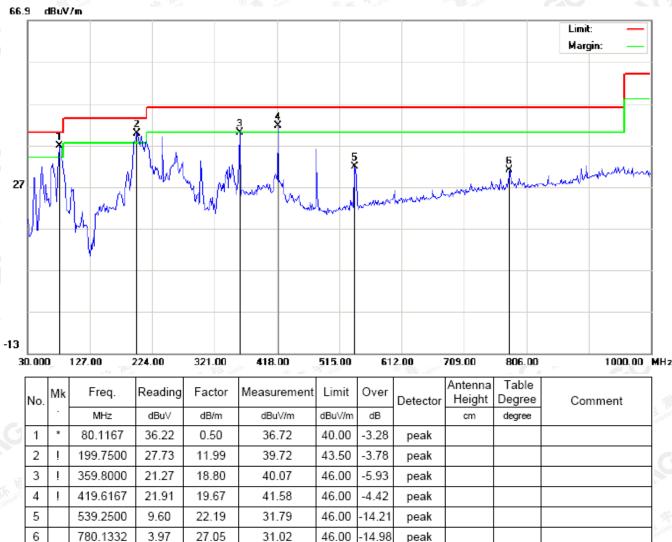

RESULT: PASS

Report No.: AGC04138180502FE03 Page 18 of 59

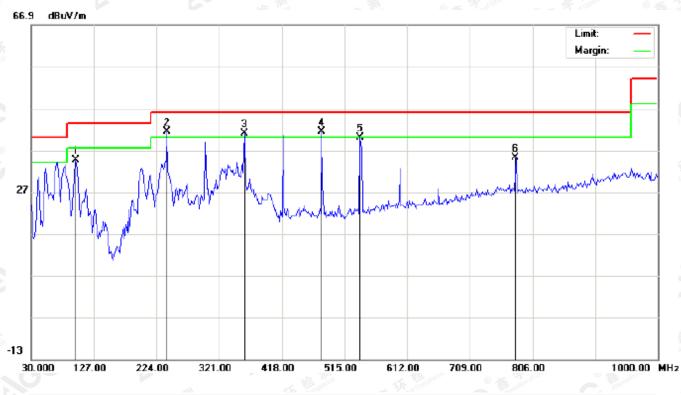

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

N	. N	Иk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
10		-	MHz	dBu∨	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1			99.5167	24.70	10.00	34.70	43.50	-8.80	peak			
2		İ	240.1667	33.48	7.90	41.38	46.00	-4.62	peak			
3		İ	359.8000	22.14	18.80	40.94	46.00	-5.06	peak			
4		*	479.4333	20.55	20.91	41.46	46.00	-4.54	peak			
5		İ	539.2500	17.89	22.19	40.08	46.00	-5.92	peak			
6			780.1332	8.07	27.05	35.12	46.00	-10.88	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Report No.: AGC04138180502FE03 Page 19 of 59

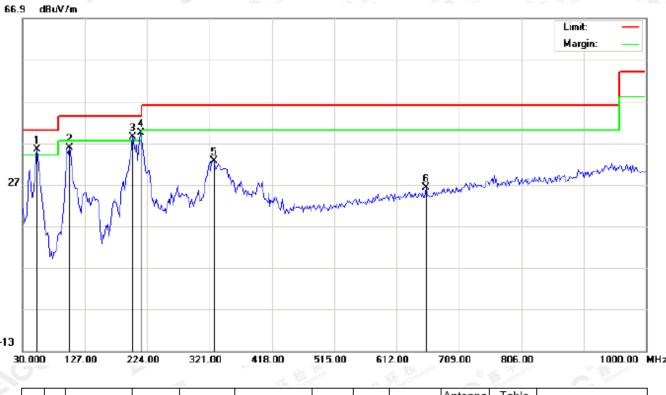


RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1	İ	52.6333	27.02	8.41	35.43	40.00	-4.57	peak			
2		102.7500	25.92	9.84	35.76	43.50	-7.74	peak			
3	İ	201.3667	26.51	11.86	38.37	43.50	-5.13	peak			
4	*	214.3000	28.91	10.54	39.45	43.50	-4.05	peak			
5		327.4667	15.31	17.24	32.55	46.00	-13.45	peak			
6		657.2667	2.09	24.05	26.14	46.00	-19.86	peak			

RESULT: PASS



Report No.: AGC04138180502FE03 Page 20 of 59

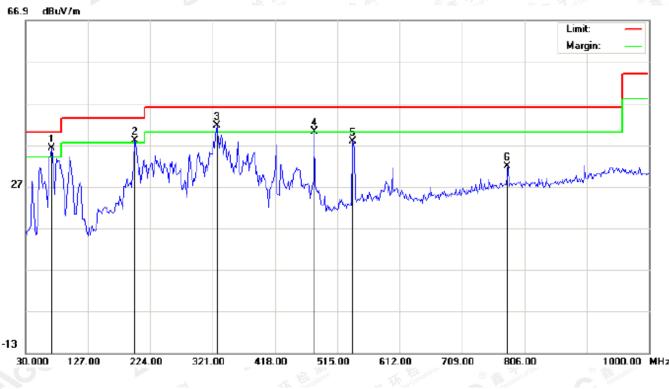

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL -VERTICAL

	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
- 65		•	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
51	1	*	70.4167	26.38	9.85	36.23	40.00	-3.77	peak			
Γ	2	İ	199.7500	26.02	11.99	38.01	43.50	-5.49	peak			
Γ	3	İ	327.4667	24.33	17.24	41.57	46.00	-4.43	peak			
Γ	4	İ	479.4333	19.33	20.91	40.24	46.00	-5.76	peak			
Γ	5		539.2500	15.65	22.19	37.84	46.00	-8.16	peak			
1	6		780.1332	4.83	27.05	31.88	46.00	-14.12	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Report No.: AGC04138180502FE03 Page 21 of 59

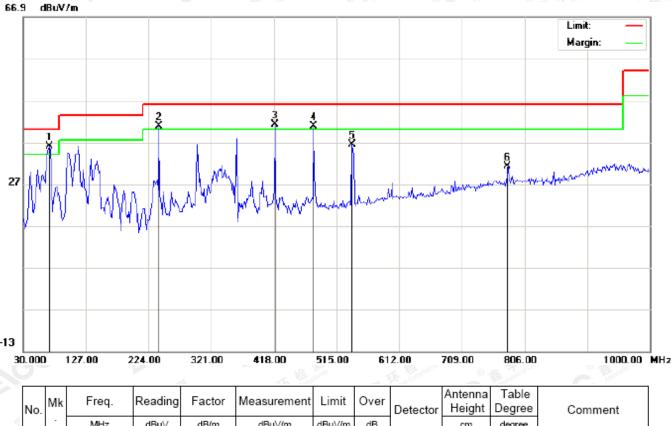

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment	
	•	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree		
1	*	70.4167	26.23	9.85	36.08	40.00	-3.92	peak				
2	İ	240.1667	32.84	7.90	40.74	46.00	-5.26	peak				
3	İ	419.6167	21.61	19.67	41.28	46.00	-4.72	peak				
4	İ	479.4333	19.91	20.91	40.82	46.00	-5.18	peak				
5		539.2500	14.26	22.19	36.45	46.00	-9.55	peak				10
6		780.1332	4.10	27.05	31.15	46.00	-14.85	peak				

RESULT: PASS





Report No.: AGC04138180502FE03 Page 22 of 59

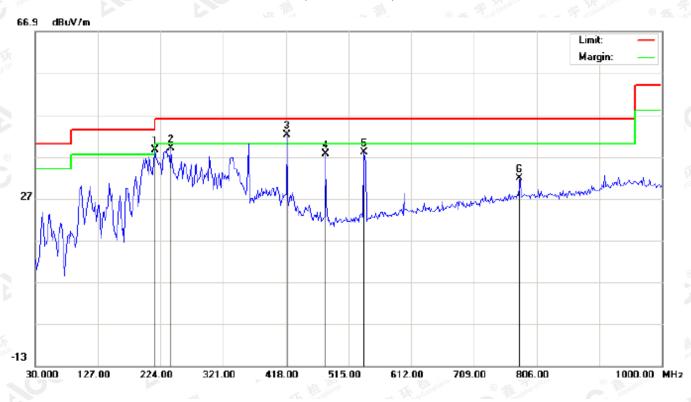

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
1	İ	215.9167	28.23	10.38	38.61	43.50	-4.89	peak			
2		240.1667	31.15	7.90	39.05	46.00	-6.95	peak			
3	*	419.6167	22.58	19.67	42.25	46.00	-3.75	peak			
4		479.4333	16.79	20.91	37.70	46.00	-8.30	peak			
5		539.2500	15.79	22.19	37.98	46.00	-8.02	peak			
6		780.1332	4.81	27.05	31.86	46.00	-14.14	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.






Report No.: AGC04138180502FE03 Page 23 of 59

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

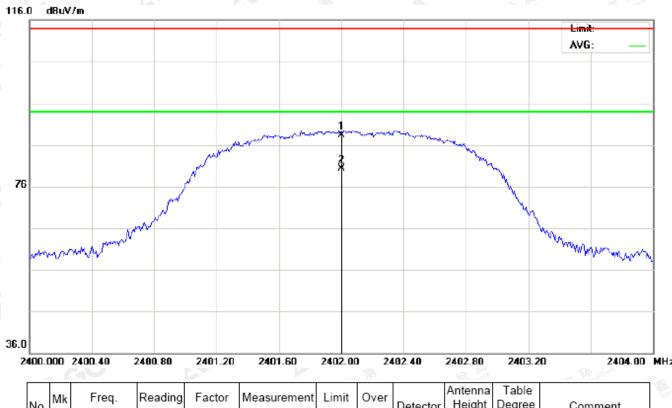


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Height		Comment	
		-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree		
	1		2402.000	77.95	10.32	88.27	114.00	-25.73	peak				
4	2	*	2402.000	70.03	10.32	80.35	94.00	-13.65	AVG	100	32		

RESULT: PASS





Report No.: AGC04138180502FE03 Page 24 of 59

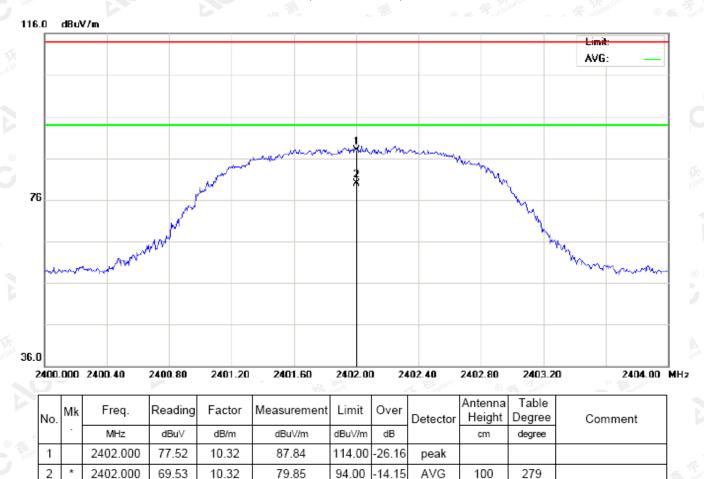


RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

RESULT: PASS





Report No.: AGC04138180502FE03 Page 25 of 59

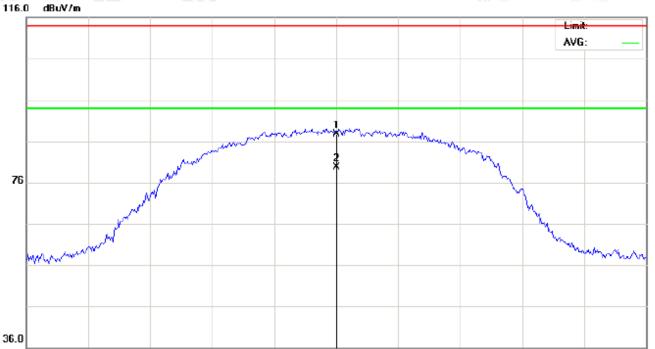


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

2	439.	000	2439.40	2439.80	2440.20	2440.60	2441.00	24	41.40	2441.80	2442.20	0 2443.00	MHz
	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment	³¹ Cou
		•	MHz	dBu∨	dB/m	dBu∨/m	dBu∨/m	dB		cm	degree		
	1		2441.000	77.30	10.36	87.66	114.00	-26.34	peak				
	2	*	2441.000	69.36	10.36	79.72	94.00	-14.28	AVG	100	38]

RESULT: PASS



Report No.: AGC04138180502FE03 Page 26 of 59

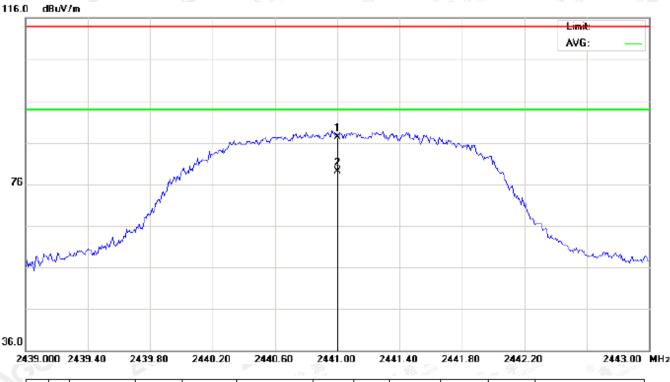

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

-	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
~		-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
ati	1		2441.000	76.88	10.36	87.24	114.00	-26.76	peak			
	2	*	2441.000	68.82	10.36	79.18	94.00	-14.82	AVG	100	286	


RESULT: PASS

ACC [®]鑫宇环检测 Attestation of Global Compliance





Report No.: AGC04138180502FE03 Page 27 of 59

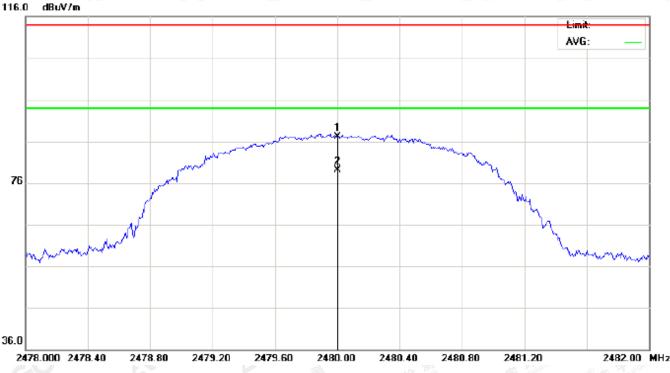

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL


							207.5		14/21		GIV.	(R) ABLE THAT
	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu\//m	dBuV/m	dB		cm	degree	
12	1		2480.000	76.62	10.41	87.03	114.00	-26.97	peak			
	2	*	2480.000	68.66	10.41	79.07	94.00	-14.93	AVG	100	48	

RESULT: PASS





Report No.: AGC04138180502FE03 Page 28 of 59

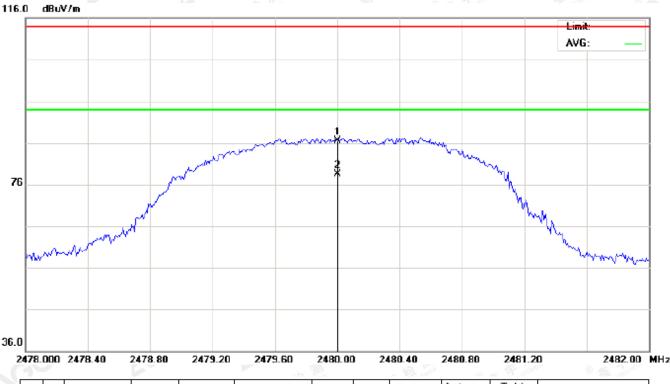

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
1.0.	-	MHz	dBu∨	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2480.000	76.13	10.41	86.54	114.00	-27.46	peak			
2	*	2480.000	68.16	10.41	78.57	94.00	-15.43	AVG	100		

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Actestation of Global Compliance

Report No.: AGC04138180502FE03 Page 29 of 59

Field strength of the fundamental signal

1Mbps Result:

Peak value

Reading Level	Factor	Measurement	Limit	Over	Antenna	
(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
77.95	10.32	88.27	114	-25.73	Horizontal	
77.52	10.32	87.84	114	-26.16	Vertical	
77.30	10.36	87.66	114 🐋	-26.34	Horizontal	
76.88	10.36	87.24	114	-26.76	Vertical	
76.62	10.41	87.03	114	-26.97	Horizontal	
76.13	10.41	86.54	114	-27.46	Vertical	
	Level (dBuv) 77.95 77.52 77.30 76.88 76.62	LevelFactor(dBuv)(dB/m)77.9510.3277.5210.3277.3010.3676.8810.3676.6210.41	LevelFactorMeasurement(dBuv)(dB/m)(dBuv/m)77.9510.3288.2777.5210.3287.8477.3010.3687.6676.8810.3687.2476.6210.4187.03	LevelFactorMeasurementLimit(dBuv)(dB/m)(dBuv/m)(dBuv/m)77.9510.3288.2711477.5210.3287.8411477.3010.3687.6611476.8810.3687.2411476.6210.4187.03114	LevelFactorMeasurementLimitOver(dBuv)(dB/m)(dBuv/m)(dBuv/m)(dB)77.9510.3288.27114-25.7377.5210.3287.84114-26.1677.3010.3687.66114-26.3476.8810.3687.24114-26.7676.6210.4187.03114-26.97	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	70.03	10.32	80.35	94 💿	-13.65	Horizontal	
2402	69.53	10.32	79.85	94	-14.15	Vertical	
2441	69.36	10.36	79.72	94	-14.28	Horizontal	
2441	68.82	10.36	79.18	94	-14.82	Vertical	
2480	68.66	10.41	79.07	94	-14.93	Horizontal	
2480	68.16	10.41	78.57	94	-15.43	Vertical	



AGC [®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 30 of 59

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	77.45	10.32	87.77	114	-26.23	Horizontal	
2402	77.02	10.32	87.34	114	-26.66	Vertical	
2441	76.85	10.36	87.21	114	-26.79	Horizontal	
2441	76.47	10.36	86.83	114	-27.17 👝	Vertical	
2480	76.31	10.41	86.72	114	-27.28	Horizontal	
2480	75.71	10.41	86.12	114	-27.88	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	69.67	10.32	79.99	94	-14.01	Horizontal
2402	69.17	10.32	79.49	94	-14.51	Vertical
2441	68.88	10.36	79.24	94	-14.76	Horizontal
2441	68.43	10.36	78.79	94	-15.21	Vertical
2480	68.16	10.41	78.57	94	-15.43	Horizontal
2480	67.73	10.41	78.14	94	-15.86	Vertical

The results showed this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed of this for the fully wave account of the report will be confirmed of this for the fully wave account of the report will be confirmed of the fully wave account of the report will be confirmed of the fully wave account of the report will be confirmed of the fully wave account of the report will be confirmed of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of the fully wave account of t






Report No.: AGC04138180502FE03 Page 31 of 59

(Worst modulation: GFSK)

For Harmonics

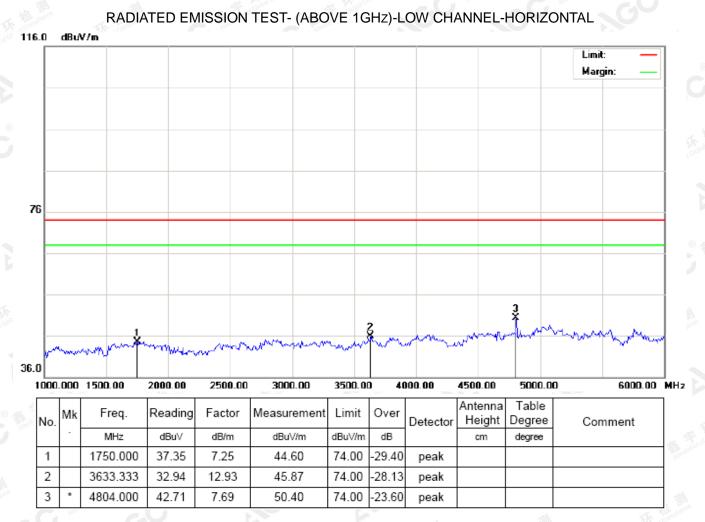


RESULT: PASS





Report No.: AGC04138180502FE03 Page 32 of 59

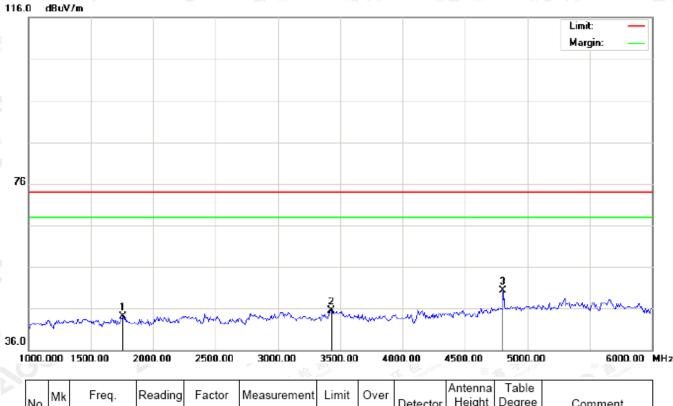

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBuV/m	dB		cm	degree	
1		1758.333	36.82	7.34	44.16	74.00	-29.84	peak			
2		3433.333	33.54	12.05	45.59	74.00	-28.41	peak			
3	*	4804.000	42.55	7.69	50.24	74.00	-23.76	peak			

RESULT: PASS







74.00

74.00

74.00

29.48

-27.92

22.95

peak

peak

peak

44.52

46.08

51.05

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

RESULT: PASS

1

2

3

1641.667

3283.333

4882.000

38.41

34.17

43.16

6.11


11.91

7.89





Report No.: AGC04138180502FE03 Page 34 of 59

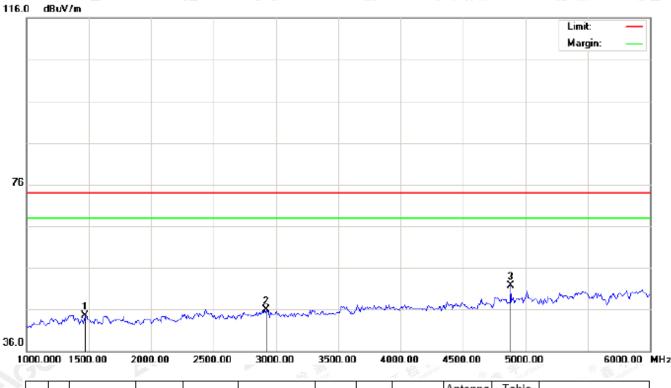

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL


No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
3	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1466.667	39.96	4.61	44.57	74.00	-29.43	peak			
2		2925.000	34.36	11.46	45.82	74.00	-28.18	peak			
3	*	4882.000	43.89	7.89	51.78	74.00	-22.22	peak			

RESULT: PASS





Report No.: AGC04138180502FE03 Page 35 of 59

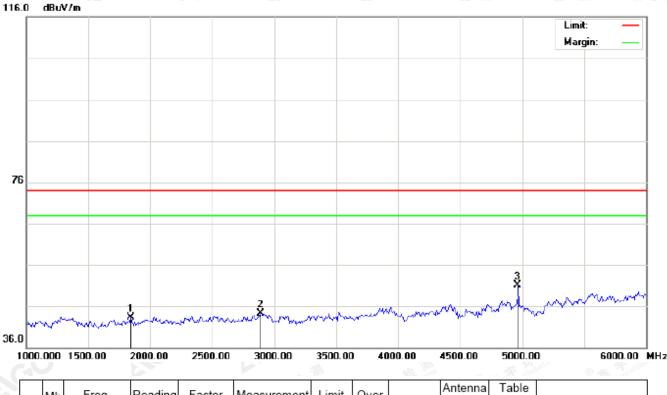

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL


No	. М	k	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1	841.667	35.07	8.21	43.28	74.00	-30.72	peak			
2		2	891.667	32.85	11.38	44.23	74.00	-29.77	peak			
3	*	4	960.000	43.10	8.09	51.19	74.00	-22.81	peak			

RESULT: PASS





Report No.: AGC04138180502FE03 Page 36 of 59

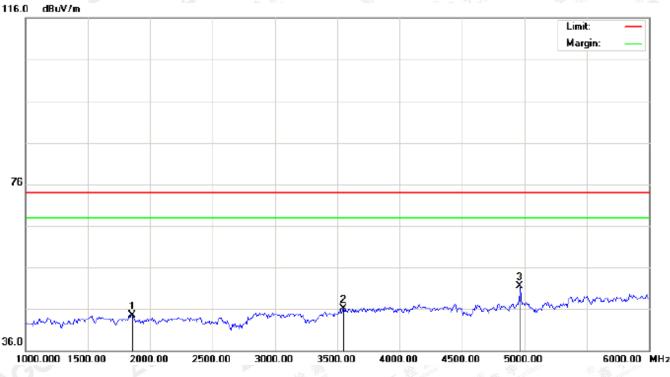

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

						Meleta -				(74)	Real and	18 m - 18 m
	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
3		-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
ø	1		1858.333	36.07	8.39	44.46	74.00	-29.54	peak			
	2		3550.000	33.65	12.42	46.07	74.00	-27.93	peak			
	3	*	4960.000	43.41	8.09	51.50	74.00	-22.50	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



AGC[®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 37 of 59

10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE


1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency	y(MHz)	Stop frequency(MHz)				
2200	· 电···································	nce C Stratter	2405	SC -		
2478	C Austano of Gou	GO	2500			
Aller Aller						

10.2 TEST SETUP

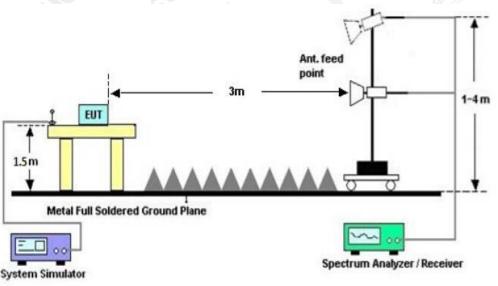

RADIATED EMISSION TEST SETUP

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




AGC [®]鑫 宇 环 检 测 Attestation of Global Compliance

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

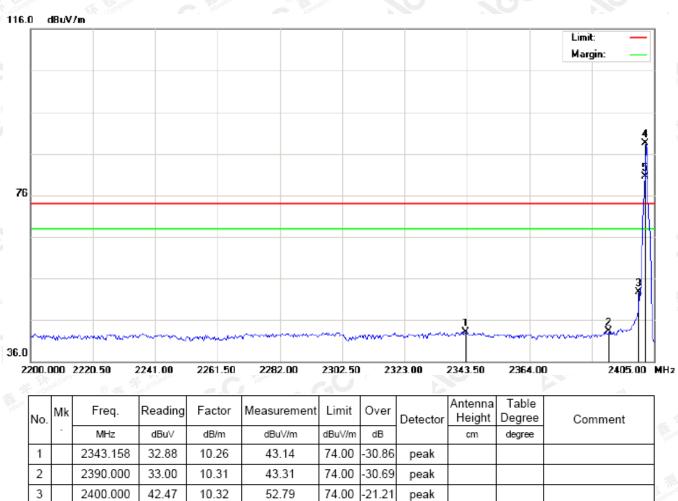

74.00

74.00

14.54

6.47

peak

AVG

100

39

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



2402.000

2402.000

4

5

Х

78.22

70.15

10.32


10.32

88.54

80.47



Report No.: AGC04138180502FE03 Page 39 of 59

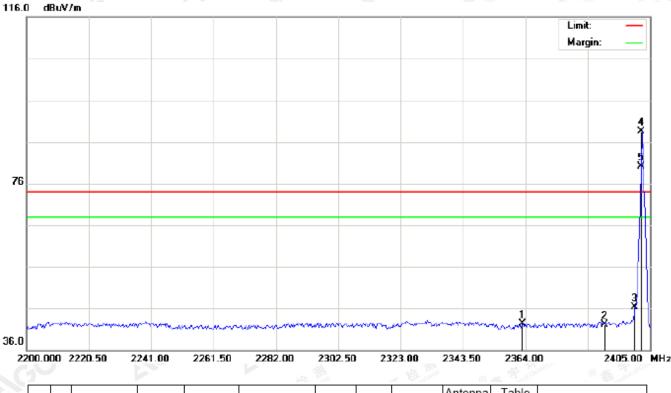

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
ali	1		2362.975	32.05	10.28	42.33	74.00	-31.67	peak			
	2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
	3		2400.000	36.06	10.32	46.38	74.00	-27.62	peak			
	4	*	2402.000	78.09	10.32	88.41	74.00	14.41	peak			
	5	Х	2402.000	69.80	10.32	80.12	74.00	6.12	AVG	100		

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc?gett.com.



AGC[®]鑫宇环检测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 40 of 59

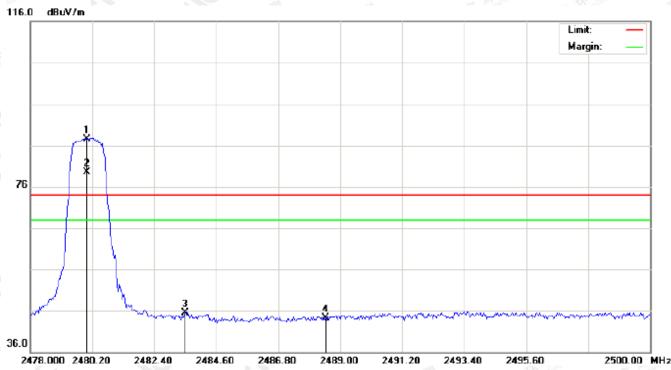

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal


S	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
2	1	*	2480.000	77.05	10.41	87.46	74.00	13.46	peak			
stal	2	Х	2480.000	69.10	10.41	79.51	74.00	5.51	AVG	100	35	
	3		2483.500	35.19	10.41	45.60	74.00	-28.40	peak			
	4		2488.486	33.81	10.42	44.23	74.00	-29.77	peak			

The results show of this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.





Report No.: AGC04138180502FE03 Page 41 of 59

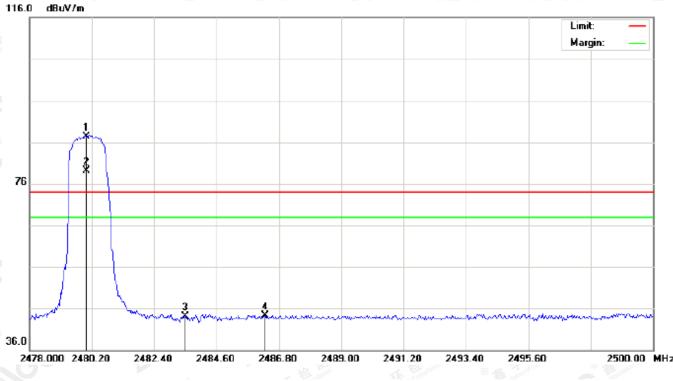

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	76.82	10.41	87.23	74.00	13.23	peak			
2	Х	2480.000	68.67	10.41	79.08	74.00	5.08	AVG	100	267	
3		2483.500	33.76	10.41	44.17	74.00	-29.83	peak			
4		2486.323	33.94	10.41	44.35	74.00	-29.65	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.



AGC[®]鑫宇环检测 Attestation of Global Compliance


Report No.: AGC04138180502FE03 Page 42 of 59

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
- RBW \geq 1% of the 20 dB bandwidth, VBW \geq 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

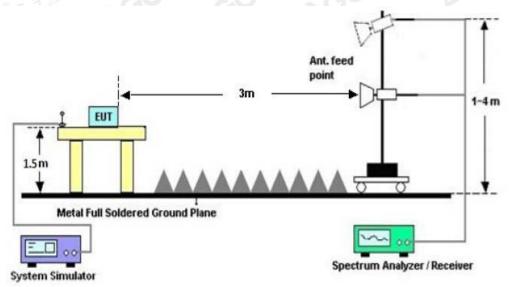

11.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Dec. K								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s	Low Channel	0.895	1.053	PASS						
N/A	Middle Channel	0.893	1.023	PASS						
	High Channel	0.910	1.071	PASS						

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.ceit.com.






TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

Copyright 2000-2006 Agilent Technologies

GC 鑫 宇 环 检 测 Attestation of Global Compliance

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

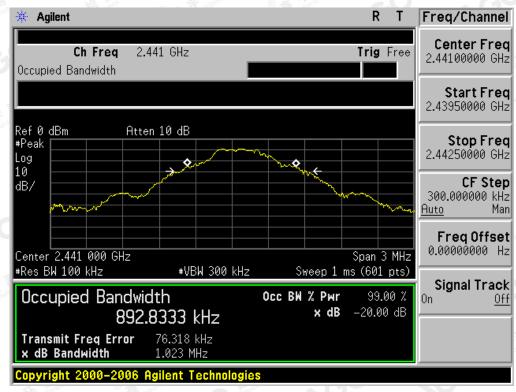

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



BLUET	OOTH 2MBPS LIN	ITS AND MEASU	REMENT RESULT					
	Measurement Result							
Applicable Limits		Dec. If						
		99%OBW (MHz)	-20dB BW(MHz)	Result				
The the second	Low Channel	1.205	1.376	PASS				
N/A	Middle Channel	1.211	1.379	PASS				
	High Channel	1.211	1.376	PASS				

环

Attestation of Global Compliance

测

检

GC

藎

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

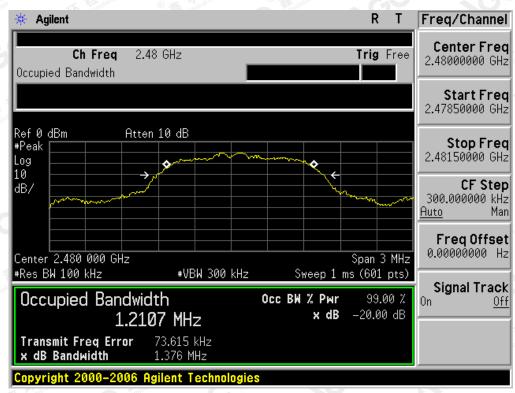

The results shown if this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

12. FCC LINE CONDUCTED EMISSION TEST

12.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Francisco	Maximum RF Line Voltage						
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	© 56 56 °	46					
5MHz~30MHz	60	50					

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

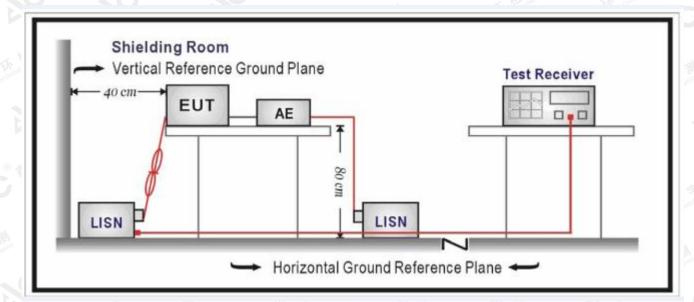

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



AGC [®] 鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 48 of 59

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




AGC [®]鑫 宇 环 检 测 Attestation of Global Compliance

Report No.: AGC04138180502FE03 Page 49 of 59

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

Line Conducted Emission Test Line 1-L

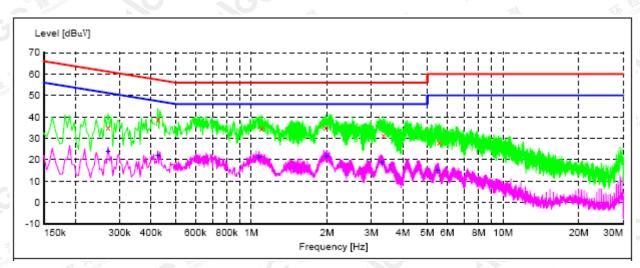

MEASUREMENT RESULT:


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.270000 0.426000 1.098000 1.974000 3.354000 5.570000	35.20 38.90 34.50 35.10 31.50 28.10	10.1 10.0 10.1 9.9 10.0 10.2	61 57 56 56 56 60	25.9 18.4 21.5 20.9 24.5 31.9	QP QP QP	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.270000	23.80 21.80	10.1 10.0	51 47	27.3		L1 L1	FLO FLO
1.074000	21.00	10.1	46		AV	L1	FLO
1.994000 3.310000	21.60 18.80	9.9 10.0	46 46	24.4 27.2	AV AV	L1 L1	FLO FLO
5.490000	15.10	10.2	50		AV	L1	FLO

The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.



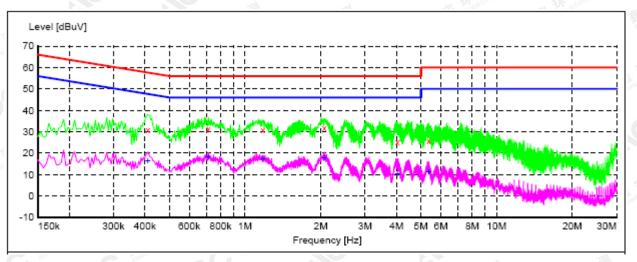

Line Conducted Emission Test Line 2-N

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.410000 0.714000 1.178000 2.066000 4.034000 5.366000	31.00 31.40 30.90 32.00 25.40 25.80	10.0 9.9 10.1 9.9 10.1 10.2	58 56 56 56 56 60	26.6 24.6 25.1 24.0 30.6 34.2	-	N N N N N	FLO FLO FLO FLO FLO FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.410000	16.50	10.0	48	31.1	AV	Ν	FLO
0.714000	18.30	9.9	46	27.7	AV	N	FLO
1.178000	17.50	10.1	46	28.5	AV	N	FLO
2.066000	17.70	9.9	46	28.3	AV	Ν	FLO
4.034000	10.40	10.1	46	35.6	AV	N	FLO
5.366000	11.40	10.2	50	38.6	AV	N	FLO


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.






Report No.: AGC04138180502FE03 Page 51 of 59

APPENDIX A: PHOTOGRAPHS OF TEST SETUP FCC LINE CONDUCTED EMISSION TEST SETUP

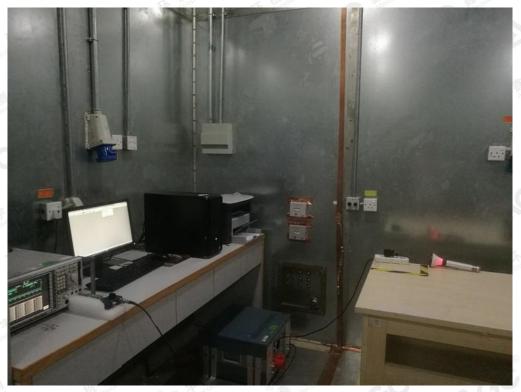

FCC RADIATED EMISSION TEST SETUP

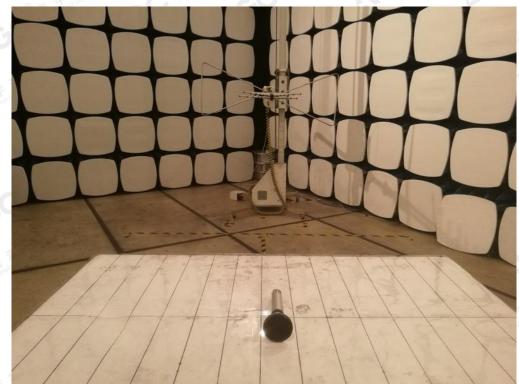


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.





Report No.: AGC04138180502FE03 Page 52 of 59

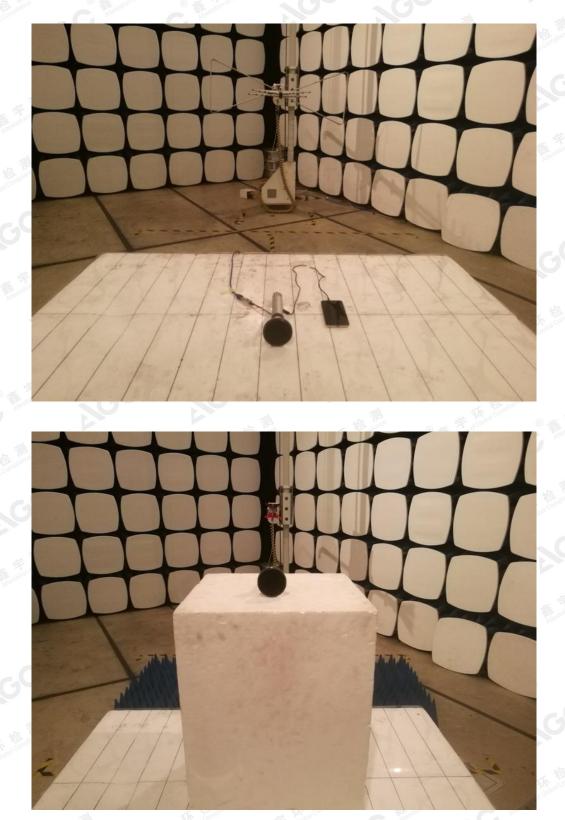

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.



Report No.: AGC04138180502FE03 Page 53 of 59



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.





Report No.: AGC04138180502FE03 Page 54 of 59

APPENDIX B: PHOTOGRAPHS OF EUT TOP VIEW OF EUT



BOTTOM VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by// GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc?gett.com.





Report No.: AGC04138180502FE03 Page 55 of 59

FRONT VIEW OF EUT



BACK VIEW OF EUT



The results showed this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be



Report No.: AGC04138180502FE03 Page 56 of 59

LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.



Report No.: AGC04138180502FE03 Page 57 of 59

VIEW OF EUT (PORT)



OPEN VIEW OF EUT



The results shows if this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.geit.com.




Report No.: AGC04138180502FE03 Page 58 of 59

VIEW OF BATTERY



INTERNAL VIEW OF EUT-1

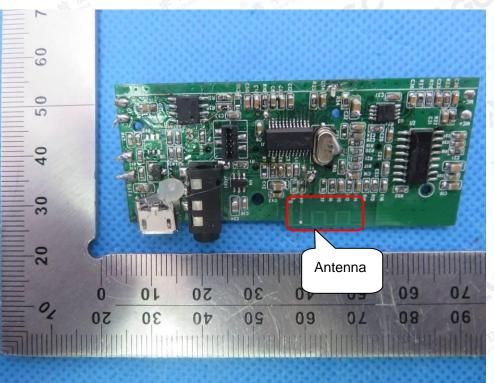


The results showing this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attraction.




Report No.: AGC04138180502FE03 Page 59 of 59

INTERNAL VIEW OF EUT-2

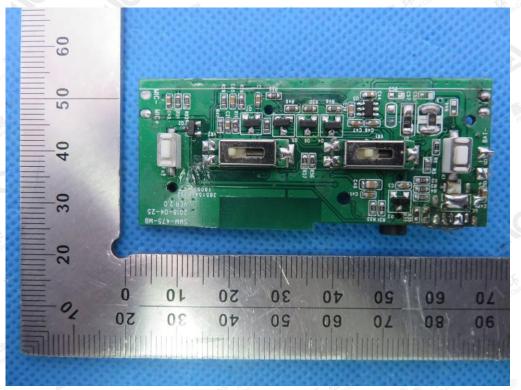

INTERNAL VIEW OF EUT-3

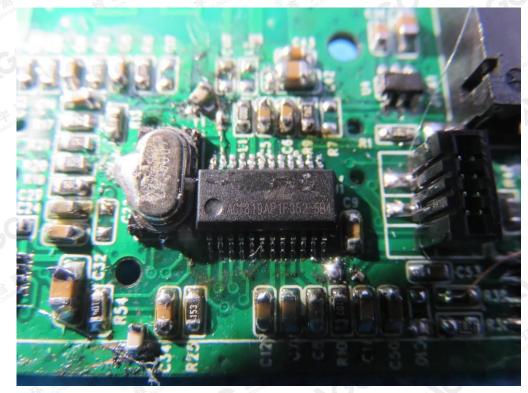

----END OF REPORT----

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the sample at the

