

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal

PK




AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical

PK

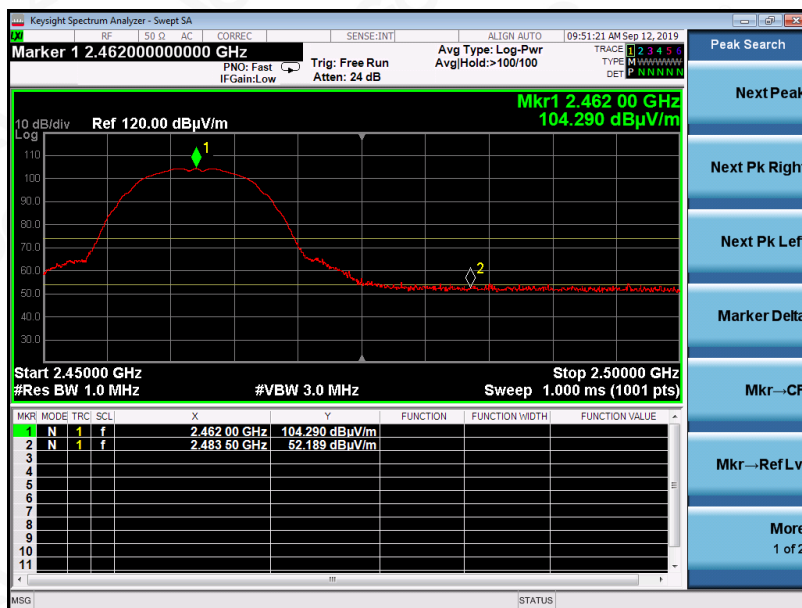

AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical

PK



AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical

PK




AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal

PK

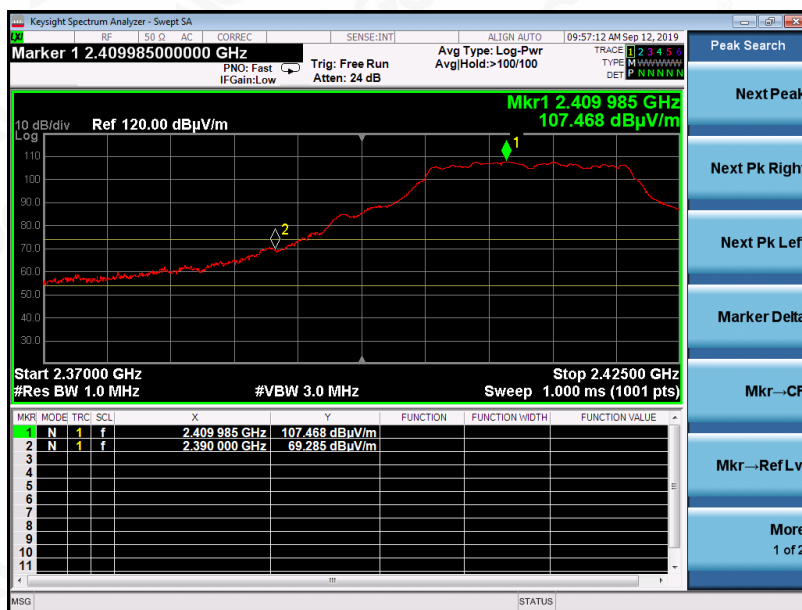


AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical

PK

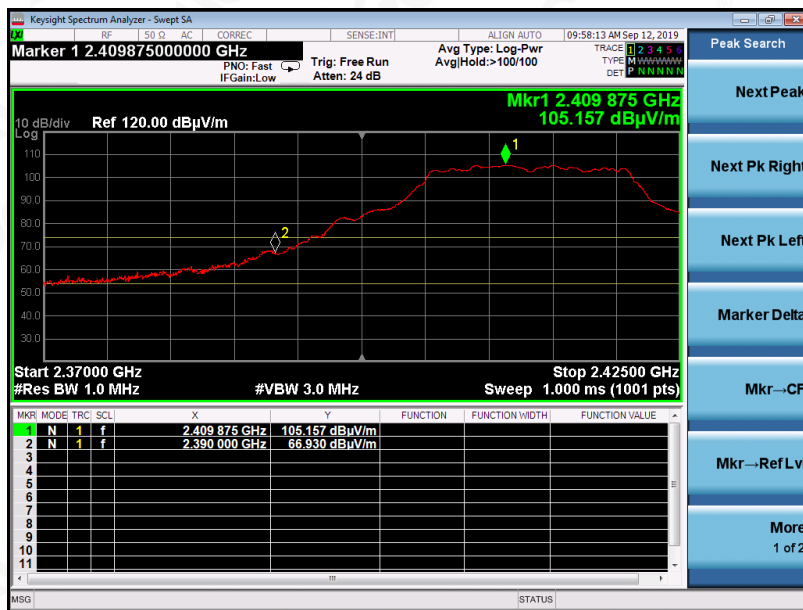

AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS

EUT	Smart Coffee Maker	Model Name	QKY-CAFE-SLV
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical

PK



AV



RESULT: PASS

13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

13.2. BLOCK DIAGRAM OF TEST SETUP

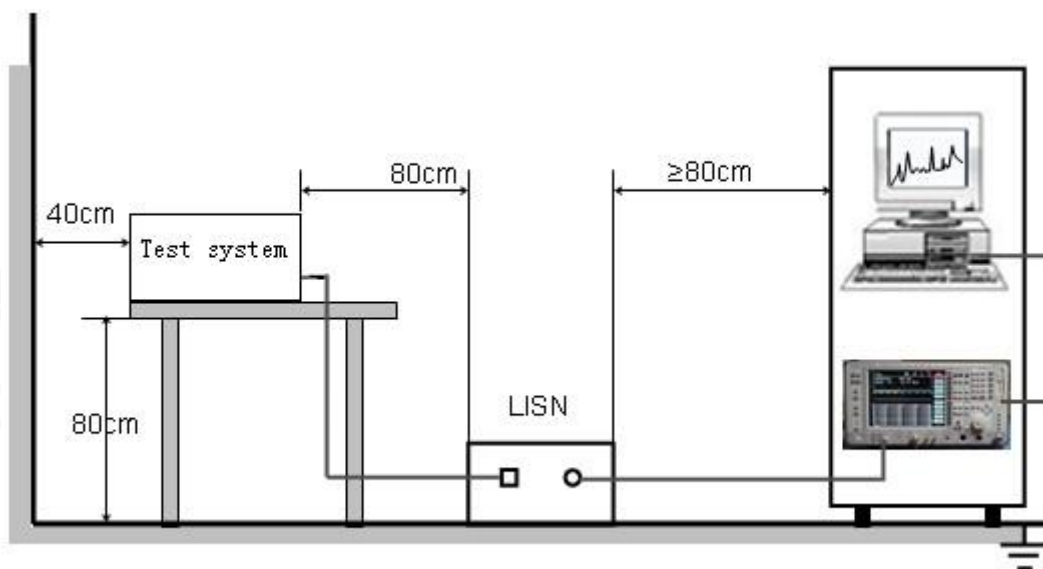


13.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.10.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- (4) The EUT received AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



13.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L1 (Worst Mode 4)

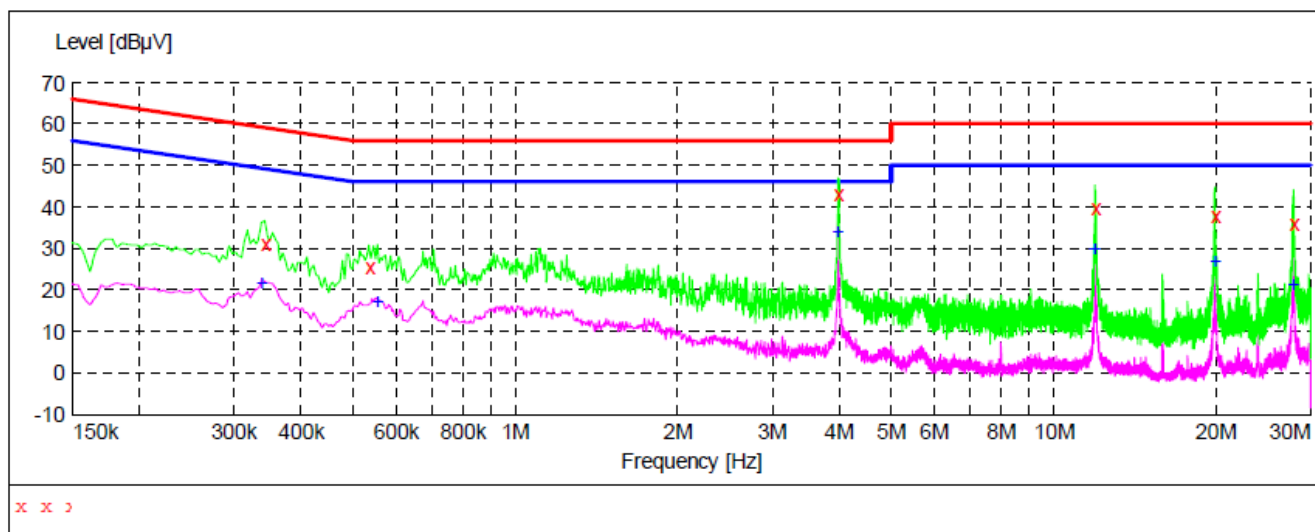

MEASUREMENT RESULT


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.342000	31.30	10.6	59	27.9	QP	L1
0.534000	25.40	11.0	56	30.6	QP	L1
3.978000	42.90	11.6	56	13.1	QP	L1
11.966000	40.00	12.0	60	20.0	QP	L1
19.930000	38.10	12.5	60	21.9	QP	L1
27.930000	36.10	12.8	60	23.9	QP	L1

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.338000	21.70	10.7	49	27.6	AV	L1
0.554000	17.20	10.9	46	28.8	AV	L1
3.982000	34.20	11.6	46	11.8	AV	L1
11.962000	30.10	12.0	50	19.9	AV	L1
19.930000	26.90	12.5	50	23.1	AV	L1
27.930000	21.40	12.8	50	28.6	AV	L1

RESULT: PASS

LINE CONDUCTED EMISSION TEST-N (Worst Mode 4)

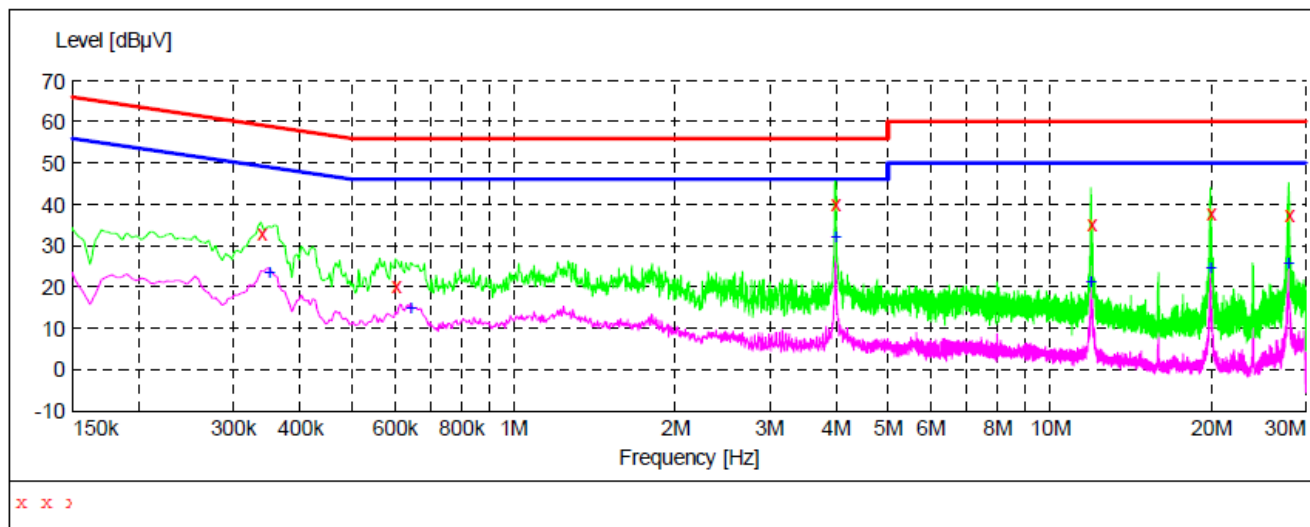

MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.338000	32.90	10.7	59	26.4	QP	N
0.602000	20.20	10.7	56	35.8	QP	N
3.982000	40.30	11.6	56	15.7	QP	N
11.942000	35.30	12.0	60	24.7	QP	N
19.930000	37.80	12.5	60	22.2	QP	N
27.926000	37.30	12.8	60	22.7	QP	N


MEASUREMENT RESULT

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.350000	23.50	10.6	49	25.5	AV	N
0.642000	15.10	10.6	46	30.9	AV	N
3.986000	32.50	11.6	46	13.5	AV	N
11.946000	21.50	12.0	50	28.5	AV	N
19.930000	24.80	12.5	50	25.2	AV	N
27.926000	25.90	12.8	50	24.1	AV	N

RESULT: PASS

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

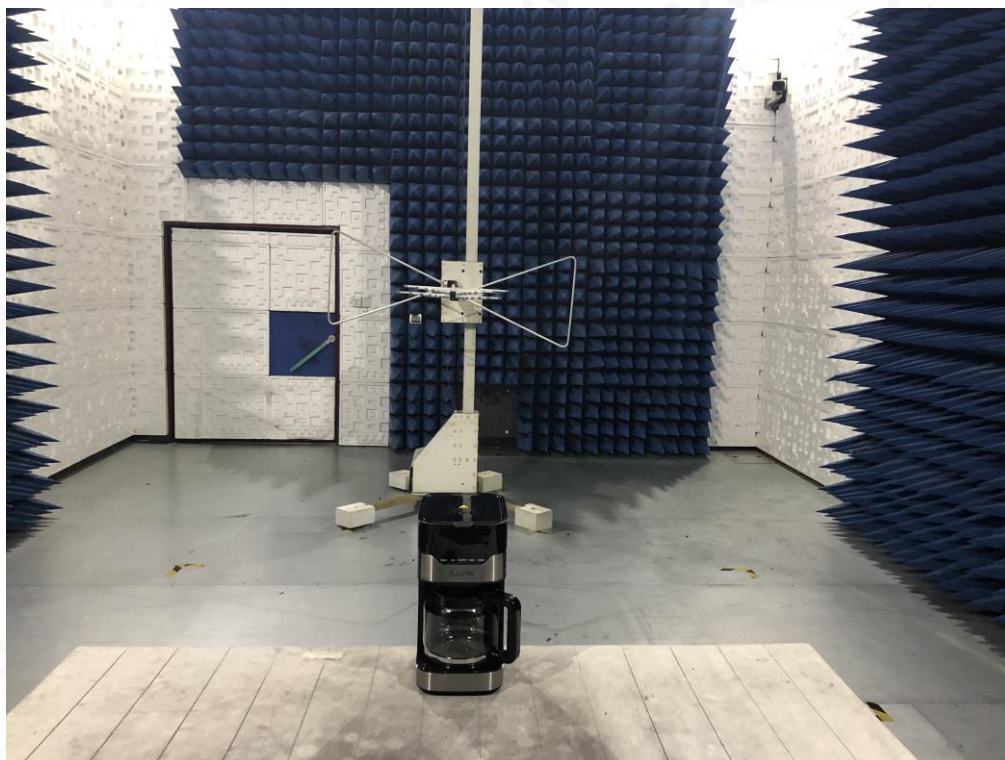

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



FCC CONDUCTED EMISSION TEST SETUP



APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT



TOP VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118


OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2

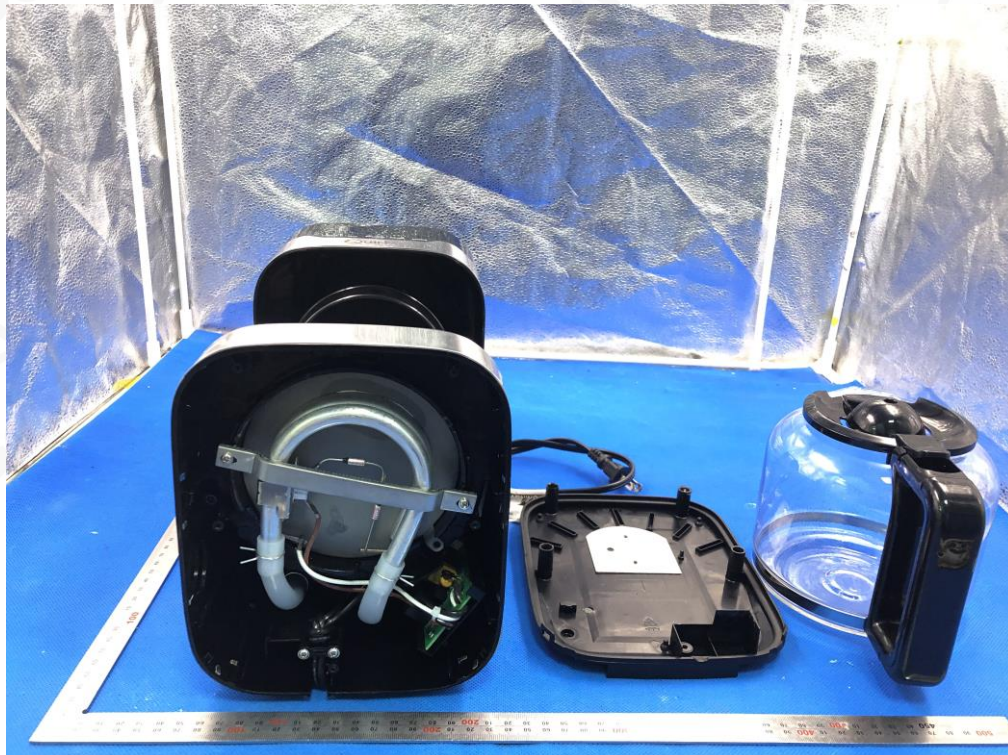


INTERNAL VIEW OF EUT-1

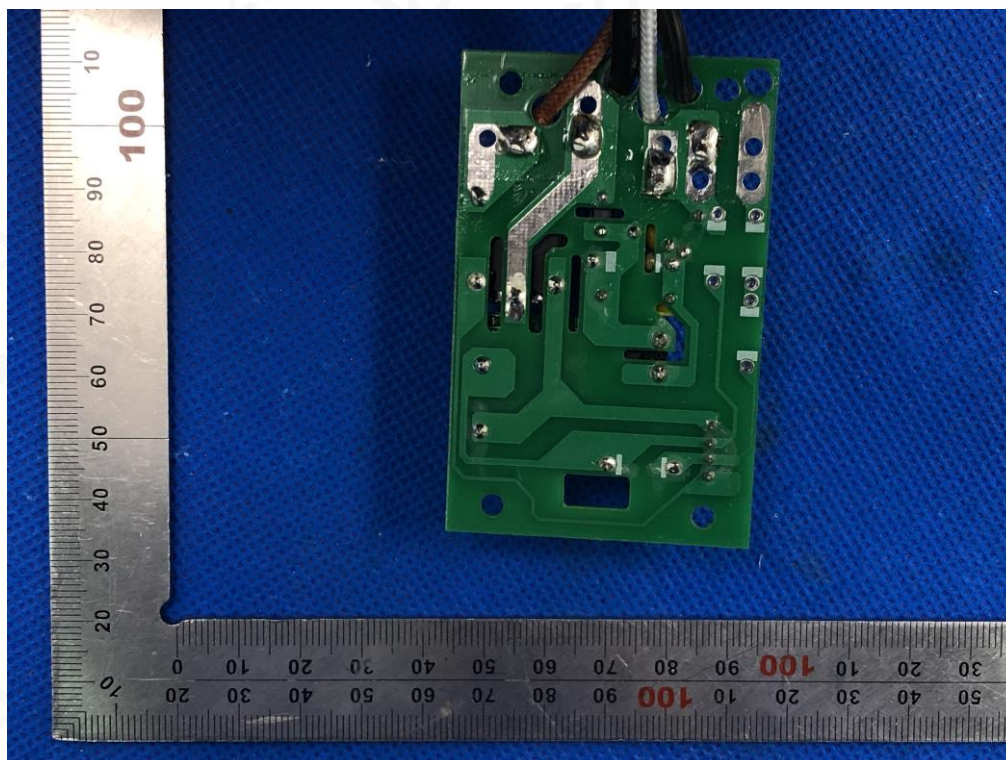


INTERNAL VIEW OF EUT-2

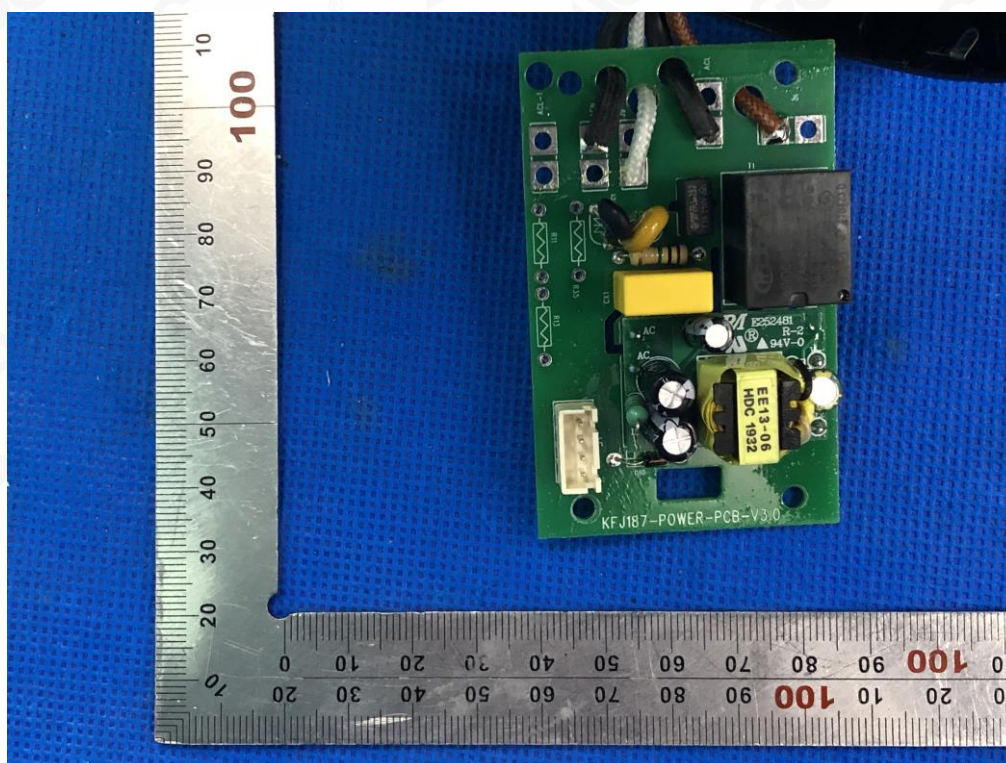

INTERNAL VIEW OF EUT-3

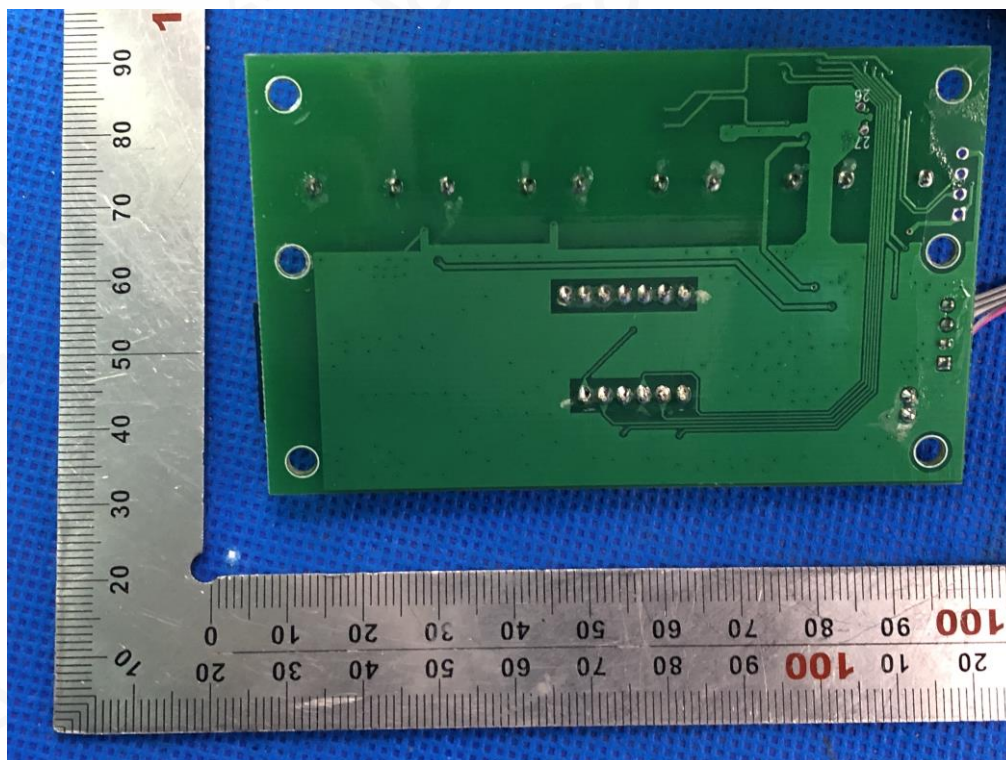


INTERNAL VIEW OF EUT-4

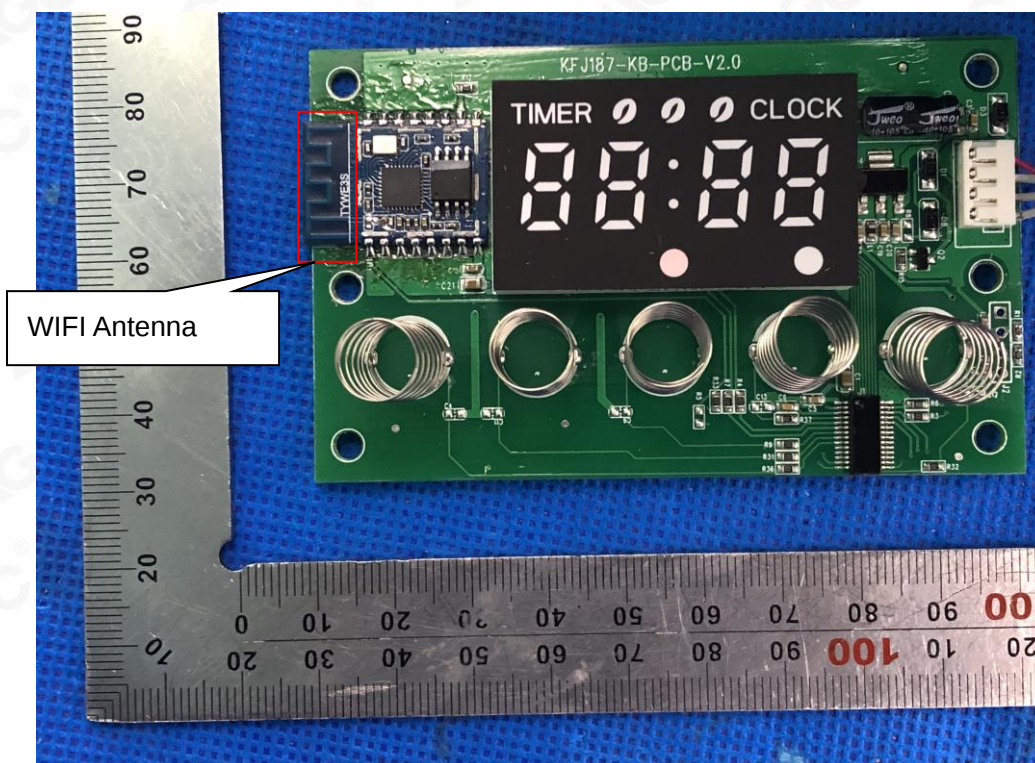

WIFI Antenna

INTERNAL VIEW OF EUT-5

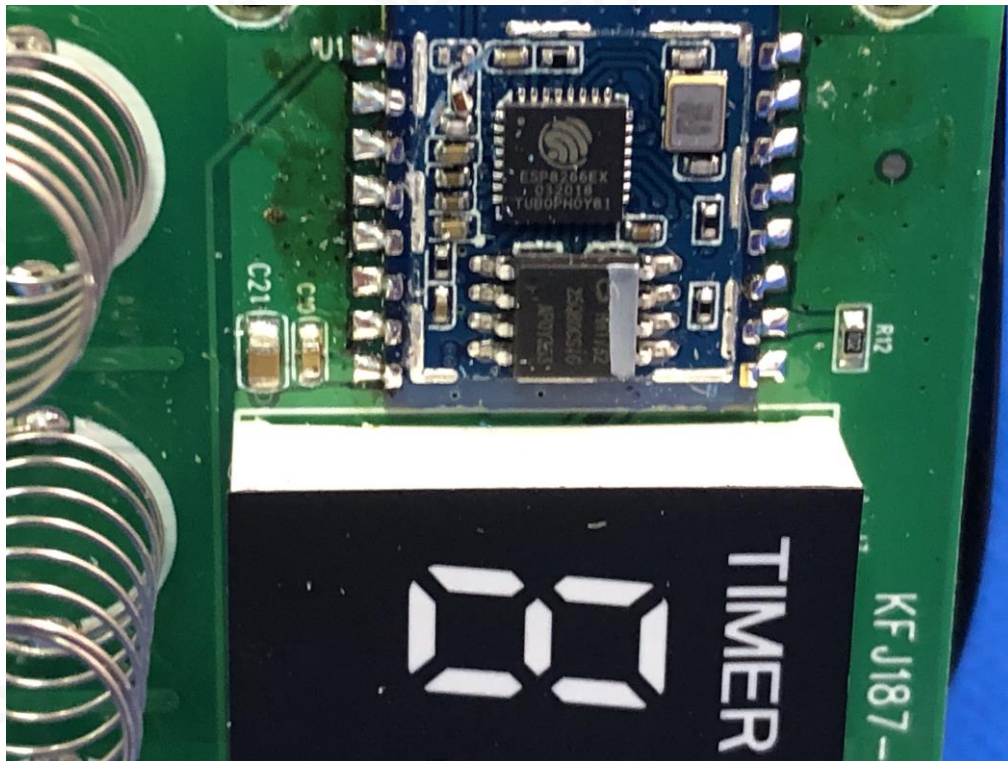

----END OF REPORT----