

WiFi 2.4GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 39.157$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1352; Calibrated: 11/7/2014
- Probe: EX3DV4 - SN3902; ConvF(7.29, 7.29, 7.29); Calibrated: 5/19/2014;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: TP 1751

Inner Surface/802.11b_ch 6/Area Scan (11x8x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.405 W/kg

Inner Surface/802.11b_ch 6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 12.527 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.093 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.533 W/kg

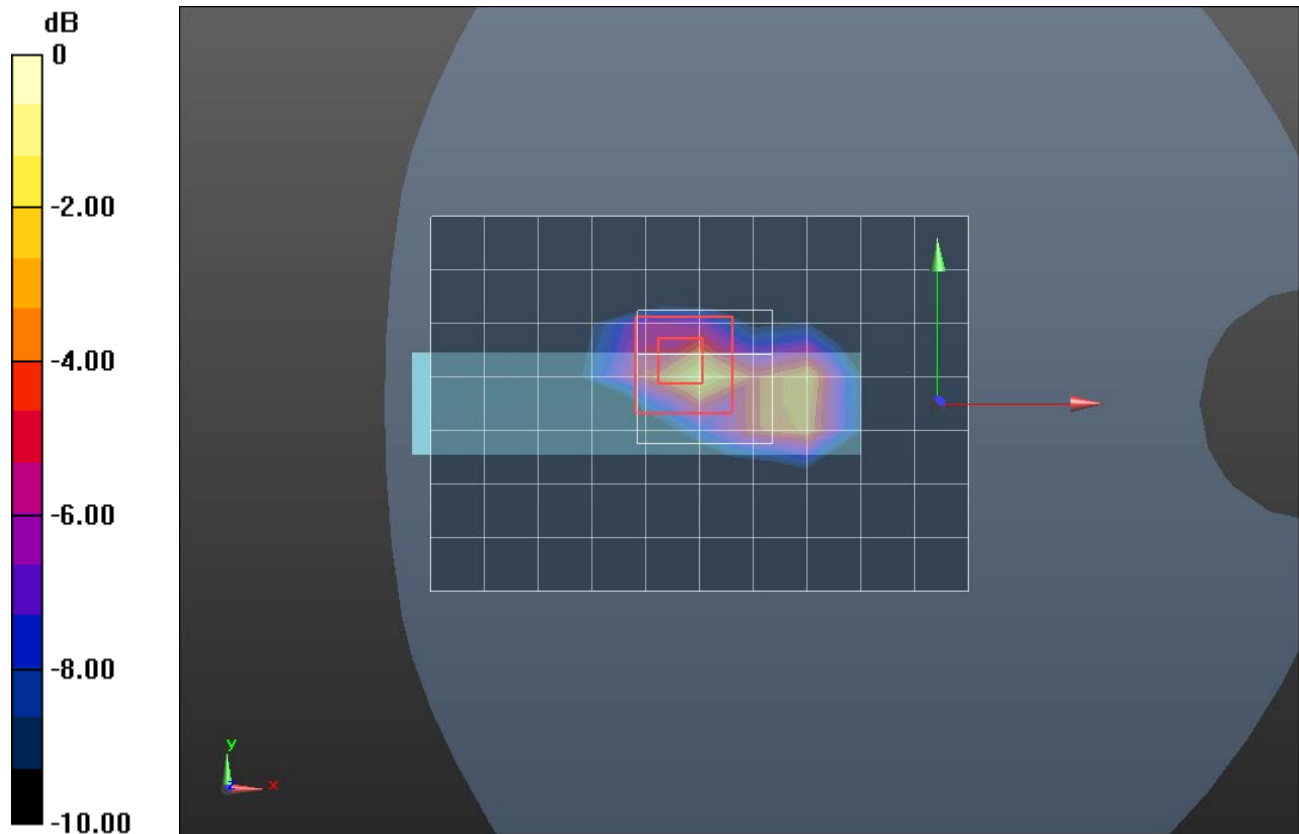

0 dB = 0.533 W/kg = -2.73 dBW/kg

WiFi 5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.705$ S/m; $\epsilon_r = 37.25$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1377; Calibrated: 8/27/2014
- Probe: EX3DV4 - SN3989; ConvF(5.3, 5.3, 5.3); Calibrated: 3/17/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM with CRP; Type: SAM; Serial: TP 1829

Inner Surface/802.11ac HT80_Ch 58/Area Scan (13x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.667 W/kg


Inner Surface/802.11ac HT80_Ch 58/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.20 W/kg

SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

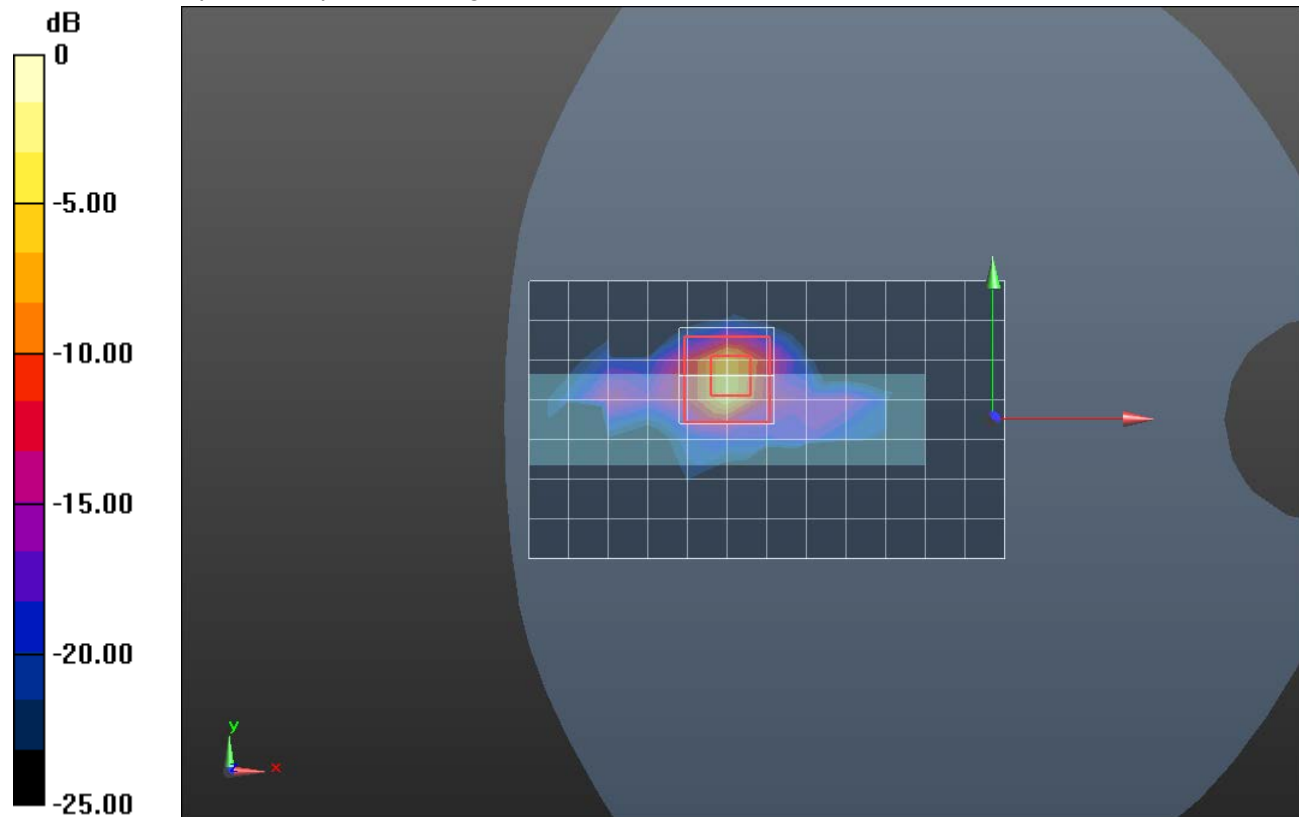

0 dB = 1.92 W/kg = 2.83 dBW/kg

WiFi 5GHz

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.894$ S/m; $\epsilon_r = 36.849$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1377; Calibrated: 8/27/2014
- Probe: EX3DV4 - SN3989; ConvF(4.9, 4.9, 4.9); Calibrated: 3/17/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM with CRP; Type: SAM; Serial: TP 1829

Inner Surface/802.11ac HT80_Ch 106/Area Scan (13x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.495 W/kg


Inner Surface/802.11ac HT80_Ch 106/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.443 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.69 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

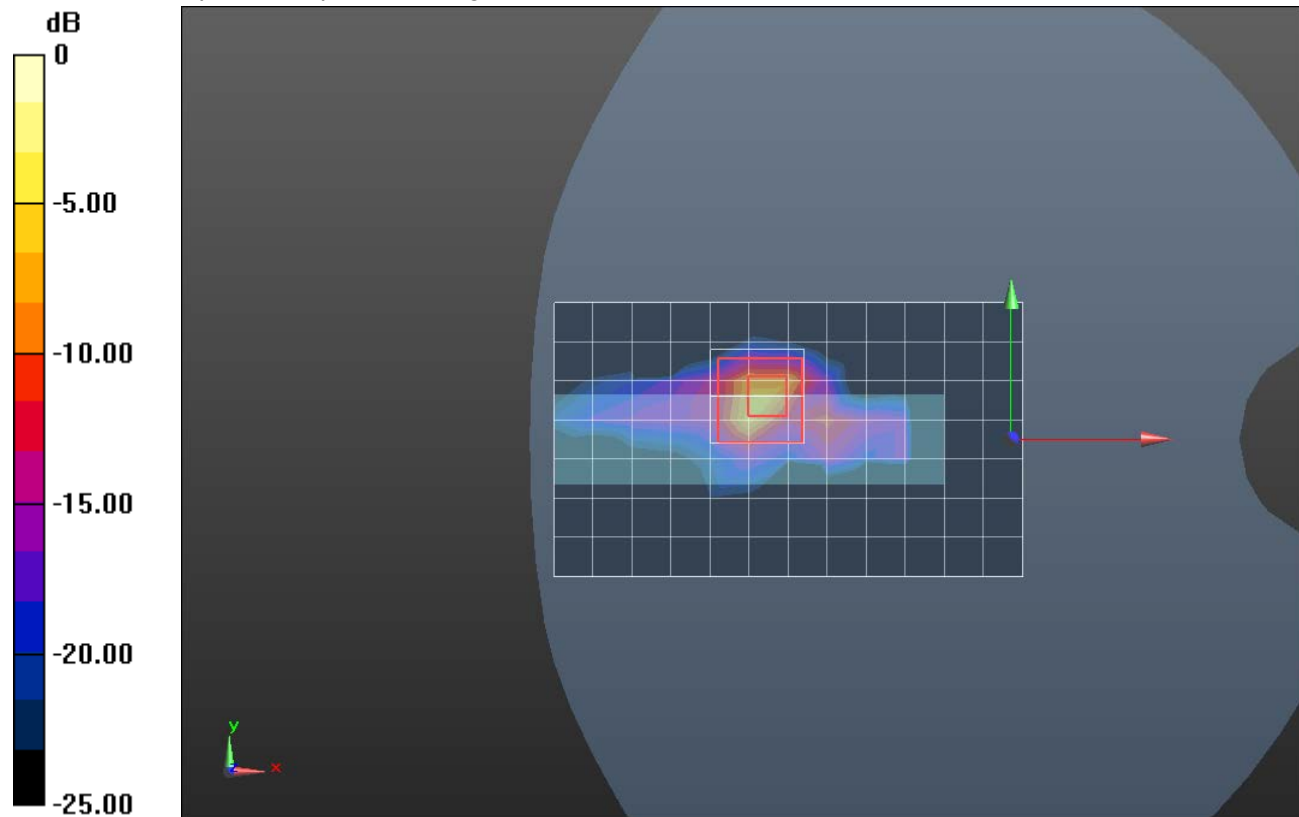

0 dB = 1.79 W/kg = 2.53 dBW/kg

WiFi 5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 36.338$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1377; Calibrated: 8/27/2014
- Probe: EX3DV4 - SN3989; ConvF(5.03, 5.03, 5.03); Calibrated: 3/17/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: SAM with CRP; Type: SAM; Serial: TP 1829

Inner Surface/802.11ac HT80_Ch 155/Area Scan (13x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.57 W/kg


Inner Surface/802.11ac HT80_Ch 155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 16.58 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 7.10 W/kg

SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

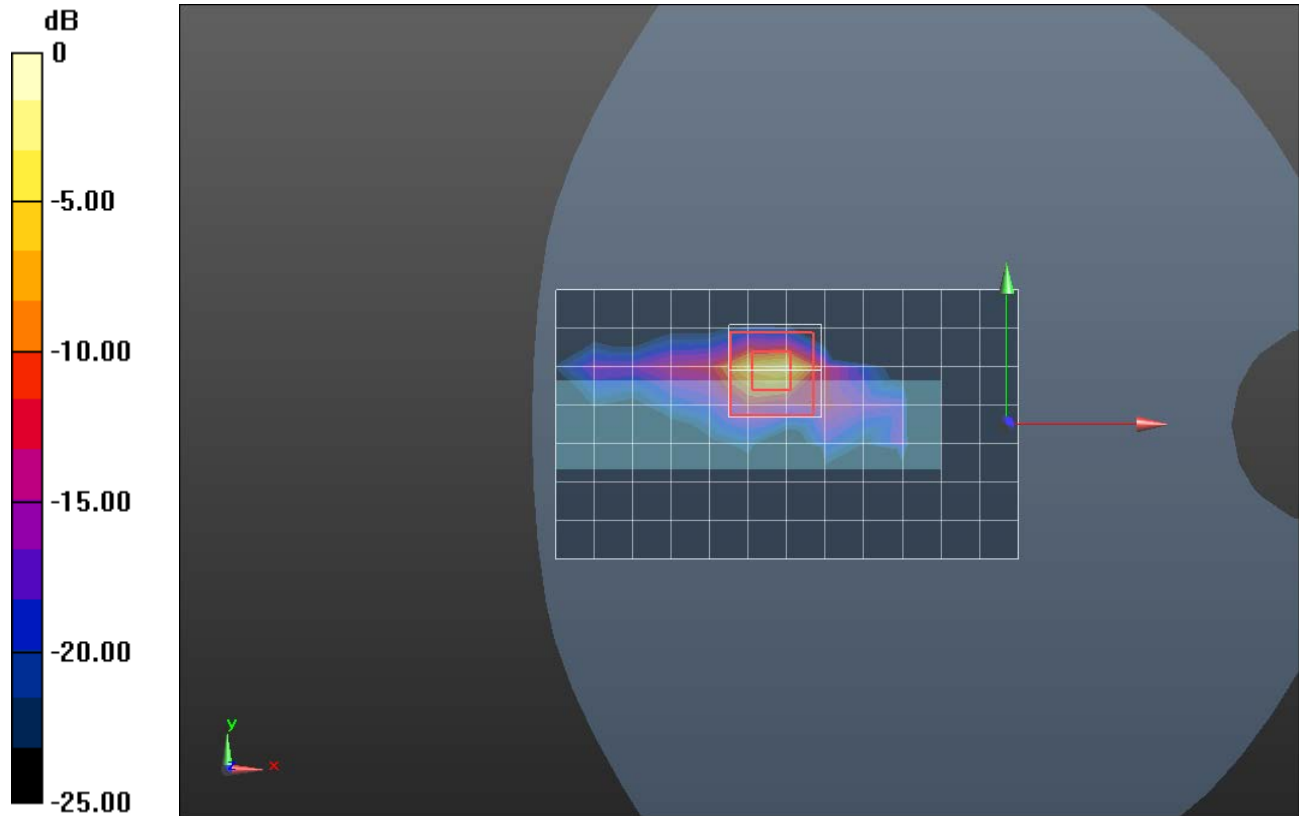

0 dB = 2.56 W/kg = 4.08 dBW/kg