

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER) 深圳市翊天科技有限公司
Shenzhen Itian Technology Co., LTD

客户料号 (CUSTOMER P/N) : Peak Gain 0dBi

品名 (DESCRIPTION) : DATE:2022-8-29

规格 (SPECIFICATION) : G35双线圈 25长 REV.NO.:A0

鸿日昇威科技承认签核、盖章
Hongri Shengwei technology admitted to sign, seal

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
品质	董晚红 2022-8-29	吕惠 2022-8-29	韦函满 2022-8-29	
工程	何伟华 2022-8-29	韦立红 2022-8-29	韦立红 2022-8-29	

备注:

翊天科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
开发工程师				
采购				
品质				

备注:

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD


ADD: 深圳市龙华新区观澜环观中路48号1栋2楼

TEL: +86-755-23461055 FAX: +86-0755-28015170


page:1/2

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

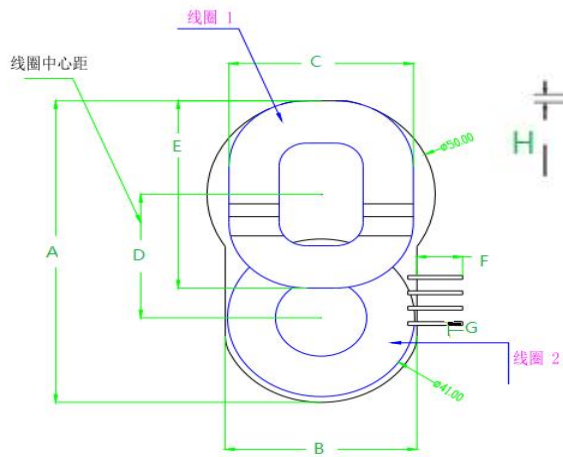

2. SCHEMATICS:



- 线圈组装时1号线圈在2号线圈上面
1. Coil No. 1 is above coil No. 2 when the coil is assembled
- 线圈出线位置
缠胶纸 1-2Ts;Coil outlet position 1-2 ts wrap tape;
- 隔磁片底部要贴背胶
The bottom of the spacer should be glued

A	B	C	D	E	F	G	H		
78±1.0	42±1.0	42±1.0	30±2	50±1	25±3	4±2	2.6MAX		

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线Ø 0.08*24mm*2P 2UEW	9TS (Ref)		
N2	S-F	丝包线Ø 0.08*24mm*2P 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L1	DCR1	L2	DCR2	HI-POT
TEST	线圈加磁片 Coil and disk	S-F	单独线圈 A separate coil	S-F	
COND	100KHz, 0.25V	AT 25°C	100KHz, 0.25V	AT 25°C	
SPEC	7.1uH±10%	80mΩ	6.5uH±10%	72	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	丝包线0.08*105股 Silk covered wire 0.08*105 strands	丙酮丝包线0.08*24股 Acetone covered wire 0.08*24 strands	NANJINGJINNINGCO,LTD	
2	无铅锡条 Lead-free solder article	无铅锡条 Lead-free solder article	QIAODO	
3	磁片 magnetic sheet	78*42锰锌硬磁片 78*42 manganese-zinc hard magnetic sheet	TAIYI CO.,LTD	
4	胶水 Glue	黄胶9999 Yellow glue 9999	LIANCHENG CO.,LTD	

5	高温胶纸 high-temperature adhesive tape	8mm宽高温胶纸 8mm wide high temperature adhesive paper	CUDAK CO.,LTD	
6	背胶 application of gum	Ø 77.5*41.5*0.1	CUDAK CO.,LTD	
HRSW ELECTRONICS CO.,LTD			PART NO	
			TITLE	G35双线圈 25长
DRAWN BY		CHECKED BY		APPROVED BY
何伟华		韦立红		韦立红