

SENA

Dates of Tests: July 11, ~ 22, 2014

Test Report S/N: LR500111408B

Test Site : LTA CO., LTD

CERTIFICATION OF COMPLIANCEFCC ID
IC
APPLICANT**S7A-SP15**
8154A-SP15
Sena Technologies, Inc.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Bluetooth Action Camera
Manufacturer	:	Sena Technologies, Inc.
Model Name	:	SCA10
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2009 RSS-210 and ISSUE No. :8 Date :2010
Frequency Range	:	2402MHz ~ 2480MHz (BT 4.0 LE)
Max. Output Power	:	Max 3.86 dBm - Conducted
Data of issue	:	July 23, 2014

This test report is issued under the authority of:



Jae-Ho Lee, Manager

The test was supervised by:



Young-Jin Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. INFORMATION ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 6dB BANDWIDTH	6
3.2.2 PEAK OUTPUT POWER	10
3.2.3 POWER SPECTRAL DENSITY	13
3.2.4 BAND – EDGE	16
3.2.5 CONDUCTED SPURIOUS EMISSIONS	19
3.2.6 FIELD STRENGTH OF HARMONICS - TRANSMITTER.....	23
3.2.7 FIELD STRENGTH OF HARMONICS - RECEIVERS.....	26
3.2.8 AC CONDUCTED EMISSIONS	31
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	34

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2014-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2015-03-06	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2015-04-17	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Product Information

2-1 Applicant

Company name : Sena Technologies, Inc.
 Address : 210 Yangjae-dong Seocho-gu Seoul 137-130 Korea
 Tel / Fax : +82-2-571-8283 / +82-2-573-7710

2-2 Equipment Under Test (EUT)

Trade name : PRISM
 Model name : SCA10
 Date of receipt : July 10, 2014
 EUT condition : Pre-production, not damaged
 Antenna type : Chip Antenna (SENA_009) Max Gain 0.5 dBi
 Frequency Range : 2402MHz ~ 2480MHz (BT 4.0LE)
 RF output power : Max 3.86 dBm - Conducted
 Number of channels : 40
 Type of Modulation : GFSK
 Channel spacing : 2MHz
 Power Source : DC 3.7V
 Firmware Version : V1.0.0

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2442	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
NOTEBOOK	PP37L	29705283757	DELL

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.247(d)	Band Edge & Spurious	> 20 dBc		C
15.209	Field Strength of Harmonics	Emissions	Radiated	C
15.109	Field Strength	-		C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The **Sena Technologies**, FCC ID: **S7A-SP15** unit complies with the requirement of §15.203.

The Antenna type is the Chip Antenna.

The sample was tested according to the following specification:

*FCC Parts 15.247; ANSI C-63.4-2009

*FCC KDB Publication No. 558074 D01 DTS Meas. Guidance V01

*FCC TCB Workshop 2012, April

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

*The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 10 MHz

VBW = 300 kHz (VBW \geq 3x RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Frequency (MHz)	Channel No.	Test Results(MHz)	
		6dB Bandwidth	99% Bandwidth
2412	0	0.709	1.071
2442	20	0.709	1.056
2480	39	0.724	1.056

Minimum Standard:


6 dB Bandwidth > 500kHz

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Channel 0

6dB Bandwidth

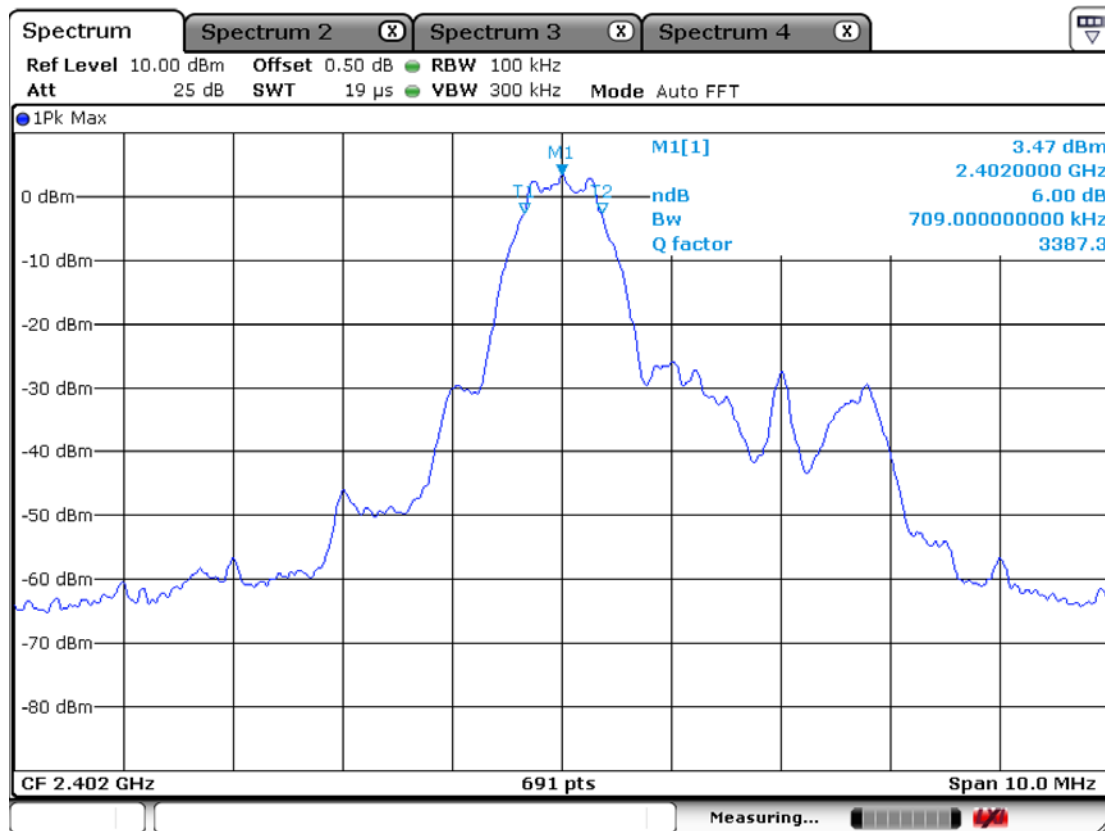


99% Bandwidth

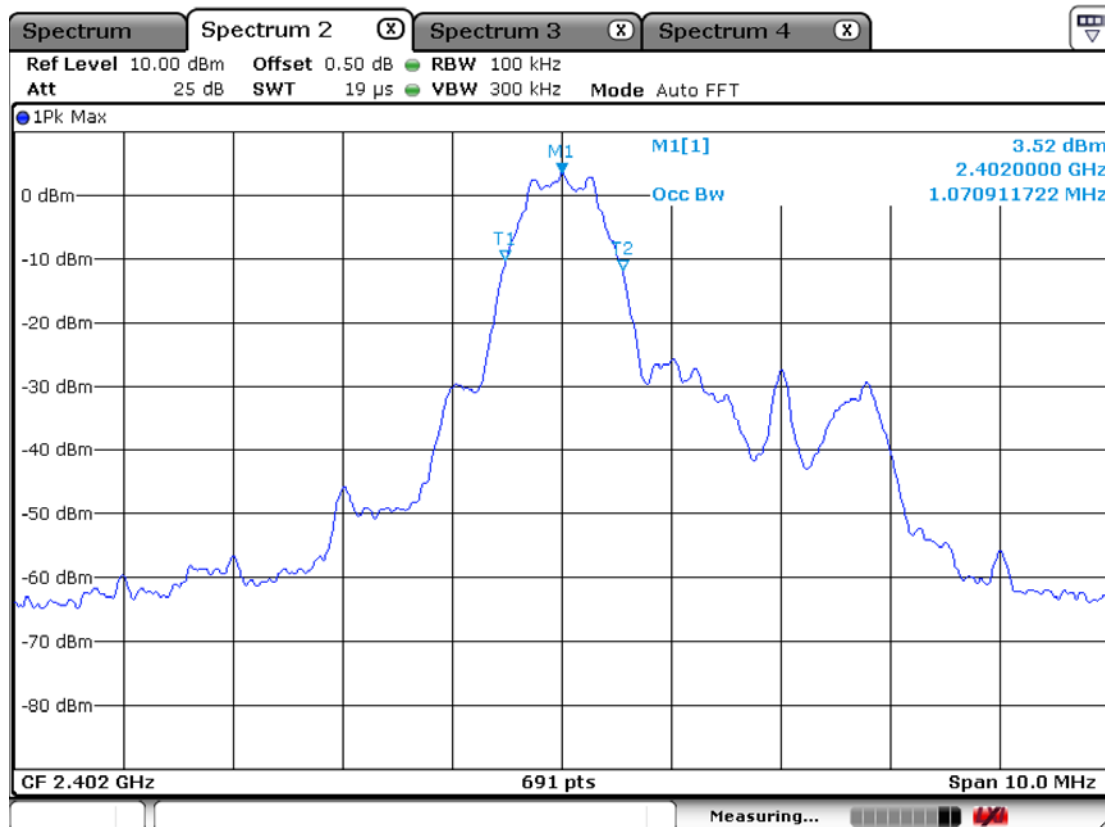


Channel 20

6 dB Bandwidth

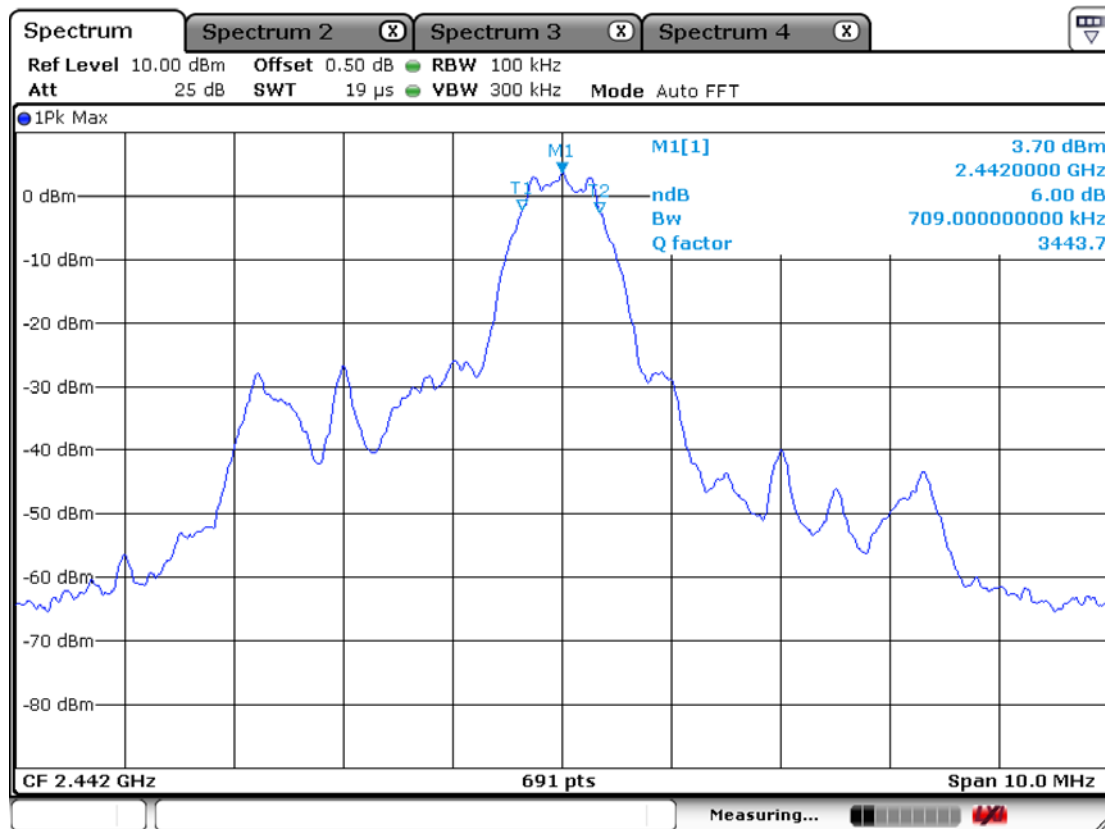


99% Bandwidth

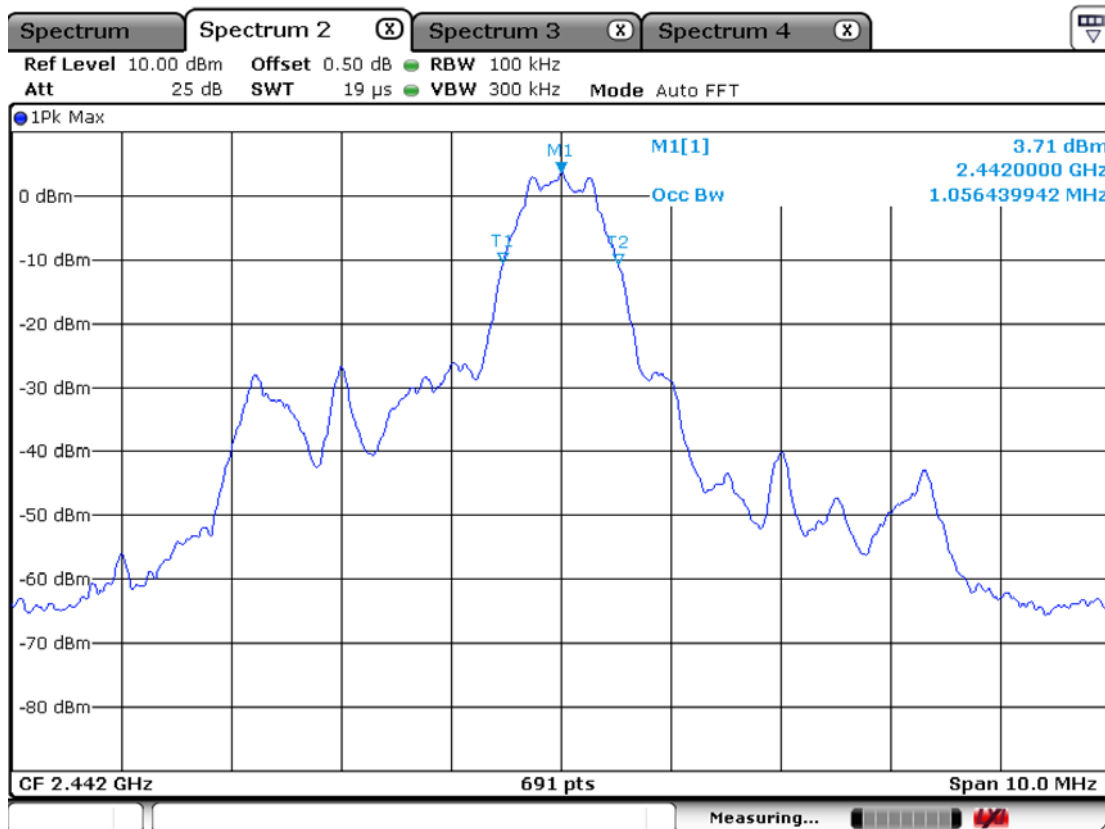


Channel 39

6 dB Bandwidth

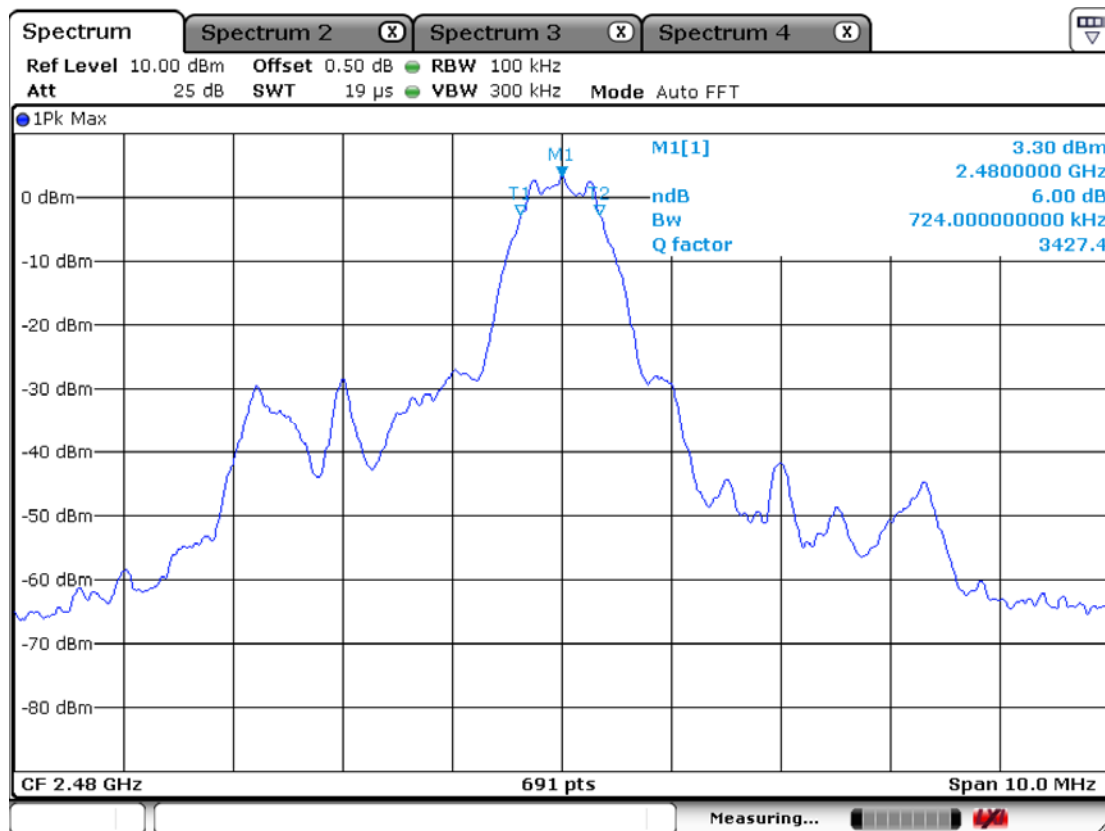

99% Bandwidth

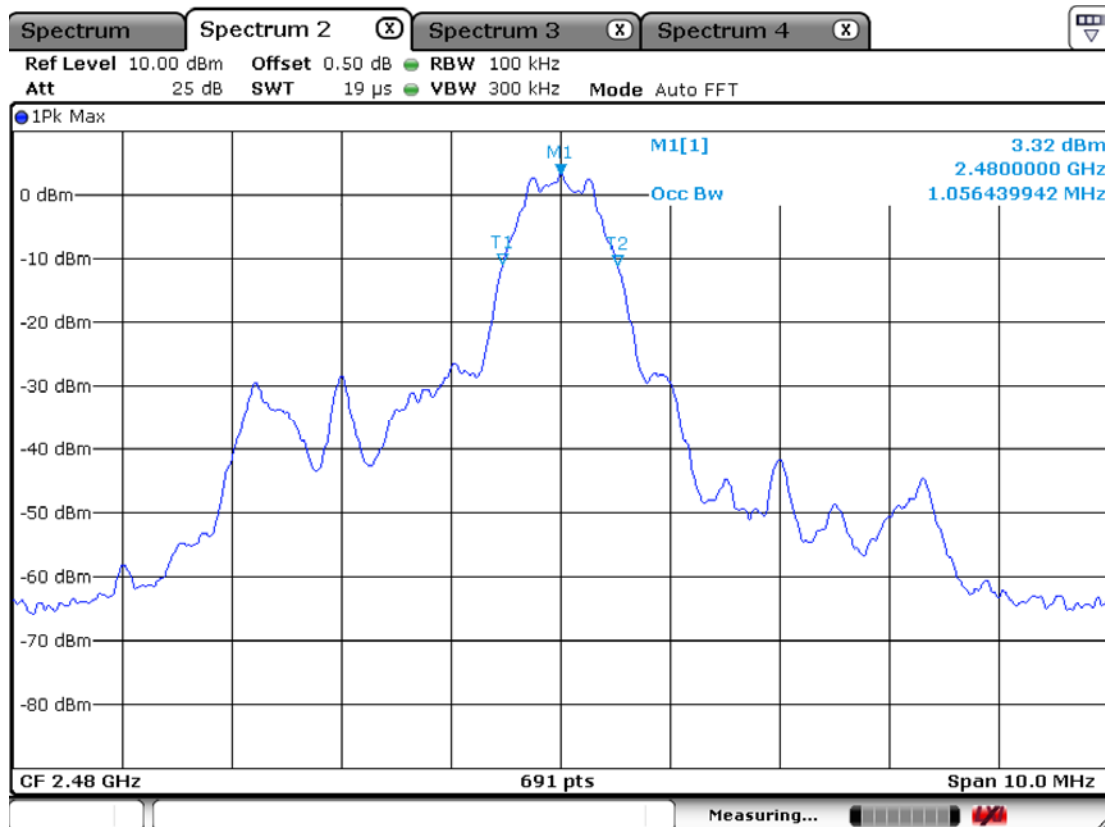

3.2.2 Peak Output Power Measurement

Procedure:

*The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April. The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz

Span = 1.5 x DTS bandwidth

VBW = 3MHz (VBW \geq 3x RBW)

Sweep = auto

Detector function = peak

Measurement Data:


Frequency (MHz)	Channel No.	Test Results		
		Measured Data (dBm)	Measured Data (mW)	Result
2402	0	3.68	2.33	Complies
2442	20	3.86	2.43	Complies
2480	39	3.47	2.22	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1W
-------------------	------


CH 0

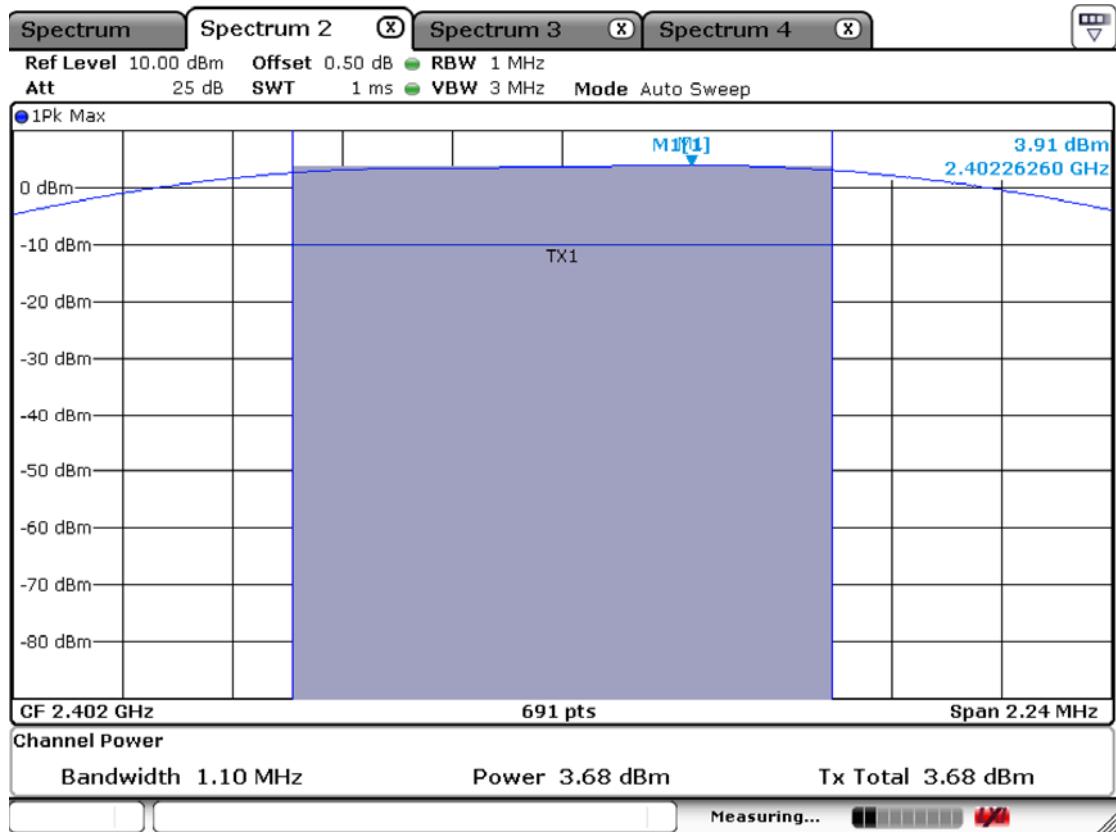

CH 20

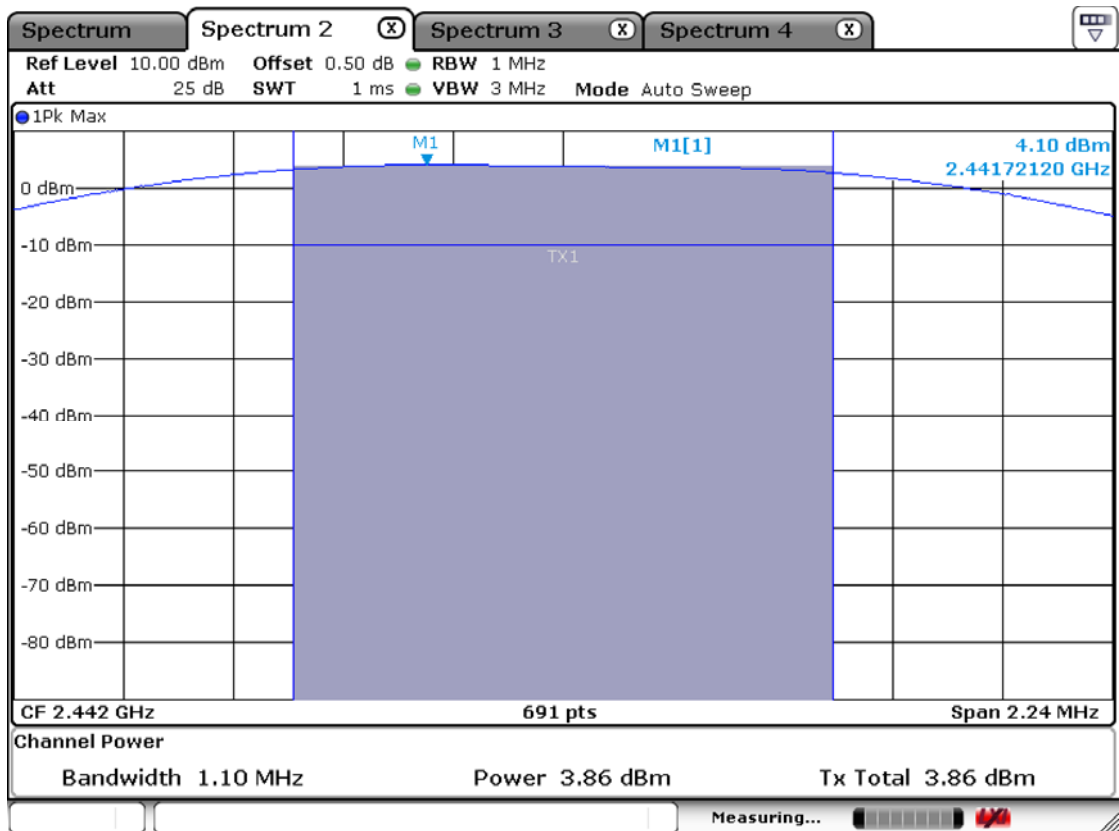

CH 39

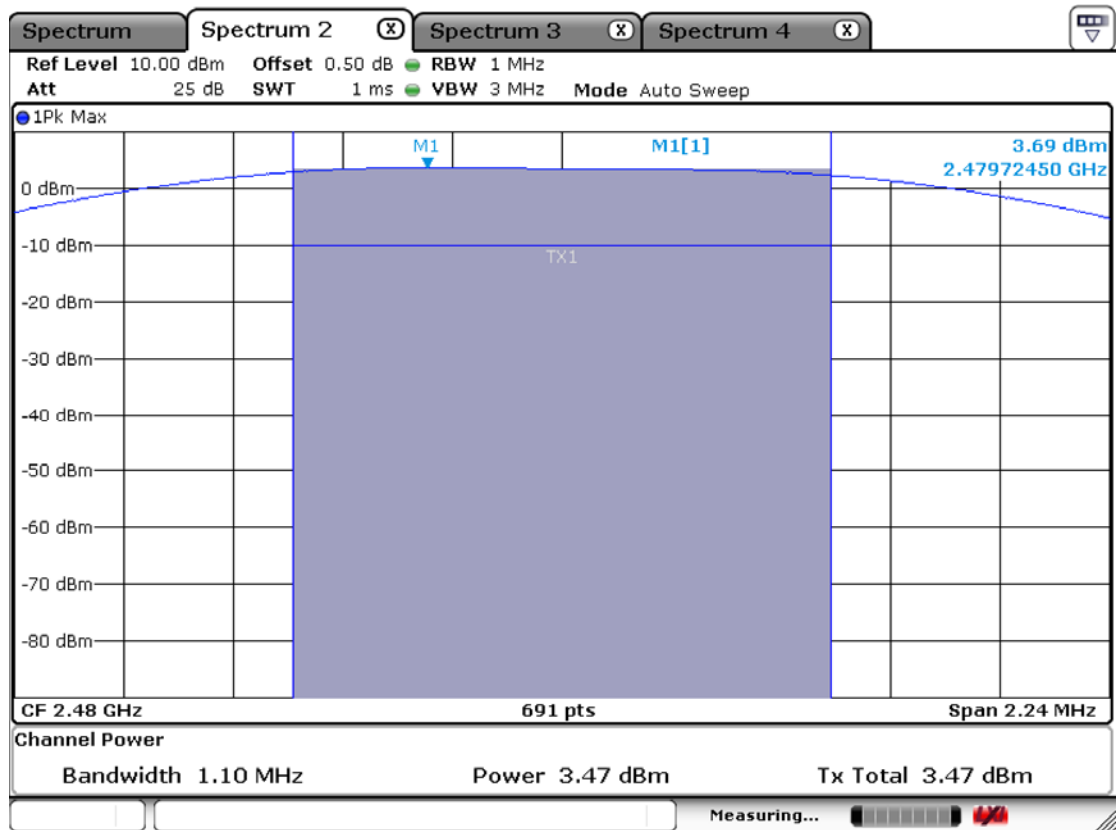

3.2.3 Peak Power Spectral Density

Procedure:

*The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz ($3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$) Span = 1.1 MHz

VBW = 10 kHz ($\text{VBW} \geq 3 \times \text{RBW}$) Sweep = auto

Detector function = peak Trace = max hold

Measurement Data:

Frequency (MHz)	Ch.	Test Results	
		dBm	Result
2402	0	-11.91	Complies
2442	20	-11.68	Complies
2480	39	-12.09	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Peak Power Density Measurement


CH 0

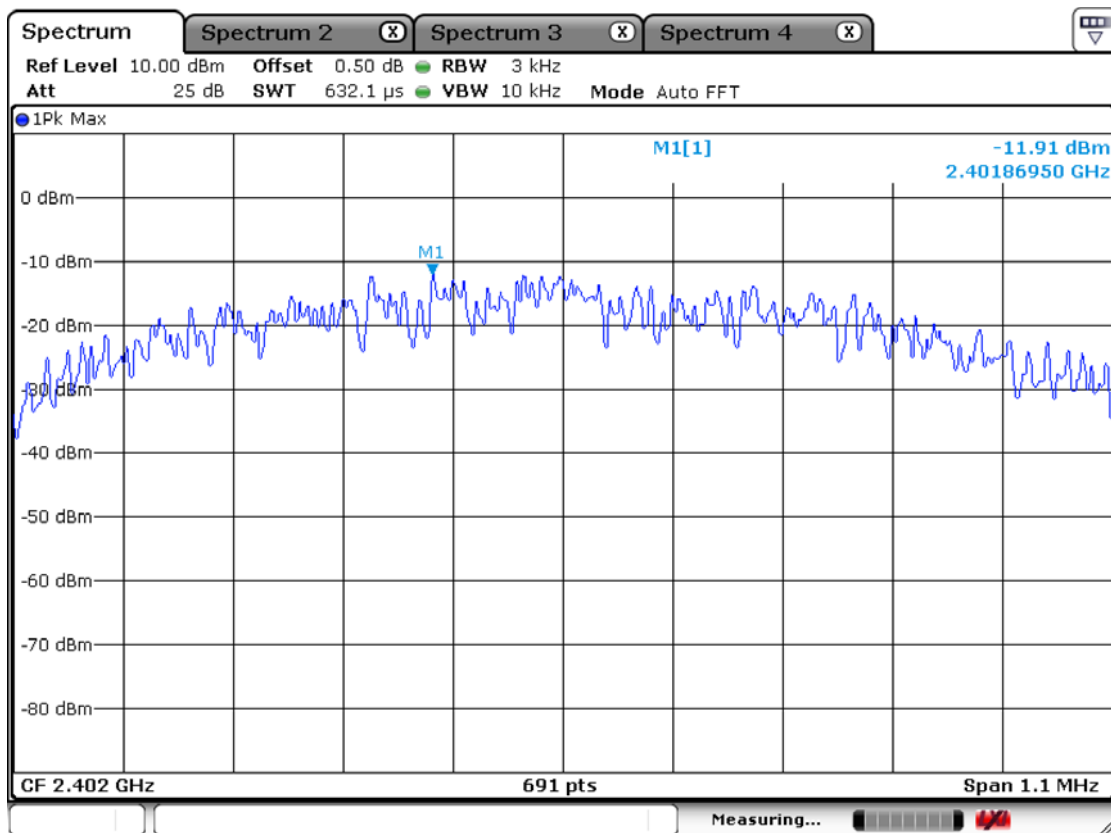

CH 20

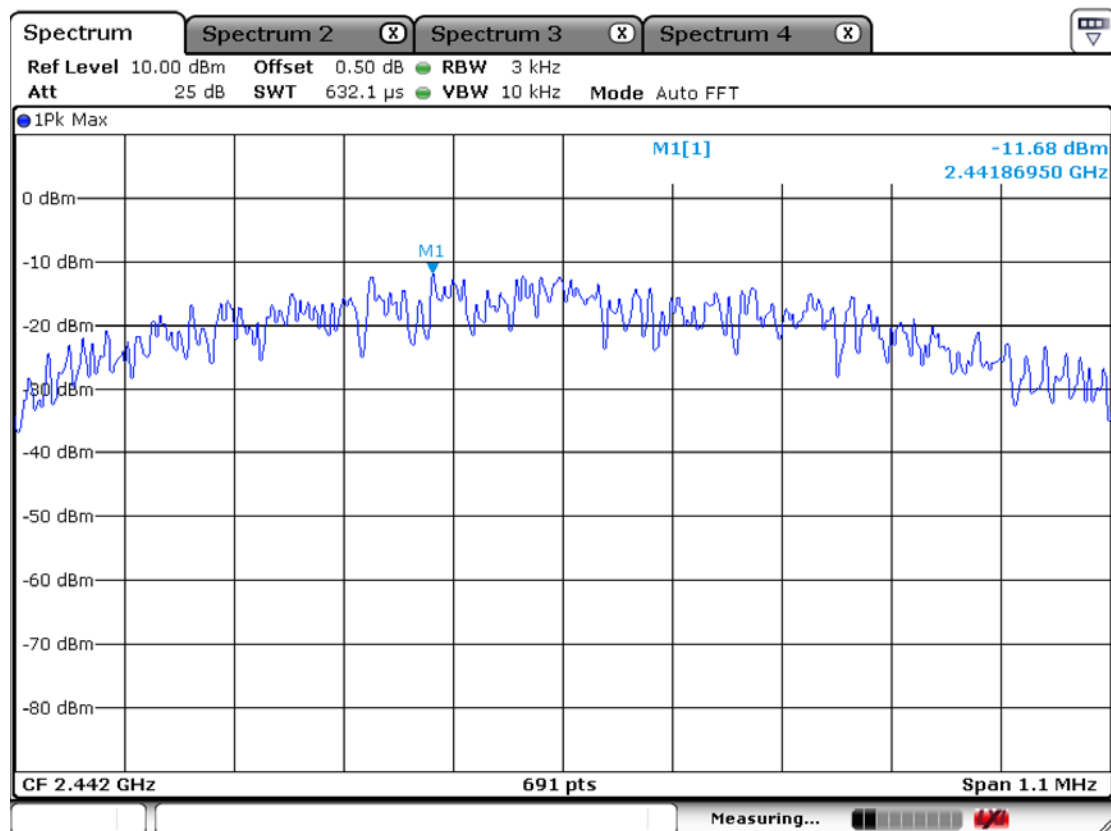

CH 39

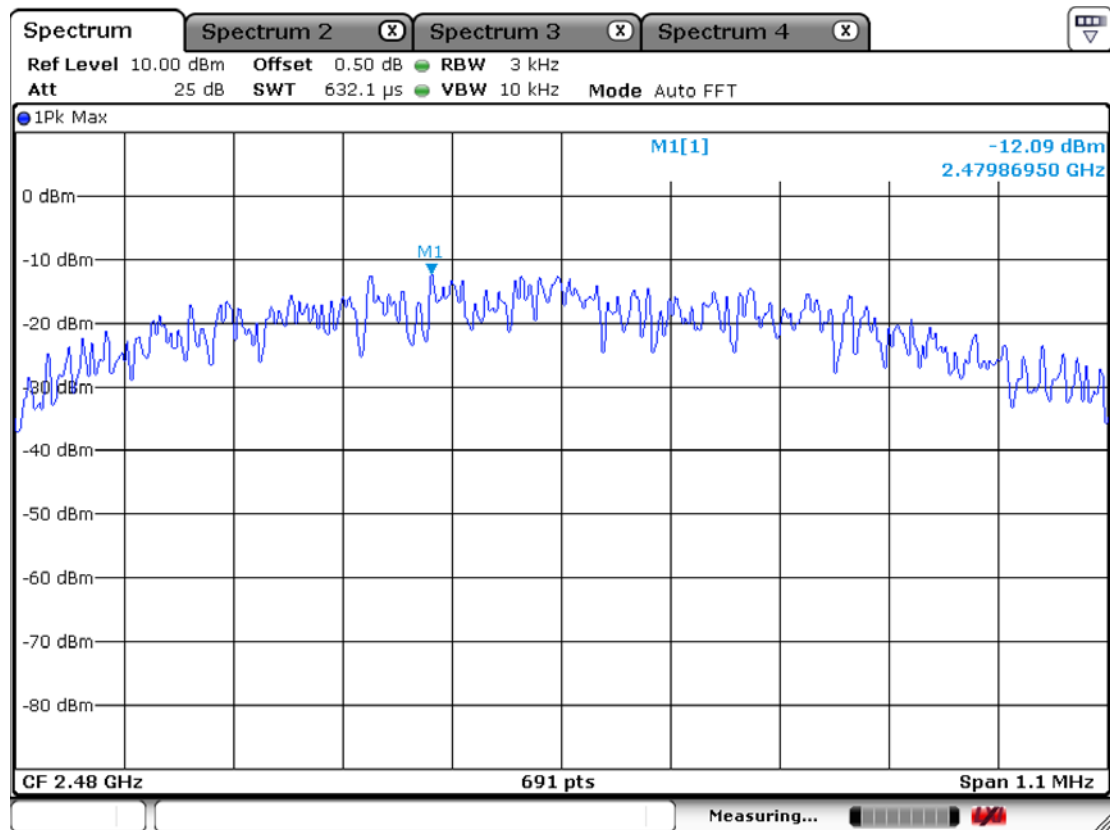

3.2.4 Band - edge

Procedure:

*The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April. The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 20-40 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Frequency = the highest, middle and the lowest channels

PEAK:

RBW = VBW = 1MHz, Sweep=Auto

Average:

RBW = 1MHz, VBW=10Hz, Sweep=Auto

Measurement Distance:

3m

Polarization:

Horizontal / Vertical

Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Band-edge : Conducted Measurements

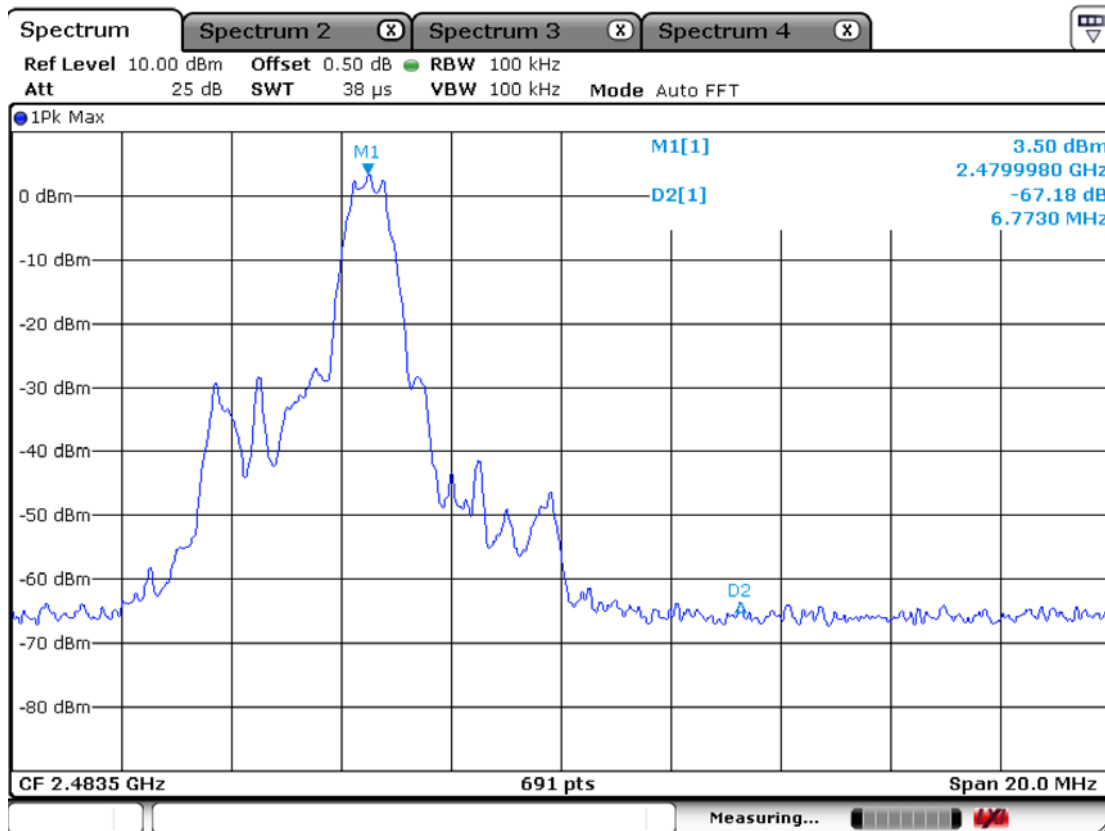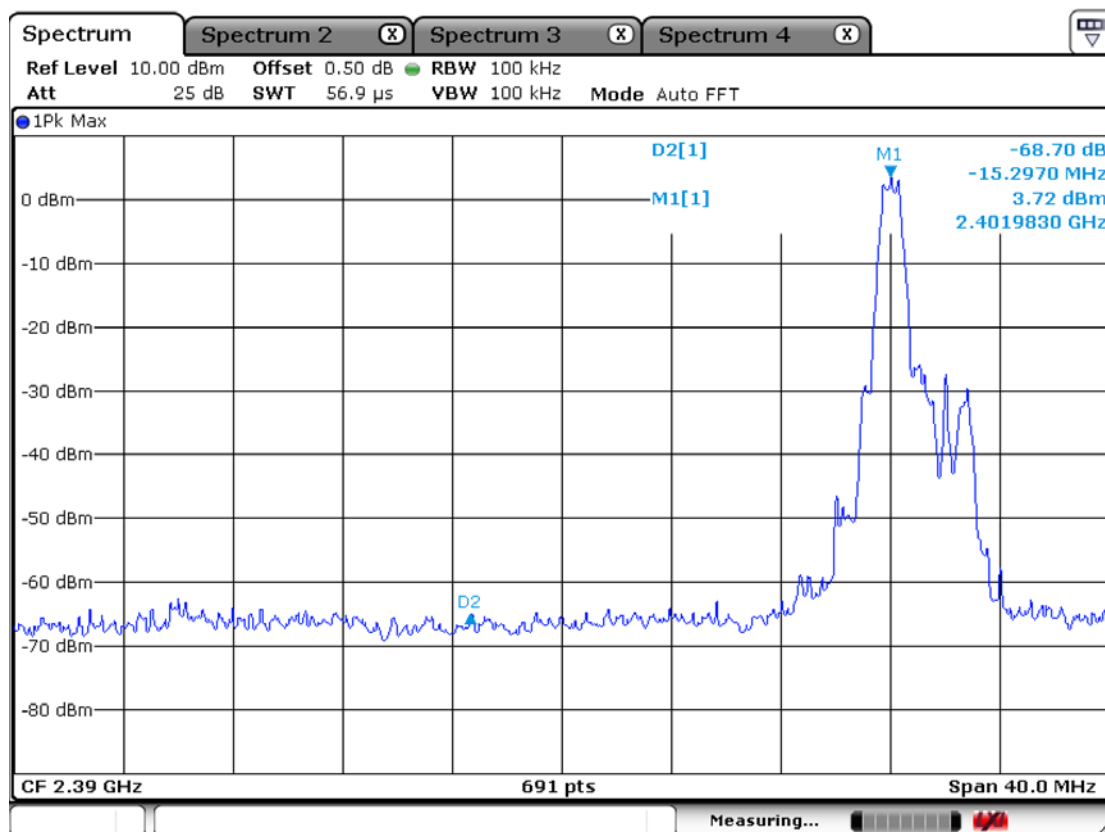

Band-edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain+CableLoss	AV / Peak		AV / Peak		AV / Peak	
2385.7	33.6	47.6	V	22.22	21.98	54.0	74.0	33.8	47.8	20.2	26.2

Band-edges in the restricted band 2483.5-2500 MHz measurement (Ant M/N: AN2400-3306RS)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain+CableLoss	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
2483.5	34.5	51.5	V	22.22	21.98	54.0	74.0	34.7	51.7	19.3	22.3

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low channel
Frequency Range = 30 MHz ~ 10th harmonic.

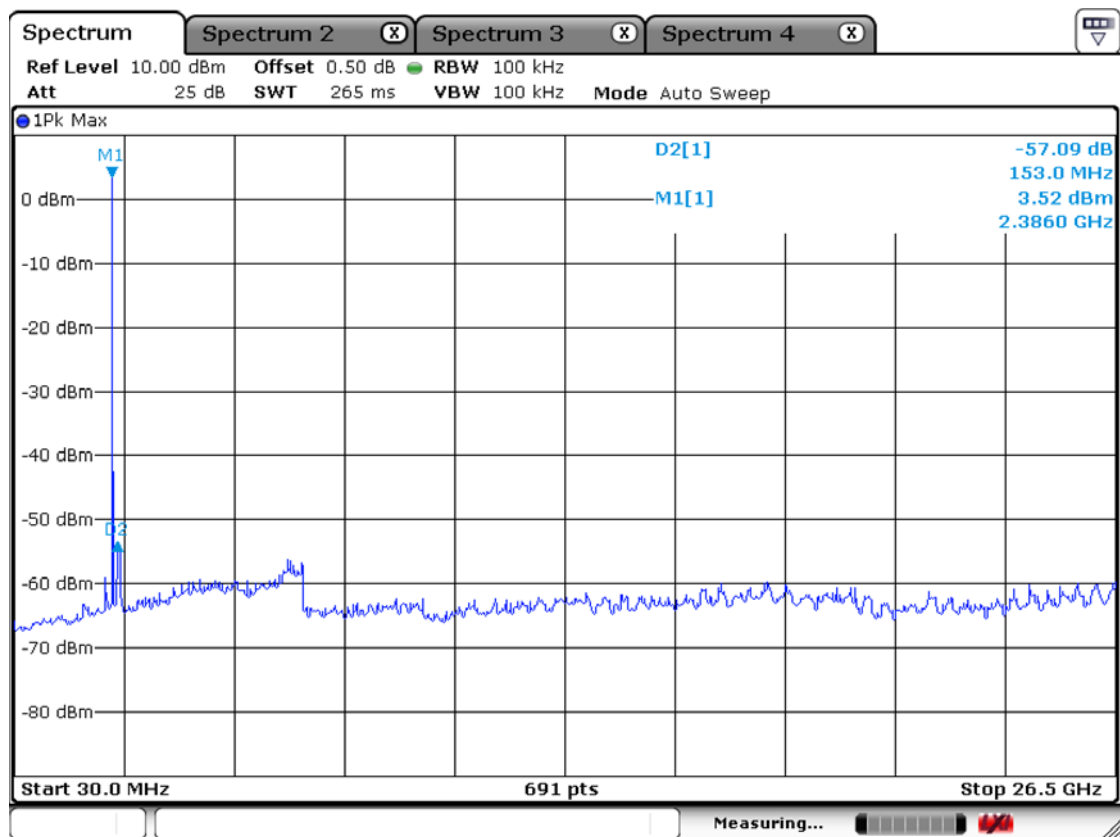

Mid channel
Frequency Range = 30 MHz ~ 10th harmonic.

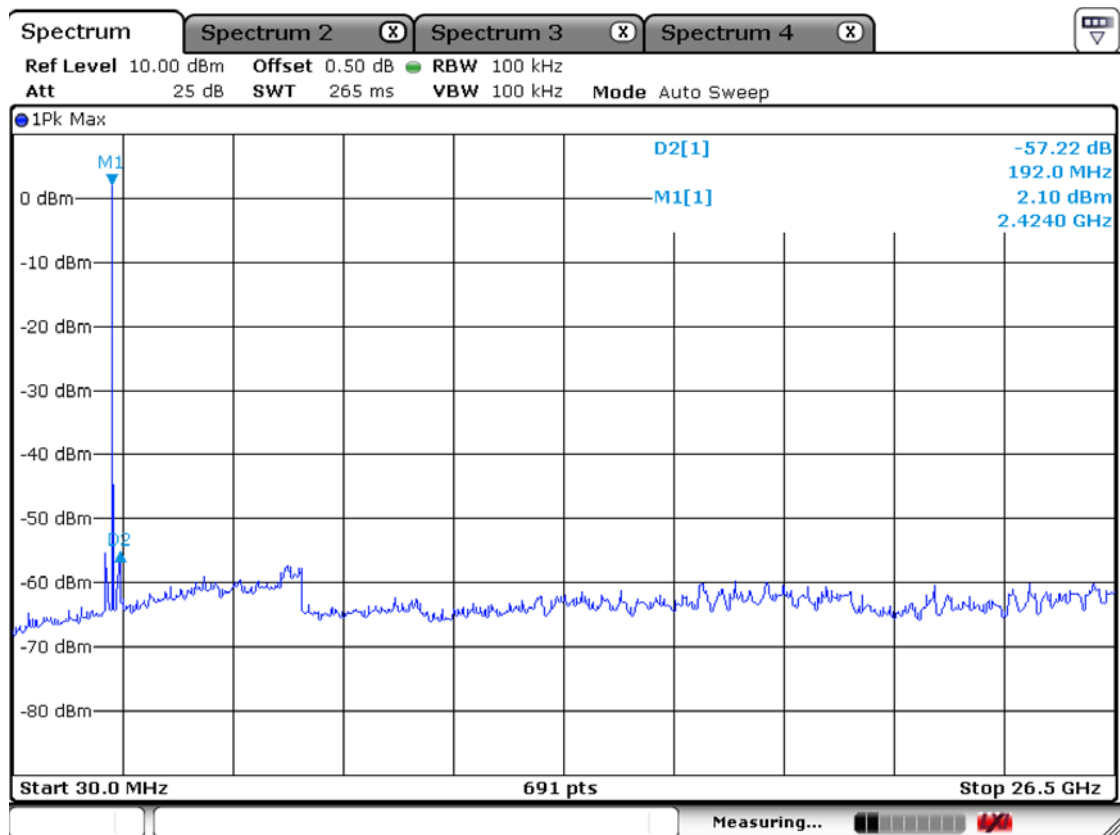

High channel
Frequency Range = 30 MHz ~ 10th harmonic.

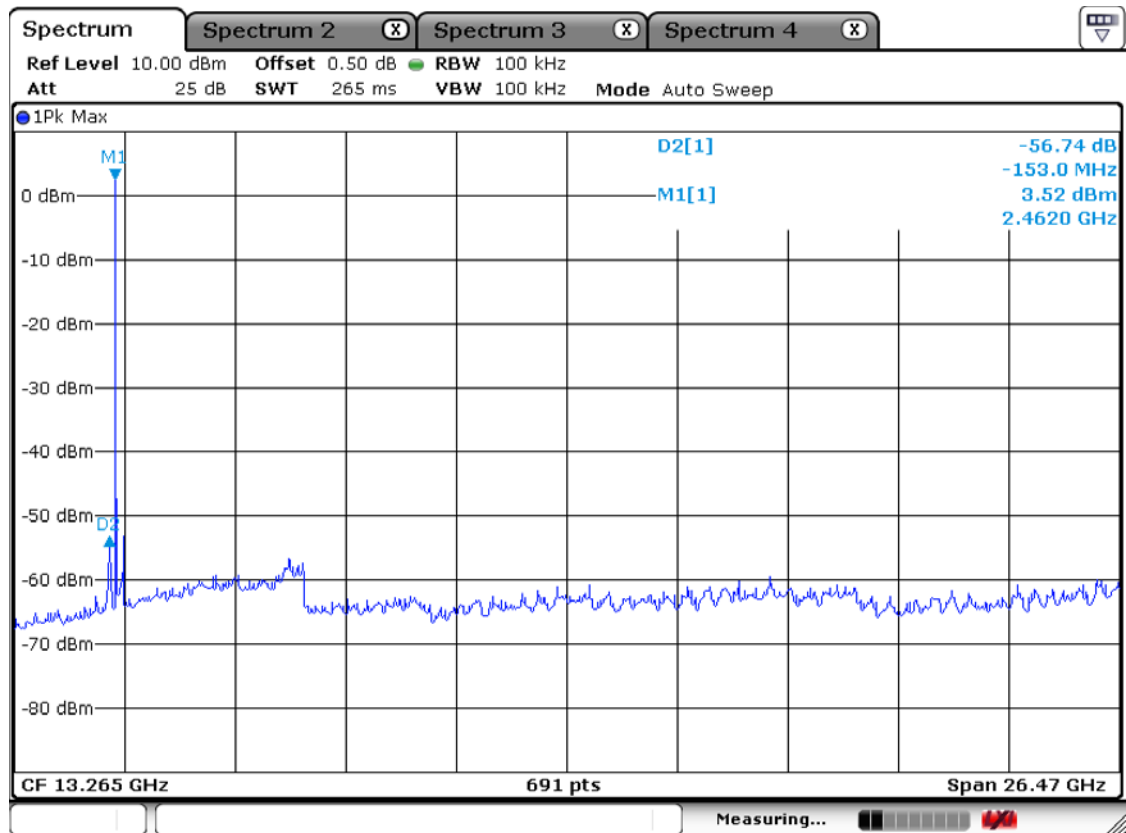

3.2.6 Field Strength of Harmonics-Transmitter

Procedure:

*The testing follows TCB Workshop 2012, April and fulfills ANSI C63.4-2003 and the guidelines in ANSI C63.10-2009 test requirement. The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 KHz ~ 10th harmonic.

RBW = 120 kHz (9 KHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Trace = max hold

Peak:VBW \geq RBW

Average:VBW=10Hz

Detector function = Peak and Average

Sweep = auto

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit.
- The three antennas were used with this EUT during the Testing.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F (kHz) @ 300m
0.490 ~ 1.705	24000/F (kHz) @ 30m
1.705 ~ 30	30 @ 30m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : (Above 1GHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak			
4804	48.6	58.1	V	33.3	21.98	-30.54	54.0	74.0	29.4	38.9	24.6	35.1
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak			
4882	48.2	58.6	V	33.3	21.98	-30.54	54.0	74.0	29.0	39.4	25.0	34.6
Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		D.C.F	Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak			
4960	48.1	57.9	V	33.3	21.98	-30.54	54.0	74.0	28.9	38.7	25.1	35.3

- No other emissions were detected at a level greater than 20dB below limit.

- D.C.F (Duty Cycle Correction Factor) = $20\log(\text{The worst Case DWELL Time}/100\text{ms})$

$$= 20\log(2.971\text{ms}/100\text{ms}) = -30.54$$

Measurement Data: (9kHz - 30MHz)

Frequency [MHz]	Reading [dBuV/m]		Pol.	Correction Factor		Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20dB below limit.

Radiated Emissions – BT + Charging mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: SCA10

TEST MODE: BT + Charging mode


Temp Humi : 33 / 55

Tested by: Y00 B C

Data: 32

Level (dBuV/m)

Date: 2014-07-17

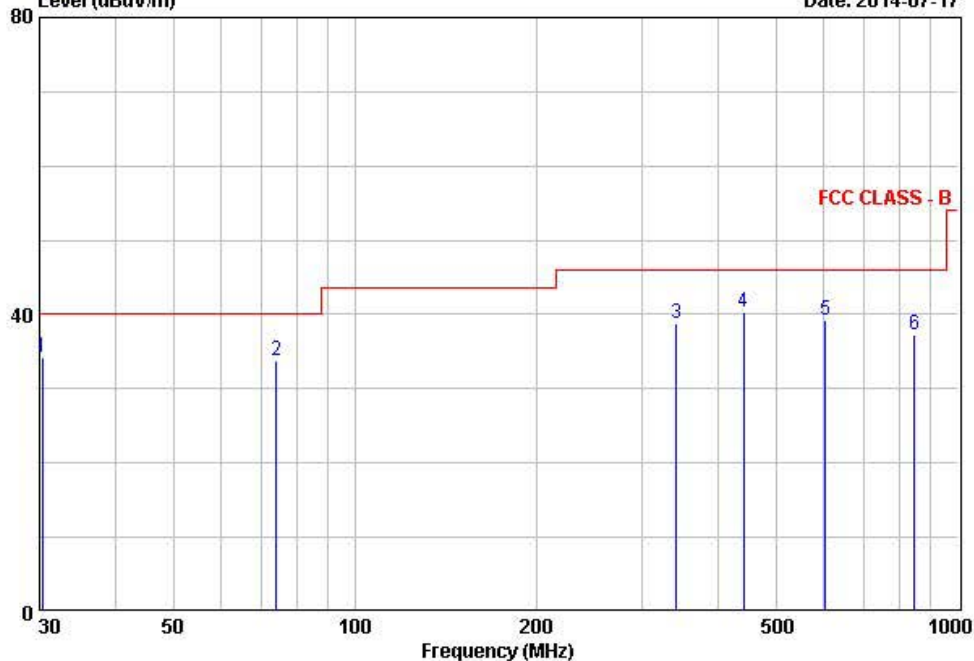

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	30.31	53.00	-18.71	34.29	40.00	5.71	343	356	VERTICAL
2	74.10	54.50	-20.71	33.79	40.00	6.21	178	190	VERTICAL
3	341.11	54.10	-15.20	38.90	46.00	7.10	344	146	HORIZONTAL
4	441.21	53.10	-12.80	40.30	46.00	5.70	245	51	HORIZONTAL
5	603.11	48.40	-9.16	39.24	46.00	6.76	255	265	HORIZONTAL
6	847.11	42.80	-5.44	37.36	46.00	8.64	177	273	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.7 Field Strength of Harmonics - Receivers

Definition:

The field strength of emissions from intentional radiators was measured. In case of the air temperature of the test site is out of the range is 10 to 40°C before the testing proceeds the warm-up time of EUT maintain adequately

Test method	: FCC Part 15.209
Frequency Range	: 9 KHz ~ 10 th harmonic.
Bandwidth	: 120 kHz (F < 1GHz) 1 MHz (F > 1GHz)
Distance of antenna	: 3 meters
Test mode	: Rx mode
Result	: Complies

Measurement Data:

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions.


Field Strength Limit

Part 15.209 LIMIT:


Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz)
0.490 ~ 1.705	24000/F(kHz)
1.705 ~ 30	30
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.


Conducted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

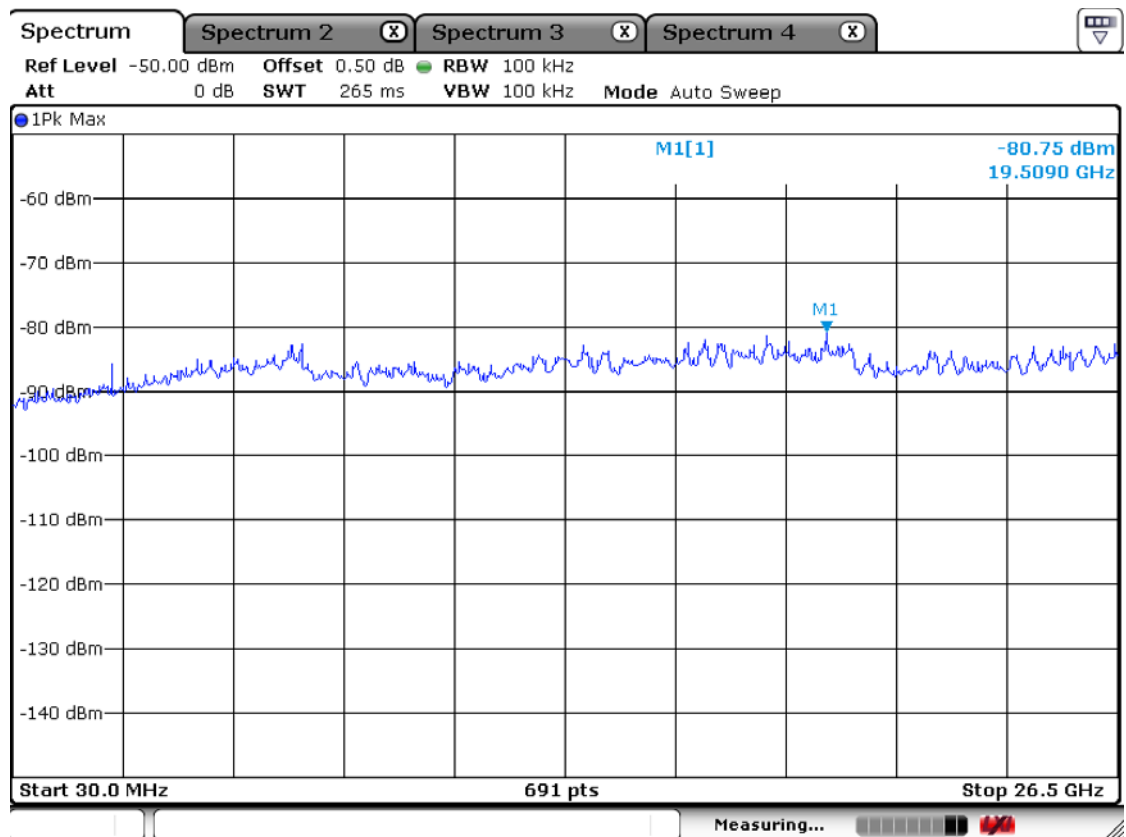

Conduceted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

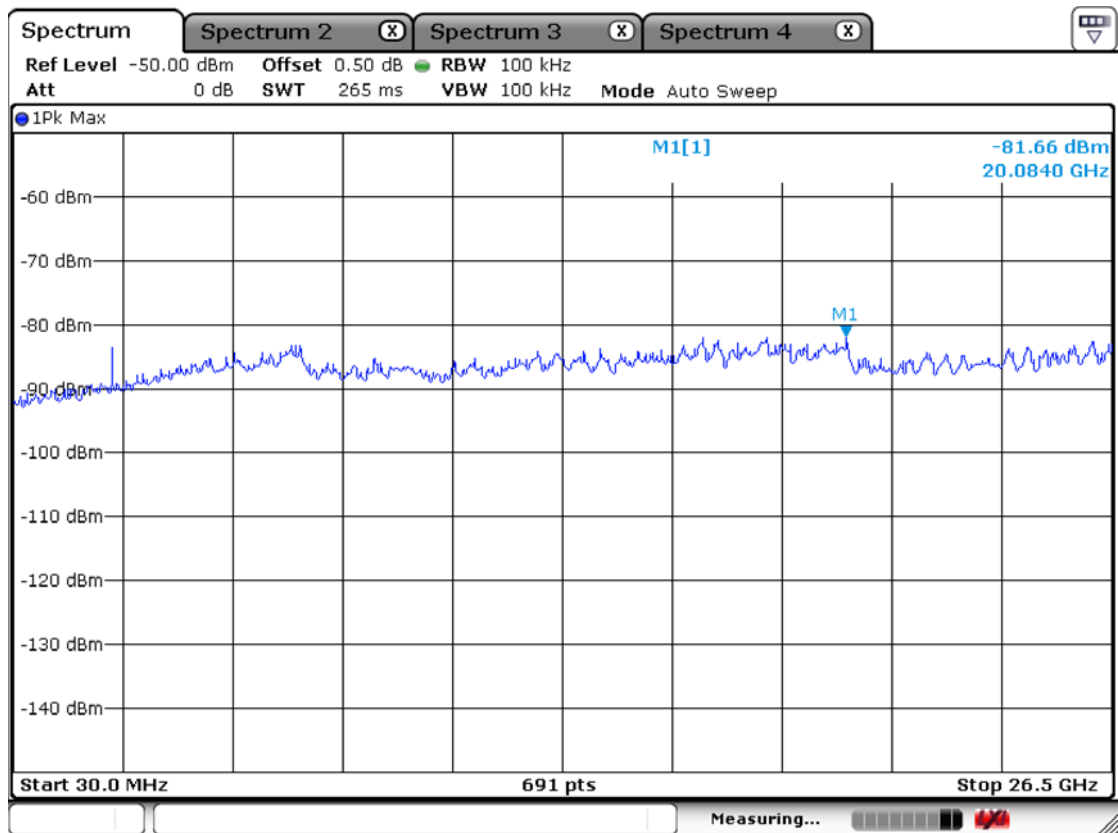

Conduceted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz

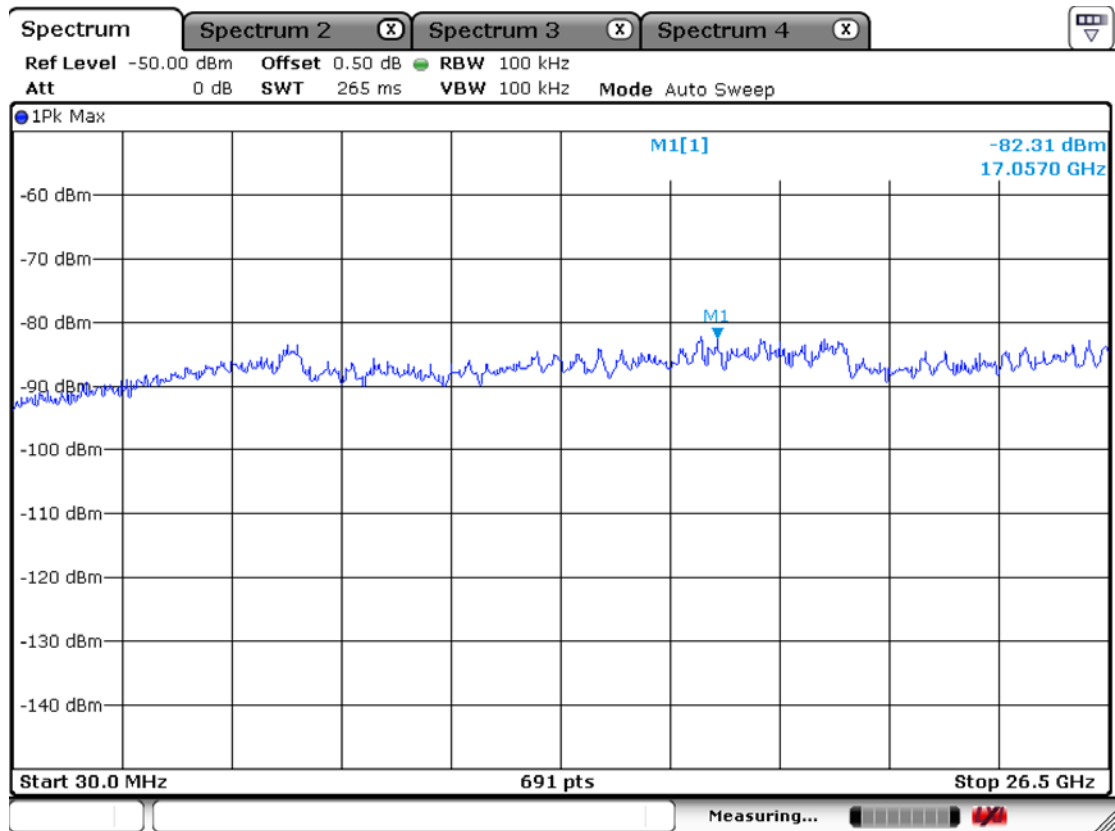

Frequency	Reading	Pol.	Correction		Limits	Result	Margin
[MHz]	[dBuV/m]		Factor			[dBuV/m]	[dBuV/m]
	AV / Peak		Antenna	Amp. Gain +Cable	AV / Peak	AV / Peak	AV / Peak
	No emissions were detected at a level greater than 20dB below limit.						
Frequency	Reading	Pol.	Correction		Limits	Result	Margin
[MHz]	[dBuV/m]		Factor			[dBuV/m]	[dBuV/m]
	AV / Peak		Antenna	Amp. Gain +Cable	AV / Peak	AV / Peak	AV / Peak
	No emissions were detected at a level greater than 20dB below limit.						
Frequency	Reading	Pol.	Correction		Limits	Result	Margin
[MHz]	[dBuV/m]		Factor			[dBuV/m]	[dBuV/m]
	AV / Peak		Antenna	Amp. Gain +Cable	AV / Peak	AV / Peak	AV / Peak
	No emissions were detected at a level greater than 20dB below limit.						

[illegible]

3.2.8 AC Conducted Emissions

Procedure:

*The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009. The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

Conducted Emissions – BT + Charging mode – LINE

4, Songjuro236Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : SCA10	Phase : LINE
Test Mode : BT + Charging mode	Test Power : 120 / 60
Temp./Humi. : 24 / 52	Test Engineer : Y00 B C

Data: 406 File: C:\Conducted Data\2014\LTA_Conduction_1407-1.EMI (432) Date: 07-17-2014

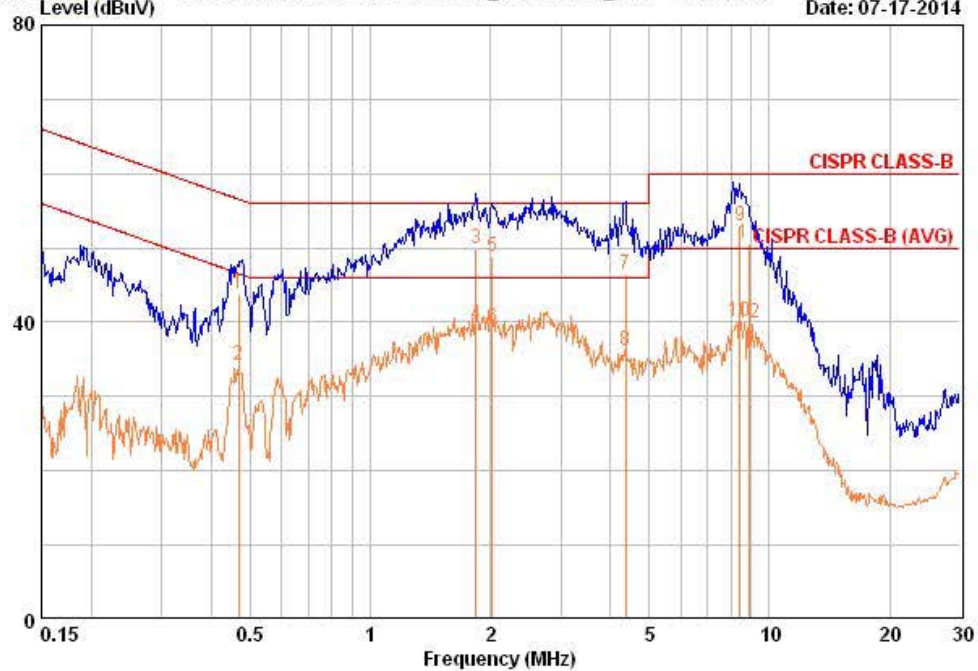


Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.468	34.24	24.74	9.48	43.72	34.22	56.55	46.55	12.83	12.33
1.838	40.25	30.05	9.57	49.82	39.62	56.00	46.00	6.18	6.38
2.022	39.35	29.75	9.58	48.93	39.33	56.00	46.00	7.07	6.67
4.360	36.91	26.51	9.61	46.52	36.12	56.00	46.00	9.48	9.88
8.456	43.31	30.41	9.64	52.95	40.05	60.00	50.00	7.05	9.95
8.868	40.91	30.21	9.65	50.56	39.86	60.00	50.00	9.44	10.14

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

Conducted Emissions – BT + Charging mode – NEUTRAL

4, Songjuro236Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. : SCA10	Phase : NEUTRAL
Test Mode : BT + Charging mode	Test Power : 120 / 60
Temp./Humi. : 24 / 52	Test Engineer : Y00 B C

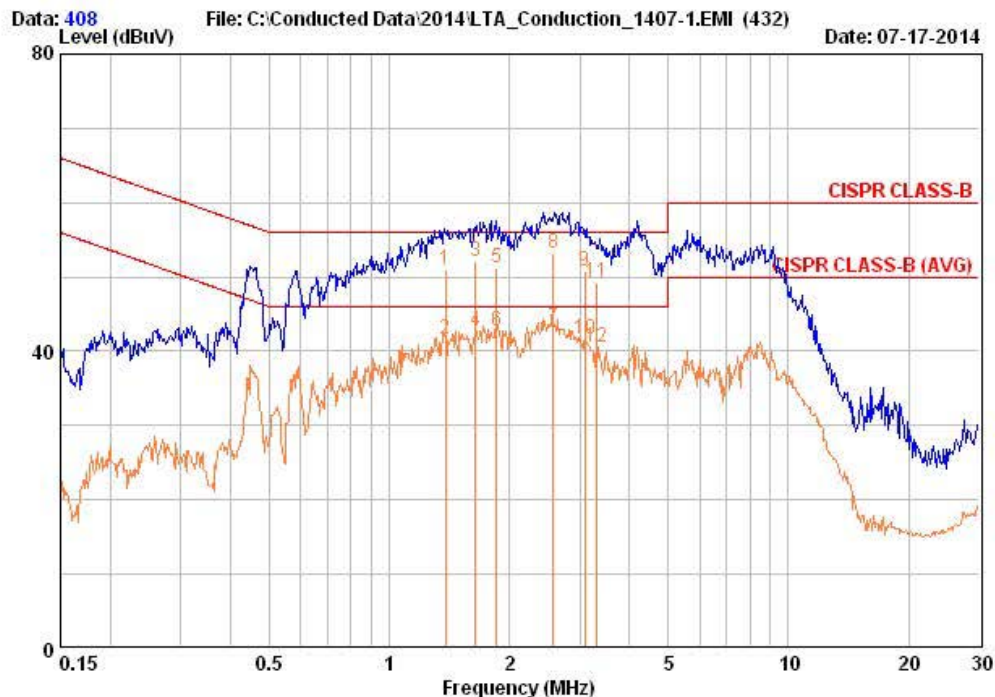

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
1.381	41.46	32.06	9.53	50.98	41.58	56.00	46.00	5.02	4.42
1.644	42.45	33.15	9.55	52.00	42.70	56.00	46.00	4.00	3.30
1.858	41.75	33.25	9.57	51.32	42.82	56.00	46.00	4.68	3.18
2.581	43.56	33.66	9.59	53.15	43.25	56.00	46.00	2.85	2.75
3.090	41.17	32.07	9.59	50.76	41.66	56.00	46.00	5.24	4.34
3.293	39.78	30.88	9.59	49.37	40.47	56.00	46.00	6.63	5.53

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9kHz~30GHz)	FSV-30	100757	R&S	1 year	2014-01-16
2	Spectrum Analyzer (9kHz~2.9GHz)	8594E	3649A03649	HP	2 year	2014-03-25
3	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2014-03-25
4	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2014-03-25
5	Attenuator (3dB)	8491A	37822	HP	2 year	2012-09-22
6	Attenuator (10dB)	8491A	63196	HP	2 year	2012-09-22
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2014-03-25
8	EMI Test Receiver (~7GHz)	ESCI7	100722	R&S	1 year	2013-09-16
9	RF Amplifier (~1.3GHz)	8447D OPT 010	2944A07684	HP	1 year	2013-09-16
10	RF Amplifier (1~26.5GHz)	8449B	3008A02126	HP	1 year	2014-03-25
11	Horn Antenna (1~18GHz)	3115	00114105	ETS	2 year	2013-05-13
12	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2014-02-26
13	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2014-02-26
14	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2013-05-03
15	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2014-03-26
16	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
17	Power Divider	11636A	06243	HP	2 year	2012-09-22
18	DC Power Supply	6674A	3637A01657	Agilent	-	-
19	Frequency Counter	5342A	2826A12411	HP	1 year	2014-03-26
20	Power Meter	EPM-441A	GB32481702	HP	1 year	2014-03-26
21	Power Sensor	8481A	US41030291	HP	1 year	2013-09-16
22	Audio Analyzer	8903B	3729A18901	HP	1 year	2013-09-16
23	Modulation Analyzer	8901B	3749A05878	HP	1 year	2013-09-16
24	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2013-09-16
25	Stop Watch	HS-3	601Q09R	CASIO	1 year	2013-09-26
26	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2013-09-16
27	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2014-03-26
28	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2014-07-25
29	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
30	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-
31	Loop Antenna	6502	00118166	ETS LINDGREN	2 year	2014-01-07