



Appendix A

RF Test Data for BLE (Conducted Measurement)

Product Name: LED lamp

Test Model: TSZ8.5A19-LD001-CEC

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Ling Zhu





A.1 DTS Bandwidth


Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.712	2401.636	2402.348	0.5	PASS
		2440	0.712	2439.632	2440.344	0.5	PASS
		2480	0.712	2479.632	2480.344	0.5	PASS





Test Graphs

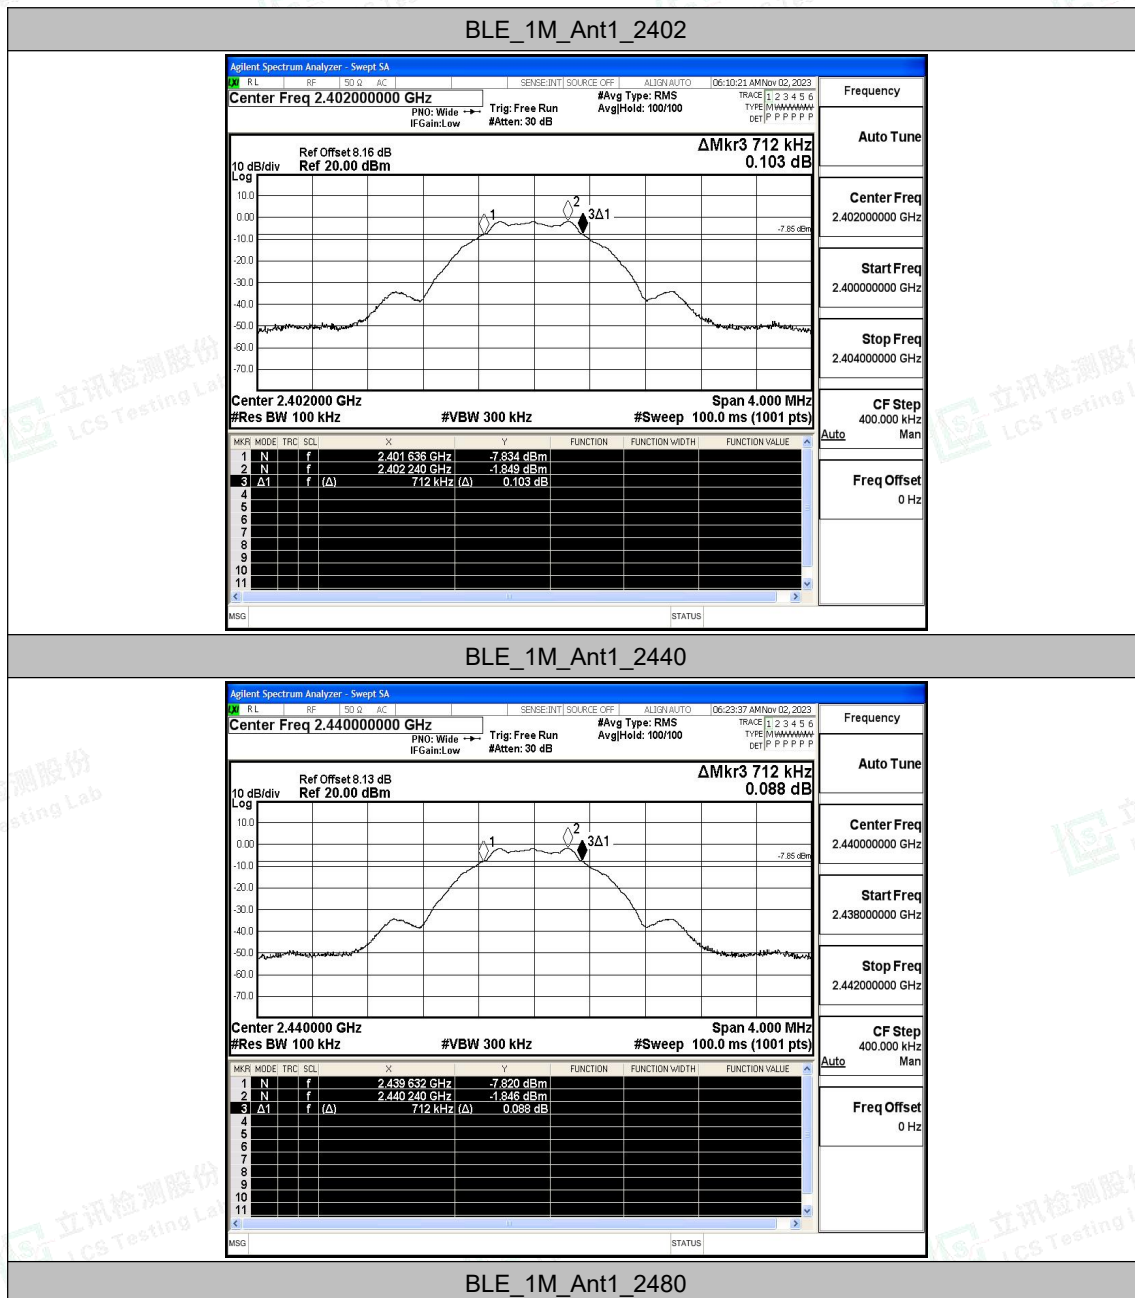

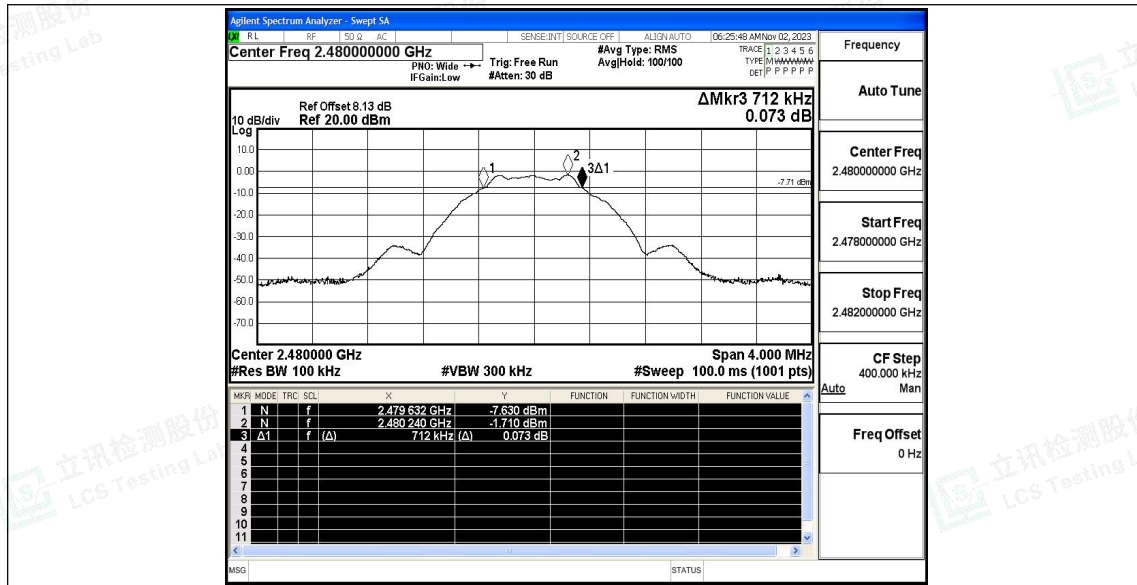



A.2 Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0579	2401.4790	2402.5369	---	---
		2440	1.0546	2439.4767	2440.5313	---	---
		2480	1.0587	2479.4737	2480.5324	---	---





Test Graphs

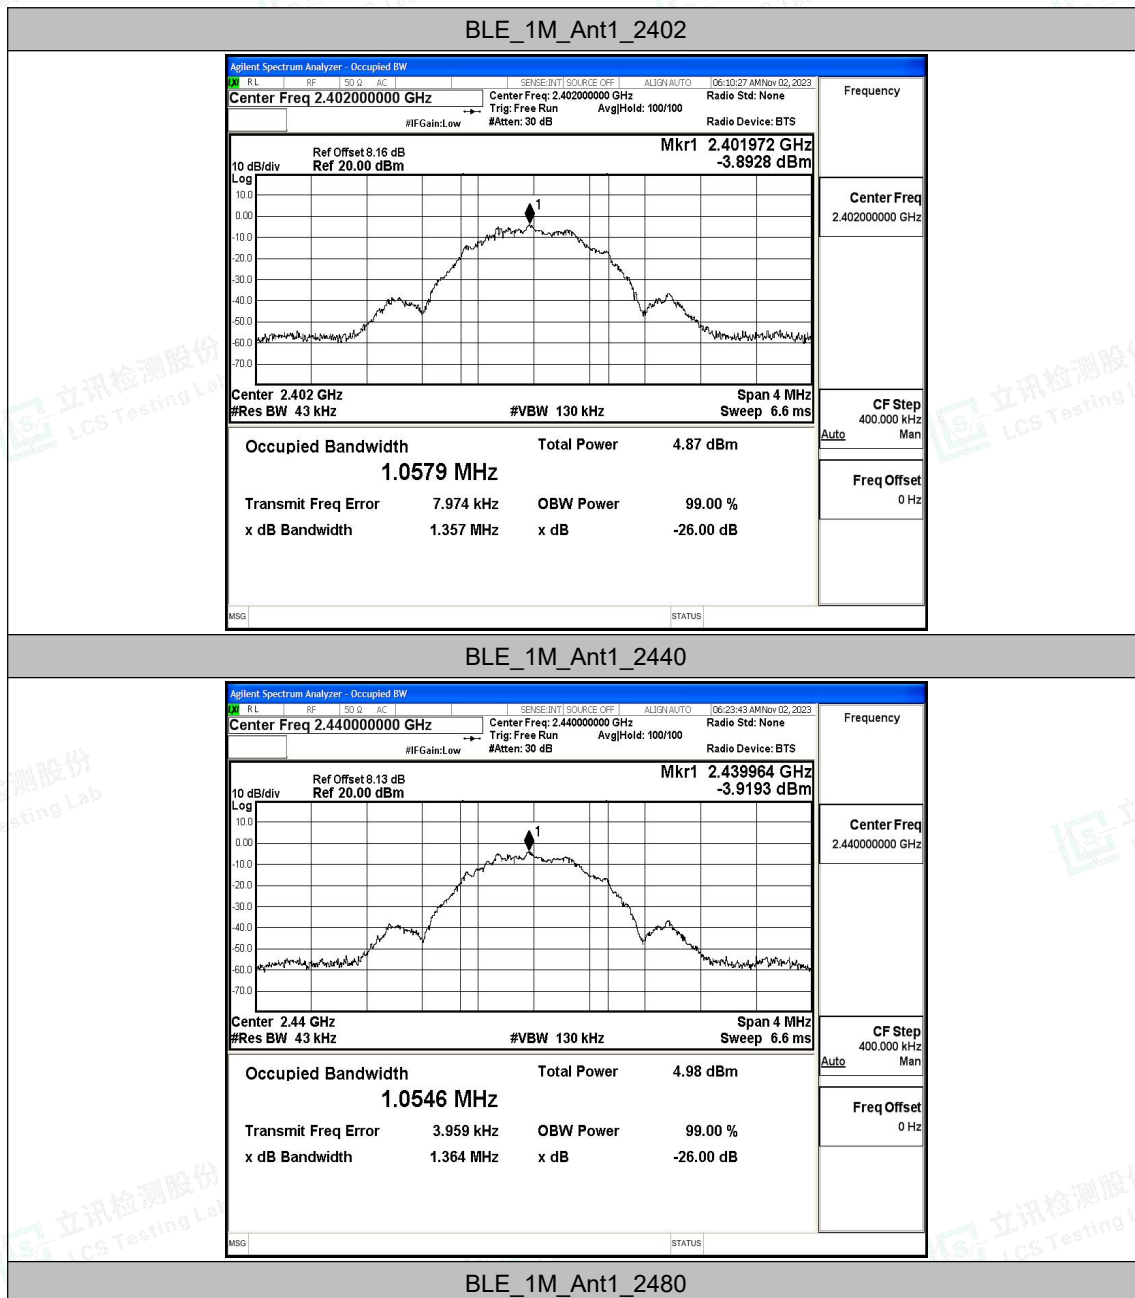


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

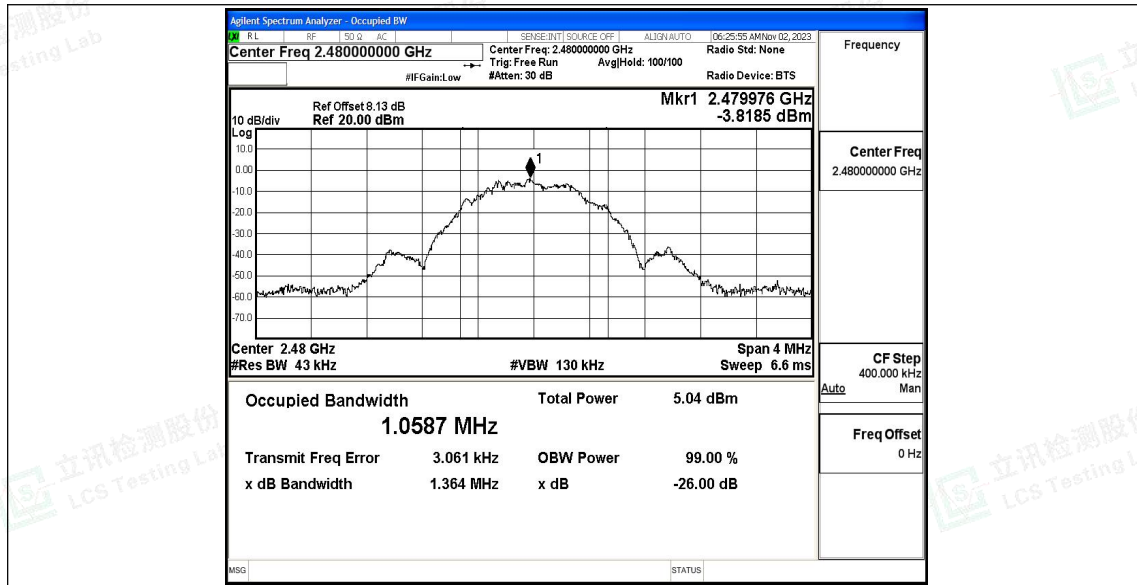



A.3 Maximum Peak Conducted Output Power and e.i.r.p.


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Antenna gain [dBi]	EIRP [dBm]	EIRP Limit (dBm)	Verdict
BLE_1M	Ant1	2402	-0.9	≤30	1.2	0.3	36	PASS
		2440	-0.89	≤30	1.2	0.31	36	PASS
		2480	-0.76	≤30	1.2	0.44	36	PASS





Test Graphs

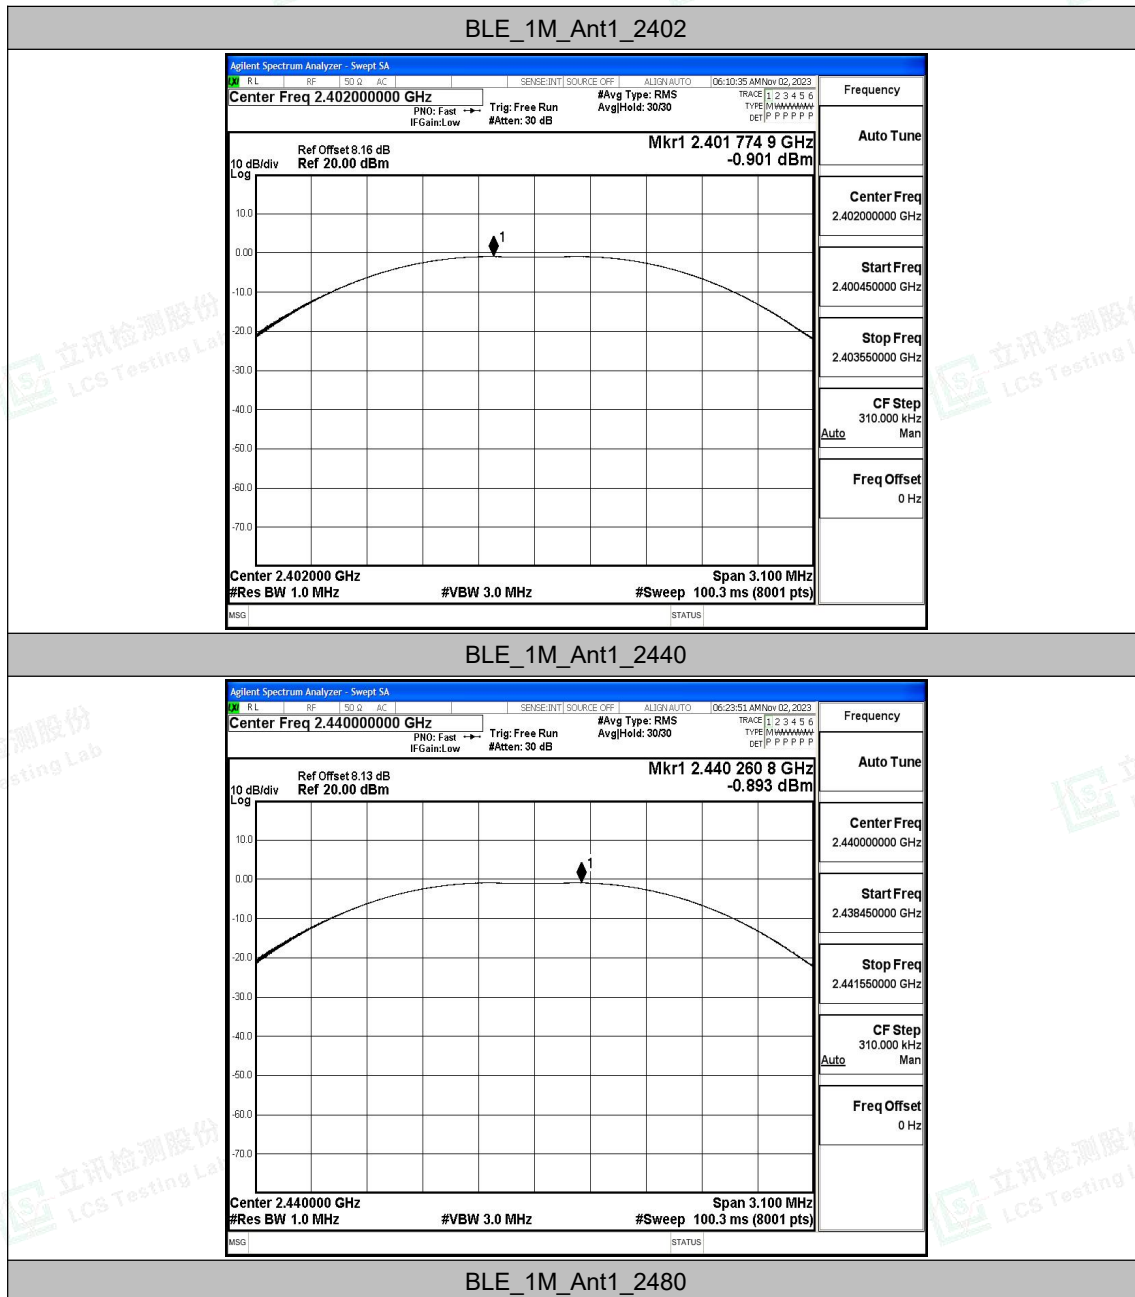


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

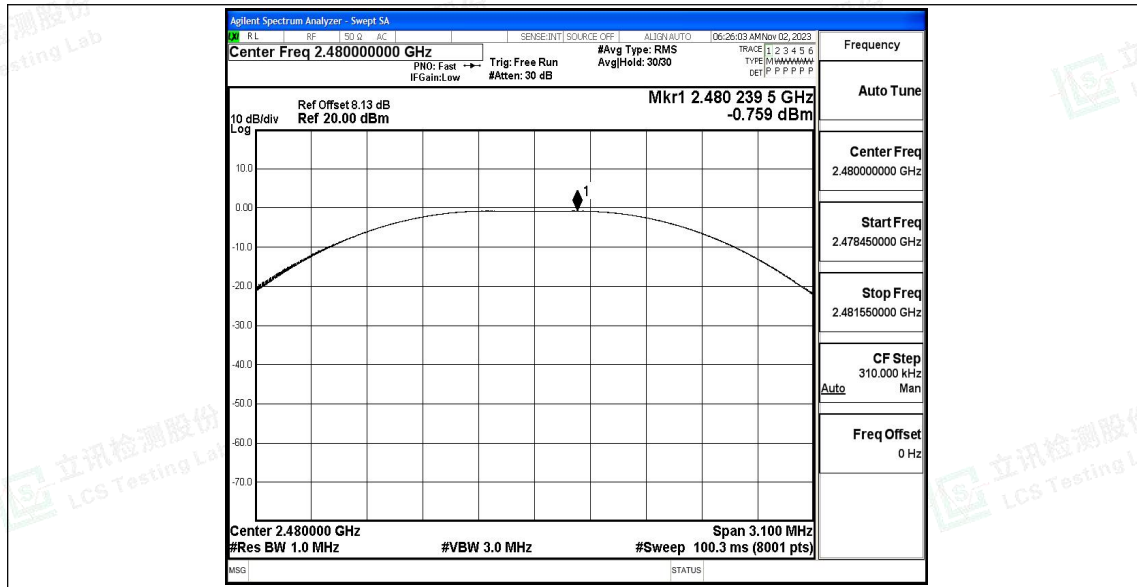



A.4 Maximum power spectral density


Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16	≤8.00	PASS
		2440	-15.96	≤8.00	PASS
		2480	-15.79	≤8.00	PASS





Test Graphs

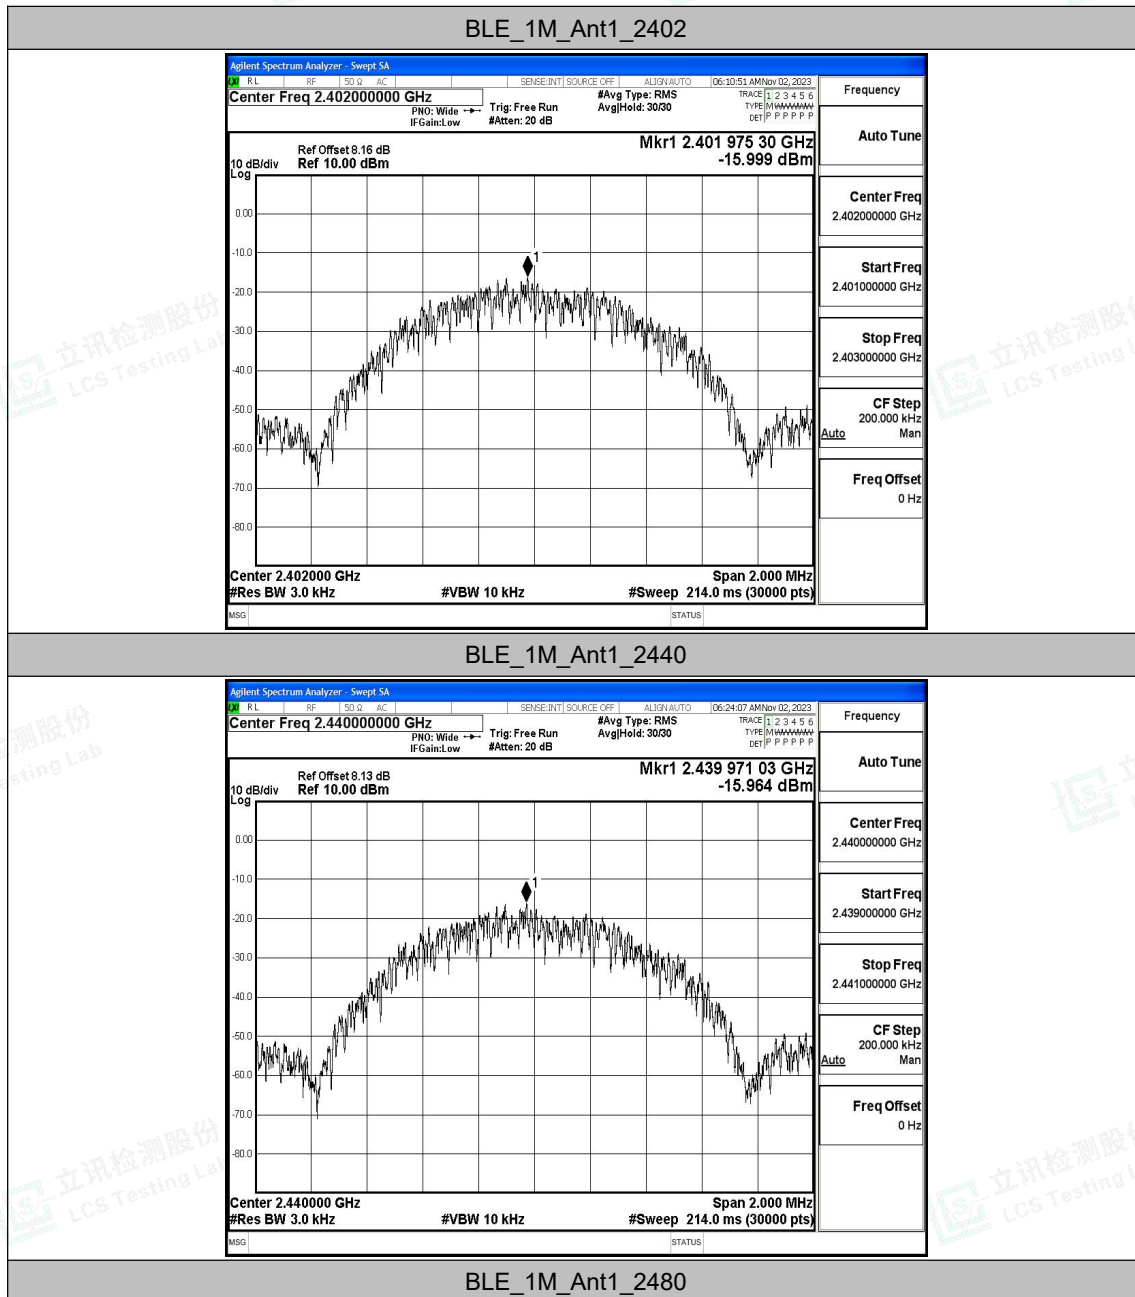

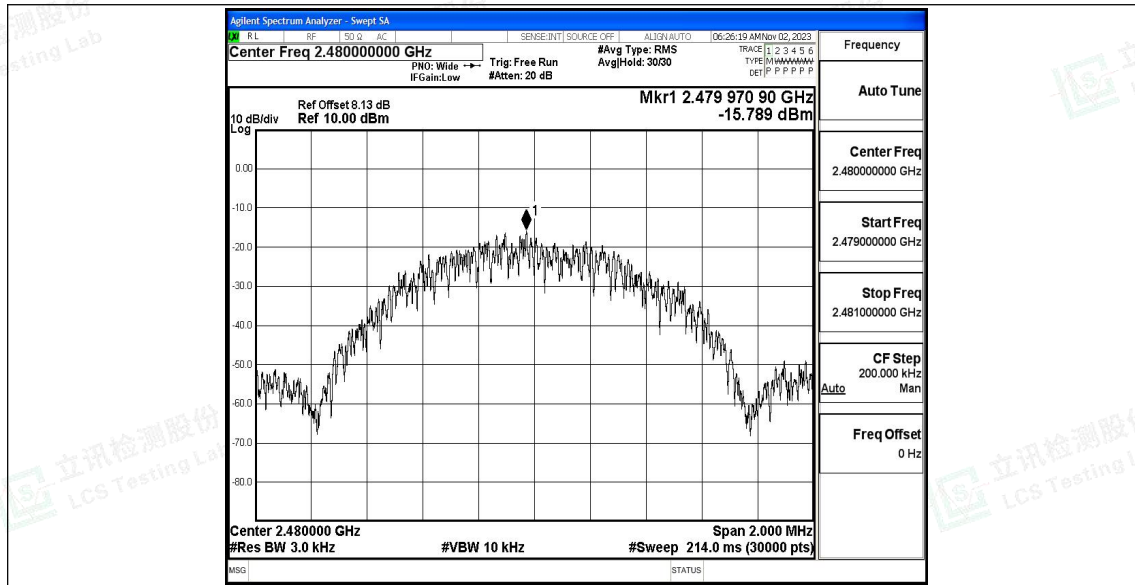



A.5 Band edge measurements


Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.59	-59.86	≤-21.59	PASS
		High	2480	-1.48	-59.38	≤-21.48	PASS





Test Graphs

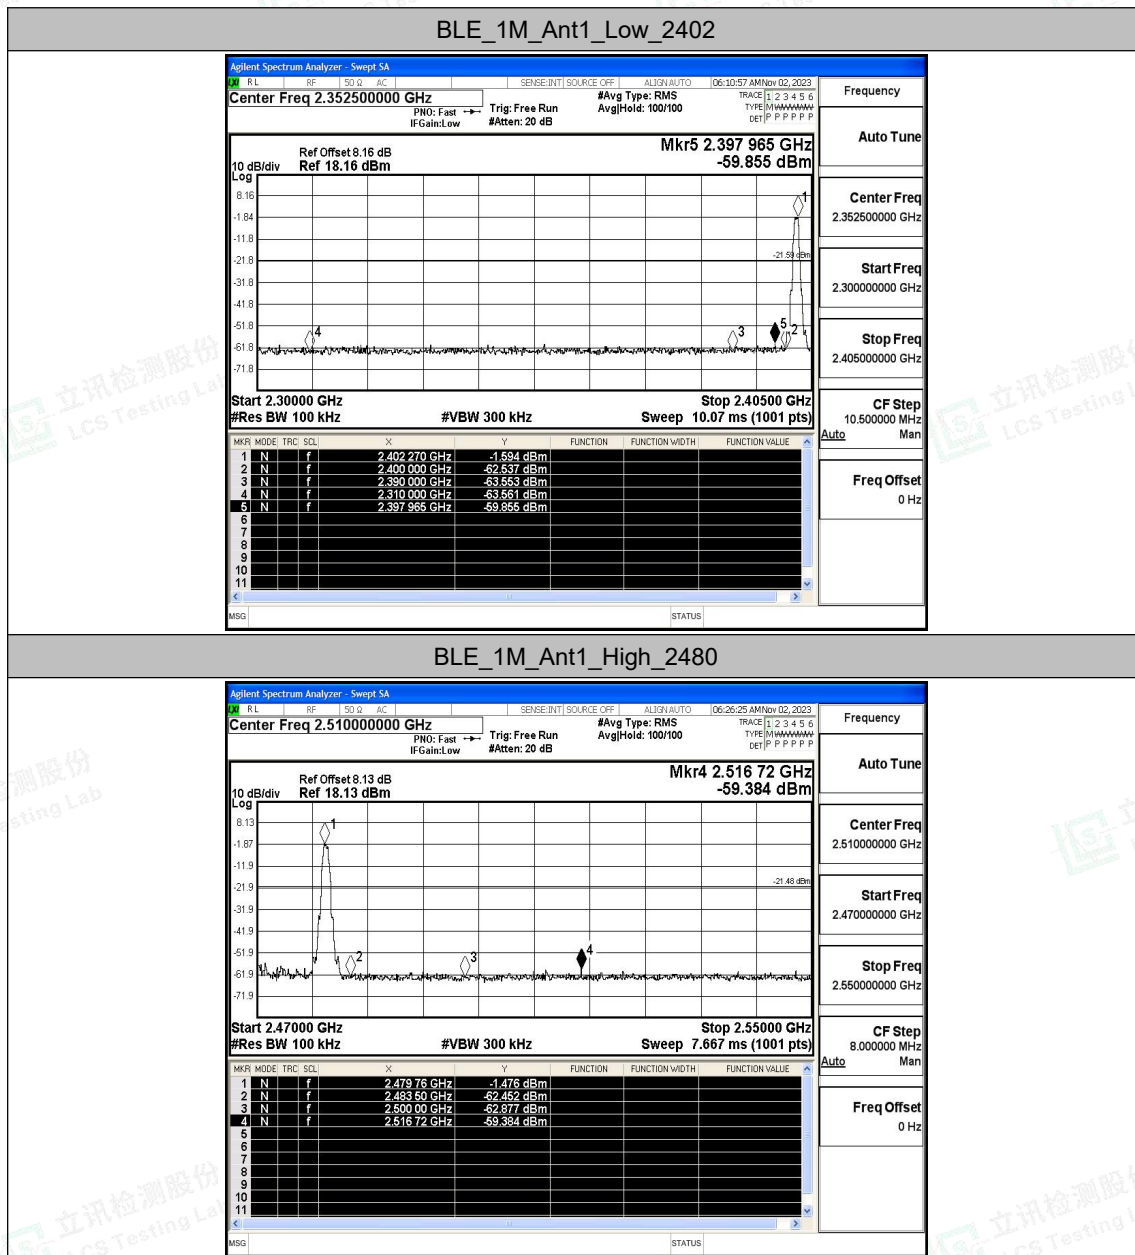



A.6 Conducted Spurious Emission


Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-1.89	-1.89	---	PASS
			30~1000	-1.89	-62.16	≤-21.89	PASS
			1000~26500	-1.89	-49.13	≤-21.89	PASS
		2440	Reference	-1.83	-1.83	---	PASS
			30~1000	-1.83	-62.08	≤-21.83	PASS
			1000~26500	-1.83	-49.28	≤-21.83	PASS
		2480	Reference	-1.72	-1.72	---	PASS
			30~1000	-1.72	-61.88	≤-21.72	PASS
			1000~26500	-1.72	-49.13	≤-21.72	PASS






Test Graphs

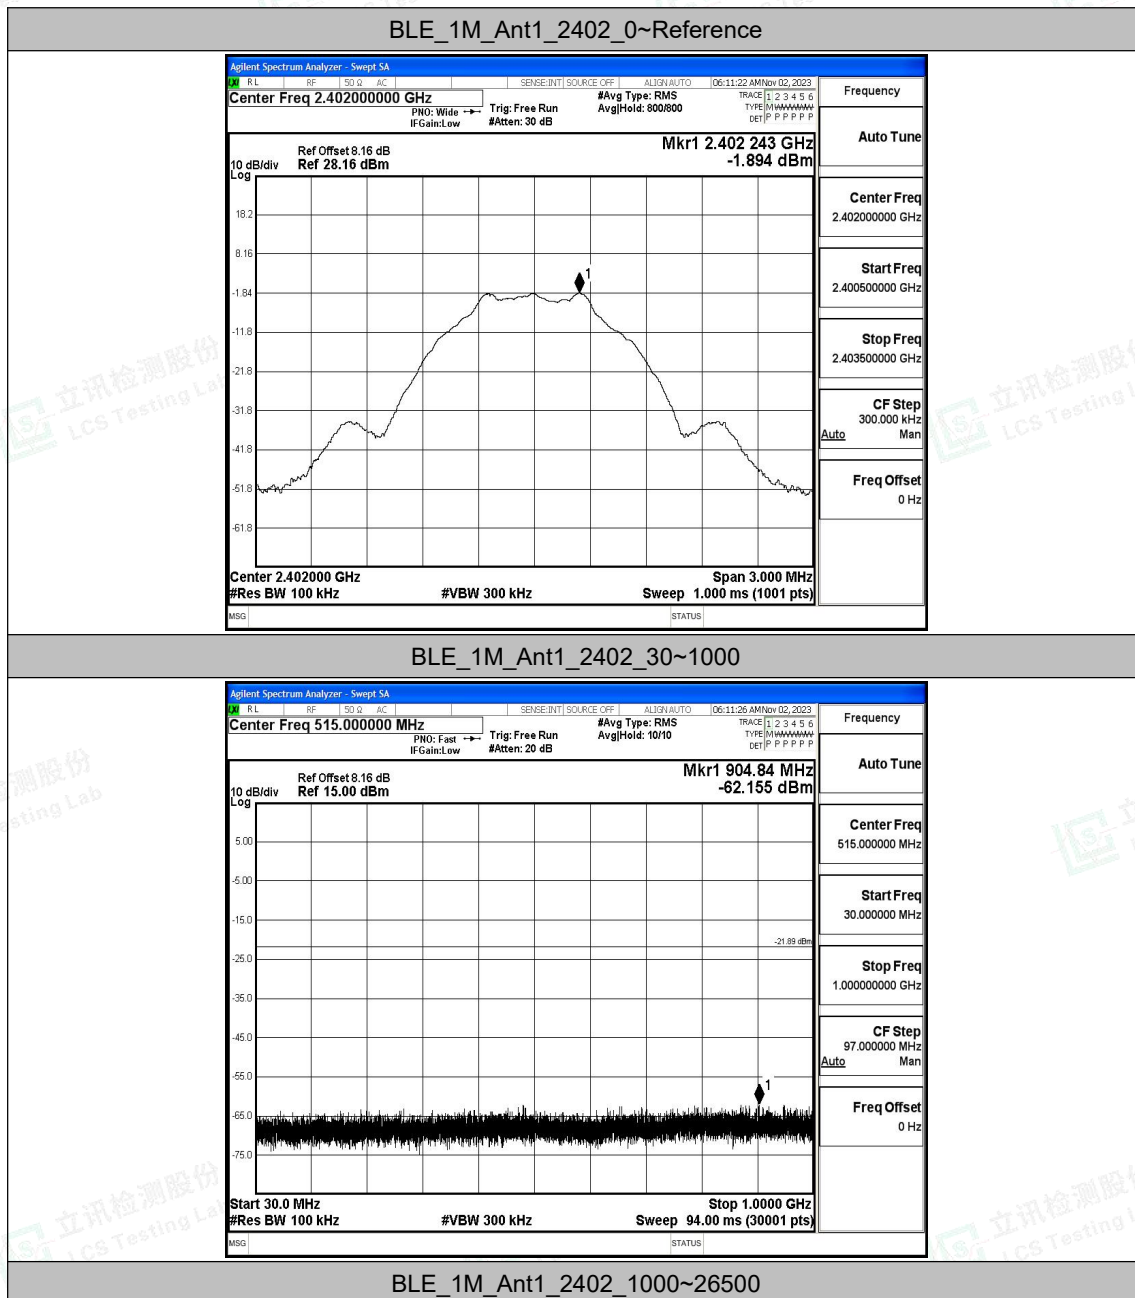

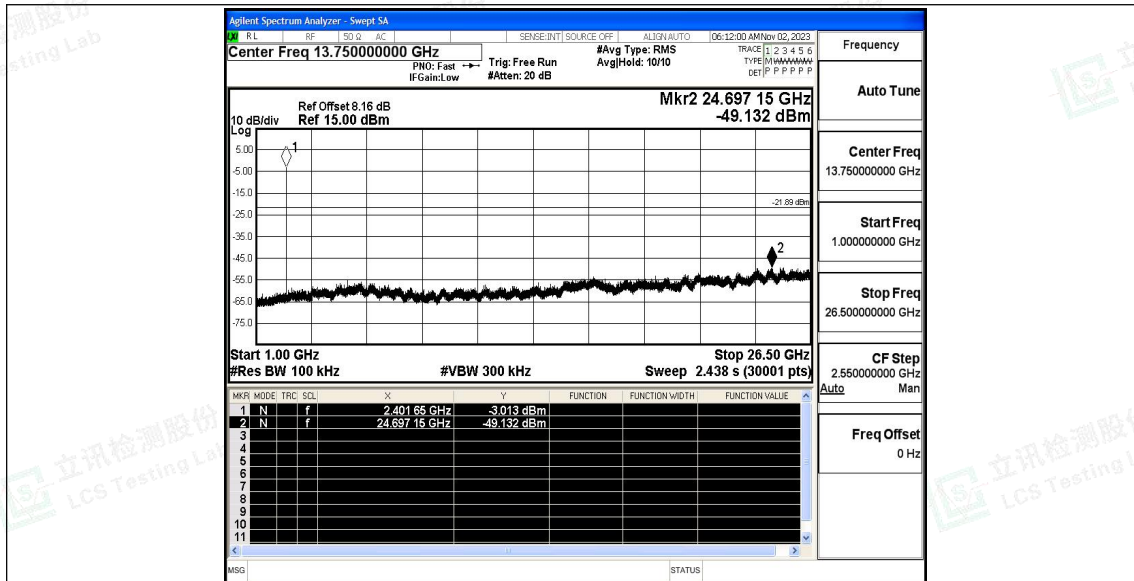


BLE_1M_Ant1_2440_0~Reference

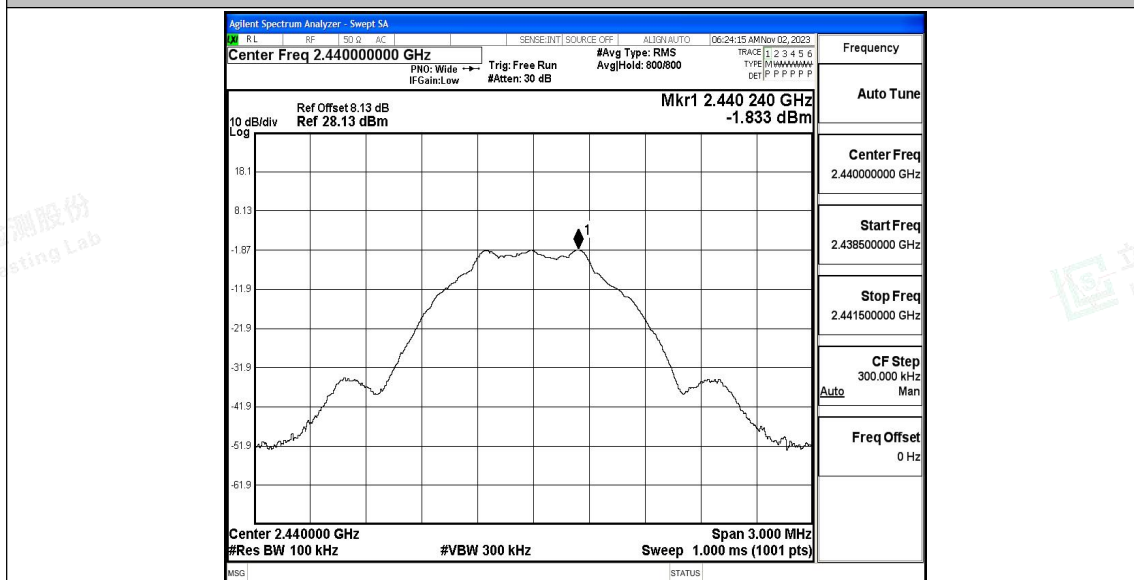


BLE_1M_Ant1_2440_30~1000




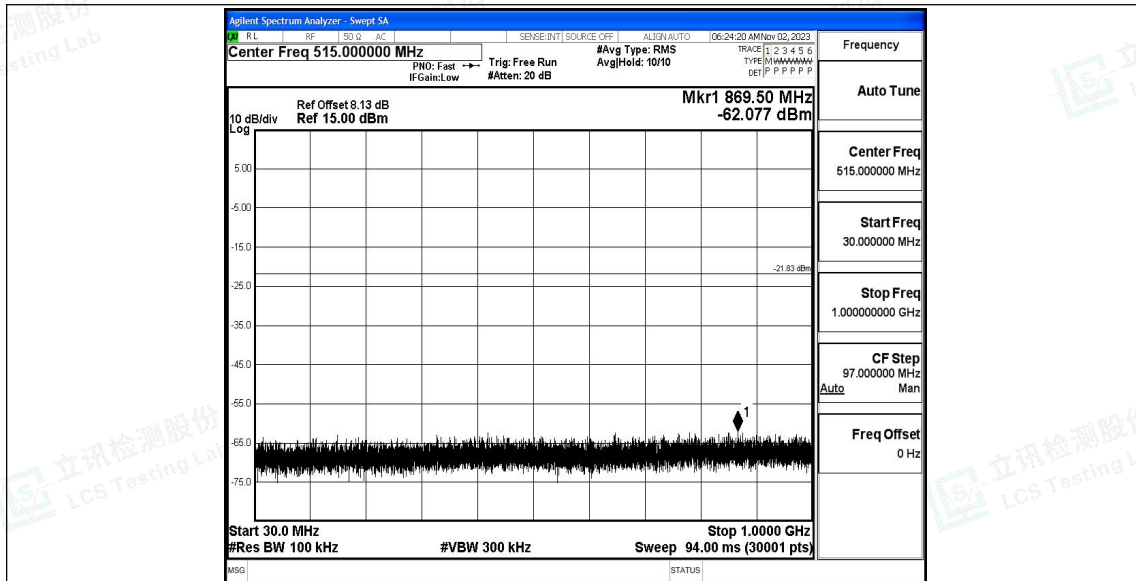



BLE_1M_Ant1_2440_1000~26500

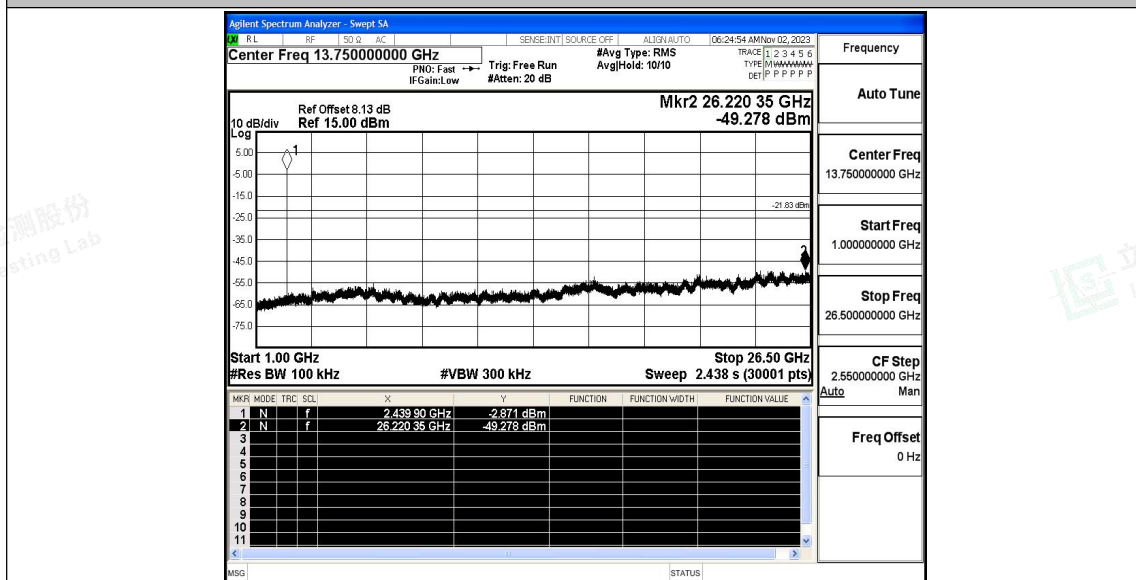

BLE_1M_Ant1_2480_0~Reference



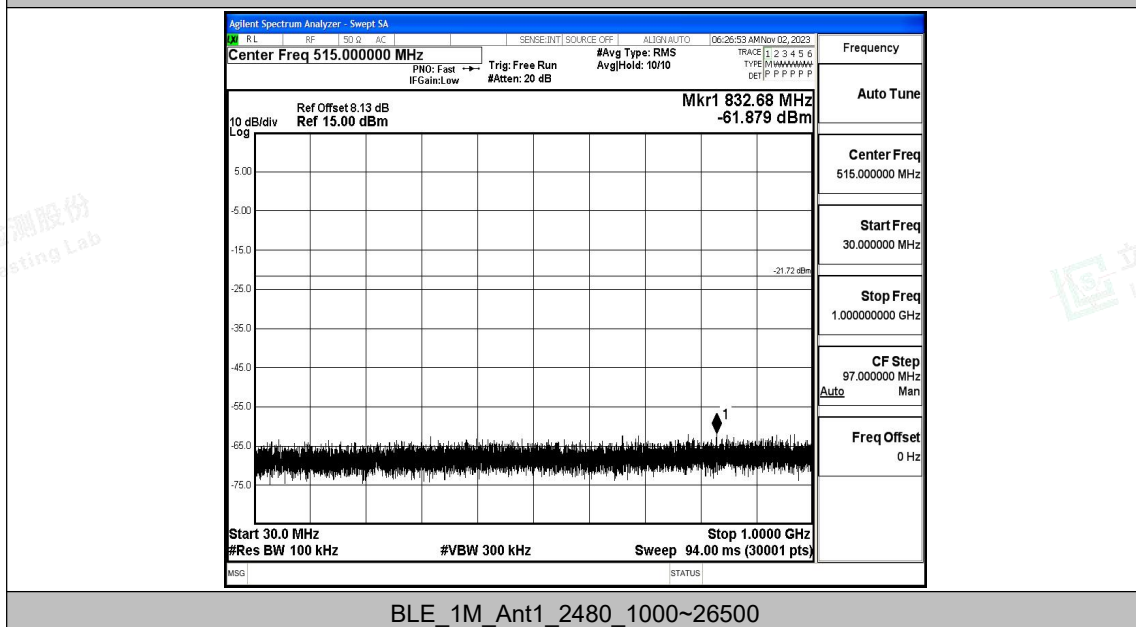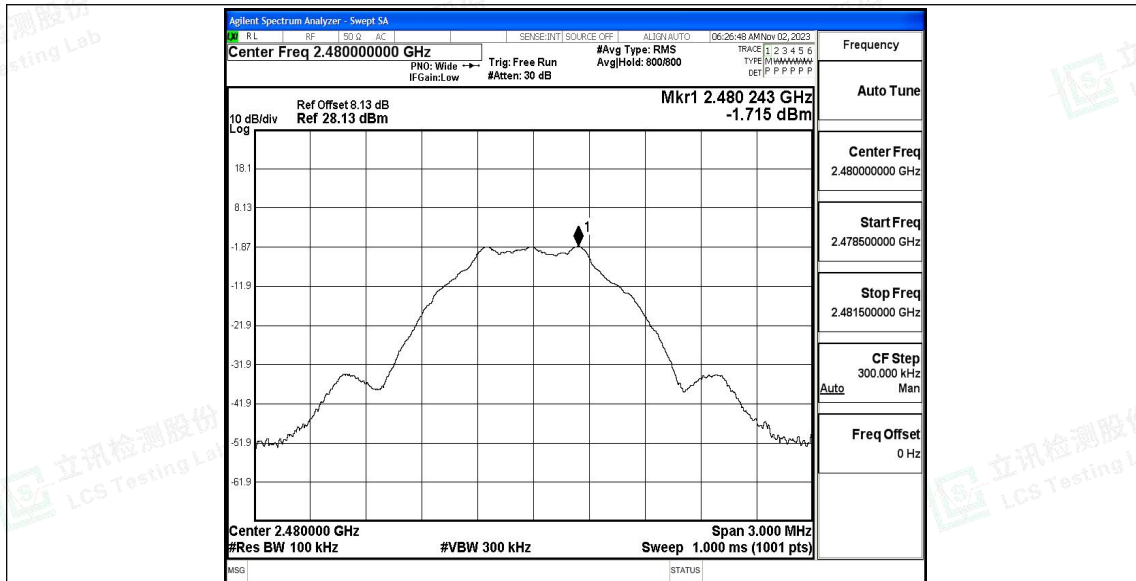

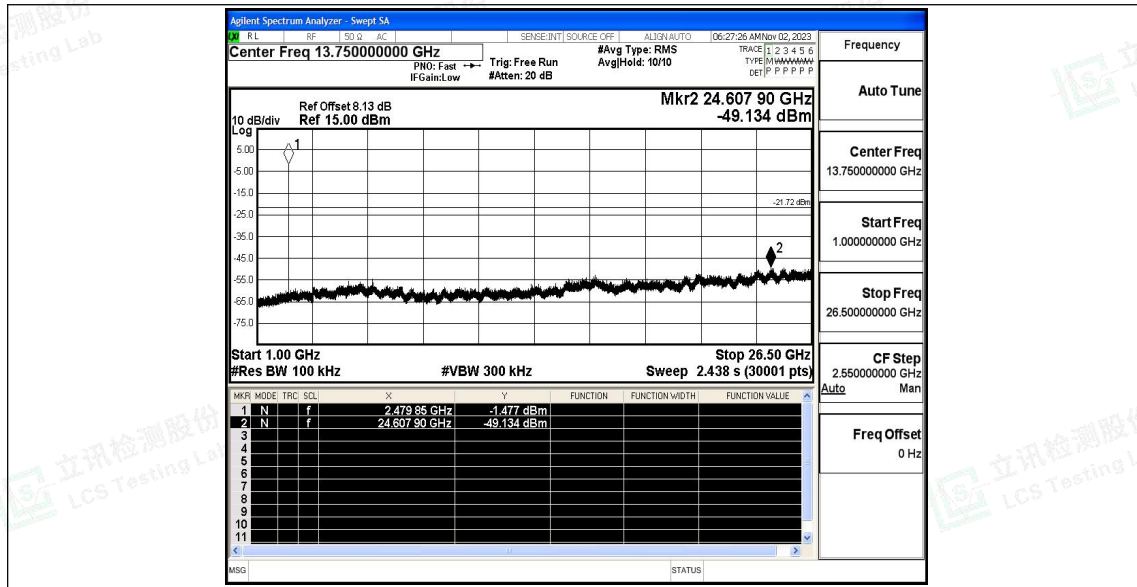



A.7 Duty Cycle


Test Result


TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	1/T	Limit	Verdict
BLE_1M	Ant1	2402	0.38	0.63	0.6032	60.32	2.20	2.63	---	---
		2440	0.38	0.63	0.6032	60.32	2.20	2.63	---	---
		2480	0.38	0.63	0.6032	60.32	2.20	2.63	---	---





Test Graphs

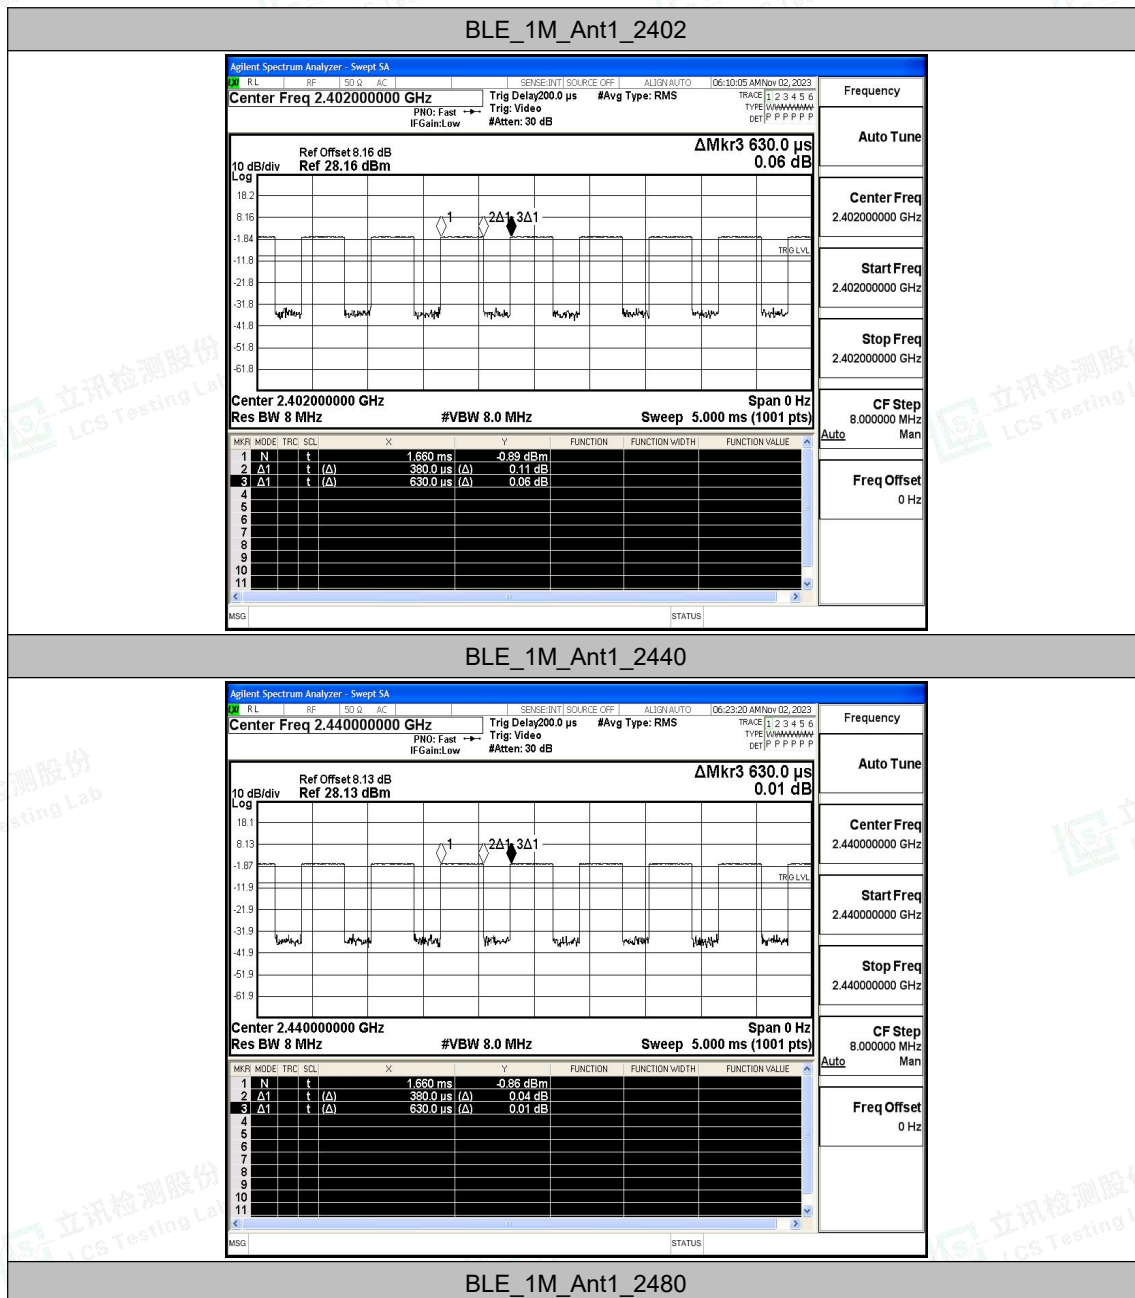



Scan code to check authenticity



A.8 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-58.65	≤-41.20	36.55	≤54	PASS
				AV	2381.900	-57.55	≤-41.20	37.65	≤54	PASS
				AV	2390.000	-58.01	≤-41.20	37.19	≤54	PASS
				Peak	2310.000	-51.08	≤-21.20	44.12	≤74	PASS
				Peak	2343.680	-49.26	≤-21.20	45.94	≤74	PASS
				Peak	2390.000	-51.57	≤-21.20	43.63	≤74	PASS
		High	2480	AV	2483.500	-54.48	≤-41.20	40.72	≤54	PASS
				AV	2483.520	-54.48	≤-41.20	40.72	≤54	PASS
				AV	2500.000	-58.27	≤-41.20	36.93	≤54	PASS
				Peak	2483.500	-52.06	≤-21.20	43.14	≤74	PASS
				Peak	2493.440	-49.08	≤-21.20	46.12	≤74	PASS
				Peak	2500.000	-52.3	≤-21.20	42.90	≤74	PASS


Note:


1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.





Test Graphs

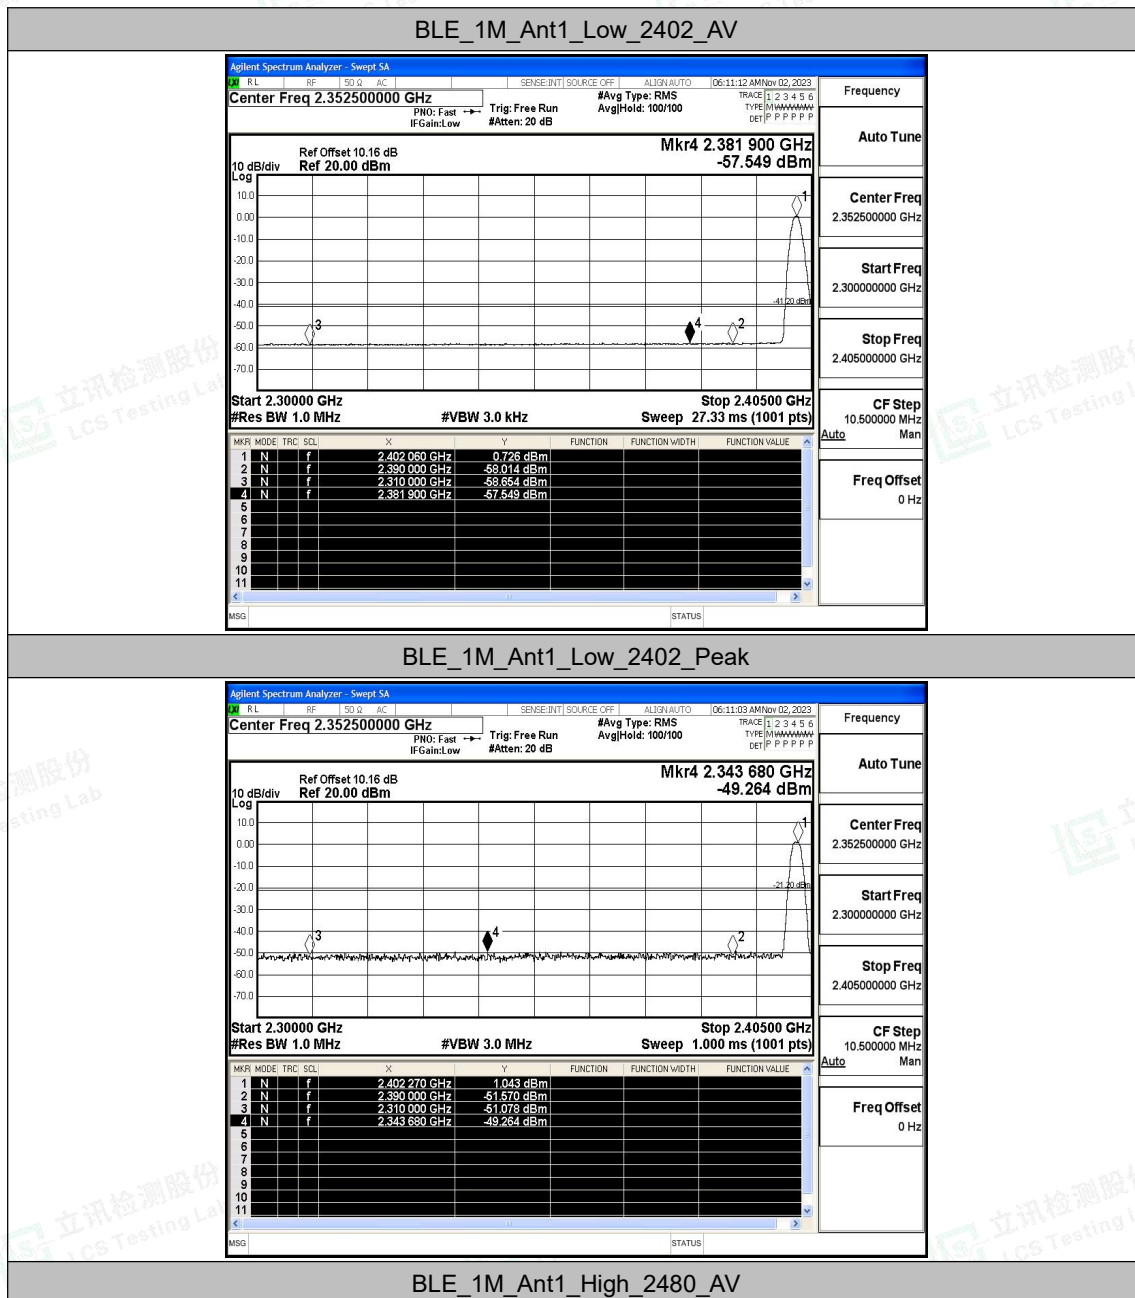

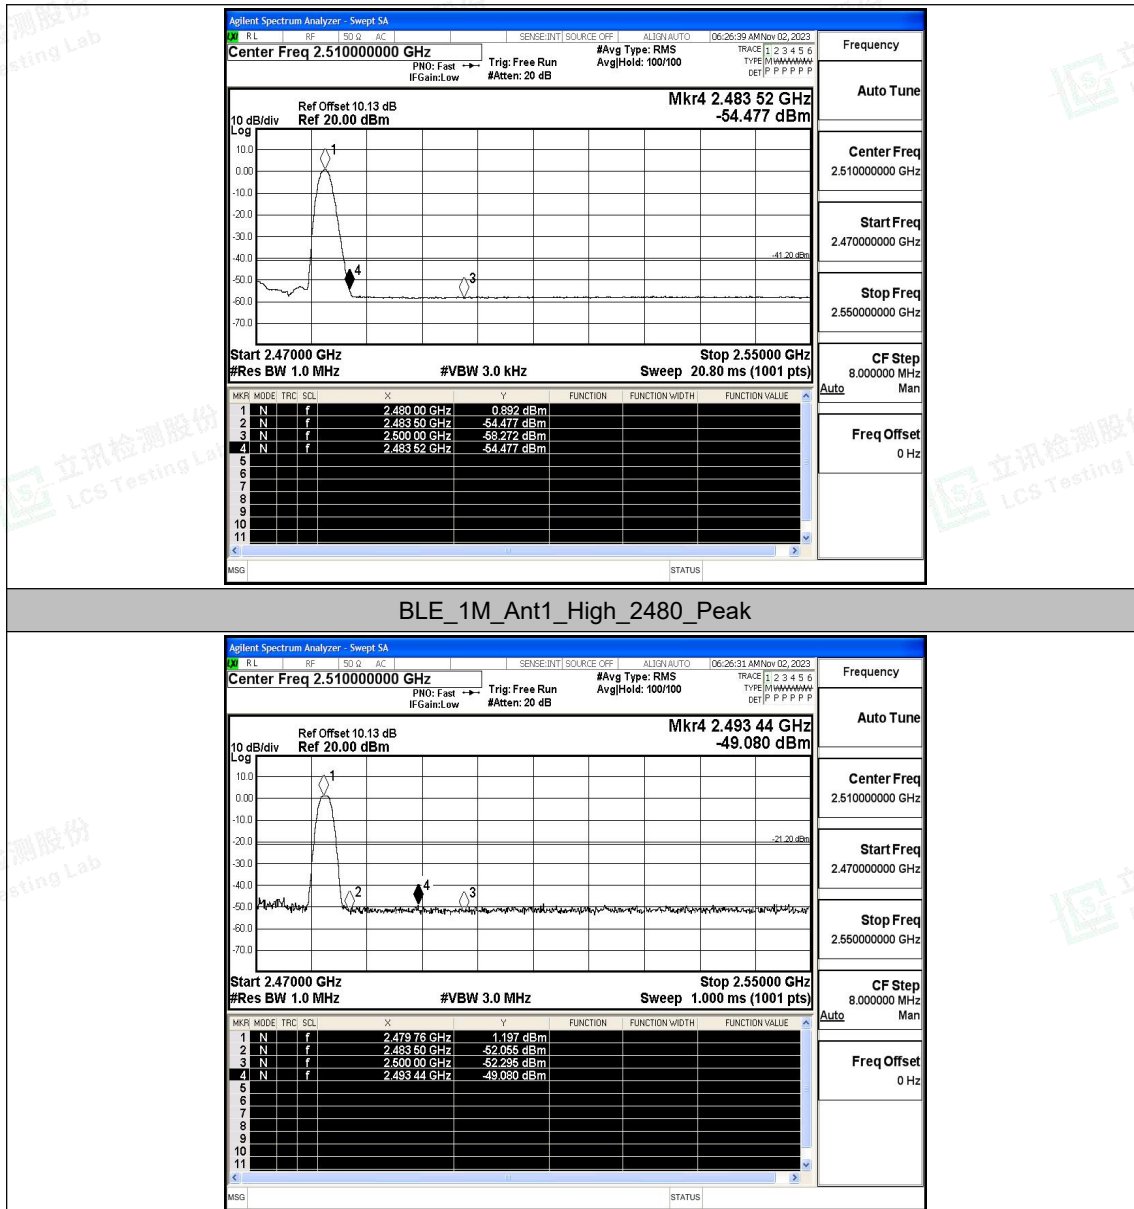

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity