

FCC Test Report

Report No.: AGC02762211104FE05

FCC ID : 2AL26-KS2

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Body Worn Camera

BRAND NAME : Reveal Media

MODEL NAME : KS2

APPLICANT : Reveal Media Limited

DATE OF ISSUE : Dec. 20, 2021

STANDARD(S)

TEST PROCEDURE(S)

: FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 79


REPORT REVISE RECORD

	Report Version	Revise Time	Issued Date	Valid Version	Notes
1	V1.0	1	Dec. 20, 2021	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	
2.4. RELATED SUBMITTAL(S) / GRANT (S)	
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	29
9.1. MEASUREMENT PROCEDURE	29
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USEDJN	
9.4. LIMITS AND MEASUREMENT RESULT	29
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	44
10.1 MEASUREMENT PROCEDURE	
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	





10.3 MEASUREMENT EQUIPMENT USED	44
10.4 LIMITS AND MEASUREMENT RESULT	44
11. RADIATED EMISSION	51
11.1. MEASUREMENT PROCEDURE	51
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	53
11.4. TEST RESULT	53
12. LINE CONDUCTED EMISSION TEST	75
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	75
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	75
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	76
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	76
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	77
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	
APPENDIX II: PHOTOGRAPHS OF EUT	79





1. VERIFICATION OF CONFORMITY

Applicant	Reveal Media Limited
Address	Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU, UNITED KINGDOM
manufacturer	Reveal Media Hong Kong Ltd.
Address	6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chi, Hong Kong
Factory	Reveal Media Hong Kong Ltd.
Address	6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chi, Hong Kong
Product Designation	Body Worn Camera
Brand Name	Reveal Media
Test Model	KS2
Date of test	Nov. 12, 2021~Dec. 20, 2021
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Bibo	Zhang
	Bibo Zhang (Project Engineer)	Dec. 20, 2021
Reviewed By	Calin	Lin
CGC -	Calvin Liu (Reviewer)	Dec. 20, 2021
Approved By	Max 2	kang
GC -C	Max Zhang Authorized Officer	Dec. 20, 2021



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Body Worn Camera". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

,	T T is described as following				
Operation Frequency	2.412 GHz ~ 2.462GHz				
Output Power (Average)	IEEE 802.11b:15.88dBm; IEEE 802.11g:15.18dBm;				
Output Fower (Average)	IEEE 802.11n(20):13.70dBm; IEEE 802.11n(40):12.60dBm				
Output Bower (Book)	IEEE 802.11b:18.24dBm; IEEE 802.11g:23.03dBm;				
Output Power (Peak)	IEEE 802.11n(20):21.48dBm; IEEE 802.11n(40):20.45dBm				
Madulatian	802.11b: (DQPSK, DBPSK, CCK) DSSS				
Modulation	802.11g/n: (64-QAM, 16-QAM, QPSK, BPSK) OFDM				
	802.11b: 1/2/5.5/11Mbps				
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps				
	802.11n: up to 300Mbps				
Number of channels	802.11b/g/n-HT20:11channels				
Number of channels	802.11n-HT40:7channels				
Hardware Version	EP-VRM05RFB-02				
Software Version	V1.0				
Antenna Designation	FPCB Antenna (Comply with requirements of the FCC part 15.203)				
Antenna Gain	2.4dBi				
Power Supply	DC 3.8V by battery or DC 5V by adapter				

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
-6	1	2412 MHZ
CO CO	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
8	7 8	2442 MHZ
°	8	2447 MHZ
20	9	2452 MHZ
	10	2457 MHZ
8	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Page 7 of 79

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGl	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1 💿	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	<u></u> 1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID**: **2AL26-KS2** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules


ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.





2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX I: PHOTOGRAPHS OF EUT.



Page 9 of 79

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		



Page 10 of 79

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.


Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. The test software is the iwpriv which can set the EUT into the individual test modes.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Body Worn Camera	KS2	2AL26-KS2	EUT
2	Battery	ICR011GB	DC 3.8V 1000mAh	AE



Page 11 of 79

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Page 12 of 79

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number	CN1259			
FCC Test Firm Registration Number	975832			
A2LA Cert. No.	5054.02			
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA			

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 11, 2021	May 10, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Apr. 14, 2021	Apr. 13, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 13 of 79

7. OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)





Page 14 of 79

7.3. LIMITS AND MEASUREMENT RESULT

	Tes	t Data of Conducted (Output Power		
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
-C	2412	15.31	17.86	≪30	Pass
802.11b	2437	15.88	18.24	3 0	Pass
	2462	15.56	17.76	≼3 0	Pass
802.11g	2412	14.38	22.20	₹30	Pass
	2437	15.18	23.03	₹30	Pass
	2462	14.77	21.84	\$ 0	Pass
®	2412	13.05	20.90	⊴ 0	Pass
802.11n20	2437	13.70	21.48	⊴ 0	Pass
	2462	13.32	20.38	\$ 0	Pass
802.11n40	2422	12.47	20.16	\$ 0	Pass
	2437	12.60	20.45	⊲ 30	Pass
	2452	11.11	18.34	\$30	Pass



8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

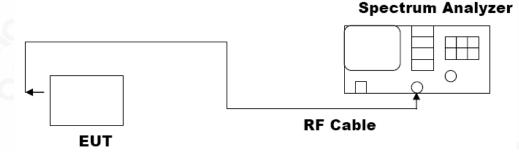




Page 16 of 79

8.3. LIMITS AND MEASUREMENT RESULTS


Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
-0	2412	13.813	9.043	≥0.5	Pass
802.11b	2437	13.445	8.546	≥0.5	Pass
	2462	13.713	8.086	≥0.5	Pass
0	2412	16.830	16.307	≥0.5	Pass
802.11g	2437	16.852	16.319	≥0.5	Pass
	2462	16.833	13.182	≥0.5	Pass
0	2412	17.836	17.536	≥0.5	Pass
802.11n20	2437	17.939	17.195	≥0.5	Pass
	2462	17.617	13.763	≥0.5	Pass
802.11n40	2422	35.825	31.301	≥0.5	Pass
	2437	36.454	35.799	≥0.5	Pass
	2452	35.911	32.614	≥0.5	Pass




Test Graphs of Occupied Bandwidth

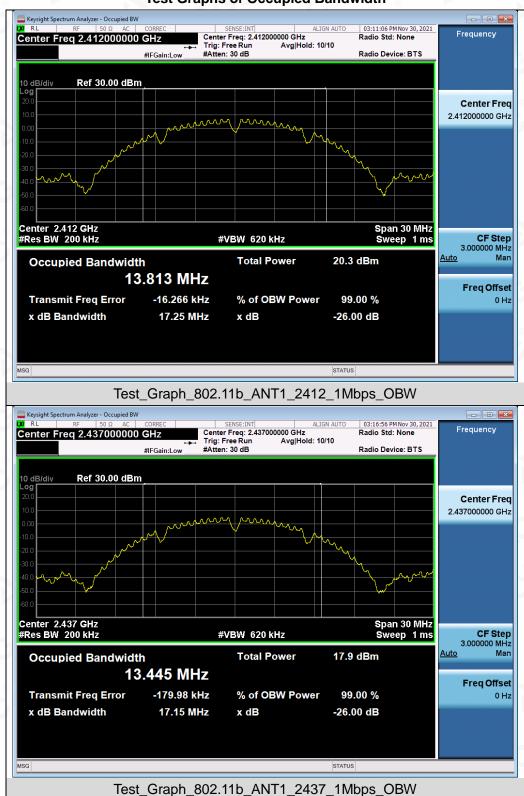




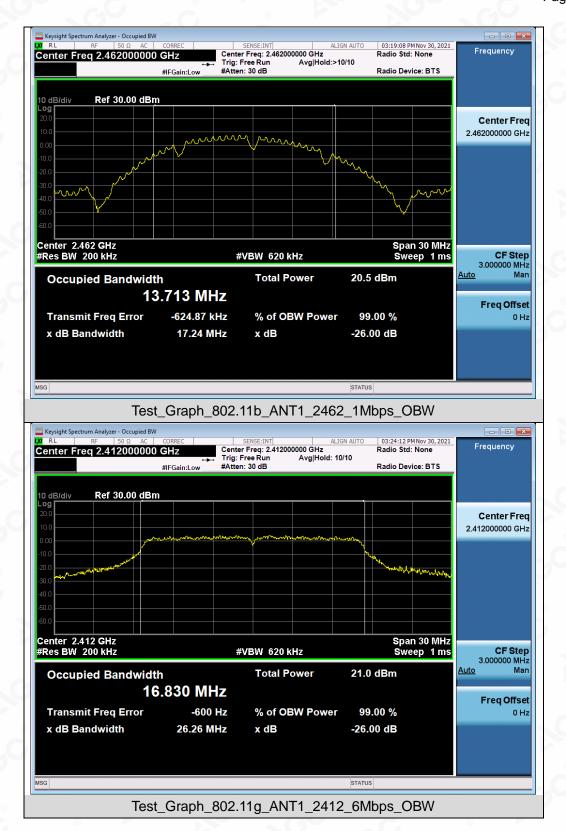




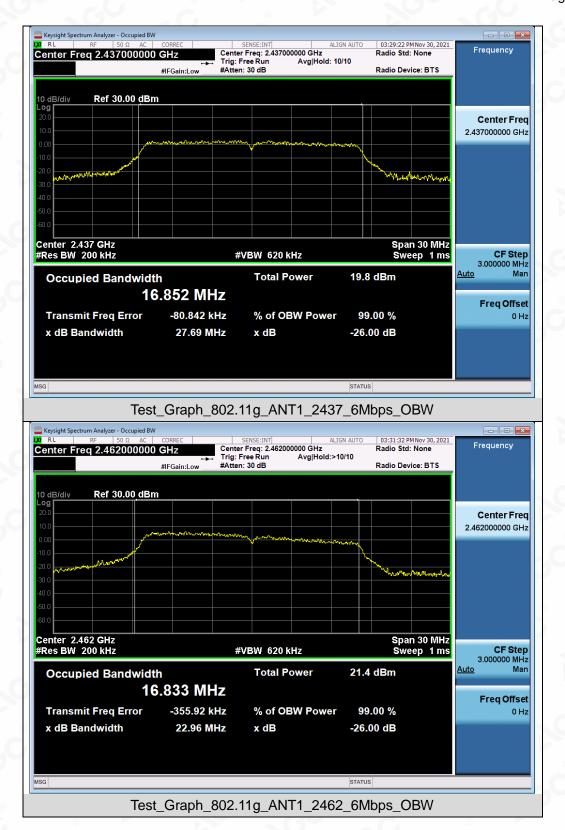




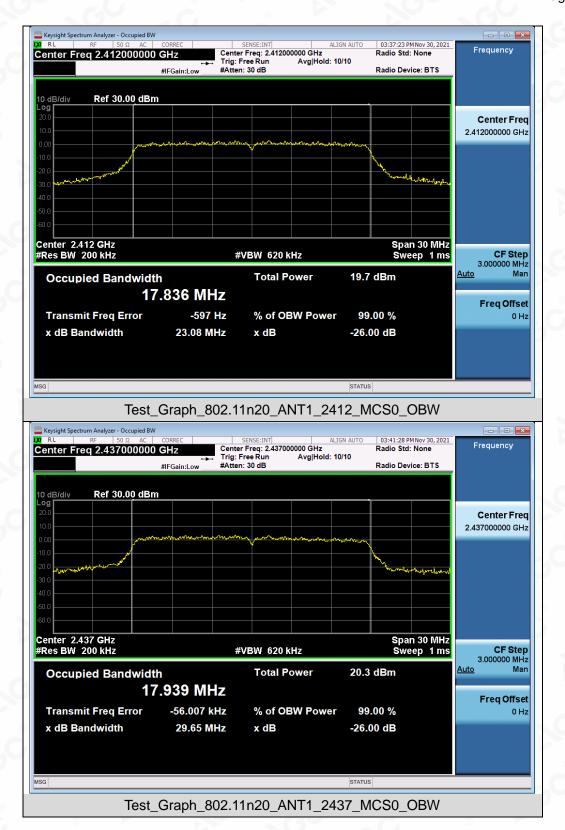



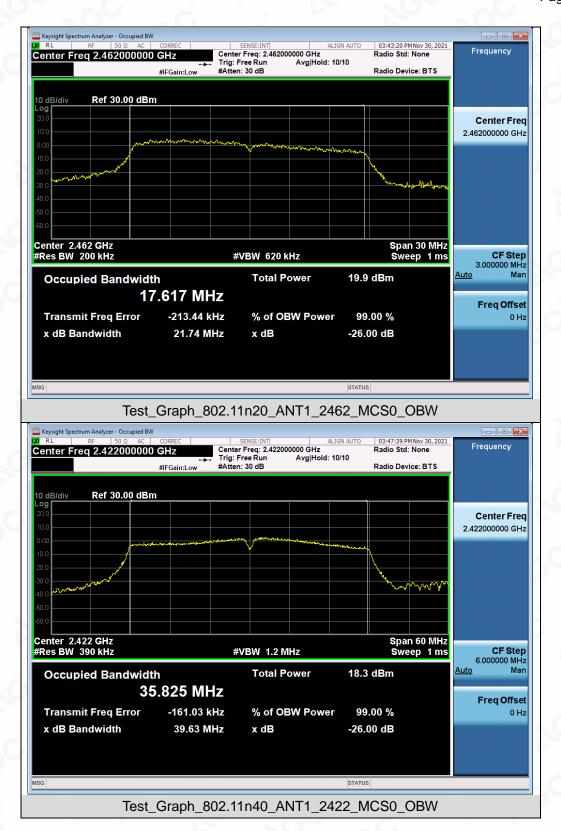




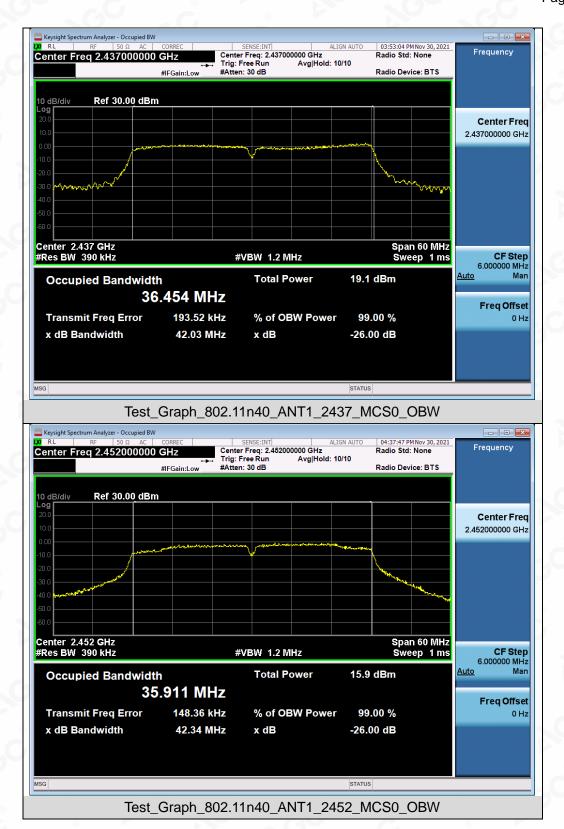




Test Graphs of DTS Bandwidth

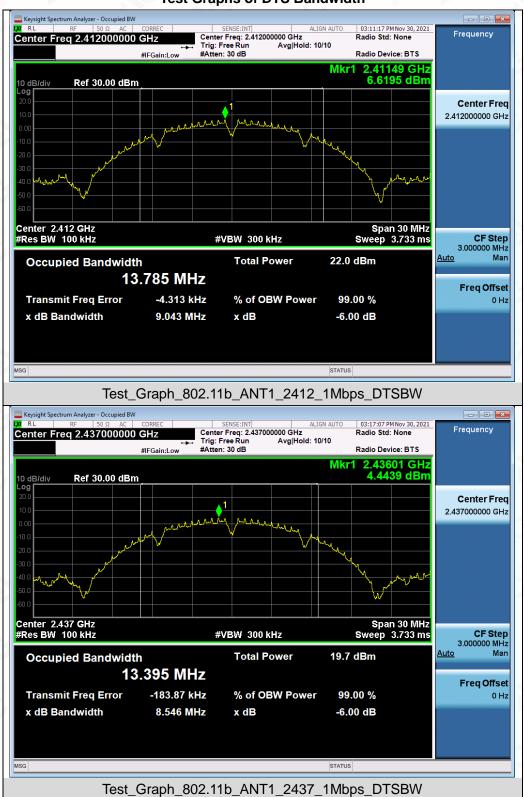









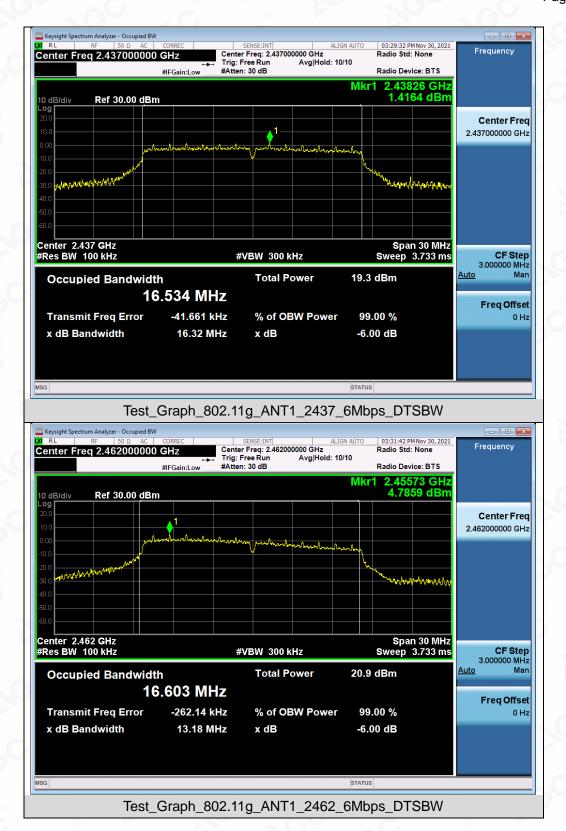




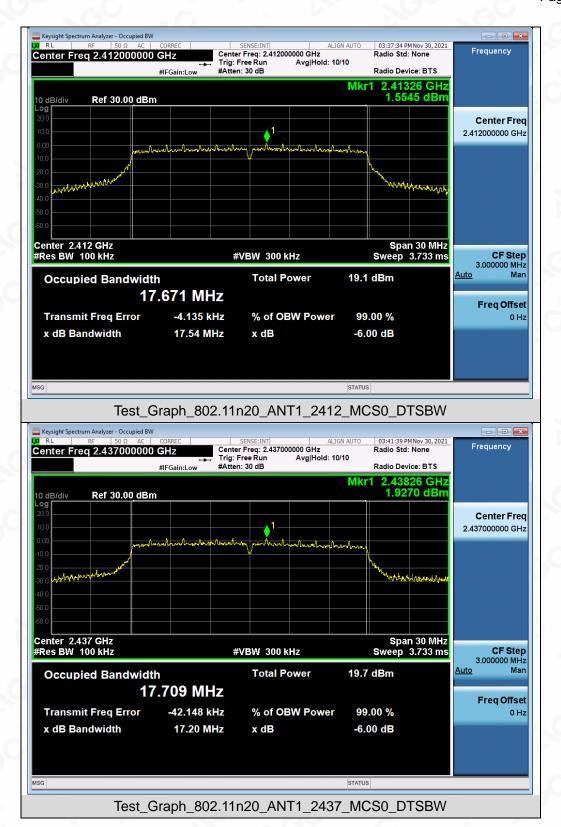



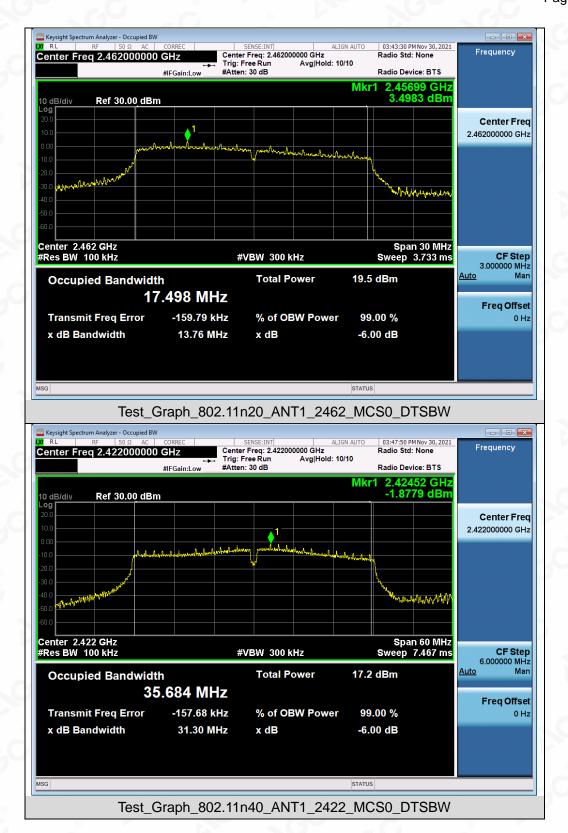



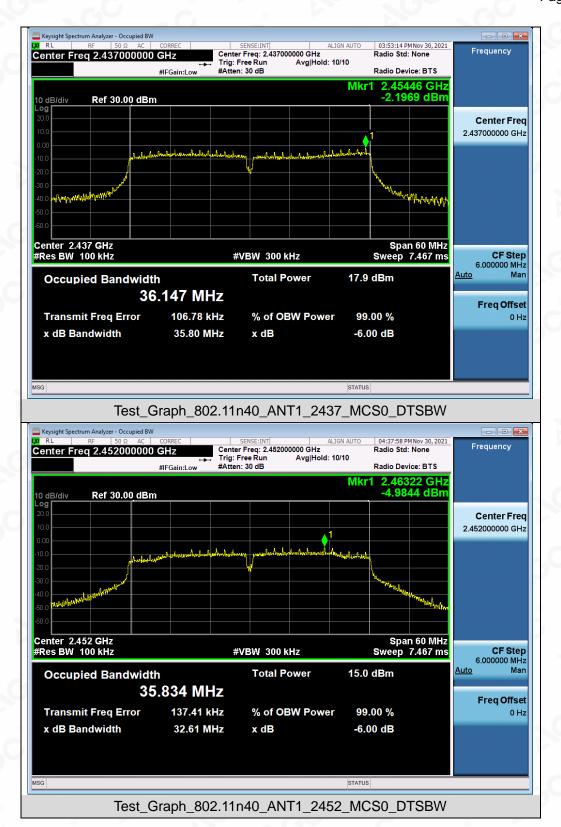



Page 29 of 79

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Annelia alda I insida	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit				
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS			
intentional radiator is operating, the radio frequency	Channel	a.C			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS			

Note: The limits reference level is according to the test plot of -6dB bandwidth.



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Test_Graph_802.11b_ANT1_2412_1Mbps_Lower Band Emissions



Test_Graph_802.11b_ANT1_2412_1Mbps_Higher Band Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



