



FCC TEST REPORT

REPORT NO.: RF921017R02

MODEL NO.: SF-3000

RECEIVED: Oct. 17, 2003

TESTED: Oct. 17 ~ Nov. 05, 2003

APPLICANT: SendFar Technology Co.,Ltd.

ADDRESS: 15FL, NO. 866-2, JUNGJENG RD., JUNGHE CITY,
TAIPEI, TAIWAN 235, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	DEVIATION FROM TEST STANDARD	10
4.1.5	TEST SETUP	11
4.1.6	EUT OPERATING CONDITIONS	11
4.1.7	TEST RESULTS	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS	22
4.3	6dB BANDWIDTH MEASUREMENT	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURE	37
4.3.4	DEVIATION FROM TEST STANDARD	37
4.3.5	TEST SETUP	38



4.3.6	EUT OPERATING CONDITIONS.....	38
4.3.7	TEST RESULTS.....	39
4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES.....	44
4.4.4	DEVIATION FROM TEST STANDARD	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS.....	44
4.4.7	TEST RESULTS.....	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURE	48
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITIONS.....	48
4.5.7	TEST RESULTS.....	49
4.6	BAND EDGES MEASUREMENT	53
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	53
4.6.2	TEST INSTRUMENTS	53
4.6.3	TEST PROCEDURE	53
4.6.4	DEVIATION FROM TEST STANDARD	53
4.6.5	EUT OPERATING CONDITION	53
4.6.6	TEST RESULTS.....	54
4.7	ANTENNA REQUIREMENT	58
4.7.1	STANDARD APPLICABLE	58
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	58
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	59
6	INFORMATION ON THE TESTING LABORATORIES	65



1 CERTIFICATION

PRODUCT : Wireless Access Bridge
MODEL NO.: SF-3000
BRAND NAME : SendFar
APPLICANT : SendFar Technology Co., Ltd.
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 17 to Nov. 05, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Windy Chou, **DATE:** Nov. 06, 2003

Windy Chou

APPROVED BY: Ellis Wu, **DATE:** Nov. 06, 2003

Ellis Wu, Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -11.28dB at 0.564MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System. Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.46dB at 2370.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTES: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Access Bridge
MODEL NO.	SF-3000
POWER SUPPLY	24VDC from POE (Power over Ethernet)
MODULATION TYPE	BPSK, QPSK, CCK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	20.00dBm
ANTENNA TYPE	Dipole antenna with 5.0dBi gain Patch antenna with 9.0dBi gain Patch antenna with 12.0dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

- The following POE (Power over Ethernet) powered the EUT:

BRAND :	SendFar
MODEL :	1PW – 2408 series
INPUT :	AC 100-240V
OUTPUT :	24V / 0.8A

The following AC adapter powered the POE:

BRAND :	FAIRWAY
MODEL :	WN20U-240
INPUT :	100-241V~1.0A MAX 50-60Hz
OUTPUT :	+24Vac 0.83A

- There are three antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Antenna Gain (dBi)
1	Dipole Antenna	5
2	Patch Antenna	9
3	Patch Antenna	12

- For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Data rate with 11Mbps, the worst case, was chosen for final test.
4. There are three test modes, please refer to the following table:

TEST MODE	Antenna Type	Antenna Gain (dBi)	Internal connector	External connector
1	Dipole Antenna	5	MMCX	Reversed SMA
2	Patch Antenna	9	MMCX	NA
3	Patch Antenna	12	Reversed SAM	N Type

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless Access Bridge. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4: 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	PP01L	TW-09C748-12800-19O-B220	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017096	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

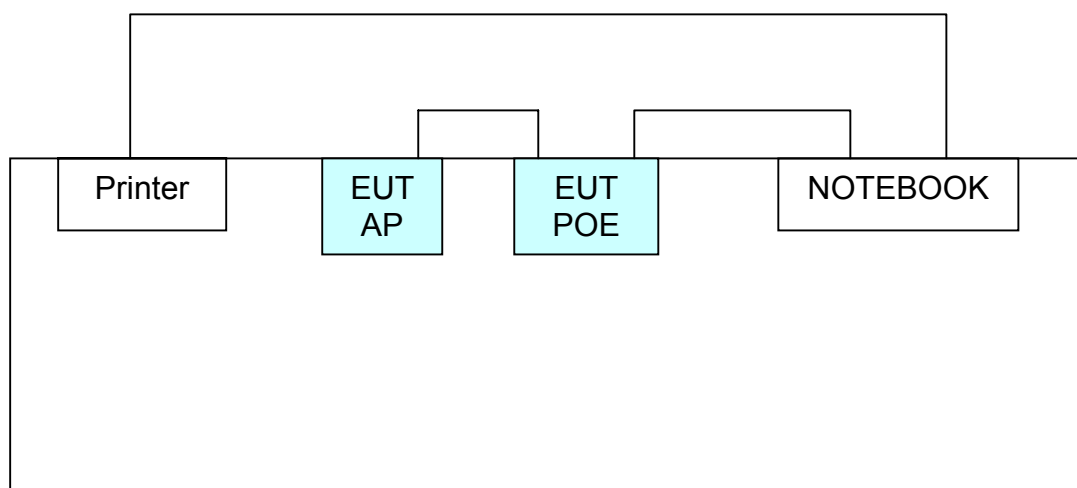

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	828765/002	July 15, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	Apr. 28, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Apr. 28, 2004
*OHDE & SCHWARZ 4-wire ISN	ENY41	935154/007	Apr. 30, 2004
*OHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	Apr. 30, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	May 23, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	Jun. 04, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 9.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

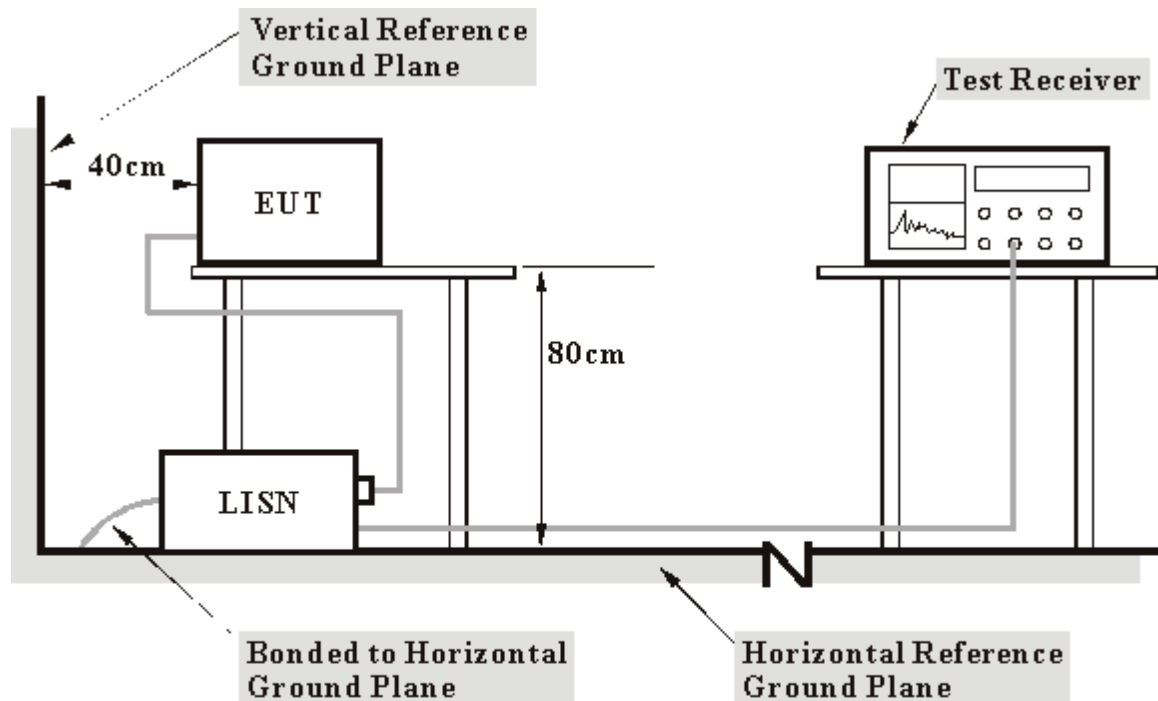

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PIN".

4.1.7 TEST RESULTS

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.282	0.14	43.19	-	43.33	-	60.76	50.76	-17.43	-
2	0.420	0.20	38.69	-	38.89	-	57.45	47.45	-18.56	-
3	0.561	0.20	44.40	-	44.60	-	56.00	46.00	-11.40	-
4	1.810	0.20	40.84	-	41.04	-	56.00	46.00	-14.96	-
5	3.835	0.29	36.38	-	36.67	-	56.00	46.00	-19.33	-
6	10.188	0.61	27.64	-	28.25	-	60.00	50.00	-31.75	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

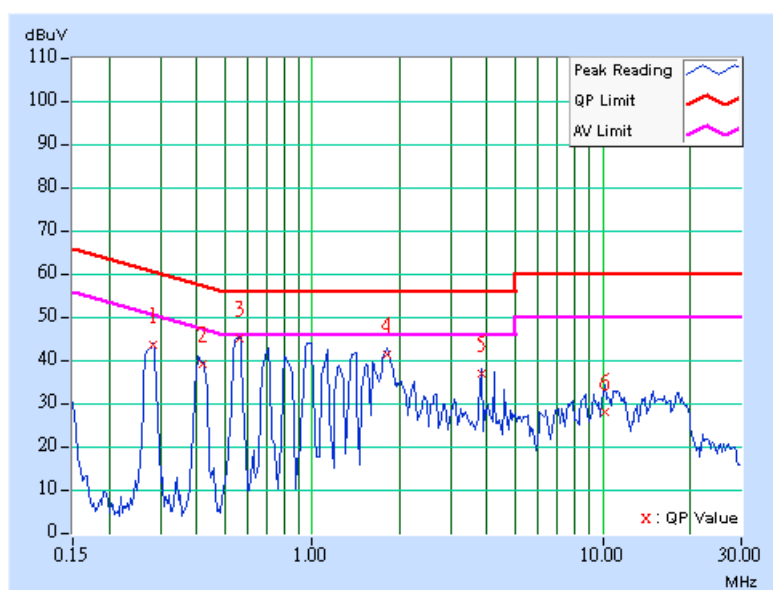

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 50%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.283	0.14	43.96	-	44.10	-	60.72	50.72	-16.62	-
2	0.564	0.20	44.52	-	44.72	-	56.00	46.00	-11.28	-
3	0.982	0.20	42.14	-	42.34	-	56.00	46.00	-13.66	-
4	1.801	0.20	40.48	-	40.68	-	56.00	46.00	-15.32	-
5	3.826	0.20	36.38	-	36.58	-	56.00	46.00	-19.42	-
6	14.033	0.74	27.05	-	27.79	-	60.00	50.00	-32.21	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

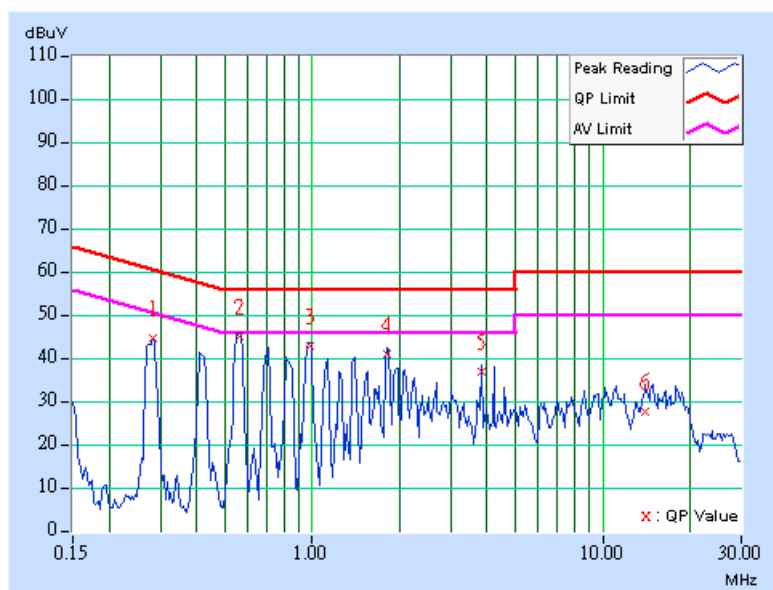

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 50%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.277	0.14	42.27	-	42.41	-	60.90	50.90	-18.49	-
2	0.408	0.20	39.27	-	39.47	-	57.70	47.70	-18.23	-
3	0.552	0.20	43.96	-	44.16	-	56.00	46.00	-11.84	-
4	0.971	0.20	42.40	-	42.60	-	56.00	46.00	-13.40	-
5	1.798	0.20	40.36	-	40.56	-	56.00	46.00	-15.44	-
6	4.203	0.31	40.60	-	40.91	-	56.00	46.00	-15.09	-
7	11.228	0.67	26.37	-	27.04	-	60.00	50.00	-32.96	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

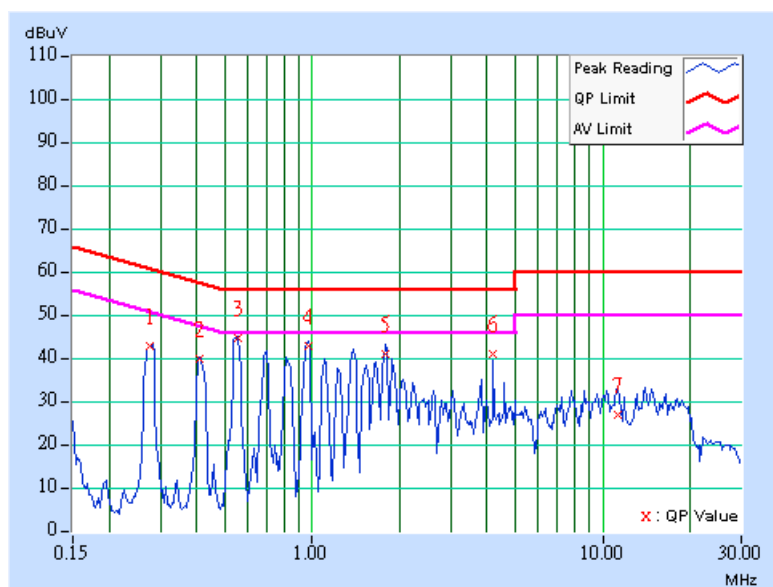

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 50%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.276	0.14	43.05	-	43.19	-	60.92	50.92	-17.73	-
2	0.413	0.20	40.50	-	40.70	-	57.59	47.59	-16.89	-
3	0.556	0.20	44.40	-	44.60	-	56.00	46.00	-11.40	-
4	0.973	0.20	42.00	-	42.20	-	56.00	46.00	-13.80	-
5	1.791	0.20	40.44	-	40.64	-	56.00	46.00	-15.36	-
6	4.207	0.21	39.19	-	39.40	-	56.00	46.00	-16.60	-
7	14.819	0.79	27.44	-	28.23	-	60.00	50.00	-31.77	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

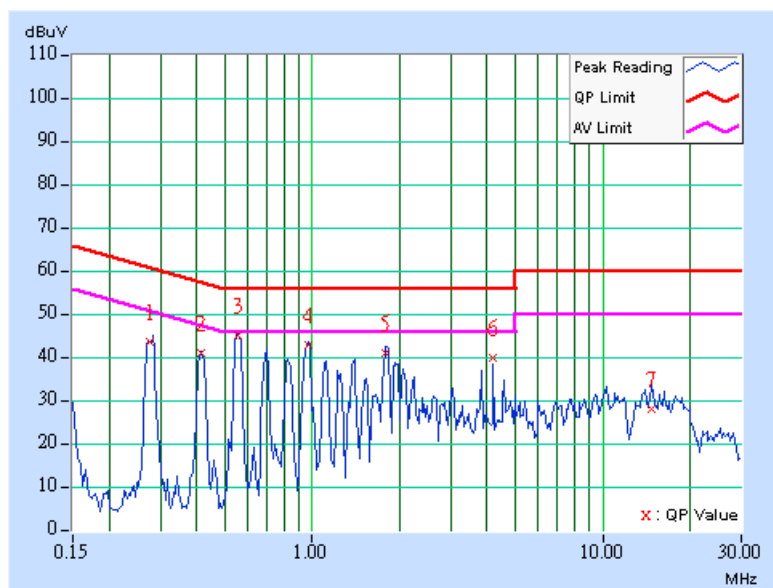

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg.C, 50%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.280	0.14	42.75	-	42.89	-	60.82	50.82	-17.93	-
2	0.415	0.20	38.71	-	38.91	-	57.56	47.56	-18.65	-
3	0.559	0.20	43.94	-	44.14	-	56.00	46.00	-11.86	-
4	0.966	0.20	41.84	-	42.04	-	56.00	46.00	-13.96	-
5	1.804	0.20	40.72	-	40.92	-	56.00	46.00	-15.08	-
6	4.200	0.31	42.20	-	42.51	-	56.00	46.00	-13.49	-
7	14.045	0.84	27.79	-	28.63	-	60.00	50.00	-31.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

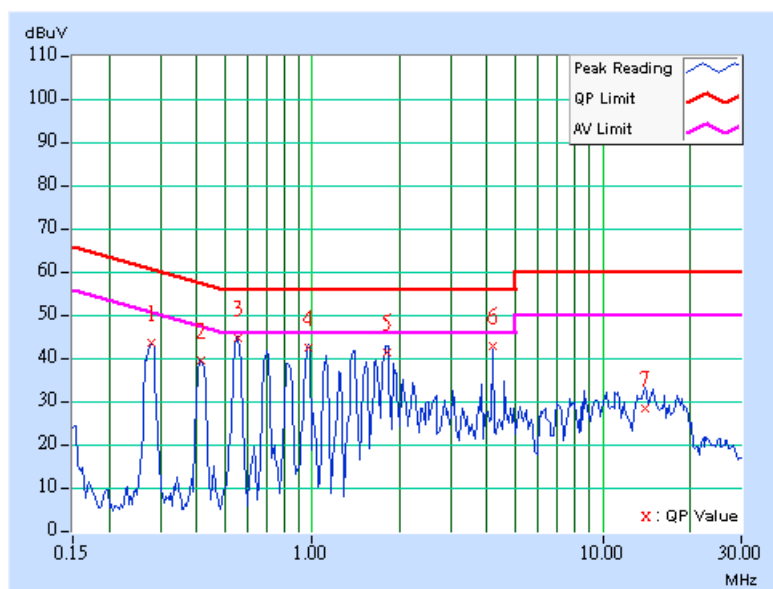

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg.C, 50%RH, 991hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.282	0.14	43.62	-	43.76	-	60.75	50.75	-16.99	-
2	0.415	0.20	40.13	-	40.33	-	57.55	47.55	-17.22	-
3	0.558	0.20	44.40	-	44.60	-	56.00	46.00	-11.40	-
4	0.970	0.20	41.40	-	41.60	-	56.00	46.00	-14.40	-
5	1.804	0.20	41.04	-	41.24	-	56.00	46.00	-14.76	-
6	4.201	0.21	42.86	-	43.07	-	56.00	46.00	-12.93	-
7	14.861	0.79	28.42	-	29.21	-	60.00	50.00	-30.79	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

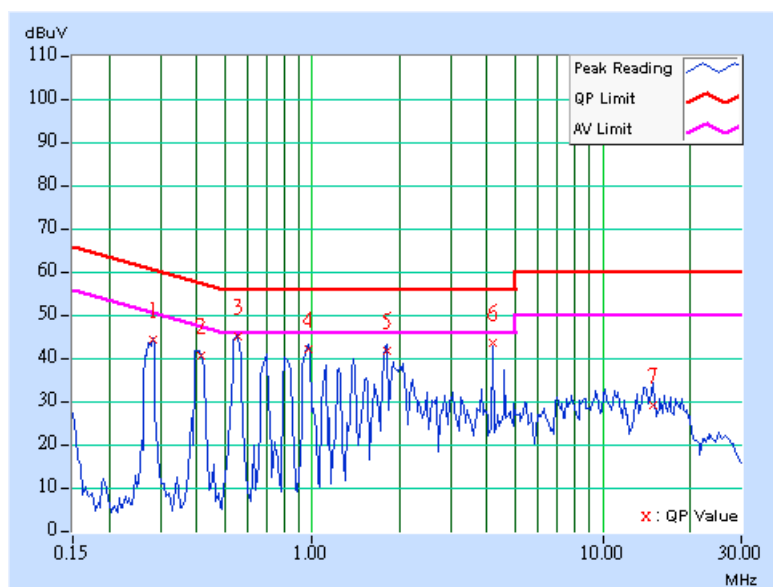



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May 01, 2004
HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun. 30, 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiated_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05, 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05, 2004

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

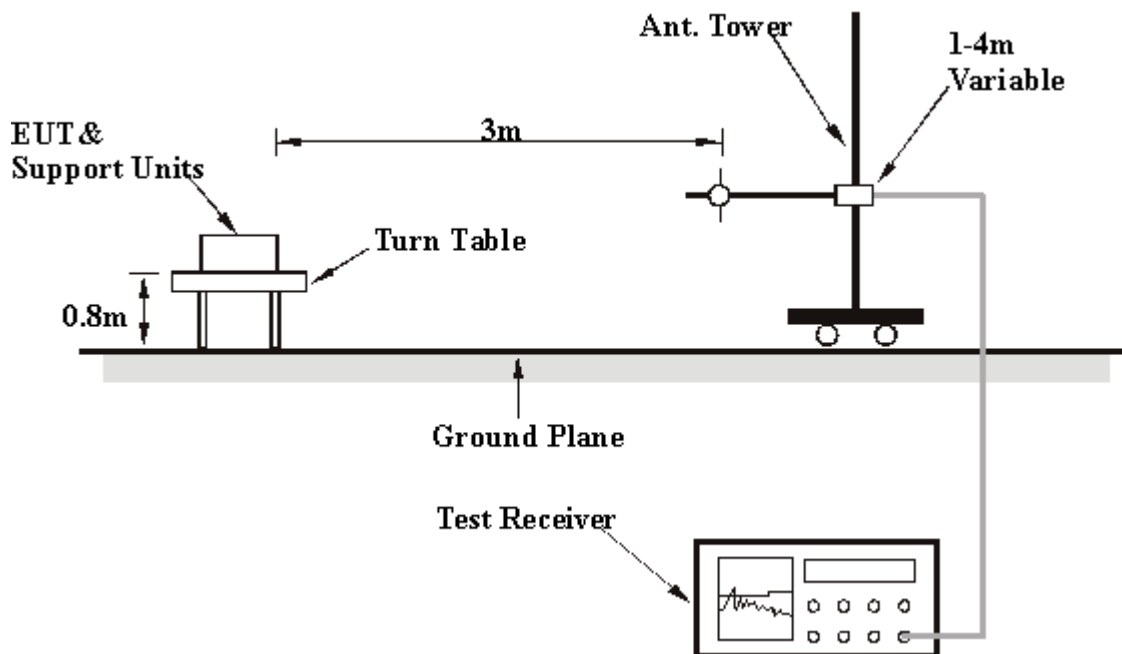

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	110.83	35.12 QP	43.50	-8.38	2.35 H	181	22.75	12.37
2	125.30	35.91 QP	43.50	-7.59	2.21 H	1	23.11	12.80
3	167.05	32.15 QP	43.50	-11.35	2.12 H	123	21.54	10.61
4	195.85	33.11 QP	43.50	-10.39	1.82 H	226	22.41	10.70
5	210.33	33.10 QP	43.50	-10.40	1.49 H	47	21.75	11.35
6	233.85	39.41 QP	46.00	-6.59	1.20 H	207	26.72	12.69
7	234.58	39.44 QP	46.00	-6.56	1.57 H	7	26.71	12.73
8	261.50	36.83 QP	46.00	-9.17	1.20 H	256	21.70	15.13
9	326.00	38.82 QP	46.00	-7.18	1.01 H	226	22.78	16.04
10	409.00	40.03 QP	46.00	-5.97	1.01 H	145	21.68	18.35
11	486.00	37.99 QP	46.00	-8.01	1.01 H	173	18.21	19.78
12	500.00	42.36 QP	46.00	-3.64	1.01 H	213	22.23	20.13
13	510.00	39.92 QP	46.00	-6.08	1.01 H	112	19.65	20.27
14	562.00	38.14 QP	46.00	-7.86	1.01 H	146	16.95	21.19
15	580.00	37.55 QP	46.00	-8.45	1.01 H	99	15.85	21.70
16	612.00	39.29 QP	46.00	-6.71	1.01 H	52	16.97	22.32
17	625.00	38.66 QP	46.00	-7.34	1.01 H	1	16.29	22.37
18	748.80	35.24 QP	46.00	-10.76	1.25 H	310	11.40	23.84
19	874.70	38.64 QP	46.00	-7.36	1.35 H	248	14.26	24.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.87	35.64 QP	40.00	-4.36	1.01 V	170	26.99	8.65
2	123.75	38.06 QP	43.50	-5.44	1.01 V	263	25.18	12.88
3	138.80	39.78 QP	43.50	-3.72	1.01 V	113	27.68	12.10
4	186.83	39.09 QP	43.50	-4.41	1.01 V	276	28.52	10.57
5	211.20	35.44 QP	43.50	-8.06	1.01 V	118	24.04	11.40
6	238.05	35.93 QP	46.00	-10.07	1.01 V	249	23.00	12.93
7	500.00	39.23 QP	46.00	-6.77	1.78 V	118	19.10	20.13
8	512.00	38.71 QP	46.00	-7.29	1.78 V	82	18.41	20.30
9	562.00	37.03 QP	46.00	-8.97	1.48 V	0	15.84	21.19
10	612.00	36.26 QP	46.00	-9.74	1.35 V	57	13.94	22.32
11	748.00	37.68 QP	46.00	-8.32	1.01 V	104	13.86	23.82
12	874.70	38.94 QP	46.00	-7.06	1.01 V	23	14.56	24.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 1	MODE	1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	41.51 PK	74.00	-32.49	1.74 H	59	11.92	29.59
2	*2412.00	103.20 PK			1.74 H	59	73.54	29.66
2	*2412.00	96.18 AV			1.74 H	59	66.52	29.66
3	4824.00	46.01 PK	74.00	-27.99	1.12 H	236	10.75	35.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.29 PK	74.00	-20.71	1.18 V	199	23.70	29.59
1	2390.00	45.76 AV	54.00	-8.24	1.18 V	199	16.17	29.59
2	*2412.00	114.98 PK			1.18 V	199	85.32	29.66
2	*2412.00	107.45 AV			1.18 V	199	77.79	29.66
3	2786.00	48.88 PK	74.00	-25.12	1.05 V	257	18.15	30.73

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 6	MODE	1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.53 PK			1.52 H	59	75.79	29.74
1	*2437.00	98.55 AV			1.52 H	59	68.81	29.74
2	4720.00	45.34 PK	74.00	-28.66	1.21 H	36	10.52	34.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.33 PK			1.61 V	93	84.59	29.74
1	*2437.00	107.38 AV			1.61 V	93	77.64	29.74
2	4720.00	47.34 PK	74.00	-26.66	1.06 V	336	12.52	34.82

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	1
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.86 PK			1.79 H	64	72.03	29.83
1	*2462.00	95.04 AV			1.79 H	64	65.21	29.83
2	2483.50	40.67 PK	74.00	-33.33	1.79 H	64	10.77	29.90
3	4924.00	46.38 PK	74.00	-27.62	1.47 H	326	10.71	35.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.13 PK			1.13 V	196	81.30	29.83
1	*2462.00	104.26 AV			1.13 V	196	74.43	29.83
2	2483.50	49.94 PK	74.00	-24.06	1.13 V	196	20.04	29.90
3	4924.00	47.38 PK	74.00	-26.62	1.19 V	269	11.71	35.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Martin Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.39	33.89 QP	40.00	-6.11	1.20 H	214	21.73	12.16
2	50.54	32.45 QP	40.00	-7.55	1.25 H	345	23.21	9.24
3	74.53	35.34 QP	40.00	-4.66	1.47 H	10	27.89	7.45
4	79.33	35.72 QP	40.00	-4.28	1.37 H	63	27.48	8.24
5	85.51	35.21 QP	40.00	-4.79	1.90 H	1	26.28	8.93
6	108.83	36.32 QP	43.50	-7.18	1.47 H	308	24.11	12.21
7	112.55	32.37 QP	43.50	-11.13	1.30 H	158	19.87	12.50
8	158.56	33.29 QP	43.50	-10.21	1.47 H	97	22.50	10.79
9	166.81	32.03 QP	43.50	-11.47	1.32 H	162	21.41	10.62
10	200.04	37.07 QP	43.50	-6.43	1.42 H	341	26.31	10.76
11	213.24	31.97 QP	43.50	-11.53	1.64 H	248	20.46	11.51
12	233.33	33.36 QP	46.00	-12.64	1.41 H	31	20.70	12.66
13	250.13	36.46 QP	46.00	-9.54	1.05 H	9	22.83	13.63
14	293.88	33.60 QP	46.00	-12.40	1.00 H	199	18.04	15.56
15	301.80	35.14 QP	46.00	-10.86	1.25 H	193	19.45	15.69
16	338.50	29.44 QP	46.00	-16.56	1.56 H	218	13.21	16.23
17	625.01	31.23 QP	46.00	-14.77	1.42 H	164	8.86	22.37
18	657.25	33.16 QP	46.00	-12.84	1.02 H	212	10.68	22.48
19	748.49	36.23 QP	46.00	-9.77	1.38 H	108	12.40	23.83
20	750.05	32.60 QP	46.00	-13.40	1.14 H	267	8.73	23.87
21	875.00	37.85 QP	46.00	-8.15	1.01 H	20	13.47	24.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Martin Lee			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	54.55	34.24 QP	40.00	-5.76	1.01 V	256	25.25	8.99
2	62.10	36.07 QP	40.00	-3.93	1.21 V	152	27.82	8.25
3	84.72	33.96 QP	40.00	-6.04	1.58 V	132	25.11	8.85
4	110.80	39.30 QP	43.50	-4.20	1.08 V	342	26.93	12.37
5	114.80	38.34 QP	43.50	-5.16	1.00 V	302	25.66	12.68
6	134.85	33.24 QP	43.50	-10.26	1.05 V	136	20.93	12.31
7	159.68	40.09 QP	43.50	-3.41	1.29 V	225	29.38	10.71
8	175.00	35.41 QP	43.50	-8.09	1.36 V	225	24.88	10.53
9	199.20	35.61 QP	43.50	-7.89	1.24 V	348	24.86	10.75
10	239.98	31.46 QP	46.00	-14.54	1.39 V	303	18.42	13.04
11	250.13	33.05 QP	46.00	-12.95	1.00 V	194	19.42	13.63
12	457.35	37.83 QP	46.00	-8.17	1.34 V	17	18.77	19.06
13	593.39	37.00 QP	46.00	-9.00	1.01 V	28	14.91	22.09
14	601.75	40.86 QP	46.00	-5.14	1.00 V	68	18.57	22.29
15	625.01	33.99 QP	46.00	-12.01	1.34 V	285	11.62	22.37
16	749.99	35.43 QP	46.00	-10.57	1.09 V	112	11.56	23.87
17	875.00	37.06 QP	46.00	-8.94	1.65 V	15	12.68	24.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 1	MODE	2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.75 PK	74.00	-29.25	1.00 H	148	15.16	29.59
2	*2412.00	108.74 PK			1.00 H	148	79.08	29.66
2	*2412.00	101.47 AV			1.00 H	148	71.81	29.66
3	4824.00	46.37 PK	74.00	-27.63	1.38 H	174	11.11	35.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.60 PK	74.00	-17.40	1.00 V	179	27.00	29.60
1	2390.00	49.30 AV	54.00	-4.70	1.00 V	179	19.70	29.60
2	*2412.00	119.80 PK			1.00 V	179	90.10	29.70
2	*2412.00	112.70 AV			1.00 V	179	83.00	29.70
3	4824.00	44.90 PK	74.00	-29.10	1.21 V	182	9.70	35.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 6	MODE	2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.73 PK			1.00 H	144	79.99	29.74
1	*2437.00	102.72 AV			1.00 H	144	72.98	29.74
2	4874.00	46.22 PK	74.00	-27.78	1.28 H	156	10.75	35.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	120.52 PK			1.03 V	163	90.78	29.74
1	*2437.00	113.59 AV			1.03 V	163	83.85	29.74
2	4874.00	46.58 PK	74.00	-27.42	1.18 V	163	11.11	35.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	2
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.95 PK			1.20 H	201	79.12	29.83
1	*2462.00	102.51 AV			1.20 H	201	72.68	29.83
2	2483.50	44.96 PK	74.00	-29.04	1.20 H	201	15.06	29.90
3	4924.00	45.78 PK	74.00	-28.22	1.37 H	214	10.11	35.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.87 PK			1.20 V	174	91.04	29.83
1	*2462.00	113.45 AV			1.20 V	174	83.62	29.83
2	2483.50	58.26 PK	74.00	-15.74	1.20 V	174	28.36	29.90
2	2483.50	50.84 AV	54.00	-3.16	1.20 V	174	20.94	29.90
3	4924.00	44.70 PK	74.00	-29.30	1.03 V	265	9.03	35.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	3
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	86.15	33.30 QP	40.00	-6.70	2.28 H	272	24.30	9.00
2	128.25	36.85 QP	43.50	-6.65	2.15 H	100	24.20	12.65
3	139.20	34.04 QP	43.50	-9.46	2.01 H	359	21.96	12.08
4	153.75	34.05 QP	43.50	-9.45	1.85 H	342	22.94	11.11
5	197.10	37.94 QP	43.50	-5.56	1.80 H	189	27.22	10.72
6	211.10	33.99 QP	43.50	-9.51	1.56 H	190	22.60	11.39
7	225.10	37.90 QP	46.00	-8.10	1.56 H	245	25.71	12.19
8	234.48	39.51 QP	46.00	-6.49	1.39 H	138	26.78	12.73
9	261.23	38.81 QP	46.00	-7.19	1.28 H	58	23.68	15.13
10	409.00	40.51 QP	46.00	-5.49	1.01 H	324	22.16	18.35
11	438.00	41.00 QP	46.00	-5.00	1.01 H	355	22.28	18.72
12	500.00	42.02 QP	46.00	-3.98	1.01 H	267	21.89	20.13
13	511.00	40.64 QP	46.00	-5.36	1.01 H	294	20.35	20.29
14	563.00	38.58 QP	46.00	-7.42	1.01 H	223	17.37	21.21
15	613.00	41.12 QP	46.00	-4.88	1.01 H	23	18.80	22.32
16	748.00	37.31 QP	46.00	-8.69	1.43 H	300	13.49	23.82
17	874.70	38.04 QP	46.00	-7.96	1.53 H	251	13.66	24.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	3
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY: Jun Wu			

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	85.67	35.81 QP	40.00	-4.19	1.01 V	35	26.86	8.95
2	129.45	37.45 QP	43.50	-6.05	1.01 V	252	24.86	12.59
3	140.30	39.26 QP	43.50	-4.24	1.01 V	142	27.24	12.02
4	152.35	40.27 QP	43.50	-3.23	1.01 V	100	29.06	11.21
5	197.20	38.08 QP	43.50	-5.42	1.01 V	300	27.36	10.72
6	212.40	34.17 QP	43.50	-9.33	1.01 V	104	22.70	11.47
7	235.08	39.10 QP	46.00	-6.90	1.01 V	211	26.34	12.76
8	249.95	35.92 QP	46.00	-10.08	1.01 V	171	22.31	13.61
9	457.00	39.21 QP	46.00	-6.79	1.56 V	24	20.16	19.05
10	500.00	40.57 QP	46.00	-5.43	1.58 V	91	20.44	20.13
11	512.00	40.15 QP	46.00	-5.85	1.58 V	60	19.85	20.30
12	563.00	40.79 QP	46.00	-5.21	1.01 V	204	19.58	21.21
13	614.00	41.30 QP	46.00	-4.70	1.01 V	269	18.97	22.33
14	625.00	36.65 QP	46.00	-9.35	1.01 V	354	14.28	22.37
15	748.00	37.77 QP	46.00	-8.23	1.01 V	17	13.95	23.82
16	799.80	37.32 QP	46.00	-8.68	1.01 V	359	13.63	23.69

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 1	MODE	3
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Martin Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	44.65 PK	74.00	-29.35	1.37 H	324	15.09	29.56
2	2390.00	39.62 PK	74.00	-34.38	1.37 H	324	9.97	29.65
3	*2412.00	104.22 PK			1.37 H	324	74.50	29.72
3	*2412.00	97.52 AV			1.37 H	324	67.80	29.72
4	2786.00	46.09 PK	74.00	-27.91	1.03 H	24	15.52	30.57
5	4824.00	45.99 PK	74.00	-28.01	1.29 H	68	10.54	35.45

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	59.71 PK	74.00	-14.29	1.24 V	360	30.15	29.56
1	2370.00	52.54 AV	54.00	-1.46	1.24 V	360	22.98	29.56
2	2390.00	54.68 PK	74.00	-19.32	1.24 V	360	25.03	29.65
2	2390.00	47.51 AV	54.00	-6.49	1.24 V	360	17.86	29.65
3	*2412.00	119.28 PK			1.24 V	360	89.56	29.72
3	*2412.00	112.11 AV			1.24 V	360	82.39	29.72
4	2786.00	55.20 PK	74.00	-18.80	1.03 V	24	24.63	30.57
4	2786.00	45.89 AV	54.00	-8.11	1.03 V	24	15.32	30.57
5	4824.00	45.92 PK	74.00	-28.08	1.03 V	24	10.47	35.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 6	MODE	3
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Martin Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.86 PK			1.32 H	328	78.07	29.79
1	*2437.00	100.58 AV			1.32 H	328	70.79	29.79
2	4874.00	46.55 PK	74.00	-27.45	1.02 H	20	10.76	35.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.85 PK			1.20 V	0	90.06	29.79
1	*2437.00	112.79 AV			1.20 V	0	83.00	29.79
2	2811.00	53.67 PK	74.00	-20.33	1.05 V	360	23.07	30.60
2	2811.00	41.66 AV	54.00	-12.34	1.05 V	360	11.06	30.60
3	4874.00	47.00 PK	74.00	-27.00	1.12 V	147	11.21	35.79

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.

EUT	Wireless Access Bridge	MODEL	SF-3000
CHANNEL	Channel 11	MODE	3
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY: Martin Lee			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.35 PK			1.38 H	34	71.50	29.85
1	*2462.00	93.69 AV			1.38 H	34	63.84	29.85
2	2483.50	40.47 PK	74.00	-33.53	1.38 H	34	10.56	29.91
3	4924.00	45.95 PK	74.00	-28.05	1.20 H	300	9.86	36.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.26 PK			1.22 V	360	90.41	29.85
1	*2462.00	112.17 AV			1.22 V	360	82.32	29.85
2	2483.50	59.38 PK	74.00	-14.62	1.22 V	360	29.47	29.91
2	2483.50	51.29 AV	54.00	-2.71	1.22 V	360	21.38	29.91
3	2521.00	59.38 PK	74.00	-14.62	1.22 V	360	29.42	29.96
3	2521.00	51.97 AV	54.00	-2.03	1.22 V	360	22.01	29.96
4	4924.00	46.60 PK	74.00	-27.40	1.02 V	232	10.51	36.09

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	Wireless Access Bridge	MODEL	SF-3000
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991hPa
TEST BY : Ansen Lei			


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.12	0.5	PASS
6	2437	11.08	0.5	PASS
11	2462	9.76	0.5	PASS

CH1

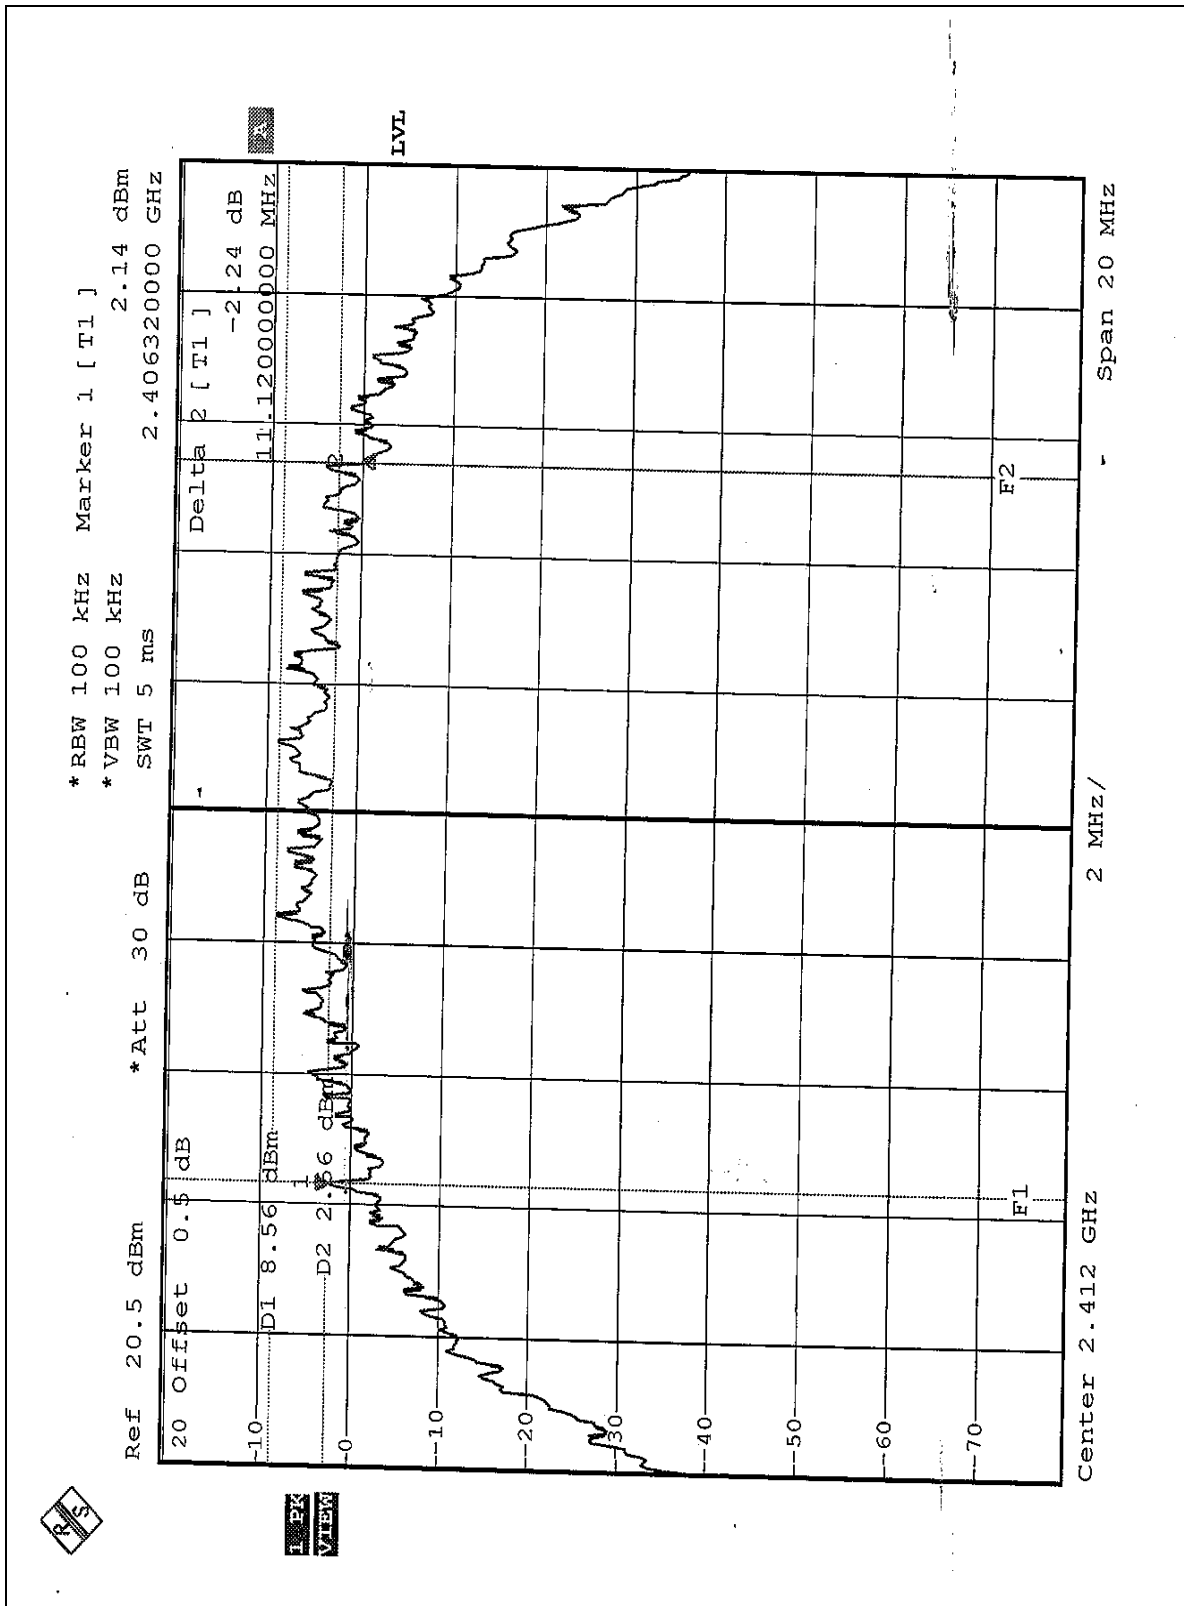




CH6

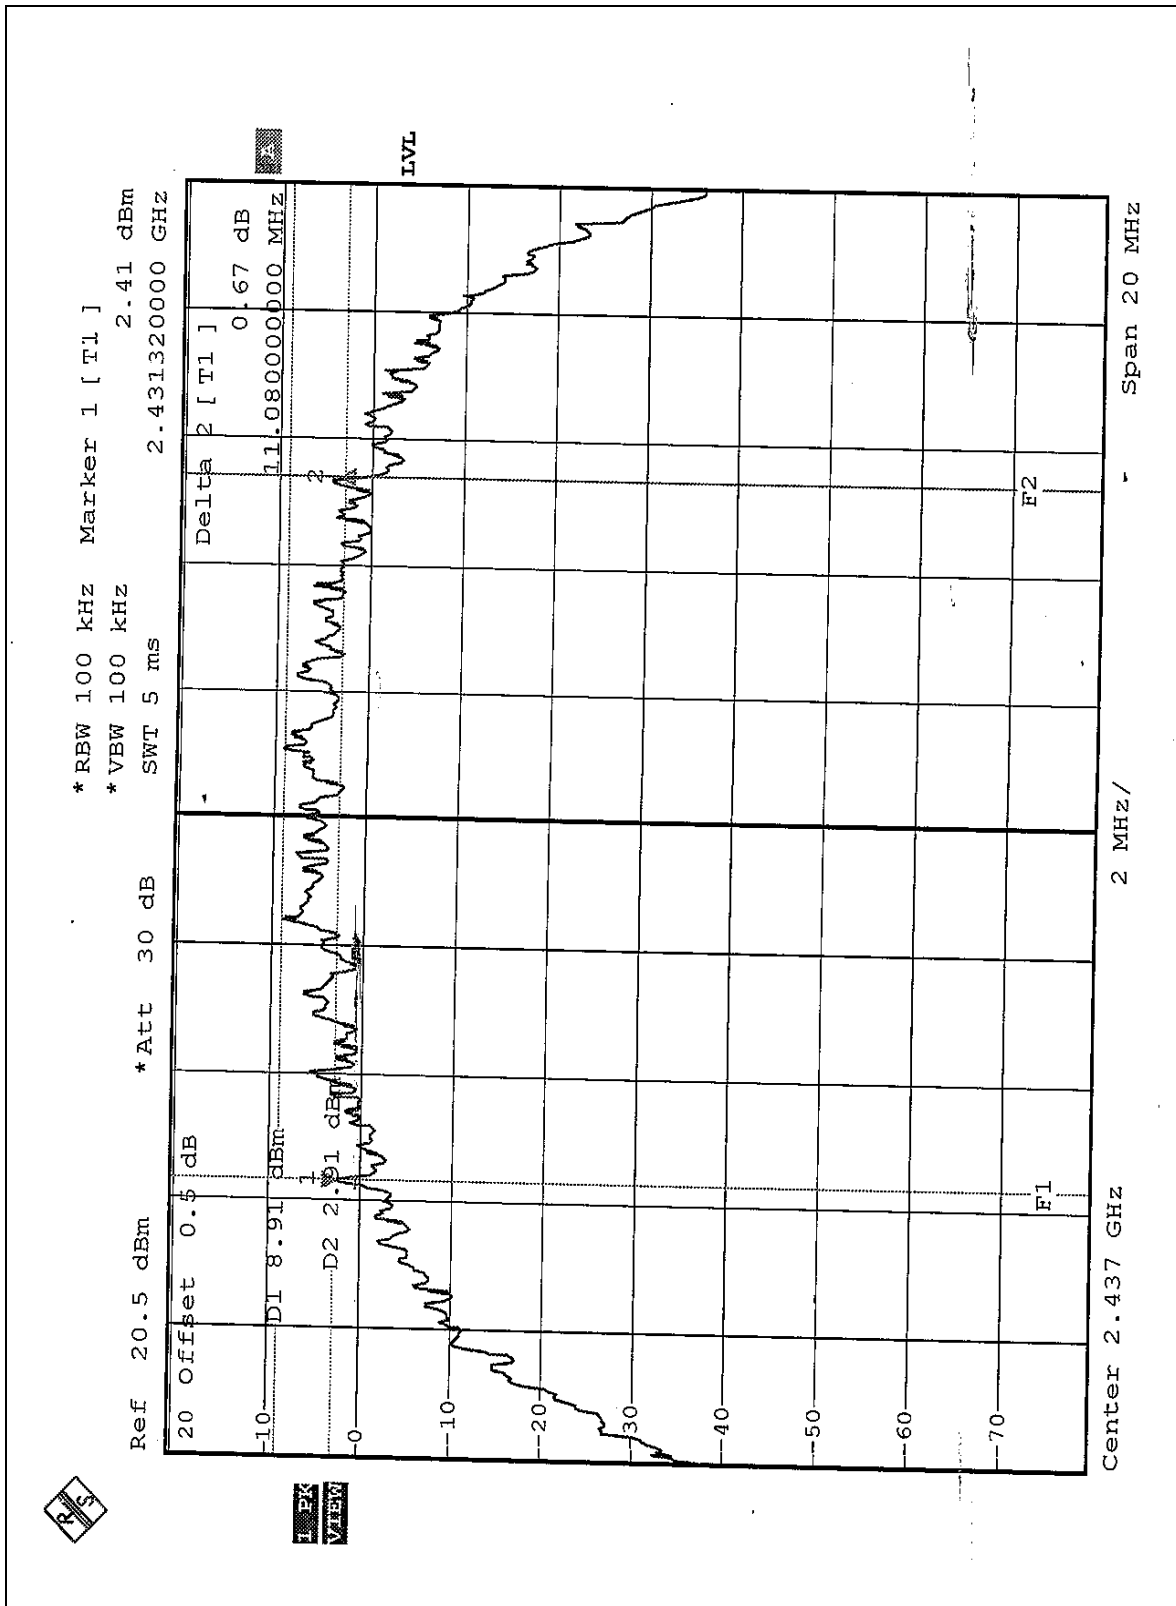

CH11

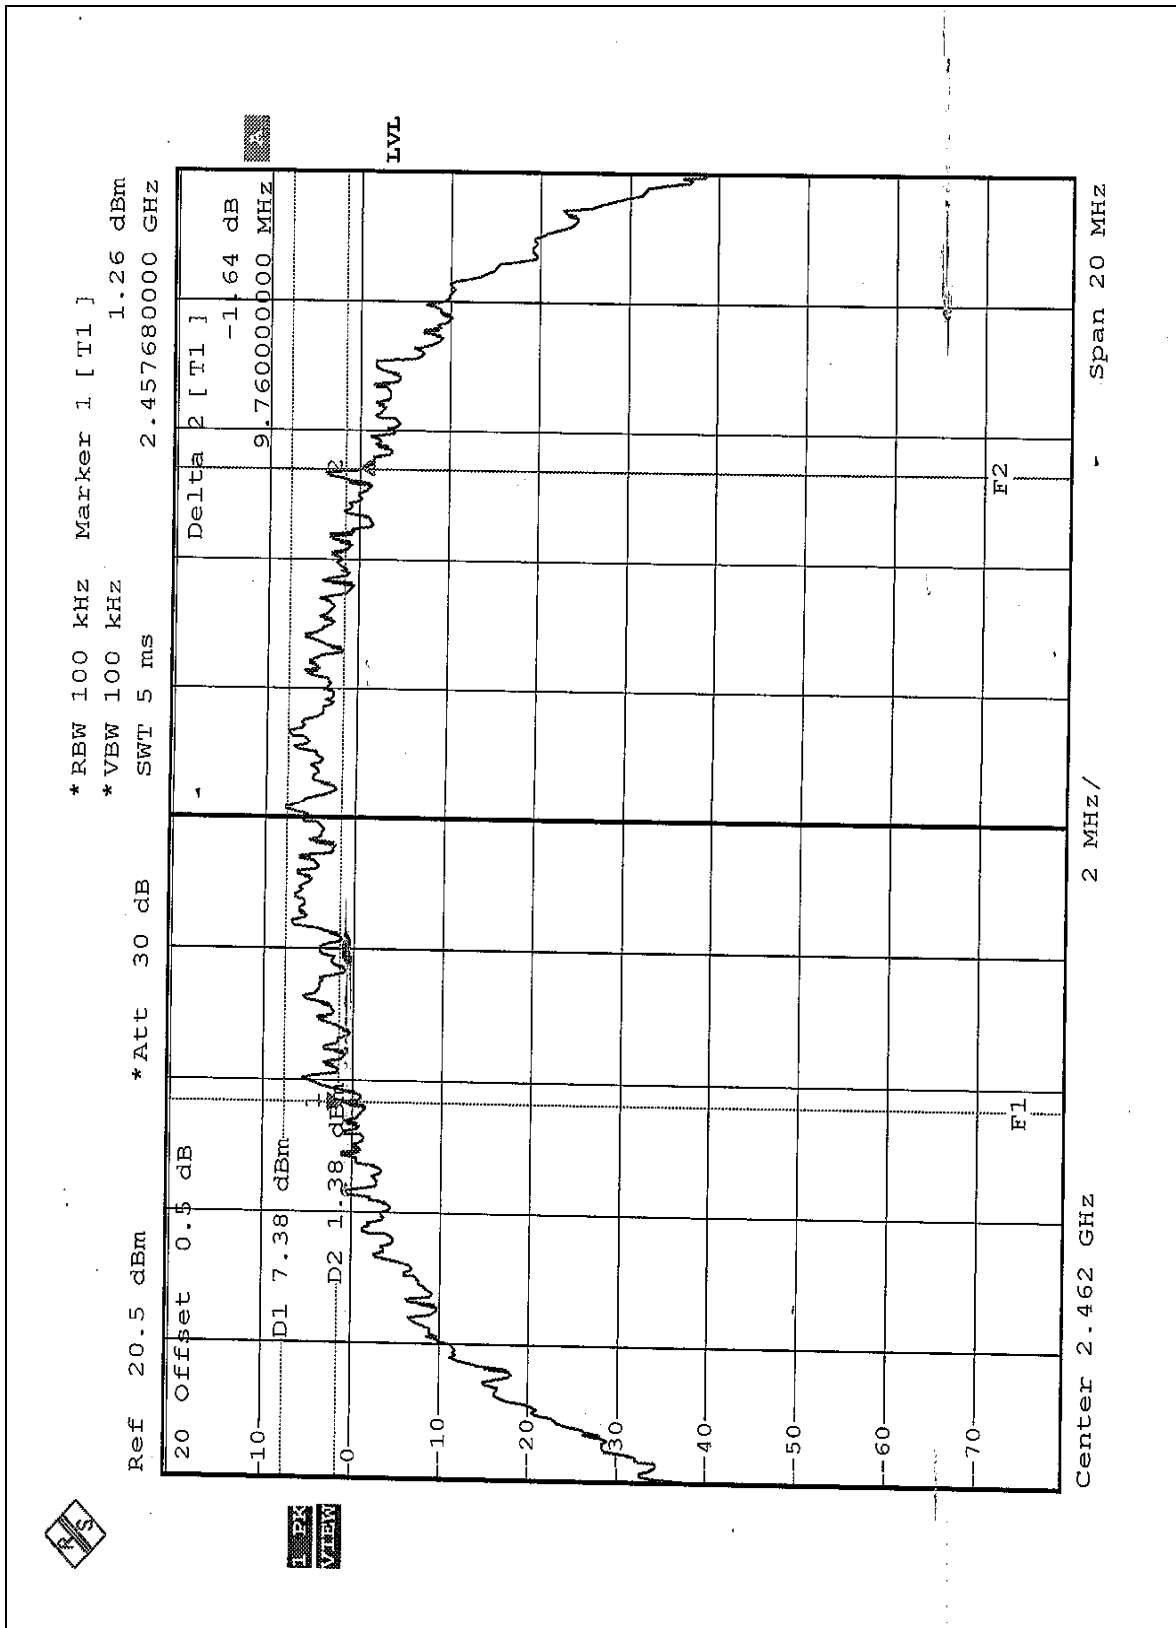



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

EUT	Wireless Access Bridge	MODEL	SF-3000
MODE	1	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991hPa	TESTED BY : Ansen Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20	30	PASS
6	2437	20	30	PASS
11	2462	20	30	PASS

EUT	Wireless Access Bridge	MODEL	SF-3000
MODE	2	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991hPa	TESTED BY : Ansen Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20	29	PASS
6	2437	20	29	PASS
11	2462	20	29	PASS

Note: According to 15.247(b)(3), the maximum antenna 9dBi is higher than 6dBi, so the limit of peak power should be reduced by 1 dB.



EUT	Wireless Access Bridge	MODEL	SF-3000
MODE	3	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991hPa	TESTED BY : Ansen Lei	

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	20	28	PASS
6	2437	20	28	PASS
11	2462	20	28	PASS

Note: According to 15.247(b)(3), the maximum antenna 12dBi is higher than 6dBi, so the limit of peak power should be reduced by 2 dB.

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS

EUT	Wireless Access Bridge	MODEL	SF-3000
ENVIRONMENTAL CONDITIONS	28deg. C, 60%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY: Ansen Lei			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.98	8	PASS
6	2437	-7.58	8	PASS
11	2462	-7.78	8	PASS




CH1

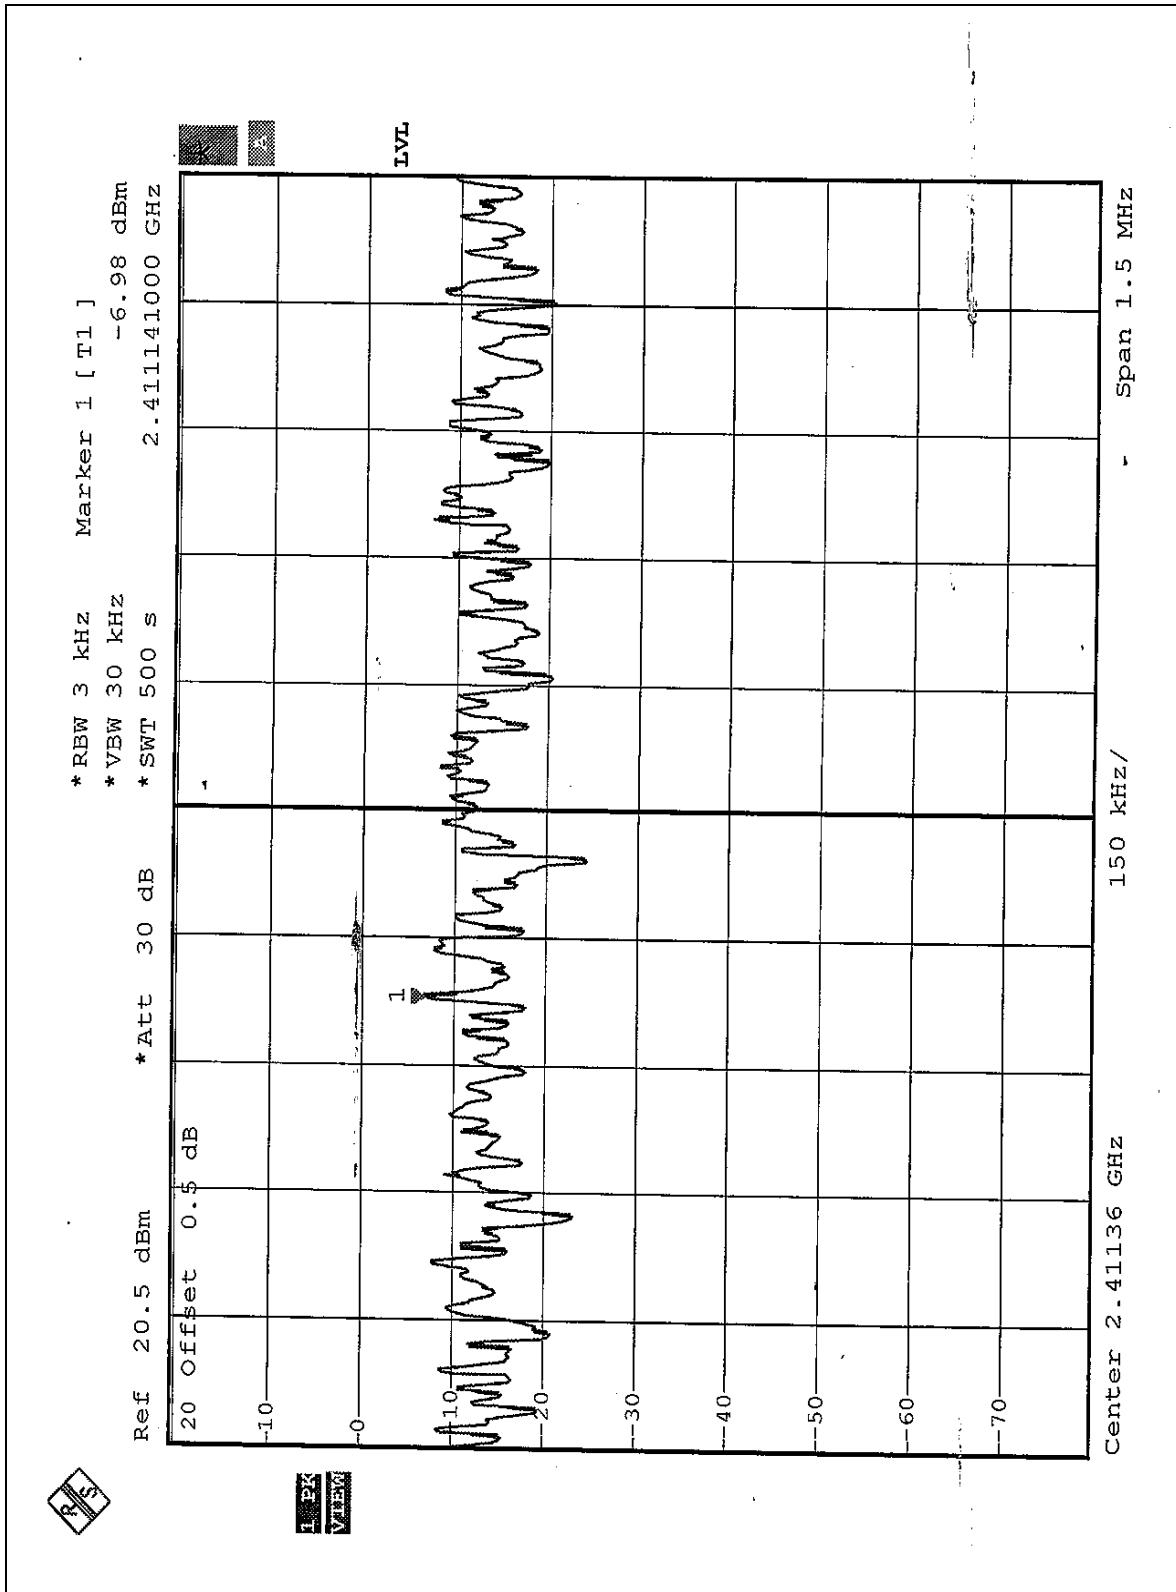




CH6

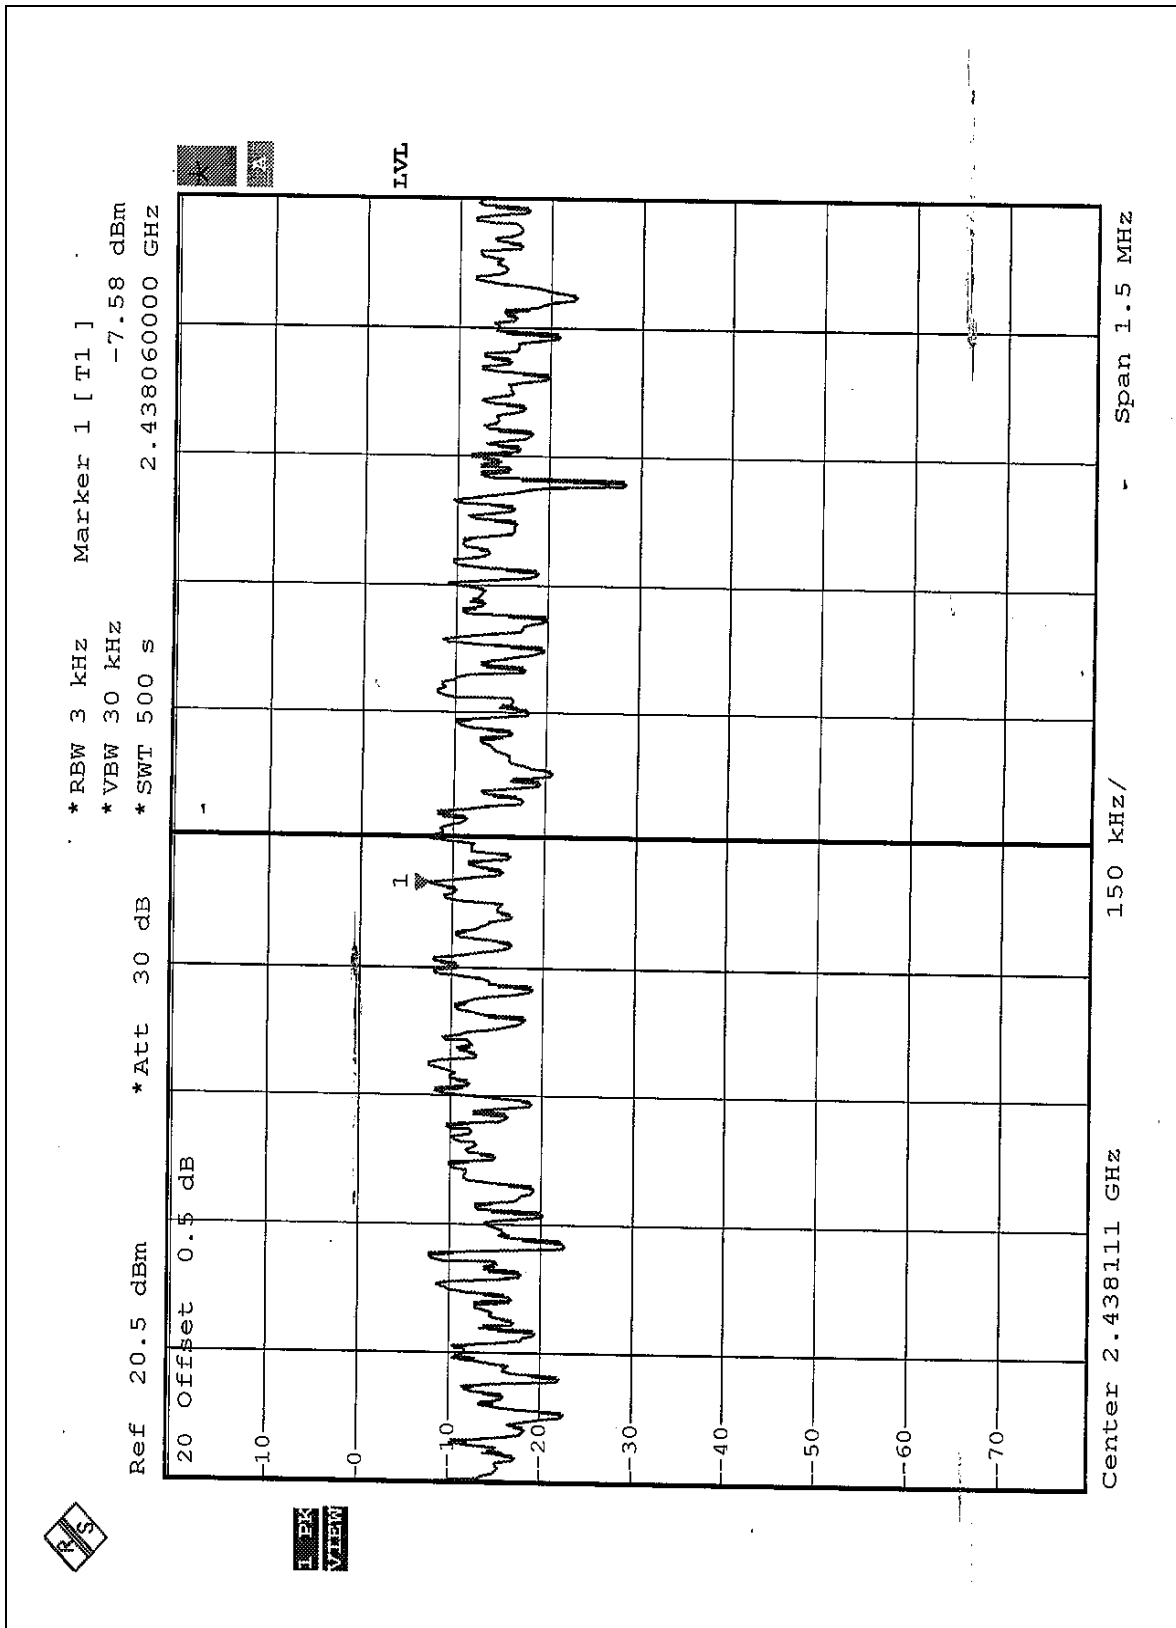

CH11

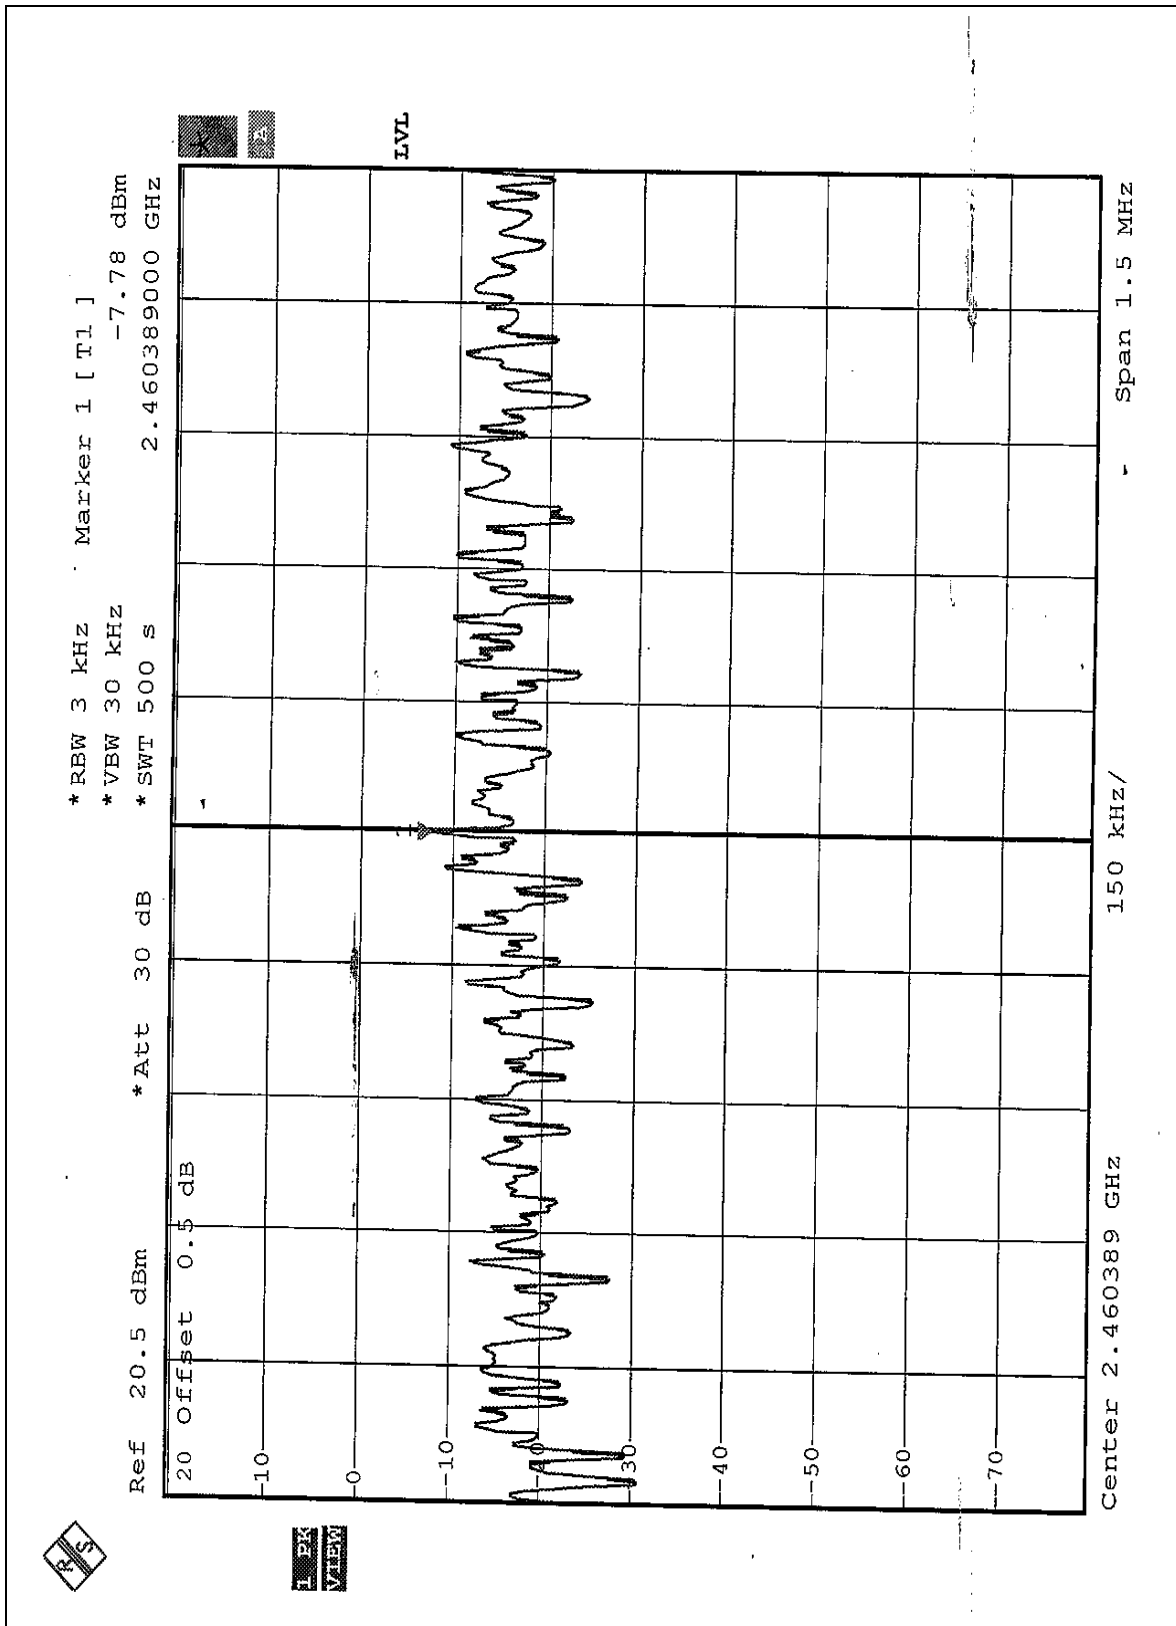

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE1:

The band edge emission plot on the following two pages show 59.74dB delta between carrier maximum power and local maximum emission in restrict band (2.3706GHz). The emission of carrier strength list in the test result of mode 1 of channel 1 at the item 4.2.7 is 107.45dBuV/m, so the maximum field strength in restrict band is $107.45 - 59.74 = 47.71\text{dBuV/m}$ which is under 54dBuV/m limit.

The band edge emission plot on the following two pages show 61.58dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of mode 1 of channel 11 at the item 4.2.7 is 104.26dBuV/m and , so the maximum field strength in restrict band is $104.26 - 61.58 = 42.68\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE2:


The band edge emission plot on the following two pages show 59.74dB delta between carrier maximum power and local maximum emission in restrict band (2.3706GHz). The emission of carrier strength list in the test result of mode 2 of channel 1 at the item 4.2.7 is 112.70dBuV/m, so the maximum field strength in restrict band is $112.70 - 59.74 = 52.96\text{dBuV/m}$ which is under 54dBuV/m limit.


The band edge emission plot on the following two pages show 61.58dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of mode 2 of channel 11 at the item 4.2.7 is 113.45dBuV/m, so the maximum field strength in restrict band is $113.45 - 61.58 = 51.87\text{dBuV/m}$ which is under 54dBuV/m limit.

**NOTE3:**

The band edge emission plot on the following two pages show 59.74dB delta between carrier maximum power and local maximum emission in restrict band (2.3706GHz). The emission of carrier strength list in the test result of mode 3 of channel 1 at the item 4.2.7 is 112.11dBuV/m, so the maximum field strength in restrict band is $112.11 - 59.74 = 52.37\text{dBuV/m}$ which is under 54dBuV/m limit.

The band edge emission plot on the following two pages show 61.58dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of mode 3 of channel 11 at the item 4.2.7 is 112.17dBuV/m, so the maximum field strength in restrict band is $112.17 - 61.58 = 50.59\text{dBuV/m}$ which is under 54dBuV/m limit.

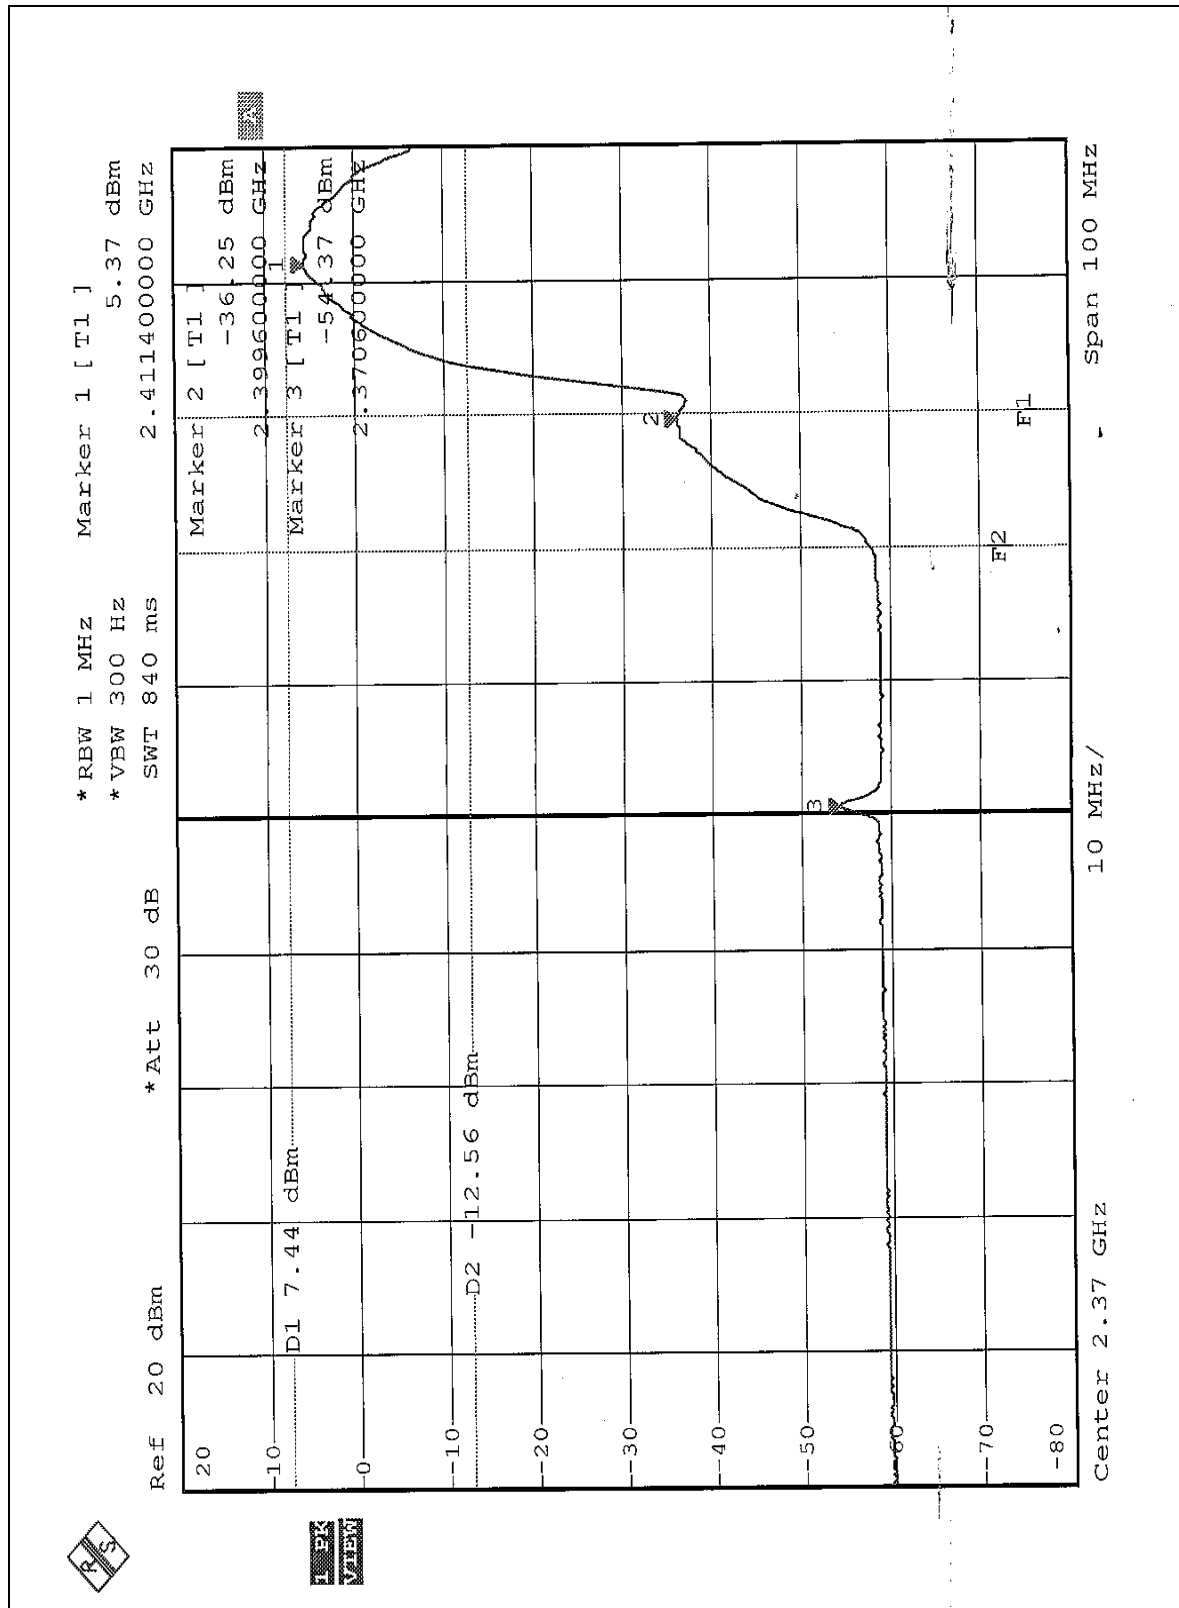

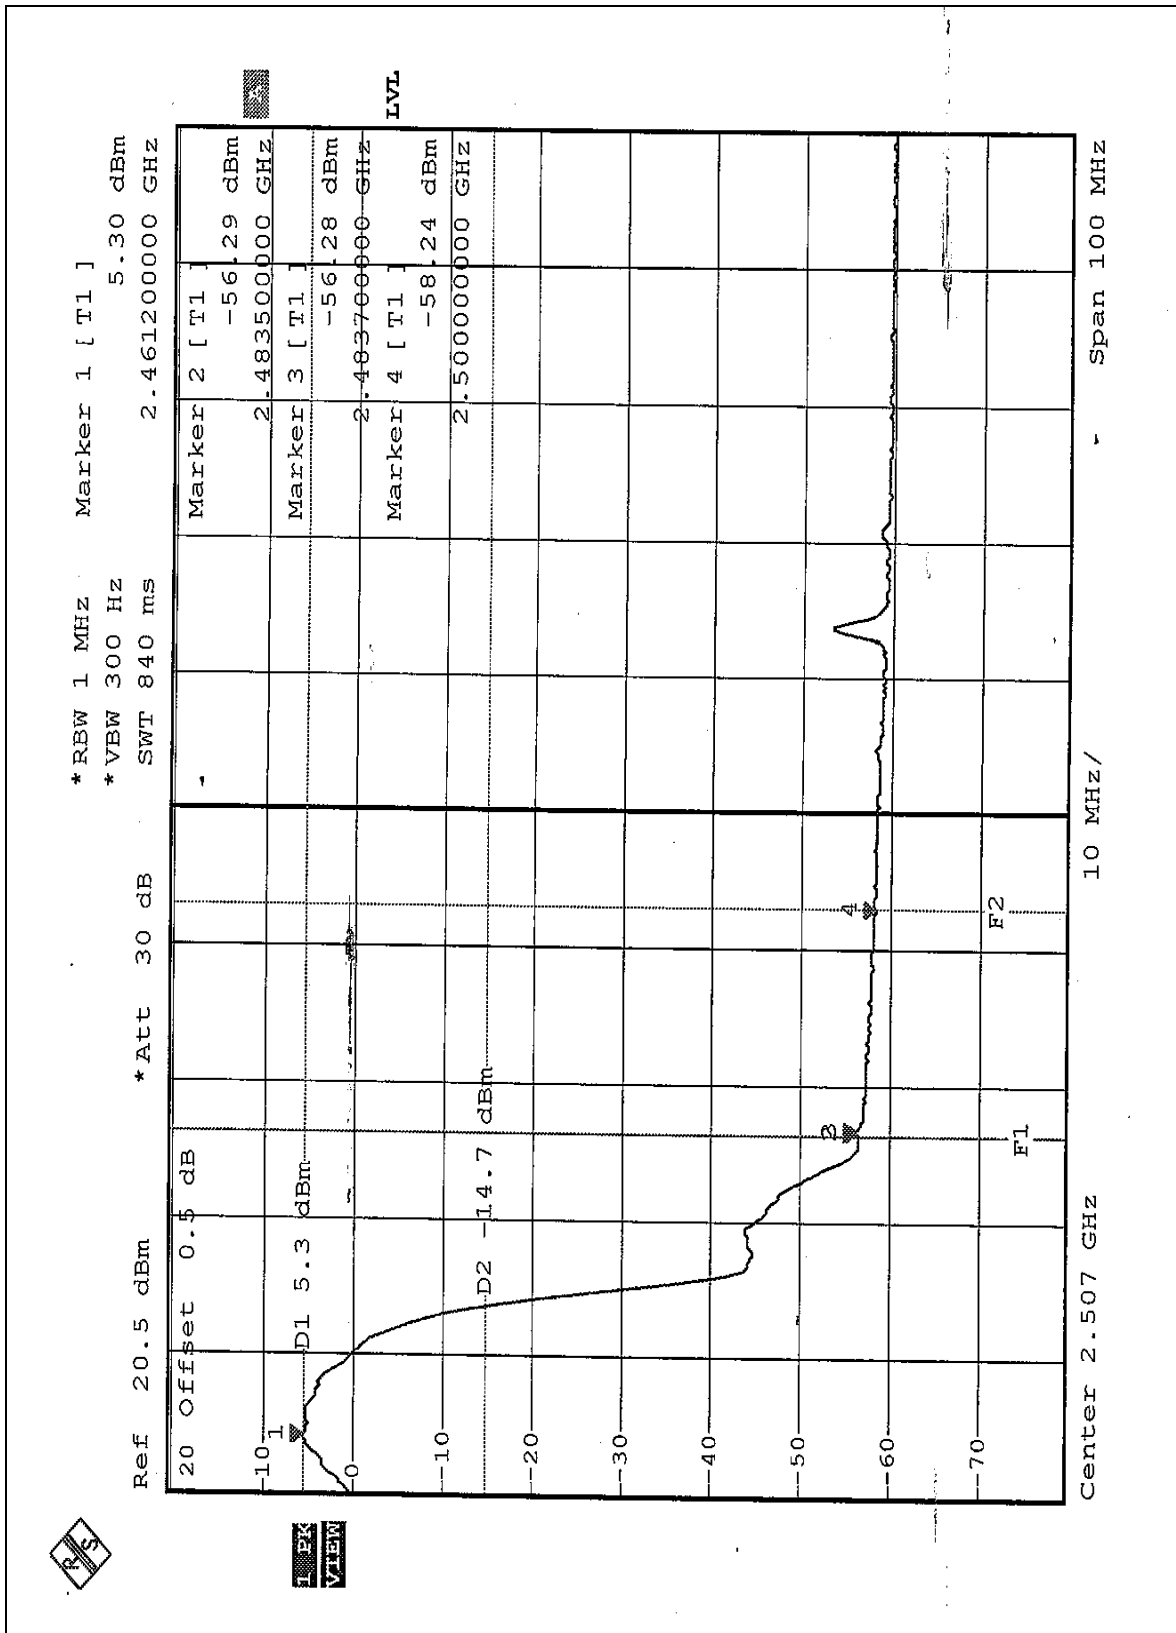



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna type used in this product is Patch Antenna with Reverse SMA antenna connector. The maximum Gain of this antenna is 12dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

(For Mode 1)



(For Mode 2)



(For Mode 3)



RADIATED EMISSION TEST (For Mode 1)



(For Mode 2)



(For Mode 3)





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.