


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |          |                |               |
|---------------|----------|----------------|---------------|
| Temperature   | 25°C     | Humidity       | 55%           |
| Test Engineer | Roki Liu | Configurations | 2.4GHz + 5GHz |

### Horizontal

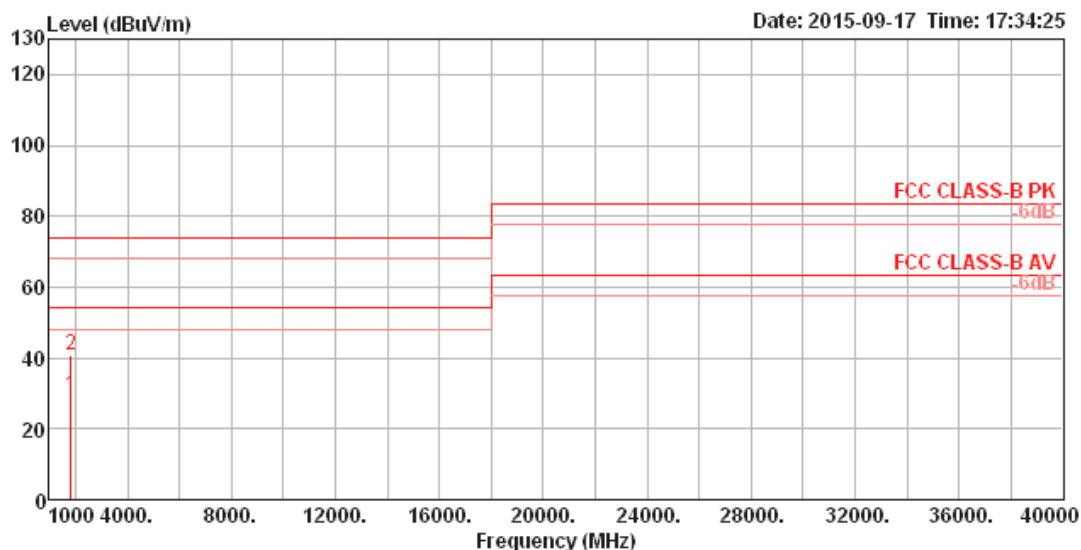

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Pol/Phase  | Remark  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|------------|---------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | cm    | deg   |            |         |
| 1 | 1839.90 | 29.38  | 54.00  | -24.62 | 33.82 | 3.16  | 27.53   | 35.13  | 100   | 24    | HORIZONTAL | Average |
| 2 | 1841.22 | 40.62  | 74.00  | -33.38 | 45.06 | 3.16  | 27.53   | 35.13  | 100   | 24    | HORIZONTAL | Peak    |

## Vertical

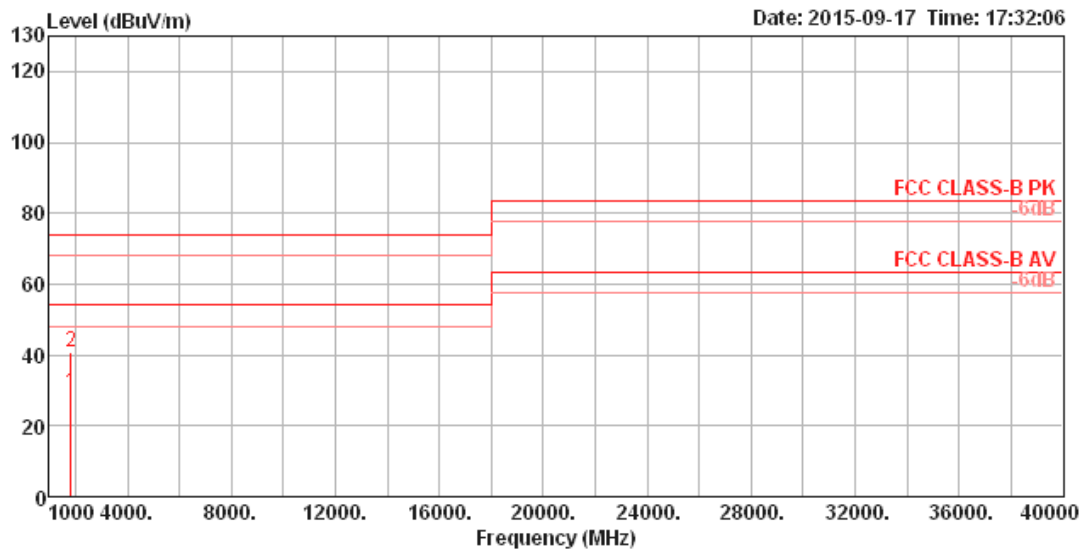

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | A/Pos | T/Pos | Pol/Phase | Remark           |
|---|---------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-----------|------------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | cm    | deg       |                  |
| 1 | 1840.00 | 29.08  | 54.00      | -24.92     | 33.52      | 3.16              | 27.53         | 35.13 | 179   | 147       | VERTICAL Average |
| 2 | 1842.23 | 40.95  | 74.00      | -33.05     | 45.39      | 3.16              | 27.53         | 35.13 | 179   | 147       | VERTICAL Peak    |