

Test Plot 1#: GSM 850 Mid ANT0 Head Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 40.402$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0462 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.887 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0455 W/kg

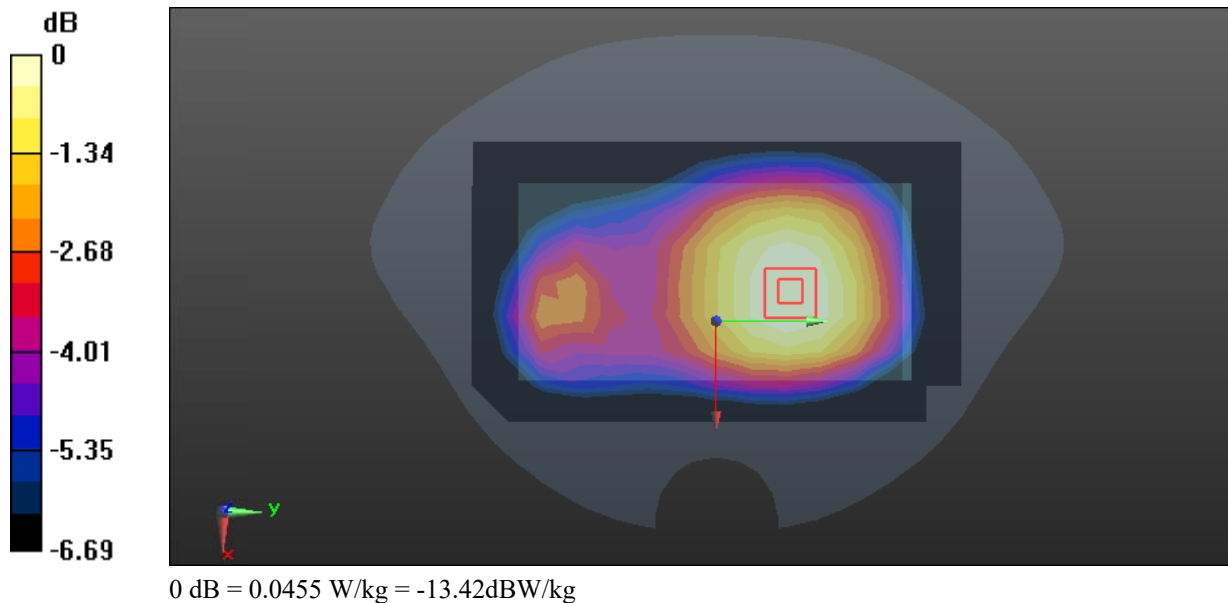

Test Plot 2#: GSM 850 Mid ANT0 Body Left**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GPRS-2 slots (0); Frequency:836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 40.402$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0824 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.665 V/m; Power Drift =0.01dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0848 W/kg

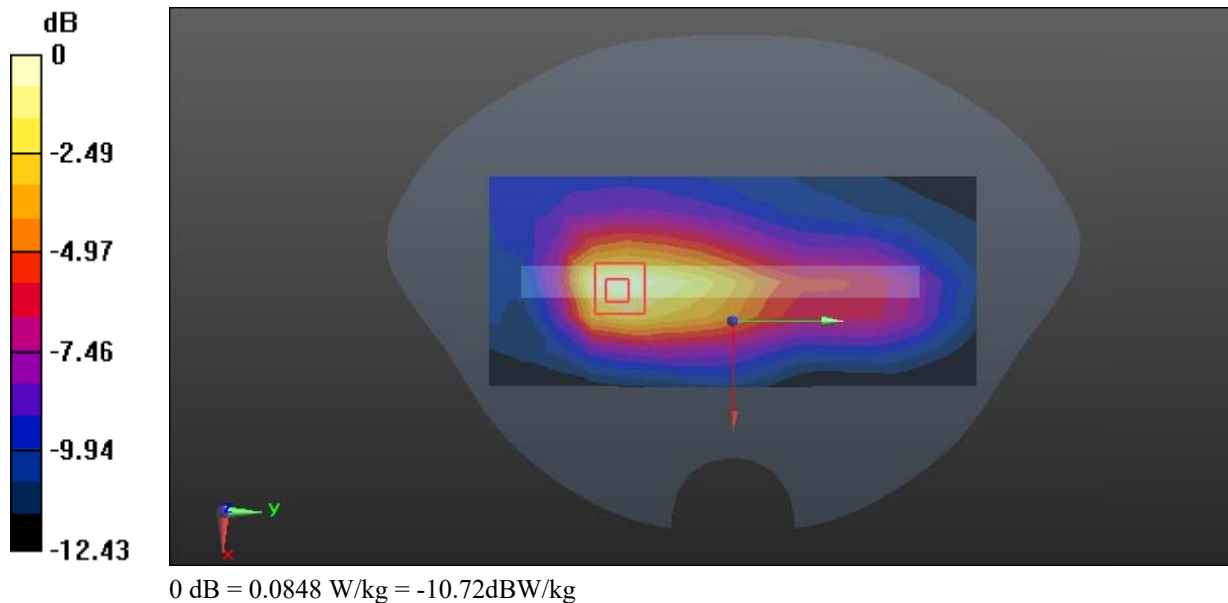

Test Plot 3#: GSM 850 Mid ANT1 Head Right Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GSM (0); Frequency:836.6MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 40.436$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.831 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.13 V/m; Power Drift =0.19dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 0.816 W/kg

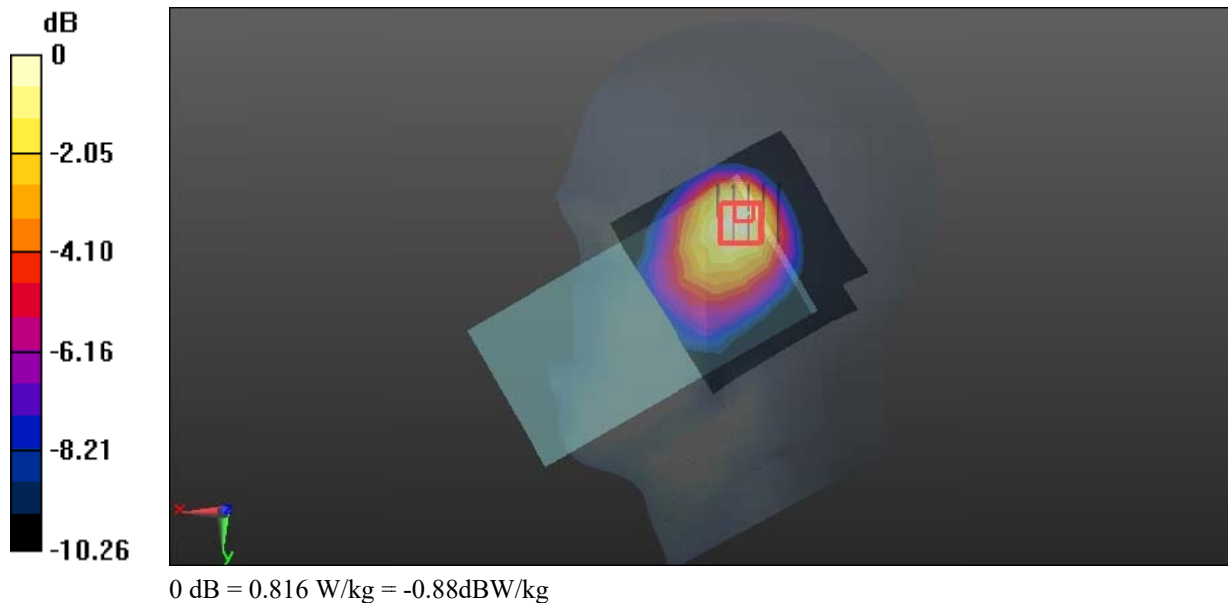

Test Plot 4#: GSM 850 Mid ANT1 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GPRS-2 slots (0); Frequency:836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.436$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.56 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

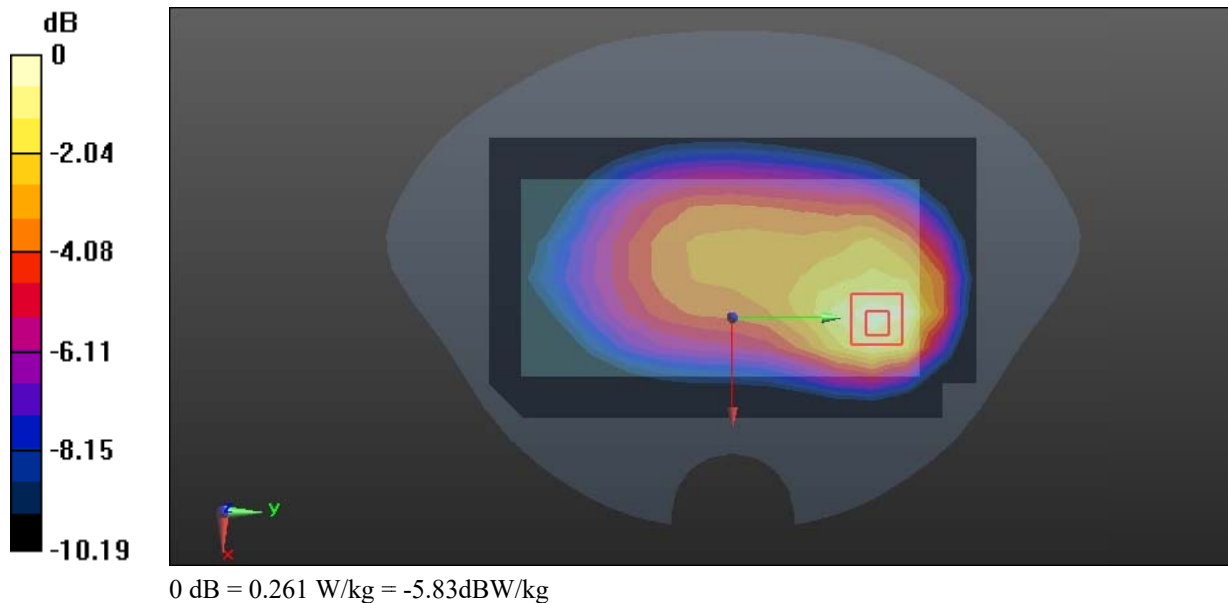

Test Plot 5#: PCS 1900 Low ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8
 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.505$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1850.2 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.916 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.98 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

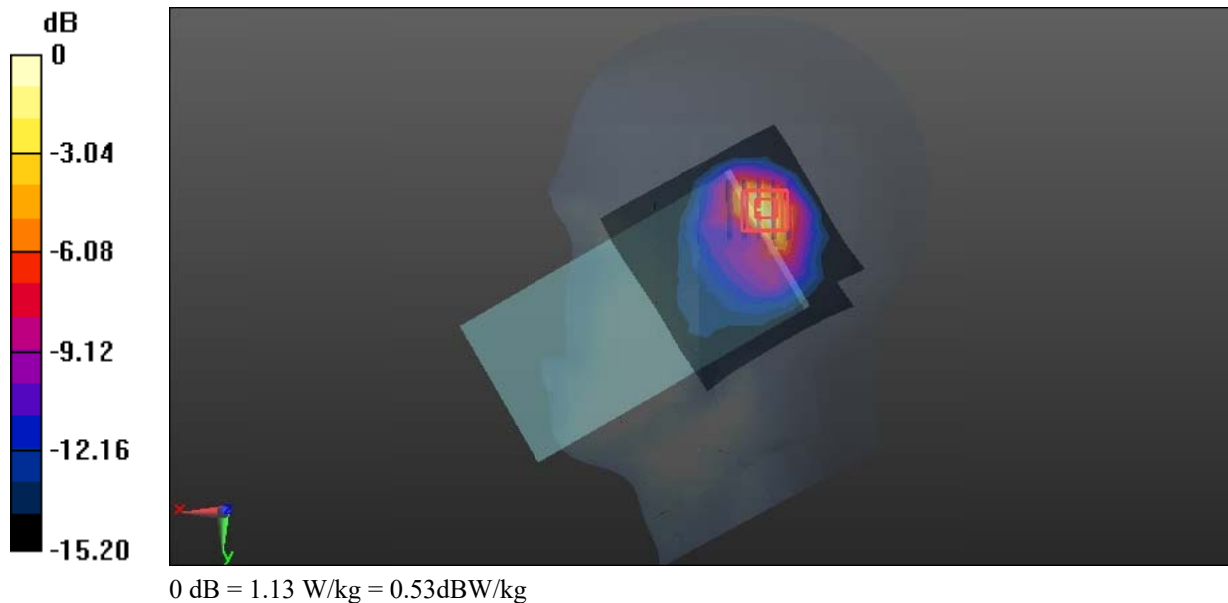

Test Plot 6#: PCS 1900 Low ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.505$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1850.2 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.17 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.49 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.515 W/kg

Maximum value of SAR (measured) = 1.23 W/kg

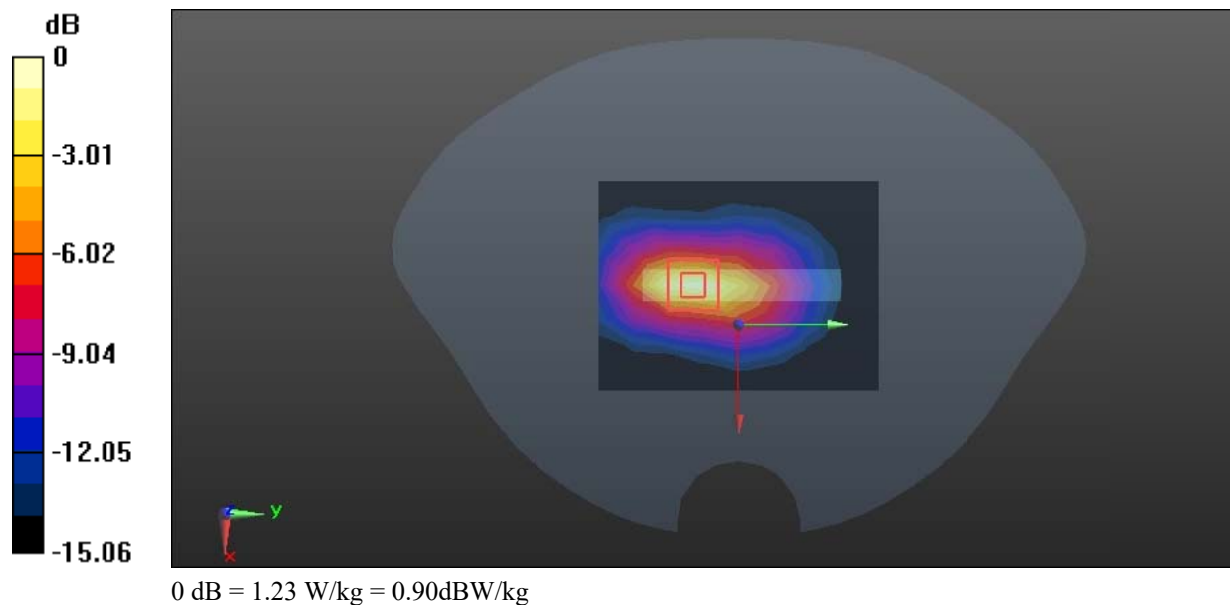

Test Plot 7#: WCDMA Band 2 Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.201$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (4x8x1):Measurement grid: dx=30mm, dy=30mm

Maximum value of SAR (measured) = 0.0249 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.509 V/m; Power Drift =0.16dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0253 W/kg

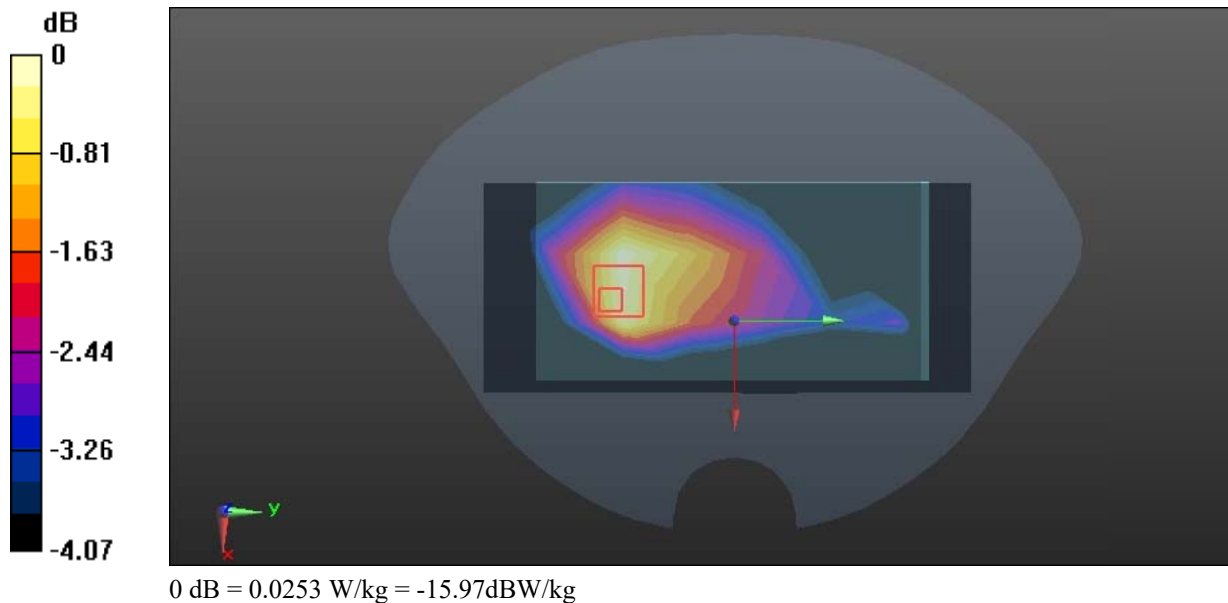

Test Plot 8#: WCDMA Band 2 Mid ANT0 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.201$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.281 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.235 V/m; Power Drift =0.19dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.307 W/kg

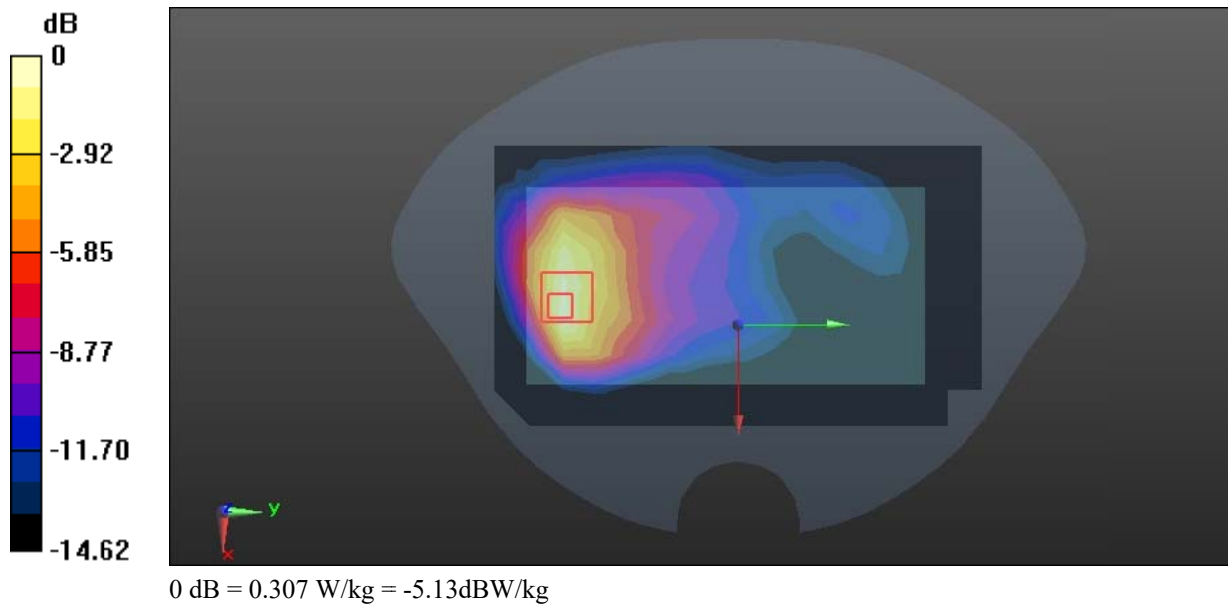

Test Plot 9#: WCDMA Band 2 High ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency:1907.6MHz; Duty Cycle: 1:1

Medium parameters used: $f=1907.6$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r=39.099$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1907.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.00 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.17 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.806 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

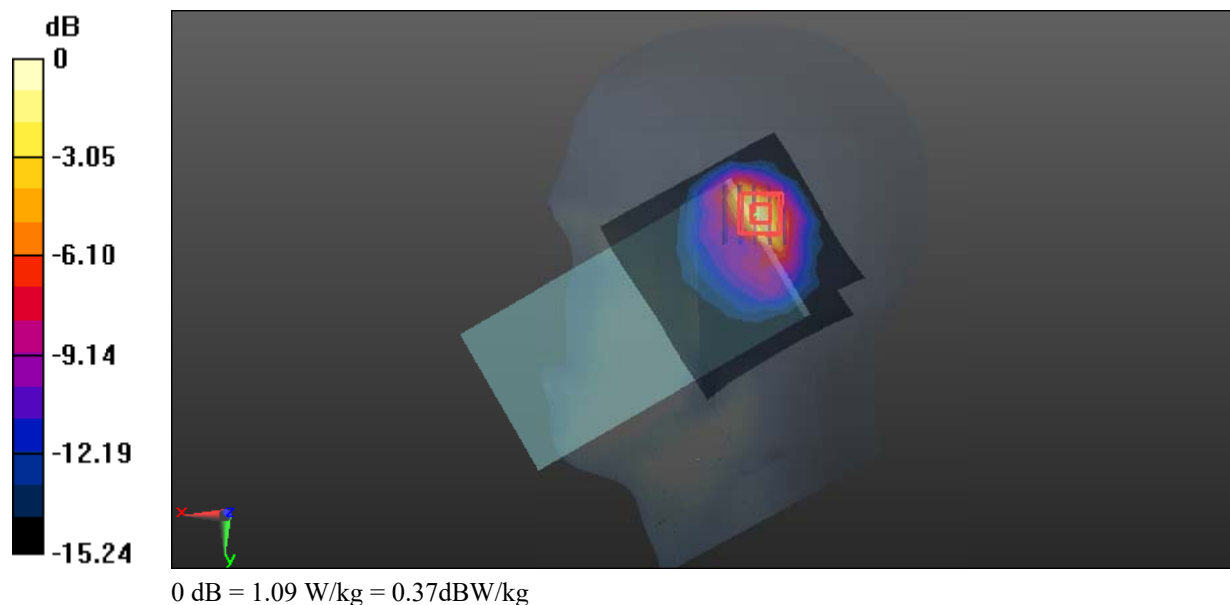

Test Plot 10#: WCDMA Band 2 Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.222$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.257 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.66 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

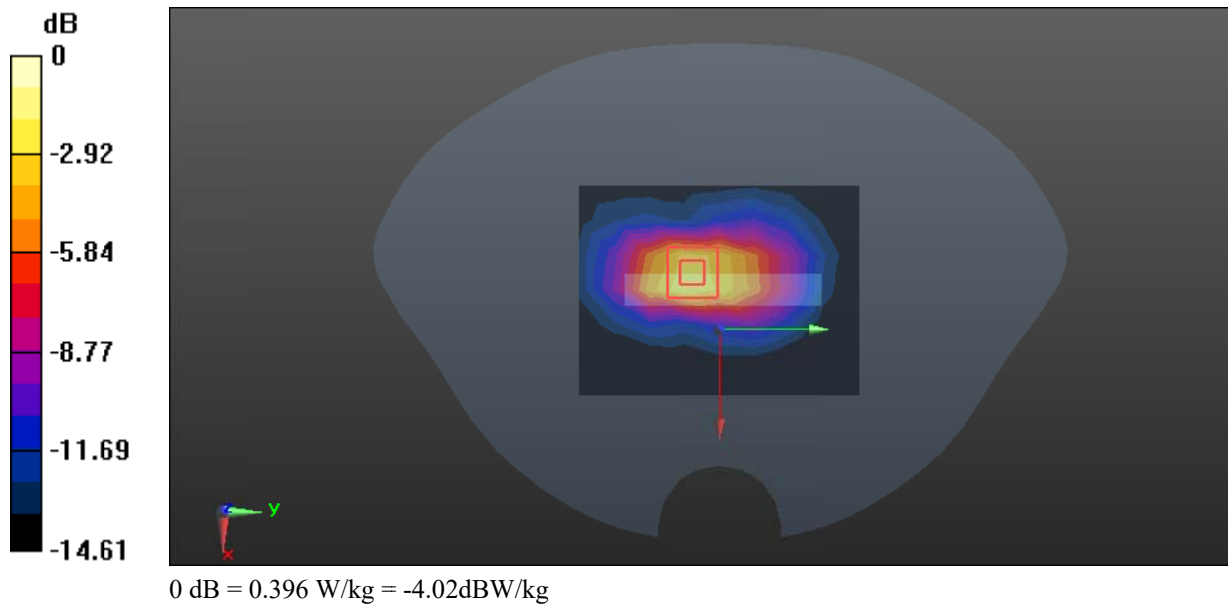

Test Plot 11#: WCDMA Band 4 Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0128 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.603 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00958 W/kg

Maximum value of SAR (measured) = 0.0128 W/kg

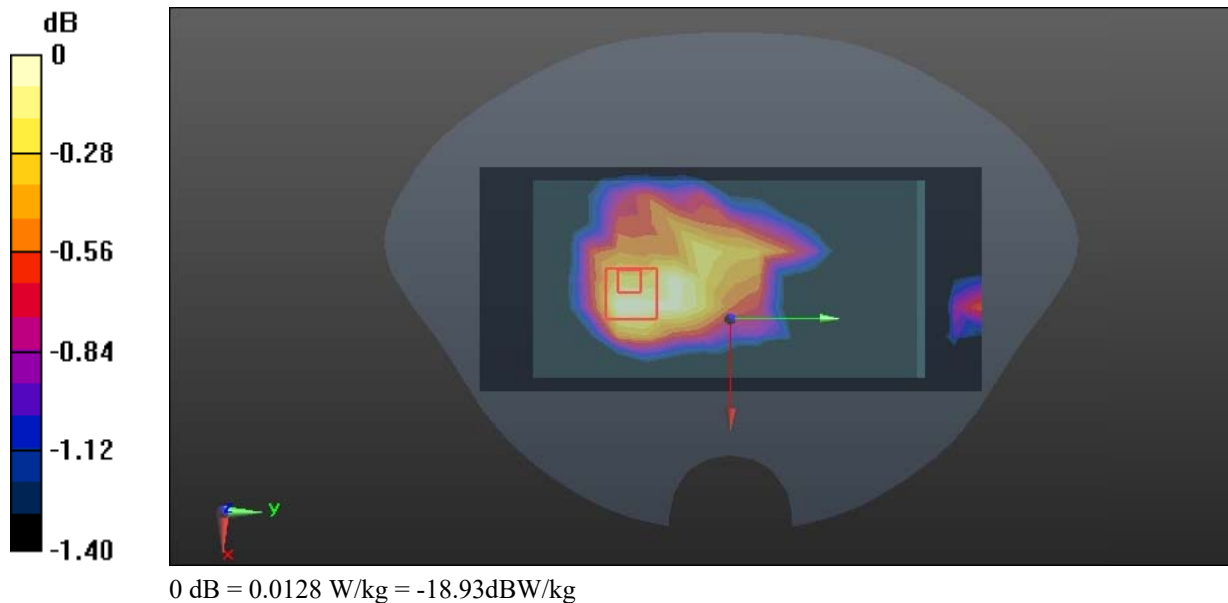

Test Plot 12#: WCDMA Band 4 Mid ANT0 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.112 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.044 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

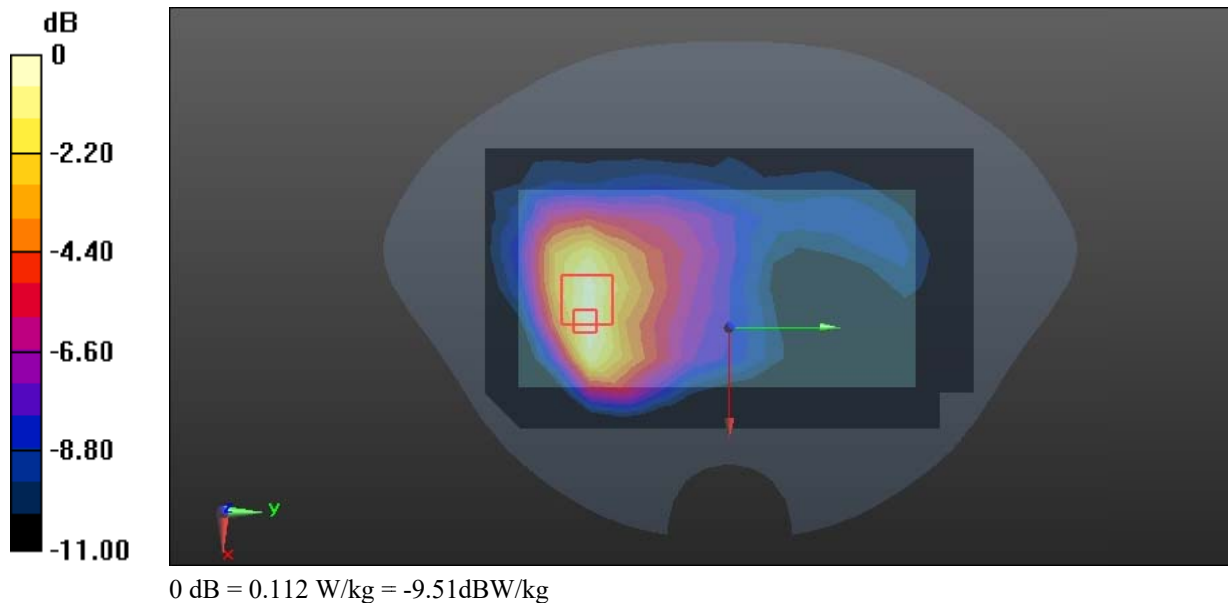

Test Plot 13#: WCDMA Band 4 Mid ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.896 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.58 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.934 W/kg

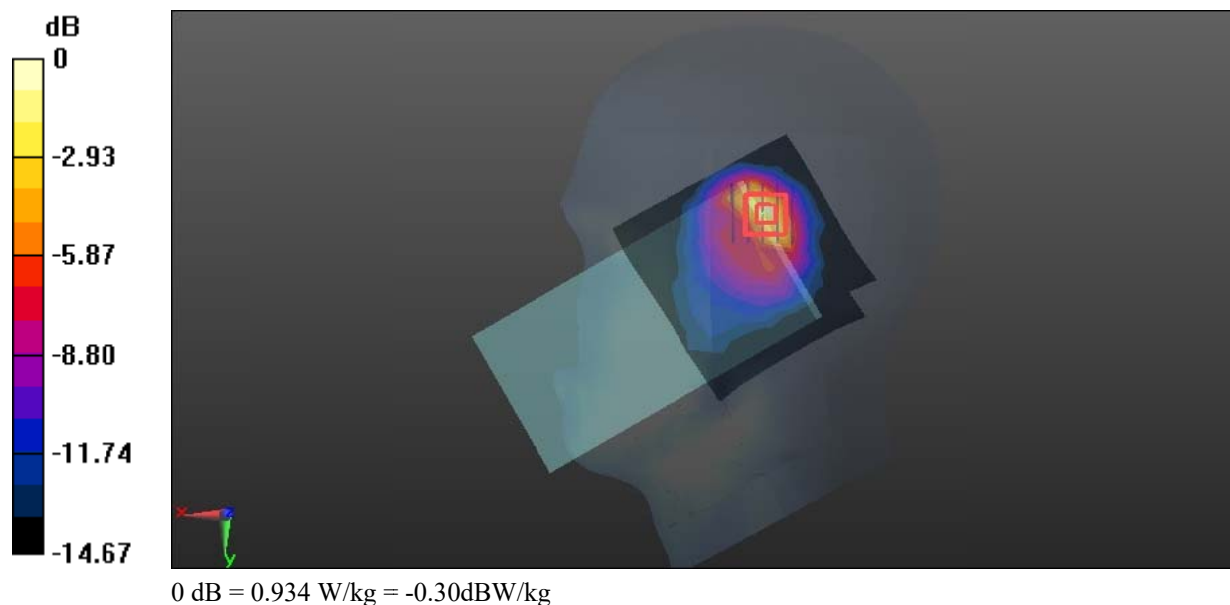

Test Plot 14#: WCDMA Band 4 Mid ANT1 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.198 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.264 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

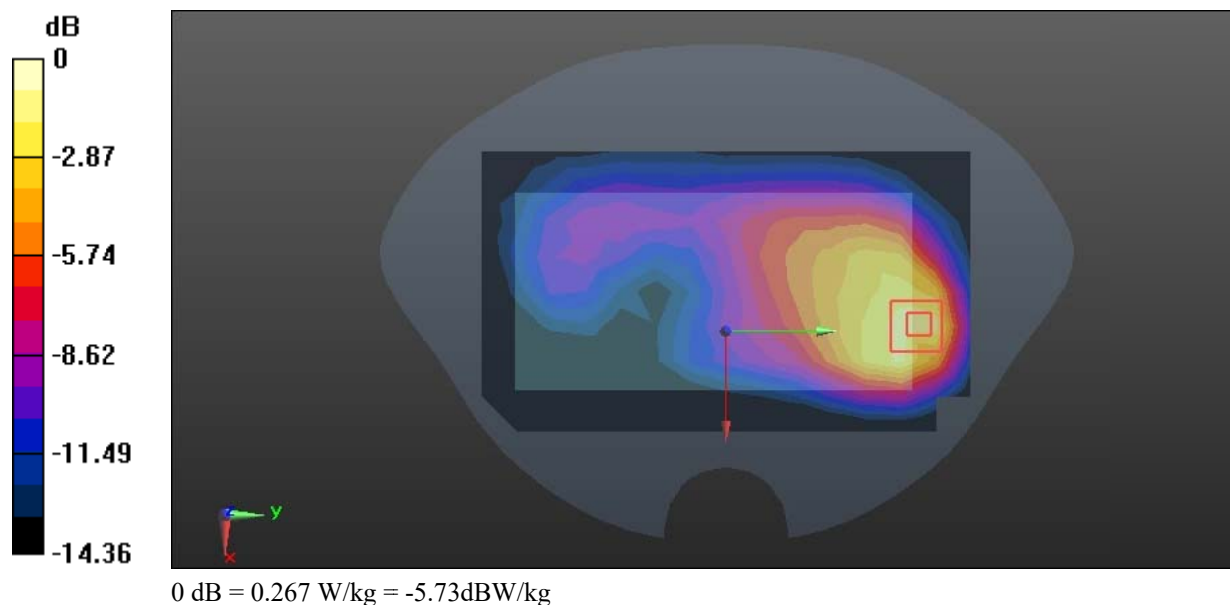

Test Plot 15#: WCDMA Band 5 Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 40.402$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x19x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0591 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.860 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0586 W/kg

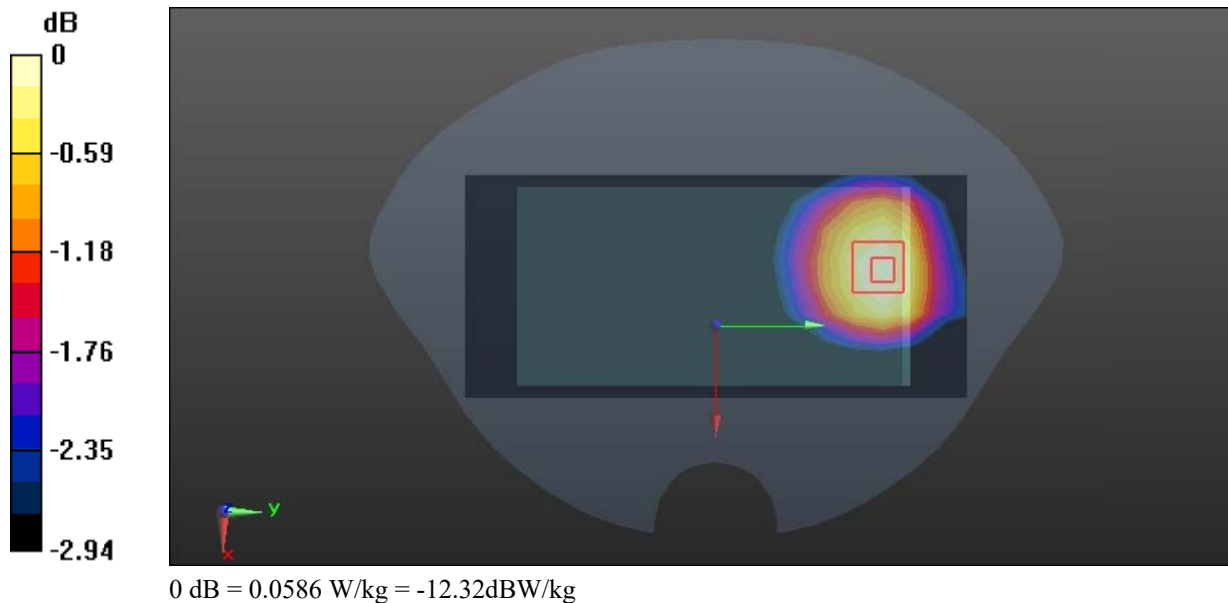

Test Plot 16#: WCDMA Band 5 Mid ANT0 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1

Medium parameters used: $f=836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r=40.402$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.736 V/m; Power Drift =0.12dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.340 W/kg

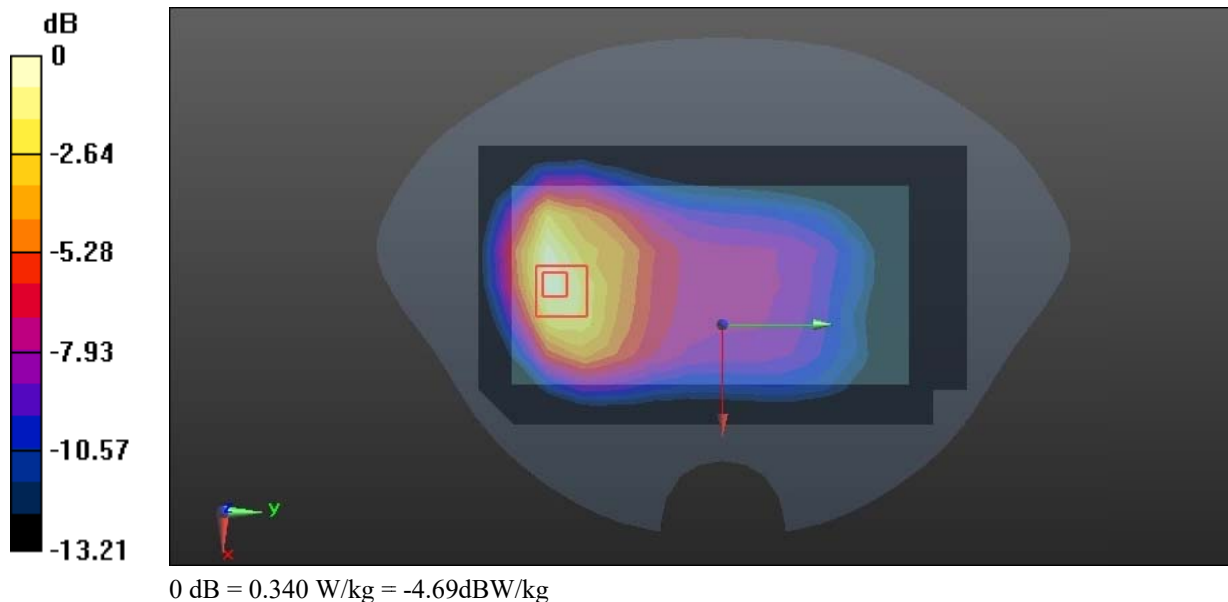

Test Plot 17#: WCDMA Band 5 Mid ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 40.402$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.81 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.769 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (measured) = 0.942 W/kg

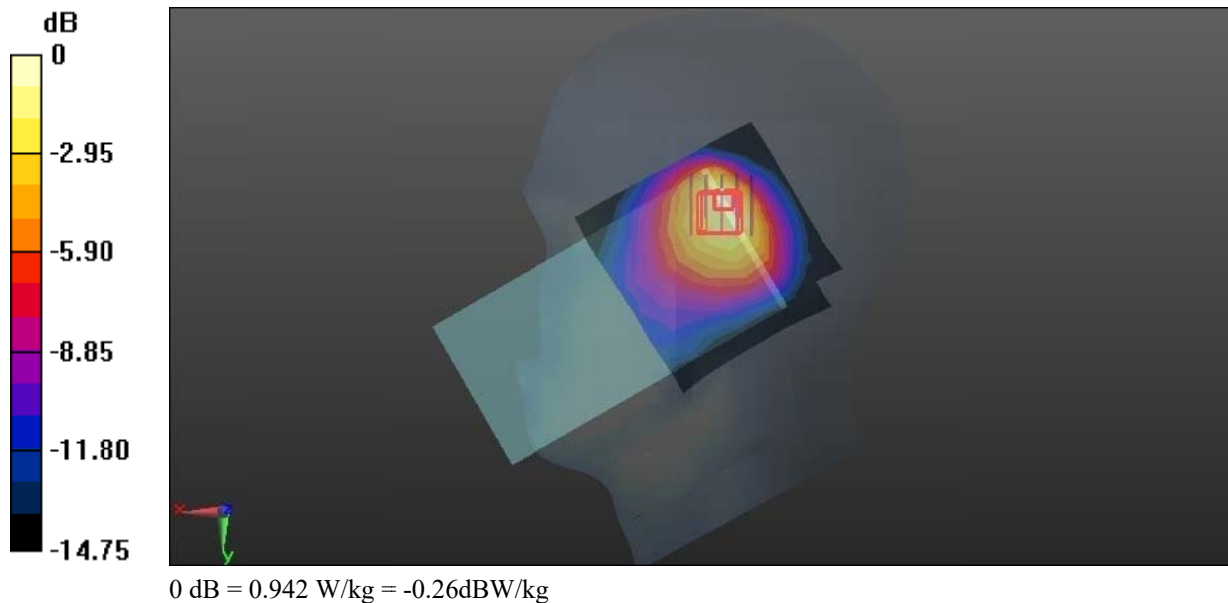

Test Plot 18#: WCDMA Band 5 Mid ANT1 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 40.402$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.408 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.96 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

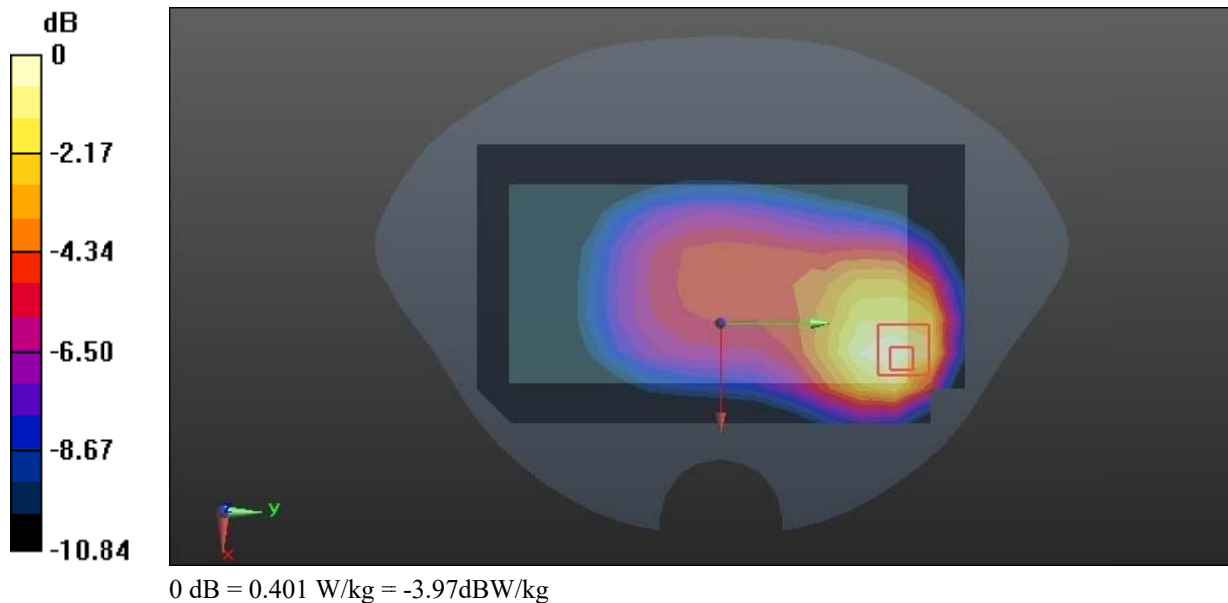

Test Plot 19#: LTE Band 2 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.222$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0292 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.021 V/m; Power Drift =0.06dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0302 W/kg

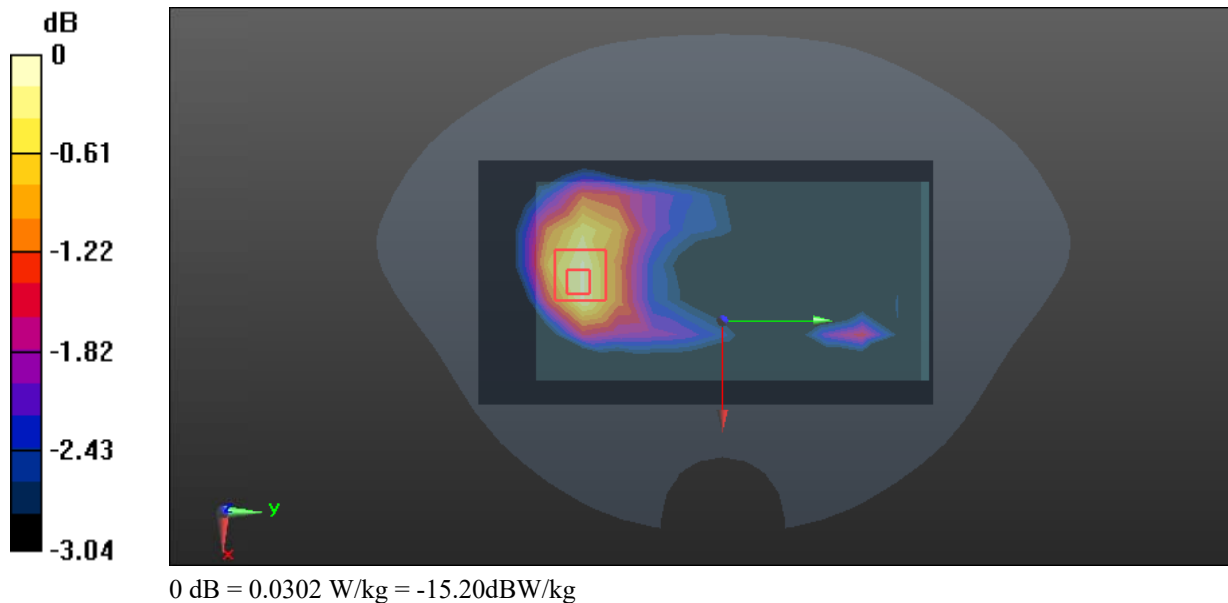

Test Plot 20#: LTE Band 2 1RB Mid ANT0 Body Bottom**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r=39.222$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0747 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.144 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0804 W/kg

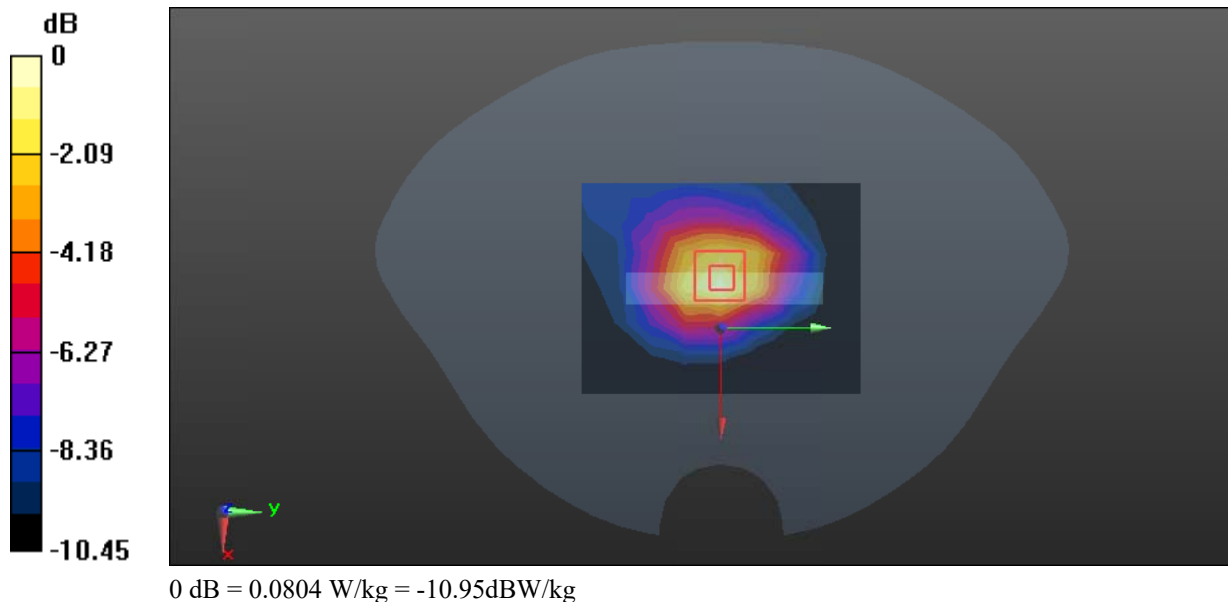

Test Plot 21#: LTE Band 2 50%RB Mid ANT1 Head Right Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1

Medium parameters used: $f=1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r=39.222$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.388 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.23 V/m; Power Drift =0.01dB

Peak SAR (extrapolated) = 0.720 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

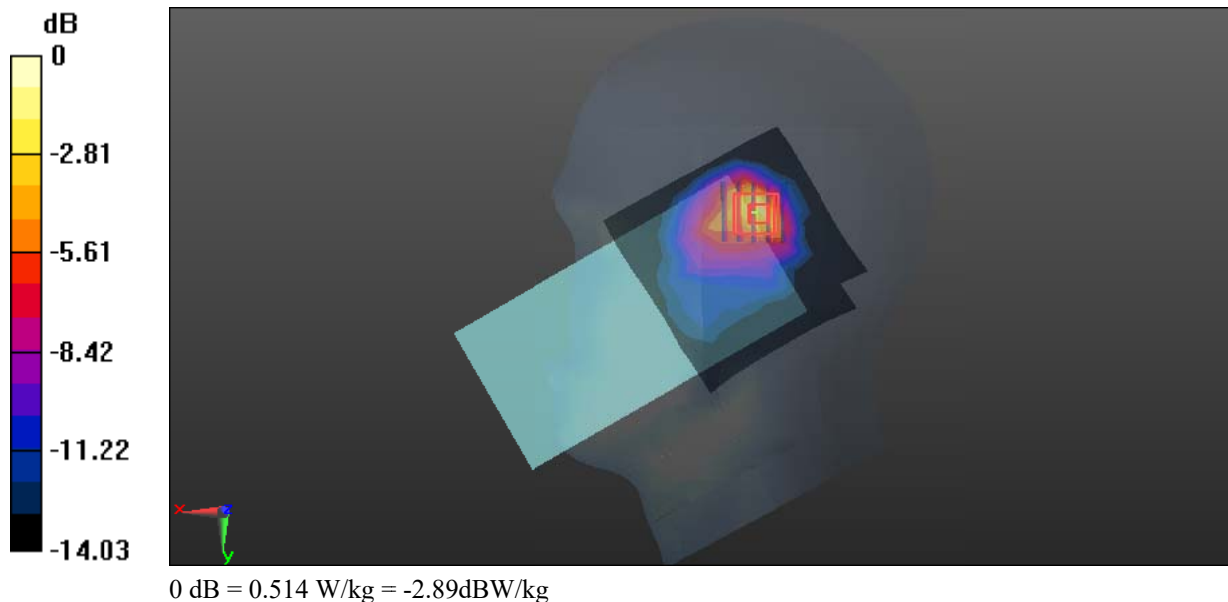

Test Plot 22#: LTE Band 2 50%RB Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:1880MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.222$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.333 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

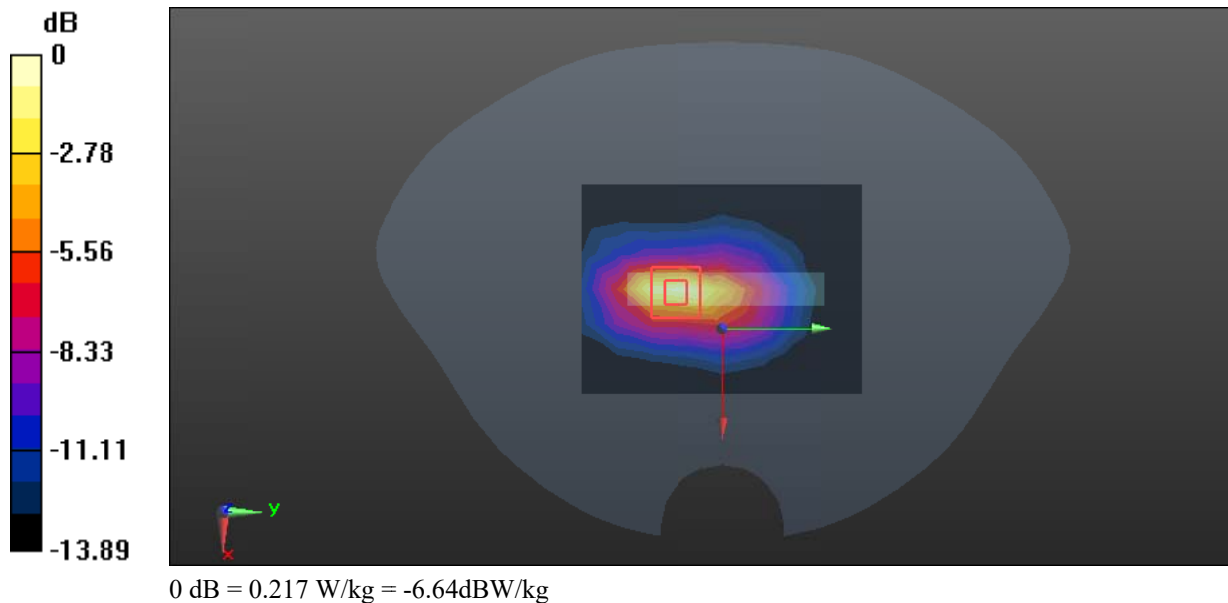

Test Plot 23#: LTE Band 5 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:836.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0887 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.421 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0891 W/kg

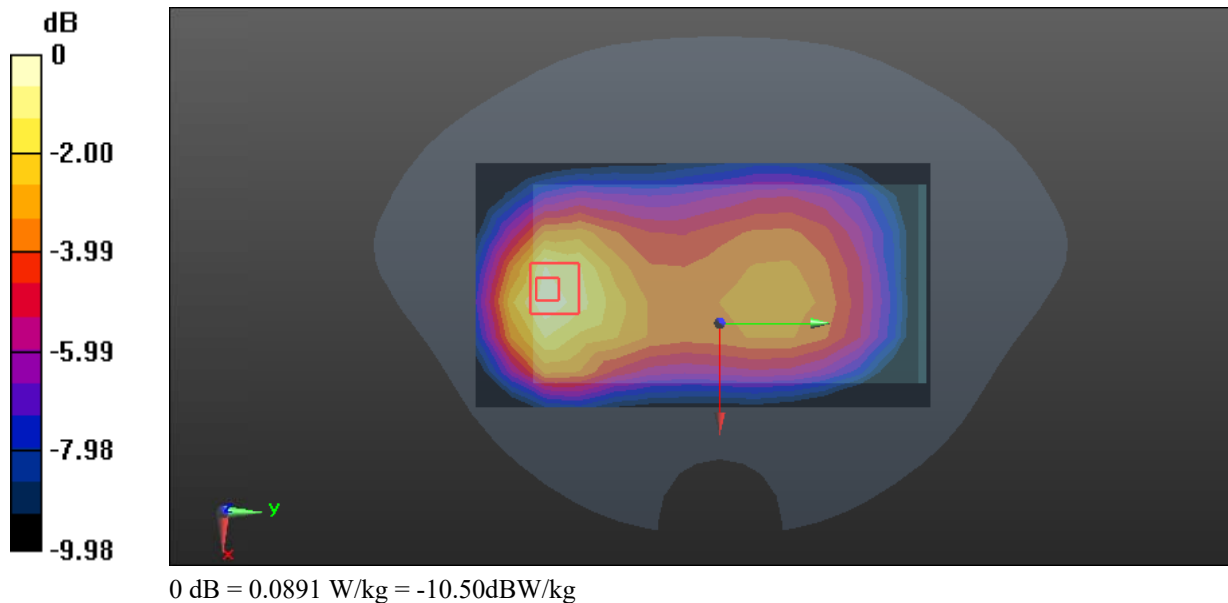

Test Plot 24#: LTE Band 5 1RB Mid ANT0 Body Left**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:836.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.140 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.22 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

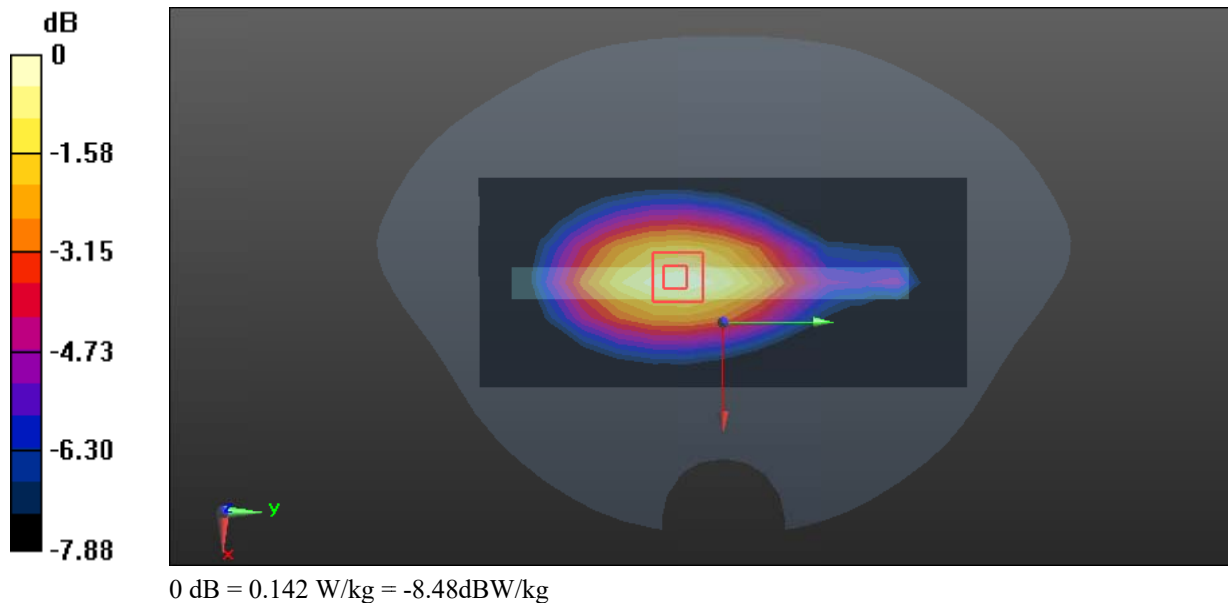

Test Plot 25#: LTE Band 5 1RB Low ANT1 Head Right Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:829MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 829$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 40.535$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 829 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.42 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.626 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

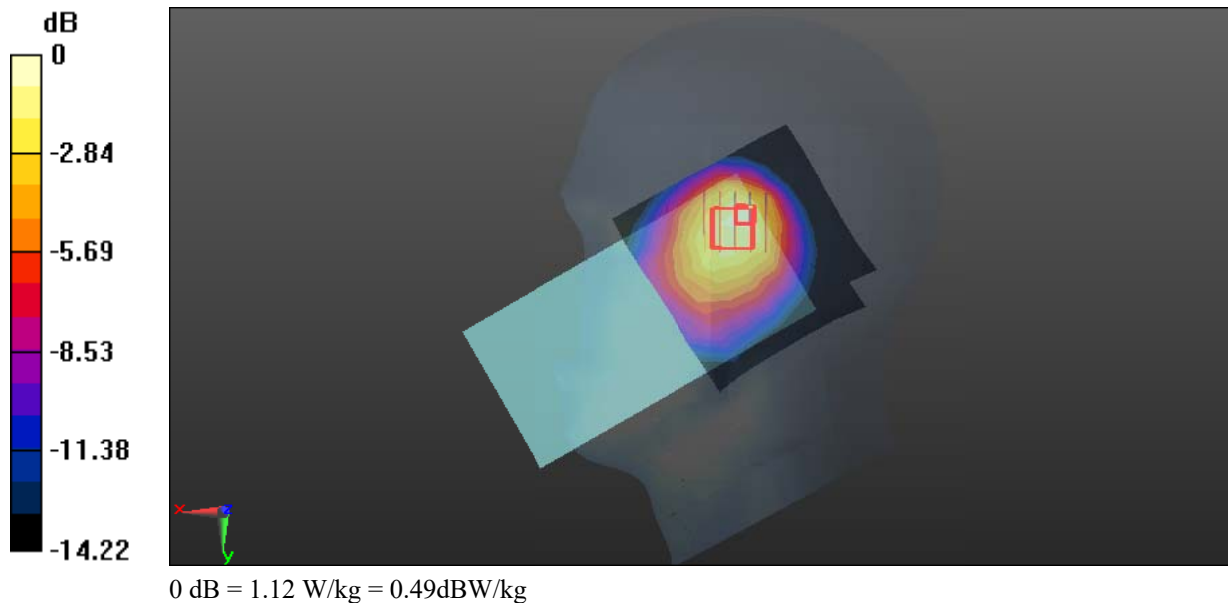

Test Plot 26#: LTE Band 5 1RB Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:836.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.437$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.187 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.41 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

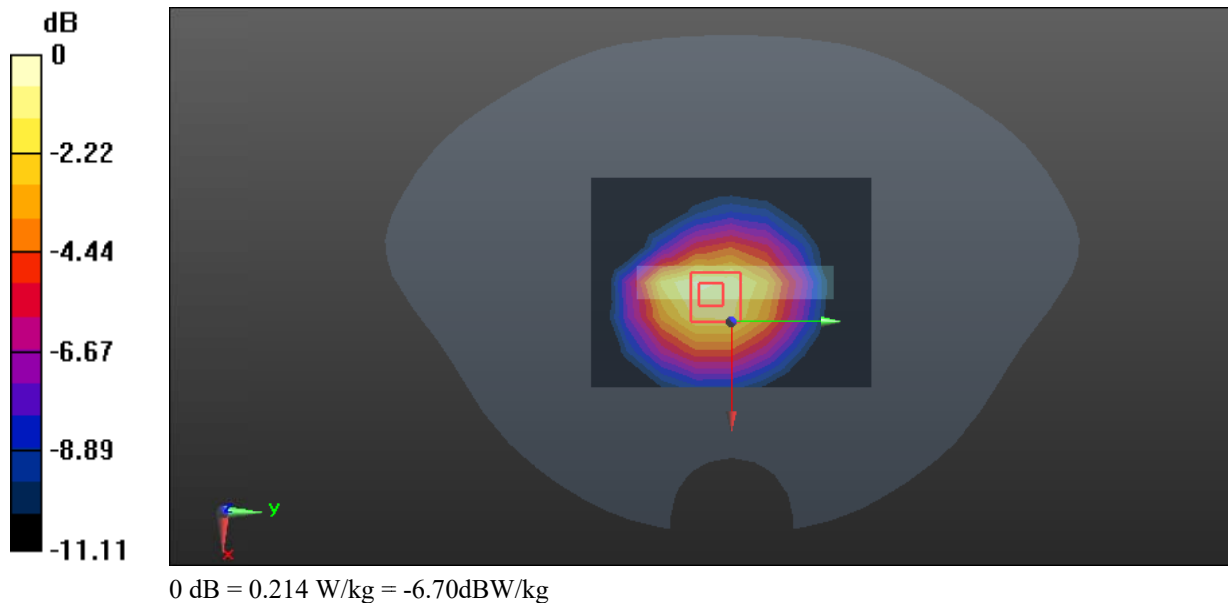

Test Plot 27#: LTE Band 7 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.285$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0747 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.391 V/m; Power Drift =0.17dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0903 W/kg

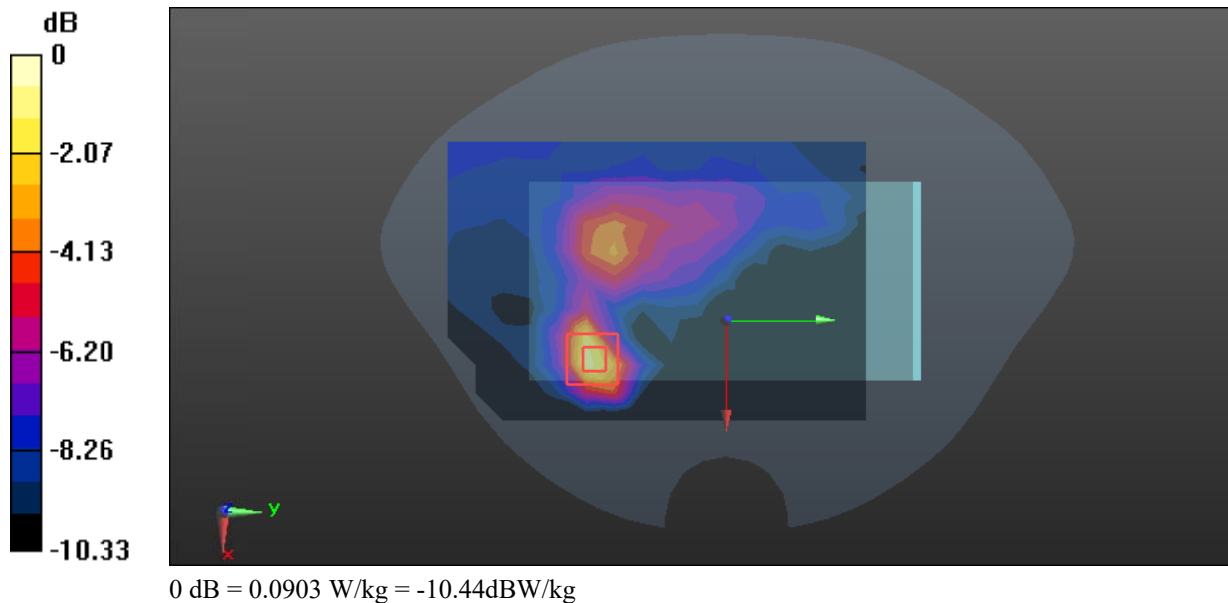

Test Plot 28#: LTE Band 7 1RB Mid ANT0 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.285$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x17x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0752 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.504 V/m; Power Drift =0.13dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0731 W/kg

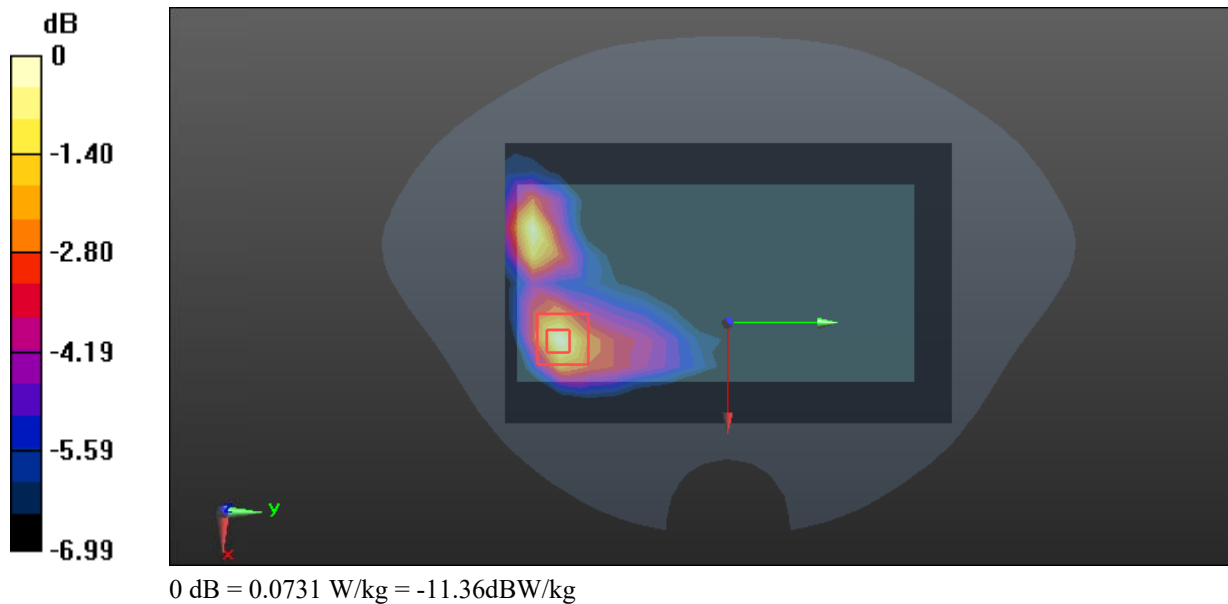

Test Plot 29#: LTE Band 7 1RB Mid ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used: $f=2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r=40.285$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x10x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.751 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.997 V/m; Power Drift =0.09dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.782 W/kg

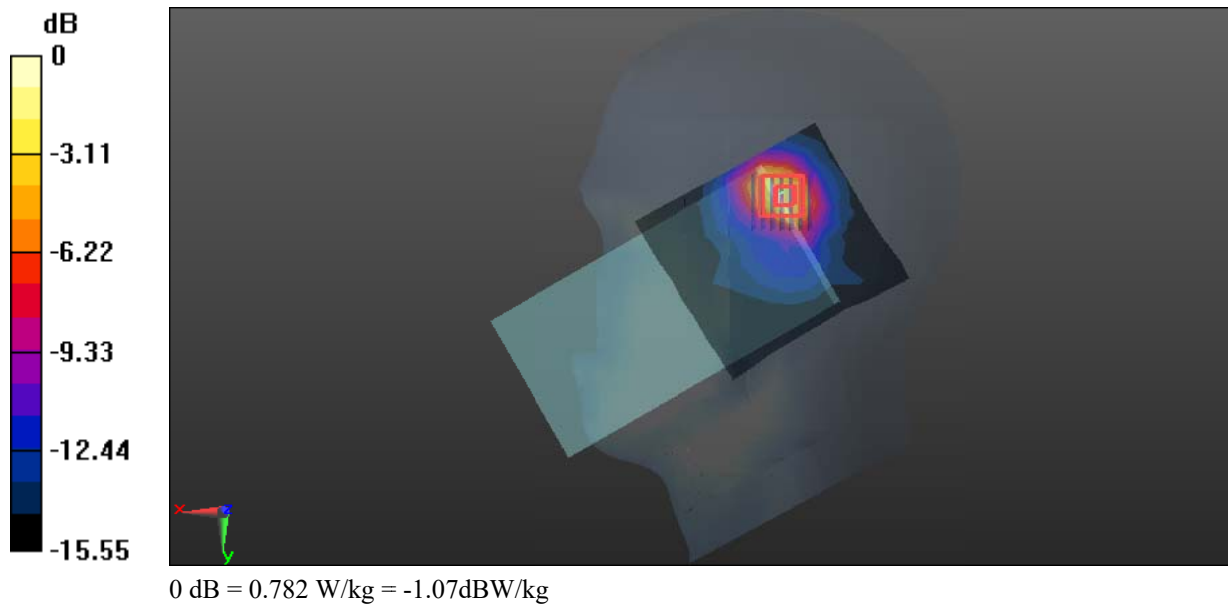

Test Plot 30#: LTE Band 7 1RB Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:2535MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 40.285$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.382 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.142 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

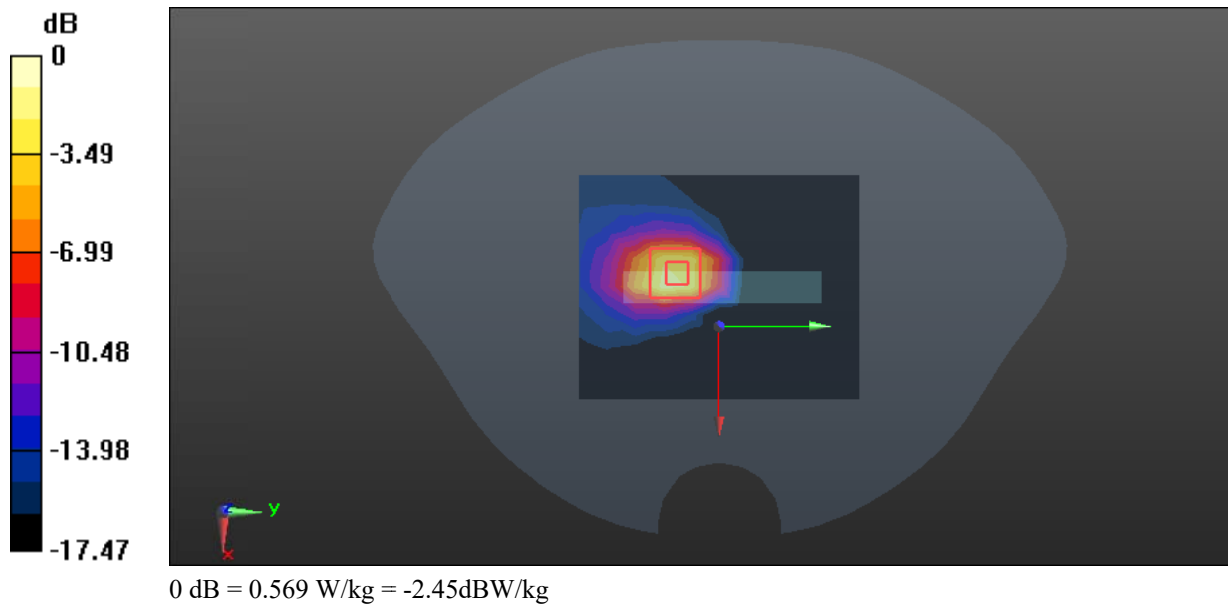

Test Plot 31#: LTE Band 12 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.515$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0850 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.869 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0863 W/kg

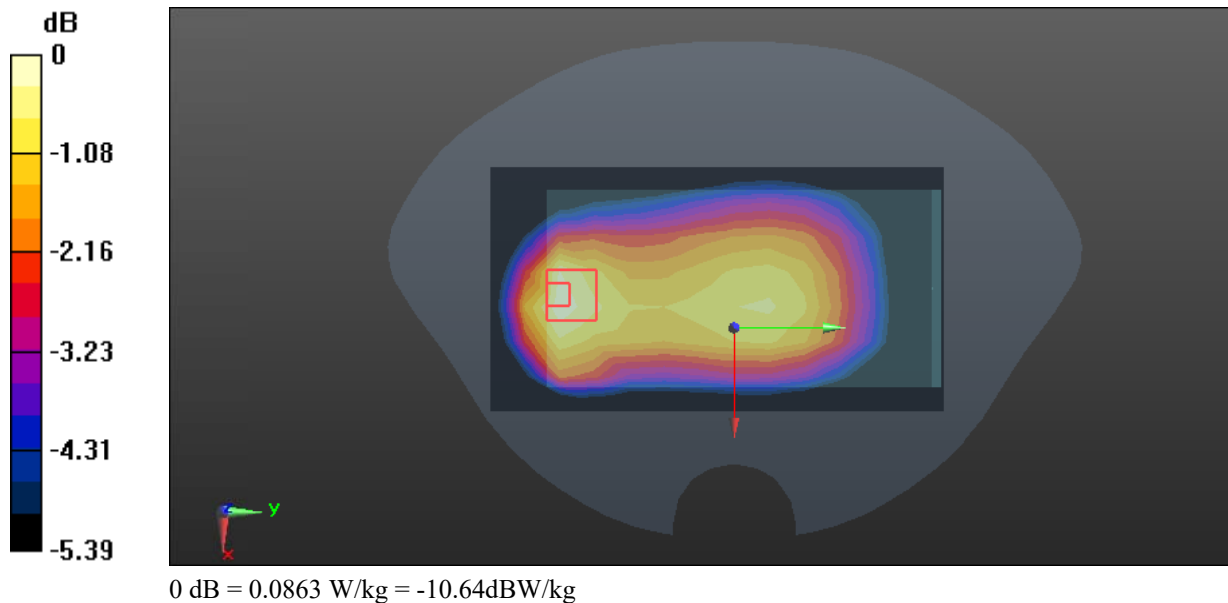

Test Plot 32#: LTE Band 12 50%RB Mid ANT0 Body Left**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency:707.5MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.515$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.119 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.38 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

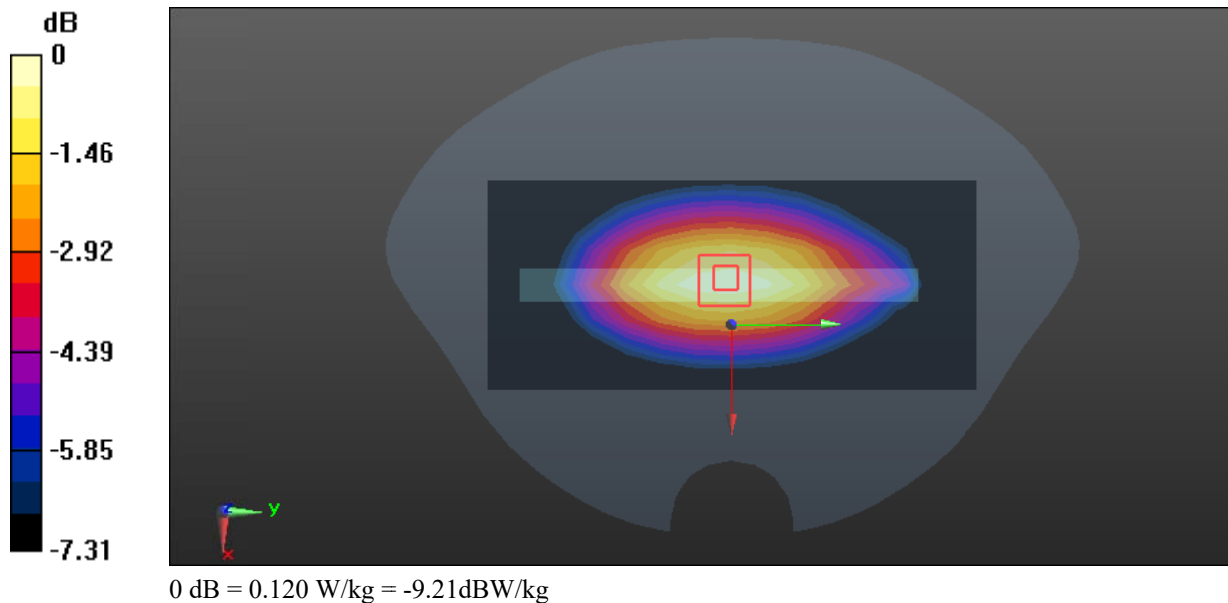

Test Plot 33#: LTE Band 12 50%RB Mid ANT1 Head Right Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.515$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.492 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.26 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

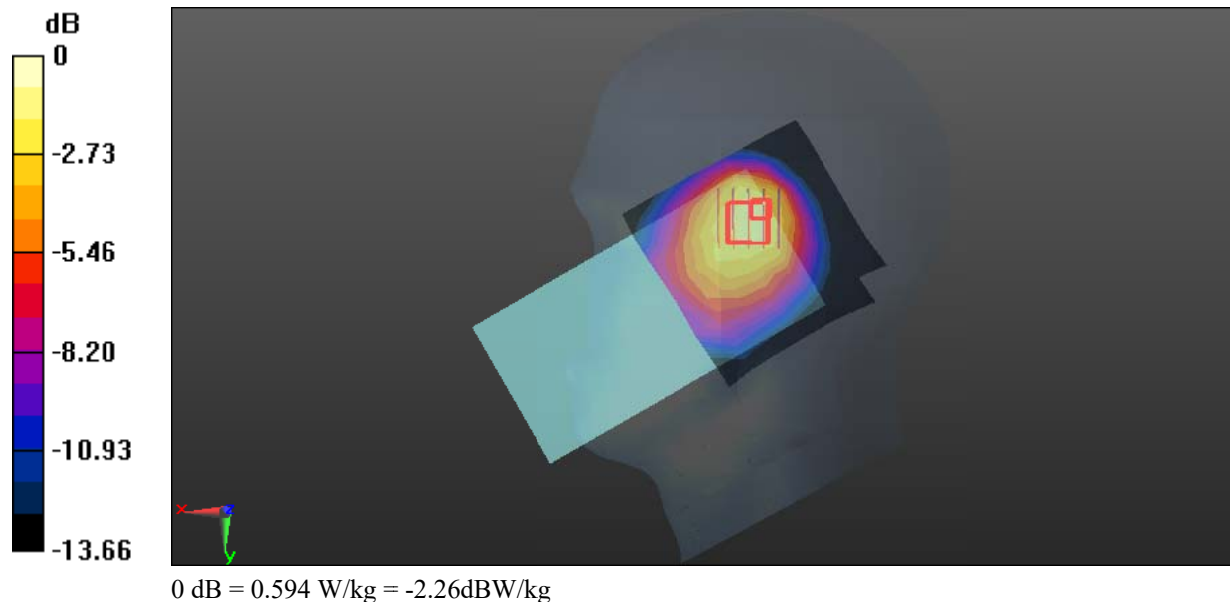

Test Plot 34#: LTE Band 12 50%RB Mid ANT1 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.515$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.962 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

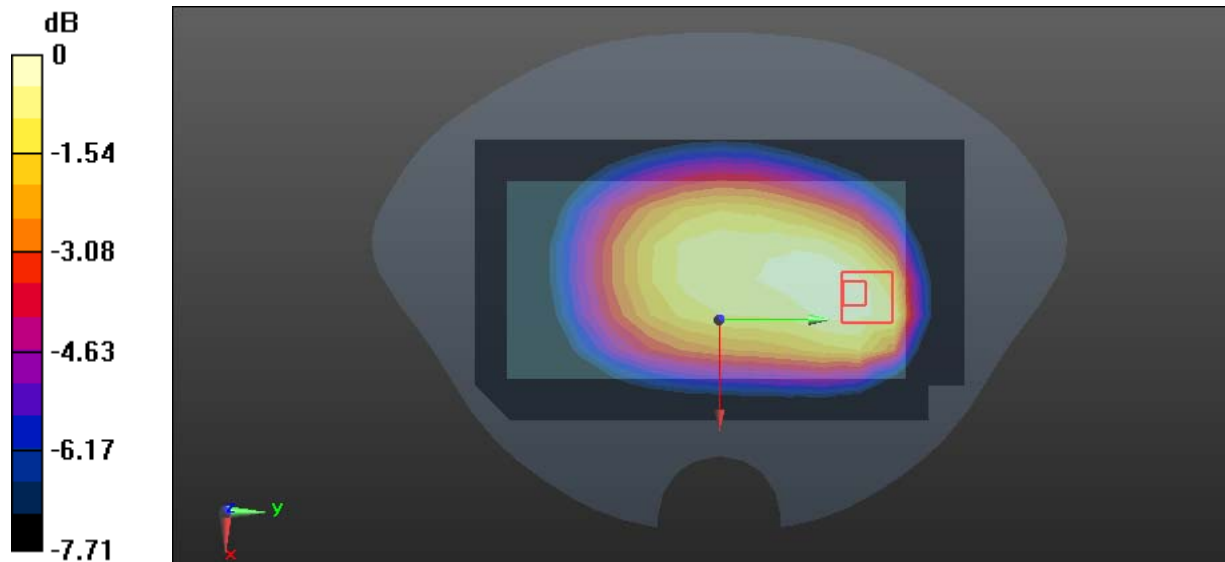

0 dB = 0.101 W/kg = -9.96 dBW/kg

Test Plot 35#: LTE Band 41 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 39.993$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0442 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.464 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0438 W/kg

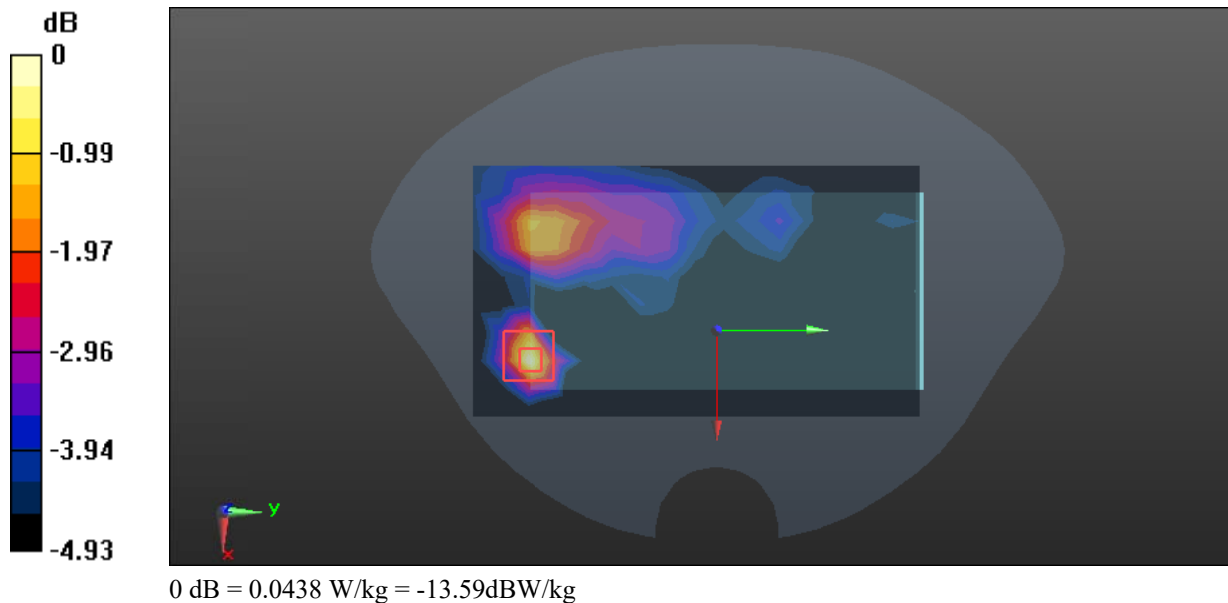

Test Plot 36#: LTE Band 41 1RB Mid ANT0 Body Bottom**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 39.993$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.112 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.324 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

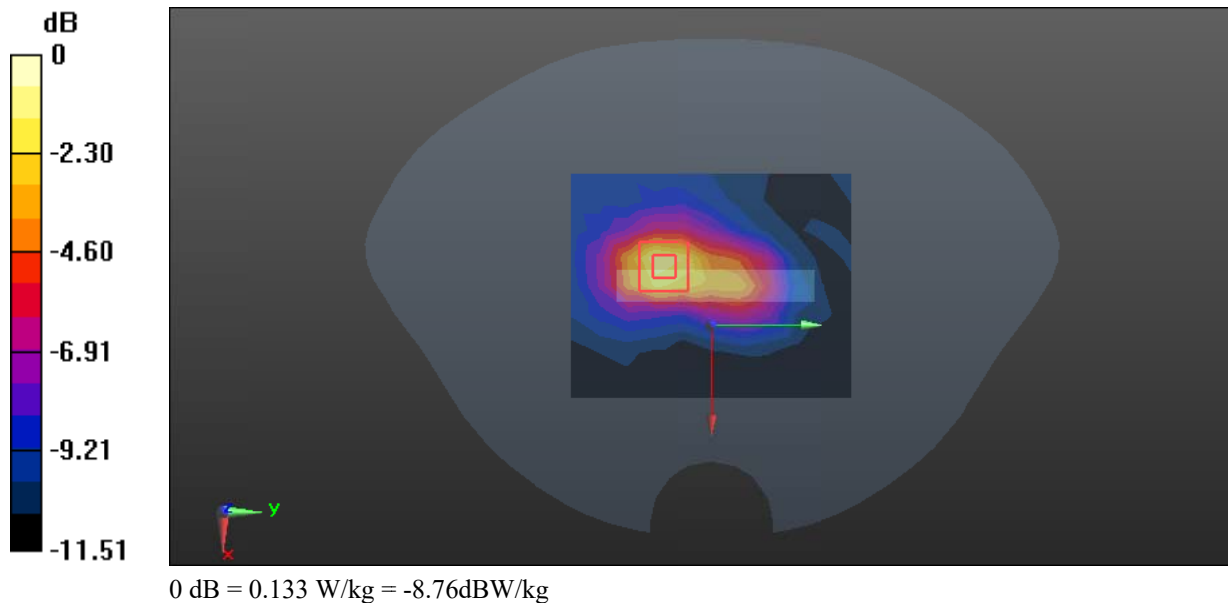

Test Plot 37#: LTE Band 41 1RB Mid ANT1 Head Right Tilt**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic TDD-LTE (0); Frequency:2595MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.948 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.429 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 0.986 W/kg

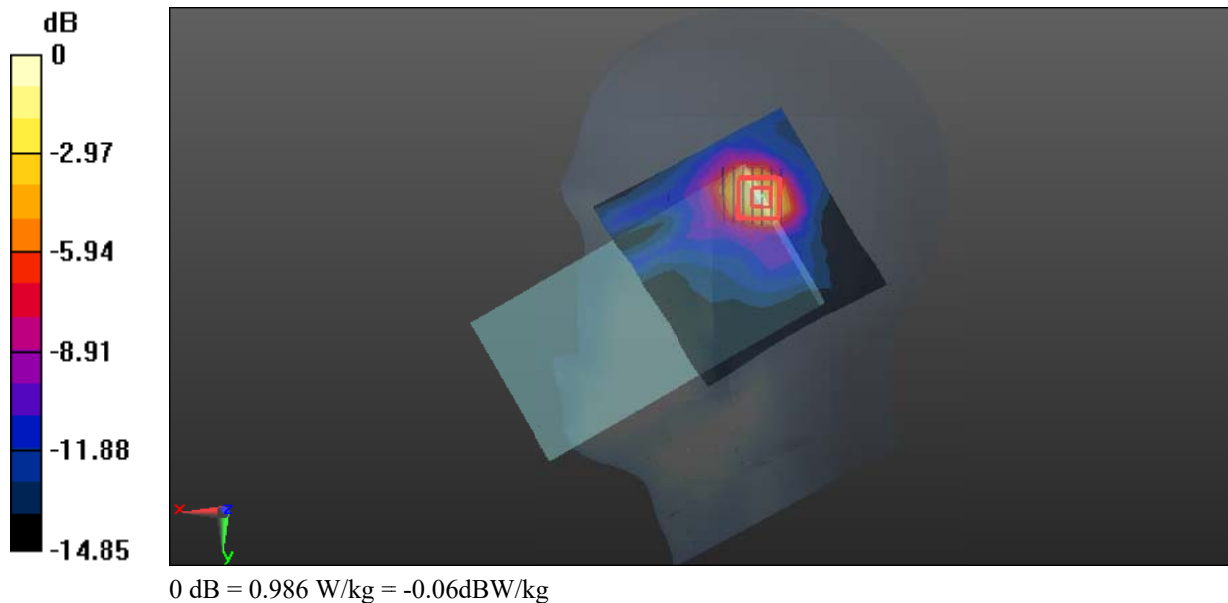

Test Plot 38#: LTE Band 41 1RB Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.471 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.930 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.708 W/kg

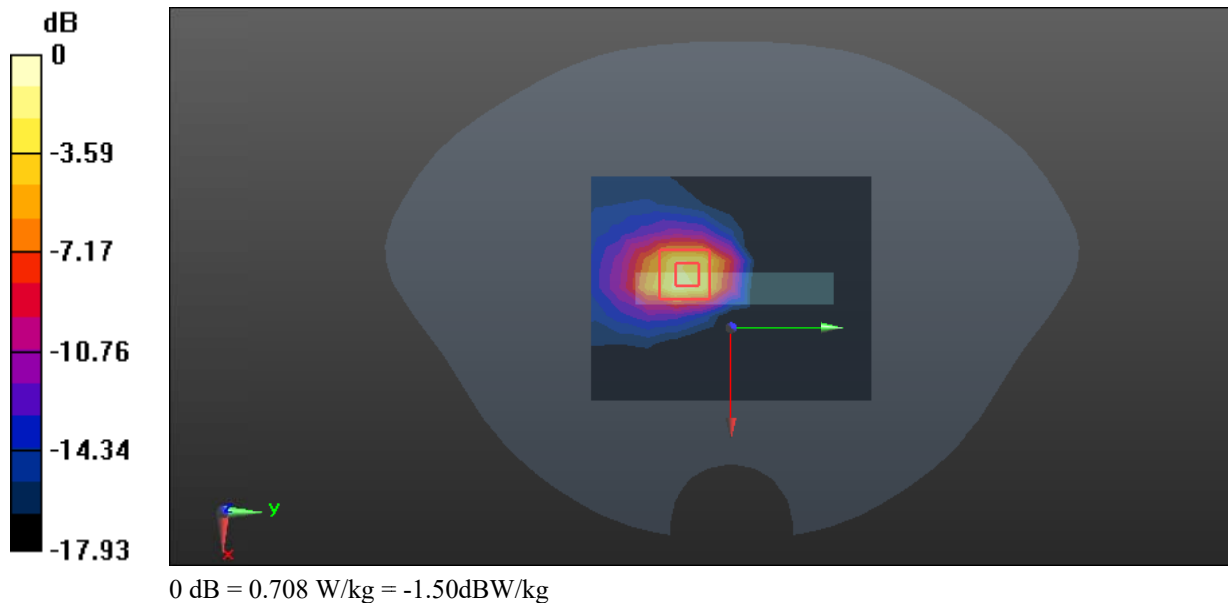

Test Plot 39#: LTE Band 66 1RB Mid ANT0 Head Check**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0394 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.030 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0415 W/kg

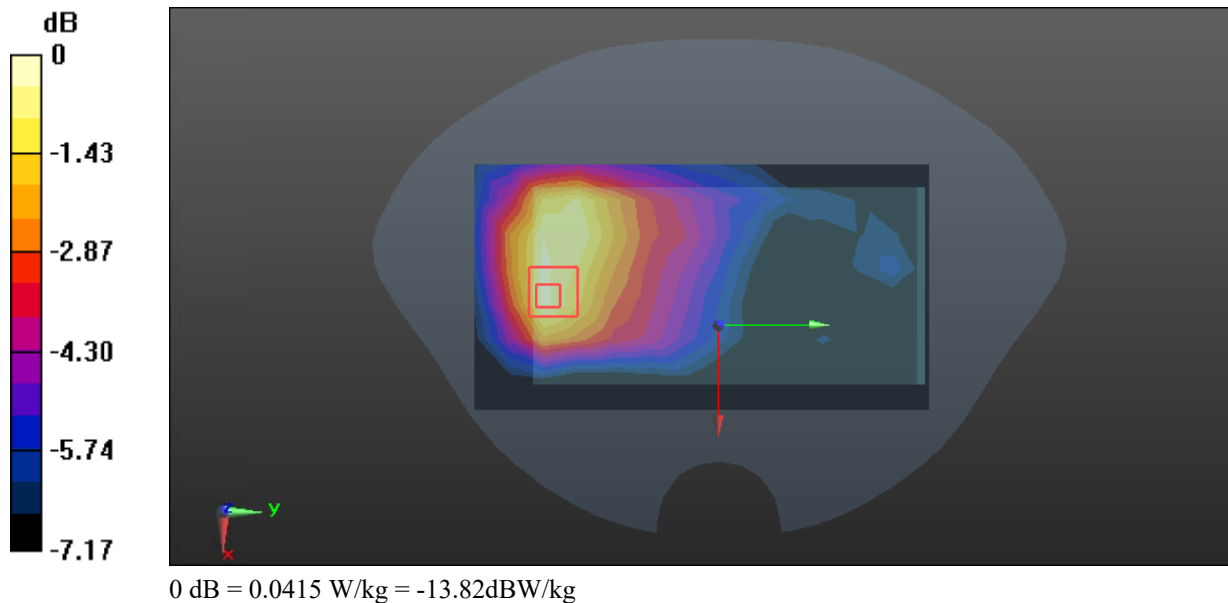

Test Plot 40#: LTE Band 66 1RB Mid ANT0 Body Bottom**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.155 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

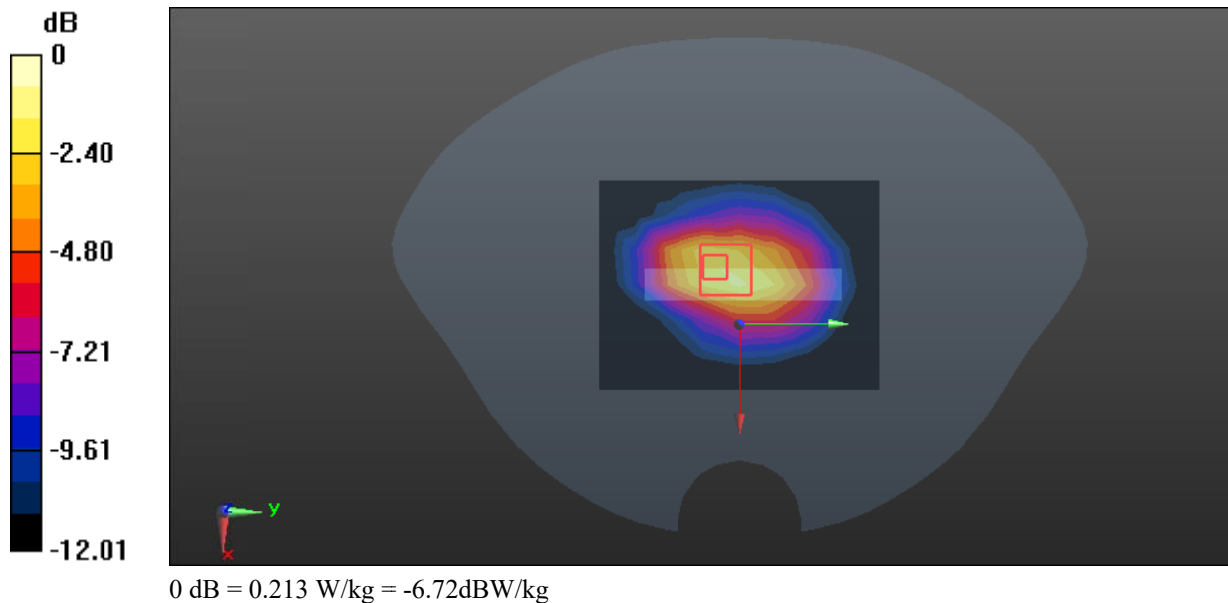

Test Plot 41#: LTE Band 66 1RB Mid ANT1 Head Right Tilt

DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;

Communication System: Generic FDD-LTE (0); Frequency:1745MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.834 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.45 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 0.975 W/kg

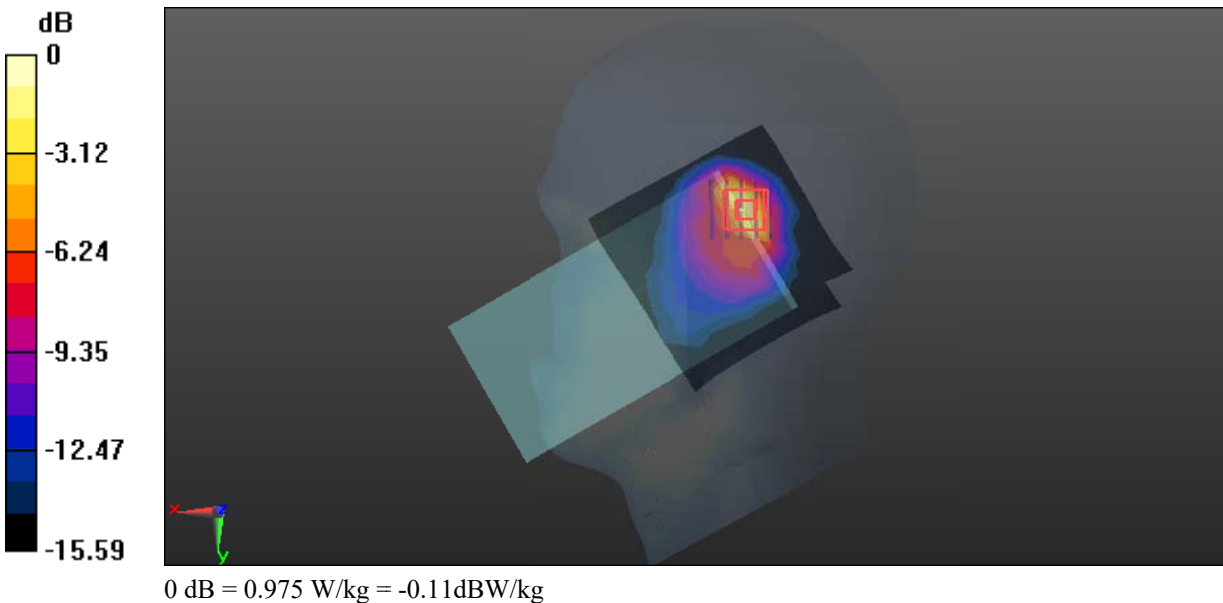

Test Plot 42#: LTE Band 66 1RB Mid ANT1 Body Top**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 39.34$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.297 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.85 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

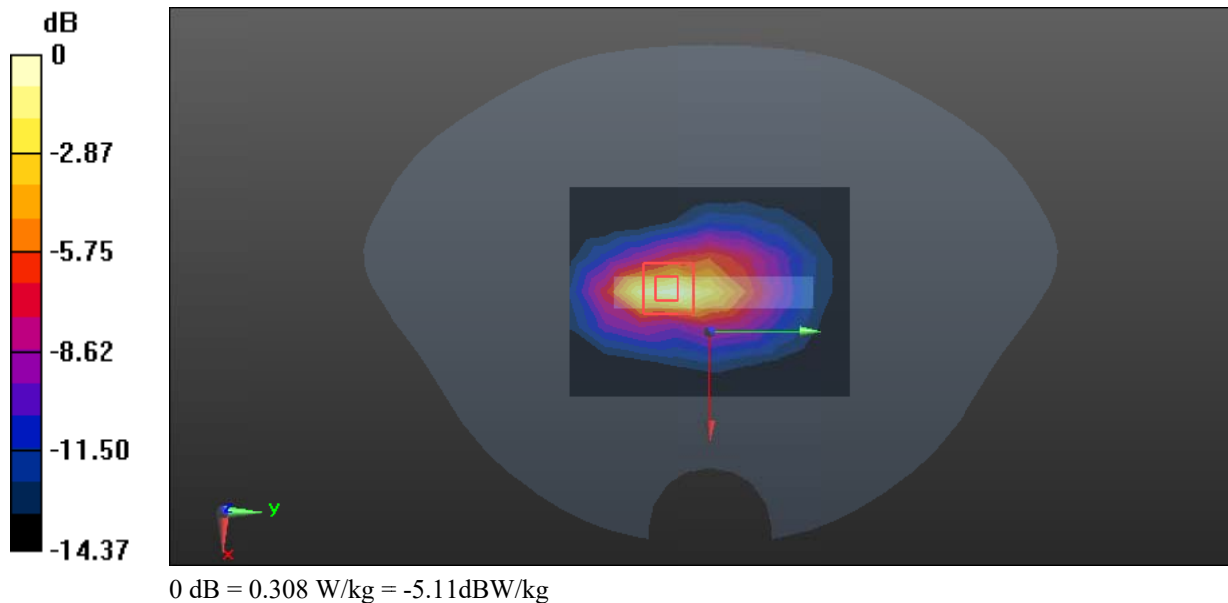

Test Plot 43#: 2.4G WLAN Mid ANT14 Head Left Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.359$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.588 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.62 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.596 W/kg

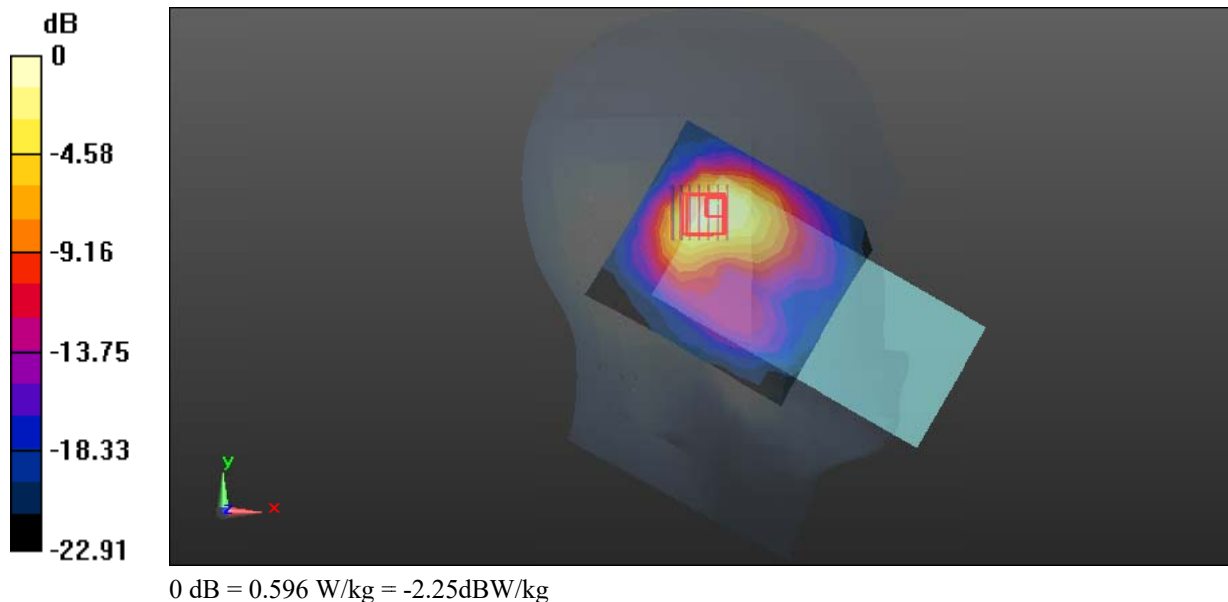

Test Plot 44#: 2.4G WLAN Mid ANT14 Body Back**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: 802.11b (0); Frequency:2437MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.803 \text{ S/m}$; $\epsilon_r = 40.359$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.194 W/kg


Zoom Scan (7x8x7) /Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.779 V/m; Power Drift =0.11dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

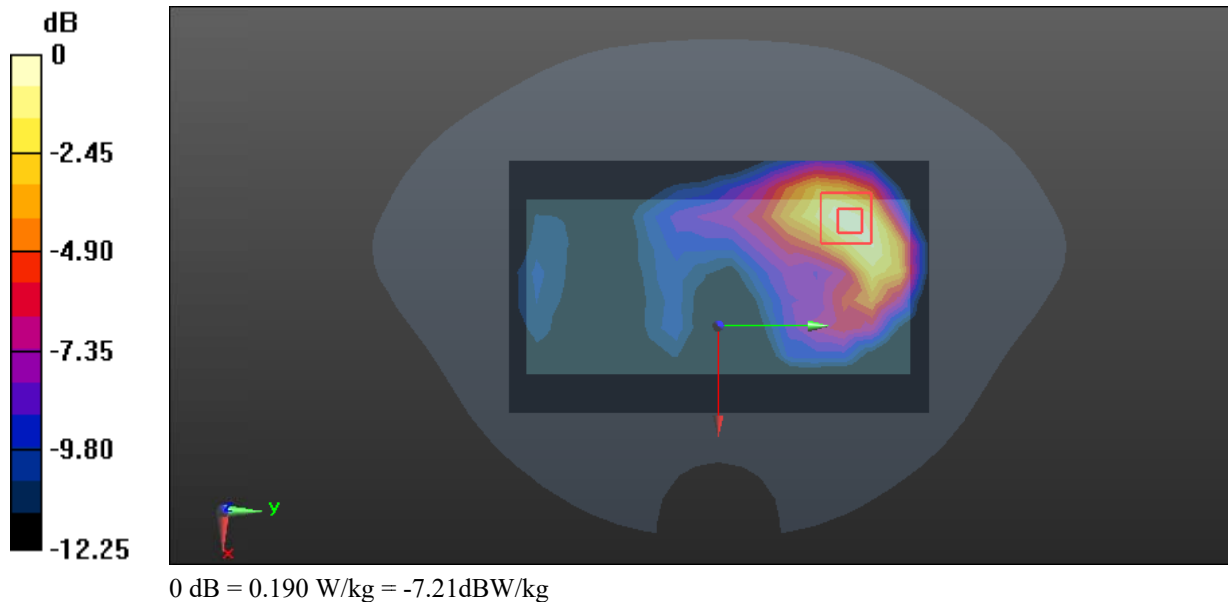

Test Plot 45#: 2.4G WLAN Mid ANT13 Head Left Cheek**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: 802.11b (0); Frequency:2437MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.359$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.643 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.360 V/m; Power Drift =0.05dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.689 W/kg

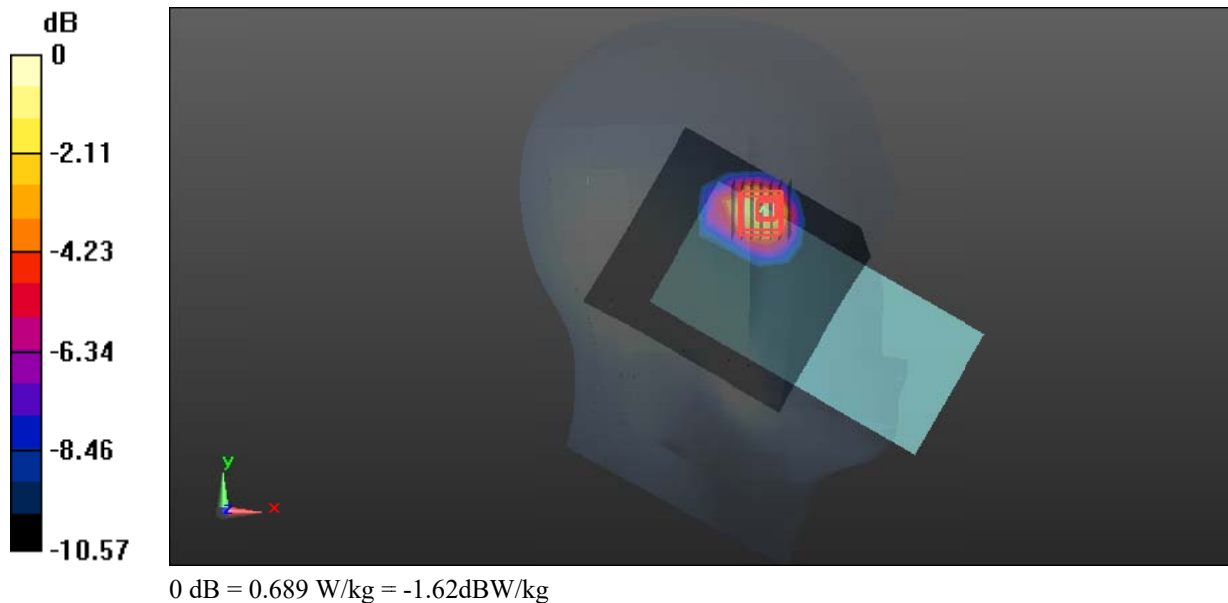

Test Plot 46#: 2.4G WLAN Mid ANT13 Body Right**DUT: Mobile phone; Type: KL6; Serial: 2OCH-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.359$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.337 W/kg

Zoom Scan (8x8x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.128 V/m; Power Drift = 0.09dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.338 W/kg

