



Spot Check Evaluation

FCC ID : UZ7EM45A1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F),
27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	20
4 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505-02J	Rev. 01	Initial issue of report	Feb. 12, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A1
FCC ID	UZ7EM45A1
IMEI Code	Conducted: 354708620060822/354708620063123 Conduction: 354708620060426/354708620064352 Radiation: 354708620060269/ 354708620064113 DFS/CBP: 354708620060657/354708620063206
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45A1, FCC ID: UZ7EM45A1) is electrically identical to the reference device (Model: EM45A2, FCC ID: UZ7EM45A2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460505-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45A1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45A2 and FCC ID: UZ7EM45A1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45A1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45A2	Full test	FR460505A	UZ7EM45A1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45A2	Full test	FR460505B	UZ7EM45A1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45A2	Full test	FR460505C	UZ7EM45A1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45A2	Full test	FR460505D	UZ7EM45A1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5500~5720	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5745~5825	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45A2	Full test	FZ460505	UZ7EM45A1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45A2	Full test	FR460505G FR460505H	UZ7EM45A1	Spot check	Y, All test items
22, 24, 27, 90, 96,	PCE (WCDMA)	Band II, IV, V	UZ7EM45A2	Full test	FG460505A	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/12/13/17/25/ 26/30/38/41/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45A2	Full test	FG460505B FG460505C FG460505D FG460505G FG460505J	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B14 (90R)	UZ7EM45A2	Full test	FG460505E	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45A2	Full test	FG460505F	UZ7EM45A1	Spot check	Y, All test items
	CBE (LTE)	B48/48C (Part96)	UZ7EM45A2	Full test	FG460505H FG460505I	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n12/n13/n25/ n26/n30/n38/n41/n66/ n71/n77/n78	UZ7EM45A2	Full test	FG460505K FG460505L FG460505O FG460505R FG460505S	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n14 (90R)	UZ7EM45A2	Full test	FG460505M	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45A2	Full test	FG460505N	UZ7EM45A1	Spot check	Y, All test items
	CBE (NR)	n48/n77/n78 (Part96)	UZ7EM45A2	Full test	FG460505P FG460505Q	UZ7EM45A1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.996	1.004	0.008	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.94	0	3
	99% Bandwidth	0.836	0.845	0.009	3
	Conducted Band Edges	-41.83	-44.27	2.44	3
	Conducted Spurious Emission	-45.65	-48	2.35	3
BT 1Mbps (CH39)	Radiated Band Edges and Radiated Spurious Emission	55.68	56.85	1.17	3
BT	AC Conducted Emission	11.93	10.83	1.1	3
BLE 1Mbps (CH39)	6dB Bandwidth	1.15	1.15	0	3
	99% Bandwidth	2.01	2.014	0.004	3
	Power Spectral Density	-9.33	-9.34	0.01	3
	Conducted Band Edges	-33.74	-33.98	0.24	3
	Conducted Spurious Emission	-51.53	-52.95	1.42	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	47.73	46.09	1.46	3
BLE	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.08	8.08	0	3
	99% Bandwidth	13.467	13.387	0.08	3
	Power Spectral Density	-1.15	-1.27	0.12	3
	Conducted Band Edges	-47.96	-48.2	0.24	3
	Conducted Spurious Emission	-43.67	-45.68	2.01	3
WIFI 2.4G (802.11ax HE20 CH11)	Radiated Band Edges and Spurious Emission	52.29	49.61	2.68	3
WIFI 2.4G	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.29	19.2	0.09	3
WIFI 5G (802.11a CH149)	99% Bandwidth	16.705	16.705	0	3
WIFI 5G (802.11a CH149)	Power Spectral Density	8.3	7.99	0.31	3
WIFI 5G (802.11a CH149)	Unwanted Emissions	16.31	16.31	0	3
WIFI 5G (11ax HE80 Ch42)	Radiated Band Edges and Spurious Emission	50.86	50.93	0.07	3
WIFI 5G	AC Conducted Emission	12.50	11.33	1.17	3
WIFI 5G (802.11a CH116)	DFS	0.851628	0.87852	0.026	3
FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6XD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.00	0.30	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3



FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6CD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.04	0.26	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-65.36	-65.88	0.52	3
6E (802.11ax HE20_Ch233)	Radiated Band Edges and Spurious Emission	66.93	67.17	0.24	3
WIFI 6G	AC Conducted Emission	11.52	12.62	1.1	3
Part 15C NFC	20dB Spectrum Bandwidth	2.48	2.48	0	3
	99% OBW Spectrum Bandwidth	2.10	2.11	0.01	3
	Frequency Stability	-22.9351	-20.8333	2.1018	3
	Field Strength of Fundamental Emissions	58.04	58.19	0.15	3
	Radiated Spurious Emissions	33.28	35.09	1.81	3
	AC Conducted Emissions	11.94	11.86	0.06	3

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 96 SA_n77	Radiated Spurious Emission	-43.4	-43.69	0.29	3
Part 96 SA_n48	End User Device additional requirement	Pass	Pass	-	-
Part96 Band48CA	Equivalent Isotropic Radiated Power	20.99	20.96	0.203	3
	Peak-to-Average Ratio	6.43	6.22	0.21	3
	Occupied Bandwidth	32.80	32.80	0.00	3
	Conducted Band Edge	-40.19	-40.98	0.79	3
	Conducted Spurious Emission	-48.81	-47.65	1.16	3
	Frequency Stability	0.0005	0.0011	0.0006	3



Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	9.32	8.85	0.47	3
	BLE 1Mbps	9.12	8.87	0.25	3
	BLE 2Mbps	9.33	9.00	0.33	3
	11b, 2.4GHz	22.51	22.46	0.05	3
	11g, 2.4GHz	21.97	21.92	0.05	3
	11n HT20, 2.4GHz	21.27	21.20	0.07	3
	11ac VHT20, 2.4GHz	21.31	21.25	0.06	3
	11ax HE20, 2.4GHz	21.33	21.31	0.02	3
	11a, 5.2GHz	22.28	22.15	0.13	3
	11a, 5.3GHz	22.27	22.08	0.19	3
	11a, 5.5GHz	22.41	22.22	0.19	3
	11a, 5.8GHz	22.45	22.39	0.06	3
	11n HT20, 5.2GHz	21.20	21.11	0.09	3
	11n HT20, 5.3GHz	20.56	20.27	0.29	3
	11n HT20, 5.5GHz	21.42	21.01	0.41	3
	11n HT20, 5.8GHz	21.51	21.14	0.37	3
	11ac VHT20, 5.2GHz	21.25	21.16	0.09	3
	11ac VHT20, 5.3GHz	20.62	20.31	0.31	3
	11ac VHT20, 5.5GHz	21.46	21.04	0.42	3
	11ac VHT20, 5.8GHz	21.56	21.17	0.39	3
	11ax HE20, 5.2GHz	21.29	21.20	0.09	3
	11ax HE20, 5.3GHz	20.68	20.38	0.30	3
	11ax HE20, 5.5GHz	21.41	21.09	0.32	3
	11ax HE20, 5.8GHz	21.41	21.06	0.35	3
	11n HT40, 5.2GHz	20.45	20.03	0.42	3
	11n HT40, 5.3GHz	20.22	19.85	0.37	3
	11n HT40, 5.5GHz	20.52	20.33	0.19	3
	11n HT40, 5.8GHz	20.30	20.24	0.06	3
	11ac VHT40, 5.2GHz	20.51	20.08	0.43	3
	11ac VHT40, 5.3GHz	20.27	19.89	0.38	3
	11ac VHT40, 5.5GHz	20.55	20.39	0.16	3
	11ac VHT40, 5.8GHz	20.36	20.32	0.04	3
	11ax HE40, 5.2GHz	20.56	20.14	0.42	3
	11ax HE40, 5.3GHz	20.30	19.94	0.36	3
	11ax HE40, 5.5GHz	20.60	20.44	0.16	3
	11ax HE40, 5.8GHz	20.42	20.35	0.07	3
	11ac VHT80, 5.2GHz	20.25	20.02	0.23	3
	11ac VHT80, 5.3GHz	20.03	19.77	0.26	3
	11ac VHT80, 5.5GHz	20.18	20.01	0.17	3
	11ac VHT80, 5.8GHz	19.83	19.79	0.04	3
	11ax HE80, 5.2GHz	20.31	20.05	0.26	3
	11ax HE80, 5.3GHz	20.07	19.79	0.28	3
	11ax HE80, 5.5GHz	20.21	20.03	0.18	3
	11ax HE80, 5.8GHz	19.85	19.82	0.03	3
	11ac VHT160, 5.3GHz	19.21	19.11	0.10	3
	11ac VHT160, 5.5GHz	19.48	19.24	0.24	3
	11ax HE160, 5.3GHz	19.23	19.14	0.09	3
	11ax HE160, 5.5GHz	19.52	19.28	0.24	3
	6CD Indoor 11a, U-NII-5	7.13	7.06	0.07	3
	6CD Indoor 11a, U-NII-6	7.63	7.61	0.02	3
	6CD Indoor 11a, U-NII-7	6.43	6.38	0.05	3
	6CD Indoor 11a, U-NII-8	5.80	5.71	0.09	3
	6CD Indoor 11ax HE20, U-NII-5	10.68	10.47	0.21	3
	6CD Indoor 11ax HE20, U-NII-6	11.19	11.12	0.07	3



6CD Indoor 11ax HE20, U-NII-7	9.90	9.86	0.04	3
6CD Indoor 11ax HE20, U-NII-8	9.18	8.91	0.27	3
6CD Indoor 11ax HE40, U-NII-5	13.56	13.40	0.16	3
6CD Indoor 11ax HE40, U-NII-6	14.02	13.89	0.13	3
6CD Indoor 11ax HE40, U-NII-7	12.74	12.65	0.09	3
6CD Indoor 11ax HE40, U-NII-8	12.41	12.34	0.07	3
6CD Indoor 11ax HE80, U-NII-5	16.49	16.28	0.21	3
6CD Indoor 11ax HE80, U-NII-6	16.36	16.34	0.02	3
6CD Indoor 11ax HE80, U-NII-7	16.05	15.96	0.09	3
6CD Indoor 11ax HE80, U-NII-8	15.84	15.78	0.06	3
6CD Indoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Indoor 11ax HE160, U-NII-6	16.48	16.09	0.39	3
6CD Indoor 11ax HE160, U-NII-7	16.71	16.43	0.28	3
6CD Indoor 11ax HE160, U-NII-8	16.80	16.50	0.30	3
6CD Outdoor 11a, U-NII-5	17.02	16.53	0.49	3
6CD Outdoor 11a, U-NII-7	16.69	16.62	0.07	3
6CD Outdoor 11ax HE20, U-NII-5	16.95	16.55	0.40	3
6CD Outdoor 11ax HE20, U-NII-7	16.61	16.26	0.35	3
6CD Outdoor 11ax HE40, U-NII-5	16.90	16.60	0.30	3
6CD Outdoor 11ax HE40, U-NII-7	16.52	16.22	0.30	3
6CD Outdoor 11ax HE80, U-NII-5	16.85	16.52	0.33	3
6CD Outdoor 11ax HE80, U-NII-7	16.43	16.13	0.30	3
6CD Outdoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Outdoor 11ax HE160, U-NII-7	16.42	16.20	0.22	3

Conducted power for Licensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	WCDMA II	23.97	23.79	0.18	3
	WCDMA IV	23.92	23.88	0.04	3
	WCDMA V	23.98	23.66	0.32	3
	LTE B2	23.66	23.24	0.42	3
	LTE B4	23.56	23.32	0.24	3
	LTE B5	23.69	23.35	0.34	3
	LTE B5B	23.65	23.52	0.13	3
	LTE B7	22.8	22.61	0.19	3
	LTE B7C	22.79	22.75	0.04	3
	LTE B12	23.89	23.65	0.24	3
	LTE B13	23.71	23.31	0.4	3
	LTE B14	23.83	23.38	0.45	3
	LTE B17	23.82	23.43	0.39	3
	LTE B25	23.68	23.19	0.49	3
	LTE B26L	23.47	23.26	0.21	3
	LTE B26H	23.71	23.26	0.45	3
	LTE B30	23.69	23.57	0.12	3
	LTE B66	23.60	23.28	0.32	3
	LTE B71	22.76	22.72	0.04	3
	LTE B38	22.77	22.70	0.07	3
	LTE B41	26.01	26.00	0.01	3
	LTE B38C	22.63	22.59	0.04	3
	LTE B41C	25.73	25.62	0.11	3
	LTE B48 part96	21.85	21.82	0.03	3
	LTE B48C part96	21.55	21.52	0.03	3
	LTE B66B	23.49	23.27	0.22	3
	LTE B66C	23.32	23.21	0.11	3



N13	24.27	23.96	0.31	3
N14	24.26	23.98	0.28	3
N26 L	24.45	24.06	0.39	3
N26 H	24.49	24.02	0.47	3
ENDC_48A_n66A	24.22	24.18	0.04	3
N77 270 MIMO	24.70	24.36	0.34	3
N78 270 MIMO	24.61	24.32	0.29	3
N77 part96 MIMO	22.31	22.25	0.06	3
N78 part96 MIMO	22.26	22.19	0.07	3
N77 27Q MIMO	24.45	24.12	0.33	3
N78 27Q MIMO	24.11	23.86	0.25	3
ENDC_5A_n2A	24.72	24.27	0.45	3
ENDC_12A_n25A	24.74	24.29	0.45	3
ENDC_2A_n5A	24.39	24.31	0.08	3
ENDC_2A_n7A	23.85	23.51	0.34	3
ENDC_2A_n12A	24.52	24.25	0.27	3
ENDC_2A_n30A	23.65	23.58	0.07	3
ENDC_2A_n38A	23.59	23.45	0.14	3
ENDC_2A_n41A	26.56	26.45	0.11	3
ENDC_2A_n71A	23.39	23.31	0.08	3
ENDC_2A_N77A 270	26.23	26.17	0.06	3
ENDC_2A_N78A 270	26.01	25.94	0.07	3
ENDC_2A_N77A 27Q	25.99	25.75	0.24	3
ENDC_2A_N78A 27Q	25.81	25.47	0.34	3
ENDC_2A_N77A part96	22.85	22.62	0.23	3
ENDC_2A_N78A part96	22.76	22.58	0.18	3
ENDC_2A_N48A part96	22.04	22.01	0.03	3

6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.03	4.55	3.39	0.35	-0.85	4.90	2.54	24.00	Pass	4.5	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	7.91	6.82	0.35	-0.85	8.26	5.97	24.00	Pass	8	8
HE40	MCS0	1	003	5965	Full	0.00	0.00	10.63	10.08	0.35	-0.85	10.98	9.23	24.00	Pass	11	11
HE80	MCS0	1	007	5985	Full	0.00	0.00	13.43	13.02	0.35	-0.85	13.78	12.17	24.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6515	0.03	0.04	4.81	4.31	0.75	-2.44	5.56	1.87	24.00	Pass	5.5	5.5



U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.41	7.67	0.75	-2.44	9.16	5.23	24.00	Pass	9	9
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.21	10.45	0.75	-2.44	11.96	8.01	24.00	Pass	12	12
HE80	MCS0	1	103	6465	Full	0.00	0.00	13.63	12.91	0.75	-2.44	14.38	10.47	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	13.37	12.72	0.75	-2.44	14.12	10.28	24.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	3.54	3.14	1.02	0.16	4.56	3.30	24.00	Pass	4	4

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	7.19	6.43	1.02	0.16	8.21	6.59	24.00	Pass	7.5	7.5
HE40	MCS0	1	123	6565	Full	0.00	0.00	9.97	9.19	1.02	0.16	10.99	9.35	24.00	Pass	10.5	10.5
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.33	12.45	1.02	0.16	14.35	12.61	24.00	Pass	14	14
HE160	MCS0	1	175	6825	Full	0.00	0.00	13.25	13.51	1.02	0.16	14.27	13.67	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	7095	0.03	0.04	2.72	2.58	0.70	1.66	3.42	4.24	24.00	Pass	3.5	3.5

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	229	7095	Full	0.00	0.00	5.85	5.76	0.70	1.66	6.55	7.42	24.00	Pass	6.5	6.5
HE40	MCS0	1	227	7085	Full	0.00	0.00	9.27	9.26	0.70	1.66	9.97	10.92	24.00	Pass	10	10
HE80	MCS0	1	199	6945	Full	0.00	0.00	12.98	12.45	0.70	1.66	13.68	14.11	24.00	Pass	13.5	13.5
HE160	MCS0	1	207	6985	Full	0.00	0.00	13.22	13.58	0.70	1.66	13.92	15.24	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	4.60	3.43	7.06	0.35		7.41	24.00	Pass	4.5	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6515	0.03	0.04	4.84	4.35	7.61	0.75		8.36	24.00	Pass	5.5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	3.57	3.17	6.38	1.02		7.40	24.00	Pass	4	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	7095	0.03	0.04	2.74	2.65	5.71	1.66		7.37	24.00	Pass	3.5	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	7.96	6.89	10.47	0.35		10.82	24.00	Pass	8	
HE40	MCS0	2	003	5965	Full	0.00	0.00	10.67	10.10	13.40	0.35		13.75	24.00	Pass	11	
HE80	MCS0	2	007	5985	Full	0.00	0.00	13.49	13.04	16.28	0.35		16.63	24.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.44	7.76	11.12	0.75		11.87	24.00	Pass	9	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.24	10.48	13.89	0.75		14.64	24.00	Pass	12	
HE80	MCS0	2	103	6465	Full	0.00	0.00	13.68	12.95	16.34	0.75		17.09	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	13.40	12.74	16.09	0.75		16.84	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	7.22	6.44	9.86	1.02		10.88	24.00	Pass	7.5	
HE40	MCS0	2	123	6565	Full	0.00	0.00	10.02	9.22	12.65	1.02		13.67	24.00	Pass	10.5	
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.35	12.51	15.96	1.02		16.98	24.00	Pass	14	
HE160	MCS0	2	175	6825	Full	0.00	0.00	13.29	13.55	16.43	1.02		17.45	24.00	Pass	14	

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	229	7095	Full	0.00	0.00	5.88	5.91	8.91	1.66	10.57	24.00	Pass	6.5		
HE40	MCS0	2	227	7085	Full	0.00	0.00	9.33	9.32	12.34	1.66	14.00	24.00	Pass	10		
HE80	MCS0	2	199	6945	Full	0.00	0.00	13.02	12.50	15.78	1.66	17.44	24.00	Pass	13.5		
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.36	13.62	16.50	1.66	18.16	24.00	Pass	14		

<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	049	6195	0.03	0.04	14.00	12.85	0.35	-0.85	14.35	12.00	30.00	Pass	14	



U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	13.99	12.97	0.35	-0.85	14.34	12.12	30.00	Pass	14	14
HE40	MCS0	1	051	6205	Full	0.00	0.00	14.02	13.03	0.35	-0.85	14.37	12.18	30.00	Pass	14	14
HE80	MCS0	1	055	6225	Full	0.00	0.00	13.88	13.01	0.35	-0.85	14.23	12.16	30.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	181	6855	0.03	0.04	13.58	13.45	1.02	0.16	14.60	13.61	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	13.63	12.76	1.02	0.16	14.65	12.92	30.00	Pass	14	14
HE40	MCS0	1	123	6565	Full	0.00	0.00	13.57	12.76	1.02	0.16	14.59	12.92	30.00	Pass	14	14
HE80	MCS0	1	167	6785	Full	0.00	0.00	13.37	12.76	1.02	0.16	14.39	12.92	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	13.37	12.91	1.02	0.16	14.39	13.07	30.00	Pass	14	14

<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	049	6195	0.03	0.04	14.05	12.92	16.53	0.35		16.88	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	14.02	13.00	16.55	0.35		16.90	30.00	Pass	14	
HE40	MCS0	2	051	6205	Full	0.00	0.00	14.06	13.07	16.60	0.35		16.95	30.00	Pass	14	
HE80	MCS0	2	055	6225	Full	0.00	0.00	13.92	13.05	16.52	0.35		16.87	30.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	30.00	Pass	14	



U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	181	6855	0.03	0.04	13.63	13.60	16.62	1.02		17.64	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	13.68	12.78	16.26	1.02		17.28	30.00	Pass	14	
HE40	MCS0	2	123	6565	Full	0.00	0.00	13.59	12.79	16.22	1.02		17.24	30.00	Pass	14	
HE80	MCS0	2	167	6785	Full	0.00	0.00	13.40	12.83	16.13	1.02		17.15	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	13.42	12.95	16.20	1.02		17.22	30.00	Pass	14	

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 05, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 05, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 05, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 05, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 05, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 05, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)



MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	Apr 17, 2024	Nov. 05, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 02, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 02, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 02, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 10, 2024	Oct. 20, 2024	Sep. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.46 dB
Frequency Stability	± 0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC RF Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H), 27(F)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Test Date(s) : Jun. 26, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Test Software.....	7
1.6 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Frequency List of Low/Middle/High Channels	10
3 RADIATED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Radiated Test	14
3.4 Radiated Spurious Emission	15
4 LIST OF MEASURING EQUIPMENT	17
5 MEASUREMENT UNCERTAINTY	18
APPENDIX A. TEST RESULTS OF RADIATED TEST	1



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505J	Rev. 01	Initial issue of report	Sep. 05, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 66)	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 16.52 dB at 1564.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	$< 55 + 10\log_{10}(P[\text{Watts}])$		

Remark: The conducted test items of inter band CA were cover by LTE single carrier due to the CA power is reduced according to 3GPP MPR.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI Code	Radiation: 352991990029096/352991990029708
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Specification of Accessory			
Battery	Brand Name	Zebra	Model
			BT-000501
			Part Number
			BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification					
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz				
	LTE Band 4 : 1710 MHz ~ 1755 MHz				
	LTE Band 5 : 824 MHz ~ 849 MHz				
	LTE Band 7 : 2500 MHz ~ 2570 MHz				
	LTE Band 12 : 699 MHz ~ 716 MHz				
	LTE Band 13 : 777 MHz ~ 787 MHz				
	LTE Band 66 : 1710 MHz ~ 1780 MHz				
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz				
	LTE Band 4 : 2110 MHz ~ 2155 MHz				
	LTE Band 5 : 869 MHz ~ 894 MHz				
	LTE Band 7 : 2620 MHz ~ 2690 MHz				
	LTE Band 12 : 729 MHz ~ 746 MHz				
	LTE Band 13 : 746 MHz ~ 756 MHz				
	LTE Band 66 : 2110 MHz ~ 2200 MHz				
Uplink CA Bands	2A-4A	2A-12A	4A-5A	4A-13A	12A-66A
	2A-5A	2A-13A	4A-7A	5A-7A	13A-66A
	2A-7A	2A-66A	4A-12A	5A-66A	
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM				

Note: For all uplink inter-band CA combinations, only the worst combinations were tested and recorded in the report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H), 27(F)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X/Y-Plane)

	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Test Items	2A-12A	Worst Case													v	v	v
	2A-13A	Worst Case													v	v	v
	2A-4A	Worst Case													v	v	v
	2A-5A	Worst Case													v	v	v
	2A-7A	Worst Case													v	v	v
	2A-66A	Worst Case													v	v	v
	4A-12A	Worst Case													v	v	v
	4A-13A	Worst Case													v	v	v
	4A-5A	Worst Case													v	v	v
	4A-7A	Worst Case													v	v	v
	5A-7A	Worst Case													v	v	v
	5A-66A	Worst Case													v	v	v
	12A-66A	Worst Case													v	v	v
	13A-66A	Worst Case													v	v	v
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

2.2 Connection Diagram of Test System

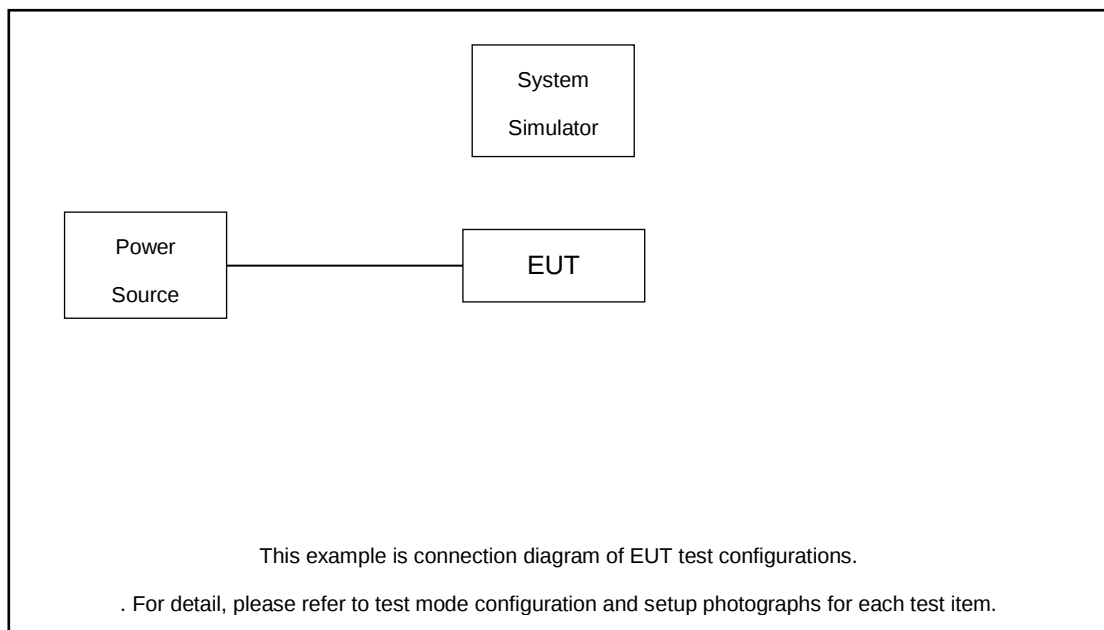

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3



LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

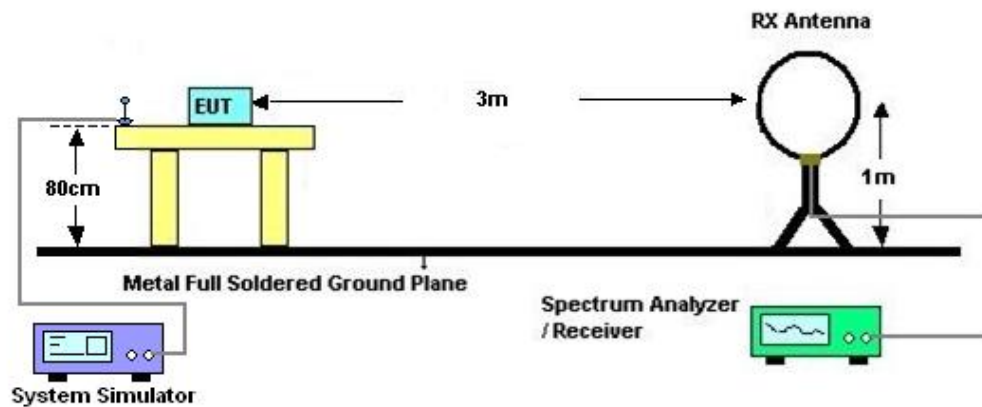

3.2.2 For radiated test from 30MHz to 1GHz

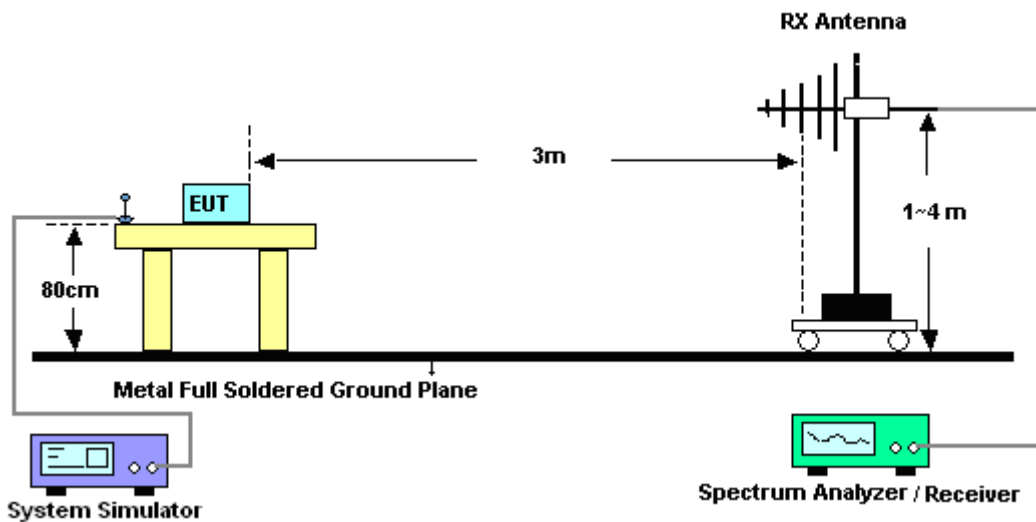

3.2.3 For radiated test above 1GHz

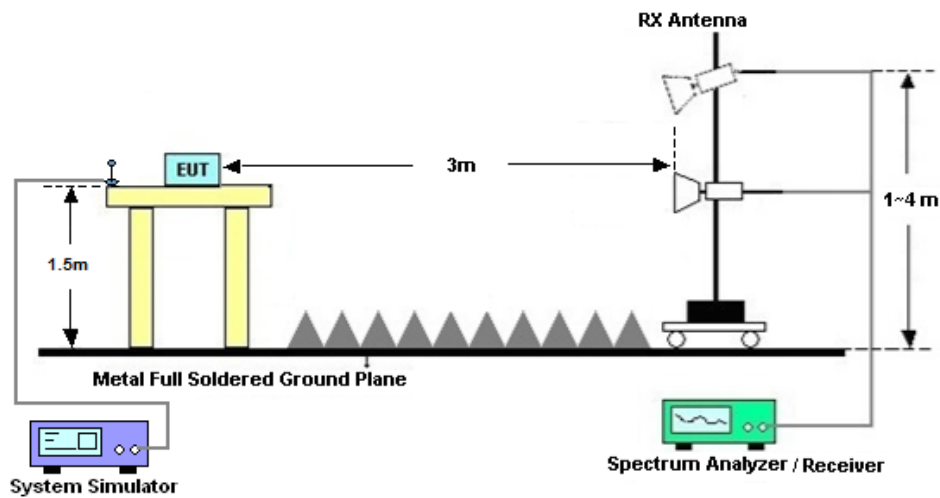

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix A.



3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For LTE Band 2, 4, 5, 12 , 66

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For Band 2, 4, 5, 12, 13, 66

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jun. 26, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 19, 2023	Jun. 26, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	Jun. 26, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	Jun. 26, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Jun. 26, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2024	Jun. 26, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 10, 2023	Jun. 26, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 26, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Bruce	Temperature :	23~25°C
		Relative Humidity :	41~42%

ULCA 2A-12A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.57	-13	-42.57	-67.83	2.64	14.90	H
	5550	-54.67	-13	-41.67	-66.53	2.94	14.80	H
	7410	-53.83	-13	-40.83	-63.60	3.39	13.16	H
	3705	-55.46	-13	-42.46	-67.72	2.64	14.90	V
	5550	-54.72	-13	-41.72	-66.58	2.94	14.80	V
	7410	-53.69	-13	-40.69	-63.46	3.39	13.16	V
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-59.72	-13	-46.72	-66.69	1.58	10.70	H
	2098	-62.29	-13	-49.29	-70.54	2.102	12.50	H
	2798	-58.39	-13	-45.39	-67.28	2.856	13.90	H
	1400	-60.77	-13	-47.77	-67.74	1.58	10.70	V
	2098	-61.73	-13	-48.73	-69.98	2.10	12.50	V
	2798	-58.19	-13	-45.19	-67.08	2.86	13.90	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.52	-13	-42.52	-67.78	2.64	14.90	H
	5610	-54.30	-13	-41.30	-66.16	2.94	14.80	H
	7485	-52.48	-13	-39.48	-62.25	3.39	13.16	H
	3735	-55.26	-13	-42.26	-67.52	2.64	14.90	V
	5610	-53.09	-13	-40.09	-64.95	2.94	14.80	V
	7485	-53.63	-13	-40.63	-63.40	3.39	13.16	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-56.79	-13	-43.79	-63.76	1.58	10.70	H
	2110	-52.68	-13	-39.68	-60.93	2.102	12.50	H
	2812	-56.27	-13	-43.27	-65.16	2.856	13.90	H
	1406	-58.15	-13	-45.15	-65.12	1.58	10.70	V
	2110	-55.25	-13	-42.25	-63.50	2.10	12.50	V
	2812	-56.00	-13	-43.00	-64.89	2.86	13.90	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-54.87	-13	-41.87	-67.13	2.64	14.90	H
	5670	-54.54	-13	-41.54	-66.40	2.94	14.80	H
	7560	-53.39	-13	-40.39	-63.16	3.39	13.16	H
	3780	-55.08	-13	-42.08	-67.34	2.64	14.90	V
	5670	-53.38	-13	-40.38	-65.24	2.94	14.80	V
	7560	-52.95	-13	-39.95	-62.72	3.39	13.16	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-62.35	-13	-49.35	-69.32	1.58	10.70	H
	2120	-54.12	-13	-41.12	-62.37	2.102	12.50	H
	2826	-58.28	-13	-45.28	-67.17	2.856	13.90	H
	1414	-62.22	-13	-49.22	-69.19	1.58	10.70	V
	2120	-59.86	-13	-46.86	-68.11	2.10	12.50	V
	2826	-58.17	-13	-45.17	-67.06	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-13A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.29	-13	-42.29	-67.55	2.64	14.90	H
	5550	-54.78	-13	-41.78	-66.64	2.94	14.80	H
	7410	-53.85	-13	-40.85	-63.62	3.39	13.16	H
	3705	-54.94	-13	-41.94	-67.20	2.64	14.90	V
	5550	-52.63	-13	-39.63	-64.49	2.94	14.80	V
	7410	-54.16	-13	-41.16	-63.93	3.39	13.16	V
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1554	-59.75	-13	-46.75	-62.38	1.09	5.87	H
	2332	-55.30	-13	-42.30	-57.70	1.37	5.92	H
	3105	-57.16	-13	-44.16	-61.05	1.64	7.68	H
	1554	-61.92	-13	-48.92	-64.55	1.09	5.87	V
	2332	-56.03	-13	-43.03	-58.43	1.37	5.92	V
	3105	-57.06	-13	-44.06	-60.95	1.64	7.68	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.46	-13	-42.46	-67.72	2.64	14.90	H
	5610	-55.16	-13	-42.16	-67.02	2.94	14.80	H
	7485	-53.43	-13	-40.43	-63.20	3.39	13.16	H
	3735	-55.98	-13	-42.98	-68.24	2.64	14.90	V
	5610	-54.63	-13	-41.63	-66.49	2.94	14.80	V
	7485	-53.31	-13	-40.31	-63.08	3.39	13.16	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1560	-61.47	-42.15	-19.32	-64.10	1.09	5.87	H
	2340	-55.45	-13	-42.45	-57.85	1.37	5.92	H
	3120	-57.35	-13	-44.35	-61.24	1.64	7.68	H
	1560	-62.17	-42.15	-20.02	-64.80	1.09	5.87	V
	2340	-55.77	-13	-42.77	-58.17	1.37	5.92	V
	3120	-57.38	-13	-44.38	-61.27	1.64	7.68	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.52	-13	-42.52	-67.78	2.64	14.90	H
	5670	-55.22	-13	-42.22	-67.08	2.94	14.80	H
	7560	-53.38	-13	-40.38	-63.15	3.39	13.16	H
	3780	-55.51	-13	-42.51	-67.77	2.64	14.90	V
	5670	-53.98	-13	-40.98	-65.84	2.94	14.80	V
	7560	-53.34	-13	-40.34	-63.11	3.39	13.16	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1564	-61.67	-42.15	-19.52	-64.30	1.09	5.87	H
	2348	-57.24	-13	-44.24	-59.64	1.37	5.92	H
	3135	-57.68	-13	-44.68	-61.57	1.64	7.68	H
	1564	-62.21	-42.15	-20.06	-64.84	1.09	5.87	V
	2348	-59.04	-13	-46.04	-61.44	1.37	5.92	V
	3135	-57.68	-13	-44.68	-61.57	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-4A (ANT2+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.07	-13	-42.07	-67.33	2.64	14.90	H
	5550	-54.47	-13	-41.47	-66.33	2.94	14.80	H
	7410	-53.63	-13	-40.63	-63.40	3.39	13.16	H
	3705	-55.58	-13	-42.58	-67.84	2.64	14.90	V
	5550	-52.47	-13	-39.47	-64.33	2.94	14.80	V
	7410	-53.72	-13	-40.72	-63.49	3.39	13.16	V
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-56.80	-13	-43.80	-67.54	2.604	13.34	H
	5130	-53.63	-13	-40.63	-64.14	3.011	13.52	H
	6840	-54.95	-13	-41.95	-65.15	3.271	13.47	H
	3420	-57.18	-13	-44.18	-67.92	2.604	13.34	V
	5130	-54.05	-13	-41.05	-64.56	3.011	13.52	V
	6840	-55.08	-13	-42.08	-65.28	3.271	13.47	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.34	-13	-42.34	-67.60	2.64	14.90	H
	5610	-54.73	-13	-41.73	-66.59	2.94	14.80	H
	7485	-53.35	-13	-40.35	-63.12	3.39	13.16	H
	3735	-55.74	-13	-42.74	-68.00	2.64	14.90	V
	5610	-54.45	-13	-41.45	-66.31	2.94	14.80	V
	7485	-53.44	-13	-40.44	-63.21	3.39	13.16	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-56.57	-13	-43.57	-67.31	2.604	13.34	H
	5175	-53.88	-13	-40.88	-64.39	3.011	13.52	H
	6900	-54.87	-13	-41.87	-65.07	3.271	13.47	H
	3450	-56.80	-13	-43.80	-67.54	2.604	13.34	V
	5175	-54.08	-13	-41.08	-64.59	3.011	13.52	V
	6900	-54.43	-13	-41.43	-64.63	3.271	13.47	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.70	-13	-42.70	-67.96	2.64	14.90	H
	5670	-54.26	-13	-41.26	-66.12	2.94	14.80	H
	7560	-52.93	-13	-39.93	-62.70	3.39	13.16	H
	3780	-55.38	-13	-42.38	-67.64	2.64	14.90	V
	5670	-55.14	-13	-42.14	-67.00	2.94	14.80	V
	7560	-53.19	-13	-40.19	-62.96	3.39	13.16	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-56.76	-13	-43.76	-67.50	2.604	13.34	H
	5205	-53.97	-13	-40.97	-64.48	3.011	13.52	H
	6945	-55.09	-13	-42.09	-65.29	3.271	13.47	H
	3465	-57.00	-13	-44.00	-67.74	2.604	13.34	V
	5205	-53.22	-13	-40.22	-63.73	3.011	13.52	V
	6945	-54.93	-13	-41.93	-65.13	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-5A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-57.71	-13	-44.71	-69.97	2.64	14.90	H
	5550	-56.83	-13	-43.83	-68.69	2.94	14.80	H
	7410	-56.15	-13	-43.15	-65.92	3.39	13.16	H
	3705	-57.49	-13	-44.49	-69.75	2.64	14.90	V
	5550	-55.86	-13	-42.86	-67.72	2.94	14.80	V
	7410	-56.27	-13	-43.27	-66.04	3.39	13.16	V
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-64.32	-13	-51.32	-71.29	1.58	10.70	H
	2474	-58.97	-13	-45.97	-67.22	2.102	12.50	H
	3300	-59.05	-13	-46.05	-67.94	2.856	13.90	H
	1650	-62.73	-13	-49.73	-69.70	1.58	10.70	V
	2474	-53.59	-13	-40.59	-61.84	2.10	12.50	V
	3300	-59.31	-13	-46.31	-68.20	2.86	13.90	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.19	-13	-42.19	-67.45	2.64	14.90	H
	5610	-54.61	-13	-41.61	-66.47	2.94	14.80	H
	7485	-53.45	-13	-40.45	-63.22	3.39	13.16	H
	3735	-55.58	-13	-42.58	-67.84	2.64	14.90	V
	5610	-52.72	-13	-39.72	-64.58	2.94	14.80	V
	7485	-53.12	-13	-40.12	-62.89	3.39	13.16	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.33	-13	-49.33	-69.30	1.58	10.70	H
	2496	-56.19	-13	-43.19	-64.44	2.102	12.50	H
	3330	-57.75	-13	-44.75	-66.64	2.856	13.90	H
	1664	-62.44	-13	-49.44	-69.41	1.58	10.70	V
	2496	-58.37	-13	-45.37	-66.62	2.10	12.50	V
	3330	-57.38	-13	-44.38	-66.27	2.86	13.90	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.30	-13	-42.30	-67.56	2.64	14.90	H
	5670	-53.61	-13	-40.61	-65.47	2.94	14.80	H
	7560	-52.74	-13	-39.74	-62.51	3.39	13.16	H
	3780	-55.27	-13	-42.27	-67.53	2.64	14.90	V
	5670	-54.75	-13	-41.75	-66.61	2.94	14.80	V
	7560	-53.33	-13	-40.33	-63.10	3.39	13.16	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-56.73	-13	-43.73	-63.70	1.58	10.70	H
	2518	-58.72	-13	-45.72	-66.97	2.102	12.50	H
	3360	-56.72	-13	-43.72	-65.61	2.856	13.90	H
	1680	-59.34	-13	-46.34	-66.31	1.58	10.70	V
	2518	-58.14	-13	-45.14	-66.39	2.10	12.50	V
	3360	-57.38	-13	-44.38	-66.27	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-7A (ANT2+3)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-54.77	-13	-41.77	-67.03	2.64	14.90	H
	5550	-54.14	-13	-41.14	-66.00	2.94	14.80	H
	7410	-53.57	-13	-40.57	-63.34	3.39	13.16	H
	3705	-55.35	-13	-42.35	-67.61	2.64	14.90	V
	5550	-54.88	-13	-41.88	-66.74	2.94	14.80	V
	7410	-53.94	-13	-40.94	-63.71	3.39	13.16	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-53.40	-25	-28.40	-63.61	3.03	13.24	H
	7500	-53.04	-25	-28.04	-62.49	3.56	13.01	H
	10005	-49.25	-25	-24.25	-58.77	3.92	13.44	H
	4995	-53.79	-25	-28.79	-64.00	3.03	13.24	V
	7500	-53.50	-25	-28.50	-62.95	3.56	13.01	V
	10005	-49.88	-25	-24.88	-59.40	3.92	13.44	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.36	-13	-42.36	-67.62	2.64	14.90	H
	5610	-54.06	-13	-41.06	-65.92	2.94	14.80	H
	7485	-53.51	-13	-40.51	-63.28	3.39	13.16	H
	3735	-55.53	-13	-42.53	-67.79	2.64	14.90	V
	5610	-54.64	-13	-41.64	-66.50	2.94	14.80	V
	7485	-53.32	-13	-40.32	-63.09	3.39	13.16	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-53.87	-25	-28.87	-64.08	3.03	13.24	H
	7575	-53.42	-25	-28.42	-62.87	3.56	13.01	H
	10110	-49.17	-25	-24.17	-58.69	3.92	13.44	H
	5055	-53.87	-25	-28.87	-64.08	3.03	13.24	V
	7575	-53.22	-25	-28.22	-62.67	3.56	13.01	V
	10110	-49.22	-25	-24.22	-58.74	3.92	13.44	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.59	-13	-42.59	-67.85	2.64	14.90	H
	5670	-54.04	-13	-41.04	-65.90	2.94	14.80	H
	7560	-53.29	-13	-40.29	-63.06	3.39	13.16	H
	3780	-55.53	-13	-42.53	-67.79	2.64	14.90	V
	5670	-55.29	-13	-42.29	-67.15	2.94	14.80	V
	7560	-52.98	-13	-39.98	-62.75	3.39	13.16	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5100	-53.42	-25	-28.42	-63.63	3.03	13.24	H
	7650	-52.79	-25	-27.79	-62.24	3.56	13.01	H
	10200	-48.69	-25	-23.69	-58.21	3.92	13.44	H
	5100	-53.74	-25	-28.74	-63.95	3.03	13.24	V
	7650	-52.61	-25	-27.61	-62.06	3.56	13.01	V
	10200	-49.17	-25	-24.17	-58.69	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_2A-66A (ANT2+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B2 BW 20MHz Lowest 1RB0,QPSK	3705	-55.27	-13	-42.27	-67.53	2.64	14.90	H
	5550	-54.44	-13	-41.44	-66.30	2.94	14.80	H
	7410	-53.51	-13	-40.51	-63.28	3.39	13.16	H
	3705	-55.12	-13	-42.12	-67.38	2.64	14.90	V
	5550	-54.37	-13	-41.37	-66.23	2.94	14.80	V
	7410	-53.26	-13	-40.26	-63.03	3.39	13.16	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-53.95	-13	-40.95	-64.69	2.604	13.34	H
	5130	-53.63	-13	-40.63	-64.14	3.011	13.52	H
	6840	-54.78	-13	-41.78	-64.98	3.271	13.47	H
	3420	-44.22	-13	-31.22	-54.96	2.604	13.34	V
	5130	-53.73	-13	-40.73	-64.24	3.011	13.52	V
	6840	-54.79	-13	-41.79	-64.99	3.271	13.47	V
LTE B2 BW 20MHz Middle 1RB0,QPSK	3735	-55.94	-13	-42.94	-68.20	2.64	14.90	H
	5610	-53.74	-13	-40.74	-65.60	2.94	14.80	H
	7485	-53.41	-13	-40.41	-63.18	3.39	13.16	H
	3735	-55.78	-13	-42.78	-68.04	2.64	14.90	V
	5610	-54.60	-13	-41.60	-66.46	2.94	14.80	V
	7485	-53.40	-13	-40.40	-63.17	3.39	13.16	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-56.50	-13	-43.50	-67.24	2.604	13.34	H
	5205	-54.02	-13	-41.02	-64.53	3.011	13.52	H
	6945	-54.56	-13	-41.56	-64.76	3.271	13.47	H
	3465	-56.83	-13	-43.83	-67.57	2.604	13.34	V
	5205	-54.16	-13	-41.16	-64.67	3.011	13.52	V
	6945	-54.95	-13	-41.95	-65.15	3.271	13.47	V
LTE B2 BW 20MHz Highest 1RB0,QPSK	3780	-55.70	-13	-42.70	-67.96	2.64	14.90	H
	5670	-54.60	-13	-41.60	-66.46	2.94	14.80	H
	7560	-52.93	-13	-39.93	-62.70	3.39	13.16	H
	3780	-55.09	-13	-42.09	-67.35	2.64	14.90	V
	5670	-55.24	-13	-42.24	-67.10	2.94	14.80	V
	7560	-53.12	-13	-40.12	-62.89	3.39	13.16	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-57.40	-13	-44.40	-68.14	2.604	13.34	H
	5280	-54.48	-13	-41.48	-64.99	3.011	13.52	H
	7050	-54.47	-13	-41.47	-64.67	3.271	13.47	H
	3525	-57.50	-13	-44.50	-68.24	2.604	13.34	V
	5280	-53.83	-13	-40.83	-64.34	3.011	13.52	V
	7050	-54.17	-13	-41.17	-64.37	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-12A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-57.17	-13	-44.17	-67.91	2.604	13.34	H
	5130	-52.50	-13	-39.50	-63.01	3.011	13.52	H
	6840	-55.38	-13	-42.38	-65.58	3.271	13.47	H
	3420	-57.12	-13	-44.12	-67.86	2.604	13.34	V
	5130	-52.38	-13	-39.38	-62.89	3.011	13.52	V
	6840	-55.72	-13	-42.72	-65.92	3.271	13.47	V
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-58.72	-13	-45.72	-65.69	1.58	10.70	H
	2098	-60.83	-13	-47.83	-69.08	2.102	12.50	H
	2798	-58.44	-13	-45.44	-67.33	2.856	13.90	H
	1400	-64.23	-13	-51.23	-71.20	1.58	10.70	V
	2098	-61.90	-13	-48.90	-70.15	2.10	12.50	V
	2798	-57.90	-13	-44.90	-66.79	2.86	13.90	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-44.88	-13	-31.88	-55.62	2.604	13.34	H
	5175	-52.83	-13	-39.83	-63.34	3.011	13.52	H
	6900	-55.89	-13	-42.89	-66.09	3.271	13.47	H
	3450	-56.62	-13	-43.62	-67.36	2.604	13.34	V
	5175	-53.62	-13	-40.62	-64.13	3.011	13.52	V
	6900	-55.74	-13	-42.74	-65.94	3.271	13.47	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-64.79	-13	-51.79	-71.76	1.58	10.70	H
	2110	-58.26	-13	-45.26	-66.51	2.102	12.50	H
	2812	-58.54	-13	-45.54	-67.43	2.856	13.90	H
	1406	-60.76	-13	-47.76	-67.73	1.58	10.70	V
	2110	-60.89	-13	-47.89	-69.14	2.10	12.50	V
	2812	-58.09	-13	-45.09	-66.98	2.86	13.90	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.08	-13	-44.08	-67.82	2.604	13.34	H
	5205	-54.26	-13	-41.26	-64.77	3.011	13.52	H
	6945	-57.91	-13	-44.91	-68.11	3.271	13.47	H
	3465	-55.00	-13	-42.00	-65.74	2.604	13.34	V
	5205	-57.07	-13	-44.07	-67.58	3.011	13.52	V
	6945	-57.75	-13	-44.75	-67.95	3.271	13.47	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-60.97	-13	-47.97	-67.94	1.58	10.70	H
	2120	-60.35	-13	-47.35	-68.60	2.102	12.50	H
	2826	-58.53	-13	-45.53	-67.42	2.856	13.90	H
	1414	-60.75	-13	-47.75	-67.72	1.58	10.70	V
	2120	-60.36	-13	-47.36	-68.61	2.10	12.50	V
	2826	-58.29	-13	-45.29	-67.18	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-13A (ANT2+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-55.06	-13	-42.06	-65.80	2.604	13.34	H
	5130	-54.86	-13	-41.86	-65.37	3.011	13.52	H
	6840	-56.05	-13	-43.05	-66.25	3.271	13.47	H
	3420	-56.09	-13	-43.09	-66.83	2.604	13.34	V
	5130	-54.45	-13	-41.45	-64.96	3.011	13.52	V
	6840	-56.08	-13	-43.08	-66.28	3.271	13.47	V
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1556	-65.83	-13	-52.83	-68.46	1.09	5.87	H
	2332	-60.50	-13	-47.50	-62.90	1.37	5.92	H
	3105	-58.09	-13	-45.09	-61.98	1.64	7.68	H
	1556	-64.94	-13	-51.94	-67.57	1.09	5.87	V
	2332	-59.10	-13	-46.10	-61.50	1.37	5.92	V
	3105	-57.88	-13	-44.88	-61.77	1.64	7.68	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-57.01	-13	-44.01	-67.75	2.604	13.34	H
	5175	-55.24	-13	-42.24	-65.75	3.011	13.52	H
	6900	-55.79	-13	-42.79	-65.99	3.271	13.47	H
	3450	-55.35	-13	-42.35	-66.09	2.604	13.34	V
	5175	-54.37	-13	-41.37	-64.88	3.011	13.52	V
	6900	-55.75	-13	-42.75	-65.95	3.271	13.47	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1556	-65.80	-13	-52.80	-68.43	1.09	5.87	H
	2332	-59.90	-13	-46.90	-62.30	1.37	5.92	H
	3105	-57.57	-13	-44.57	-61.46	1.64	7.68	H
	1556	-64.89	-13	-51.89	-67.52	1.09	5.87	V
	2332	-58.95	-13	-45.95	-61.35	1.37	5.92	V
	3105	-57.84	-13	-44.84	-61.73	1.64	7.68	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.46	-13	-44.46	-68.20	2.604	13.34	H
	5205	-55.20	-13	-42.20	-65.71	3.011	13.52	H
	6945	-55.06	-13	-42.06	-65.26	3.271	13.47	H
	3465	-57.63	-13	-44.63	-68.37	2.604	13.34	V
	5205	-55.05	-13	-42.05	-65.56	3.011	13.52	V
	6945	-55.87	-13	-42.87	-66.07	3.271	13.47	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1556	-65.53	-13	-52.53	-68.16	1.09	5.87	H
	2332	-60.38	-13	-47.38	-62.78	1.37	5.92	H
	3105	-58.17	-13	-45.17	-62.06	1.64	7.68	H
	1556	-65.24	-13	-52.24	-67.87	1.09	5.87	V
	2332	-58.98	-13	-45.98	-61.38	1.37	5.92	V
	3105	-58.13	-13	-45.13	-62.02	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-5A (ANT5+0)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-56.07	-13	-43.07	-66.81	2.604	13.34	H
	5130	-54.33	-13	-41.33	-64.84	3.011	13.52	H
	6840	-55.63	-13	-42.63	-65.83	3.271	13.47	H
	3420	-55.94	-13	-42.94	-66.68	2.604	13.34	V
	5130	-54.84	-13	-41.84	-65.35	3.011	13.52	V
	6840	-55.50	-13	-42.50	-65.70	3.271	13.47	V
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-63.24	-13	-50.24	-70.21	1.58	10.70	H
	2474	-56.52	-13	-43.52	-64.77	2.102	12.50	H
	3300	-57.71	-13	-44.71	-66.60	2.856	13.90	H
	1650	-63.95	-13	-50.95	-70.92	1.58	10.70	V
	2474	-54.99	-13	-41.99	-63.24	2.10	12.50	V
	3300	-57.70	-13	-44.70	-66.59	2.86	13.90	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-57.85	-13	-44.85	-68.59	2.604	13.34	H
	5175	-53.62	-13	-40.62	-64.13	3.011	13.52	H
	6900	-54.09	-13	-41.09	-64.29	3.271	13.47	H
	3450	-56.61	-13	-43.61	-67.35	2.604	13.34	V
	5175	-54.79	-13	-41.79	-65.30	3.011	13.52	V
	6900	-55.63	-13	-42.63	-65.83	3.271	13.47	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-61.77	-13	-48.77	-68.74	1.58	10.70	H
	2496	-59.52	-13	-46.52	-67.77	2.102	12.50	H
	3330	-58.44	-13	-45.44	-67.33	2.856	13.90	H
	1664	-62.40	-13	-49.40	-69.37	1.58	10.70	V
	2496	-58.30	-13	-45.30	-66.55	2.10	12.50	V
	3330	-58.32	-13	-45.32	-67.21	2.86	13.90	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-57.90	-13	-44.90	-68.64	2.604	13.34	H
	5205	-54.13	-13	-41.13	-64.64	3.011	13.52	H
	6945	-55.68	-13	-42.68	-65.88	3.271	13.47	H
	3465	-57.13	-13	-44.13	-67.87	2.604	13.34	V
	5205	-54.03	-13	-41.03	-64.54	3.011	13.52	V
	6945	-55.73	-13	-42.73	-65.93	3.271	13.47	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-62.41	-13	-49.41	-69.38	1.58	10.70	H
	2518	-58.71	-13	-45.71	-66.96	2.102	12.50	H
	3360	-58.08	-13	-45.08	-66.97	2.856	13.90	H
	1680	-63.08	-13	-50.08	-70.05	1.58	10.70	V
	2518	-58.68	-13	-45.68	-66.93	2.10	12.50	V
	3360	-57.53	-13	-44.53	-66.42	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_4A-7A (ANT2+3)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B4 BW 20MHz Lowest 1RB0,QPSK	3420	-55.30	-13	-42.30	-66.04	2.604	13.34	H
	5130	-54.01	-13	-41.01	-64.52	3.011	13.52	H
	6840	-54.92	-13	-41.92	-65.12	3.271	13.47	H
	3420	-56.33	-13	-43.33	-67.07	2.604	13.34	V
	5130	-53.88	-13	-40.88	-64.39	3.011	13.52	V
	6840	-54.65	-13	-41.65	-64.85	3.271	13.47	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-53.59	-25	-28.59	-63.80	3.03	13.24	H
	7500	-53.16	-25	-28.16	-62.61	3.56	13.01	H
	10005	-50.04	-25	-25.04	-59.56	3.92	13.44	H
	4995	-53.76	-25	-28.76	-63.97	3.03	13.24	V
	7500	-53.05	-25	-28.05	-62.50	3.56	13.01	V
	10005	-49.84	-25	-24.84	-59.36	3.92	13.44	V
LTE B4 BW 20MHz Middle 1RB0,QPSK	3450	-55.36	-13	-42.36	-66.10	2.604	13.34	H
	5175	-53.55	-13	-40.55	-64.06	3.011	13.52	H
	6900	-54.87	-13	-41.87	-65.07	3.271	13.47	H
	3450	-56.37	-13	-43.37	-67.11	2.604	13.34	V
	5175	-53.77	-13	-40.77	-64.28	3.011	13.52	V
	6900	-54.52	-13	-41.52	-64.72	3.271	13.47	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-53.34	-25	-28.34	-63.55	3.03	13.24	H
	7575	-53.36	-25	-28.36	-62.81	3.56	13.01	H
	10110	-48.44	-25	-23.44	-57.96	3.92	13.44	H
	5055	-53.86	-25	-28.86	-64.07	3.03	13.24	V
	7575	-53.10	-25	-28.10	-62.55	3.56	13.01	V
	10110	-49.05	-25	-24.05	-58.57	3.92	13.44	V
LTE B4 BW 20MHz Highest 1RB0,QPSK	3465	-56.54	-13	-43.54	-67.28	2.604	13.34	H
	5205	-53.95	-13	-40.95	-64.46	3.011	13.52	H
	6945	-54.62	-13	-41.62	-64.82	3.271	13.47	H
	3465	-56.69	-13	-43.69	-67.43	2.604	13.34	V
	5205	-54.18	-13	-41.18	-64.69	3.011	13.52	V
	6945	-54.70	-13	-41.70	-64.90	3.271	13.47	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5100	-53.65	-25	-28.65	-63.86	3.03	13.24	H
	7650	-52.64	-25	-27.64	-62.09	3.56	13.01	H
	10200	-48.71	-25	-23.71	-58.23	3.92	13.44	H
	5100	-54.10	-25	-29.10	-64.31	3.03	13.24	V
	7650	-53.00	-25	-28.00	-62.45	3.56	13.01	V
	10200	-49.13	-25	-24.13	-58.65	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-7A (ANT0+3)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-63.57	-13	-50.57	-70.54	1.58	10.70	H
	2474	-57.98	-13	-44.98	-66.23	2.102	12.50	H
	3300	-57.94	-13	-44.94	-66.83	2.856	13.90	H
	1650	-62.39	-13	-49.39	-69.36	1.58	10.70	V
	2474	-54.09	-13	-41.09	-62.34	2.10	12.50	V
	3300	-57.80	-13	-44.80	-66.69	2.86	13.90	V
LTE B7 BW 20MHz Lowest 1RB0,QPSK	4995	-54.50	-25	-29.50	-64.71	3.03	13.24	H
	7500	-54.33	-25	-29.33	-63.78	3.56	13.01	H
	10005	-50.16	-25	-25.16	-59.68	3.92	13.44	H
	4995	-54.81	-25	-29.81	-65.02	3.03	13.24	V
	7500	-54.17	-25	-29.17	-63.62	3.56	13.01	V
	10005	-50.80	-25	-25.80	-60.32	3.92	13.44	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.64	-13	-49.64	-69.61	1.58	10.70	H
	2496	-52.53	-13	-39.53	-60.78	2.102	12.50	H
	3330	-58.72	-13	-45.72	-67.61	2.856	13.90	H
	1664	-61.48	-13	-48.48	-68.45	1.58	10.70	V
	2496	-45.57	-13	-32.57	-53.82	2.10	12.50	V
	3330	-58.61	-13	-45.61	-67.50	2.86	13.90	V
LTE B7 BW 20MHz Middle 1RB0,QPSK	5055	-54.67	-25	-29.67	-64.88	3.03	13.24	H
	7575	-54.39	-25	-29.39	-63.84	3.56	13.01	H
	10110	-49.66	-25	-24.66	-59.18	3.92	13.44	H
	5055	-54.56	-25	-29.56	-64.77	3.03	13.24	V
	7575	-53.86	-25	-28.86	-63.31	3.56	13.01	V
	10110	-49.83	-25	-24.83	-59.35	3.92	13.44	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-61.92	-13	-48.92	-68.89	1.58	10.70	H
	2518	-52.89	-13	-39.89	-61.14	2.102	12.50	H
	3360	-57.95	-13	-44.95	-66.84	2.856	13.90	H
	1680	-61.12	-13	-48.12	-68.09	1.58	10.70	V
	2518	-49.57	-13	-36.57	-57.82	2.10	12.50	V
	3360	-58.10	-13	-45.10	-66.99	2.86	13.90	V
LTE B7 BW 20MHz Highest 1RB0,QPSK	5100	-54.16	-25	-29.16	-64.37	3.03	13.24	H
	7650	-53.36	-25	-28.36	-62.81	3.56	13.01	H
	10200	-49.49	-25	-24.49	-59.01	3.92	13.44	H
	5100	-54.59	-25	-29.59	-64.80	3.03	13.24	V
	7650	-53.52	-25	-28.52	-62.97	3.56	13.01	V
	10200	-49.47	-25	-24.47	-58.99	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_5A-66A (ANT0+5)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B5 BW 10MHz Lowest 1RB0,QPSK	1650	-62.67	-13	-49.67	-69.64	1.58	10.70	H
	2472	-58.38	-13	-45.38	-66.63	2.102	12.50	H
	3300	-58.20	-13	-45.20	-67.09	2.856	13.90	H
	1650	-62.03	-13	-49.03	-69.00	1.58	10.70	V
	2472	-58.49	-13	-45.49	-66.74	2.10	12.50	V
	3300	-58.39	-13	-45.39	-67.28	2.86	13.90	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-55.16	-13	-42.16	-65.90	2.604	13.34	H
	5130	-54.65	-13	-41.65	-65.16	3.011	13.52	H
	6840	-56.02	-13	-43.02	-66.22	3.271	13.47	H
	3420	-58.04	-13	-45.04	-68.78	2.604	13.34	V
	5130	-54.50	-13	-41.50	-65.01	3.011	13.52	V
	6840	-55.54	-13	-42.54	-65.74	3.271	13.47	V
LTE B5 BW 10MHz Middle 1RB0,QPSK	1664	-62.39	-13	-49.39	-69.36	1.58	10.70	H
	2496	-59.82	-13	-46.82	-68.07	2.102	12.50	H
	3330	-58.63	-13	-45.63	-67.52	2.856	13.90	H
	1664	-62.29	-13	-49.29	-69.26	1.58	10.70	V
	2496	-58.87	-13	-45.87	-67.12	2.10	12.50	V
	3330	-58.55	-13	-45.55	-67.44	2.86	13.90	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.38	-13	-44.38	-68.12	2.604	13.34	H
	5205	-54.73	-13	-41.73	-65.24	3.011	13.52	H
	6945	-55.49	-13	-42.49	-65.69	3.271	13.47	H
	3465	-57.95	-13	-44.95	-68.69	2.604	13.34	V
	5205	-54.82	-13	-41.82	-65.33	3.011	13.52	V
	6945	-55.80	-13	-42.80	-66.00	3.271	13.47	V
LTE B5 BW 10MHz Highest 1RB0,QPSK	1680	-60.05	-13	-47.05	-67.02	1.58	10.70	H
	2518	-58.88	-13	-45.88	-67.13	2.102	12.50	H
	3360	-58.46	-13	-45.46	-67.35	2.856	13.90	H
	1680	-61.00	-13	-48.00	-67.97	1.58	10.70	V
	2518	-58.68	-13	-45.68	-66.93	2.10	12.50	V
	3360	-57.70	-13	-44.70	-66.59	2.86	13.90	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.25	-13	-45.25	-68.99	2.604	13.34	H
	5280	-55.21	-13	-42.21	-65.72	3.011	13.52	H
	7050	-55.35	-13	-42.35	-65.55	3.271	13.47	H
	3525	-57.97	-13	-44.97	-68.71	2.604	13.34	V
	5280	-54.82	-13	-41.82	-65.33	3.011	13.52	V
	7050	-54.78	-13	-41.78	-64.98	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_12A-66A (ANT0+2)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B12 BW 10MHz Lowest 1RB0,QPSK	1400	-65.13	-13	-52.13	-72.10	1.58	10.70	H
	2098	-62.52	-13	-49.52	-70.77	2.102	12.50	H
	2798	-58.21	-13	-45.21	-67.10	2.856	13.90	H
	1400	-64.75	-13	-51.75	-71.72	1.58	10.70	V
	2098	-61.95	-13	-48.95	-70.20	2.10	12.50	V
	2798	-58.18	-13	-45.18	-67.07	2.86	13.90	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-57.85	-13	-44.85	-68.59	2.604	13.34	H
	5130	-52.34	-13	-39.34	-62.85	3.011	13.52	H
	6840	-55.83	-13	-42.83	-66.03	3.271	13.47	H
	3420	-58.01	-13	-45.01	-68.75	2.604	13.34	V
	5130	-54.55	-13	-41.55	-65.06	3.011	13.52	V
	6840	-55.76	-13	-42.76	-65.96	3.271	13.47	V
LTE B12 BW 10MHz Middle 1RB0,QPSK	1406	-61.38	-13	-48.38	-68.35	1.58	10.70	H
	2110	-61.56	-13	-48.56	-69.81	2.102	12.50	H
	2812	-58.50	-13	-45.50	-67.39	2.856	13.90	H
	1406	-62.10	-13	-49.10	-69.07	1.58	10.70	V
	2110	-60.89	-13	-47.89	-69.14	2.10	12.50	V
	2812	-58.12	-13	-45.12	-67.01	2.86	13.90	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.66	-13	-44.66	-68.40	2.604	13.34	H
	5205	-54.93	-13	-41.93	-65.44	3.011	13.52	H
	6945	-55.54	-13	-42.54	-65.74	3.271	13.47	H
	3465	-57.88	-13	-44.88	-68.62	2.604	13.34	V
	5205	-54.70	-13	-41.70	-65.21	3.011	13.52	V
	6945	-55.78	-13	-42.78	-65.98	3.271	13.47	V
LTE B12 BW 10MHz Highest 1RB0,QPSK	1414	-63.96	-13	-50.96	-70.93	1.58	10.70	H
	2120	-61.18	-13	-48.18	-69.43	2.102	12.50	H
	2826	-58.56	-13	-45.56	-67.45	2.856	13.90	H
	1414	-64.63	-13	-51.63	-71.60	1.58	10.70	V
	2120	-60.31	-13	-47.31	-68.56	2.10	12.50	V
	2826	-57.94	-13	-44.94	-66.83	2.86	13.90	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.41	-13	-45.41	-69.15	2.604	13.34	H
	5280	-55.21	-13	-42.21	-65.72	3.011	13.52	H
	7050	-55.68	-13	-42.68	-65.88	3.271	13.47	H
	3525	-58.63	-13	-45.63	-69.37	2.604	13.34	V
	5280	-55.27	-13	-42.27	-65.78	3.011	13.52	V
	7050	-55.34	-13	-42.34	-65.54	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



ULCA_13A-66A (ANT0+2)								
Channel	Frequency (MHz)	ERP/EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
LTE B13 BW 10MHz Lowest 1RB0,QPSK	1554	-60.40	-13	-47.40	-63.03	1.09	5.87	H
	2332	-60.90	-13	-47.90	-63.30	1.37	5.92	H
	3105	-58.02	-13	-45.02	-61.91	1.64	7.68	H
	1554	-60.23	-13	-47.23	-62.86	1.09	5.87	V
	2332	-59.41	-13	-46.41	-61.81	1.37	5.92	V
	3105	-57.74	-13	-44.74	-61.63	1.64	7.68	V
LTE B66 BW 20MHz Lowest 1RB0,QPSK	3420	-53.79	-13	-40.79	-64.53	2.604	13.34	H
	5130	-50.28	-13	-37.28	-60.79	3.011	13.52	H
	6840	-56.09	-13	-43.09	-66.29	3.271	13.47	H
	3420	-57.97	-13	-44.97	-68.71	2.604	13.34	V
	5130	-49.22	-13	-36.22	-59.73	3.011	13.52	V
	6840	-55.84	-13	-42.84	-66.04	3.271	13.47	V
LTE B13 BW 10MHz Middle 1RB0,QPSK	1560	-59.54	-42.15	-17.39	-62.17	1.09	5.87	H
	2340	-60.40	-13	-47.40	-62.80	1.37	5.92	H
	3120	-58.11	-13	-45.11	-62.00	1.64	7.68	H
	1560	-59.71	-42.15	-17.56	-62.34	1.09	5.87	V
	2340	-58.88	-13	-45.88	-61.28	1.37	5.92	V
	3120	-58.15	-13	-45.15	-62.04	1.64	7.68	V
LTE B66 BW 20MHz Middle 1RB0,QPSK	3465	-57.95	-13	-44.95	-68.69	2.604	13.34	H
	5205	-50.20	-13	-37.20	-60.71	3.011	13.52	H
	6945	-55.73	-13	-42.73	-65.93	3.271	13.47	H
	3465	-57.10	-13	-44.10	-67.84	2.604	13.34	V
	5205	-51.06	-13	-38.06	-61.57	3.011	13.52	V
	6945	-55.55	-13	-42.55	-65.75	3.271	13.47	V
LTE B13 BW 10MHz Highest 1RB0,QPSK	1564	-58.67	-42.15	-16.52	-61.30	1.09	5.87	H
	2348	-60.75	-13	-47.75	-63.15	1.37	5.92	H
	3135	-57.71	-13	-44.71	-61.60	1.64	7.68	H
	1564	-58.68	-42.15	-16.53	-61.31	1.09	5.87	V
	2348	-59.06	-13	-46.06	-61.46	1.37	5.92	V
	3135	-58.18	-13	-45.18	-62.07	1.64	7.68	V
LTE B66 BW 20MHz Highest 1RB0,QPSK	3525	-58.00	-13	-45.00	-68.74	2.604	13.34	H
	5280	-53.66	-13	-40.66	-64.17	3.011	13.52	H
	7050	-55.39	-13	-42.39	-65.59	3.271	13.47	H
	3525	-58.16	-13	-45.16	-68.90	2.604	13.34	V
	5280	-52.08	-13	-39.08	-62.59	3.011	13.52	V
	7050	-55.73	-13	-42.73	-65.93	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.