




Appendix C. Test Result and Data (1GHz ~ 40GHz)

SISO-ANT A

Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

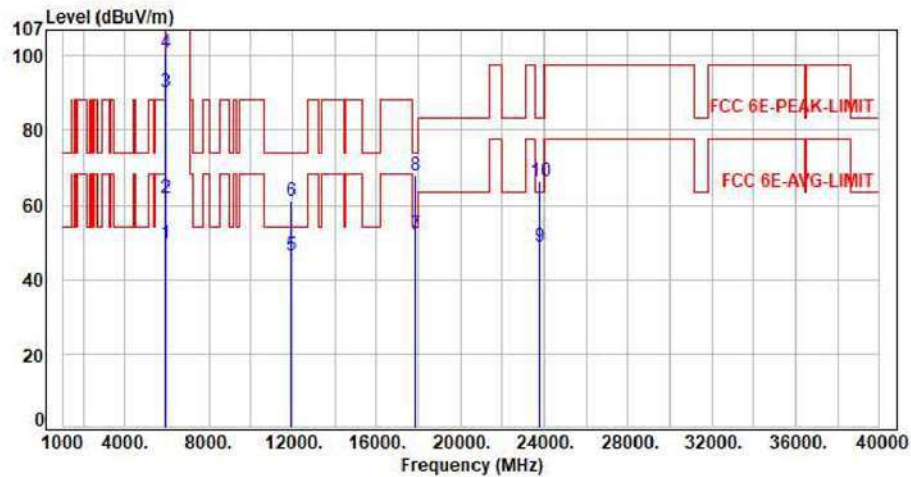


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.80	49.53	68.20	-18.67	Average	100	315	P
2	5925.00	7.73	54.04	61.77	88.20	-26.43	Peak	100	315	P
3	5955.00	7.79	82.67	90.46	200.00	-109.54	Average	100	315	P
4	5955.00	7.79	93.15	100.94	200.00	-99.06	Peak	100	315	P
5	11910.00	16.61	29.67	46.28	54.00	-7.72	Average	100	114	P
6	11910.00	16.61	44.56	61.17	74.00	-12.83	Peak	100	114	P
7	17865.00	26.42	25.67	52.09	54.00	-1.91	Average	100	224	P
8	17865.00	26.42	41.62	68.04	74.00	-5.96	Peak	100	224	P
9	23820.00	9.80	39.19	48.99	63.54	-14.55	Average	150	360	P
10	23820.00	9.80	56.71	66.51	83.54	-17.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

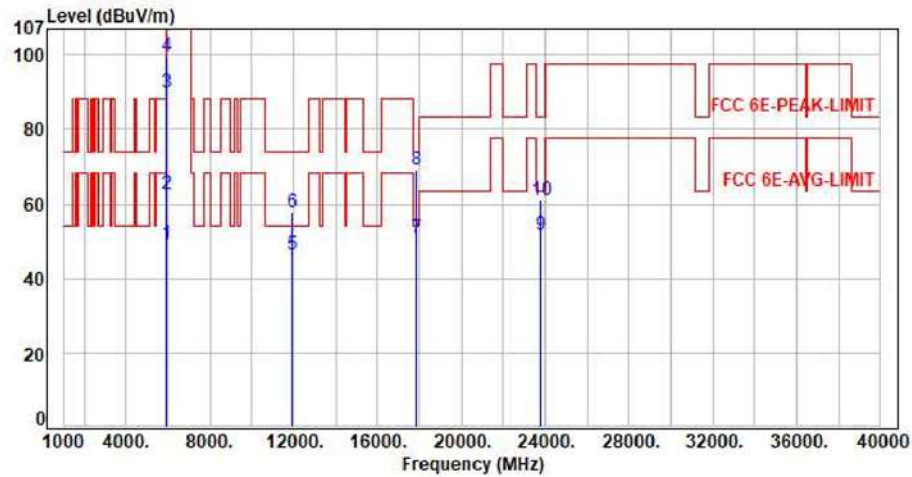


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.42	49.15	68.20	-19.05	Average	100	313	P
2	5925.00	7.73	54.98	62.71	88.20	-25.49	Peak	100	313	P
3	5955.00	7.79	81.93	89.72	200.00	-110.28	Average	100	313	P
4	5955.00	7.79	91.81	99.60	200.00	-100.40	Peak	100	313	P
5	11910.00	16.61	29.77	46.38	54.00	-7.62	Average	100	138	P
6	11910.00	16.61	41.33	57.94	74.00	-16.06	Peak	100	138	P
7	17865.00	26.42	24.47	50.89	54.00	-3.11	Average	100	123	P
8	17865.00	26.42	42.62	69.04	74.00	-4.96	Peak	100	123	P
9	23820.00	9.80	41.68	51.48	63.54	-12.06	Average	150	360	P
10	23820.00	9.80	51.32	61.12	83.54	-22.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

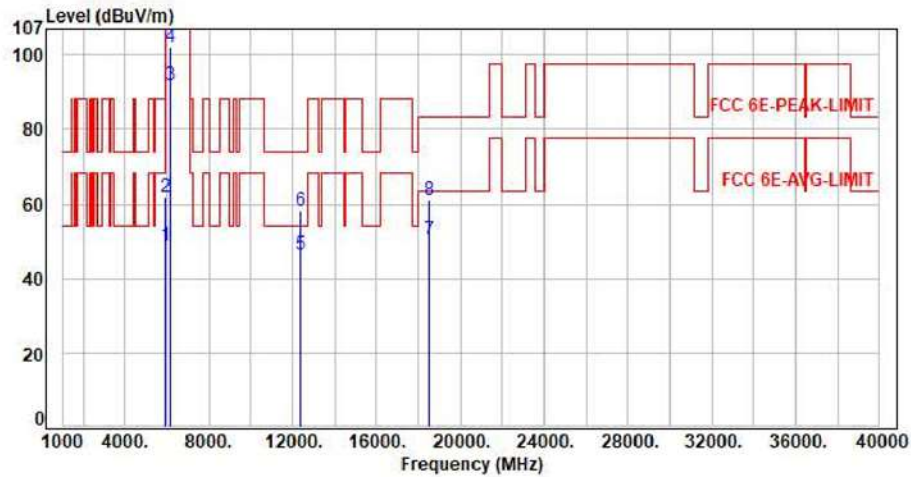

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.18	48.91	68.20	-19.29	Average	100	308	P
2	5925.00	7.73	54.00	61.73	88.20	-26.47	Peak	100	308	P
3	6175.00	8.36	83.48	91.84	200.00	-108.16	Average	100	308	P
4	6175.00	8.36	93.80	102.16	200.00	-97.84	Peak	100	308	P
5	12350.00	16.58	29.73	46.31	54.00	-7.69	Average	100	138	P
6	12350.00	16.58	41.76	58.34	74.00	-15.66	Peak	100	138	P
7	18525.00	9.06	41.33	50.39	63.54	-13.15	Average	150	360	P
8	18525.00	9.06	51.96	61.02	83.54	-22.52	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH45 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

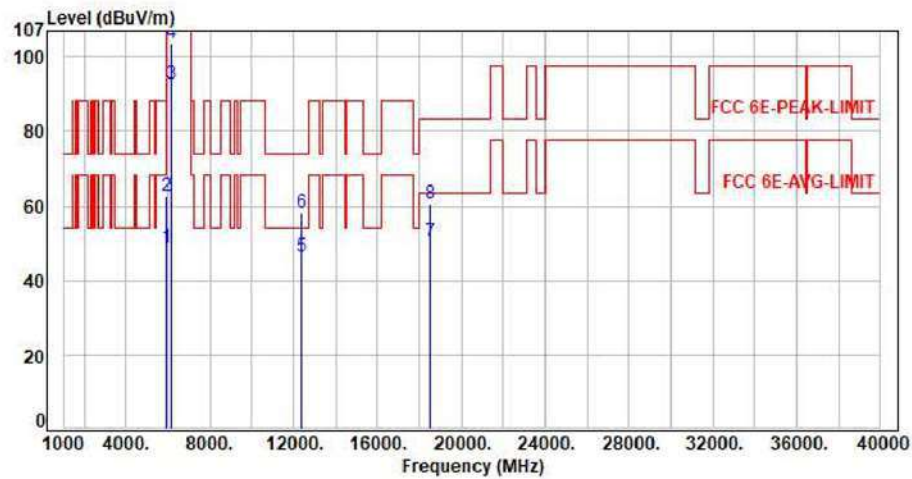

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.17	48.90	68.20	-19.30	Average	100	316	P
2	5925.00	7.73	54.73	62.46	88.20	-25.74	Peak	100	316	P
3	6175.00	8.36	84.32	92.68	200.00	-107.32	Average	100	316	P
4	6175.00	8.36	95.22	103.58	200.00	-96.42	Peak	100	316	P
5	12350.00	16.58	29.73	46.31	54.00	-7.69	Average	100	224	P
6	12350.00	16.58	41.61	58.19	74.00	-15.81	Peak	100	224	P
7	18525.00	9.06	41.30	50.36	63.54	-13.18	Average	150	360	P
8	18525.00	9.06	51.47	60.53	83.54	-23.01	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

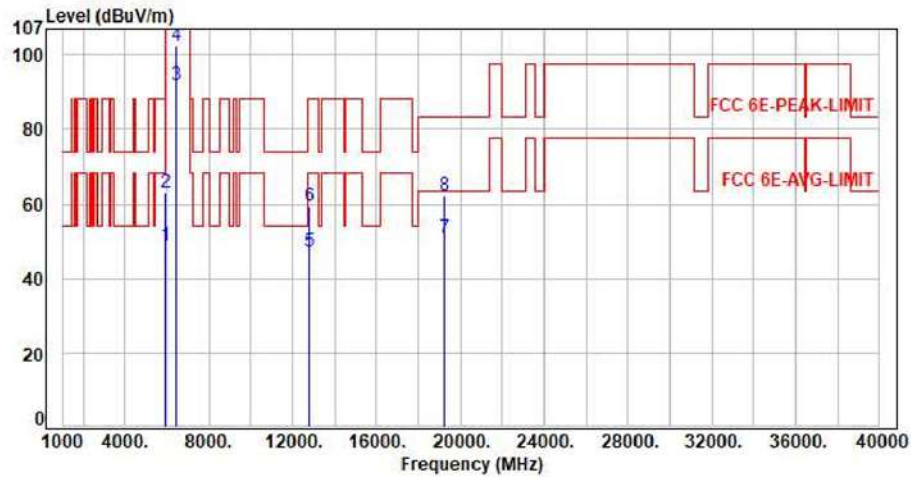

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.19	48.92	68.20	-19.28	Average	105	317	P
2	5925.00	7.73	55.37	63.10	88.20	-25.10	Peak	105	317	P
3	6415.00	8.42	83.43	91.85	200.00	-108.15	Average	105	317	P
4	6415.00	8.42	94.13	102.55	200.00	-97.45	Peak	105	317	P
5	12830.00	17.78	29.47	47.25	68.20	-20.95	Average	100	217	P
6	12830.00	17.78	41.66	59.44	88.20	-28.76	Peak	100	217	P
7	19245.00	9.42	41.33	50.75	63.54	-12.79	Average	150	360	P
8	19245.00	9.42	52.74	62.16	83.54	-21.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH93 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

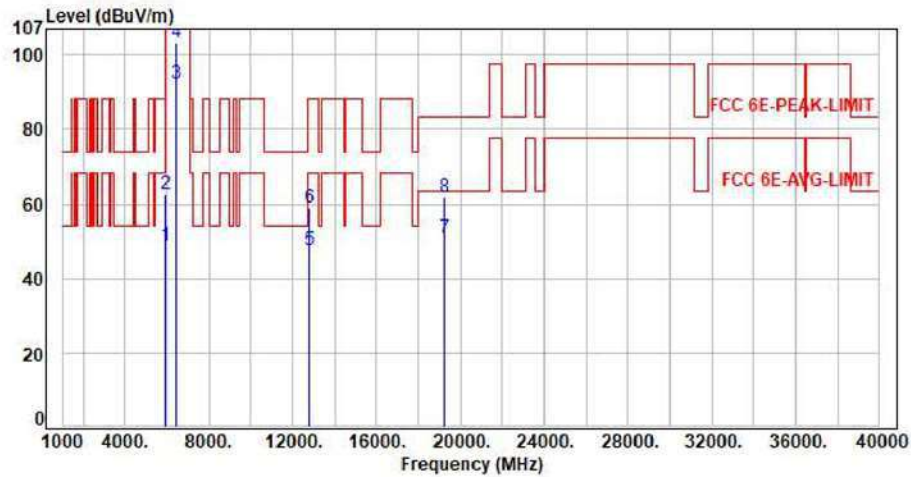


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.20	48.93	68.20	-19.27	Average	100	315	P
2	5925.00	7.73	55.09	62.82	88.20	-25.38	Peak	100	315	P
3	6415.00	8.42	83.90	92.32	200.00	-107.68	Average	100	315	P
4	6415.00	8.42	94.79	103.21	200.00	-96.79	Peak	100	315	P
5	12830.00	17.78	29.74	47.52	68.20	-20.68	Average	100	227	P
6	12830.00	17.78	41.33	59.11	88.20	-29.09	Peak	100	227	P
7	19245.00	9.42	41.33	50.75	63.54	-12.79	Average	150	360	P
8	19245.00	9.42	52.41	61.83	83.54	-21.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

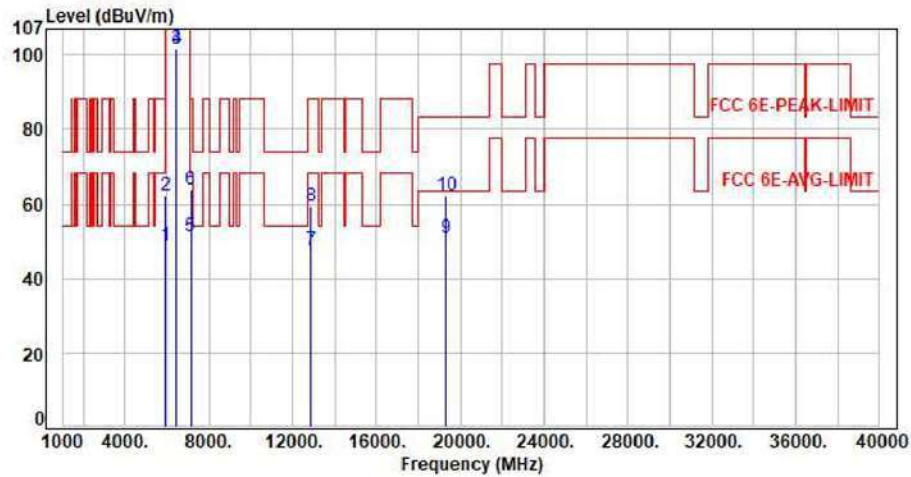


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.28	49.01	68.20	-19.19	Average	100	316	P
2	5925.00	7.73	54.35	62.08	88.20	-26.12	Peak	100	316	P
3	6435.00	8.36	93.49	101.85	200.00	-98.15	Average	100	316	P
4	6435.00	8.36	93.43	101.79	200.00	-98.21	Peak	100	316	P
5	7125.00	9.92	41.37	51.29	68.20	-16.91	Average	100	316	P
6	7125.00	9.92	53.95	63.87	88.20	-24.33	Peak	100	316	P
7	12870.00	17.98	29.74	47.72	68.20	-20.48	Average	100	112	P
8	12870.00	17.98	41.28	59.26	88.20	-28.94	Peak	100	112	P
9	19305.00	9.63	41.33	50.96	63.54	-12.58	Average	150	360	P
10	19305.00	9.63	52.77	62.40	83.54	-21.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH97 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

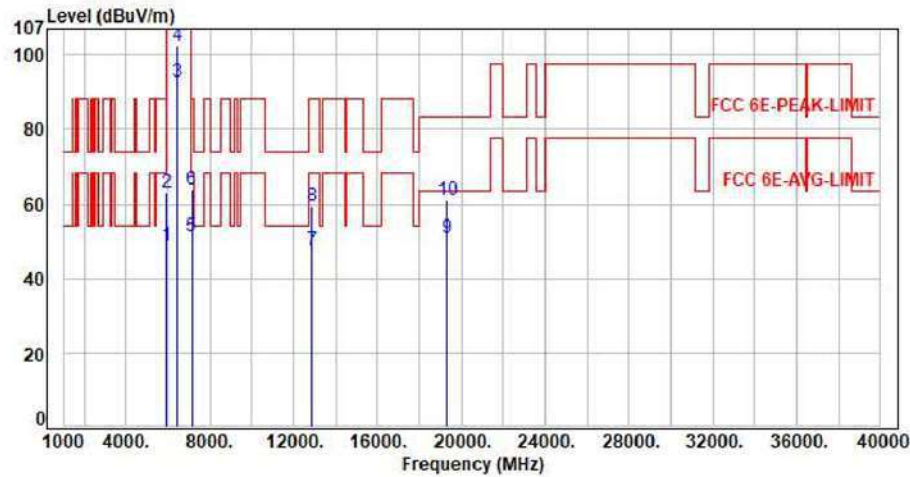


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.20	48.93	68.20	-19.27	Average	100	319	P
2	5925.00	7.73	55.46	63.19	88.20	-25.01	Peak	100	319	P
3	6435.00	8.36	84.28	92.64	200.00	-107.36	Average	100	319	P
4	6435.00	8.36	94.35	102.71	200.00	-97.29	Peak	100	319	P
5	7125.00	9.92	41.23	51.15	68.20	-17.05	Average	100	319	P
6	7125.00	9.92	53.96	63.88	88.20	-24.32	Peak	100	319	P
7	12870.00	17.98	29.64	47.62	68.20	-20.58	Average	100	221	P
8	12870.00	17.98	41.36	59.34	88.20	-28.86	Peak	100	221	P
9	19305.00	9.63	41.33	50.96	63.54	-12.58	Average	150	360	P
10	19305.00	9.63	51.38	61.01	83.54	-22.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 1la CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

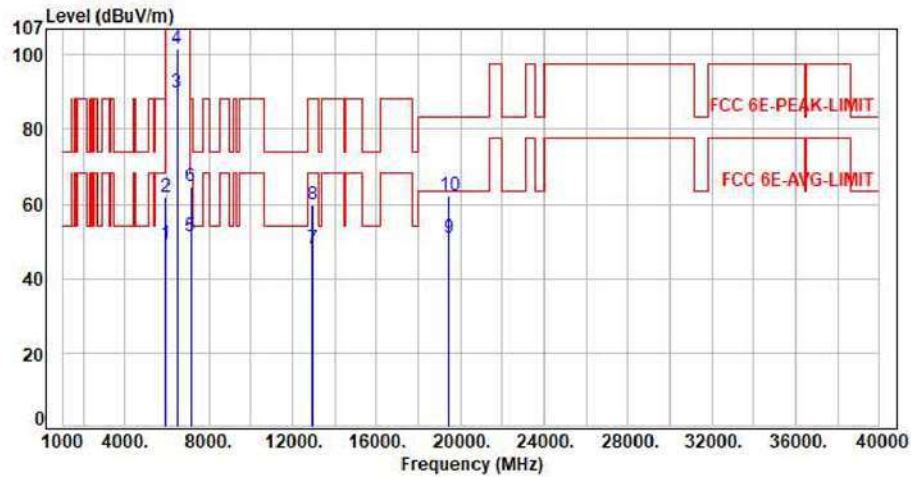


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.61	49.34	68.20	-18.86	Average	100	329	P
2	5925.00	7.73	53.91	61.64	88.20	-26.56	Peak	100	329	P
3	6475.00	8.34	81.60	89.94	200.00	-110.06	Average	100	329	P
4	6475.00	8.34	93.35	101.69	200.00	-98.31	Peak	100	329	P
5	7125.00	9.92	41.15	51.07	68.20	-17.13	Average	100	329	P
6	7125.00	9.92	54.72	64.64	88.20	-23.56	Peak	100	329	P
7	12950.00	18.39	29.47	47.86	68.20	-20.34	Average	100	193	P
8	12950.00	18.39	41.36	59.75	88.20	-28.45	Peak	100	193	P
9	19425.00	10.06	40.90	50.96	63.54	-12.58	Average	150	360	P
10	19425.00	10.06	52.01	62.07	83.54	-21.47	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH105 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

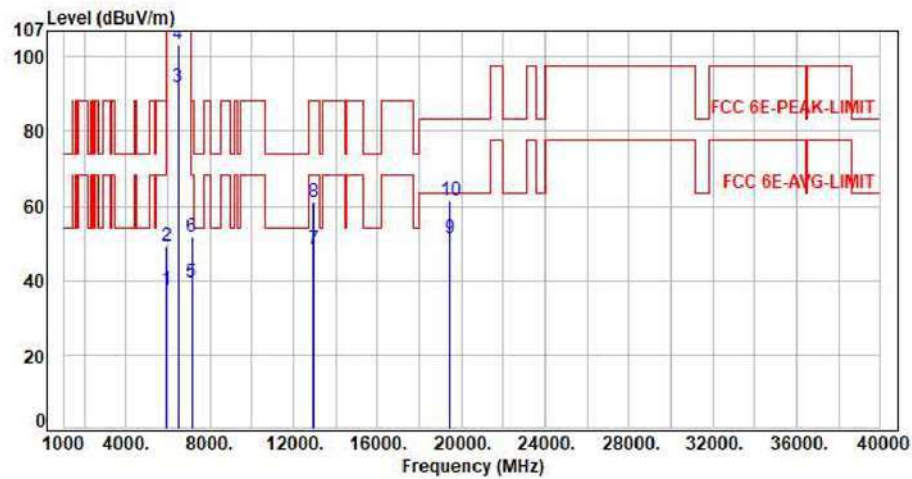


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.88	37.61	68.20	-30.59	Average	100	310	P
2	5925.00	7.73	41.33	49.06	88.20	-39.14	Peak	100	310	P
3	6475.00	8.34	83.56	91.90	200.00	-108.10	Average	100	310	P
4	6475.00	8.34	94.95	103.29	200.00	-96.71	Peak	100	310	P
5	7125.00	9.92	29.64	39.56	68.20	-28.64	Average	100	310	P
6	7125.00	9.92	41.61	51.53	88.20	-36.67	Peak	100	310	P
7	12950.00	18.39	29.88	48.27	68.20	-19.93	Average	100	214	P
8	12950.00	18.39	42.77	61.16	88.20	-27.04	Peak	100	214	P
9	19425.00	10.06	41.39	51.45	63.54	-12.09	Average	150	360	P
10	19425.00	10.06	51.34	61.40	83.54	-22.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 1la CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

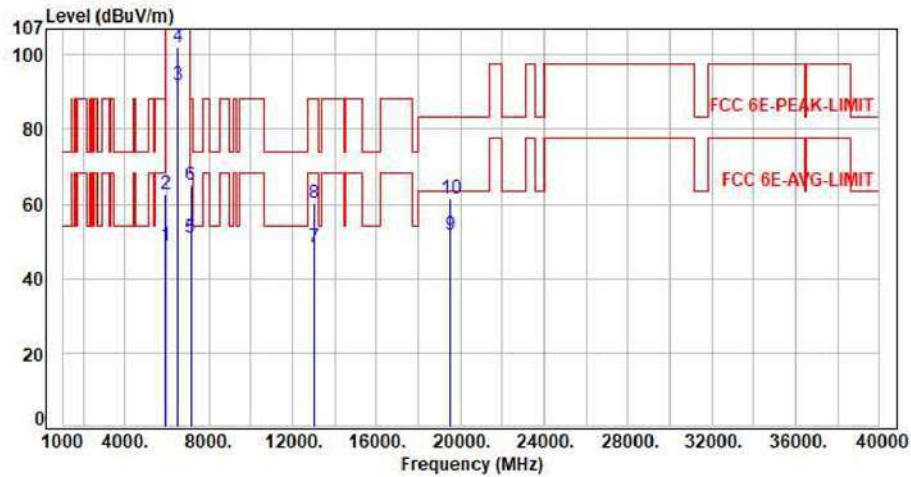


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.22	48.95	68.20	-19.25	Average	100	308	P
2	5925.00	7.73	54.76	62.49	88.20	-25.71	Peak	100	308	P
3	6515.00	8.45	83.66	92.11	200.00	-107.89	Average	100	308	P
4	6515.00	8.45	93.76	102.21	200.00	-97.79	Peak	100	308	P
5	7125.00	9.92	41.07	50.99	68.20	-17.21	Average	100	308	P
6	7125.00	9.92	55.34	65.26	88.20	-22.94	Peak	100	308	P
7	13030.00	18.71	29.77	48.48	68.20	-19.72	Average	100	221	P
8	13030.00	18.71	41.39	60.10	88.20	-28.10	Peak	100	221	P
9	19545.00	10.24	41.36	51.60	63.54	-11.94	Average	100	221	P
10	19545.00	10.24	51.36	61.60	83.54	-21.94	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 1la CH113 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

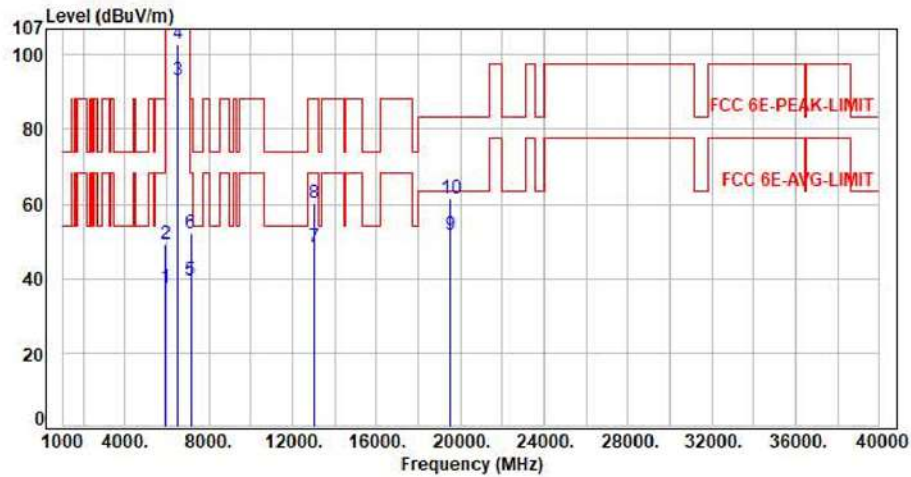


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.66	37.39	68.20	-30.81	Average	100	311	P
2	5925.00	7.73	41.66	49.39	88.20	-38.81	Peak	100	311	P
3	6515.00	8.45	84.56	93.01	200.00	-106.99	Average	100	311	P
4	6515.00	8.45	94.39	102.84	200.00	-97.16	Peak	100	311	P
5	7125.00	9.92	29.47	39.39	68.20	-28.81	Average	100	311	P
6	7125.00	9.92	42.18	52.10	88.20	-36.10	Peak	100	311	P
7	13030.00	18.71	29.64	48.35	68.20	-19.85	Average	100	221	P
8	13030.00	18.71	41.36	60.07	88.20	-28.13	Peak	100	221	P
9	19545.00	10.24	41.55	51.79	63.54	-11.75	Average	150	360	P
10	19545.00	10.24	51.34	61.58	83.54	-21.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

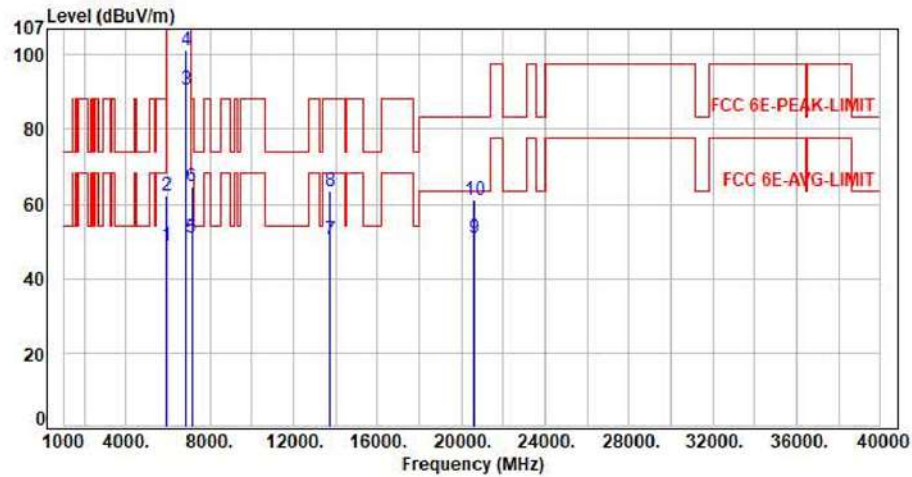


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.29	49.02	68.20	-19.18	Average	100	146	P
2	5925.00	7.73	54.32	62.05	88.20	-26.15	Peak	100	146	P
3	6875.00	9.47	81.41	90.88	200.00	-109.12	Average	100	146	P
4	6875.00	9.47	91.89	101.36	200.00	-98.64	Peak	100	146	P
5	7125.00	9.92	41.12	51.04	68.20	-17.16	Average	100	146	P
6	7125.00	9.92	54.77	64.69	88.20	-23.51	Peak	100	146	P
7	13750.00	21.47	29.17	50.64	68.20	-17.56	Average	100	112	P
8	13750.00	21.47	41.92	63.39	88.20	-24.81	Peak	100	112	P
9	20625.00	9.65	41.35	51.00	63.54	-12.54	Average	150	360	P
10	20625.00	9.65	51.39	61.04	83.54	-22.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH185 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

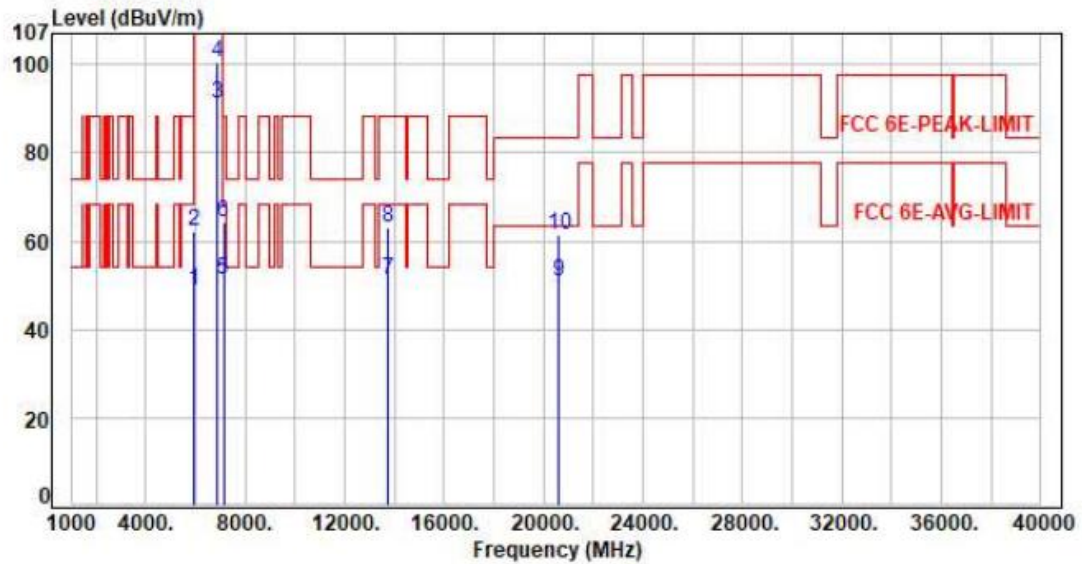

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.12	48.85	68.20	-19.35	Average	100	318	P
2	5925.00	7.73	54.35	62.08	88.20	-26.12	Peak	100	318	P
3	6875.00	9.47	81.53	91.00	200.00	-109.00	Average	100	318	P
4	6875.00	9.47	90.99	100.46	200.00	-99.54	Peak	100	318	P
5	7125.00	9.92	41.14	51.06	68.20	-17.14	Average	100	318	P
6	7125.00	9.92	54.40	64.32	88.20	-23.88	Peak	100	318	P
7	13750.00	21.47	29.66	51.13	68.20	-17.07	Average	100	228	P
8	13750.00	21.47	41.55	63.02	88.20	-25.18	Peak	100	228	P
9	20625.00	9.65	41.21	50.86	63.54	-12.68	Average	150	360	P
10	20625.00	9.65	51.74	61.39	83.54	-22.15	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 1la CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

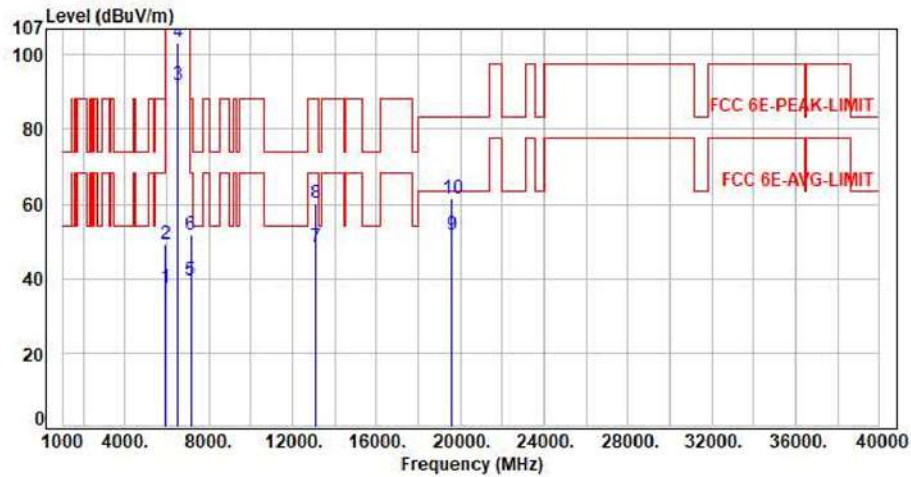


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.66	37.39	68.20	-30.81	Average	335	311	P
2	5925.00	7.73	41.68	49.41	88.20	-38.79	Peak	335	311	P
3	6535.00	8.57	83.46	92.03	200.00	-107.97	Average	335	311	P
4	6535.00	8.57	94.63	103.20	200.00	-96.80	Peak	335	311	P
5	7125.00	9.92	29.74	39.66	68.20	-28.54	Average	335	311	P
6	7125.00	9.92	41.82	51.74	88.20	-36.46	Peak	335	311	P
7	13070.00	18.92	29.43	48.35	68.20	-19.85	Average	100	149	P
8	13070.00	18.92	41.35	60.27	88.20	-27.93	Peak	100	149	P
9	19605.00	10.26	41.33	51.59	63.54	-11.95	Average	100	229	P
10	19605.00	10.26	51.23	61.49	83.54	-22.05	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH117 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

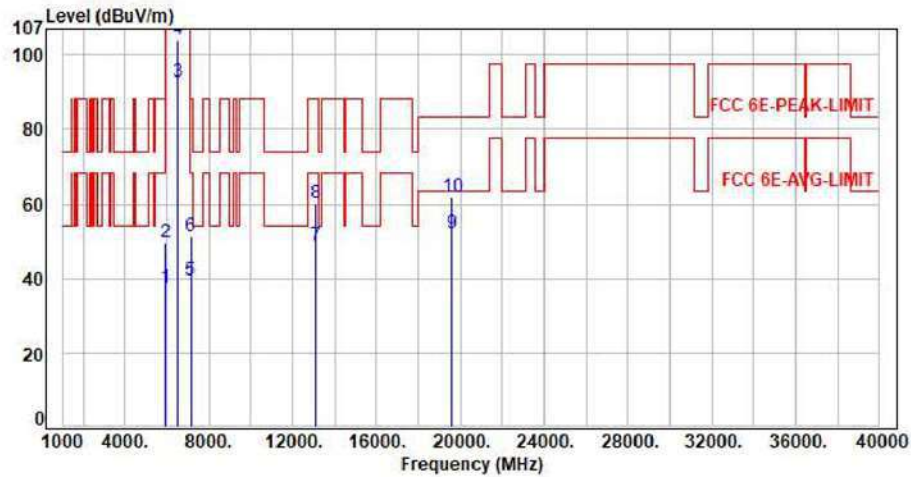


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.74	37.47	68.20	-30.73	Average	100	309	P
2	5925.00	7.73	41.88	49.61	88.20	-38.59	Peak	100	309	P
3	6535.00	8.57	84.07	92.64	200.00	-107.36	Average	100	309	P
4	6535.00	8.57	95.46	104.03	200.00	-95.97	Peak	100	309	P
5	7125.00	9.92	29.67	39.59	68.20	-28.61	Average	100	309	P
6	7125.00	9.92	41.33	51.25	88.20	-36.95	Peak	100	309	P
7	13070.00	18.92	29.73	48.65	68.20	-19.55	Average	100	318	P
8	13070.00	18.92	41.23	60.15	88.20	-28.05	Peak	100	318	P
9	19605.00	10.26	41.66	51.92	63.54	-11.62	Average	150	360	P
10	19605.00	10.26	51.38	61.64	83.54	-21.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 1la CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

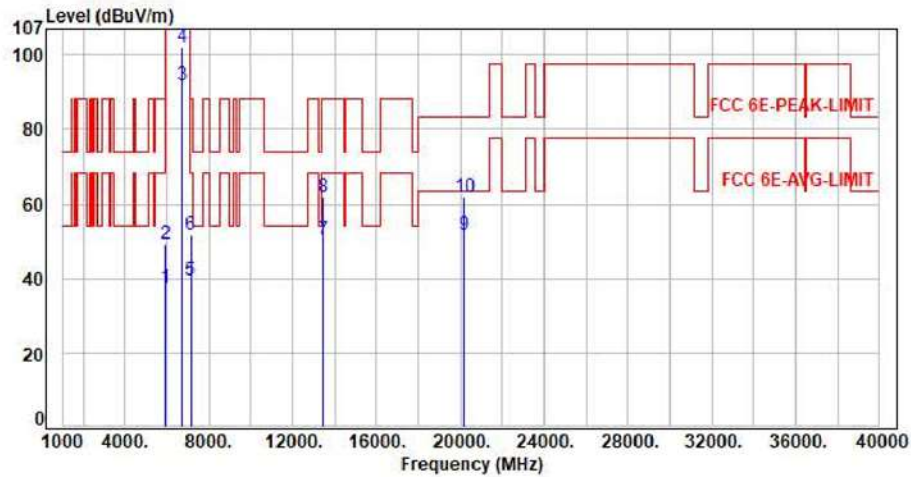


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.66	37.39	68.20	-30.81	Average	100	142	P
2	5925.00	7.73	41.36	49.09	88.20	-39.11	Peak	100	142	P
3	6715.00	9.20	82.59	91.79	200.00	-108.21	Average	100	142	P
4	6715.00	9.20	93.06	102.26	200.00	-97.74	Peak	100	142	P
5	7125.00	9.92	29.47	39.39	68.20	-28.81	Average	100	142	P
6	7125.00	9.92	41.86	51.78	88.20	-36.42	Peak	100	142	P
7	13430.00	20.57	30.00	50.57	68.20	-17.63	Average	100	217	P
8	13430.00	20.57	41.39	61.96	88.20	-26.24	Peak	100	217	P
9	20145.00	10.14	41.66	51.80	63.54	-11.74	Average	150	360	P
10	20145.00	10.14	51.66	61.80	83.54	-21.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

SISO-ANT A



Test Mode : 1TX 11a CH153 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

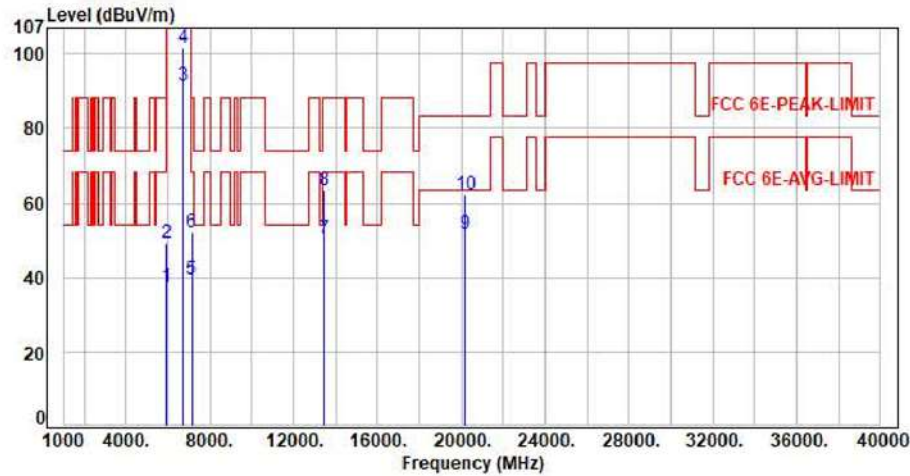


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.66	37.39	68.20	-30.81	Average	100	313	P
2	5925.00	7.73	41.33	49.06	88.20	-39.14	Peak	100	313	P
3	6715.00	9.20	82.43	91.63	200.00	-108.37	Average	100	313	P
4	6715.00	9.20	92.63	101.83	200.00	-98.17	Peak	100	313	P
5	7125.00	9.92	29.74	39.66	68.20	-28.54	Average	100	313	P
6	7125.00	9.92	41.97	51.89	88.20	-36.31	Peak	100	313	P
7	13430.00	20.57	29.75	50.32	68.20	-17.88	Average	100	138	P
8	13430.00	20.57	42.72	63.29	88.20	-24.91	Peak	100	138	P
9	20145.00	10.14	41.33	51.47	63.54	-12.07	Average	150	360	P
10	20145.00	10.14	51.99	62.13	83.54	-21.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

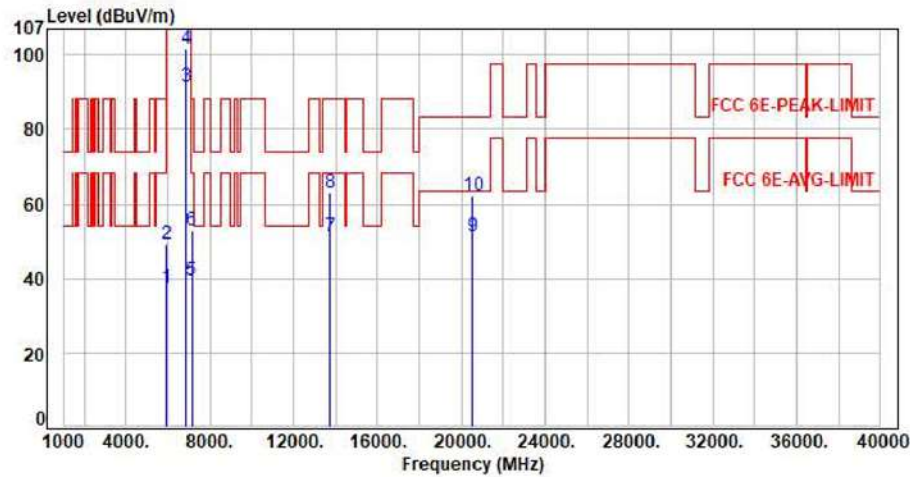


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.67	37.40	68.20	-30.80	Average	100	143	P
2	5925.00	7.73	41.39	49.12	88.20	-39.08	Peak	100	143	P
3	6855.00	9.48	81.97	91.45	200.00	-108.55	Average	100	143	P
4	6855.00	9.48	92.43	101.91	200.00	-98.09	Peak	100	143	P
5	7125.00	9.92	29.74	39.66	68.20	-28.54	Average	100	143	P
6	7125.00	9.92	42.91	52.83	88.20	-35.37	Peak	100	143	P
7	13710.00	21.36	29.75	51.11	68.20	-17.09	Average	100	162	P
8	13710.00	21.36	41.63	62.99	88.20	-25.21	Peak	100	162	P
9	20565.00	9.83	41.52	51.35	63.54	-12.19	Average	150	360	P
10	20565.00	9.83	52.34	62.17	83.54	-21.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH181 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

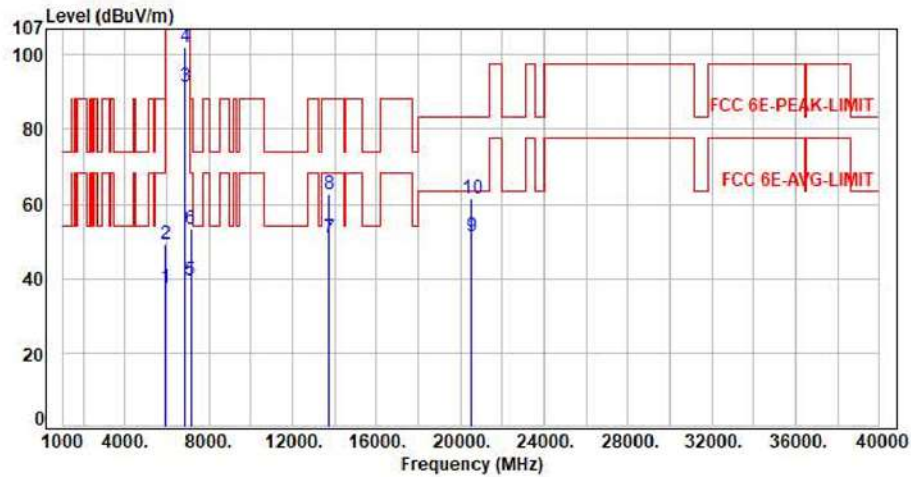


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	29.90	37.63	68.20	-30.57	Average	100	348	P
2	5925.00	7.73	41.38	49.11	88.20	-39.09	Peak	100	348	P
3	6855.00	9.48	82.16	91.64	200.00	-108.36	Average	100	348	P
4	6855.00	9.48	92.50	101.98	200.00	-98.02	Peak	100	348	P
5	7125.00	9.92	29.74	39.66	68.20	-28.54	Average	100	348	P
6	7125.00	9.92	43.28	53.20	88.20	-35.00	Peak	100	348	P
7	13710.00	21.36	29.67	51.03	68.20	-17.17	Average	100	221	P
8	13710.00	21.36	41.39	62.75	88.20	-25.45	Peak	100	221	P
9	20565.00	9.83	41.60	51.43	63.54	-12.11	Average	150	360	P
10	20565.00	9.83	51.74	61.57	83.54	-21.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

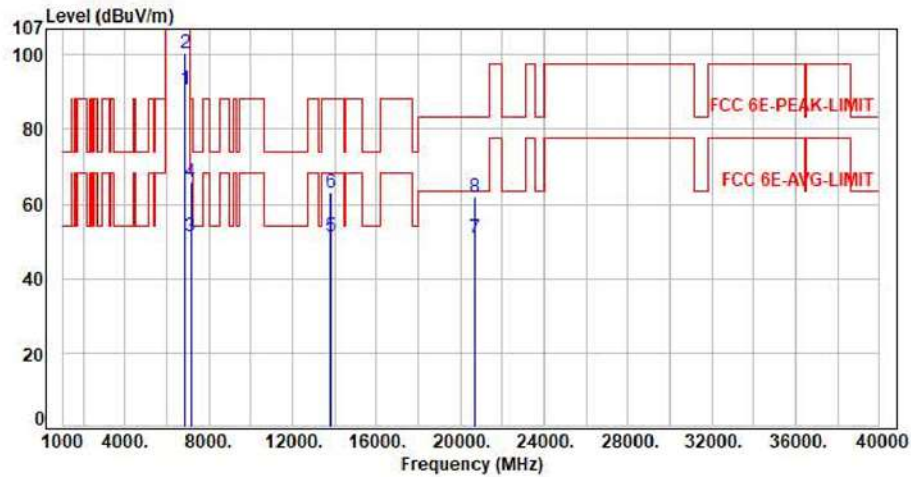


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	81.08	90.56	200.00	-109.44	Average	100	146	P
2	6895.00	9.48	91.08	100.56	200.00	-99.44	Peak	100	146	P
3	7125.00	9.92	41.19	51.11	68.20	-17.09	Average	100	146	P
4	7125.00	9.92	55.97	65.89	88.20	-22.31	Peak	100	146	P
5	13790.00	21.66	29.43	51.09	68.20	-17.11	Average	100	142	P
6	13790.00	21.66	41.38	63.04	88.20	-25.16	Peak	100	142	P
7	20685.00	9.82	41.20	51.02	63.54	-12.52	Average	150	360	P
8	20685.00	9.82	51.99	61.81	83.54	-21.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH189 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

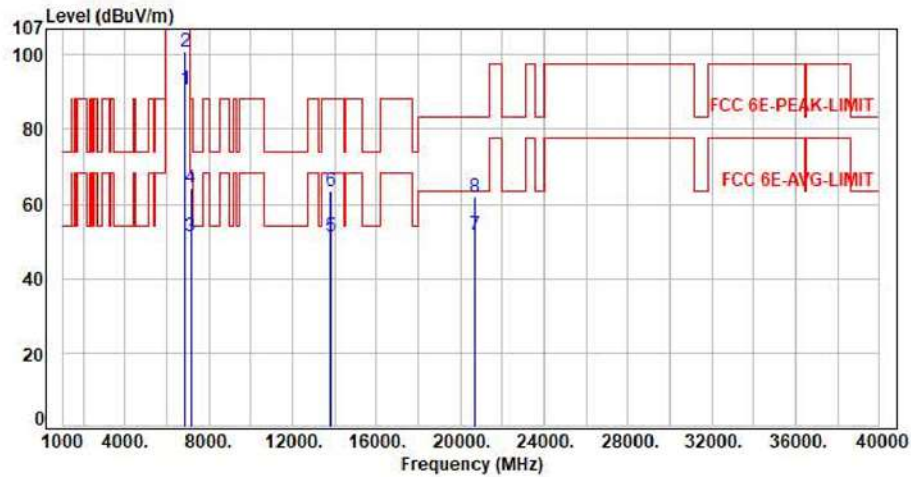


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.48	81.12	90.60	200.00	-109.40	Average	100	350	P
2	6895.00	9.48	91.29	100.77	200.00	-99.23	Peak	100	350	P
3	7125.00	9.92	41.32	51.24	68.20	-16.96	Average	100	350	P
4	7125.00	9.92	54.50	64.42	88.20	-23.78	Peak	100	350	P
5	13790.00	21.66	29.73	51.39	68.20	-16.81	Average	100	118	P
6	13790.00	21.66	41.61	63.27	88.20	-24.93	Peak	100	118	P
7	20685.00	9.82	41.66	51.48	63.54	-12.06	Average	150	360	P
8	20685.00	9.82	51.85	61.67	83.54	-21.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

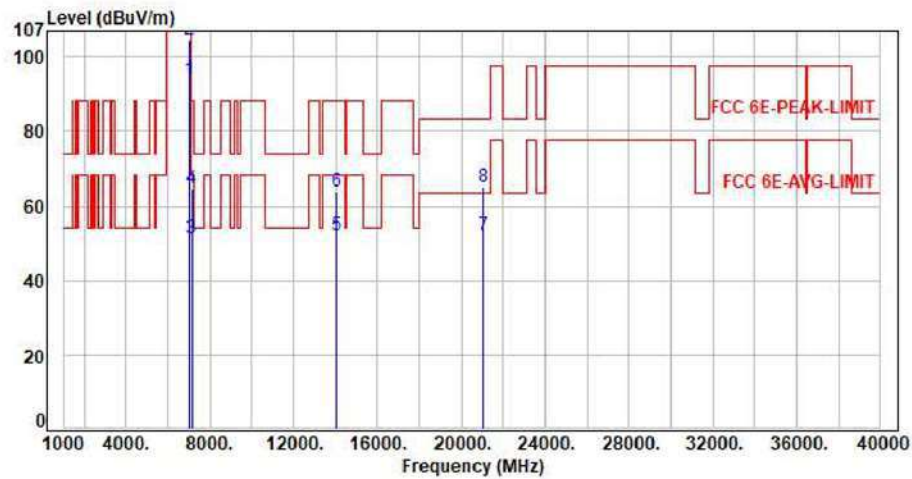

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	84.47	94.06	200.00	-105.94	Average	100	98	P
2	7015.00	9.59	94.79	104.38	200.00	-95.62	Peak	100	98	P
3	7125.00	9.92	41.18	51.10	68.20	-17.10	Average	100	98	P
4	7125.00	9.92	54.58	64.50	88.20	-23.70	Peak	100	98	P
5	14030.00	22.33	29.76	52.09	68.20	-16.11	Average	100	250	P
6	14030.00	22.33	41.37	63.70	88.20	-24.50	Peak	100	250	P
7	21045.00	10.28	41.68	51.96	63.54	-11.58	Average	150	360	P
8	21045.00	10.28	54.88	65.16	83.54	-18.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH213 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

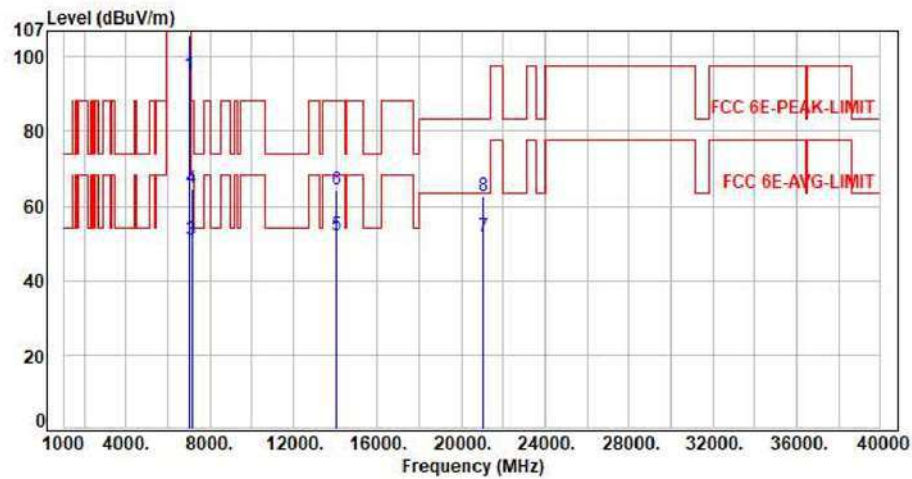

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.59	85.68	95.27	200.00	-104.73	Average	100	310	P
2	7015.00	9.59	96.12	105.71	200.00	-94.29	Peak	100	310	P
3	7125.00	9.92	41.09	51.01	68.20	-17.19	Average	100	310	P
4	7125.00	9.92	54.64	64.56	88.20	-23.64	Peak	100	310	P
5	14030.00	22.33	29.65	51.98	68.20	-16.22	Average	100	351	P
6	14030.00	22.33	41.84	64.17	88.20	-24.03	Peak	100	351	P
7	21045.00	10.28	41.36	51.64	63.54	-11.90	Average	150	360	P
8	21045.00	10.28	52.17	62.45	83.54	-21.09	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

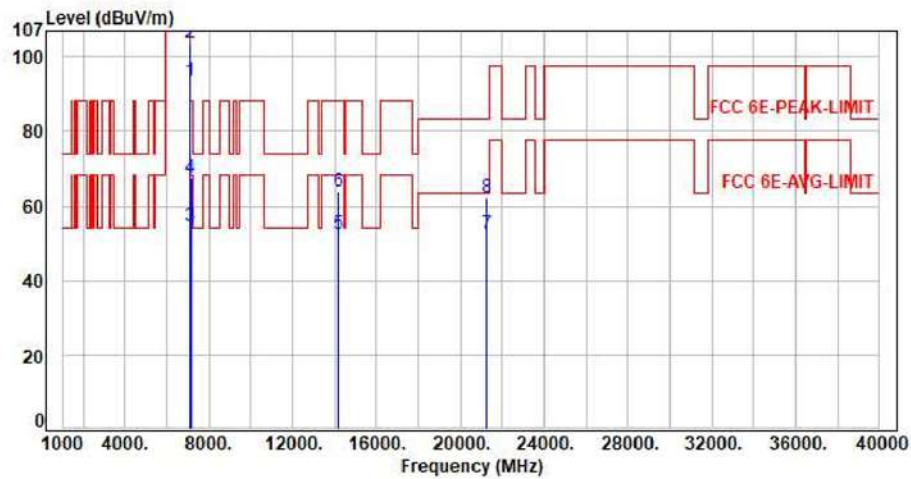

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	83.74	93.53	200.00	-106.47	Average	100	123	P
2	7095.00	9.79	93.94	103.73	200.00	-96.27	Peak	100	123	P
3	7125.00	9.92	44.46	54.38	68.20	-13.82	Average	100	123	P
4	7125.00	9.92	57.49	67.41	88.20	-20.79	Peak	100	123	P
5	14190.00	22.77	29.74	52.51	68.20	-15.69	Average	100	196	P
6	14190.00	22.77	41.14	63.91	88.20	-24.29	Peak	100	196	P
7	21285.00	10.94	41.39	52.33	63.54	-11.21	Average	150	360	P
8	21285.00	10.94	51.33	62.27	83.54	-21.27	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH229 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

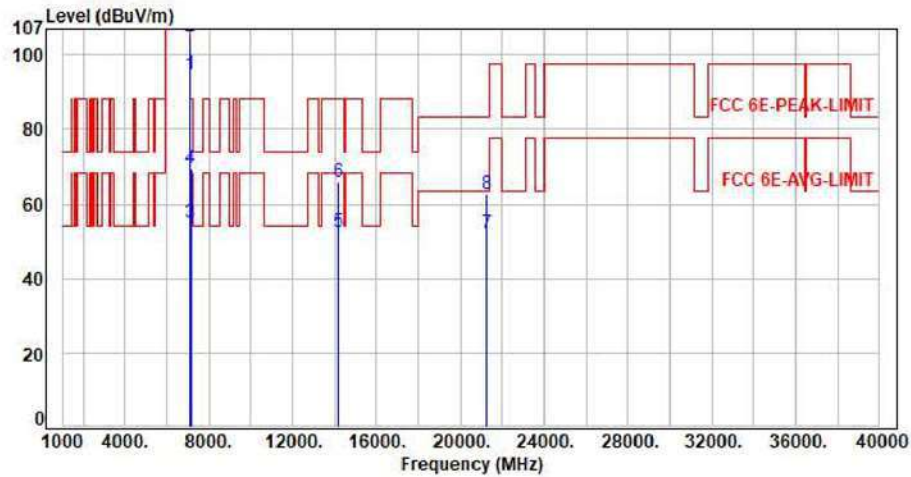


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.79	85.13	94.92	200.00	-105.08	Average	100	324	P
2	7095.00	9.79	95.23	105.02	200.00	-94.98	Peak	100	324	P
3	7125.00	9.92	45.17	55.09	68.20	-13.11	Average	100	324	P
4	7125.00	9.92	59.80	69.72	88.20	-18.48	Peak	100	324	P
5	14190.00	22.77	29.74	52.51	68.20	-15.69	Average	100	112	P
6	14190.00	22.77	43.33	66.10	88.20	-22.10	Peak	100	112	P
7	21285.00	10.94	41.33	52.27	63.54	-11.27	Average	150	360	P
8	21285.00	10.94	51.66	62.60	83.54	-20.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

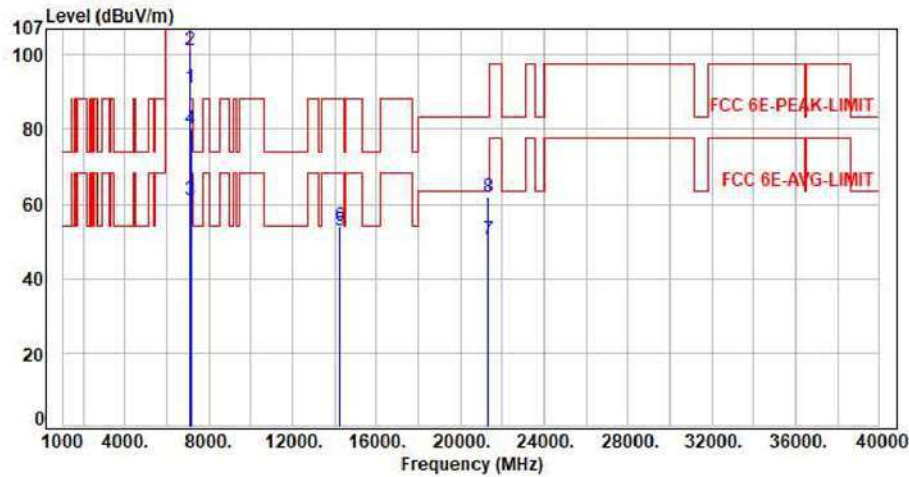


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	81.38	91.25	200.00	-108.75	Average	100	321	P
2	7115.00	9.87	91.37	101.24	200.00	-98.76	Peak	100	321	P
3	7125.00	9.92	51.23	61.15	68.20	-7.05	Average	100	321	P
4	7125.00	9.92	70.40	80.32	88.20	-7.88	Peak	100	321	P
5	14230.00	22.90	29.89	52.79	68.20	-15.41	Average	100	195	P
6	14230.00	22.90	31.29	54.19	88.20	-34.01	Peak	100	195	P
7	21345.00	10.74	39.82	50.56	63.54	-12.98	Average	150	360	P
8	21345.00	10.74	51.28	62.02	83.54	-21.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



SISO-ANT A

Test Mode : 1TX 11a CH233 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

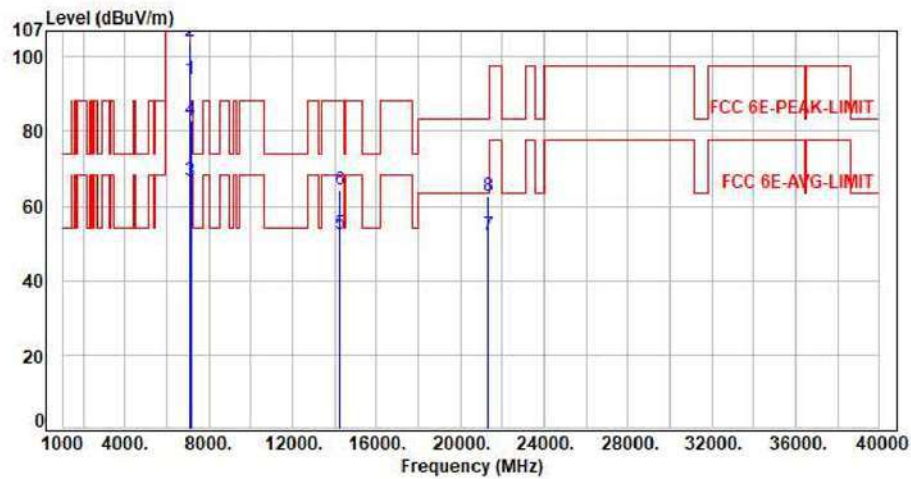

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	9.87	84.06	93.93	200.00	-106.07	Average	100	323	P
2	7115.00	9.87	94.11	103.98	200.00	-96.02	Peak	100	323	P
3	7125.00	9.92	56.61	66.53	68.20	-1.67	Average	100	323	P
4	7125.00	9.92	73.04	82.96	88.20	-5.24	Peak	100	323	P
5	14230.00	22.90	29.78	52.68	68.20	-15.52	Average	100	164	P
6	14230.00	22.90	41.45	64.35	88.20	-23.85	Peak	100	164	P
7	21345.00	10.74	41.28	52.02	63.54	-11.52	Average	150	360	P
8	21345.00	10.74	51.74	62.48	83.54	-21.06	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

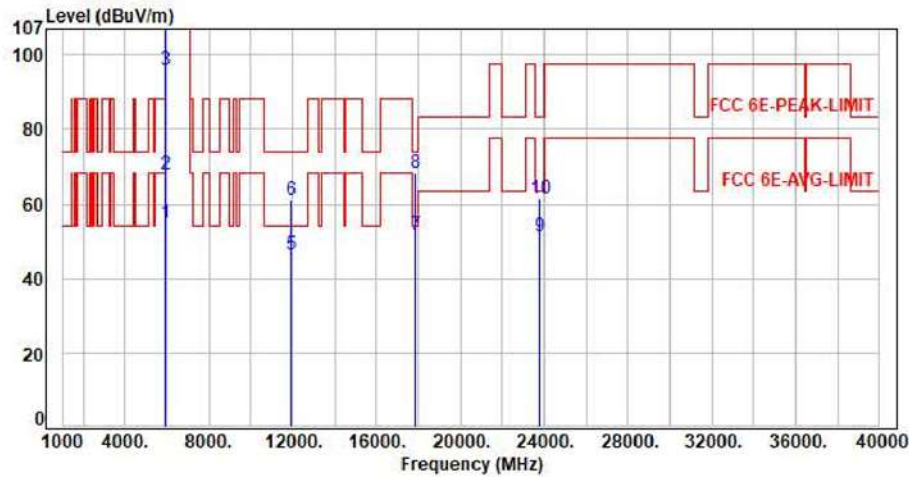


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	47.09	54.82	68.20	-13.38	Average	100	345	P
2	5925.00	7.73	60.36	68.09	88.20	-20.11	Peak	100	345	P
3	5955.00	7.79	88.24	96.03	200.00	-103.97	Average	100	345	P
4	5955.00	7.79	99.83	107.62	200.00	-92.38	Peak	100	345	P
5	11910.00	16.61	29.87	46.48	54.00	-7.52	Average	100	195	P
6	11910.00	16.61	44.27	60.88	74.00	-13.12	Peak	100	195	P
7	17865.00	26.42	25.11	51.53	54.00	-2.47	Average	100	149	P
8	17865.00	26.42	41.94	68.36	74.00	-5.64	Peak	100	149	P
9	23820.00	9.80	41.66	51.46	63.54	-12.08	Average	150	360	P
10	23820.00	9.80	51.74	61.54	83.54	-22.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

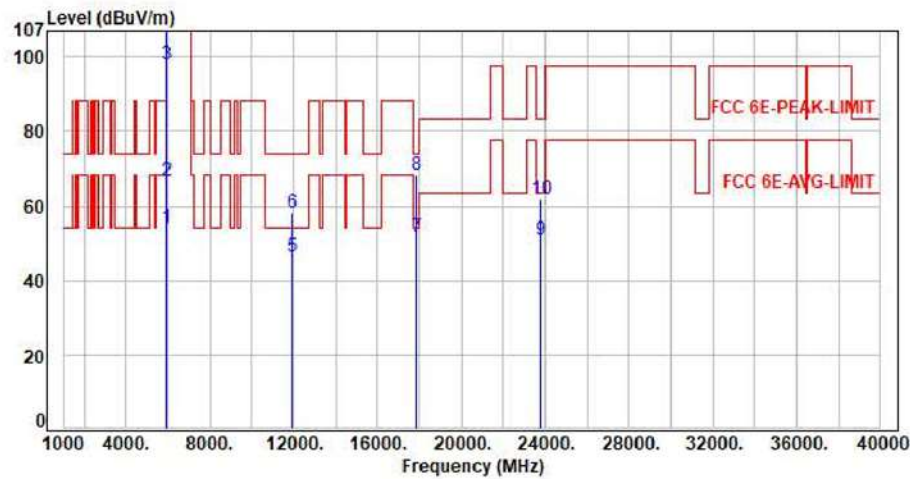

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	46.46	54.19	68.20	-14.01	Average	382	45	P
2	5925.00	7.73	58.92	66.65	88.20	-21.55	Peak	382	45	P
3	5955.00	7.79	90.27	98.06	200.00	-101.94	Average	382	45	P
4	5955.00	7.79	102.14	109.93	200.00	-90.07	Peak	382	45	P
5	11910.00	16.61	29.67	46.28	54.00	-7.72	Average	100	214	P
6	11910.00	16.61	41.39	58.00	74.00	-16.00	Peak	100	214	P
7	17865.00	26.42	25.11	51.53	54.00	-2.47	Average	100	157	P
8	17865.00	26.42	41.95	68.37	74.00	-5.63	Peak	100	157	P
9	23820.00	9.80	41.25	51.05	63.54	-12.49	Average	150	360	P
10	23820.00	9.80	51.99	61.79	83.54	-21.75	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

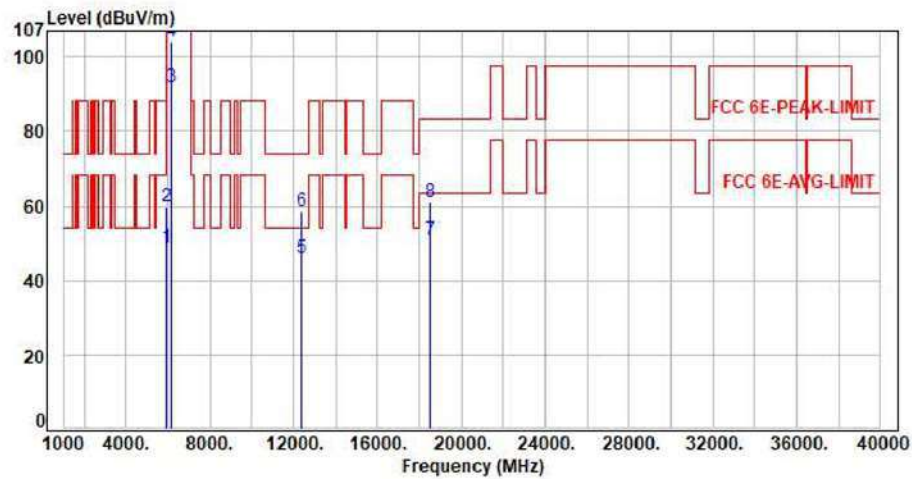

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	41.26	48.99	68.20	-19.21	Average	110	328	P
2	5925.00	7.73	52.13	59.86	88.20	-28.34	Peak	110	328	P
3	6175.00	8.36	83.46	91.82	200.00	-108.18	Average	110	328	P
4	6175.00	8.36	95.98	104.34	200.00	-95.66	Peak	110	328	P
5	12350.00	16.58	29.49	46.07	54.00	-7.93	Average	100	221	P
6	12350.00	16.58	41.95	58.53	74.00	-15.47	Peak	100	221	P
7	18525.00	9.06	41.87	50.93	63.54	-12.61	Average	150	360	P
8	18525.00	9.06	52.11	61.17	83.54	-22.37	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

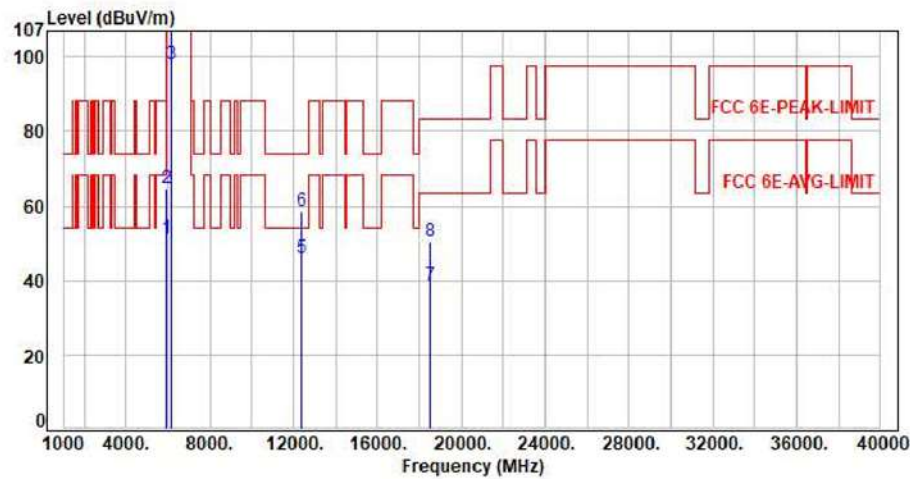

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.48	51.21	68.20	-16.99	Average	100	47	P
2	5925.00	7.73	57.08	64.81	88.20	-23.39	Peak	100	47	P
3	6175.00	8.36	89.61	97.97	200.00	-102.03	Average	100	47	P
4	6175.00	8.36	102.12	110.48	200.00	-89.52	Peak	100	47	P
5	12350.00	16.58	29.45	46.03	54.00	-7.97	Average	100	166	P
6	12350.00	16.58	41.86	58.44	74.00	-15.56	Peak	100	166	P
7	18525.00	9.06	29.74	38.80	63.54	-24.74	Average	150	360	P
8	18525.00	9.06	41.38	50.44	83.54	-33.10	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

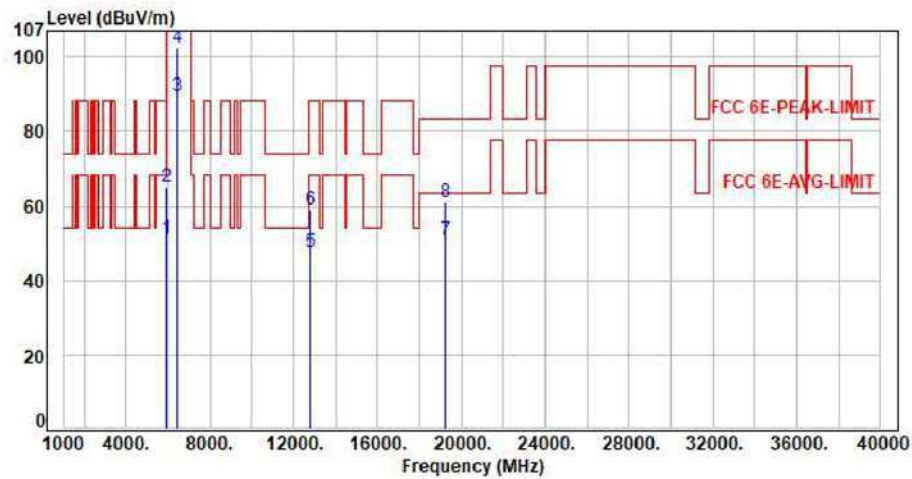

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	314	P
2	5925.00	7.73	57.34	65.07	88.20	-23.13	Peak	100	314	P
3	6415.00	8.42	81.17	89.59	200.00	-110.41	Average	100	314	P
4	6415.00	8.42	93.98	102.40	200.00	-97.60	Peak	100	314	P
5	12830.00	17.78	29.88	47.66	68.20	-20.54	Average	100	249	P
6	12830.00	17.78	41.33	59.11	88.20	-29.09	Peak	100	249	P
7	19245.00	9.42	41.33	50.75	63.54	-12.79	Average	150	360	P
8	19245.00	9.42	51.68	61.10	83.54	-22.44	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

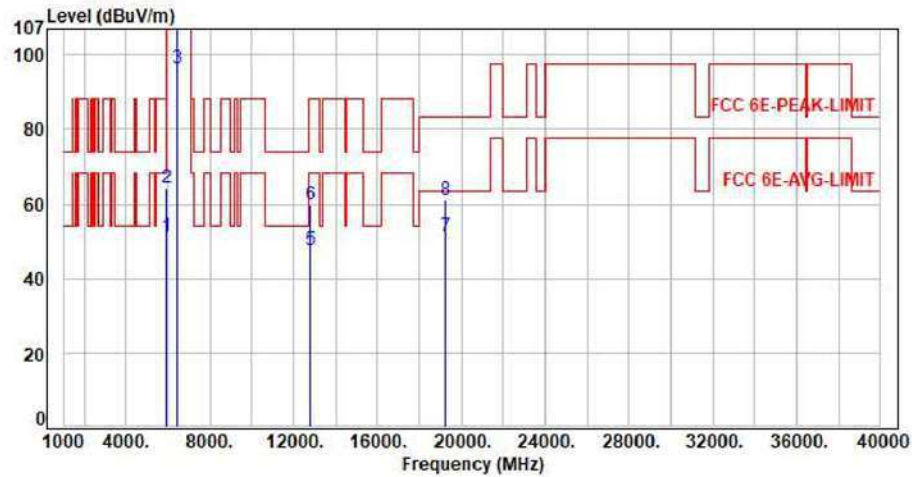

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.40	51.13	68.20	-17.07	Average	122	356	P
2	5925.00	7.73	56.58	64.31	88.20	-23.89	Peak	122	356	P
3	6415.00	8.42	88.03	96.45	200.00	-103.55	Average	122	356	P
4	6415.00	8.42	101.76	110.18	200.00	-89.82	Peak	122	356	P
5	12830.00	17.78	29.64	47.42	68.20	-20.78	Average	100	133	P
6	12830.00	17.78	41.94	59.72	88.20	-28.48	Peak	100	133	P
7	19245.00	9.42	41.82	51.24	63.54	-12.30	Average	150	360	P
8	19245.00	9.42	51.74	61.16	83.54	-22.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

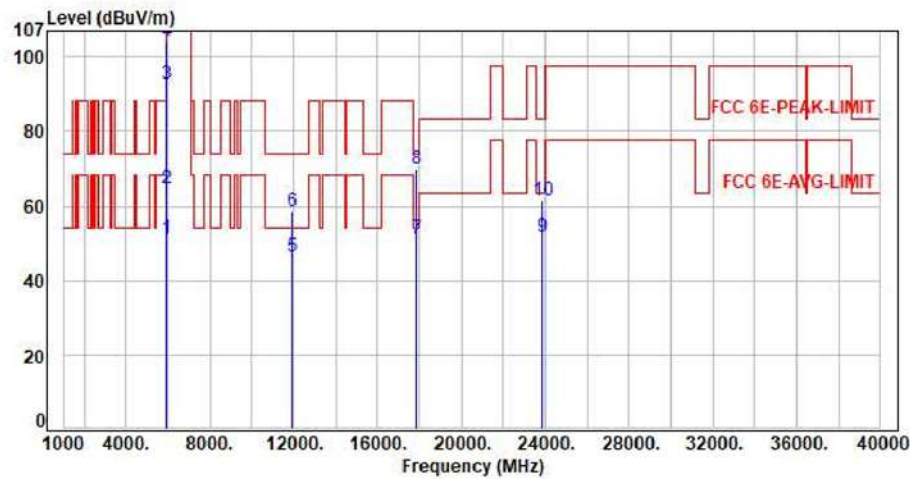


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.48	51.21	68.20	-16.99	Average	100	343	P
2	5925.00	7.73	57.03	64.76	88.20	-23.44	Peak	100	343	P
3	5965.00	7.79	85.12	92.91	200.00	-107.09	Average	100	343	P
4	5965.00	7.79	96.38	104.17	200.00	-95.83	Peak	100	343	P
5	11930.00	16.61	29.74	46.35	54.00	-7.65	Average	100	117	P
6	11930.00	16.61	41.96	58.57	74.00	-15.43	Peak	100	117	P
7	17895.00	26.47	24.61	51.08	54.00	-2.92	Average	150	360	P
8	17895.00	26.47	43.40	69.87	74.00	-4.13	Peak	100	117	P
9	23860.00	9.86	41.96	51.82	63.54	-11.72	Average	150	360	P
10	23860.00	9.86	51.68	61.54	83.54	-22.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

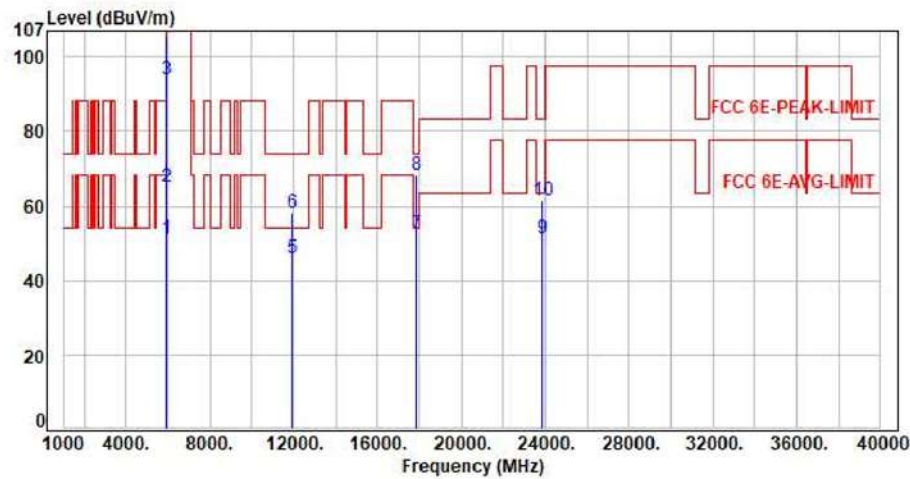

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.50	51.23	68.20	-16.97	Average	100	49	P
2	5925.00	7.73	57.22	64.95	88.20	-23.25	Peak	100	49	P
3	5965.00	7.79	86.19	93.98	200.00	-106.02	Average	100	49	P
4	5965.00	7.79	97.72	105.51	200.00	-94.49	Peak	100	49	P
5	11930.00	16.61	29.41	46.02	54.00	-7.98	Average	100	185	P
6	11930.00	16.61	41.38	57.99	74.00	-16.01	Peak	100	185	P
7	17895.00	26.47	26.15	52.62	54.00	-1.38	Average	100	119	P
8	17895.00	26.47	41.96	68.43	74.00	-5.57	Peak	100	119	P
9	23860.00	9.86	41.33	51.19	63.54	-12.35	Average	150	360	P
10	23860.00	9.86	51.76	61.62	83.54	-21.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

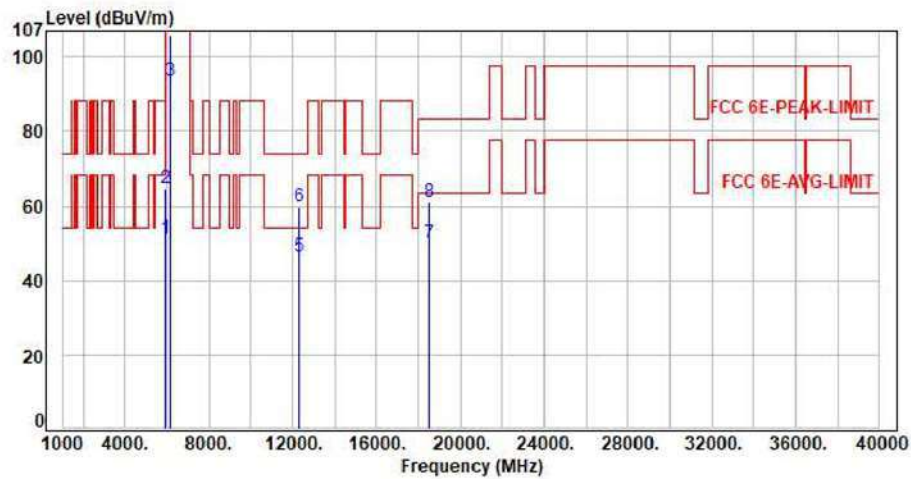

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.44	51.17	68.20	-17.03	Average	100	41	P
2	5925.00	7.73	56.94	64.67	88.20	-23.53	Peak	100	41	P
3	6165.00	8.36	85.20	93.56	200.00	-106.44	Average	100	41	P
4	6165.00	8.36	97.61	105.97	200.00	-94.03	Peak	100	41	P
5	12330.00	16.54	29.74	46.28	54.00	-7.72	Average	100	163	P
6	12330.00	16.54	43.43	59.97	74.00	-14.03	Peak	100	163	P
7	18495.00	8.94	41.26	50.20	63.54	-13.34	Average	150	360	P
8	18495.00	8.94	51.95	60.89	83.54	-22.65	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

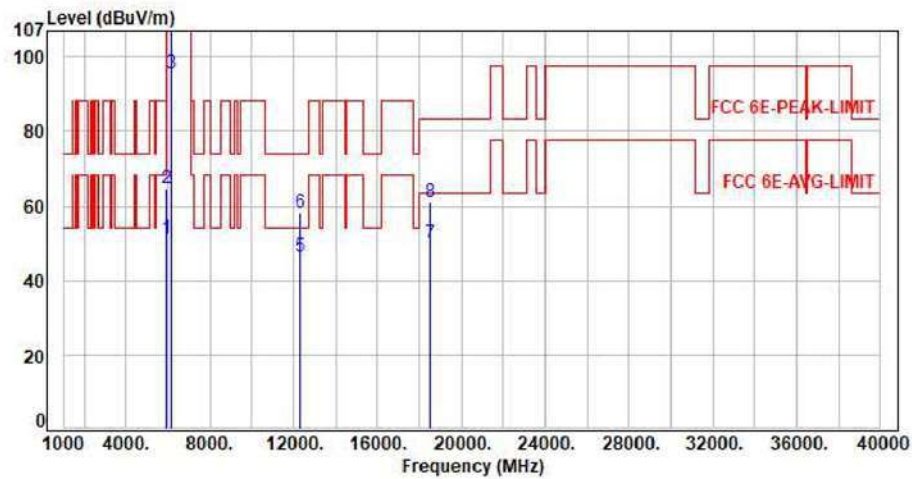

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.53	51.26	68.20	-16.94	Average	108	48	P
2	5925.00	7.73	56.84	64.57	88.20	-23.63	Peak	108	48	P
3	6165.00	8.36	87.28	95.64	200.00	-104.36	Average	108	48	P
4	6165.00	8.36	100.21	108.57	200.00	-91.43	Peak	108	48	P
5	12330.00	16.54	29.74	46.28	54.00	-7.72	Average	100	199	P
6	12330.00	16.54	41.61	58.15	74.00	-15.85	Peak	100	199	P
7	18495.00	8.94	41.28	50.22	63.54	-13.32	Average	150	360	P
8	18495.00	8.94	51.95	60.89	83.54	-22.65	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

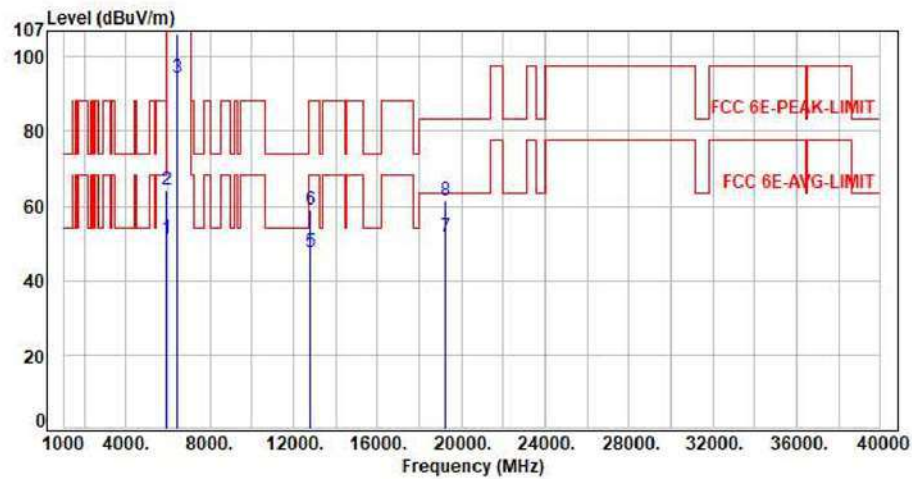

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.51	51.24	68.20	-16.96	Average	100	314	P
2	5925.00	7.73	56.70	64.43	88.20	-23.77	Peak	100	314	P
3	6405.00	8.45	85.81	94.26	200.00	-105.74	Average	100	314	P
4	6405.00	8.45	97.84	106.29	200.00	-93.71	Peak	100	314	P
5	12810.00	17.66	29.75	47.41	68.20	-20.79	Average	100	168	P
6	12810.00	17.66	41.39	59.05	88.20	-29.15	Peak	100	168	P
7	19215.00	9.53	41.95	51.48	63.54	-12.06	Average	150	360	P
8	19215.00	9.53	51.74	61.27	83.54	-22.27	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

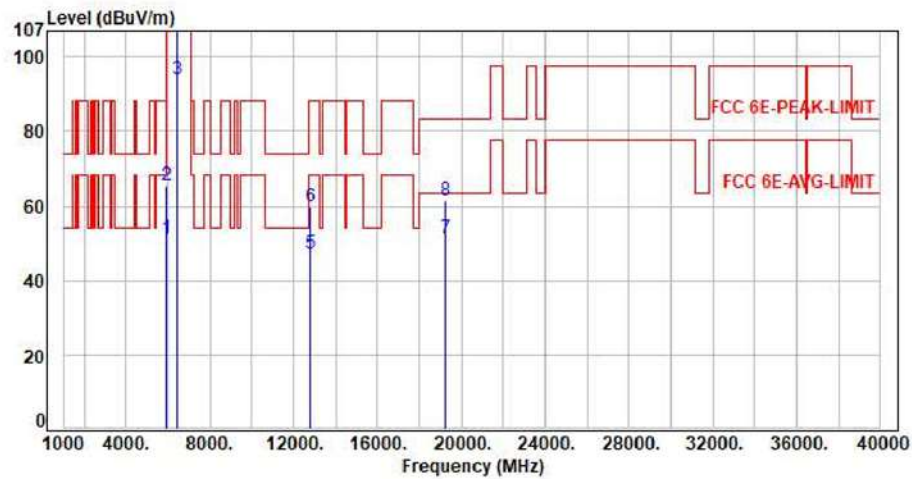

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.46	51.19	68.20	-17.01	Average	100	360	P
2	5925.00	7.73	57.87	65.60	88.20	-22.60	Peak	100	360	P
3	6405.00	8.45	85.48	93.93	200.00	-106.07	Average	100	360	P
4	6405.00	8.45	98.48	106.93	200.00	-93.07	Peak	100	360	P
5	12810.00	17.66	29.42	47.08	68.20	-21.12	Average	100	131	P
6	12810.00	17.66	41.96	59.62	88.20	-28.58	Peak	100	131	P
7	19215.00	9.53	41.62	51.15	63.54	-12.39	Average	150	360	P
8	19215.00	9.53	51.74	61.27	83.54	-22.27	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

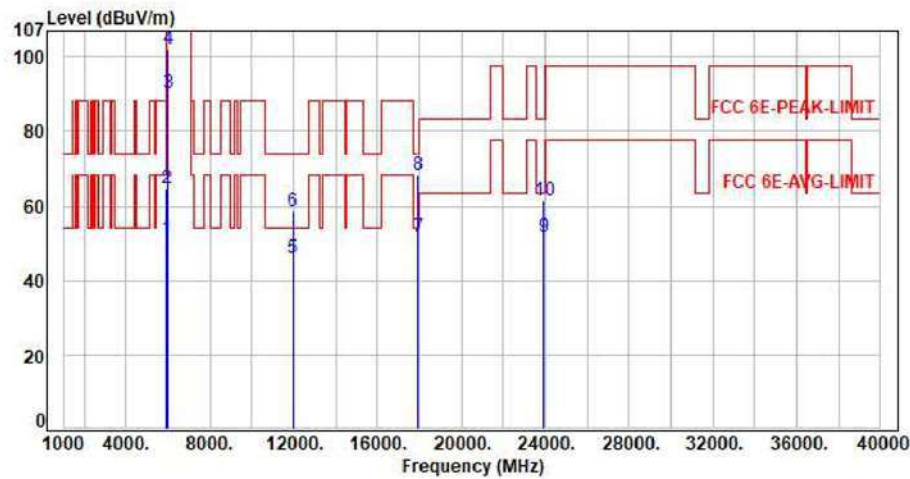


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.55	51.28	68.20	-16.92	Average	104	342	P
2	5925.00	7.73	56.87	64.60	88.20	-23.60	Peak	104	342	P
3	5985.00	7.80	82.41	90.21	200.00	-109.79	Average	104	342	P
4	5985.00	7.80	94.16	101.96	200.00	-98.04	Peak	104	342	P
5	11970.00	16.55	29.47	46.02	54.00	-7.98	Average	100	198	P
6	11970.00	16.55	41.87	58.42	74.00	-15.58	Peak	100	198	P
7	17955.00	26.31	25.18	51.49	54.00	-2.51	Average	100	225	P
8	17955.00	26.31	41.95	68.26	74.00	-5.74	Peak	100	225	P
9	23940.00	9.85	41.95	51.80	63.54	-11.74	Average	100	176	P
10	23940.00	9.85	51.74	61.59	83.54	-21.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

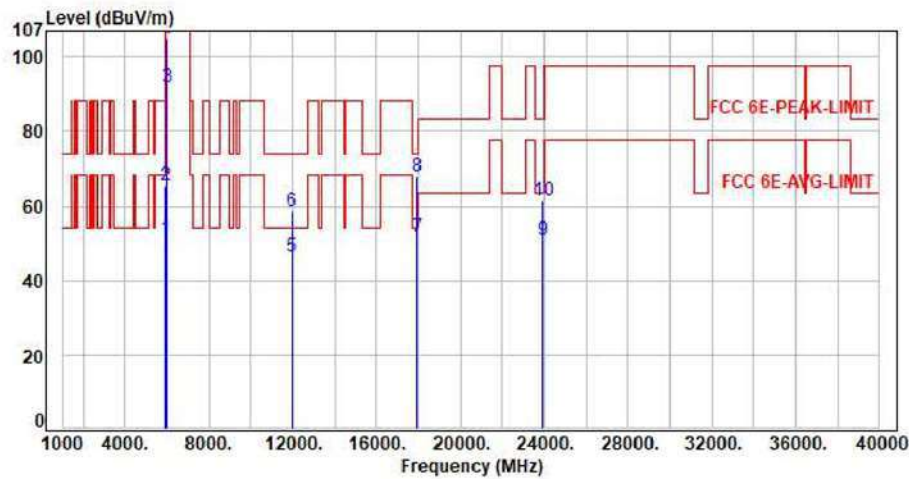


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.65	51.38	68.20	-16.82	Average	100	51	P
2	5925.00	7.73	57.65	65.38	88.20	-22.82	Peak	100	51	P
3	5985.00	7.80	84.29	92.09	200.00	-107.91	Average	100	51	P
4	5985.00	7.80	97.03	104.83	200.00	-95.17	Peak	100	51	P
5	11970.00	16.55	29.74	46.29	54.00	-7.71	Average	100	117	P
6	11970.00	16.55	41.85	58.40	74.00	-15.60	Peak	100	117	P
7	17955.00	26.31	25.42	51.73	54.00	-2.27	Average	100	256	P
8	17955.00	26.31	41.69	68.00	74.00	-6.00	Peak	100	256	P
9	23940.00	9.85	41.19	51.04	63.54	-12.50	Average	150	360	P
10	23940.00	9.85	51.47	61.32	83.54	-22.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

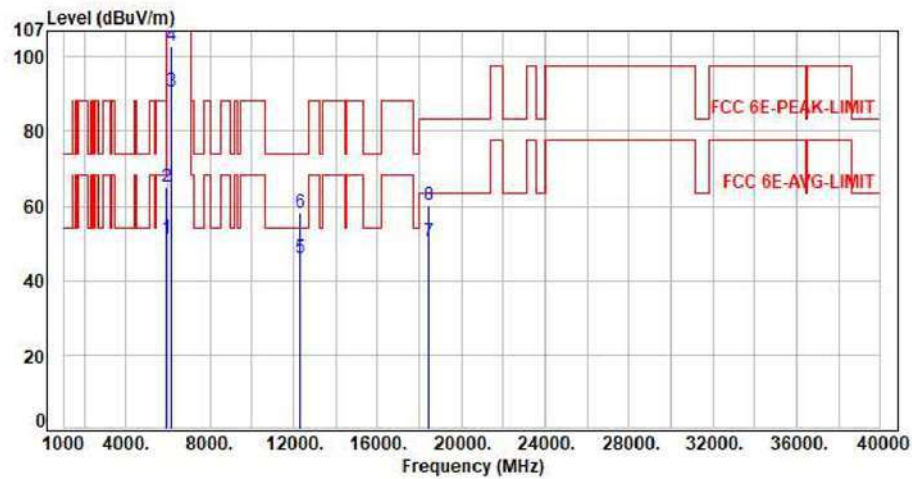

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.46	51.19	68.20	-17.01	Average	100	32	P
2	5925.00	7.73	57.39	65.12	88.20	-23.08	Peak	100	32	P
3	6145.00	8.33	82.37	90.70	200.00	-109.30	Average	100	32	P
4	6145.00	8.33	94.47	102.80	200.00	-97.20	Peak	100	32	P
5	12290.00	16.49	29.41	45.90	54.00	-8.10	Average	100	228	P
6	12290.00	16.49	41.85	58.34	74.00	-15.66	Peak	100	228	P
7	18435.00	8.88	41.68	50.56	63.54	-12.98	Average	150	360	P
8	18435.00	8.88	51.34	60.22	83.54	-23.32	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

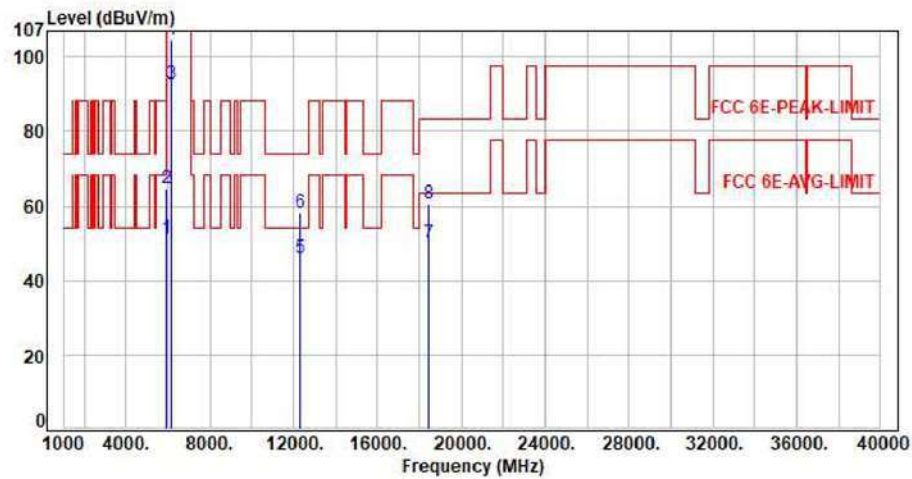

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.46	51.19	68.20	-17.01	Average	100	48	P
2	5925.00	7.73	56.83	64.56	88.20	-23.64	Peak	100	48	P
3	6145.00	8.33	84.52	92.85	200.00	-107.15	Average	100	48	P
4	6145.00	8.33	96.08	104.41	200.00	-95.59	Peak	100	48	P
5	12290.00	16.49	29.47	45.96	54.00	-8.04	Average	100	117	P
6	12290.00	16.49	41.53	58.02	74.00	-15.98	Peak	100	117	P
7	18435.00	8.88	41.28	50.16	63.54	-13.38	Average	150	360	P
8	18435.00	8.88	51.82	60.70	83.54	-22.84	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

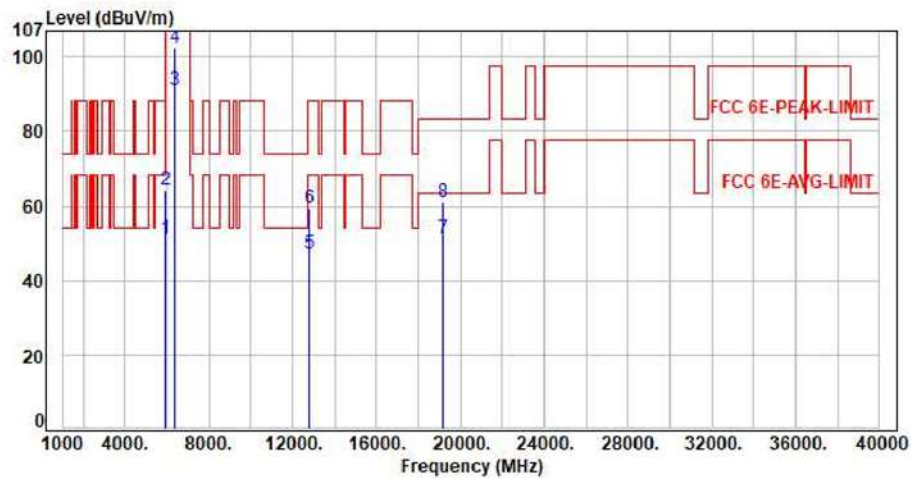

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.51	51.24	68.20	-16.96	Average	100	216	P
2	5925.00	7.73	56.48	64.21	88.20	-23.99	Peak	100	216	P
3	6385.00	8.45	82.70	91.15	200.00	-108.85	Average	100	216	P
4	6385.00	8.45	94.21	102.66	200.00	-97.34	Peak	100	216	P
5	12770.00	17.49	29.71	47.20	68.20	-21.00	Average	100	116	P
6	12770.00	17.49	41.88	59.37	88.20	-28.83	Peak	100	116	P
7	19155.00	9.76	41.38	51.14	63.54	-12.40	Average	150	360	P
8	19155.00	9.76	51.24	61.00	83.54	-22.54	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

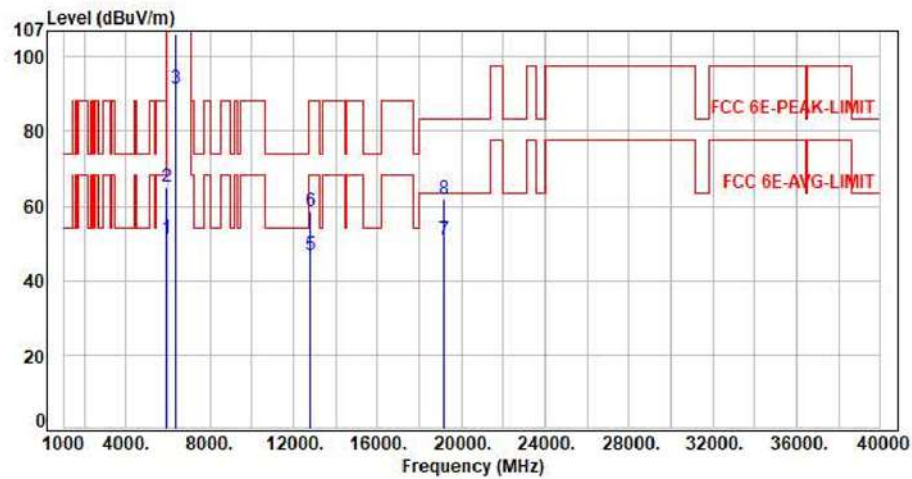

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	100	357	P
2	5925.00	7.73	57.30	65.03	88.20	-23.17	Peak	100	357	P
3	6385.00	8.45	83.22	91.67	200.00	-108.33	Average	100	357	P
4	6385.00	8.45	97.63	106.08	200.00	-93.92	Peak	100	357	P
5	12770.00	17.49	29.41	46.90	68.20	-21.30	Average	100	175	P
6	12770.00	17.49	41.28	58.77	88.20	-29.43	Peak	100	175	P
7	19155.00	9.76	41.28	51.04	63.54	-12.50	Average	150	360	P
8	19155.00	9.76	52.17	61.93	83.54	-21.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

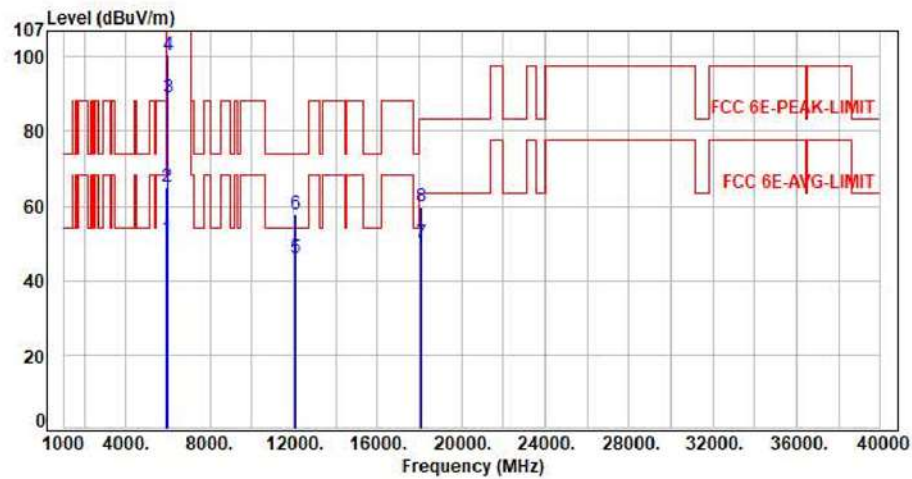

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.66	51.39	68.20	-16.81	Average	100	145	P
2	5925.00	7.73	57.31	65.04	88.20	-23.16	Peak	100	145	P
3	6025.00	7.92	81.12	89.04	200.00	-110.96	Average	100	145	P
4	6025.00	7.92	92.72	100.64	200.00	-99.36	Peak	100	145	P
5	12050.00	16.46	29.42	45.88	54.00	-8.12	Average	100	117	P
6	12050.00	16.46	41.29	57.75	74.00	-16.25	Peak	100	117	P
7	18075.00	8.61	41.38	49.99	63.54	-13.55	Average	150	360	P
8	18075.00	8.61	51.38	59.99	83.54	-23.55	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

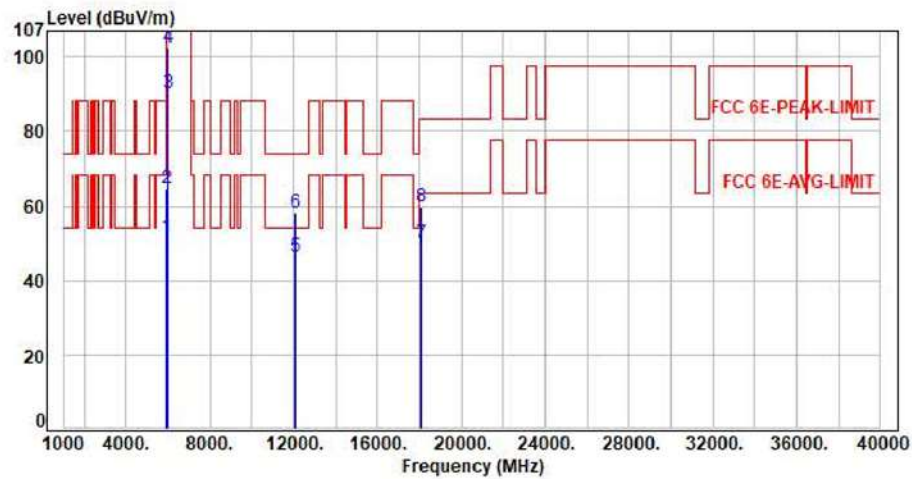

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.74	51.47	68.20	-16.73	Average	100	37	P
2	5925.00	7.73	56.87	64.60	88.20	-23.60	Peak	100	37	P
3	6025.00	7.92	82.55	90.47	200.00	-109.53	Average	100	37	P
4	6025.00	7.92	94.65	102.57	200.00	-97.43	Peak	100	37	P
5	12050.00	16.46	29.90	46.36	54.00	-7.64	Average	100	166	P
6	12050.00	16.46	41.83	58.29	74.00	-15.71	Peak	100	166	P
7	18075.00	8.61	41.59	50.20	63.54	-13.34	Average	150	360	P
8	18075.00	8.61	51.34	59.95	83.54	-23.59	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

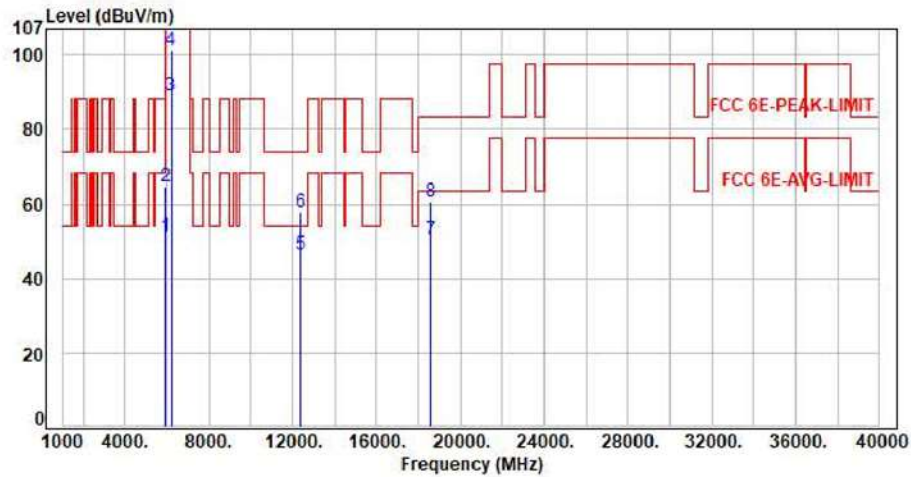

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.45	51.18	68.20	-17.02	Average	100	28	P
2	5925.00	7.73	57.09	64.82	88.20	-23.38	Peak	100	28	P
3	6185.00	8.37	80.83	89.20	200.00	-110.80	Average	100	28	P
4	6185.00	8.37	92.93	101.30	200.00	-98.70	Peak	100	28	P
5	12370.00	16.61	29.58	46.19	54.00	-7.81	Average	100	227	P
6	12370.00	16.61	41.29	57.90	74.00	-16.10	Peak	100	227	P
7	18555.00	9.17	41.29	50.46	63.54	-13.08	Average	150	360	P
8	18555.00	9.17	51.26	60.43	83.54	-23.11	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

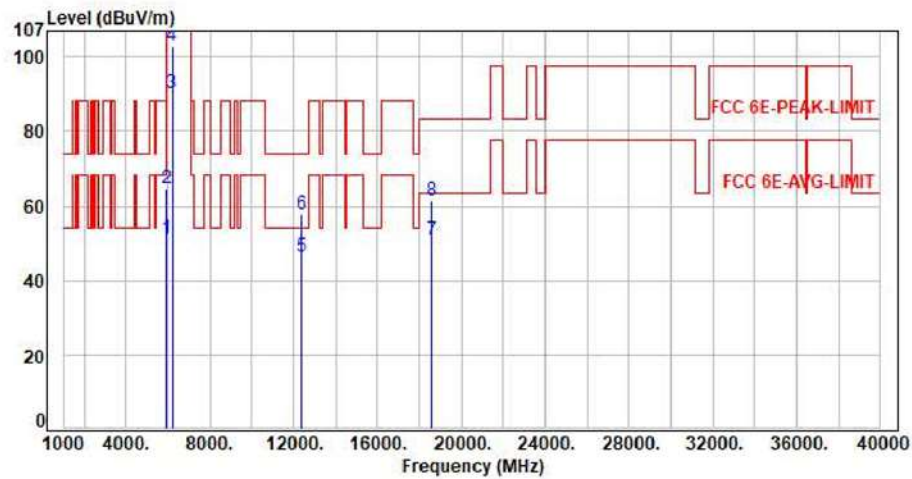

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.48	51.21	68.20	-16.99	Average	108	48	P
2	5925.00	7.73	56.94	64.67	88.20	-23.53	Peak	108	48	P
3	6185.00	8.37	82.12	90.49	200.00	-109.51	Average	108	48	P
4	6185.00	8.37	94.46	102.83	200.00	-97.17	Peak	108	48	P
5	12370.00	16.61	29.63	46.24	54.00	-7.76	Average	100	138	P
6	12370.00	16.61	41.32	57.93	74.00	-16.07	Peak	100	138	P
7	18555.00	9.17	41.77	50.94	63.54	-12.60	Average	150	360	P
8	18555.00	9.17	52.17	61.34	83.54	-22.20	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

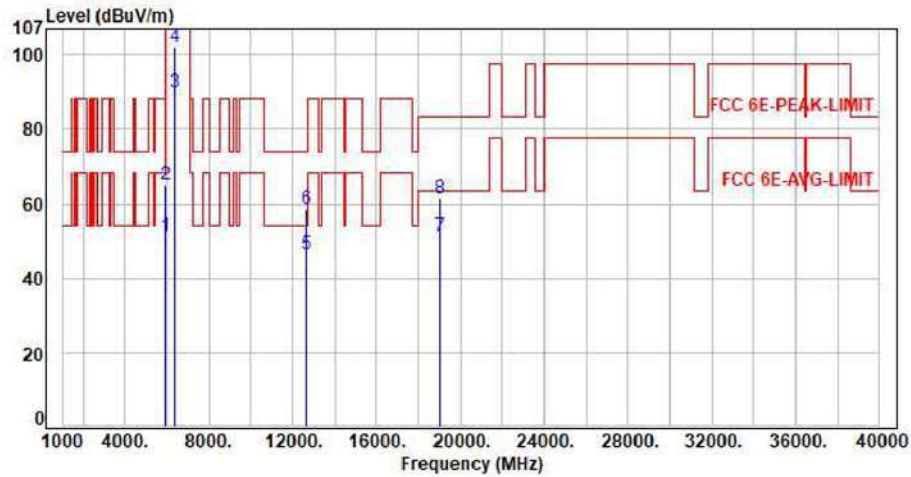

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.43	51.16	68.20	-17.04	Average	100	312	P
2	5925.00	7.73	57.30	65.03	88.20	-23.17	Peak	100	312	P
3	6345.00	8.41	81.61	90.02	200.00	-109.98	Average	100	312	P
4	6345.00	8.41	93.70	102.11	200.00	-97.89	Peak	100	312	P
5	12690.00	17.20	29.15	46.35	54.00	-7.65	Average	100	117	P
6	12690.00	17.20	41.38	58.58	74.00	-15.42	Peak	100	117	P
7	19035.00	9.45	41.95	51.40	63.54	-12.14	Average	150	360	P
8	19035.00	9.45	52.17	61.62	83.54	-21.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

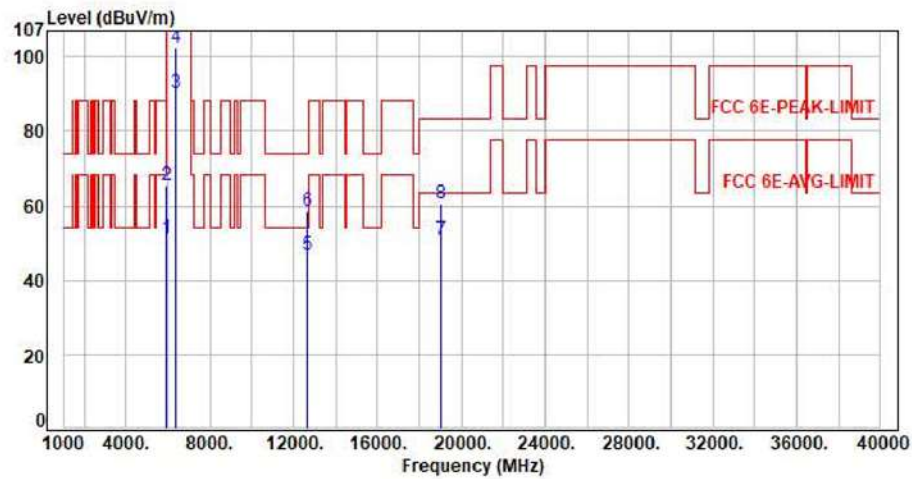


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.40	51.13	68.20	-17.07	Average	100	314	P
2	5925.00	7.73	57.75	65.48	88.20	-22.72	Peak	100	314	P
3	6345.00	8.41	81.92	90.33	200.00	-109.67	Average	100	314	P
4	6345.00	8.41	94.19	102.60	200.00	-97.40	Peak	100	314	P
5	12690.00	17.20	29.46	46.66	54.00	-7.34	Average	100	117	P
6	12690.00	17.20	41.37	58.57	74.00	-15.43	Peak	100	117	P
7	19035.00	9.45	41.48	50.93	63.54	-12.61	Average	150	360	P
8	19035.00	9.45	51.37	60.82	83.54	-22.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

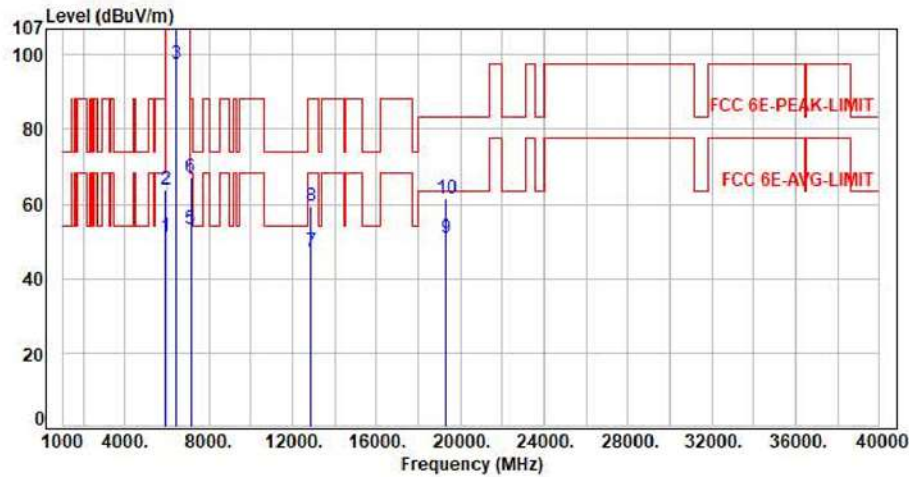


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.42	51.15	68.20	-17.05	Average	120	325	P
2	5925.00	7.73	56.27	64.00	88.20	-24.20	Peak	120	325	P
3	6435.00	8.36	89.40	97.76	200.00	-102.24	Average	120	325	P
4	6435.00	8.36	102.23	110.59	200.00	-89.41	Peak	120	325	P
5	7125.00	9.92	43.51	53.43	68.20	-14.77	Average	120	325	P
6	7125.00	9.92	57.03	66.95	88.20	-21.25	Peak	120	325	P
7	12870.00	17.98	29.41	47.39	68.20	-20.81	Average	100	185	P
8	12870.00	17.98	41.38	59.36	88.20	-28.84	Peak	100	185	P
9	19305.00	9.63	41.33	50.96	63.54	-12.58	Average	150	360	P
10	19305.00	9.63	51.74	61.37	83.54	-22.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

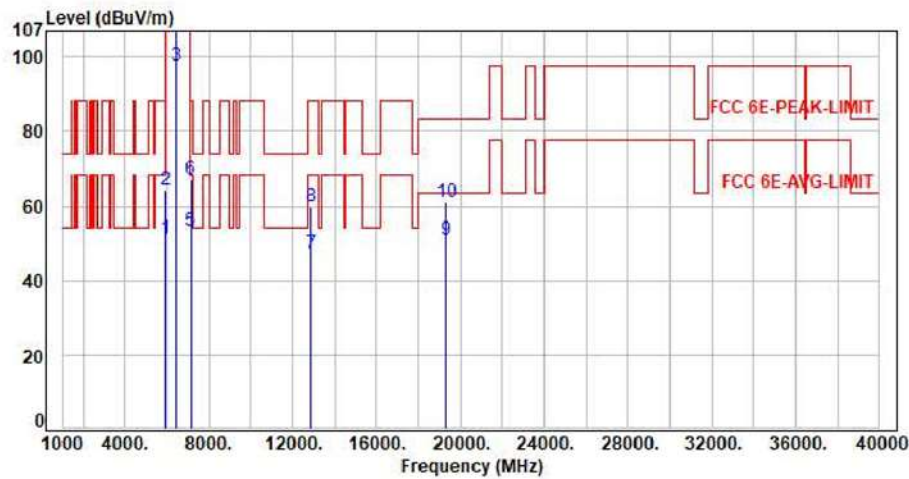


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.41	51.14	68.20	-17.06	Average	100	355	P
2	5925.00	7.73	56.73	64.46	88.20	-23.74	Peak	100	355	P
3	6435.00	8.36	89.30	97.66	200.00	-102.34	Average	100	355	P
4	6435.00	8.36	101.65	110.01	200.00	-89.99	Peak	100	355	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	100	355	P
6	7125.00	9.92	57.14	67.06	88.20	-21.14	Peak	100	355	P
7	12870.00	17.98	29.41	47.39	68.20	-20.81	Average	100	167	P
8	12870.00	17.98	41.83	59.81	88.20	-28.39	Peak	100	167	P
9	19305.00	9.63	41.38	51.01	63.54	-12.53	Average	150	360	P
10	19305.00	9.63	51.34	60.97	83.54	-22.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

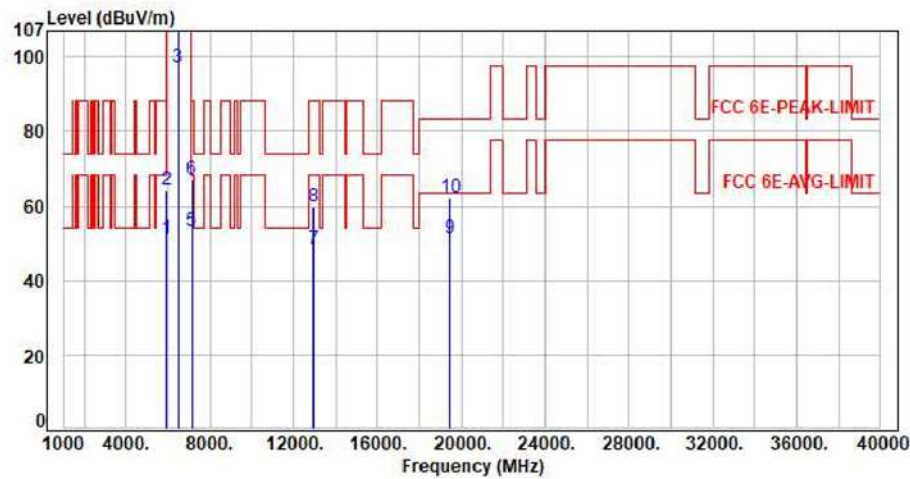


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.52	51.25	68.20	-16.95	Average	100	317	P
2	5925.00	7.73	56.72	64.45	88.20	-23.75	Peak	100	317	P
3	6475.00	8.34	88.83	97.17	200.00	-102.83	Average	100	317	P
4	6475.00	8.34	101.74	110.08	200.00	-89.92	Peak	100	317	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	100	317	P
6	7125.00	9.92	57.04	66.96	88.20	-21.24	Peak	100	317	P
7	12950.00	18.39	29.84	48.23	68.20	-19.97	Average	100	118	P
8	12950.00	18.39	41.33	59.72	88.20	-28.48	Peak	100	118	P
9	19425.00	10.06	41.33	51.39	63.54	-12.15	Average	150	360	P
10	19425.00	10.06	52.18	62.24	83.54	-21.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

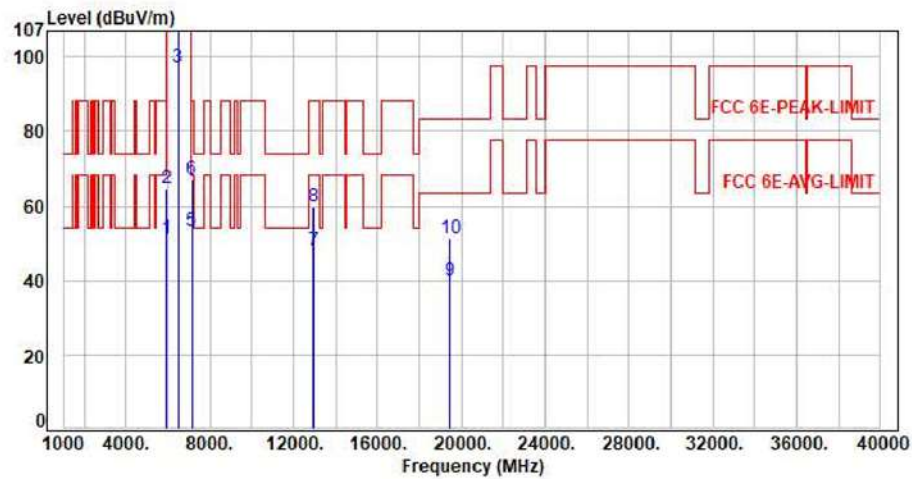


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.47	51.20	68.20	-17.00	Average	100	356	P
2	5925.00	7.73	56.88	64.61	88.20	-23.59	Peak	100	356	P
3	6475.00	8.34	88.95	97.29	200.00	-102.71	Average	100	356	P
4	6475.00	8.34	102.21	110.55	200.00	-89.45	Peak	100	356	P
5	7125.00	9.92	43.56	53.48	68.20	-14.72	Average	100	356	P
6	7125.00	9.92	57.06	66.98	88.20	-21.22	Peak	100	356	P
7	12950.00	18.39	29.47	47.86	68.20	-20.34	Average	100	135	P
8	12950.00	18.39	41.34	59.73	88.20	-28.47	Peak	100	135	P
9	19425.00	10.06	29.74	39.80	63.54	-23.74	Average	150	360	P
10	19425.00	10.06	41.33	51.39	83.54	-32.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11x20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

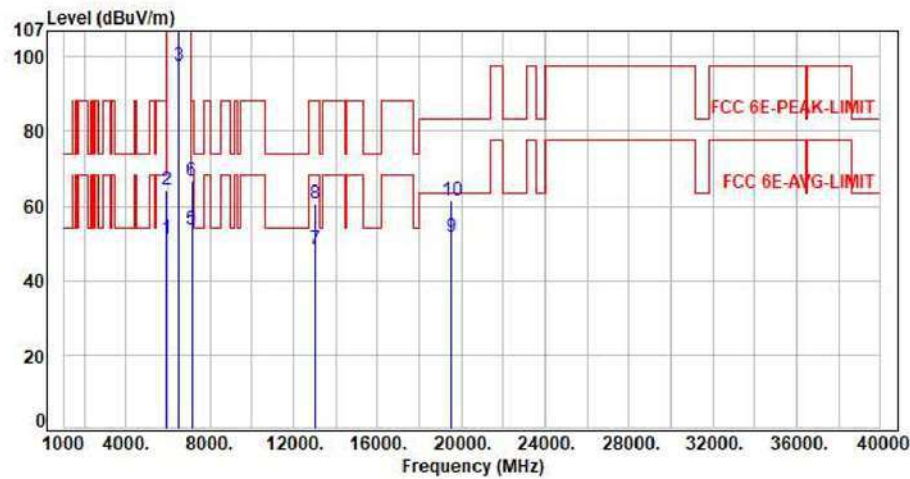


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.47	51.20	68.20	-17.00	Average	107	318	P
2	5925.00	7.73	56.53	64.26	88.20	-23.94	Peak	107	318	P
3	6515.00	8.45	89.01	97.46	200.00	-102.54	Average	107	318	P
4	6515.00	8.45	102.81	111.26	200.00	-88.74	Peak	107	318	P
5	7125.00	9.92	43.65	53.57	68.20	-14.63	Average	107	318	P
6	7125.00	9.92	56.70	66.62	88.20	-21.58	Peak	107	318	P
7	13030.00	18.71	29.74	48.45	68.20	-19.75	Average	100	224	P
8	13030.00	18.71	41.82	60.53	88.20	-27.67	Peak	100	224	P
9	19545.00	10.24	41.38	51.62	63.54	-11.92	Average	150	360	P
10	19545.00	10.24	51.17	61.41	83.54	-22.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

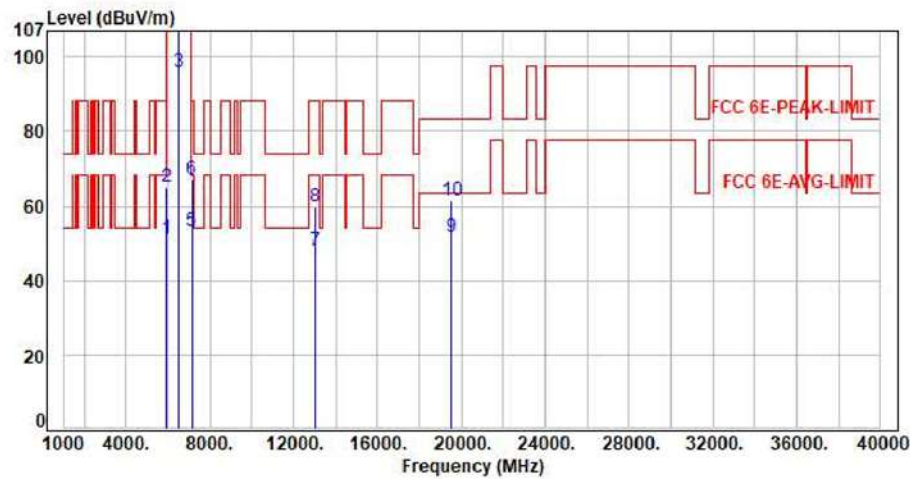

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.41	51.14	68.20	-17.06	Average	100	248	P
2	5925.00	7.73	57.17	64.90	88.20	-23.30	Peak	100	248	P
3	6515.00	8.45	87.69	96.14	200.00	-103.86	Average	100	248	P
4	6515.00	8.45	100.61	109.06	200.00	-90.94	Peak	100	248	P
5	7125.00	9.92	43.55	53.47	68.20	-14.73	Average	100	248	P
6	7125.00	9.92	57.31	67.23	88.20	-20.97	Peak	100	248	P
7	13030.00	18.71	29.47	48.18	68.20	-20.02	Average	100	117	P
8	13030.00	18.71	41.29	60.00	88.20	-28.20	Peak	100	168	P
9	19545.00	10.24	41.29	51.53	63.54	-12.01	Average	150	360	P
10	19545.00	10.24	51.38	61.62	83.54	-21.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



MIMO

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

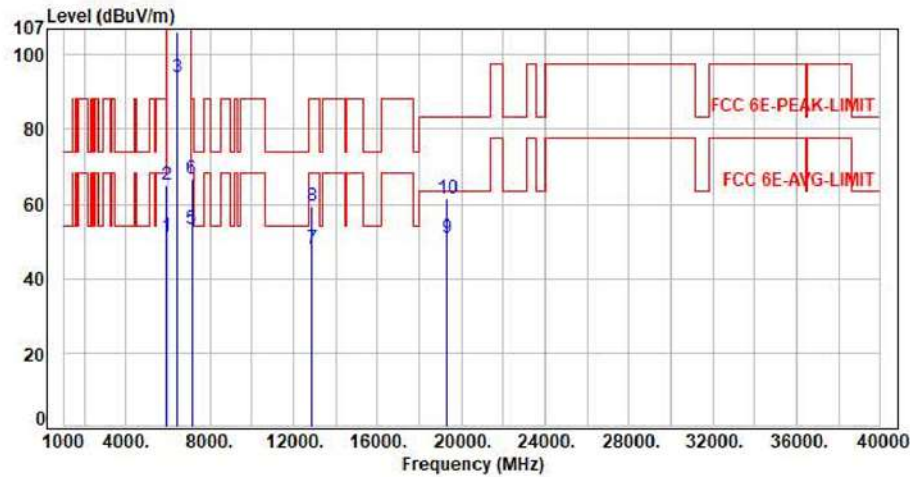

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.73	43.39	51.12	68.20	-17.08	Average	100	314	P
2	5925.00	7.73	57.25	64.98	88.20	-23.22	Peak	100	314	P
3	6445.00	8.33	85.74	94.07	200.00	-105.93	Average	100	314	P
4	6445.00	8.33	97.94	106.27	200.00	-93.73	Peak	100	314	P
5	7125.00	9.92	43.49	53.41	68.20	-14.79	Average	100	314	P
6	7125.00	9.92	56.92	66.84	88.20	-21.36	Peak	100	314	P
7	12890.00	18.06	29.84	47.90	68.20	-20.30	Average	100	118	P
8	12890.00	18.06	41.33	59.39	88.20	-28.81	Peak	100	118	P
9	19335.00	9.70	41.28	50.98	63.54	-12.56	Average	150	360	P
10	19335.00	9.70	51.61	61.31	83.54	-22.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor