

SAR TEST REPORT

FCC ID..... :	2AQRM-A67M	
Test Report No..... :	TCT241101E036	
Date of issue..... :	Dec. 25, 2024	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	FOXX Development Inc.	
Address..... :	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA	
Manufacturer's name ... :	FOXX Development Inc.	
Address..... :	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA	
Product Name..... :	Smart Phone	
Trade Mark	FOXXD, FOXX, MIRO	
Model/Type reference..... :	A67M	
SAR Max. Values.....:	0.37 W/Kg (1g) for head; 0.83W/Kg (1g) for Body-worn; 0.88 W/Kg (1g) for Hotspot	
Simultaneous Reported SAR.....:	0.68 W/Kg (1g) for head; 1.28W/Kg (1g) for Body-worn; 1.31 W/Kg (1g) for Hotspot	
Date of receipt of test item	Nov. 01, 2024	
Date (s) of performance of test..... :	Nov. 01, 2024 - Dec. 25, 2024	
Tested by (+signature) ... :	Karl WANG	
Check by (+signature).... :	Beryl Zhao	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	4
1.1. EUT description.....	4
1.2. Model(s) list	5
2. Test standard	6
3. Facilities and Accreditations	6
3.1. Facilities	6
3.2. Location.....	6
3.3. Environment Condition:	6
4. Test Result Summary	7
5. RF Exposure Limit	9
6. SAR Measurement System Configuration	10
6.1. SAR Measurement Set-up	10
6.2. E-field Probe	11
6.3. Phantom	11
6.4. Device Holder	12
6.5. Data Storage and Evaluation	13
6.6. Position of the wireless device in relation to the phantom	14
6.7. Tissue Dielectric Parameters	17
6.8. Tissue-equivalent Liquid Properties	18
6.9. System Check.....	19
7. Measurement Procedure	20
8. Conducted Output Power.....	23
9. Exposure Position Consideration	55
9.1. EUT Antenna Location.....	55
9.2. Test Position Consideration	55
10. SAR Test Results Summary.....	56
10.1. Head 1g SAR Data	56
10.2. Body-Worn 1g SAR Data	60
10.3. Hotspot 1g SAR Data	63
10.4. Simultaneous Transmission Conclusion.....	67
10.5. SAR Simultaneous Transmission Analysis.....	68
10.6. Measurement Uncertainty (150MHz-6GHz).....	78
10.7. Test Equipment List	80
11. System Check Results	81

12. SAR Test Data.....	99
Appendix A: EUT Photos	227
Appendix B: Test Setup Photos	230
Appendix C: Probe Calibration Certificate.....	232
Appendix D: Dipole Calibration Report.....	250
Appendix E: SAR SYSTEM VALIDATION	329

1. General Product Information

1.1. EUT description

Product Name.....:	Smart Phone
Model/Type reference.....:	A67M
SampleNumber.....:	TCT241101E036-0101/01
Rating(s).....:	Rechargeable Li-ion Battery DC 3.85V
2G	
Operation Band.....:	GSM850, GSM1900
Supported type.....:	GSM/GPRS/EGPRS
Power Class.....:	GSM850:Power Class 5; GSM1900:Power Class 0
Modulation Type.....:	GMSK for GSM/GPRS ; 8PSK for EGPRS
GSM Release Version.....:	R99
GPRS Multislot Class.....:	12
EGPRS Multislot Class.....:	12
3G	
Operation Band.....:	FDD Band II & FDD Band IV & FDD Band V
Power Class.....:	Power Class 3
Modulation Type.....:	QPSK for WCDMA/HSDPA/HSUPA
WCDMA Release Version.....:	R99
HSDPA Release Version.....:	Release 5
HSUPA Release Version.....:	Release 6
DC-HSUPA Release Version.....:	Not Supported
LTE	
Operation Band.....:	LTE Band 2 & LTE Band 4 & LTE Band 5 & LTE Band 12 & LTE Band 13 LTE Band 17 & LTE Band 25 & LTE Band 26-1 & LTE Band 26-2 & LTE Band 41 & LTE Band 66 & LTE Band 71
Power Class.....:	Power Class 3
Modulation Type.....:	QPSK &16-QAM for LTE
Wi-Fi 2.4G	
Supported type.....:	802.11b/802.11g/802.11n
Modulation Type.....:	802.11b: DSSS 802.11g/802.11n: OFDM
Operation Frequency.....:	802.11b/802.11g/802.11n(HT20):2412MHz~2462MHz; 802.11n(HT40):2422MHz~2452MHz
Channel number.....:	802.11b/802.11g/802.11n(HT20):11; 802.11n(HT40):7
Channel separation.....:	5MHz

Bluetooth	
Bluetooth Version.....:	Supported 5.0
Modulation.....:	GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)
Operation Frequency.....:	2402MHz~2480MHz
Channel number.....:	79/40
Channel separation.....:	1MHz/2MHz
Wi-Fi 5G	
Operation Frequency.....:	Band 1: 5180 MHz~5240 MHz Band 2A: 5260 MHz~5320 MHz Band 3: 5745 MHz~5825 MHz
Channel Bandwidth.....:	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology.....:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type.....:	256QAM, 64QAM, 16QAM, BPSK, QPSK

1.2. Model(s) list

None.

2. Test standard

The tests were performed according to following standards:

FCC 47 CFR §2.1093

IEEE1528-2013:Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques

KDB447498 D01:General RF Exposure Guidance v06

KDB865664 D01:SAR measurement 100MHz to 6GHz v01r04

KDB865664 D02:RF Exposure Reporting v01r02.

KDB941225 D01:3G SAR Procedures v03r01

KDB248227 D01:802.11 wi-fi SAR v02r02

KDB941225 D05:SAR for LTE devices v02r05

KDB941225 D06:Hotspot Mode v02r01

KDB648474 D04:Handset SAR v01r03

KDB690783 D01:SAR Listings on Grant v01r03

3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Innovation, Science and Economic Development Canada for radio equipment testing.

3.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

3.3. Environment Condition:

Temperature:	18°C ~25°C
Humidity:	35%~75% RH
Atmospheric Pressure:	1011 mbar

4. Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:
<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)	
Head 1-g SAR	GSM 850	0.31	PCE	0.37	
	GSM 1900	0.13			
	WCDMA Band II	0.16			
	WCDMA Band V	0.34			
	LTE Band 2	0.19			
	LTE Band 4	0.21			
	LTE Band 5	0.37			
	LTE Band 12	0.17			
	LTE Band 13	0.25			
	LTE Band 17	0.18			
	LTE Band 25	0.19			
	LTE Band 26-1	0.27			
	LTE Band 26-2	0.29			
	LTE Band 41	0.02			
	LTE Band 66	0.22			
	LTE Band 71	0.35			
	WLAN 2.4 GHz	0.08			DTS
	BT	0.07			DSS
	UNII 1	0.21	NII		
	UNII 2A	0.31			
	UNII 3	0.31			
Body-worn 1-g SAR (10 mm Gap)	GSM 850	0.43	PCE	0.83	
	GSM 1900	0.35			
	WCDMA Band II	0.79			
	WCDMA Band V	0.37			
	LTE Band 2	0.54			
	LTE Band 4	0.52			
	LTE Band 5	0.46			
	LTE Band 12	0.34			
	LTE Band 13	0.30			
	LTE Band 17	0.32			
	LTE Band 25	0.83			
	LTE Band 26-1	0.35			
	LTE Band 26-2	0.36			
	LTE Band 41	0.07			
	LTE Band 66	0.76			
	LTE Band 71	0.48			

	WLAN 2.4 GHz	0.09	DTS	
	BT	0.04	DSS	
	UNII 1	0.38	NII	
	UNII 2A	0.45		
	UNII 3	0.39		
Hotspot 1-g SAR (10 mm Gap)	GSM 850	0.41	PCE	0.88
	GSM 1900	0.29		
	WCDMA Band II	0.78		
	WCDMA Band V	0.37		
	LTE Band 2	0.55		
	LTE Band 4	0.76		
	LTE Band 5	0.40		
	LTE Band 12	0.33		
	LTE Band 13	0.29		
	LTE Band 17	0.31		
	LTE Band 25	0.88		
	LTE Band 26-1	0.35		
	LTE Band 26-2	0.36		
	LTE Band 41	0.06		
	LTE Band 66	0.72		
	LTE Band 71	0.47		
	WLAN 2.4 GHz	0.09	DTS	
	UNII 1	0.39	NII	
	UNII 2A	0.40		
	UNII 3	0.43		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Highest Reported Simultaneous Transmission SAR (W/kg)
Head 1-g SAR	LTE Band 5 + WIFI 5G	0.68
Body 1-g SAR (10 mm Gap)	LTE Band 25 + WIFI 5.3G	1.28
Hotspot 1-g SAR (10 mm Gap)	GLTE Band 25 + WIFI 5.8G	1.31

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

5. RF Exposure Limit

Type Exposure	SAR (W/kg)
	Uncontrolled Exposure Limit
Spatial Peak SAR (averaged over any 1 g of tissue)	1.60
Spatial Peak SAR (hands/wrists/feet/ankles averaged over 10g)	4.00
Spatial Peak SAR (averaged over the whole body)	0.08
Note: 1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. 2. The Spatial Average value of the SAR averaged over the whole body. 3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.	

6. SAR Measurement System Configuration

6.1. SAR Measurement Set-up

The OPENSAR system for performing compliance tests consist of the following items:

A standard high precision 6-axis robot (KUKA) with controller and software.

KUKA Control Panel (KCP)

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System (VPS).

The stress sensor is composed with mechanical and electronic when the electronic part detects a change on the electro-mechanical switch; it sends an “Emergency signal” to the robot controller that to stop robot’s moves A computer operating Windows XP.


OPENSAR software Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The SAM phantom enabling testing left-hand right-hand and body usage.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles to validate the proper functioning of the system.

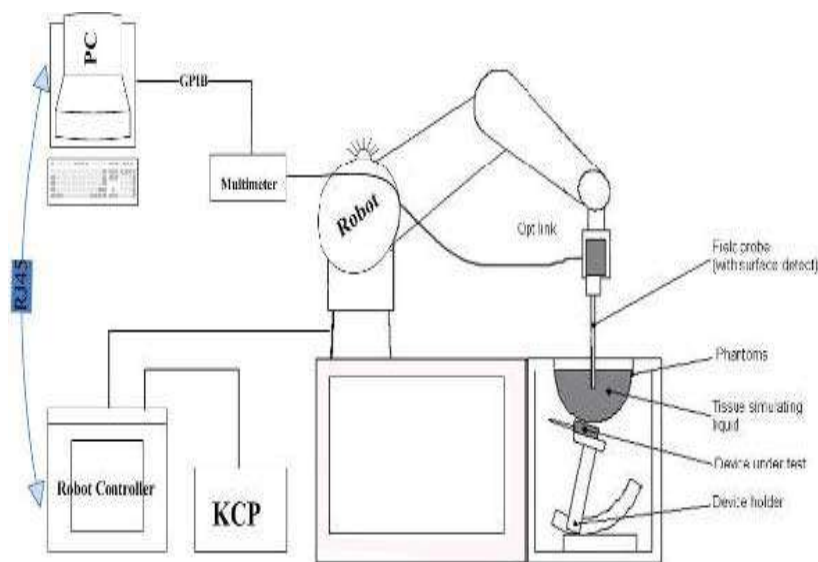

KUKA SAR Test Sysstem Configuration

6.2. E-field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration ISO/IEC 17025 calibration service available.

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 25/22 EPGO375
Frequency Range of Probe	0.15 GHz- 6GHz
Resistance of Three Dipoles at Connector	Dipole 1:R1=0.197MΩ Dipole 2:R3=0.230MΩ Dipole 3:R3=0.208MΩ




Photo of E-Field Probe

6.3. Phantom

The SAM Phantom SAM120 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and IEEE1528-2013. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

Name: COMOSAR IEEE SAM PHANTOM
S/N: SN 19/15 SAM 120
Manufacture: MVG



SAM Twin Phantom

6.4. Device Holder

In combination with the Generic Twin Phantom SAM120, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications.

The device holder can be locked at different phantom locations (left head, right head, flat phantom).

COMOSAR Mobile
phone positioning
system

6.5. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBre], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the millimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c \cdot f / d \cdot c \cdot p_i$$

With	V_i	= compensated signal of channel i	(i = x, y, z)
	U_i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field	(MVG parameter)
	dcpi	= diode compression point	(MVG parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Normi} \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (ai0 + ai1 \cdot f + ai2 \cdot f^2) / f$$

With	V_i	= compensated signal of channel i	(i = x, y, z)
	Normi	= sensor sensitivity of channel i	(i = x, y, z)
		[mV/(V/m)²] for E-field Probes	
	ConvF	= sensitivity enhancement in solution	
	aij	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	E_i	= electric field strength of channel i in V/m	
	H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

6.6. Position of the wireless device in relation to the phantom



Handset Reference Points

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

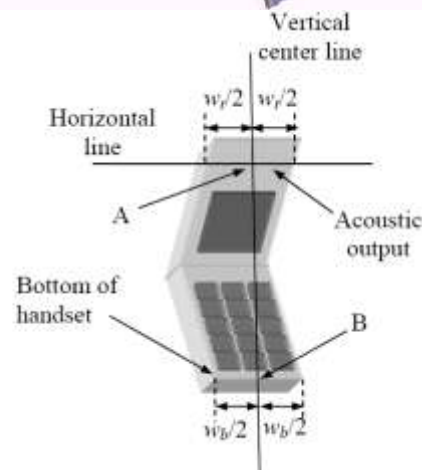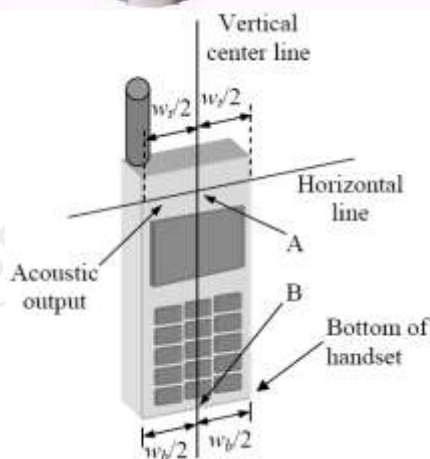

W_t Width of the handset at the level of the acoustic
 W_b Width of the bottom of the handset
A Midpoint of the width w_t of the handset at the level of the acoustic output
B Midpoint of the width w_b of the bottom of the handset

Positioning for Cheek / Touch



Positioning for Ear / 15° Tilt



Body Worn Accessory Configurations

To position the device parallel to the phantom surface with either keypad up or down.

To adjust the device parallel to the flat phantom.

To adjust the distance between the device surface and the flat phantom to 15mm or holster surface and the flat phantom to 0 mm.

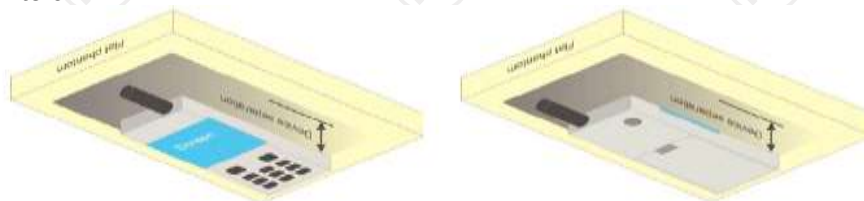



Illustration for Body Worn Position

Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets (L x W ≥


9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

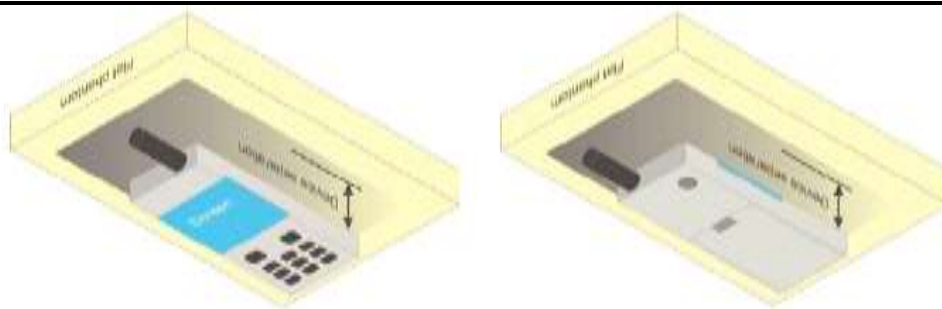**Illustration for Hotspot Position****Limb-worn device**

A limb-worn device is a unit whose intended use includes being strapped to the arm or leg of the user while transmitting (except in idle mode). It is similar to a body-worn device. Therefore, the test positions of 6.1.4.4 also apply. The strap shall be opened so that it is divided into two parts as shown in Figure 9. The device shall be positioned directly against the phantom surface with the strap straightened as much as possible and the back of the device towards the phantom.

If the strap cannot normally be opened to allow placing in direct contact with the phantom surface, it may be necessary to break the strap of the device but ensuring to not damage the antenna.

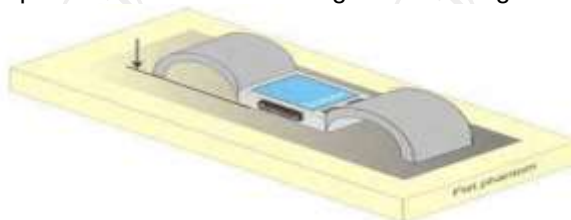**Test position for limb-worn devices**

6.7. Tissue Dielectric Parameters

The liquid used for the frequency range of 100MHz-6G consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The following Table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209. The simulating liquids should be checked at the beginning of a series of SAR measurements to determine of the determine of the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials

Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Liquid Type (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
300	Head	0.87	0.83~0.91	45.3	43.04~47.57
450	Head	0.87	0.83~0.91	43.5	41.33~45.68
835	Head	0.90	0.86~0.95	41.5	39.43~43.58
900	Head	0.97	0.92~1.02	41.5	39.43~43.58
1800-2000	Head	1.40	1.33~1.47	40.0	38.00~42.00
2450	Head	1.80	1.71~1.89	39.2	37.24~41.16
2600	Head	1.96	1.86~2.06	39.0	37.05~40.95
3000	Head	2.40	2.28~2.52	38.5	36.58~40.43
5800	Head	5.27	5.01~5.53	35.3	33.54~37.07

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

6.8. Tissue-equivalent Liquid Properties


Test Date dd/mm/yy	Temp °C	Tissue Type	Measured Frequency (MHz)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
11/11/2024	22°C	750H	673	41.93	0.88	0.07	-1.12
			704	41.83	0.89	-0.17	0.00
			709	41.82	0.89	-0.19	0.00
			750	41.69	0.9	-0.50	1.12
			782	41.58	0.91	-0.76	2.25
11/14/2024	22°C	835H	819	41.46	0.93	-0.10	3.33
			824	41.45	0.93	-0.12	3.33
			829	41.43	0.93	-0.17	3.33
			831	41.42	0.93	-0.19	3.33
			835	41.41	0.93	-0.22	3.33
			846	41.39	0.94	-0.27	4.44
			850	41.38	0.94	-0.29	4.44
11/19/2024	22°C	1800H	1720	39.80	1.34	-0.50	-4.29
			1745	39.76	1.35	-0.60	-3.57
			1800	39.66	1.37	-0.85	-2.14
11/22/2024	22°C	1900H	1850	39.57	1.39	-1.08	-0.71
			1852	39.56	1.39	-1.10	-0.71
			1860	39.55	1.39	-1.13	-0.71
			1900	39.48	1.40	-1.30	0.00
11/26/2024	22°C	2450H	2412	38.40	1.80	-2.04	0.00
			2450	38.32	1.83	-2.24	1.67
			2480	38.29	1.85	-2.32	2.78
11/29/2024	22°C	2600H	2600	38.14	1.95	-2.21	-0.51
			2680	38.07	2.03	-2.38	3.57
12/02/2024	22°C	5200H	5200	35.71	4.58	-0.81	-1.72
			5240	35.68	4.61	-0.89	-1.07
12/04/2024	22°C	5300H	5290	35.63	4.64	-0.47	-4.53
			5300	35.62	4.65	-0.50	-4.32
12/06/2024	22°C	5800H	5775	34.80	5.16	-1.42	-2.09
			5800	34.81	5.18	-1.39	-1.71

6.9. System Check

The SAR system must be validated against its performance specifications before it is deployed. When SAR probe and system component or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissue-equivalent media for system validation.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the OPENSAR system.

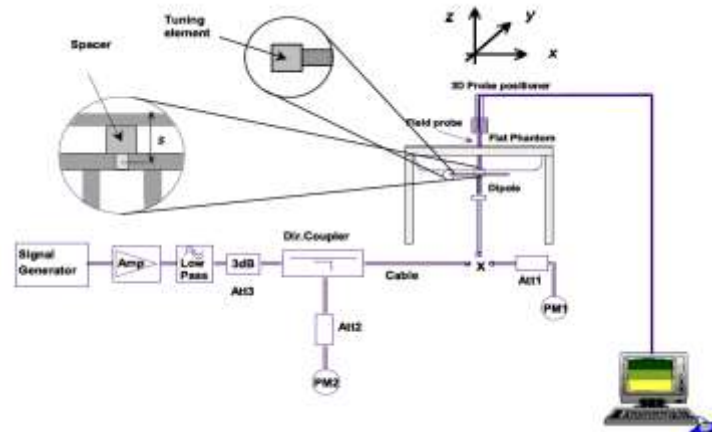

System Check Set-up

Verification Results

Frequency (MHz)	Liquid Type	Measured Value in 100mW (W/kg)		Normalized to 1W (W/kg)		Target Value (W/kg)		Deviation (%)	
		1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average
750	Head	0.81	0.54	8.13	5.37	8.31	5.71	-2.18	-6.04
835	Head	0.90	0.58	8.97	5.78	9.53	6.12	-5.90	-5.49
1800	Head	3.87	2.17	38.65	21.65	37.67	20.23	2.61	7.03
1900	Head	3.68	1.92	36.82	19.20	39.26	20.49	-6.21	-6.28
2450	Head	4.97	2.41	49.65	24.12	53.26	24.15	-6.77	-0.12
2600	Head	5.43	2.52	54.32	25.23	54.31	24.14	0.02	4.52
5200	Head	15.56	5.22	155.62	52.16	163.88	57.29	-5.04	-8.96
5300	Head	17.18	5.92	171.82	59.15	166.40	59.16	3.26	-0.01
5800	Head	18.20	5.83	182.04	58.34	188.95	63.45	-3.66	-8.05

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Section 10 of this report.

7. Measurement Procedure

Conducted power measurement

For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Read the WWAN RF power level from the base station simulator.

For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.

Connect EUT RF port through RF cable to the power meter or spectrum analyser, and measure WLAN/BT output power.

Conducted power measurement

Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.

Place the EUT in positions as Appendix B demonstrates.

Set scan area, grid size and other setting on the MVG software.

Measure SAR results for the highest power channel on each testing position.

Find out the largest SAR result on these testing positions of each band.

Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

Power reference measurement

Area scan

Zoom scan

Power drift measurement

Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The MVG software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

Extraction of the measured data (grid and values) from the Zoom Scan.

Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).

Generation of a high-resolution mesh within the measured volume.

Interpolation of all measured values from the measurement grid to the high-resolution grid

Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface

Calculation of the averaged SAR within masses of 1g and 10g.

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties

Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

			$\leq 3\text{ GHz}$	$> 3\text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5\text{ mm} \pm 1\text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2)\text{ mm} \pm 0.5\text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			$\leq 2\text{ GHz: } \leq 15\text{ mm}$ $2 - 3\text{ GHz: } \leq 12\text{ mm}$	$3 - 4\text{ GHz: } \leq 12\text{ mm}$ $4 - 6\text{ GHz: } \leq 10\text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			$\leq 2\text{ GHz: } \leq 8\text{ mm}$ $2 - 3\text{ GHz: } \leq 5\text{ mm}^*$	$3 - 4\text{ GHz: } \leq 5\text{ mm}^*$ $4 - 6\text{ GHz: } \leq 4\text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5\text{ mm}$	$3 - 4\text{ GHz: } \leq 4\text{ mm}$ $4 - 5\text{ GHz: } \leq 3\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4\text{ mm}$	$3 - 4\text{ GHz: } \leq 3\text{ mm}$ $4 - 5\text{ GHz: } \leq 2.5\text{ mm}$ $5 - 6\text{ GHz: } \leq 2\text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)\text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30\text{ mm}$	$3 - 4\text{ GHz: } \geq 28\text{ mm}$ $4 - 5\text{ GHz: } \geq 25\text{ mm}$ $5 - 6\text{ GHz: } \geq 22\text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4\text{ W/kg}$, $\leq 8\text{ mm}$, $\leq 7\text{ mm}$ and $\leq 5\text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD post-processor scan combine and subsequently superpose these measurement data to calculating the multiband SAR.

SAR Averaged Methods

In MVG, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In MVG measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for

Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100KHz to 6GHz ,when the highest measurement 1-g SAR within a frequency band is <1.5W/kg, the extensive SAR measurement uncertainty analysis described IEEE Std 1528-2013 is not required in SAR report submitted for equipment approval.

8. Conducted Output Power

Band: GSM 850	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	128	190	251		128	190	251
Frequency	824.2	836.6	848.8		824.2	836.6	848.8
GSM (GMSK, Voice)	32.06	31.92	31.79	-9.03	23.03	22.89	22.76
GPRS (GMSK, 1-slot)	32.08	31.99	31.84	-9.03	23.05	22.96	22.81
GPRS (GMSK, 2-slot)	29.85	29.67	29.48	-6.02	23.83	23.65	23.46
GPRS (GMSK, 3-slot)	28.80	28.56	28.40	-4.26	24.54	24.30	24.14
GPRS (GMSK, 4-slot)	26.84	26.60	26.37	-3.01	23.83	23.59	23.36
EGPRS (1-slot)	26.48	26.47	26.22	-9.03	17.45	17.44	17.19
EGPRS (2-slot)	23.53	23.42	23.39	-6.02	17.51	17.40	17.37
EGPRS (3-slot)	23.89	22.54	22.40	-4.26	19.63	18.28	18.14
EGPRS (4-slot)	20.64	20.54	20.23	-3.01	17.63	17.53	17.22

Note:

- Division Factors
To average the power, the division factor is as follows:
1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB
2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB
3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB
4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB
- According to the conducted power as above, the body measurements are performed with 1Tx slots for 850MHz for GPRS.
- The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled

Band: GSM 1900	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	512	661	810		512	661	810
Frequency	1850.2	1880.0	1909.8		1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.23	28.51	26.88	-9.03	20.20	19.48	17.85
GPRS (GMSK, 1-slot)	29.24	28.49	26.85	-9.03	20.21	19.46	17.82
GPRS (GMSK, 2-slot)	26.87	26.13	24.47	-6.02	20.85	20.11	18.45
GPRS (GMSK, 3-slot)	25.82	25.07	23.39	-4.26	21.56	20.81	19.13
GPRS (GMSK, 4-slot)	23.87	23.13	21.45	-3.01	20.86	20.12	18.44
EGPRS (1-slot)	25.00	24.30	22.41	-9.03	15.97	15.27	13.38
EGPRS (2-slot)	22.12	21.44	19.41	-6.02	16.10	15.42	13.39
EGPRS (3-slot)	22.30	20.18	18.32	-4.26	18.04	15.92	14.06
EGPRS (4-slot)	18.41	17.80	16.97	-3.01	15.40	14.79	13.96

Note:

- Division Factors
To average the power, the division factor is as follows:
1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB
2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB
3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB
4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB
- According to the conducted power as above, the body measurements are performed with 1Tx slots for 1900MHz for GPRS.
- The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4182	4233
Frequency	1852.40	1880.00	1907.60	826.40	836.40	846.60
RMC 12.2Kbps	20.71	20.03	19.49	19.96	20.07	20.13
HSDPA Subtest-1	18.40	17.67	17.14	17.75	17.97	18.01
HSDPA Subtest-2	18.39	17.68	17.12	17.75	17.96	18.01
HSDPA Subtest-3	18.42	17.68	17.10	17.75	17.95	18.00
HSDPA Subtest-4	18.40	17.69	17.14	17.77	17.96	17.99
HSUPA Subtest-1	15.63	15.18	15.01	15.61	15.55	15.56
HSUPA Subtest-2	15.82	15.48	14.72	15.14	15.55	15.31
HSUPA Subtest-3	15.62	15.15	15.03	15.37	15.26	15.55
HSUPA Subtest-4	16.10	15.49	15.02	15.37	15.06	15.78
HSUPA Subtest-5	15.98	16.26	14.93	16.22	15.66	16.22

Note:

1. According to the power listed above, the HSDPA and HSUPA were not determined for SAR testing.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2kbps RMC(reference measurement channel) configuration in test loop mode
3. The device do not support power reduction, so power of hotspot activated as the same as hotspot disabled

WLAN 2.4G-2						
Mode	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency	2412	2437	2462	2412	2437	2462
Average Power (dBm)	12.92	12.68	12.59	10.68	10.46	9.99
Mode	802.11n(HT20)			802.11n(HT40)		
Channel	1	6	11	3	6	9
Frequency	2412	2437	2462	2422	2437	2452
Average Power (dBm)	10.58	10.40	9.89	10.92	10.78	10.49

WLAN 5.2G						
Mode	IEEE 802.11a			IEEE 802.11n HT20		
Channel	36	40	48	36	40	48
Frequency	5180	5200	5240	5180	5200	5240
Average Power (dBm)	13.11	13.72	14.87	15.31	14.88	15.39
Mode	IEEE 802.11n HT40			IEEE 802.11ac VHT20		
Channel	38		46	36	40	48
Frequency	5190		5230	5180	5200	5240
Average Power (dBm)	14.36		15.30	13.65	14.18	14.98
Mode	IEEE 802.11ac VHT40			IEEE 802.11ac VHT80		
Channel	38		46	42		
Frequency	5190		5230	5210		
Average Power (dBm)	14.29		15.23	15.20		
WLAN 5.3G						
Mode	IEEE 802.11a			IEEE 802.11n HT20		
Channel	52	60	64	52	60	64
Frequency	5260	5300	5320	5260	5300	5320
Average Power (dBm)	15.12	14.94	14.72	15.19	15.14	15.05
Mode	IEEE 802.11n HT40			IEEE 802.11ac VHT20		
Channel	54		62	52	60	64
Frequency	5270		5310	5260	5300	5320
Average Power (dBm)	15.41		15.34	15.16	15.12	15.04
Mode	EEE 802.11ac VHT40			IEEE 802.11ac VHT80		
Channel	54		62	58		
Frequency	5270		5310	5290		
Average Power (dBm)	15.39		15.34	15.88		

WLAN 5.8G						
Mode	IEEE 802.11a			IEEE 802.11n HT20		
Channel	149	157	165	149	157	165
Frequency	5745	5785	5825	5745	5785	5825
Average Power (dBm)	15.01	15.01	15.13	15.99	15.43	15.32
Mode	IEEE 802.11n HT40			IEEE 802.11ac VHT20		
Channel	151	159		149	157	165
Frequency	5755	5795		5745	5785	5825
Average Power (dBm)	16.17	16.14		15.63	15.63	15.49
Mode	IEEE 802.11ac VHT40			IEEE 802.11ac VHT80		
Channel	151	159		155		
Frequency	5755	5795		5775		
Average Power (dBm)	16.28	16.21		16.95		

Note

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan , just the worst case (the lowest data rate) of all mode were shown in report

Bluetooth						
Mode	GFSK			Pi/4DQPSK		
Channel	0	39	78	0	39	78
Frequency	2402	2441	2480	2402	2441	2480
Average Power (dBm)	3.34	3.38	3.73	2.90	3.61	3.92
Mode	8DPSK			BLE(1M)		
Channel	0	39	78	0	20	39
Frequency	2402	2441	2480	2402	2440	2480
Average Power (dBm)	2.85	3.55	3.89	-8.66	-8.45	-8.40
Mode	BLE(2M)					
Channel	0	20	39			
Frequency	2402	2440	2480			
Average Power (dBm)	-8.67	-8.43	-8.38			

Note

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

LTE Band 2

Conducted Power of LTE Band 2						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0.00	22.09	20.83	20.39
			3.00	22.19	20.92	20.53
			5.00	22.09	20.82	20.42
		3	0.00	22.04	20.98	20.42
			2.00	21.71	20.98	20.44
			3.00	21.64	20.96	20.45
		6	0.00	20.68	19.87	19.42
	16QAM	1	0.00	20.72	19.85	19.34
			3.00	20.81	19.93	19.44
			5.00	20.73	19.89	19.36
		3	0.00	20.58	20.17	19.45
			2.00	20.63	20.19	19.46
			3.00	20.60	20.18	19.42
		6	0.00	19.62	18.95	18.33
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0.00	21.80	20.97	20.48
			7.00	21.88	21.12	20.64
			14.00	21.68	20.95	20.51
		8	0.00	20.78	20.00	19.49
			4.00	20.78	20.01	19.52
			7.00	20.72	19.97	19.53
		15	0.00	20.71	19.98	19.49
	16QAM	1	0.00	20.74	20.20	19.99
			7.00	20.87	20.28	20.09
			14.00	20.61	20.12	19.87
		8	0.00	19.79	19.00	18.67
			4.00	19.80	19.07	18.71
			7.00	19.75	19.02	18.67
		15	0.00	19.73	19.03	18.62

Conducted Power of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0.00	21.57	20.83	20.39
			12.00	21.61	20.97	20.52
			24.00	21.42	20.79	20.34
		12	0.00	20.66	19.94	19.41
			6.00	20.64	19.96	19.52
			13.00	20.52	19.90	19.47
		25	0.00	20.57	19.91	19.45
	16QAM	1	0.00	20.60	20.15	19.29
			12.00	20.65	20.23	19.34
			24.00	20.51	20.06	19.16
		12	0.00	19.57	18.99	18.50
			6.00	19.62	19.03	18.55
			13.00	19.45	18.99	18.49
		25	0.00	19.59	18.95	18.57
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0.00	21.64	20.92	20.48
			24.00	21.77	21.13	20.66
			49.00	21.42	20.77	20.43
		25	0.00	20.72	19.97	19.68
			12.00	20.58	19.98	19.56
			25.00	20.46	20.01	19.58
		50	0.00	20.58	19.98	19.66
	16QAM	1	0.00	20.61	20.10	20.07
			24.00	20.73	20.30	20.21
			49.00	20.40	19.97	19.89
		25	0.00	19.80	19.07	18.78
			24.00	19.65	19.08	18.67
			49.00	19.53	19.06	18.69
		50	0.00	19.63	19.05	18.73

Conducted Power of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0.00	21.45	20.86	20.42
			37.00	21.49	20.90	20.50
			74.00	21.08	20.59	20.26
		37	0.00	20.73	19.91	19.71
			18.00	20.58	19.97	19.56
			38.00	20.39	19.93	19.48
		75	0.00	20.57	19.90	19.61
	16QAM	1	0.00	20.71	20.07	19.97
			38.00	20.76	20.11	20.05
			74.00	20.47	19.78	19.73
		38	0.00	19.61	18.98	18.69
			18.00	19.51	18.99	18.62
			37.00	19.30	18.95	18.53
		75	0.00	19.50	18.98	18.62
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0.00	21.25	20.79	20.36
			50.00	21.48	21.08	20.71
			100.00	20.82	20.43	20.12
		50	0.00	20.62	19.97	19.77
			25.00	20.41	19.91	19.57
			50.00	20.25	19.92	19.42
		100	0.00	20.50	19.96	19.65
	16QAM	1	0.00	20.75	20.01	19.60
			50.00	20.99	20.28	20.00
			100.00	20.41	19.60	19.36
		50	0.00	19.63	18.98	18.82
			25.00	19.40	18.97	18.66
			50.00	19.25	18.99	18.44
		100	0.00	19.51	19.03	18.72

LTE Band 4

Conducted Power of LTE Band 4						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0.00	21.86	21.67	21.57
			3.00	21.93	21.30	21.70
			5.00	21.83	21.25	21.58
		3	0.00	21.76	21.42	21.39
			2.00	21.79	21.43	21.43
			3.00	21.73	21.39	21.39
		6	0.00	20.96	20.27	20.60
	16QAM	1	0.00	20.80	20.28	20.31
			2.00	20.91	20.36	20.40
			5.00	20.77	20.28	20.35
		3	0.00	20.57	20.58	20.29
			1.00	20.60	20.65	20.28
			3.00	20.53	20.63	20.24
		6	0.00	19.56	19.37	19.35
		6	0.00	19.56	19.37	19.35
			0.00	19.56	19.37	19.35
			0.00	19.56	19.37	19.35
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0.00	22.12	21.33	21.66
			7.00	21.64	21.53	21.71
			14.00	21.47	21.35	21.66
		8	0.00	20.49	20.37	20.61
			4.00	20.48	20.41	20.66
			7.00	20.43	20.37	20.60
		15	0.00	20.36	20.40	20.48
	16QAM	1	0.00	20.36	20.55	20.77
			7.00	20.50	20.69	20.88
			14.00	20.29	20.56	20.78
		8	0.00	19.45	19.42	19.57
			4.00	19.49	19.45	19.62
			7.00	19.42	19.42	19.59
		15	0.00	19.39	19.39	19.42
		15	0.00	19.39	19.39	19.42
			0.00	19.39	19.39	19.42
			0.00	19.39	19.39	19.42

Conducted Power of LTE Band 4						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0.00	21.56	21.10	21.35
			12.00	21.27	21.26	21.52
			24.00	21.13	21.11	21.37
		12	0.00	20.21	20.18	20.27
			6.00	20.27	20.24	20.33
			13.00	20.18	20.18	20.25
		25	0.00	20.19	20.21	20.24
	16QAM	1	0.00	20.20	20.38	19.99
			12.00	20.27	20.53	20.13
			24.00	20.17	20.37	19.99
		12	0.00	19.20	19.25	19.17
			6.00	19.24	19.37	19.24
			13.00	19.15	19.28	19.16
		25	0.00	19.22	19.29	19.22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0.00	21.39	21.11	21.31
			24.00	21.50	21.42	21.69
			49.00	21.21	21.19	21.48
		25	0.00	20.30	20.27	20.31
			12.00	20.26	20.32	20.36
			25.00	20.23	20.32	20.28
		50	0.00	20.30	20.36	20.24
	16QAM	1	0.00	20.18	20.35	20.57
			24.00	20.42	20.58	20.82
			49.00	20.21	20.35	20.62
		25	0.00	19.42	19.36	19.27
			12.00	19.45	19.42	19.31
			25.00	19.41	19.39	19.23
		50	0.00	19.36	19.35	19.23

Conducted Power of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0.00	21.20	20.98	21.10
			37.00	21.26	21.21	21.46
			74.00	21.00	21.10	21.31
		37	0.00	20.36	20.20	20.31
			18.00	20.32	20.27	20.42
			38.00	20.14	20.29	20.38
		75	0.00	20.25	20.22	20.35
	16QAM	1	0.00	20.26	20.20	20.45
			37.00	20.61	20.44	20.59
			74.00	20.42	20.20	20.42
		37	0.00	19.29	19.22	19.19
			18.00	19.28	19.29	19.28
			38.00	19.17	19.27	19.26
		75	0.00	19.22	19.28	19.26
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0.00	20.86	20.82	20.84
			50.00	21.27	21.34	21.44
			99.00	20.77	20.96	21.12
		50	0.00	20.22	20.18	20.08
			25.00	20.14	20.21	20.13
			50.00	20.08	20.24	20.09
		100	0.00	20.18	20.21	20.08
	16QAM	1	0.00	20.23	20.04	20.13
			50.00	20.80	20.52	20.52
			99.00	20.38	19.96	20.14
		50	0.00	19.26	19.21	19.12
			25.00	19.25	19.25	19.12
			50.00	19.14	19.28	19.03
		100	0.00	19.24	19.26	19.11

LTE Band 5

Conducted Power of LTE Band 5						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0.00	20.83	21.06	20.52
			3.00	20.96	21.15	20.57
			5.00	20.85	21.04	20.51
		3	0.00	20.98	21.09	20.61
			2.00	20.99	20.87	20.67
			3.00	20.98	20.75	20.66
		6	0.00	19.93	19.68	19.64
	16QAM	1	0.00	19.87	19.71	19.58
			2.00	20.00	19.80	19.64
			5.00	19.89	19.69	19.57
		3	0.00	20.15	19.59	19.82
			1.00	20.19	19.64	19.89
			3.00	20.17	19.64	19.84
		6	0.00	18.89	18.60	18.64
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0.00	21.03	20.67	20.66
			7.00	21.19	20.78	20.81
			14.00	21.05	20.70	20.65
		8	0.00	20.05	19.65	19.70
			4.00	19.95	19.71	19.75
			7.00	19.76	19.70	19.67
		15	0.00	19.56	19.66	19.71
	16QAM	1	0.00	19.58	19.85	20.29
			8.00	19.69	19.96	20.39
			14.00	19.57	19.83	20.22
		8	0.00	18.68	18.69	18.88
			4.00	18.62	18.73	18.91
			7.00	18.60	18.76	18.85
		15	0.00	18.58	18.68	18.77

Conducted Power of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0.00	20.83	20.47	20.56
			12.00	21.01	20.61	20.66
			24.00	20.89	20.50	20.51
		12	0.00	19.97	19.53	19.61
			6.00	19.82	19.63	19.68
			13.00	19.59	19.58	19.58
		25	0.00	19.49	19.62	19.60
	16QAM	1	0.00	19.43	19.80	19.43
			12.00	19.56	19.89	19.54
			24.00	19.54	19.78	19.41
		12	0.00	18.41	18.60	18.58
			6.00	18.52	18.68	18.66
			13.00	18.45	18.65	18.58
		25	0.00	18.52	18.62	18.62
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0.00	20.91	20.56	20.54
			25.00	21.24	20.82	20.80
			49.00	21.03	20.59	20.58
		25	0.00	20.13	19.67	19.80
			12.00	19.88	19.70	19.78
			25.00	19.81	19.76	19.69
		50	0.00	19.64	19.69	19.73
	16QAM	1	0.00	19.39	19.68	20.16
			25.00	19.68	19.96	20.42
			49.00	19.55	19.77	20.21
		25	0.00	18.73	18.71	18.84
			12.00	18.71	18.74	18.82
			25.00	18.71	18.75	18.72
		50	0.00	18.63	18.73	18.73

LTE Band 12

Conducted Power of LTE Band 12						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0.00	20.80	20.79	20.11
			3.00	20.87	20.85	20.25
			5.00	20.80	20.70	20.15
		3	0.00	20.86	20.43	20.23
			2.00	20.89	20.32	20.25
			3.00	20.85	20.28	20.21
		6	0.00	19.36	19.30	19.27
			0.00	19.21	19.40	19.12
			2.00	19.32	19.48	19.24
	16QAM	1	5.00	19.30	19.36	19.12
			0.00	19.47	19.28	19.38
			2.00	19.51	19.30	19.40
		3	3.00	19.49	19.30	19.35
			0.00	18.36	18.34	18.48
			0.00	19.21	19.40	19.12
		6	2.00	19.32	19.48	19.24
			5.00	19.30	19.36	19.12
			0.00	19.47	19.28	19.38
3MHz	QPSK	1	0.00	20.96	20.36	20.26
			7.00	21.10	20.47	20.41
			14.00	20.94	20.31	20.27
		8	0.00	19.53	19.40	19.27
			4.00	19.48	19.36	19.36
			7.00	19.43	19.33	19.33
		15	0.00	19.39	19.36	19.27
			0.00	19.40	19.52	19.77
			7.00	19.56	19.65	19.92
			14.00	19.38	19.46	19.73
	16QAM	1	0.00	18.44	18.38	18.41
			4.00	18.53	18.38	18.52
			7.00	18.49	18.32	18.48
		8	0.00	18.47	18.34	18.35
			0.00	19.40	19.52	19.77
			7.00	19.56	19.65	19.92
			14.00	19.38	19.46	19.73
		15	0.00	18.44	18.38	18.41
			4.00	18.53	18.38	18.52
			7.00	18.49	18.32	18.48
		8	0.00	18.47	18.34	18.35
			0.00	19.40	19.52	19.77
			7.00	19.56	19.65	19.92
			14.00	19.38	19.46	19.73

Conducted Power of LTE Band 12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0.00	20.77	20.17	20.09
			12.00	20.90	20.30	20.24
			24.00	20.76	20.09	20.11
		12	0.00	19.50	19.32	19.13
			6.00	19.39	19.30	19.25
			13.00	19.37	19.13	19.28
		25	0.00	19.27	19.26	19.19
	16QAM	1	0.00	19.29	19.47	19.03
			12.00	19.45	19.58	19.12
			24.00	19.29	19.43	18.98
		12	0.00	18.12	18.35	18.11
			6.00	18.32	18.34	18.28
			13.00	18.32	18.22	18.27
		25	0.00	18.28	18.27	18.24
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0.00	20.83	20.22	20.22
			25.00	21.07	20.40	20.40
			49.00	20.36	20.17	20.19
		25	0.00	19.16	19.48	19.43
			12.00	19.40	19.37	19.36
			25.00	19.28	19.31	19.48
		50	0.00	19.23	19.41	19.46
	16QAM	1	0.00	19.28	19.36	19.82
			25.00	19.55	19.63	20.04
			49.00	19.27	19.36	19.67
		25	0.00	18.24	18.49	18.51
			12.00	18.49	18.41	18.40
			25.00	18.37	18.40	18.54
		50	0.00	18.25	18.38	18.49

LTE Band 13

Conducted Power of LTE Band 13						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23205	23230	23255
5MHz	QPSK	1	0.00	21.26	21.06	20.71
			12.00	21.38	20.86	20.83
			24.00	21.25	20.68	20.77
		12	0.00	20.29	19.80	19.80
			6.00	20.41	19.95	19.94
			13.00	20.39	19.80	19.85
		25	0.00	20.36	19.76	19.89
	16QAM	1	0.00	20.37	19.97	19.61
			12.00	20.46	20.12	19.72
			24.00	20.36	19.96	19.65
		12	0.00	19.22	18.80	18.83
			6.00	19.36	18.88	18.87
			13.00	19.30	18.78	18.85
		25	0.00	19.32	18.76	18.95
Bandwidth	Modulation	RB size	RB offset	Channel		
				23230		
10MHz	QPSK	1	0.00	21.27		
			25.00	21.51		
			49.00	21.35		
		25	0.00	20.38		
			13.00	20.38		
			25.00	20.08		
		50	0.00	20.05		
	16QAM	1	0.00	19.73		
			25.00	19.99		
			49.00	19.85		
		25	0.00	18.93		
			13.00	18.95		
			25.00	18.99		
		50	0.00	18.93		

LTE Band 17

Conducted Power of LTE Band 17						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0.00	20.78	20.61	20.13
			12.00	20.92	20.30	20.26
			24.00	20.74	20.08	20.11
		12	0.00	19.82	19.26	19.11
			6.00	19.86	19.29	19.28
			13.00	19.68	19.27	19.25
		25	0.00	19.73	19.29	19.19
	16QAM	1	0.00	19.82	19.43	19.00
			12.00	19.96	19.52	19.11
			24.00	19.80	19.35	18.97
		12	0.00	18.79	18.28	18.09
			6.00	18.80	18.32	18.28
			13.00	18.69	18.26	18.22
		25	0.00	18.76	18.28	18.24
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0.00	20.82	20.32	20.23
			25.00	21.04	20.48	20.43
			49.00	20.77	20.27	20.19
		25	0.00	20.01	19.53	19.48
			12.00	19.74	19.37	19.36
			25.00	19.53	19.51	19.49
		50	0.00	19.44	19.54	19.49
	16QAM	1	0.00	19.79	19.27	19.41
			25.00	20.03	19.45	19.61
			49.00	19.74	19.25	19.36
		25	0.00	18.56	18.59	18.50
			12.00	18.44	18.47	18.40
			25.00	18.49	18.62	18.55
		50	0.00	18.48	18.56	18.54

LTE Band 25

Conducted Power of LTE Band 25						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26047	26365	26683
1.4MHz	QPSK	1	0.00	22.48	21.13	17.79
			3.00	22.61	21.22	16.99
			5.00	22.49	21.10	15.92
		3	0.00	22.45	21.27	17.05
			2.00	22.42	21.27	16.40
			3.00	22.42	21.23	16.01
		6	0.00	21.55	20.22	16.44
	16QAM	1	0.00	21.16	20.35	16.90
			2.00	21.03	20.42	16.33
			5.00	20.93	20.30	15.33
		3	0.00	20.98	20.24	16.72
			2.00	20.98	20.29	16.13
			3.00	20.96	20.27	15.78
		6	0.00	19.88	19.22	16.10
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26055	26365	26675
3MHz	QPSK	1	0.00	22.15	21.24	19.72
			7.00	22.20	21.38	17.84
			14.00	22.05	21.21	15.65
		8	0.00	21.11	20.29	18.49
			4.00	21.12	20.35	17.44
			7.00	21.05	20.28	16.57
		15	0.00	21.03	20.27	17.65
	16QAM	1	0.00	21.05	20.45	19.19
			7.00	21.13	20.58	17.49
			14.00	20.92	20.42	15.39
		8	0.00	20.09	19.31	18.25
			4.00	20.13	19.28	17.25
			7.00	20.02	19.28	16.40
		15	0.00	20.05	19.30	17.43

Conducted Power of LTE Band 25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26065	26365	26665
5MHz	QPSK	1	0.00	21.93	21.15	20.74
			12.00	21.97	21.23	19.04
			24.00	21.76	21.06	15.88
		12	0.00	20.96	20.23	20.07
			6.00	20.96	20.30	19.19
			13.00	20.82	20.22	17.43
		25	0.00	20.88	20.21	19.09
	16QAM	1	0.00	20.94	20.49	19.52
			12.00	20.98	20.58	18.37
			24.00	20.80	20.35	15.21
		12	0.00	19.94	19.24	18.82
			6.00	19.90	19.33	18.74
			13.00	19.79	19.24	17.33
		25	0.00	19.88	19.19	18.66
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26090	26365	26640
10MHz	QPSK	1	0.00	22.01	21.23	20.77
			24.00	22.11	21.42	21.13
			49.00	21.77	21.08	16.35
		25	0.00	21.01	20.30	19.79
			12.00	20.93	20.30	19.80
			25.00	20.78	20.34	19.30
		50	0.00	20.91	20.35	19.62
	16QAM	1	0.00	20.92	20.46	20.33
			24.00	21.00	20.62	20.36
			49.00	20.74	20.26	16.48
		25	0.00	20.06	19.34	18.86
			12.00	20.00	19.35	18.85
			25.00	19.84	19.37	18.36
		50	0.00	19.90	19.36	18.67

Conducted Power of LTE Band 25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26115	26365	26615
15MHz	QPSK	1	0.00	21.83	21.13	20.67
			37.00	21.86	21.20	20.87
			74.00	21.50	20.88	16.79
		37	0.00	21.06	20.27	19.94
			18.00	20.95	20.30	19.91
			38.00	20.78	20.27	19.71
		75	0.00	20.92	20.27	19.85
	16QAM	1	0.00	21.03	20.34	20.27
			38.00	21.09	20.46	20.41
			74.00	20.88	20.07	16.85
		36	0.00	19.94	19.23	18.94
			18.00	19.87	19.28	18.90
			37.00	19.70	19.21	18.62
		75	0.00	19.86	19.29	18.81
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26140	26365	26590
20MHz	QPSK	1	0.00	21.57	21.09	20.64
			50.00	21.85	21.37	21.00
			99.00	21.20	20.77	17.19
		50	0.00	20.96	20.27	20.18
			25.00	20.77	20.26	19.90
			50.00	20.58	20.27	19.60
		100	0.00	20.82	20.28	19.93
	16QAM	1	0.00	21.07	20.35	19.96
			50.00	21.35	20.59	20.29
			99.00	20.73	19.93	17.10
		50	0.00	19.98	19.31	19.19
			25.00	19.77	19.31	18.93
			50.00	19.57	19.27	18.68
		100	0.00	19.85	19.27	18.98

LTE Band 26-1

Conducted Power of LTE Band 26						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26697	26740	26783
1.4MHz	QPSK	1	0.00	21.01	20.48	22.61
			2.00	21.04	20.67	22.75
			5.00	21.03	22.50	22.66
		3	0.00	21.09	22.51	22.74
			1.00	21.12	21.22	22.70
			3.00	21.09	21.24	22.63
		6	0.00	19.53	20.15	21.57
	16QAM	1	0.00	20.13	20.05	21.63
			3.00	20.07	20.42	21.85
			5.00	19.52	20.19	21.72
		3	0.00	19.57	20.18	21.88
			1.00	20.10	20.32	21.66
			3.00	19.99	20.42	21.71
		6	0.00	18.59	20.54	20.58
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26705	26740	27775
3MHz	QPSK	1	0.00	22.36	21.80	20.74
			8.00	22.45	21.47	20.97
			14.00	21.87	20.69	20.91
		8	0.00	20.74	19.61	19.80
			4.00	20.78	19.66	19.89
			7.00	20.79	19.71	19.86
		15	0.00	20.85	19.68	19.86
	16QAM	1	0.00	21.30	19.74	20.04
			7.00	21.10	20.40	20.89
			14.00	20.84	19.90	21.13
		8	0.00	19.95	18.76	19.71
			4.00	19.88	18.94	19.86
			7.00	19.90	18.74	19.95
		15	0.00	19.87	18.85	19.74

Conducted Power of LTE Band 26

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26715	26740	26765
5MHz	QPSK	1	0.00	22.17	21.69	21.79
			12.00	22.31	21.81	22.10
			24.00	21.81	21.85	21.97
		12	0.00	20.68	20.64	20.83
			6.00	20.82	20.88	21.05
			13.00	20.89	20.89	21.03
		25	0.00	20.80	20.87	20.96
	16QAM	1	0.00	20.78	21.01	20.70
			12.00	20.71	21.02	21.36
			24.00	21.05	20.79	21.16
		12	0.00	19.70	19.78	19.80
			6.00	19.85	19.93	19.99
			13.00	19.88	19.98	19.97
		25	0.00	19.83	19.88	20.00
Bandwidth	Modulation	RB size	RB offset	Channel		
				26740		
10MHz	QPSK	1	0.00	22.10		
			25.00	22.43		
			49.00	22.34		
		25	0.00	20.85		
			12.00	21.11		
			25.00	20.94		
		50	0.00	21.00		
	16QAM	1	0.00	20.82		
			25.00	21.04		
			49.00	21.55		
		25	0.00	19.79		
			12.00	20.04		
			25.00	20.24		
		50	0.00	20.01		

LTE Band 26-2

Conducted Power of LTE Band 26						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26797	26915	27033
1.4MHz	QPSK	1	0.00	21.26	20.88	22.89
			2.00	21.39	22.95	23.09
			5.00	21.25	22.87	22.93
		3	0.00	21.03	21.61	23.03
			1.00	21.40	21.58	22.99
			3.00	21.35	21.52	22.90
		6	0.00	20.38	20.57	21.89
	16QAM	1	0.00	20.31	20.70	21.94
			2.00	20.52	20.77	22.01
			5.00	19.83	20.58	22.03
		3	0.00	20.49	20.77	22.06
			1.00	20.60	20.58	22.18
			3.00	20.02	20.66	21.93
		6	0.00	18.82	20.93	20.83
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26805	26915	27025
3MHz	QPSK	1	0.00	22.60	22.26	21.08
			8.00	22.80	21.95	21.16
			14.00	22.17	21.03	20.98
		8	0.00	21.16	19.98	20.12
			4.00	21.19	20.15	20.12
			7.00	21.11	20.09	20.10
		15	0.00	21.14	20.10	20.08
	16QAM	1	0.00	21.15	20.25	21.37
			8.00	21.83	20.28	21.22
			14.00	21.28	20.63	21.15
		8	0.00	20.13	19.07	20.30
			4.00	20.33	19.24	20.15
			7.00	20.11	19.29	20.19
		15	0.00	20.19	19.14	20.25

Conducted Power of LTE Band 26

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26715	26865	27015
5MHz	QPSK	1	0.00	22.44	22.20	22.33
			12.00	22.48	22.36	22.46
			24.00	22.11	22.23	22.31
		12	0.00	21.06	21.34	21.43
			6.00	21.13	21.44	21.49
			13.00	21.05	21.38	21.36
		25	0.00	21.07	21.38	21.49
	16QAM	1	0.00	21.25	21.17	21.47
			12.00	21.20	21.71	21.39
			24.00	20.96	21.47	21.59
		12	0.00	20.12	20.30	20.28
			6.00	20.11	20.49	20.42
			13.00	20.12	20.39	20.38
		25	0.00	20.11	20.42	20.42
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26840	26915	26990
10MHz	QPSK	1	0.00	22.54	22.70	22.31
			24.00	22.92	22.88	22.57
			49.00	22.69	22.50	22.35
		25	0.00	21.75	21.49	21.38
			12.00	21.77	21.54	21.45
			25.00	21.74	21.61	21.34
		50	0.00	21.73	21.49	21.39
	16QAM	1	0.00	21.66	21.81	21.38
			24.00	22.02	21.73	21.62
			49.00	21.91	21.37	21.41
		25	0.00	20.78	20.50	20.45
			12.00	20.79	20.51	20.54
			25.00	20.77	20.58	20.42
		50	0.00	20.74	20.53	20.42

Conducted Power of LTE Band 26						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26865	26915	26965
15MHz	QPSK	1	0.00	22.33	21.96	22.00
			38.00	22.75	22.29	22.33
			74.00	22.65	22.21	22.17
		38	0.00	21.42	21.31	21.24
			18.00	21.28	21.38	21.39
			37.00	21.34	21.40	21.31
		75	0.00	21.22	21.38	21.29
	16QAM	1	0.00	21.35	21.21	21.69
			38.00	21.68	21.56	21.90
			74.00	21.61	21.42	21.78
		38	0.00	20.22	20.28	20.23
			18.00	20.26	20.35	20.40
			37.00	20.32	20.43	20.34
		75	0.00	20.28	20.39	20.27

LTE Band 41

Conducted Power of LTE Band 41						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39675	40620	41565
5MHz	QPSK	1	0.00	21.45	21.10	23.48
			12.00	21.80	21.53	23.24
			24.00	21.56	21.29	22.76
		12	0.00	20.29	20.45	22.63
			6.00	20.77	20.32	22.51
			13.00	20.51	20.55	22.22
		25	0.00	20.42	20.51	22.23
	16QAM	1	0.00	20.39	20.27	22.94
			12.00	20.79	20.53	22.47
			24.00	20.78	20.61	22.27
		12	0.00	19.27	19.41	21.65
			6.00	19.47	19.36	21.57
			13.00	19.75	19.32	21.26
		25	0.00	19.67	19.43	21.50
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39700	40620	41540
10MHz	QPSK	1	0.00	21.45	21.19	24.29
			24.00	22.23	21.78	23.86
			49.00	22.09	21.63	22.88
		25	0.00	20.53	20.43	23.03
			12.00	21.02	20.43	22.90
			25.00	20.93	20.67	22.29
		50	0.00	20.70	20.56	22.67
	16QAM	1	0.00	20.57	19.88	23.28
			24.00	21.36	20.46	22.92
			49.00	21.13	20.54	22.12
		25	0.00	19.53	19.26	22.11
			12.00	20.01	19.39	21.76
			25.00	20.19	19.45	21.53
		50	0.00	19.73	19.31	21.72

Conducted Power of LTE Band 41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39725	40620	41515
15MHz	QPSK	1	0.00	21.20	20.89	24.77
			37.00	22.17	21.36	24.03
			74.00	22.62	21.64	22.82
		37	0.00	20.55	20.08	23.88
			18.00	21.19	20.31	23.34
			38.00	21.25	20.69	22.66
		75	0.00	21.19	20.48	23.25
	16QAM	1	0.00	20.46	19.57	23.76
			37.00	21.03	20.26	23.20
			74.00	21.82	20.52	21.95
		37	0.00	19.85	19.13	22.59
			18.00	19.93	19.40	22.17
			38.00	20.20	19.42	21.52
		75	0.00	19.95	19.43	22.11
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39750	40620	41490
20MHz	QPSK	1	0.00	20.83	20.44	23.97
			50.00	22.56	21.75	24.74
			99.00	22.91	21.61	22.88
		50	0.00	17.13	20.12	23.87
			25.00	21.07	20.32	23.29
			50.00	21.77	20.74	22.80
		100	0.00	21.34	20.33	23.10
	16QAM	1	0.00	19.52	19.11	22.72
			50.00	21.47	20.44	23.64
			99.00	21.28	20.87	21.71
		50	0.00	19.72	19.07	22.63
			25.00	20.18	19.50	22.55
			50.00	20.79	19.72	21.61
		100	0.00	20.39	19.49	22.17

LTE Band 66

Conducted Power of LTE Band 66						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131979	132322	132665
1.4MHz	QPSK	1	0.00	22.43	22.35	22.69
			2.00	22.54	22.48	22.82
			5.00	22.35	22.35	22.22
		3	0.00	22.18	22.22	22.22
			1.00	22.20	22.22	22.24
			3.00	22.17	22.20	22.37
		6	0.00	21.49	21.45	21.57
	16QAM	1	0.00	21.39	21.28	21.35
			2.00	21.53	21.43	21.43
			5.00	21.38	21.26	21.34
		3	0.00	21.24	21.15	21.22
			1.00	21.24	21.16	21.34
			3.00	21.18	21.13	21.15
		6	0.00	20.29	20.20	20.46
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131987	132322	132657
3MHz	QPSK	1	0.00	22.46	22.19	22.63
			8.00	22.42	22.43	22.50
			14.00	22.39	22.45	22.63
		8	0.00	21.45	21.40	21.47
			4.00	21.51	21.42	21.51
			7.00	21.40	21.42	21.48
		15	0.00	21.11	21.28	21.20
	16QAM	1	0.00	21.08	21.30	21.29
			8.00	20.87	21.25	21.34
			14.00	20.95	21.23	21.36
		8	0.00	19.91	20.43	20.41
			4.00	20.06	20.44	20.46
			7.00	19.92	20.41	20.49
		15	0.00	20.10	20.21	20.25

Conducted Power of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
5MHz	QPSK	1	0.00	22.19	22.10	22.26
			12.00	22.26	22.35	22.06
			24.00	22.12	22.19	21.98
		12	0.00	21.18	21.06	21.01
			6.00	21.18	21.15	21.05
			13.00	20.84	21.09	21.03
		25	0.00	20.75	21.09	21.02
	16QAM	1	0.00	20.76	21.15	21.08
			12.00	20.92	21.31	21.26
			24.00	20.79	21.21	21.13
		12	0.00	19.57	19.99	20.01
			6.00	19.63	20.05	20.15
			13.00	19.54	19.98	20.11
		25	0.00	19.66	19.99	20.06
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
10MHz	QPSK	1	0.00	22.28	21.94	22.34
			24.00	22.42	22.37	22.59
			49.00	22.06	22.01	22.12
		25	0.00	21.10	21.06	20.97
			12.00	21.08	21.08	21.07
			25.00	20.80	21.13	21.13
		50	0.00	20.74	21.03	21.07
	16QAM	1	0.00	20.69	21.02	21.06
			24.00	20.92	21.26	21.37
			49.00	20.72	21.03	21.16
		25	0.00	19.70	20.06	20.06
			12.00	19.73	20.14	20.21
			25.00	19.67	20.09	20.26
		50	0.00	19.68	20.05	20.13

Conducted Power of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132047	132322	132597
15MHz	QPSK	1	0.00	22.06	21.51	22.03
			38.00	22.13	21.82	22.41
			74.00	21.92	21.72	21.96
		38	0.00	21.19	20.73	20.95
			18.00	20.79	20.85	20.99
			37.00	20.60	20.86	21.11
		75	0.00	20.72	20.79	21.02
	16QAM	1	0.00	20.82	20.46	20.88
			38.00	21.05	20.68	21.19
			74.00	20.96	20.75	21.06
		38	0.00	19.71	20.02	19.96
			18.00	19.68	20.18	20.03
			37.00	19.55	20.14	20.09
		75	0.00	19.66	20.15	20.06
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132072	132322	132572
20MHz	QPSK	1	0.00	21.99	21.32	21.57
			50.00	22.34	21.90	22.26
			99.00	21.37	21.57	21.75
		50	0.00	20.72	20.52	20.92
			25.00	20.71	20.64	20.96
			50.00	20.59	20.56	21.12
		100	0.00	20.67	20.59	21.04
	16QAM	1	0.00	20.52	20.49	20.75
			50.00	21.01	20.97	21.53
			99.00	20.59	20.58	21.09
		50	0.00	19.76	19.75	19.97
			25.00	19.75	19.94	20.05
			50.00	19.71	19.85	20.18
		100	0.00	19.75	19.99	20.07

LTE Band 71


Conducted Power of LTE Band 71						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				133147	133297	133447
5MHz	QPSK	1	0.00	21.51	21.34	21.46
			12.00	21.70	21.48	21.95
			24.00	21.63	21.40	21.82
		12	0.00	20.43	20.48	20.90
			6.00	20.66	20.74	21.01
			13.00	20.66	20.74	20.99
		25	0.00	20.59	20.78	21.00
	16QAM	1	0.00	20.69	20.51	20.69
			12.00	20.56	20.67	21.13
			24.00	20.38	20.62	21.06
		12	0.00	18.81	19.46	19.98
			6.00	19.02	19.71	20.07
			13.00	19.06	19.86	20.08
		25	0.00	19.05	19.86	20.01
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				133172	133297	133422
10MHz	QPSK	1	0.00	21.48	21.34	21.78
			24.00	21.81	21.67	21.72
			49.00	21.77	21.55	21.68
		25	0.00	20.46	20.60	21.10
			12.00	20.49	20.92	21.05
			25.00	20.45	20.92	21.18
		50	0.00	20.17	20.95	21.12
	16QAM	1	0.00	20.19	20.43	20.78
			24.00	20.55	20.75	20.94
			49.00	20.45	20.60	21.01
		25	0.00	18.91	19.61	20.14
			12.00	19.24	19.97	20.12
			25.00	19.41	20.11	20.26
		50	0.00	19.09	20.03	20.17

Conducted Power of LTE Band 71

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				133197	133297	133397
15MHz	QPSK	1	0.00	21.33	21.17	21.80
			37.00	21.81	21.51	21.58
			74.00	21.73	21.45	21.73
		37	0.00	20.48	20.48	20.99
			18.00	20.65	20.65	21.02
			38.00	20.54	20.83	21.11
		75	0.00	20.16	20.68	20.49
	16QAM	1	0.00	20.29	20.19	20.56
			37.00	20.78	20.58	20.26
			74.00	20.70	20.50	20.53
		37	0.00	18.87	19.42	19.69
			18.00	19.18	19.76	19.76
			38.00	19.29	20.03	19.80
		75	0.00	19.10	19.97	19.73
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				133222	133322	133372
20MHz	QPSK	1	0.00	20.85	20.70	20.74
			50.00	21.70	21.48	21.50
			99.00	21.41	20.94	21.09
		50	0.00	20.09	20.00	20.39
			25.00	20.70	20.29	20.62
			50.00	20.49	20.29	20.71
		100	0.00	20.25	20.24	20.53
	16QAM	1	0.00	19.56	19.97	20.21
			50.00	20.33	20.65	20.89
			99.00	20.09	20.21	20.50
		50	0.00	18.70	19.00	19.44
			25.00	19.12	19.41	19.72
			50.00	19.23	19.52	19.83
		100	0.00	18.94	19.52	19.63

9. Exposure Position Consideration

9.1. EUT Antenna Location

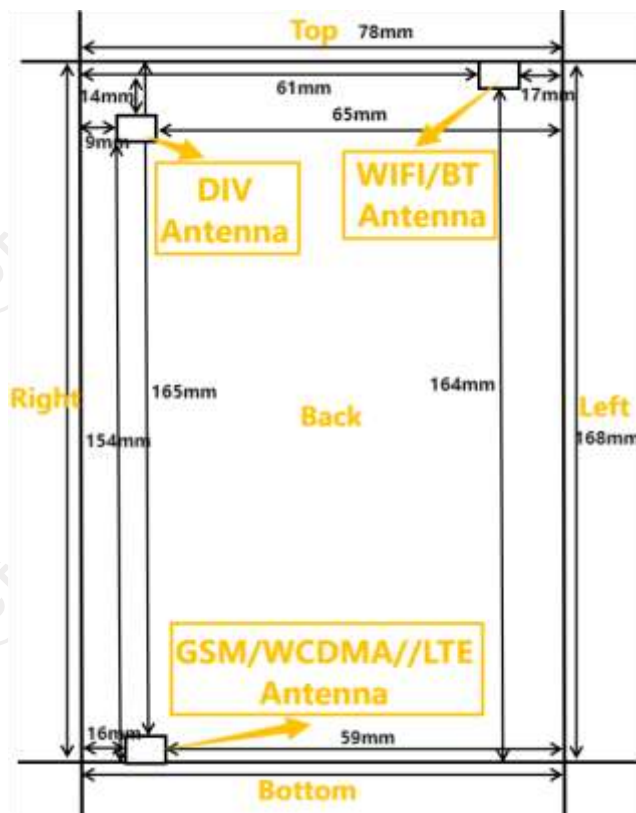

9.2. Test Position Consideration

Test Positions						
Mode	Back Side	Front Side	Top Side	Bottom Side	Right Side	Left Side
GSM/WCDMA/CDMA/LTE	Yes	Yes	No	Yes	Yes	No
WIFI/BT	Yes	Yes	Yes	No	No	Yes

Note:

1. KDB KDB648474 D04, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 25mm.
2. WWAN diversity antenna is RX only.

10. SAR Test Results Summary

10.1. Head 1g SAR Data

Band	Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/kg)
GSM850	voice	Left Cheek	128	824.2	32.06	32.50	-0.93	0.28	1.107	0.31	1.60
		Left Tilt	128	824.2	32.06	32.50	1.12	0.15	1.107	0.17	
		Right Cheek	128	824.2	32.06	32.50	2.31	0.26	1.107	0.29	
		Right Tilt	128	824.2	32.06	32.50	1.36	0.14	1.107	0.15	
GSM1900	voice	Left Cheek	512	1850.2	29.23	29.50	-0.31	0.12	1.064	0.13	
		Left Tilt	512	1850.2	29.23	29.50	-0.77	0.07	1.064	0.07	
		Right Cheek	512	1850.2	29.23	29.50	1.32	0.11	1.064	0.12	
		Right Tilt	512	1850.2	29.23	29.50	4.03	0.06	1.064	0.06	
WCDMA Band II	RMC	Left Cheek	9262	1852.4	20.71	21.00	-3.33	0.15	1.069	0.16	
		Left Tilt	9262	1852.4	20.71	21.00	1.65	0.08	1.069	0.09	
		Right Cheek	9262	1852.4	20.71	21.00	3.02	0.13	1.069	0.14	
		Right Tilt	9262	1852.4	20.71	21.00	-2.01	0.07	1.069	0.07	
WCDMA Band V	RMC	Left Cheek	4233	846.6	20.13	20.50	1.02	0.31	1.089	0.34	
		Left Tilt	4233	846.6	20.13	20.50	-1.51	0.16	1.089	0.17	
		Right Cheek	4233	846.6	20.13	20.50	-3.30	0.29	1.089	0.32	
		Right Tilt	4233	846.6	20.13	20.50	2.64	0.15	1.089	0.16	
2.4G	802.11b	Left Cheek	1	2412	12.92	13.00	-2.12	0.08	1.019	0.08	
		Left Tilt	1	2412	12.92	13.00	-1.63	0.04	1.019	0.04	
		Right Cheek	1	2412	12.92	13.00	-3.08	0.07	1.019	0.07	
		Right Tilt	1	2412	12.92	13.00	2.53	0.03	1.019	0.03	
5.2G	802.11n	Left Cheek	48	5240	15.39	15.50	1.97	0.20	1.026	0.21	
		Left Tilt	48	5240	15.39	15.50	-1.75	0.11	1.026	0.11	
		Right Cheek	48	5240	15.39	15.50	-2.86	0.18	1.026	0.18	
		Right Tilt	48	5240	15.39	15.50	2.42	0.09	1.026	0.09	
5.3G	802.11ac	Left Cheek	58	5290	15.88	16.00	-2.81	0.30	1.028	0.31	
		Left Tilt	58	5290	15.88	16.00	-2.00	0.16	1.028	0.16	
		Right Cheek	58	5290	15.88	16.00	-3.07	0.28	1.028	0.29	
		Right Tilt	58	5290	15.88	16.00	2.53	0.15	1.028	0.15	
5.8G	802.11ac	Left Cheek	155	5775	16.95	17.00	-1.73	0.31	1.012	0.31	
		Left Tilt	155	5775	16.95	17.00	-2.11	0.17	1.012	0.17	
		Right Cheek	155	5775	16.95	17.00	-1.32	0.29	1.012	0.29	
		Right Tilt	155	5775	16.95	17.00	2.32	0.16	1.012	0.16	

BT	EDR	Left Cheek	78	2480	3.92	4.00	-1.39	0.07	1.019	0.07	
		Left Tilt	78	2480	3.92	4.00	0.36	0.03	1.019	0.03	
		Right Cheek	78	2480	3.92	4.00	2.15	0.06	1.019	0.06	
		Right Tilt	78	2480	3.92	4.00	0.99	0.03	1.019	0.03	

Band	Mode	Test Position	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)
LTE Band 2	QPSK (20MHz)	Right Cheek	18700	1860	1	50	21.48	21.50	-1.51	0.18	1.005	0.18
					50	0	20.62	21.00	0.58	0.16	1.091	0.17
		Right Tilt	18700	1860	1	50	21.48	21.50	2.04	0.09	1.005	0.09
					50	0	20.62	21.00	0.74	0.08	1.091	0.09
		Left Cheek	18700	1860	1	50	21.48	21.50	-4.49	0.19	1.005	0.19
					50	0	20.62	21.00	-1.29	0.17	1.091	0.19
		Left Tilt	18700	1860	1	50	21.48	21.50	0.47	0.10	1.005	0.10
					50	0	20.62	21.00	1.79	0.08	1.091	0.09
LTE Band 4	QPSK (20MHz)	Right Cheek	20300	1745	1	50	21.44	21.50	0.53	0.19	1.014	0.19
					50	25	20.13	20.50	0.69	0.17	1.089	0.19
		Right Tilt	20300	1745	1	50	21.44	21.50	1.68	0.10	1.014	0.10
					50	25	20.13	20.50	-0.28	0.08	1.089	0.09
		Left Cheek	20300	1745	1	50	21.44	21.50	-4.27	0.21	1.014	0.21
					50	25	20.13	20.50	-1.41	0.19	1.089	0.21
		Left Tilt	20300	1745	1	50	21.44	21.50	0.69	0.12	1.014	0.12
					50	25	20.13	20.50	1.68	0.10	1.089	0.11
LTE Band 5	QPSK (10MHz)	Right Cheek	20450	829	1	25	21.24	21.50	0.28	0.33	1.062	0.35
					25	0	20.13	20.50	0.48	0.31	1.089	0.34
		Right Tilt	20450	829	1	25	21.24	21.50	1.79	0.17	1.062	0.18
					25	0	20.13	20.50	-1.23	0.15	1.089	0.16
		Left Cheek	20450	829	1	25	21.24	21.50	-2.71	0.35	1.062	0.37
					25	0	20.13	20.50	-1.53	0.33	1.089	0.36
		Left Tilt	20450	829	1	25	21.24	21.50	3.91	0.18	1.062	0.19
					25	0	20.13	20.50	1.57	0.16	1.089	0.17
LTE Band 12	QPSK (10MHz)	Right Cheek	23060	704	1	25	21.07	21.50	0.93	0.13	1.104	0.14
					25	13	19.40	19.50	0.27	0.11	1.023	0.11
		Right Tilt	23060	704	1	25	21.07	21.50	1.90	0.07	1.104	0.08
					25	13	19.40	19.50	-2.18	0.06	1.023	0.06
		Left Cheek	23060	704	1	25	21.07	21.50	-4.96	0.15	1.104	0.17
					25	13	19.40	19.50	-1.65	0.13	1.023	0.13

		Left Tilt	23060	704	1	25	21.07	21.50	4.13	0.08	1.104	0.09
					25	13	19.40	19.50	1.46	0.06	1.023	0.06
LTE Band 13	QPSK (10MHz)	Right Cheek	23230	782	1	25	21.51	22.00	0.68	0.20	1.119	0.22
					25	13	20.38	20.50	0.06	0.18	1.028	0.19
		Right Tilt	23230	782	1	25	21.51	22.00	2.01	0.10	1.119	0.11
					25	13	20.38	20.50	-3.13	0.08	1.028	0.08
		Left Cheek	23230	782	1	25	21.51	22.00	-2.03	0.22	1.119	0.25
					25	13	20.38	20.50	-1.77	0.20	1.028	0.21
		Left Tilt	23230	782	1	25	21.51	22.00	2.35	0.11	1.119	0.12
					25	13	20.38	20.50	1.35	0.09	1.028	0.09
		Right Cheek	23780	709	1	25	21.04	21.50	0.43	0.15	1.112	0.17
					25	0	20.01	20.50	-0.15	0.13	1.119	0.15
LTE Band 17	QPSK (10MHz)	Right Tilt	23780	709	1	25	21.04	21.50	2.12	0.08	1.112	0.09
					25	0	20.01	20.50	-4.08	0.06	1.119	0.07
		Left Cheek	23780	709	1	25	21.04	21.50	-2.26	0.16	1.112	0.18
					25	0	20.01	20.50	-1.89	0.14	1.119	0.16
		Left Tilt	23780	709	1	25	21.04	21.50	2.57	0.09	1.112	0.10
					25	0	20.01	20.50	1.24	0.07	1.119	0.08
LTE Band 25	QPSK (20MHz)	Right Cheek	26140	1860	1	50	21.85	22.00	0.18	0.17	1.035	0.18
					50	0	20.96	21.00	-0.36	0.15	1.009	0.15
		Right Tilt	26140	1860	1	50	21.85	22.00	2.23	0.08	1.035	0.08
					50	0	20.96	21.00	-1.03	0.07	1.009	0.07
		Left Cheek	26140	1860	1	50	21.85	22.00	0.14	0.18	1.035	0.19
					50	0	20.96	21.00	-2.01	0.16	1.009	0.16
		Left Tilt	26140	1860	1	50	21.85	22.00	2.79	0.09	1.035	0.09
					50	0	20.96	21.00	1.13	0.07	1.009	0.07
LTE Band 26-1	QPSK (10MHz)	Right Cheek	26740	819	1	25	22.43	22.50	-1.07	0.25	1.016	0.25
					25	13	21.11	21.50	-0.57	0.23	1.094	0.25
		Right Tilt	26740	819	1	25	22.43	22.50	2.34	0.12	1.016	0.12
					25	13	21.11	21.50	-1.98	0.10	1.094	0.11
		Left Cheek	26740	819	1	25	22.43	22.50	-0.05	0.27	1.016	0.27
					25	13	21.11	21.50	-1.19	0.25	1.094	0.27
		Left Tilt	26740	819	1	25	22.43	22.50	-0.35	0.13	1.016	0.13
					25	13	21.11	21.50	2.23	0.11	1.094	0.12

LTE Band 26-2	QPSK (15MHz)	Right Cheek	26865	831.5	1	38	22.75	23.00	1.01	0.25	1.059	0.26
					36	0	21.42	21.50	-0.85	0.23	1.019	0.23
		Right Tilt	26865	831.5	1	38	22.75	23.00	-0.68	0.12	1.059	0.13
					36	0	21.42	21.50	2.09	0.10	1.019	0.10
		Left Cheek	26865	831.5	1	38	22.75	23.00	-2.90	0.27	1.059	0.29
					36	0	21.42	21.50	1.20	0.25	1.019	0.25
LTE Band 41 (HPUE)	QPSK (20MHz)	Right Cheek	41490	2680	1	50	24.74	25.00	-1.30	0.02	1.062	0.02
					50	0	23.87	24.00	2.68	0.02	1.030	0.02
		Right Tilt	41490	2680	1	50	24.74	25.00	1.44	0.01	1.062	0.01
					50	0	23.87	24.00	3.31	0.01	1.030	0.01
		Left Cheek	41490	2680	1	50	24.74	25.00	-2.91	0.02	1.062	0.02
					50	0	23.87	24.00	1.08	0.02	1.030	0.02
LTE Band 66	QPSK (20MHz)	Right Cheek	13207 2	1720	1	50	22.34	22.50	-1.55	0.18	1.038	0.19
					50	0	20.72	21.00	2.47	0.16	1.067	0.17
		Right Tilt	13207 2	1720	1	50	22.34	22.50	1.55	0.09	1.038	0.09
					50	0	20.72	21.00	2.36	0.07	1.067	0.07
		Left Cheek	13207 2	1720	1	50	22.34	22.50	1.98	0.21	1.038	0.22
					50	0	20.72	21.00	0.96	0.19	1.067	0.20
LTE Band 71	QPSK (20MHz)	Right Cheek	13322 2	673	1	50	21.70	22.00	-1.80	0.30	1.072	0.32
					50	25	20.70	21.00	2.26	0.27	1.072	0.29
		Right Tilt	13322 2	673	1	50	21.70	22.00	1.66	0.15	1.072	0.16
					50	25	20.70	21.00	1.41	0.13	1.072	0.14
		Left Cheek	13322 2	673	1	50	21.70	22.00	-4.48	0.33	1.072	0.35
					50	25	20.70	21.00	2.48	0.31	1.072	0.33
		Left Tilt	13322 2	673	1	50	21.70	22.00	1.55	0.16	1.072	0.17
					50	25	20.70	21.00	1.16	0.14	1.072	0.15

10.2. Body-Worn 1g SAR Data

Band	Mode	Test Position with 10mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
GSM850	voice	Front	128	824.2	32.06	32.50	3.44	0.34	1.107	0.38	1.60
		Back	128	824.2	32.06	32.50	-2.70	0.39	1.107	0.43	
	GPRS 3 slots	Front	128	824.2	28.80	29.00	2.16	0.36	1.047	0.38	
		Back	128	824.2	28.80	29.00	-1.37	0.40	1.047	0.42	
GSM1900	voice	Front	512	1850.2	29.23	29.50	-0.64	0.29	1.064	0.31	
		Back	512	1850.2	29.23	29.50	-1.67	0.33	1.064	0.35	
	GPRS 3 slots	Front	512	1850.2	25.82	26.00	2.07	0.27	1.042	0.28	
		Back	512	1850.2	25.82	26.00	0.67	0.31	1.042	0.32	
WCDMA Band II	RMC	Front	9262	1852.4	20.71	21.00	3.11	0.69	1.069	0.74	
		Back	9262	1852.4	20.71	21.00	2.52	0.74	1.069	0.79	
WCDMA Band V	RMC	Front	4233	846.6	20.13	20.50	2.08	0.30	1.089	0.33	
		Back	4233	846.6	20.13	20.50	-3.42	0.34	1.089	0.37	
2.4G	802.11b	Front	1	2412	12.92	13.00	4.11	0.07	1.019	0.07	
		Back	1	2412	12.92	13.00	-1.09	0.09	1.019	0.09	
5.2G	802.11n	Front	48	5240	15.39	15.50	-2.06	0.33	1.026	0.34	
		Back	48	5240	15.39	15.50	-1.00	0.37	1.026	0.38	
5.3G	802.11ac	Front	58	5290	15.88	16.00	2.36	0.40	1.028	0.41	
		Back	58	5290	15.88	16.00	-1.71	0.44	1.028	0.45	
5.8G	802.11ac	Front	155	5775	16.95	17.00	3.87	0.35	1.012	0.35	
		Back	155	5775	16.95	17.00	-1.48	0.39	1.012	0.39	
BT	EDR	Front	78	2480	3.92	4.00	0.97	0.03	1.019	0.03	
		Back	78	2480	3.92	4.00	-2.77	0.04	1.019	0.04	

Band	Mode	Test Position with 10mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)
LTE Band 2	QPSK (20MHz)	Front	18700	1860	1	50	21.48	21.50	1.08	0.49	1.005	0.49
					50	0	20.62	21.00	0.64	0.45	1.091	0.49
		Back	18700	1860	1	50	21.48	21.50	-2.31	0.54	1.005	0.54
					50	0	20.62	21.00	3.75	0.50	1.091	0.55
LTE Band 4	QPSK (20MHz)	Front	20300	1745	1	50	21.44	21.50	-1.26	0.45	1.014	0.46
					50	25	20.13	20.50	0.81	0.40	1.089	0.44
		Back	20300	1745	1	50	21.44	21.50	0.89	0.51	1.014	0.52
					50	25	20.13	20.50	0.97	0.46	1.089	0.50
LTE Band 5	QPSK (10MHz)	Front	20450	829	1	25	21.24	21.50	0.39	0.37	1.062	0.39
					25	0	20.13	20.50	-2.52	0.33	1.089	0.36
		Back	20450	829	1	25	21.24	21.50	-3.55	0.43	1.062	0.46
					25	0	20.13	20.50	2.72	0.38	1.089	0.41
LTE Band 12	QPSK (10MHz)	Front	23060	704	1	25	21.07	21.50	1.18	0.26	1.104	0.29
					25	13	19.40	19.50	-2.41	0.22	1.023	0.23
		Back	23060	704	1	25	21.07	21.50	-4.88	0.31	1.104	0.34
					25	13	19.40	19.50	2.94	0.27	1.023	0.28
LTE Band 13	QPSK (10MHz)	Front	23230	782	1	25	21.51	22.00	1.07	0.23	1.119	0.26
					25	13	20.38	20.50	-2.66	0.18	1.028	0.19
		Back	23230	782	1	25	21.51	22.00	-4.78	0.27	1.119	0.30
					25	13	20.38	20.50	0.69	0.23	1.028	0.24
LTE Band 17	QPSK (10MHz)	Front	23780	709	1	25	21.04	21.50	-1.69	0.23	1.112	0.26
					25	0	20.01	20.50	1.84	0.17	1.119	0.19
		Back	23780	709	1	25	21.04	21.50	-3.20	0.29	1.112	0.32
					25	0	20.01	20.50	1.78	0.23	1.119	0.26
LTE Band 25	QPSK (20MHz)	Front	26140	1860	1	50	21.85	22.00	2.64	0.73	1.035	0.76
					50	0	20.96	21.00	-1.45	0.65	1.009	0.66
		Back	26140	1860	1	50	21.85	22.00	-3.00	0.80	1.035	0.83
					50	0	20.96	21.00	2.87	0.74	1.009	0.75
			26365	1882.5	1	50	21.37	21.50	1.09	0.71	1.030	0.73
			26590	1905	1	50	21.00	21.00	2.16	0.67	1.000	0.67
LTE Band 26-1	QPSK (10MHz)	Front	26740	819	1	25	22.43	22.50	4.36	0.28	1.016	0.28
					25	13	21.11	21.50	0.98	0.24	1.094	0.26

		Back	26740	819	1	25	22.43	22.50	-2.67	0.34	1.016	0.35
					25	13	21.11	21.50	1.69	0.30	1.094	0.33
LTE Band 26-2	QPSK (15MHz)	Front	26865	831.5	1	38	22.75	23.00	2.45	0.28	1.059	0.30
					36	0	21.42	21.50	0.55	0.23	1.019	0.23
	QPSK (15MHz)	Back	26865	831.5	1	38	22.75	23.00	-2.73	0.34	1.059	0.36
					36	0	21.42	21.50	2.19	0.29	1.019	0.30
LTE Band 41 (HPUE)	QPSK (20MHz)	Front	41490	2680	1	50	24.74	25.00	3.36	0.05	1.062	0.05
					50	0	23.87	24.00	1.21	0.03	1.030	0.03
	QPSK (20MHz)	Back	41490	2680	1	50	24.74	25.00	-2.07	0.07	1.062	0.07
					50	0	23.87	24.00	-2.06	0.05	1.030	0.05
LTE Band 66	QPSK (20MHz)	Front	13207 2	1720	1	50	22.34	22.50	1.97	0.66	1.038	0.69
					50	0	20.72	21.00	0.56	0.58	1.067	0.62
	QPSK (20MHz)	Back	13207 2	1720	1	50	22.34	22.50	-2.89	0.73	1.038	0.76
					50	0	20.72	21.00	4.69	0.64	1.067	0.68
LTE Band 71	QPSK (20MHz)	Front	13322 2	673	1	50	21.70	22.00	1.17	0.38	1.072	0.41
					50	25	20.70	21.00	-2.08	0.33	1.072	0.35
	QPSK (20MHz)	Back	13322 2	673	1	50	21.70	22.00	-3.16	0.45	1.072	0.48
					50	25	20.70	21.00	0.87	0.40	1.072	0.43

Note:

1. Per KDB447498 D04, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
2. Per KDB447498 D04, body-worn use is evaluated with the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium.
3. Per KDB447498 D04, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor = $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg) = Measured SAR (W/kg) * Scaling Factor.
4. Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is >1.20 or when the original or repeated measurement is $\geq 1.45W/kg$.
5. Perform a second measurement only if the original, first and second repeated measurement is $\geq 1.5W/kg$ and the ratio of largest to smallest SAR for the original, first and second repeated measurement is >1.20 .

10.3. Hotspot 1g SAR Data

Band	Mode	Test Position with 10mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
GSM850	GPRS 3 slots	Front	128	824.2	28.80	29.00	1.74	0.35	1.047	0.37	1.60
		Back	128	824.2	28.80	29.00	-3.78	0.39	1.047	0.41	
		Right	128	824.2	28.80	29.00	-2.18	0.26	1.047	0.27	
		Bottom	128	824.2	28.80	29.00	2.19	0.31	1.047	0.32	
GSM1900	GPRS 3 slots	Front	512	1850.2	25.82	26.00	0.45	0.25	1.042	0.26	
		Back	512	1850.2	25.82	26.00	3.30	0.28	1.042	0.29	
		Right	512	1850.2	25.82	26.00	-2.43	0.17	1.042	0.18	
		Bottom	512	1850.2	25.82	26.00	1.98	0.21	1.042	0.22	
WCDMA Band II	RMC	Front	9262	1852.4	20.71	21.00	0.56	0.68	1.069	0.73	
		Back	9262	1852.4	20.71	21.00	1.80	0.73	1.069	0.78	
		Right	9262	1852.4	20.71	21.00	-2.54	0.55	1.069	0.59	
		Bottom	9262	1852.4	20.71	21.00	1.73	0.62	1.069	0.66	
WCDMA Band V	RMC	Front	4233	846.6	20.13	20.50	0.35	0.30	1.089	0.33	
		Back	4233	846.6	20.13	20.50	-3.29	0.34	1.089	0.37	
		Right	4233	846.6	20.13	20.50	0.36	0.22	1.089	0.24	
		Bottom	4233	846.6	20.13	20.50	1.51	0.26	1.089	0.28	
2.4G	802.11b	Front	1	2412	12.92	13.00	3.29	0.07	1.019	0.07	
		Back	1	2412	12.92	13.00	-1.21	0.09	1.019	0.09	
		Left	1	2412	12.92	13.00	0.23	0.04	1.019	0.04	
		Top	1	2412	12.92	13.00	-3.07	0.05	1.019	0.05	
5.2G	802.11n	Front	48	5240	15.39	15.50	4.25	0.33	1.026	0.34	
		Back	48	5240	15.39	15.50	1.14	0.38	1.026	0.39	
		Left	48	5240	15.39	15.50	0.45	0.25	1.026	0.26	
		Top	48	5240	15.39	15.50	-3.18	0.28	1.026	0.29	
5.3G	802.11ac	Front	58	5290	15.88	16.00	4.00	0.34	1.028	0.35	
		Back	58	5290	15.88	16.00	0.03	0.39	1.028	0.40	
		Left	58	5290	15.88	16.00	0.34	0.26	1.028	0.27	
		Top	58	5290	15.88	16.00	-3.43	0.30	1.028	0.31	

5.8G	802.11ac	Front	155	5775	16.95	17.00	3.79	0.37	1.012	0.37
		Back	155	5775	16.95	17.00	-1.04	0.42	1.012	0.43
		Left	155	5775	16.95	17.00	2.13	0.28	1.012	0.28
		Top	155	5775	16.95	17.00	-1.64	0.33	1.012	0.33

Band	Mode	Test Position with 10mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)
LTE Band 2	QPSK (20MHz)	Front	18700	1860	1	50	21.48	21.50	1.98	0.48	1.005	0.48
					50	0	20.62	21.00	3.06	0.43	1.091	0.47
		Back	18700	1860	1	50	21.48	21.50	-1.40	0.55	1.005	0.55
					50	0	20.62	21.00	-3.30	0.50	1.091	0.55
		Right	18700	1860	1	50	21.48	21.50	4.22	0.34	1.005	0.34
					50	0	20.62	21.00	-0.08	0.30	1.091	0.33
		Bottom	18700	1860	1	50	21.48	21.50	0.09	0.41	1.005	0.41
					50	0	20.62	21.00	-3.64	0.36	1.091	0.39
LTE Band 4	QPSK (20MHz)	Front	20300	1745	1	50	21.44	21.50	3.90	0.67	1.014	0.68
					50	25	20.13	20.50	1.41	0.62	1.089	0.68
		Back	20300	1745	1	50	21.44	21.50	-2.78	0.75	1.014	0.76
					50	25	20.13	20.50	-3.42	0.69	1.089	0.75
		Right	20300	1745	1	50	21.44	21.50	4.04	0.52	1.014	0.53
					50	25	20.13	20.50	-1.19	0.47	1.089	0.51
		Bottom	20300	1745	1	50	21.44	21.50	-2.16	0.59	1.014	0.60
					50	25	20.13	20.50	-3.85	0.54	1.089	0.59
LTE Band 5	QPSK (10MHz)	Front	20450	829	1	25	21.24	21.50	4.01	0.31	1.062	0.33
					25	0	20.13	20.50	0.46	0.26	1.089	0.28
		Back	20450	829	1	25	21.24	21.50	-2.15	0.38	1.062	0.40
					25	0	20.13	20.50	-3.54	0.32	1.089	0.35
		Right	20450	829	1	25	21.24	21.50	4.26	0.16	1.062	0.17
					25	0	20.13	20.50	-1.30	0.12	1.089	0.13
		Bottom	20450	829	1	25	21.24	21.50	-2.41	0.22	1.062	0.23
					25	0	20.13	20.50	-1.06	0.18	1.089	0.20
LTE Band 12	QPSK (10MHz)	Front	23060	704	1	25	21.07	21.50	4.12	0.25	1.104	0.28
					25	13	19.40	19.50	-0.49	0.21	1.023	0.21
		Back	23060	704	1	25	21.07	21.50	-1.13	0.30	1.104	0.33
					25	13	19.40	19.50	-3.66	0.26	1.023	0.27
		Right	23060	704	1	25	21.07	21.50	4.48	0.16	1.104	0.18
					25	13	19.40	19.50	-1.41	0.12	1.023	0.12
		Bottom	23060	704	1	25	21.07	21.50	-2.66	0.18	1.104	0.20
					25	13	19.40	19.50	-1.27	0.15	1.023	0.15

LTE Band 13	QPSK (10MHz)	Front	23230	782	1	25	21.51	22.00	4.23	0.22	1.119	0.25
					25	13	20.38	20.50	-1.44	0.19	1.028	0.20
		Back	23230	782	1	25	21.51	22.00	-3.26	0.26	1.119	0.29
					25	13	20.38	20.50	-3.78	0.23	1.028	0.24
		Right	23230	782	1	25	21.51	22.00	1.70	0.13	1.119	0.15
					25	13	20.38	20.50	-1.52	0.10	1.028	0.10
LTE Band 17	QPSK (10MHz)	Front	23780	709	1	25	21.04	21.50	-2.34	0.25	1.112	0.28
					25	0	20.01	20.50	-2.39	0.21	1.119	0.23
		Back	23780	709	1	25	21.04	21.50	-3.11	0.28	1.112	0.31
					25	0	20.01	20.50	-3.90	0.24	1.119	0.27
		Right	23780	709	1	25	21.04	21.50	1.92	0.17	1.112	0.19
					25	0	20.01	20.50	-1.63	0.13	1.119	0.15
LTE Band 25	QPSK (20MHz)	Front	26140	1860	1	50	21.85	22.00	-2.23	0.76	1.035	0.79
					50	0	20.96	21.00	-3.34	0.71	1.009	0.72
		Back	26140	1860	1	50	21.85	22.00	-2.56	0.85	1.035	0.88
					50	0	20.96	21.00	-1.02	0.78	1.009	0.79
			26365	1882.5	1	50	21.37	21.50	4.10	0.75	1.030	0.77
			26590	1905	1	50	21.00	21.00	-0.85	0.69	1.000	0.69
LTE Band 26-1	QPSK (10MHz)	Front	26740	819	1	25	22.43	22.50	-2.12	0.31	1.016	0.31
					25	13	21.11	21.50	-4.29	0.27	1.094	0.30
		Back	26740	819	1	25	22.43	22.50	-3.47	0.34	1.016	0.35
					25	13	21.11	21.50	-1.14	0.30	1.094	0.33
		Right	26740	819	1	25	22.43	22.50	2.36	0.21	1.016	0.21
					25	13	21.11	21.50	-1.85	0.17	1.094	0.19
		Bottom	26740	819	1	25	22.43	22.50	-3.66	0.24	1.016	0.24
					25	13	21.11	21.50	2.11	0.20	1.094	0.22

LTE Band 26-2	QPSK (15MHz)	Front	26865	831.5	1	38	22.75	23.00	-2.01	0.31	1.059	0.33
					36	0	21.42	21.50	-1.24	0.26	1.019	0.26
		Back	26865	831.5	1	38	22.75	23.00	-3.05	0.34	1.059	0.36
					36	0	21.42	21.50	-1.26	0.30	1.019	0.31
		Right	26865	831.5	1	38	22.75	23.00	2.58	0.24	1.059	0.25
					36	0	21.42	21.50	-1.96	0.19	1.019	0.19
LTE Band 41	QPSK (20MHz)	Front	41490	2680	1	50	24.74	25.00	-1.90	0.05	1.062	0.05
					50	0	23.87	24.00	-2.19	0.04	1.030	0.04
		Back	41490	2680	1	50	24.74	25.00	2.36	0.06	1.062	0.06
					50	0	23.87	24.00	-1.38	0.05	1.030	0.05
		Right	41490	2680	1	50	24.74	25.00	2.80	0.03	1.062	0.03
					50	0	23.87	24.00	-2.07	0.02	1.030	0.02
LTE Band 66	QPSK (20MHz)	Front	132072	1720	1	50	22.34	22.50	-1.79	0.58	1.038	0.60
					50	0	20.72	21.00	-3.14	0.53	1.067	0.57
		Back	132072	1720	1	50	22.34	22.50	-3.35	0.69	1.038	0.72
					50	0	20.72	21.00	-1.50	0.62	1.067	0.66
		Right	132072	1720	1	50	22.34	22.50	3.02	0.51	1.038	0.53
					50	0	20.72	21.00	-2.18	0.47	1.067	0.50
LTE Band 71	QPSK (20MHz)	Front	133222	673	1	50	21.70	22.00	1.68	0.41	1.072	0.44
					50	25	20.70	21.00	-4.09	0.37	1.072	0.40
		Back	133222	673	1	50	21.70	22.00	3.87	0.44	1.072	0.47
					50	25	20.70	21.00	-1.62	0.40	1.072	0.43
		Right	133222	673	1	50	21.70	22.00	3.24	0.32	1.072	0.34
					50	25	20.70	21.00	-2.29	0.27	1.072	0.29
		Bottom	133222	673	1	50	21.70	22.00	-4.26	0.36	1.072	0.39
					50	25	20.70	21.00	1.27	0.31	1.072	0.33

Note:

- Per KDB447498 D04, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Per KDB447498 D04, body-worn with hotspot use is evaluated with the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium.
- Per KDB447498 D04, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave. power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.
- Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is >1.20 or when the original or repeated measurement is $\geq 1.45W/kg$.
- Perform a second measurement only if the original, first and second repeated measurement is $\geq 1.5w/kg$ and the ratio of largest to smallest SAR for the original, first and second repeated measurement is >1.2 .

10.4. Simultaneous Transmission Conclusion

Multi-Band Simultaneous Transmission Considerations

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Configuration	Head	Body-Worn	Hotspot
1	GSM850/1900(Voice)+WIFI(2.4/5G)	YES	YES	NO
2	GPRS 850/1900(DATA)+WIFI(2.4)	NO	YES	YES
3	GPRS 850/1900(DATA)+WIFI(5G)	NO	YES	YES
4	WCDMA+ WIFI(2.4)	YES	YES	YES
5	WCDMA+ WIFI(5G)	YES	YES	YES
6	LTE+WIFI(2.4)	YES	YES	YES
7	LTE+WIFI(5G)	YES	YES	YES
8	GSM850/1900(Voice)+BT	YES	YES	NO
9	GPRS/EDGE 850/1900(DATA)+BT	YES	YES	NO
10	WCDMA+ BT	YES	YES	NO
11	LTE+BT	YES	YES	NO

10.5. SAR Simultaneous Transmission Analysis

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Head	WIFI 2.4G	WIFI 5 G	BT			
GSM850 (voice)	Left Cheek	0.31	0.08	0.31	0.07	0.62	N/A	N/A
	Left Tilt	0.17	0.04	0.17	0.03	0.34	N/A	N/A
	Right Cheek	0.29	0.07	0.29	0.06	0.58	N/A	N/A
	Right Tilt	0.15	0.03	0.16	0.03	0.31	N/A	N/A
GSM1900 (voice)	Left Cheek	0.13	0.08	0.31	0.07	0.44	N/A	N/A
	Left Tilt	0.07	0.04	0.17	0.03	0.24	N/A	N/A
	Right Cheek	0.12	0.07	0.29	0.06	0.41	N/A	N/A
	Right Tilt	0.06	0.03	0.16	0.03	0.22	N/A	N/A
WCDMA Band II	Left Cheek	0.16	0.08	0.31	0.07	0.47	N/A	N/A
	Left Tilt	0.09	0.04	0.17	0.03	0.26	N/A	N/A
	Right Cheek	0.14	0.07	0.29	0.06	0.43	N/A	N/A
	Right Tilt	0.07	0.03	0.16	0.03	0.23	N/A	N/A
WCDMA Band V	Left Cheek	0.34	0.08	0.31	0.07	0.65	N/A	N/A
	Left Tilt	0.17	0.04	0.17	0.03	0.34	N/A	N/A
	Right Cheek	0.32	0.07	0.29	0.06	0.61	N/A	N/A
	Right Tilt	0.16	0.03	0.16	0.03	0.32	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Head	WIFI2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz)	Right Cheek	1	0.18	0.07	0.29	0.06	0.47	N/A	N/A
		50	0.17	0.07	0.29	0.06	0.46	N/A	N/A
	Right Tilt	1	0.09	0.03	0.16	0.03	0.25	N/A	N/A
		50	0.09	0.03	0.16	0.03	0.25	N/A	N/A
	Left Cheek	1	0.19	0.08	0.31	0.07	0.50	N/A	N/A
		50	0.19	0.08	0.31	0.07	0.50	N/A	N/A
	Left Tilt	1	0.10	0.04	0.17	0.03	0.27	N/A	N/A
		50	0.09	0.04	0.17	0.03	0.26	N/A	N/A
LTE Band 4 QPSK (20MHz)	Right Cheek	1	0.19	0.07	0.29	0.06	0.48	N/A	N/A
		50	0.19	0.07	0.29	0.06	0.48	N/A	N/A
	Right Tilt	1	0.10	0.03	0.16	0.03	0.26	N/A	N/A
		50	0.09	0.03	0.16	0.03	0.25	N/A	N/A
	Left Cheek	1	0.21	0.08	0.31	0.07	0.52	N/A	N/A
		50	0.21	0.08	0.31	0.07	0.52	N/A	N/A
	Left Tilt	1	0.12	0.04	0.17	0.03	0.29	N/A	N/A
		50	0.11	0.04	0.17	0.03	0.28	N/A	N/A

LTE Band 5 QPSK (10MHz)	Right Cheek	1	0.35	0.07	0.29	0.06	0.64	N/A	N/A
		25	0.34	0.07	0.29	0.06	0.63	N/A	N/A
	Right Tilt	1	0.18	0.03	0.16	0.03	0.34	N/A	N/A
		25	0.16	0.03	0.16	0.03	0.32	N/A	N/A
	Left Cheek	1	0.37	0.08	0.31	0.07	0.68	N/A	N/A
		25	0.36	0.08	0.31	0.07	0.67	N/A	N/A
	Left Tilt	1	0.19	0.04	0.17	0.03	0.36	N/A	N/A
		25	0.17	0.04	0.17	0.03	0.34	N/A	N/A
LTE Band 12 QPSK (10MHz)	Right Cheek	1	0.14	0.07	0.29	0.06	0.43	N/A	N/A
		25	0.11	0.07	0.29	0.06	0.40	N/A	N/A
	Right Tilt	1	0.08	0.03	0.16	0.03	0.24	N/A	N/A
		25	0.06	0.03	0.16	0.03	0.22	N/A	N/A
	Left Cheek	1	0.17	0.08	0.31	0.07	0.48	N/A	N/A
		25	0.13	0.08	0.31	0.07	0.44	N/A	N/A
	Left Tilt	1	0.09	0.04	0.17	0.03	0.26	N/A	N/A
		25	0.06	0.04	0.17	0.03	0.23	N/A	N/A
LTE Band 13 QPSK (10MHz)	Right Cheek	1	0.22	0.07	0.29	0.06	0.51	N/A	N/A
		25	0.19	0.07	0.29	0.06	0.48	N/A	N/A
	Right Tilt	1	0.11	0.03	0.16	0.03	0.27	N/A	N/A
		25	0.08	0.03	0.16	0.03	0.24	N/A	N/A
	Left Cheek	1	0.25	0.08	0.31	0.07	0.56	N/A	N/A
		25	0.21	0.08	0.31	0.07	0.52	N/A	N/A
	Left Tilt	1	0.12	0.04	0.17	0.03	0.29	N/A	N/A
		25	0.09	0.04	0.17	0.03	0.26	N/A	N/A
LTE Band 17 QPSK (10MHz)	Right Cheek	1	0.17	0.07	0.29	0.06	0.46	N/A	N/A
		25	0.15	0.07	0.29	0.06	0.44	N/A	N/A
	Right Tilt	1	0.09	0.03	0.16	0.03	0.25	N/A	N/A
		25	0.07	0.03	0.16	0.03	0.23	N/A	N/A
	Left Cheek	1	0.18	0.08	0.31	0.07	0.49	N/A	N/A
		25	0.16	0.08	0.31	0.07	0.47	N/A	N/A
	Left Tilt	1	0.10	0.04	0.17	0.03	0.27	N/A	N/A
		25	0.08	0.04	0.17	0.03	0.25	N/A	N/A
LTE Band 25 QPSK (20MHz)	Right Cheek	1	0.18	0.07	0.29	0.06	0.47	N/A	N/A
		50	0.15	0.07	0.29	0.06	0.44	N/A	N/A
	Right Tilt	1	0.08	0.03	0.16	0.03	0.24	N/A	N/A
		50	0.07	0.03	0.16	0.03	0.23	N/A	N/A
	Left Cheek	1	0.19	0.08	0.31	0.07	0.50	N/A	N/A
		50	0.16	0.08	0.31	0.07	0.47	N/A	N/A
	Left Tilt	1	0.09	0.04	0.17	0.03	0.26	N/A	N/A
		50	0.07	0.04	0.17	0.03	0.24	N/A	N/A

LTE Band 26-1 QPSK (10MHz)	Right Cheek	1	0.25	0.07	0.29	0.06	0.54	N/A	N/A
		25	0.25	0.07	0.29	0.06	0.54	N/A	N/A
	Right Tilt	1	0.12	0.03	0.16	0.03	0.28	N/A	N/A
		25	0.11	0.03	0.16	0.03	0.27	N/A	N/A
	Left Cheek	1	0.27	0.08	0.31	0.07	0.58	N/A	N/A
		25	0.27	0.08	0.31	0.07	0.58	N/A	N/A
	Left Tilt	1	0.13	0.04	0.17	0.03	0.30	N/A	N/A
		25	0.12	0.04	0.17	0.03	0.29	N/A	N/A
LTE Band 26-2 QPSK (15MHz)	Right Cheek	1	0.26	0.07	0.29	0.06	0.55	N/A	N/A
		38	0.23	0.07	0.29	0.06	0.52	N/A	N/A
	Right Tilt	1	0.13	0.03	0.16	0.03	0.29	N/A	N/A
		38	0.10	0.03	0.16	0.03	0.26	N/A	N/A
	Left Cheek	1	0.29	0.08	0.31	0.07	0.60	N/A	N/A
		38	0.25	0.08	0.31	0.07	0.56	N/A	N/A
	Left Tilt	1	0.14	0.04	0.17	0.03	0.31	N/A	N/A
		38	0.11	0.04	0.17	0.03	0.28	N/A	N/A
LTE Band 41(HPUE) QPSK (20MHz)	Right Cheek	1	0.02	0.07	0.29	0.06	0.31	N/A	N/A
		50	0.02	0.07	0.29	0.06	0.31	N/A	N/A
	Right Tilt	1	0.01	0.03	0.16	0.03	0.17	N/A	N/A
		50	0.01	0.03	0.16	0.03	0.17	N/A	N/A
	Left Cheek	1	0.02	0.08	0.31	0.07	0.33	N/A	N/A
		50	0.02	0.08	0.31	0.07	0.33	N/A	N/A
	Left Tilt	1	0.01	0.04	0.17	0.03	0.18	N/A	N/A
		50	0.01	0.04	0.17	0.03	0.18	N/A	N/A
LTE Band 66 QPSK (20MHz)	Right Cheek	1	0.19	0.07	0.29	0.06	0.48	N/A	N/A
		50	0.17	0.07	0.29	0.06	0.46	N/A	N/A
	Right Tilt	1	0.09	0.03	0.16	0.03	0.25	N/A	N/A
		50	0.07	0.03	0.16	0.03	0.23	N/A	N/A
	Left Cheek	1	0.22	0.08	0.31	0.07	0.53	N/A	N/A
		50	0.20	0.08	0.31	0.07	0.51	N/A	N/A
	Left Tilt	1	0.10	0.04	0.17	0.03	0.27	N/A	N/A
		50	0.09	0.04	0.17	0.03	0.26	N/A	N/A
LTE Band 71 QPSK (20MHz)	Right Cheek	1	0.32	0.07	0.29	0.06	0.61	N/A	N/A
		50	0.29	0.07	0.29	0.06	0.58	N/A	N/A
	Right Tilt	1	0.16	0.03	0.16	0.03	0.32	N/A	N/A
		50	0.14	0.03	0.16	0.03	0.30	N/A	N/A
	Left Cheek	1	0.35	0.08	0.31	0.07	0.66	N/A	N/A
		50	0.33	0.08	0.31	0.07	0.64	N/A	N/A
	Left Tilt	1	0.17	0.04	0.17	0.03	0.34	N/A	N/A
		50	0.15	0.04	0.17	0.03	0.32	N/A	N/A

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Body-Worn	WIFI 2.4G	WIFI 5G	BT			
GSM850 (voice)	Front	0.38	0.07	0.41	0.03	0.79	N/A	N/A
	Back	0.43	0.09	0.45	0.04	0.88	N/A	N/A
GSM850 (GPRS 2slot)	Front	0.38	0.07	0.41	0.03	0.79	N/A	N/A
	Back	0.42	0.09	0.45	0.04	0.87	N/A	N/A
GSM1900 (voice)	Front	0.31	0.07	0.41	0.03	0.72	N/A	N/A
	Back	0.35	0.09	0.45	0.04	0.80	N/A	N/A
GSM1900 (GPRS 3slot)	Front	0.28	0.07	0.41	0.03	0.69	N/A	N/A
	Back	0.32	0.09	0.45	0.04	0.77	N/A	N/A
WCDMA Band II	Front	0.74	0.07	0.41	0.03	1.15	N/A	N/A
	Back	0.79	0.09	0.45	0.04	1.24	N/A	N/A
WCDMA Band V	Front	0.33	0.07	0.41	0.03	0.74	N/A	N/A
	Back	0.37	0.09	0.45	0.04	0.82	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Body-Worn	WIFI 2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz)	Front	1	0.49	0.07	0.41	0.03	0.90	N/A	N/A
		50	0.49	0.07	0.41	0.03	0.90	N/A	N/A
	Back	1	0.54	0.09	0.45	0.04	0.99	N/A	N/A
		50	0.55	0.09	0.45	0.04	1.00	N/A	N/A
LTE Band 4 QPSK (20MHz)	Front	1	0.46	0.07	0.41	0.03	0.87	N/A	N/A
		50	0.44	0.07	0.41	0.03	0.85	N/A	N/A
	Back	1	0.52	0.09	0.45	0.04	0.97	N/A	N/A
		50	0.50	0.09	0.45	0.04	0.95	N/A	N/A
LTE Band 5 QPSK (10MHz)	Front	1	0.39	0.07	0.41	0.03	0.80	N/A	N/A
		25	0.36	0.07	0.41	0.03	0.77	N/A	N/A
	Back	1	0.46	0.09	0.45	0.04	0.91	N/A	N/A
		25	0.41	0.09	0.45	0.04	0.86	N/A	N/A
LTE Band 12 QPSK (10MHz)	Front	1	0.29	0.07	0.41	0.03	0.70	N/A	N/A
		25	0.23	0.07	0.41	0.03	0.64	N/A	N/A
	Back	1	0.34	0.09	0.45	0.04	0.79	N/A	N/A
		25	0.28	0.09	0.45	0.04	0.73	N/A	N/A

LTE Band 13 QPSK (10MHz)	Front	1	0.26	0.07	0.41	0.03	0.67	N/A	N/A
		25	0.19	0.07	0.41	0.03	0.60	N/A	N/A
	Back	1	0.30	0.09	0.45	0.04	0.75	N/A	N/A
		25	0.24	0.09	0.45	0.04	0.69	N/A	N/A
LTE Band 17 QPSK (10MHz)	Front	1	0.26	0.07	0.41	0.03	0.67	N/A	N/A
		25	0.19	0.07	0.41	0.03	0.60	N/A	N/A
	Back	1	0.32	0.09	0.45	0.04	0.77	N/A	N/A
		25	0.26	0.09	0.45	0.04	0.71	N/A	N/A
LTE Band 25 QPSK (20MHz)	Front	1	0.76	0.07	0.41	0.03	1.17	N/A	N/A
		50	0.66	0.07	0.41	0.03	1.07	N/A	N/A
	Back	1	0.83	0.09	0.45	0.04	1.28	N/A	N/A
		50	0.75	0.09	0.45	0.04	1.20	N/A	N/A
LTE Band 26-1 QPSK (10MHz)	Front	1	0.28	0.07	0.41	0.03	0.69	N/A	N/A
		25	0.26	0.07	0.41	0.03	0.67	N/A	N/A
	Back	1	0.35	0.09	0.45	0.04	0.80	N/A	N/A
		25	0.33	0.09	0.45	0.04	0.78	N/A	N/A
LTE Band 26-2 QPSK (15MHz)	Front	1	0.30	0.07	0.41	0.03	0.71	N/A	N/A
		38	0.23	0.07	0.41	0.03	0.64	N/A	N/A
	Back	1	0.36	0.09	0.45	0.04	0.81	N/A	N/A
		38	0.30	0.09	0.45	0.04	0.75	N/A	N/A
LTE Band 41(HPUE) QPSK (20MHz)	Front	1	0.05	0.07	0.41	0.03	0.46	N/A	N/A
		50	0.03	0.07	0.41	0.03	0.44	N/A	N/A
	Back	1	0.07	0.09	0.45	0.04	0.52	N/A	N/A
		50	0.05	0.09	0.45	0.04	0.50	N/A	N/A
LTE Band 66 QPSK (20MHz)	Front	1	0.69	0.07	0.41	0.03	1.10	N/A	N/A
		50	0.62	0.07	0.41	0.03	1.03	N/A	N/A
	Back	1	0.76	0.09	0.45	0.04	1.21	N/A	N/A
		50	0.68	0.09	0.45	0.04	1.13	N/A	N/A
LTE Band 71 QPSK (20MHz)	Front	1	0.41	0.07	0.41	0.03	0.82	N/A	N/A
		50	0.35	0.07	0.41	0.03	0.76	N/A	N/A
	Back	1	0.48	0.09	0.45	0.04	0.93	N/A	N/A
		50	0.43	0.09	0.45	0.04	0.88	N/A	N/A

Band	Test Position	Scaled SAR			Σ SAR (W/kg)	SPLSR	Remark
		Hotspot	WIFI 2.4G	WIFI 5G			
GSM850 (GPRS)	Front	0.37	0.07	0.37	0.74	N/A	N/A
	Back	0.41	0.09	0.43	0.84	N/A	N/A
	Right	0.27	/	/	0.27	N/A	N/A
	Left	/	0.04	0.28	0.28	N/A	N/A
	Top	/	0.05	0.33	0.33	N/A	N/A
	Bottom	0.32	/	/	0.32	N/A	N/A
GSM1900 (GPRS)	Front	0.26	0.07	0.37	0.63	N/A	N/A
	Back	0.29	0.09	0.43	0.72	N/A	N/A
	Right	0.18	/	/	0.18	N/A	N/A
	Left	/	0.04	0.28	0.28	N/A	N/A
	Top	/	0.05	0.33	0.33	N/A	N/A
	Bottom	0.22	/	/	0.22	N/A	N/A
WCDMA Band II	Front	0.73	0.07	0.37	1.10	N/A	N/A
	Back	0.78	0.09	0.43	1.21	N/A	N/A
	Right	0.59	/	/	0.59	N/A	N/A
	Left	/	0.04	0.28	0.28	N/A	N/A
	Top	/	0.05	0.33	0.33	N/A	N/A
	Bottom	0.66	/	/	0.66	N/A	N/A
WCDMA Band V	Front	0.33	0.07	0.37	0.70	N/A	N/A
	Back	0.37	0.09	0.43	0.80	N/A	N/A
	Right	0.24	/	/	0.24	N/A	N/A
	Left	/	0.04	0.28	0.28	N/A	N/A
	Top	/	0.05	0.33	0.33	N/A	N/A
	Bottom	0.28	/	/	0.28	N/A	N/A

Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg)	SPLSR	Remark
			Hotspot	WIFI 2.4G	WIFI 5G			
LTE Band 2 QPSK (20MHz)	Front	1	0.48	0.07	0.37	0.85	N/A	N/A
		50	0.47	0.07	0.37	0.84	N/A	N/A
	Back	1	0.55	0.09	0.43	0.98	N/A	N/A
		50	0.55	0.09	0.43	0.98	N/A	N/A
	Right	1	0.34	/	/	0.34	N/A	N/A
		50	0.33	/	/	0.33	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.41	/	/	0.41	N/A	N/A
		50	0.39	/	/	0.39	N/A	N/A

LTE Band 4 QPSK (20MHz)	Front	1	0.68	0.07	0.37	1.05	N/A	N/A
		50	0.68	0.07	0.37	1.05	N/A	N/A
	Back	1	0.76	0.09	0.43	1.19	N/A	N/A
		50	0.75	0.09	0.43	1.18	N/A	N/A
	Right	1	0.53	/	/	0.53	N/A	N/A
		50	0.51	/	/	0.51	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.60	/	/	0.60	N/A	N/A
		50	0.59	/	/	0.59	N/A	N/A
LTE Band 5 QPSK (10MHz)	Front	1	0.33	0.07	0.37	0.70	N/A	N/A
		25	0.28	0.07	0.37	0.65	N/A	N/A
	Back	1	0.40	0.09	0.43	0.83	N/A	N/A
		25	0.35	0.09	0.43	0.78	N/A	N/A
	Right	1	0.17	/	/	0.17	N/A	N/A
		25	0.13	/	/	0.13	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		25	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		25	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.23	/	/	0.23	N/A	N/A
		25	0.20	/	/	0.20	N/A	N/A
LTE Band 12 QPSK (10MHz)	Front	1	0.28	0.07	0.37	0.65	N/A	N/A
		25	0.21	0.07	0.37	0.58	N/A	N/A
	Back	1	0.33	0.09	0.43	0.76	N/A	N/A
		25	0.27	0.09	0.43	0.70	N/A	N/A
	Right	1	0.18	/	/	0.18	N/A	N/A
		25	0.12	/	/	0.12	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		25	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		25	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.20	/	/	0.20	N/A	N/A
		25	0.15	/	/	0.15	N/A	N/A

LTE Band 13 QPSK (10MHz)	Front	1	0.25	0.07	0.37	0.62	N/A	N/A
		25	0.20	0.07	0.37	0.57	N/A	N/A
	Back	1	0.29	0.09	0.43	0.72	N/A	N/A
		25	0.24	0.09	0.43	0.67	N/A	N/A
	Right	1	0.15	/	/	0.15	N/A	N/A
		25	0.10	/	/	0.10	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		25	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		25	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.19	/	/	0.19	N/A	N/A
		25	0.14	/	/	0.14	N/A	N/A
LTE Band 17 QPSK (10MHz)	Front	1	0.28	0.07	0.37	0.65	N/A	N/A
		25	0.23	0.07	0.37	0.60	N/A	N/A
	Back	1	0.31	0.09	0.43	0.74	N/A	N/A
		25	0.27	0.09	0.43	0.70	N/A	N/A
	Right	1	0.19	/	/	0.19	N/A	N/A
		25	0.15	/	/	0.15	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		25	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		25	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.22	/	/	0.22	N/A	N/A
		25	0.18	/	/	0.18	N/A	N/A
LTE Band 25 QPSK (20MHz)	Front	1	0.79	0.07	0.37	1.16	N/A	N/A
		50	0.72	0.07	0.37	1.09	N/A	N/A
	Back	1	0.88	0.09	0.43	1.31	N/A	N/A
		50	0.79	0.09	0.43	1.22	N/A	N/A
	Right	1	0.69	/	/	0.69	N/A	N/A
		50	0.63	/	/	0.63	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.75	/	/	0.75	N/A	N/A
		50	0.67	/	/	0.67	N/A	N/A

LTE Band26-1 QPSK (10MHz)	Front	1	0.31	0.07	0.37	0.68	N/A	N/A
		25	0.30	0.07	0.37	0.67	N/A	N/A
	Back	1	0.35	0.09	0.43	0.78	N/A	N/A
		25	0.33	0.09	0.43	0.76	N/A	N/A
	Right	1	0.21	/	/	0.21	N/A	N/A
		25	0.19	/	/	0.19	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		25	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		25	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.24	/	/	0.24	N/A	N/A
		25	0.22	/	/	0.22	N/A	N/A
LTE Band26-2 QPSK (15MHz)	Front	1	0.33	0.07	0.37	0.70	N/A	N/A
		38	0.26	0.07	0.37	0.63	N/A	N/A
	Back	1	0.36	0.09	0.43	0.79	N/A	N/A
		38	0.31	0.09	0.43	0.74	N/A	N/A
	Right	1	0.25	/	/	0.25	N/A	N/A
		38	0.19	/	/	0.19	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		38	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		38	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.28	/	/	0.28	N/A	N/A
		38	0.22	/	/	0.22	N/A	N/A
LTE Band41 QPSK (20MHz)	Front	1	0.05	0.07	0.37	0.42	N/A	N/A
		50	0.04	0.07	0.37	0.41	N/A	N/A
	Back	1	0.06	0.09	0.43	0.49	N/A	N/A
		50	0.05	0.09	0.43	0.48	N/A	N/A
	Right	1	0.03	/	/	0.03	N/A	N/A
		50	0.02	/	/	0.02	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.04	/	/	0.04	N/A	N/A
		50	0.03	/	/	0.03	N/A	N/A

LTE Band66 QPSK (20MHz)	Front	1	0.60	0.07	0.37	0.97	N/A	N/A
		50	0.57	0.07	0.37	0.94	N/A	N/A
	Back	1	0.72	0.09	0.43	1.15	N/A	N/A
		50	0.66	0.09	0.43	1.09	N/A	N/A
	Right	1	0.53	/	/	0.53	N/A	N/A
		50	0.50	/	/	0.50	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.58	/	/	0.58	N/A	N/A
		50	0.54	/	/	0.54	N/A	N/A
LTE Band71 QPSK (20MHz)	Front	1	0.44	0.07	0.37	0.81	N/A	N/A
		50	0.40	0.07	0.37	0.77	N/A	N/A
	Back	1	0.47	0.09	0.43	0.90	N/A	N/A
		50	0.43	0.09	0.43	0.86	N/A	N/A
	Right	1	0.34	/	/	0.34	N/A	N/A
		50	0.29	/	/	0.29	N/A	N/A
	Left	1	/	0.04	0.28	0.28	N/A	N/A
		50	/	0.04	0.28	0.28	N/A	N/A
	Top	1	/	0.05	0.33	0.33	N/A	N/A
		50	/	0.05	0.33	0.33	N/A	N/A
	Bottom	1	0.39	/	/	0.39	N/A	N/A
		50	0.33	/	/	0.33	N/A	N/A

Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore measured volumetric simultaneous SAR summation is not required per FCC KDB Publication 447498 D01v06.

10.6. Measurement Uncertainty (150MHz-6GHz)

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
Measurement system									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)1/2$	$(1-C_p)1/2$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
Test sample related									
Test sample positioning	7.2.2.4.4	2.6	N	1	1	1	2.60	2.60	∞
Device holder uncertainty	7.2.2.4.2 7.2.2.4.3	3	N	1	1	1	3.00	3.00	∞
output power variation-SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	7.2.5	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.83	10.54	
Expanded uncertainty (95%CONFIDENCEINTERVAL)			k				21.26	21.08	

UNCERTAINTY FOR PERFORMANCE CHECK

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
Measurement system									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)1/2$	$(1-C_p)1/2$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	0.00	0.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
Dipole									
Deviation of experimental source from numerical source		4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance		2	R	$\sqrt{3}$	1	1			∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.15	10.05	
Expanded uncertainty (95%CONFIDENCEINTE RVAL			k				20.29	20.10	

10.7. Test Equipment List

Test Equipment	Manufacturer	Model	Serial Number	Calibration	
				Calibration Date (D.M.Y)	Calibration Due (D.M.Y)
PC	Lenovo	H3050	N/A	N/A	N/A
Signal Generator	Angilent	N5182A	MY47070282	Jun. 27, 2024	Jun. 26, 2025
Multimeter	Keithley	Multimeter 2000	4078275	Jun. 27, 2024	Jun. 26, 2025
Network Analyzer	Agilent	8753E	US38432457	Jun. 27, 2024	Jun. 26, 2025
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 27, 2024	Jun. 26, 2025
Power Meter	Agilent	E4418B	GB43312526	Jun. 27, 2024	Jun. 26, 2025
Power Meter	Agilent	E4416A	MY45101555	Jun. 27, 2024	Jun. 26, 2025
Power Meter	Agilent	N1912A	MY50001018	Jun. 27, 2024	Jun. 26, 2025
Power Sensor	Agilent	E9301A	MY41497725	Jun. 27, 2024	Jun. 26, 2025
Power Sensor	Agilent	E9327A	MY44421198	Jun. 27, 2024	Jun. 26, 2025
Power Sensor	Agilent	E9323A	MY53070005	Jun. 27, 2024	Jun. 26, 2025
Power Amplifier	PE	PE15A4019	112342	N/A	N/A
Directional Coupler	Agilent	722D	MY52180104	N/A	N/A
Attenuator	Chensheng	FF779	134251	N/A	N/A
E-Field PROBE	MVG	SSE2	SN 25/22 EPGO375	Jun. 29, 2024	Jun. 28, 2025
DIPOLE 750	MVG	SID750	SN 16/15 DIP 0G750-368	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 835	MVG	SID835	SN 16/15 DIP 0G835-369	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 1800	MVG	SID 1800	SN 16/15 DIP 1G800-371	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 1900	MVG	SID1900	SN 16/15 DIP 1G900-372	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 2450	MVG	SID 2450	SN 16/15 DIP 2G450-374	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 2600	MVG	SID 2600	SN 16/15 DIP 2G600-375	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 5G	MVG	SID 5G	SN 13/14 WGA32	May. 15, 2024	May. 14, 2025
Limesar Dielectric Probe	MVG	SCLMP	SN 19/15 OCPG71	Jun. 05, 2024	Jun. 04, 2025
Communication Antenna	MVG	ANTA59	SN 39/14 ANTA59	N/A	N/A
Mobile Phone Position Device	MVG	MSH101	SN 19/15 MSH101	N/A	N/A
Dummy Probe	MVG	DP66	SN 13/15 DP66	N/A	N/A
SAM PHANTOM	MVG	SAM120	SN 19/15 SAM120	N/A	N/A
PHANTOM TABLE	MVG	TABP101	SN 19/15 TABP101	N/A	N/A
Robot TABLE	MVG	TABP61	SN 19/15 TABP61	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501822	N/A	N/A

Note:1.N/A means this equipment no need to calibrate

2.Each Time means this device need to calibrate every use time

3. The dipole was not damaged properly repaired.

4. The measured SAR deviates from the calibrated SAR value by less than 10%

5. The most recent return-loss result meets the required 20 dB minimum return-loss requirement

6. The most recent measurement of the real or imaginary parts of the impedance deviates by less than 5 Ω from the previous measurement.

11. System Check Results

Date of measurement: 11/11/2024 Test mode: 750 (Head)


Product Description: Validation

Dipole Model: SID750



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.71
Frequency (MHz)	750.000000
Relative permittivity (real part)	41.685400
Relative permittivity (imaginary part)	16.987214
Conductivity (S/m)	0.903651
Variation (%)	-0.090000
SAR 10g (W/Kg)	0.536540
SAR 1g (W/Kg)	0.812871


SURFACE SAR

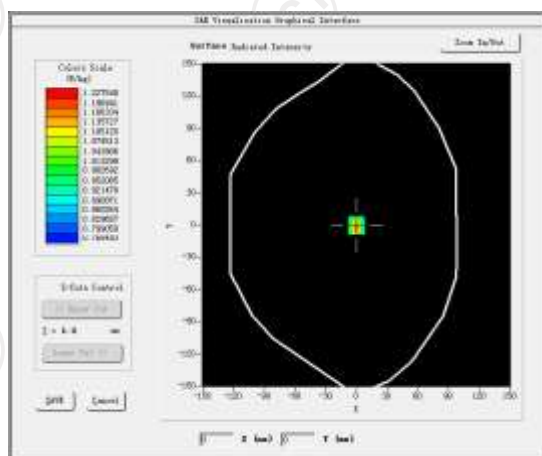

VOLUME SAR

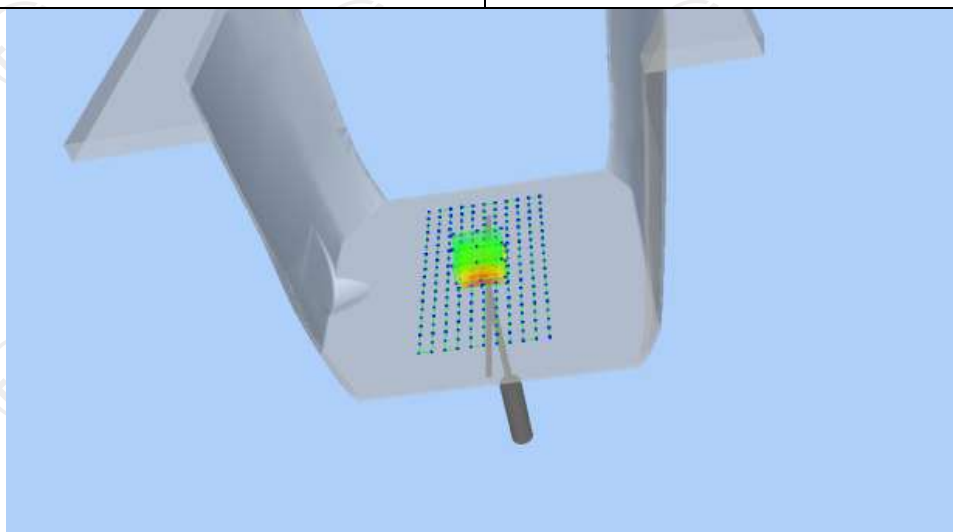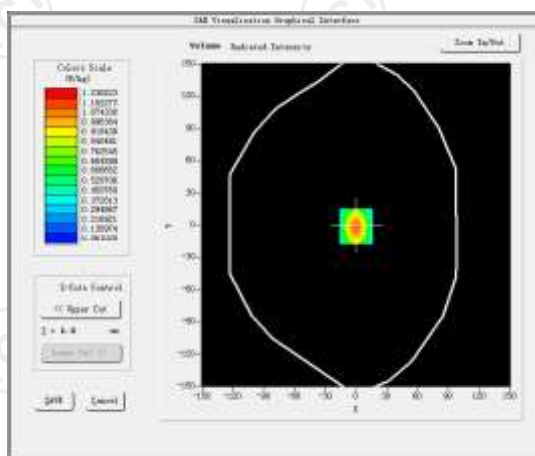

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0054	0.4413	0.3019	0.2338	0.2218

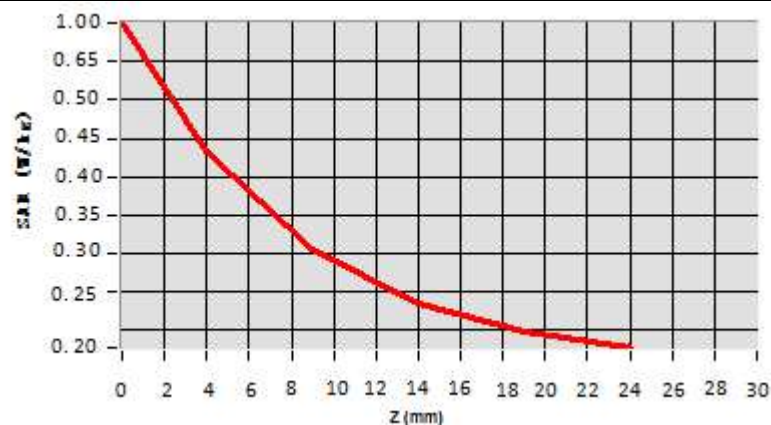

Hot spot position



Date of measurement: 11/14/2024 Test mode: 835 (Head)


Product Description: Validation

Dipole Model: SID835



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.80
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.409702
Relative permittivity (imaginary part)	18.064041
Conductivity (S/m)	0.933104
Variation (%)	-0.320000
SAR 10g (W/Kg)	0.578402
SAR 1g (W/Kg)	0.896743


SURFACE SAR

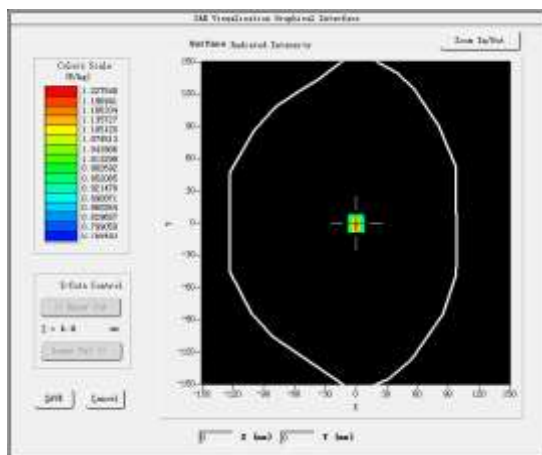

VOLUME SAR

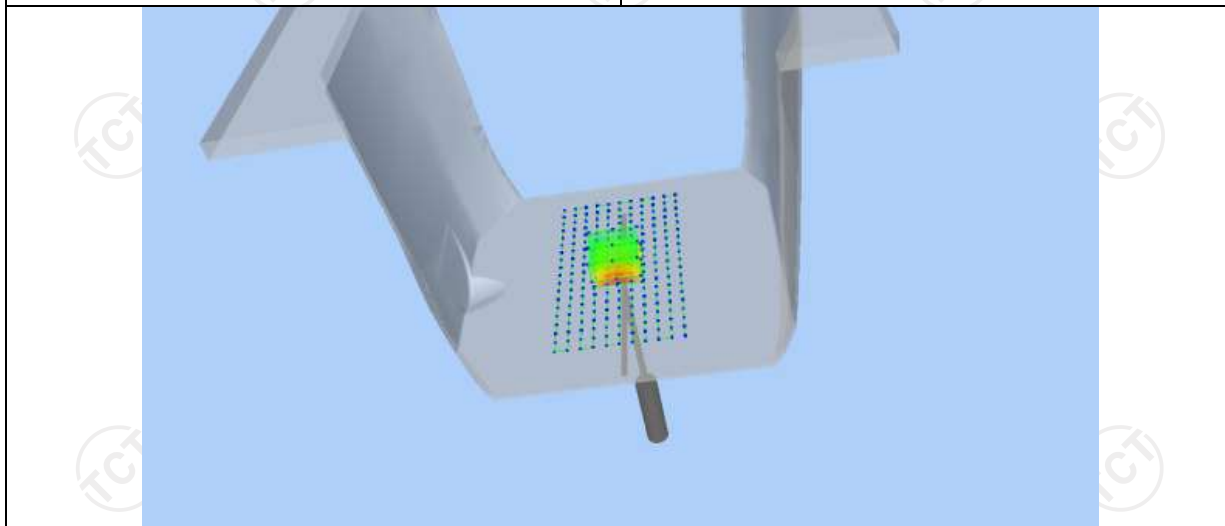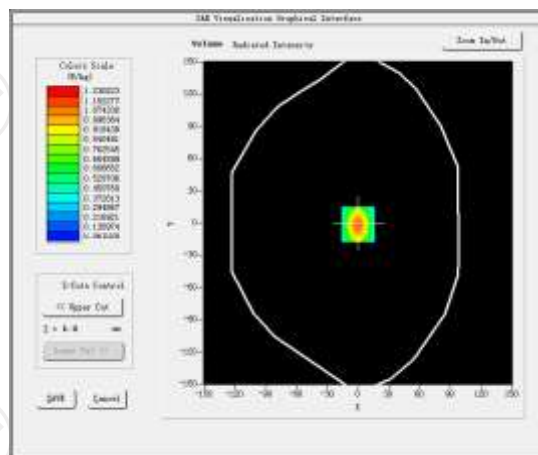

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8625	0.5302	0.2594	0.1302	0.1025

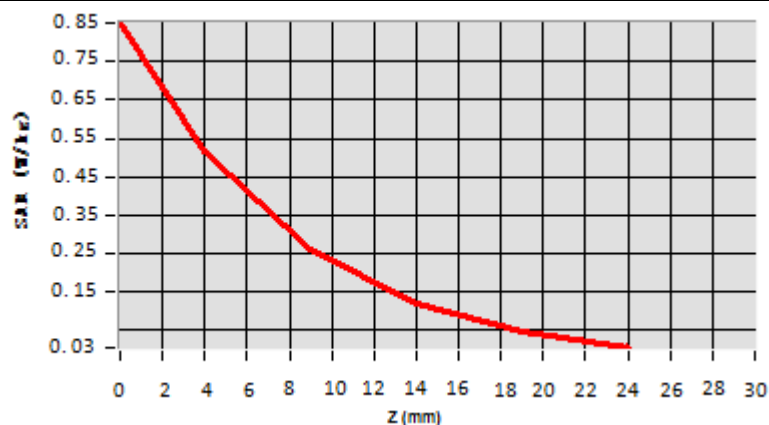

Hot spot position



Date of measurement: 11/19/2024 Test mode: 1800MHz (Head)


Product Description: Validation

Dipole Model: SID1800



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.08
Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.658400
Relative permittivity (imaginary part)	13.65400
Conductivity (S/m)	1.372360
Variation (%)	1.110000
SAR 10g (W/Kg)	2.165145
SAR 1g (W/Kg)	3.865402


SURFACE SAR

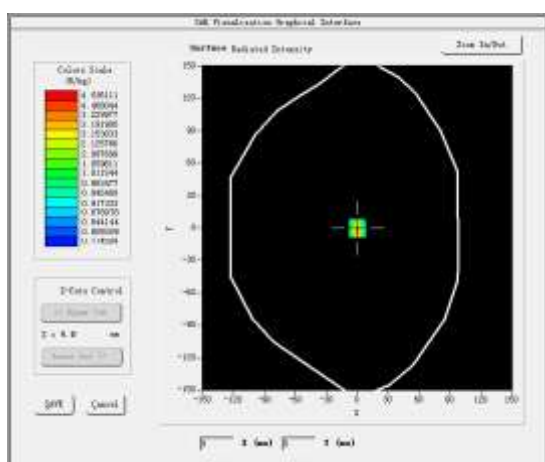

VOLUME SAR

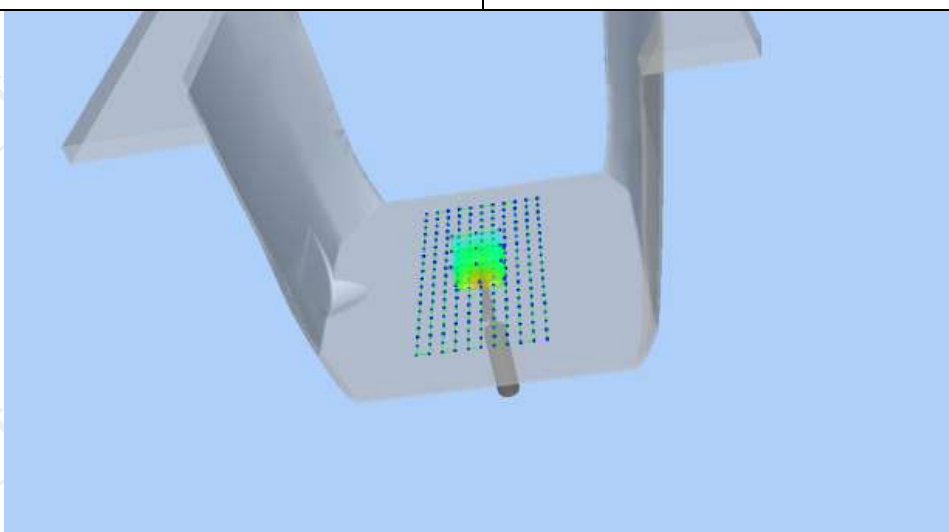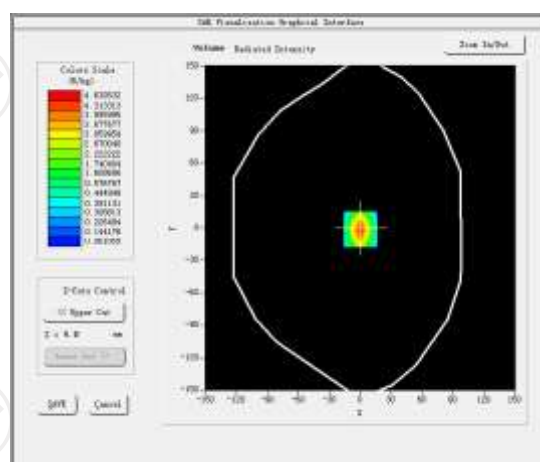

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.7525	2.6543	2.0245	1.6254	1.0214

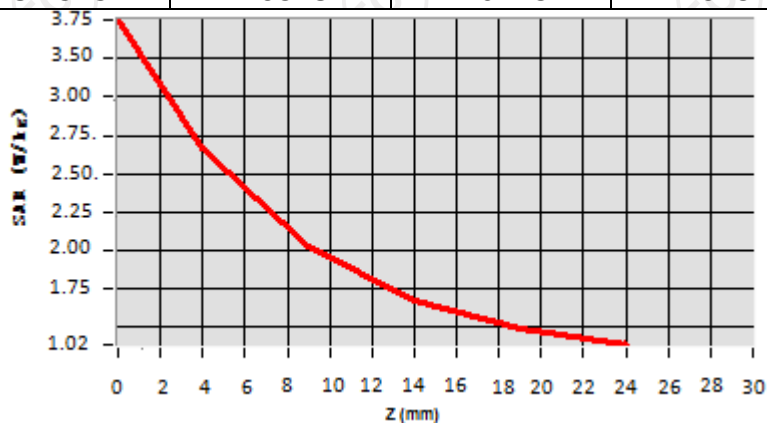

Hot spot position





Date of measurement: 11/22/2024 Test mode: 1900MHz (Head)

Product Description: Validation


Dipole Model: SID1900

E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.23
Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.475721
Relative permittivity (imaginary part)	12.542061
Conductivity (S/m)	1.402609
Variation (%)	-0.470000
SAR 10g (W/Kg)	1.920320
SAR 1g (W/Kg)	3.682154

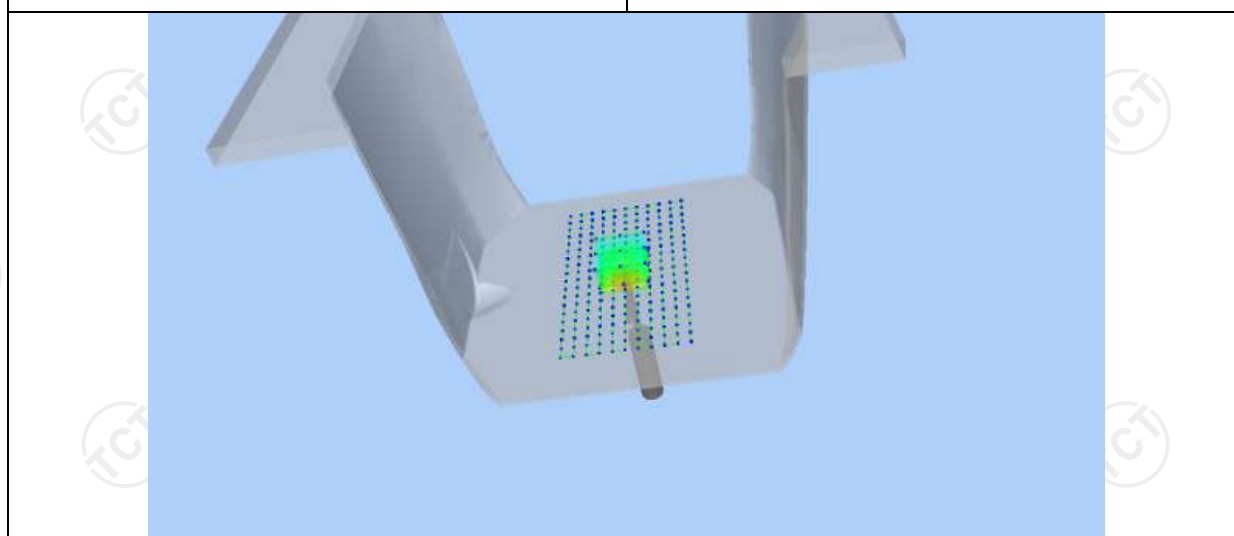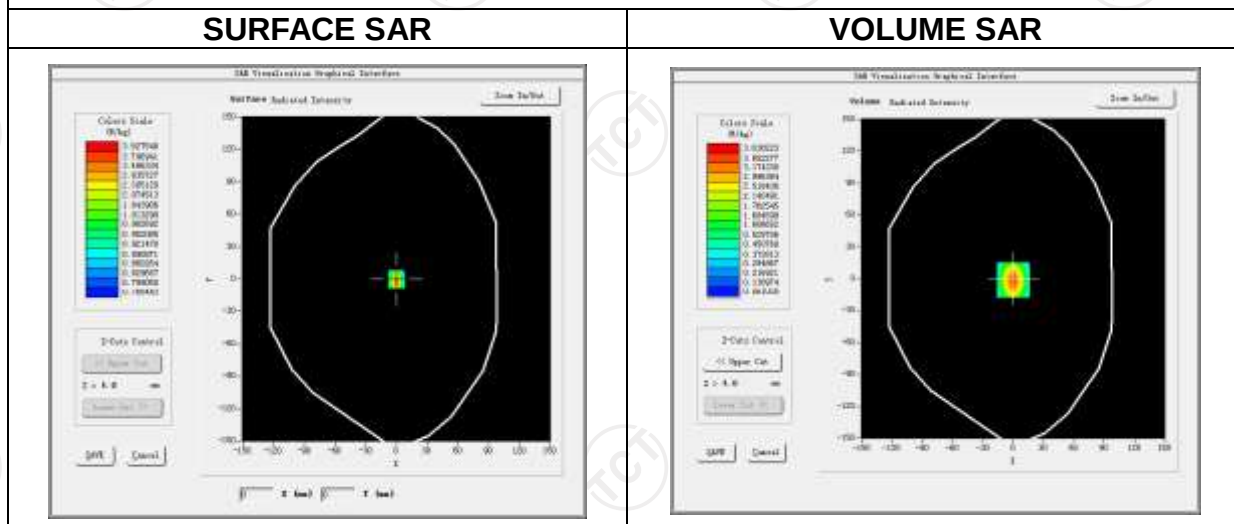

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.5325	2.5687	1.7025	1.3025	0.1125

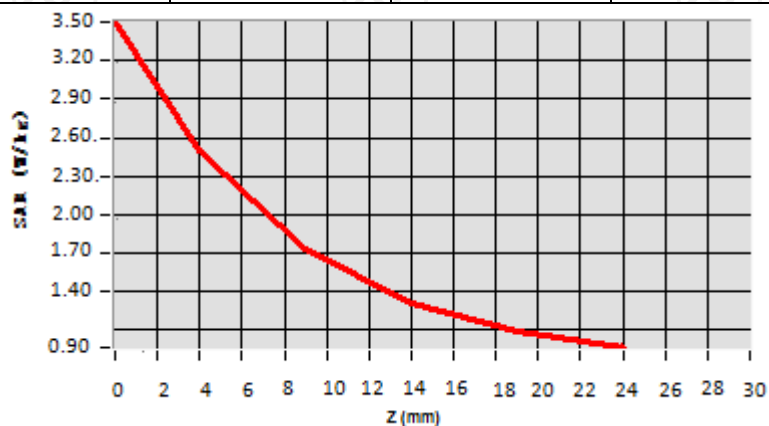

Hot spot position



Date of measurement: 11/26/2024 Test mode: 2450MHz (Head)


Product Description: Validation

Dipole Model: SID2450



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.31
Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.321443
Relative permittivity (imaginary part)	13.684780
Conductivity (S/m)	1.825401
Variation (%)	-0.970000
SAR 10g (W/Kg)	2.412145
SAR 1g (W/Kg)	4.965404


SURFACE SAR

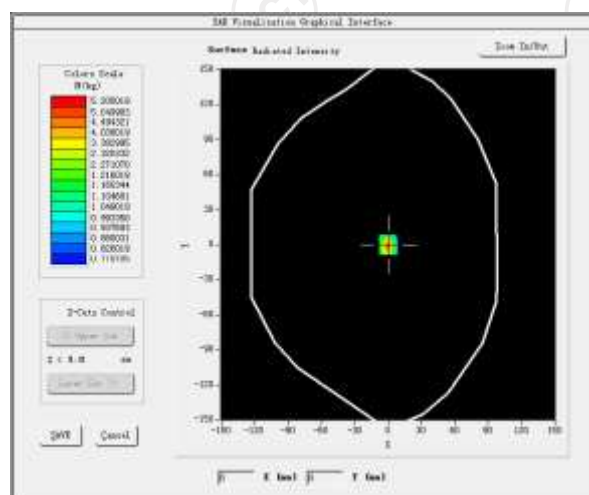

VOLUME SAR

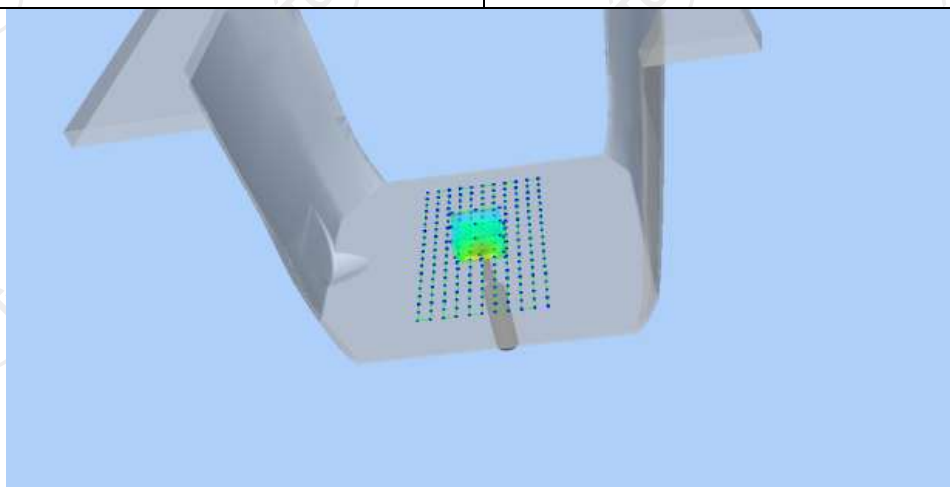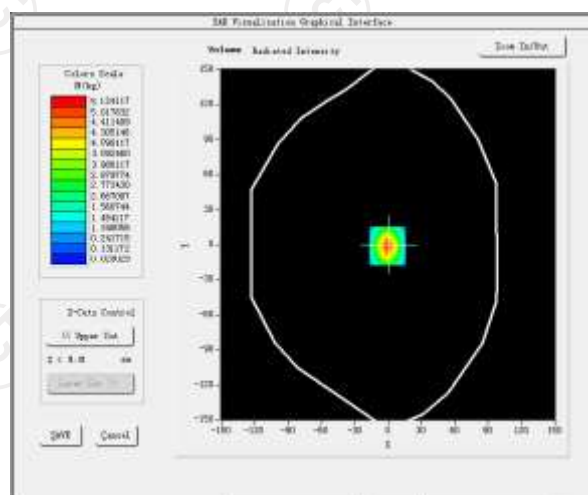

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0262	2.7584	1.5026	0.8252	0.4125

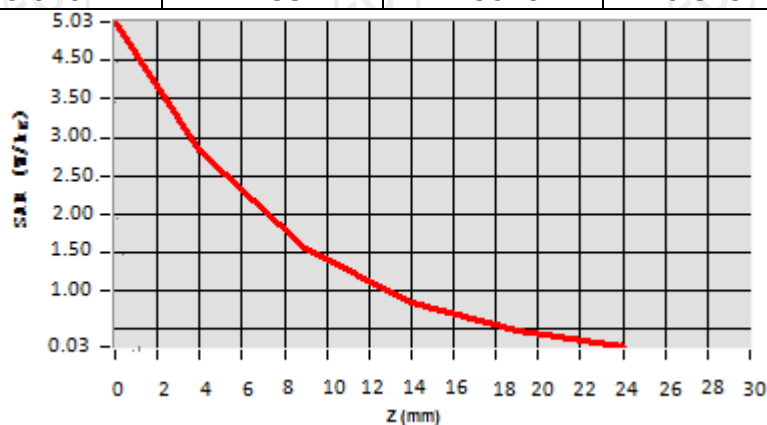

Hot spot position



Date of measurement: 11/29/2024 Test mode: 2600MHz (Head)


Product Description: Validation

Dipole Model: SID2600



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	4.36
Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.140077
Relative permittivity (imaginary part)	13.554289
Conductivity (S/m)	1.952567
Variation (%)	-1.120000
SAR 10g (W/Kg)	2.523127
SAR 1g (W/Kg)	5.432174


SURFACE SAR

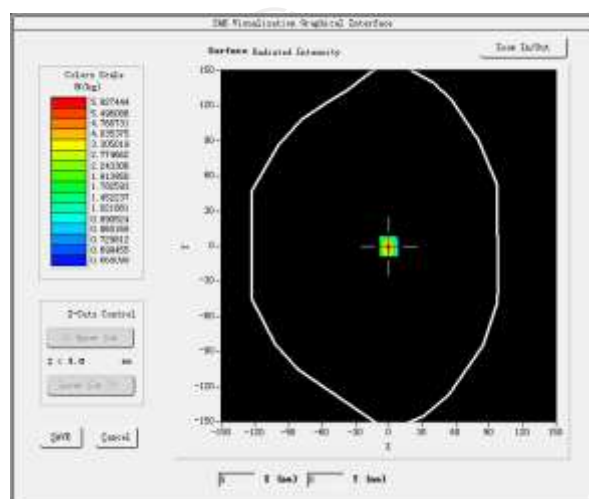

VOLUME SAR

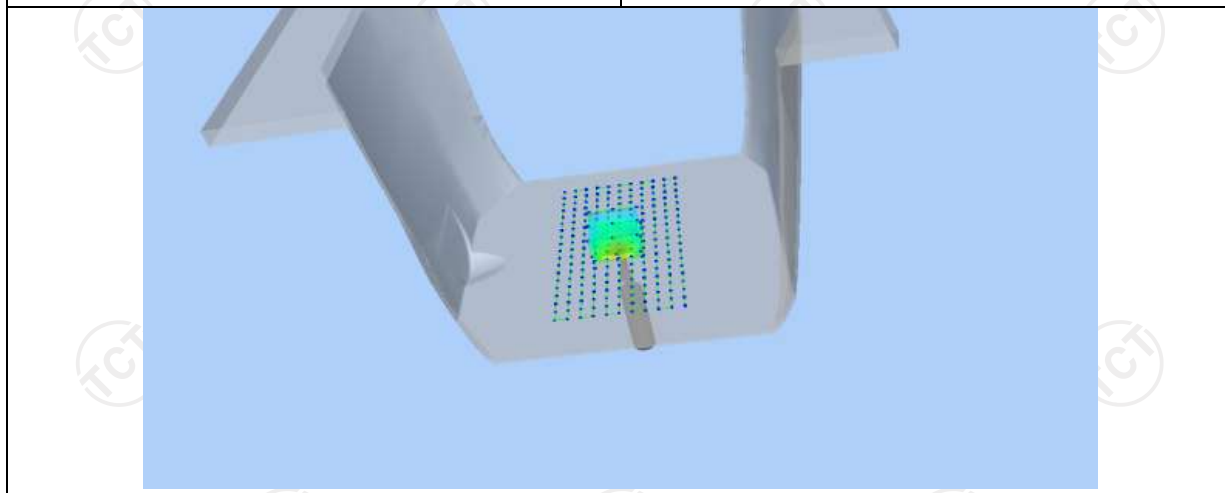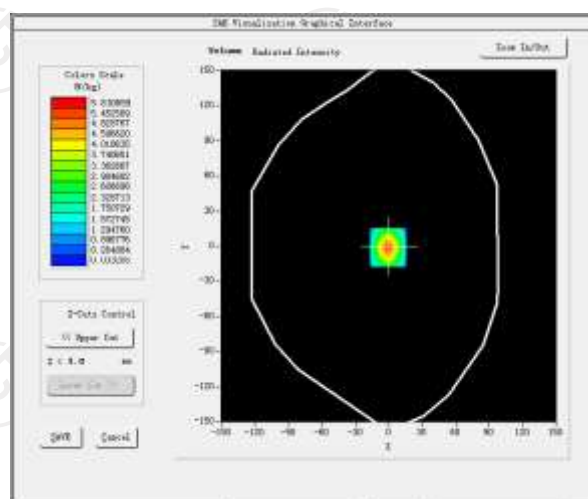

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.7893	3.2375	0.2098	0.0387	0.0249

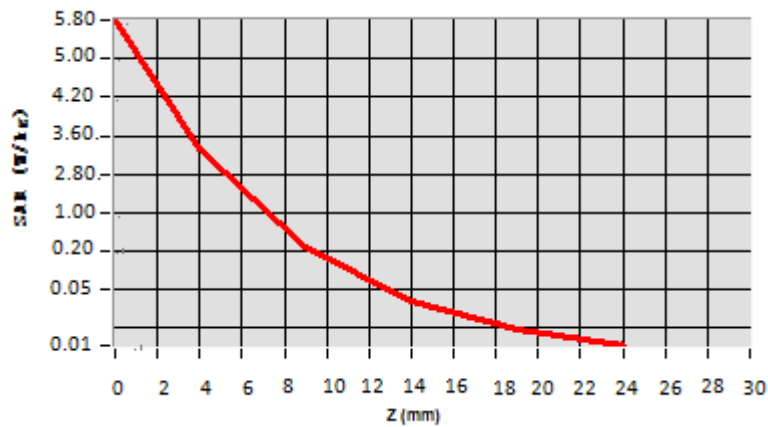

Hot spot position



Date of measurement: 12/02/2024 Test mode: 5200MHz (Head)


Product Description: Validation

Dipole Model: SID5200



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.01
Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.712432
Relative permittivity (imaginary part)	13.58428
Conductivity (S/m)	4.581788
Variation (%)	-2.310000
SAR 10g (W/Kg)	5.215521
SAR 1g (W/Kg)	15.562481


SURFACE SAR

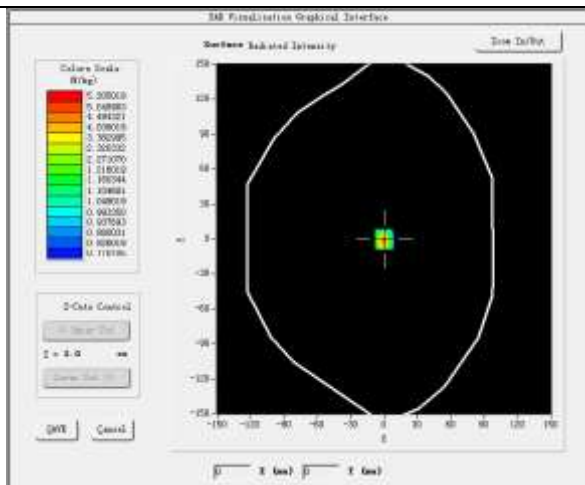

VOLUME SAR

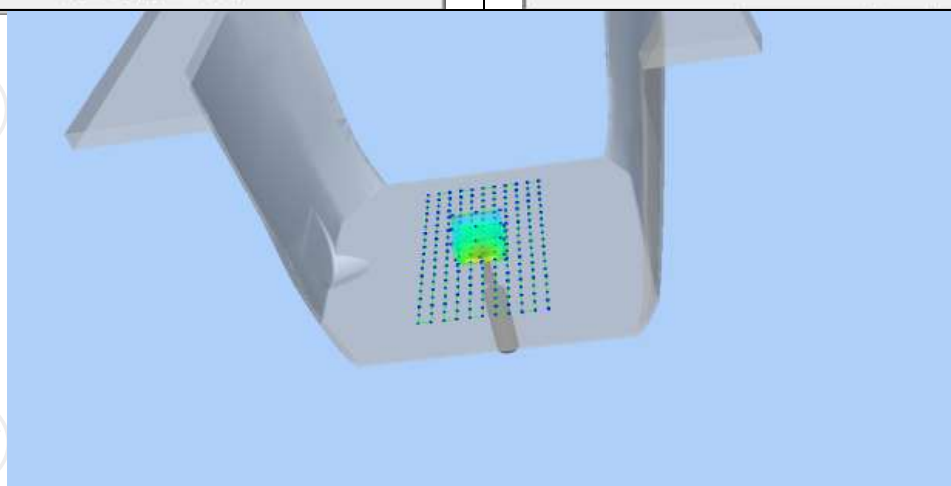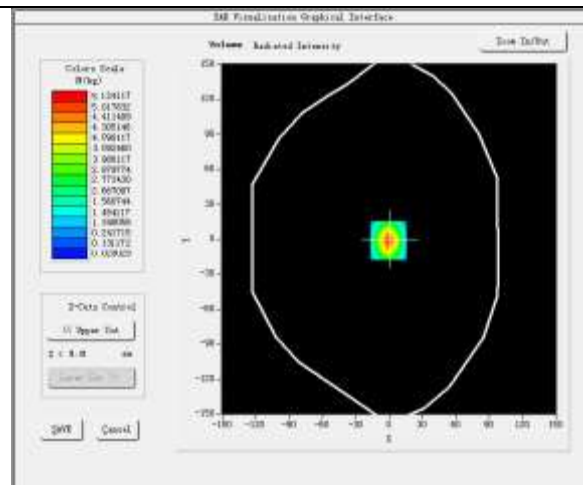

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0122	2.7614	1.5026	0.8252	0.4125

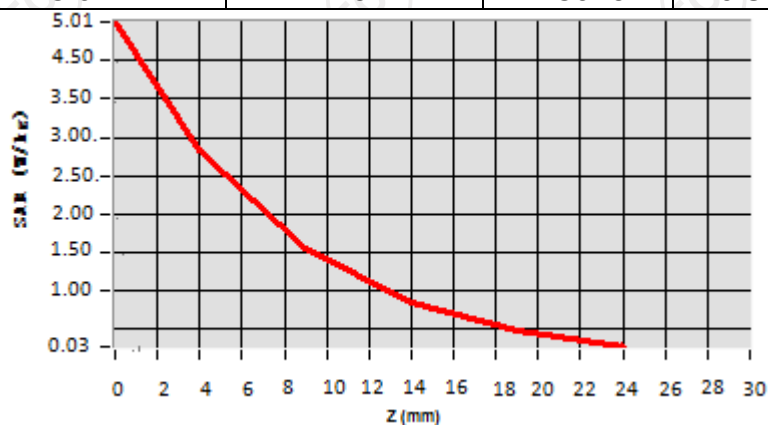

Hot spot position




Product Description: Validation



E-Field Probe: SSE2 (SN 25/22 EPG0375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.94
Frequency (MHz)	5300.000000
Relative permittivity (real part)	35.623832
Relative permittivity (imaginary part)	13.638510
Conductivity (S/m)	4.651288
Variation (%)	-3.050000
SAR 10g (W/Kg)	5.915420
SAR 1g (W/Kg)	17.182411


SURFACE SAR

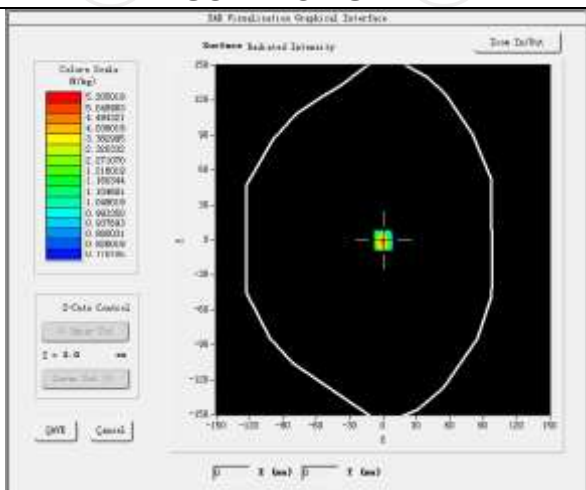

VOLUME SAR

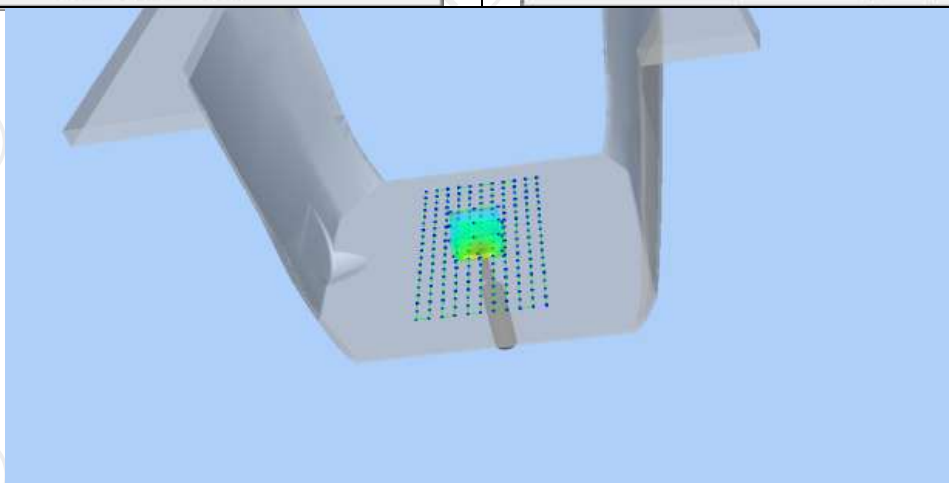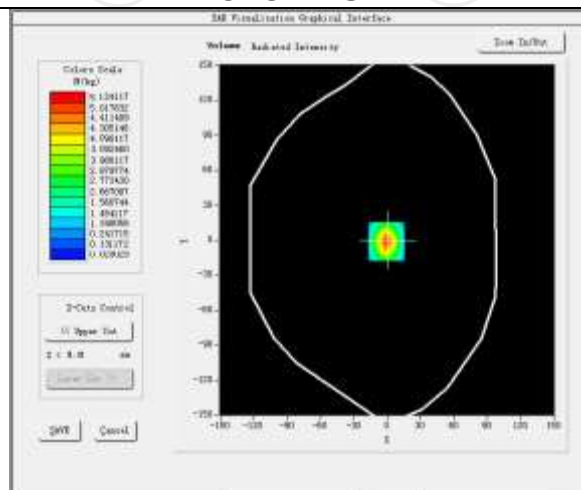

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	49.15	27.584	20.346	11.252	5.4125

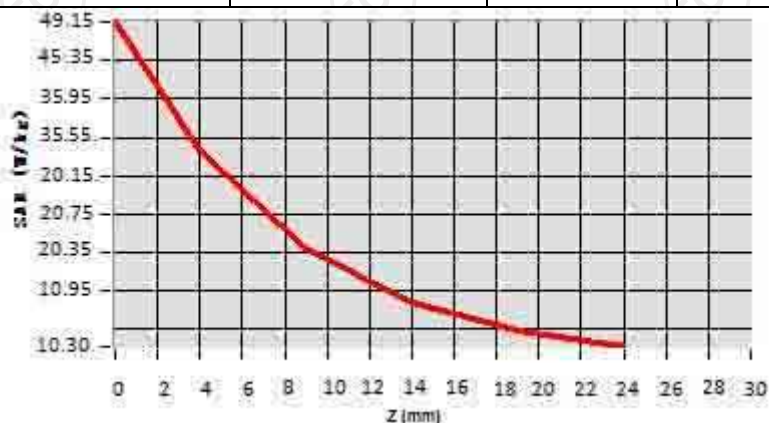

Hot spot position



Date of measurement: 12/06/2024 Test mode: 5800MHz (Head)


Product Description: Validation

Dipole Model: SID5800



E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.06
Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.812114
Relative permittivity (imaginary part)	13.865675
Conductivity (S/m)	5.180828
Variation (%)	-2.800000
SAR 10g (W/Kg)	5.834210
SAR 1g (W/Kg)	18.203573


SURFACE SAR

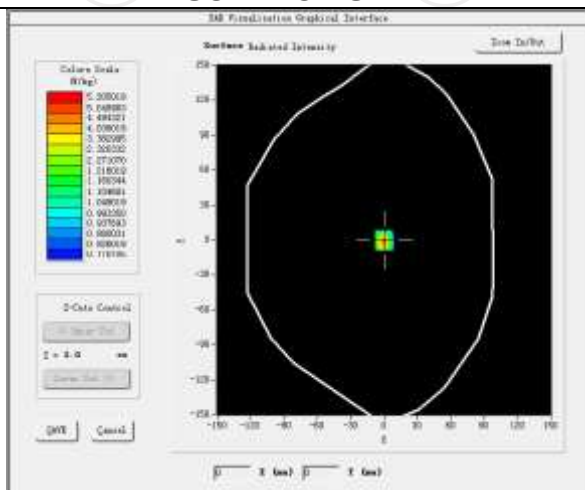

VOLUME SAR

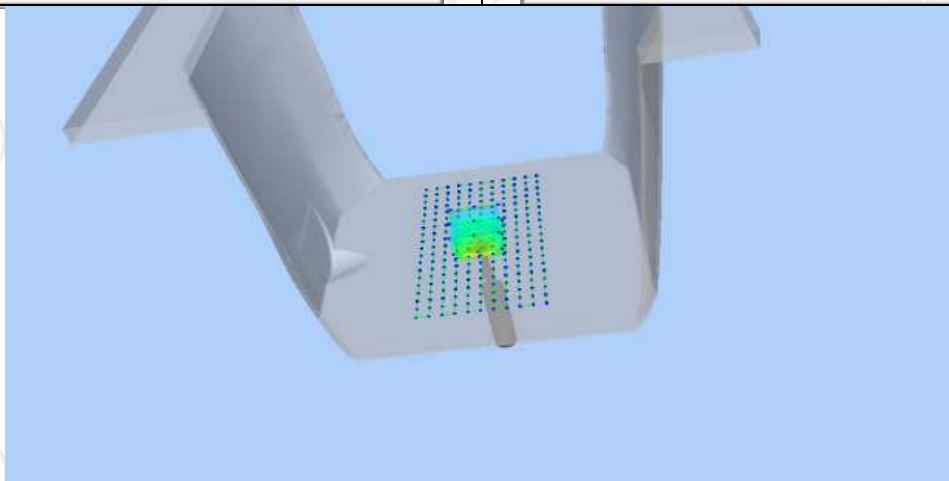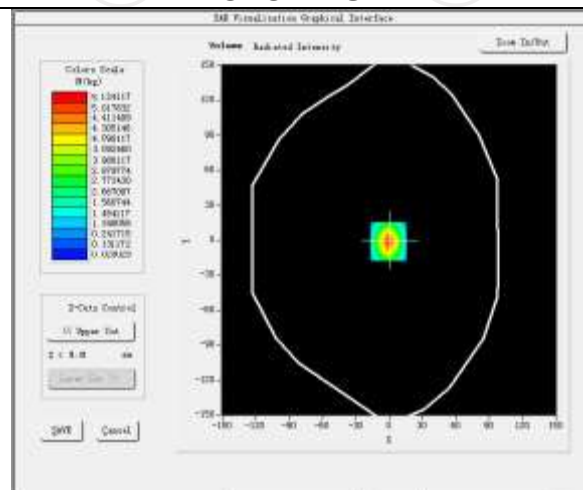

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0622	2.8054	1.5421	0.8321	0.4130

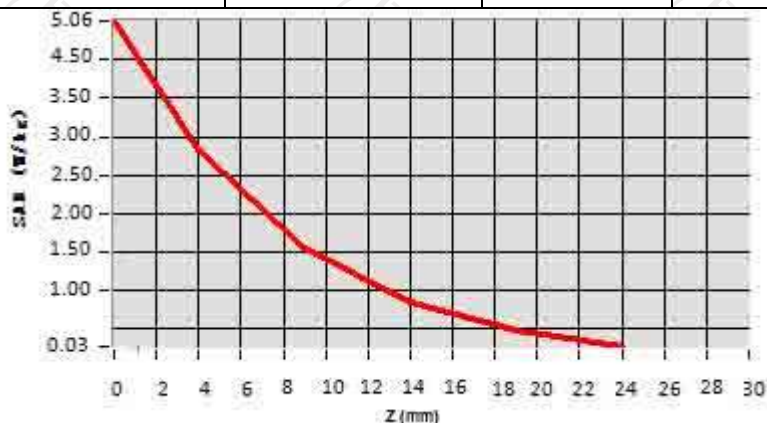

Hot spot position



12. SAR Test Data

GSM850

MEASUREMENT 1



Low Band SAR (Channel 128)

Date: 11/14/2024

Frequency (MHz)	824.200000
Relative permittivity (real part)	41.447732
Relative permittivity (imaginary part)	17.927221
Conductivity (S/m)	0.929362
Variation (%)	-0.930000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>GSM850(voice)</u>


SURFACE SAR

VOLUME SAR

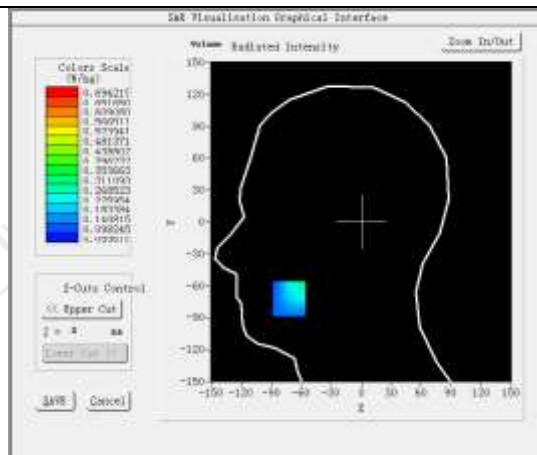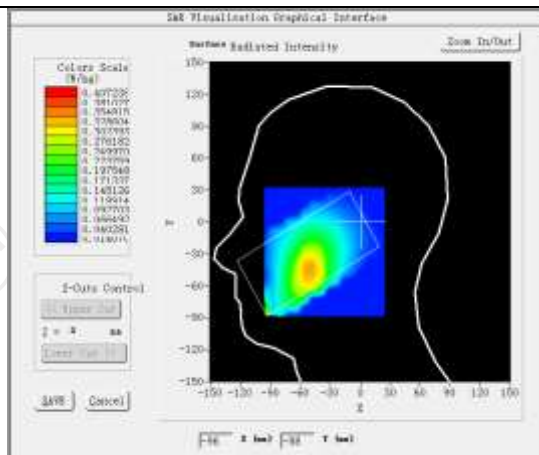


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.38W/kg


SAR 10g (W/Kg)	0.205118
SAR 1g (W/Kg)	0.284475

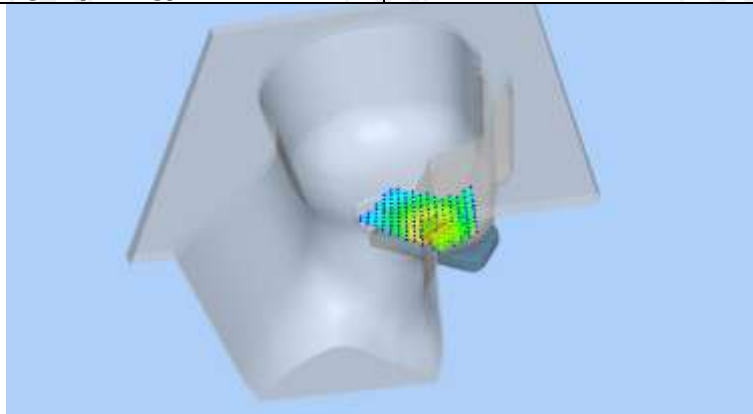

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3324	0.3200	0.2176	0.2036	0.2567

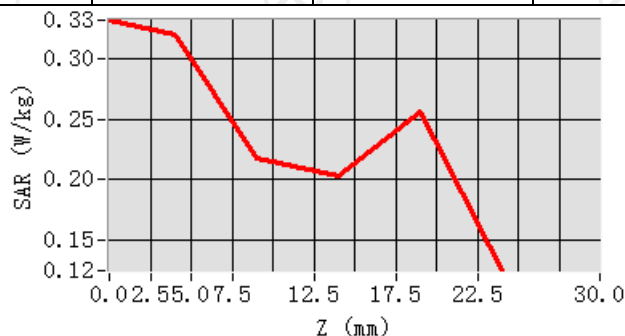

Hot spot position

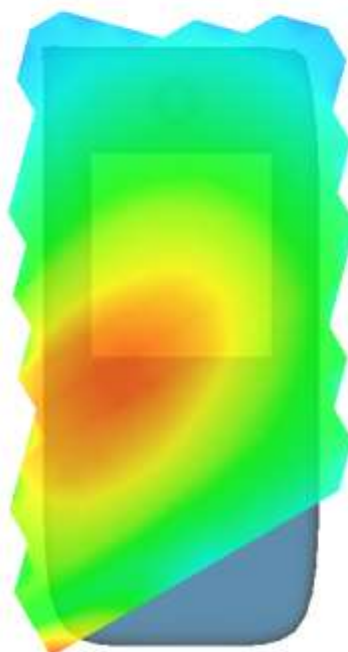



MEASUREMENT 2

Low Band SAR (Channel 128)

Date: 11/14/2024


Frequency (MHz)	824.200000
Relative permittivity (real part)	41.447732
Relative permittivity (imaginary part)	17.927221
Conductivity (S/m)	0.929362
Variation (%)	-2.700000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>GSM850(Voice)</u>
SURFACE SAR	VOLUME SAR

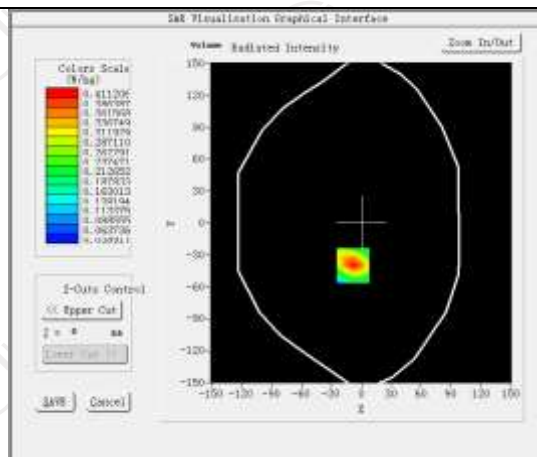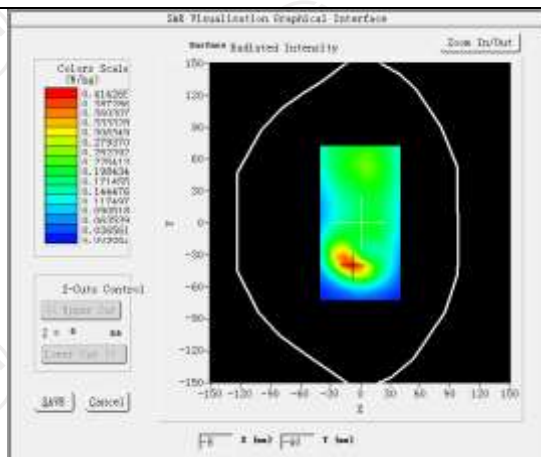


Maximum location: X=-8.00, Y=-40.00 SAR Peak: 0.64 W/kg


SAR 10g (W/Kg)	0.218439
SAR 1g (W/Kg)	0.385965

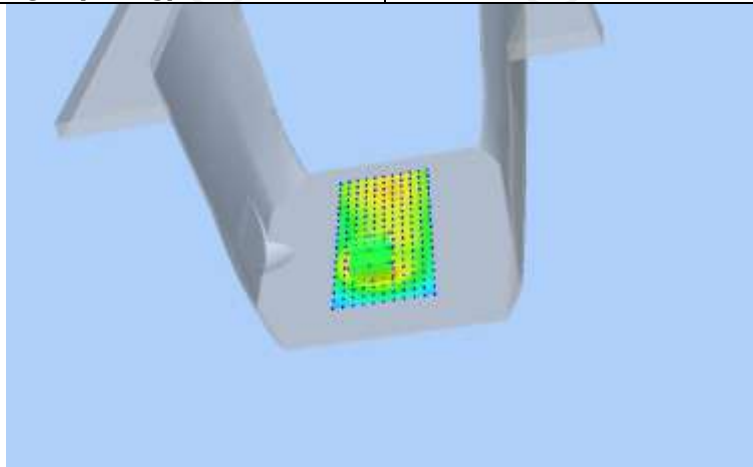

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6343	0.4112	0.2375	0.1433	0.0952

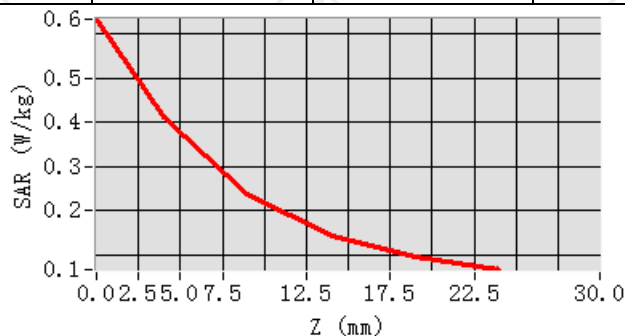

Hot spot position

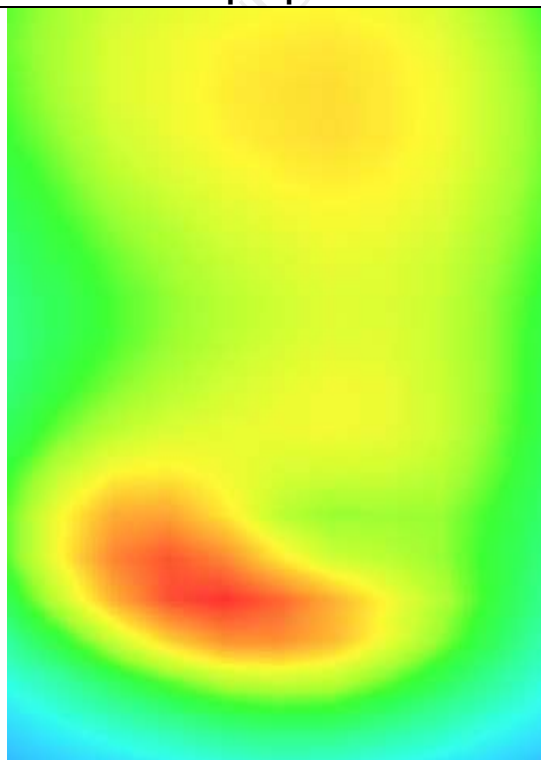



MEASUREMENT 3

Low Band SAR (Channel 128)

Date: 11/14/2024


Frequency (MHz)	824.200000
Relative permittivity (real part)	41.447732
Relative permittivity (imaginary part)	17.927221
Conductivity (S/m)	0.929362
Variation (%)	-1.370000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	GSM850(GPRS 3slot)
SURFACE SAR	VOLUME SAR

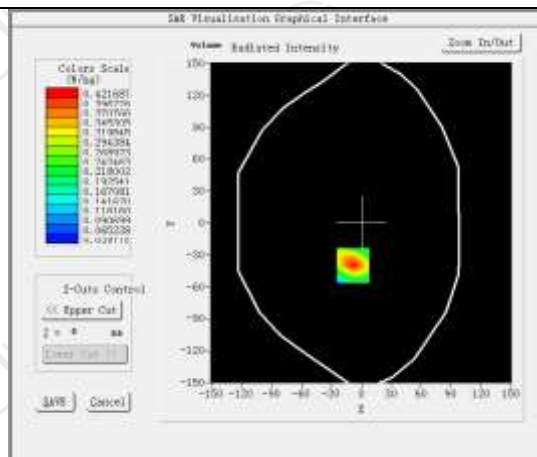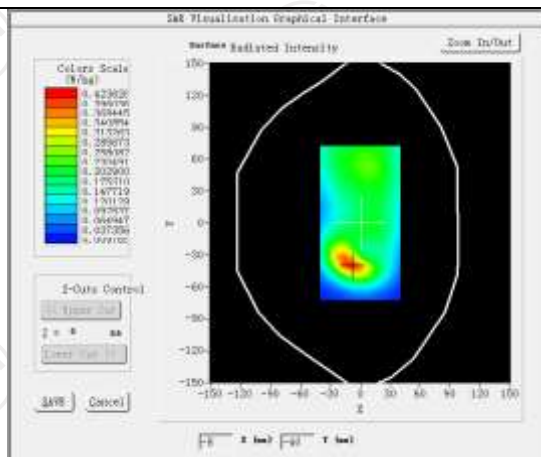


Maximum location: X=-8.00, Y=-40.00 SAR Peak: 0.66 W/kg


SAR 10g (W/Kg)	0.223465
SAR 1g (W/Kg)	0.395623

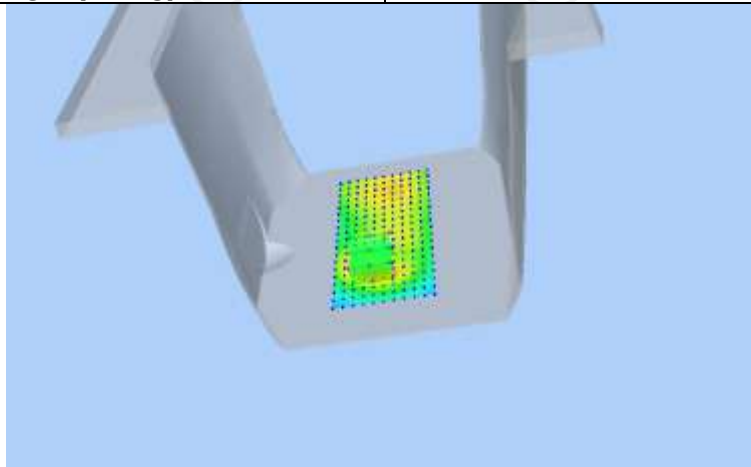

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6519	0.4217	0.2429	0.1463	0.0973

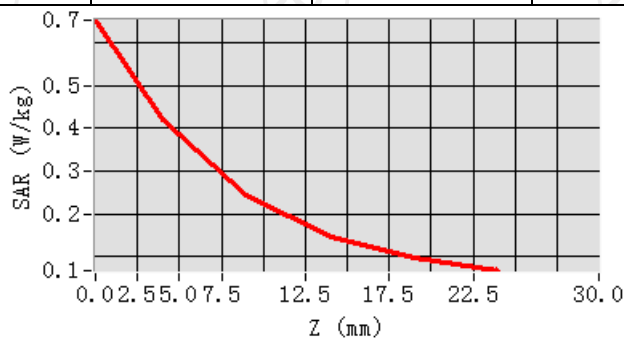

Hot spot position

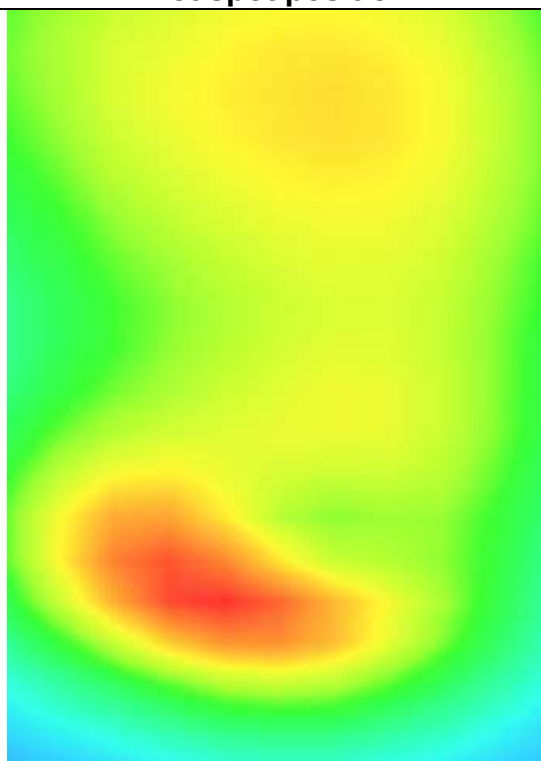



MEASUREMENT 4

Low Band SAR (Channel 128)

Date: 11/14/2024


Frequency (MHz)	824.200000
Relative permittivity (real part)	41.447732
Relative permittivity (imaginary part)	17.927221
Conductivity (S/m)	0.929362
Variation (%)	-3.780000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>GSM850(GPRS 3slot hotspot)</u>
SURFACE SAR	VOLUME SAR

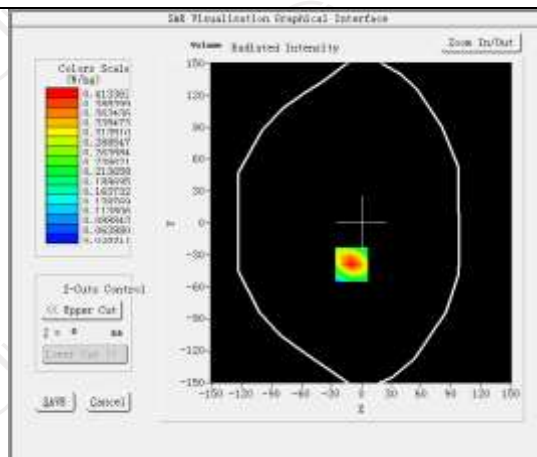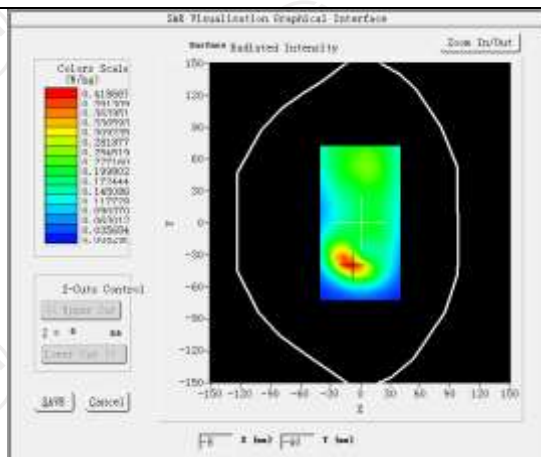


Maximum location: X=-10.00, Y=-39.00 SAR Peak: 0.64 W/kg


SAR 10g (W/Kg)	0.219954
SAR 1g (W/Kg)	0.387886

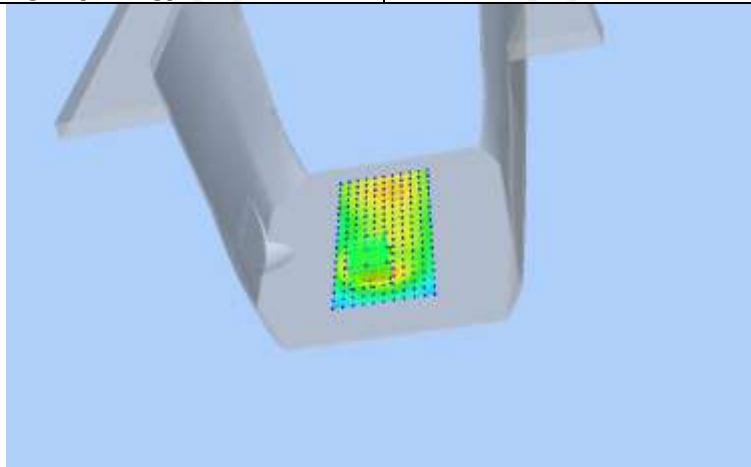

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6389	0.4134	0.2384	0.1441	0.0963

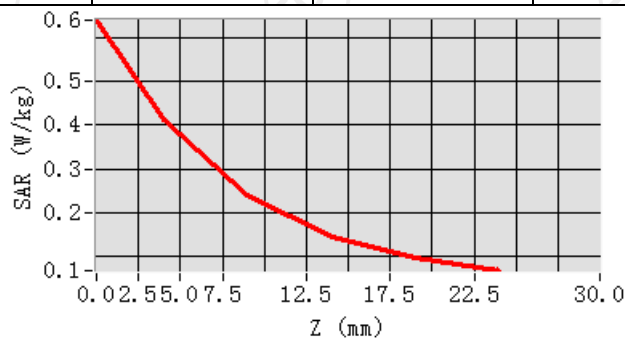

Hot spot position

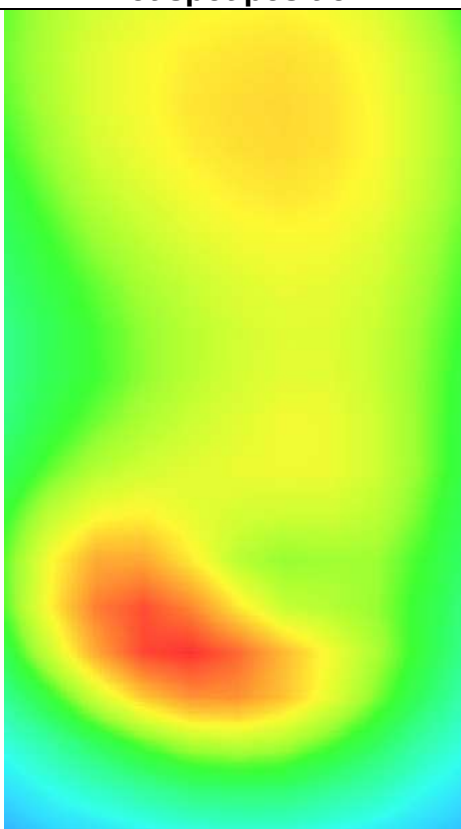

GSM1900

MEASUREMENT 1

Low Band SAR (Channel 512):		Date: 11/22/2024
Frequency (MHz)	1850.200000	
Relative permittivity (real part)	39.566695	
Relative permittivity (imaginary part)	13.095807	
Conductivity (S/m)	1.387545	
Variation (%)	-0.310000	
Crest Factor	1.0	
Probe Conversion factor	2.23	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>	
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>	
Phantom	<u>Left head</u>	
Device Position	<u>Cheek</u>	
Band	<u>GSM1900(voice)</u>	
SURFACE SAR	VOLUME SAR	


Maximum location: X=-80.00, Y=-24.00 SAR Peak: 0.11W/kg

SAR 10g (W/Kg)


0.101146

SAR 1g (W/Kg)


0.117212

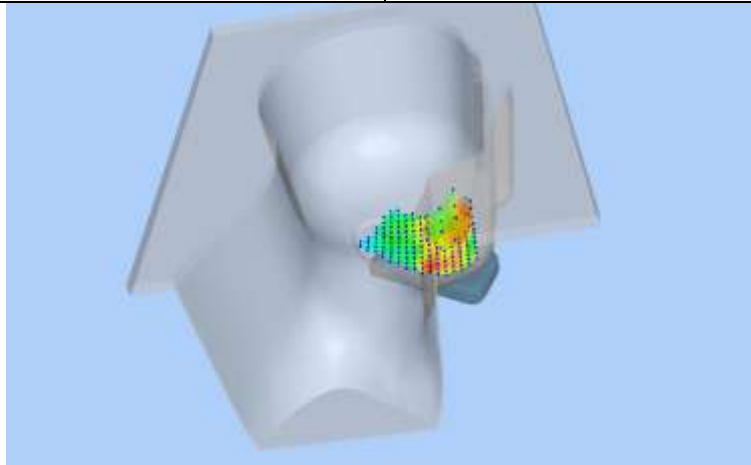

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5718	0.1191	0.0649	0.1041	0.0468

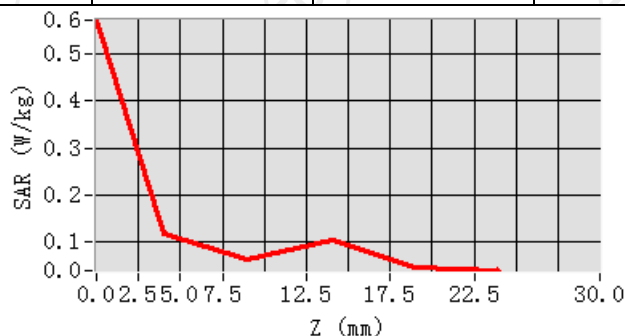

Hot spot position

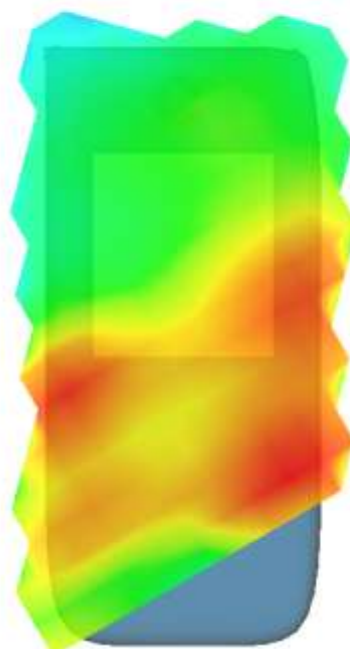



MEASUREMENT 2

Low Band SAR (Channel 512):

Date: 11/22/2024


Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.566695
Relative permittivity (imaginary part)	13.095807
Conductivity (S/m)	1.387545
Variation (%)	-1.670000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>GSM1900(voice)</u>
SURFACE SAR	VOLUME SAR

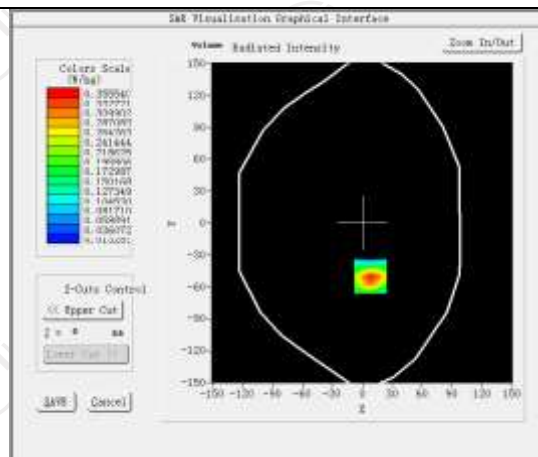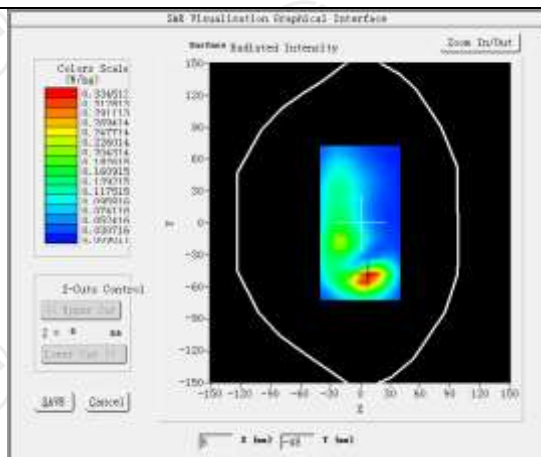


Maximum location: X=8.00, Y=-50.00 SAR Peak: 0.56 W/kg


SAR 10g (W/Kg)	0.177710
SAR 1g (W/Kg)	0.333851

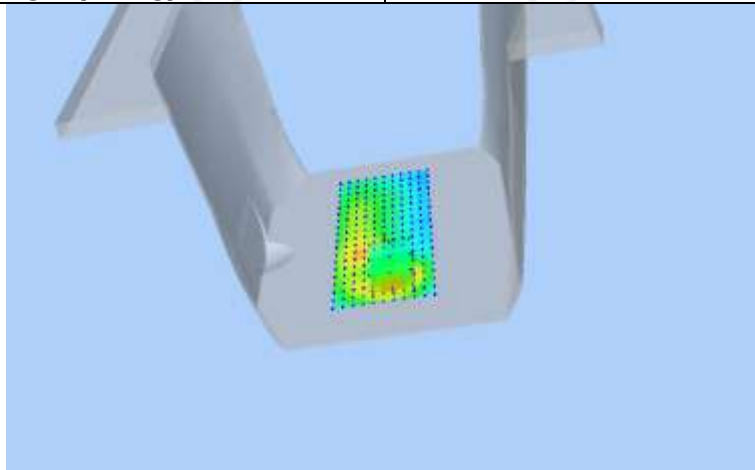

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5548	0.3555	0.1998	0.1145	0.0700

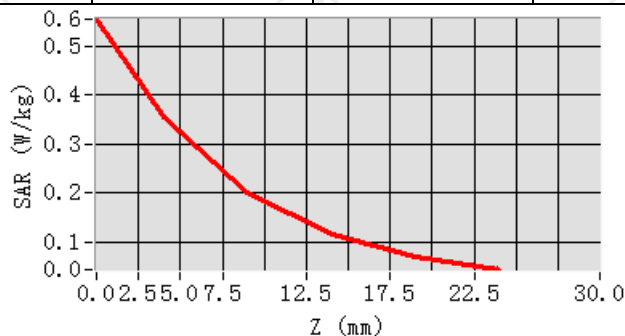

Hot spot position

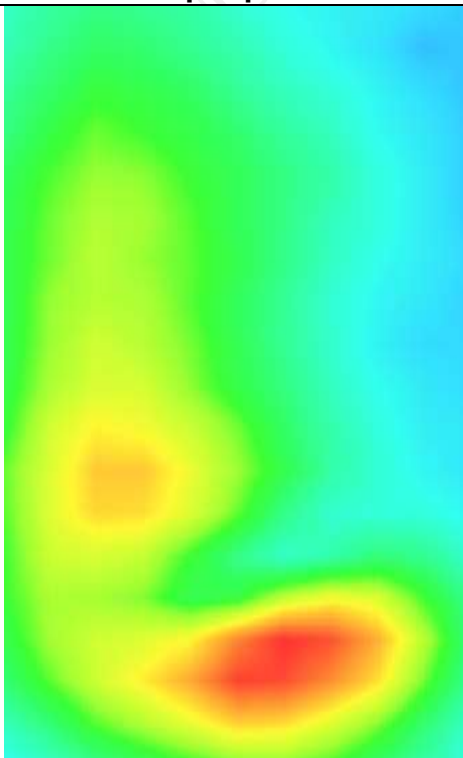



MEASUREMENT 3

Low Band SAR (Channel 512):

Date: 11/22/2024


Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.566695
Relative permittivity (imaginary part)	13.095807
Conductivity (S/m)	1.387545
Variation (%)	0.670000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	GSM1900(GPRS 3slot)
SURFACE SAR	VOLUME SAR

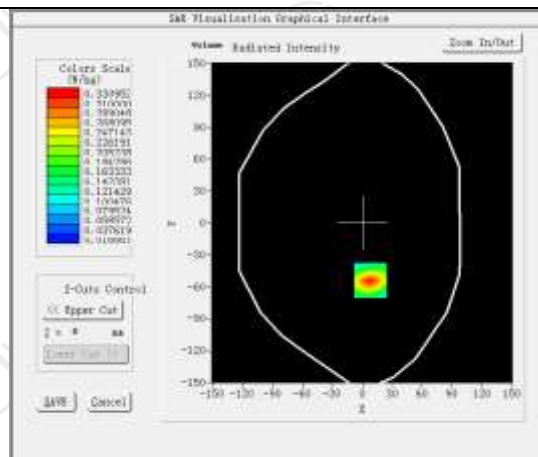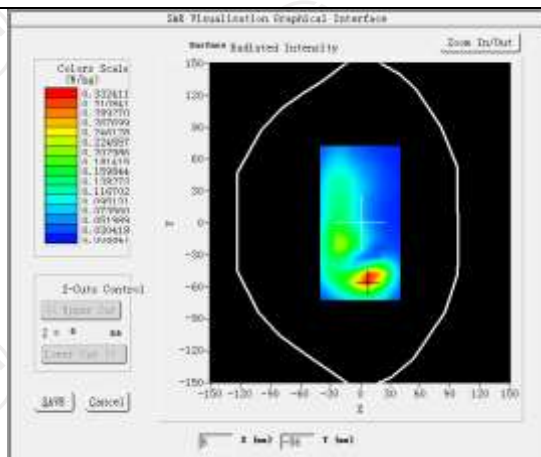


Maximum location: X=8.00, Y=-54.00 SAR Peak: 0.46 W/kg


SAR 10g (W/Kg)	0.174539
SAR 1g (W/Kg)	0.306541

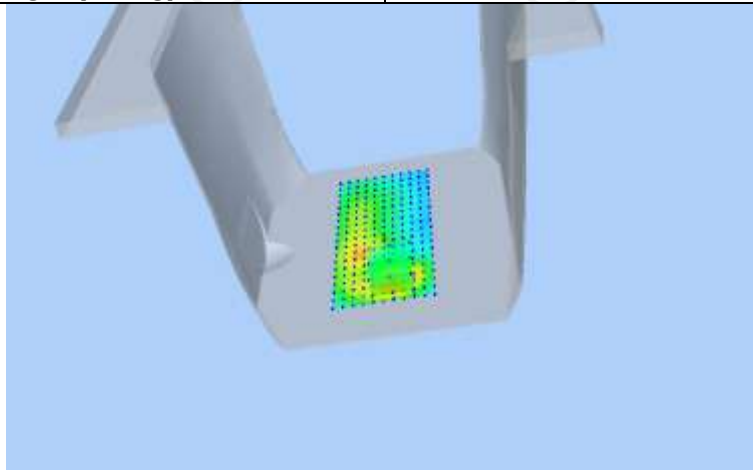

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4614	0.3310	0.2147	0.1379	0.0878

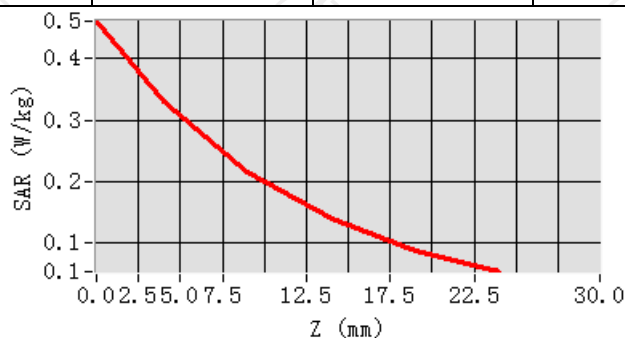

Hot spot position

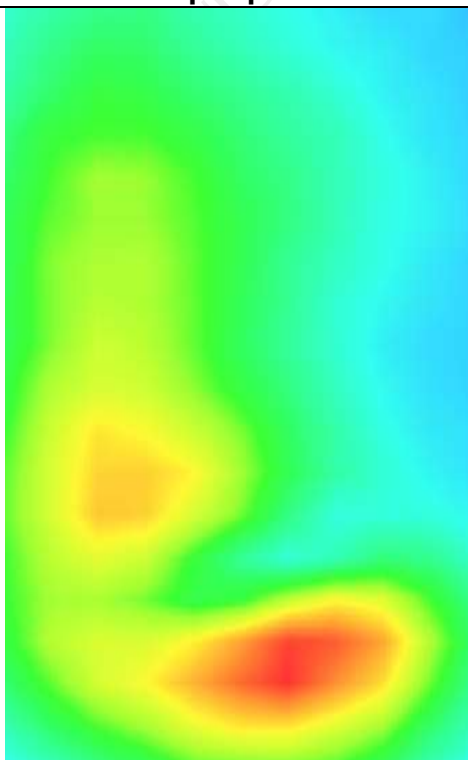



MEASUREMENT 4

Low Band SAR (Channel 512):

Date: 11/22/2024


Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.566695
Relative permittivity (imaginary part)	13.095807
Conductivity (S/m)	1.387545
Variation (%)	3.300000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>GSM1900(GPRS 3slot hotspot)</u>
SURFACE SAR	VOLUME SAR

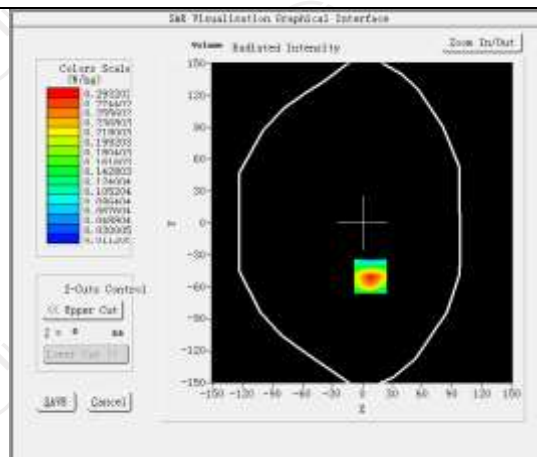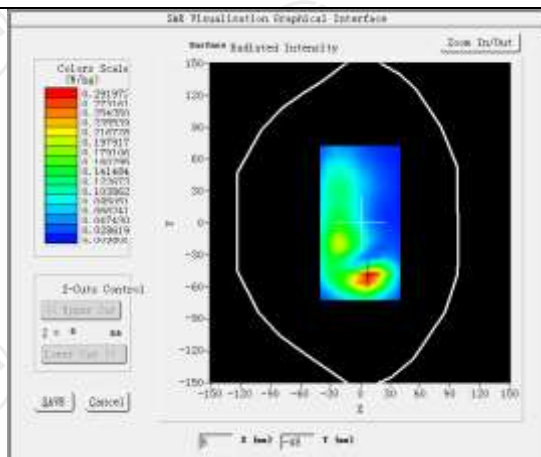


Maximum location: X=8.00, Y=-50.00 SAR Peak: 0.47 W/kg


SAR 10g (W/Kg)	0.150383
SAR 1g (W/Kg)	0.277326

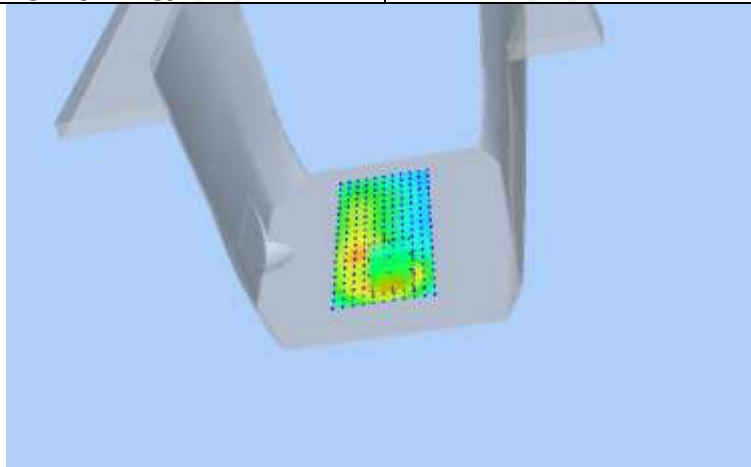


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4588	0.2932	0.1648	0.0954	0.0599

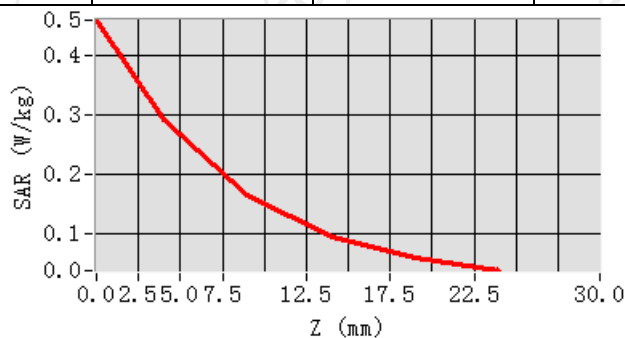


Hot spot position

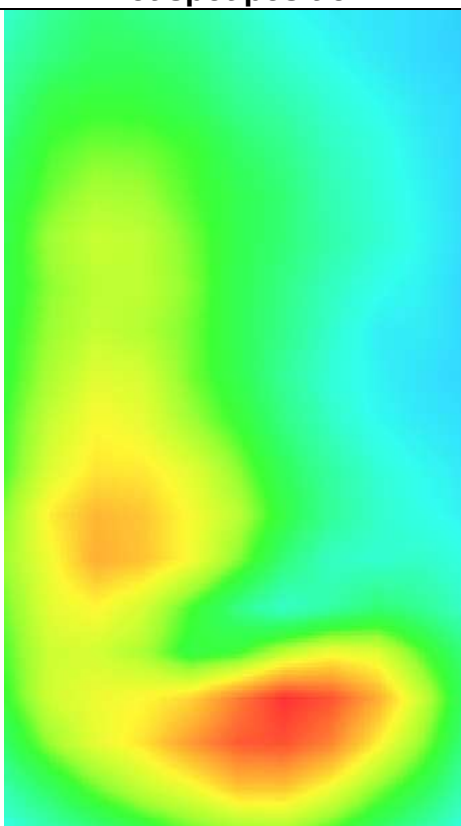

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4955	0.1194	0.0677	0.2493	0.0513

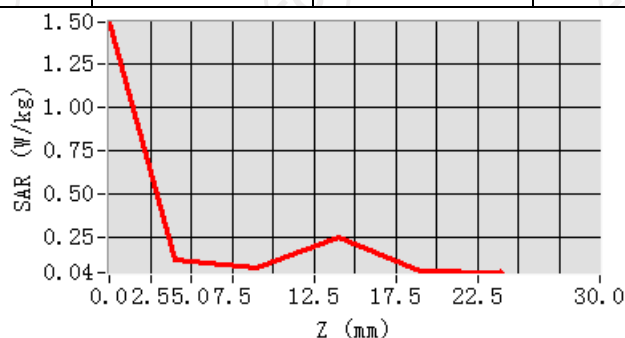

Hot spot position

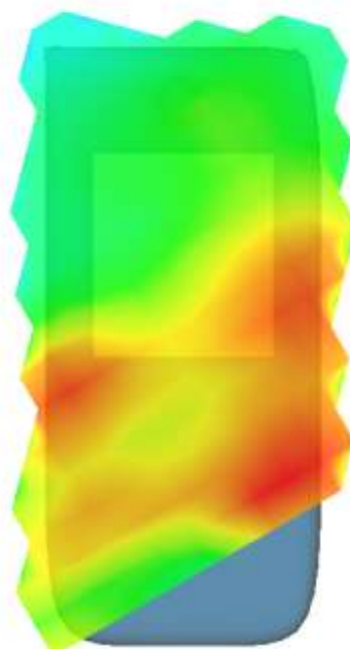



MEASUREMENT 2

Low Band SAR (Channel 9262):

Date: 11/22/2024


Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.562676
Relative permittivity (imaginary part)	13.071344
Conductivity (S/m)	1.388210
Variation (%)	2.520000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPGO375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>BAND2 WCDMA1900</u>
SURFACE SAR	VOLUME SAR

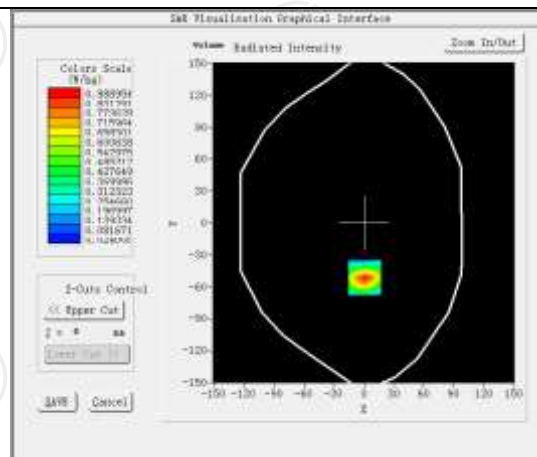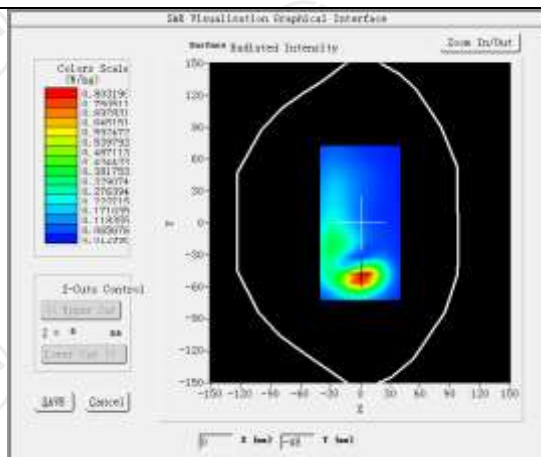


Maximum location: X=1.00, Y=-51.00 SAR Peak: 1.33 W/kg


SAR 10g (W/Kg)	0.429915
SAR 1g (W/Kg)	0.741325

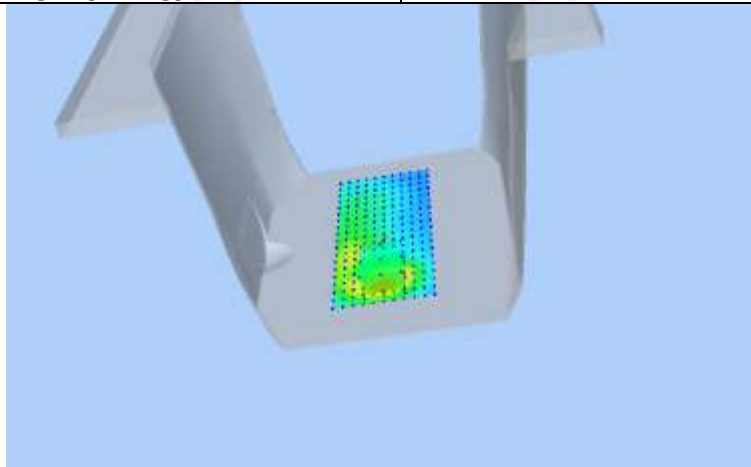

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3171	0.8890	0.5333	0.3197	0.1950

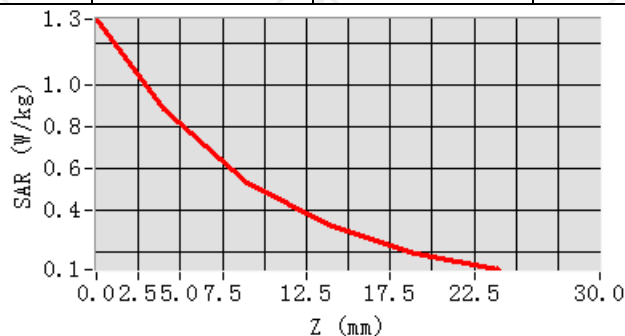

Hot spot position

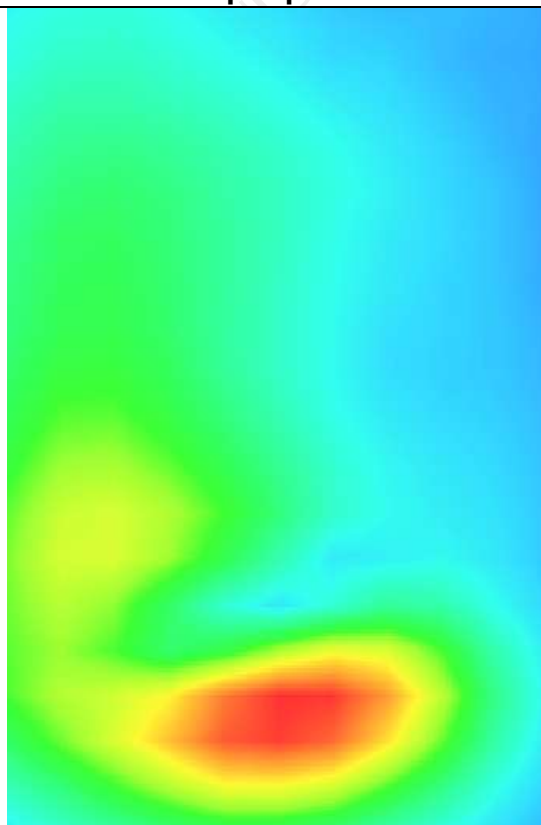



MEASUREMENT 3

Low Band SAR (Channel 9262):

Date: 11/22/2024


Frequency (MHz)	1852.400000
Relative permittivity (real part)	39.562676
Relative permittivity (imaginary part)	13.071344
Conductivity (S/m)	1.388210
Variation (%)	1.800000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPGO375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>BAND2 WCDMA1900(hotspot)</u>
SURFACE SAR	VOLUME SAR

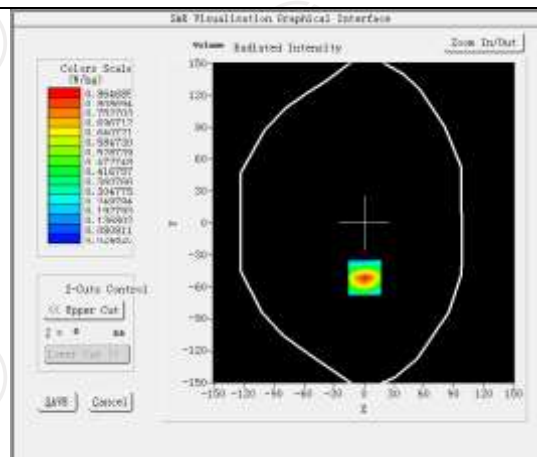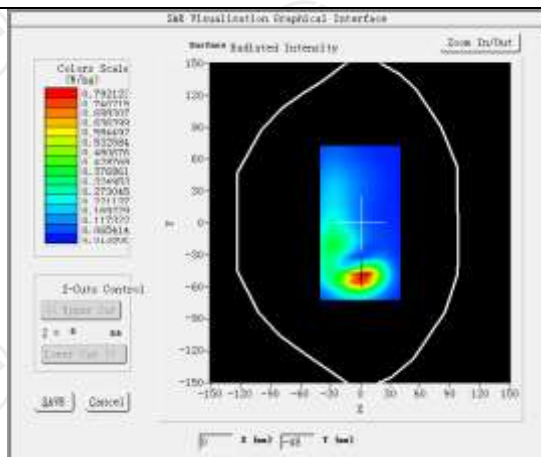


Maximum location: X=1.00, Y=-51.00 SAR Peak 1.31 W/kg


SAR 10g (W/Kg)	0.416341
SAR 1g (W/Kg)	0.733955

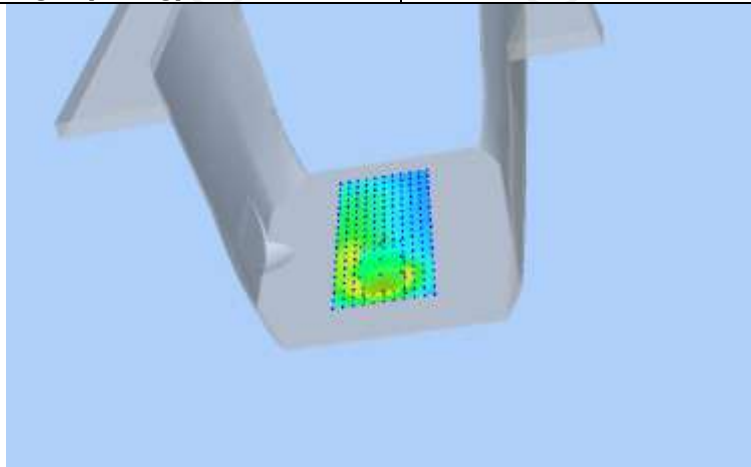



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.2977	0.8647	0.5112	0.3044	0.1872

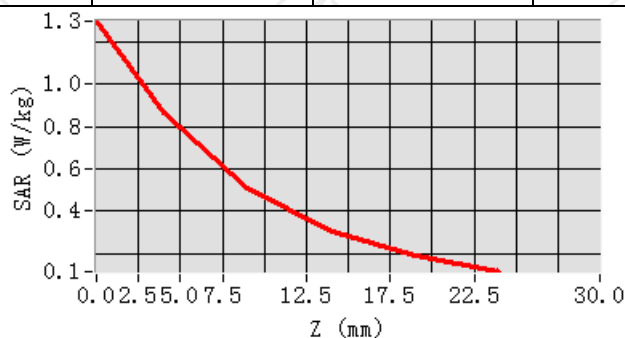

Hot spot position

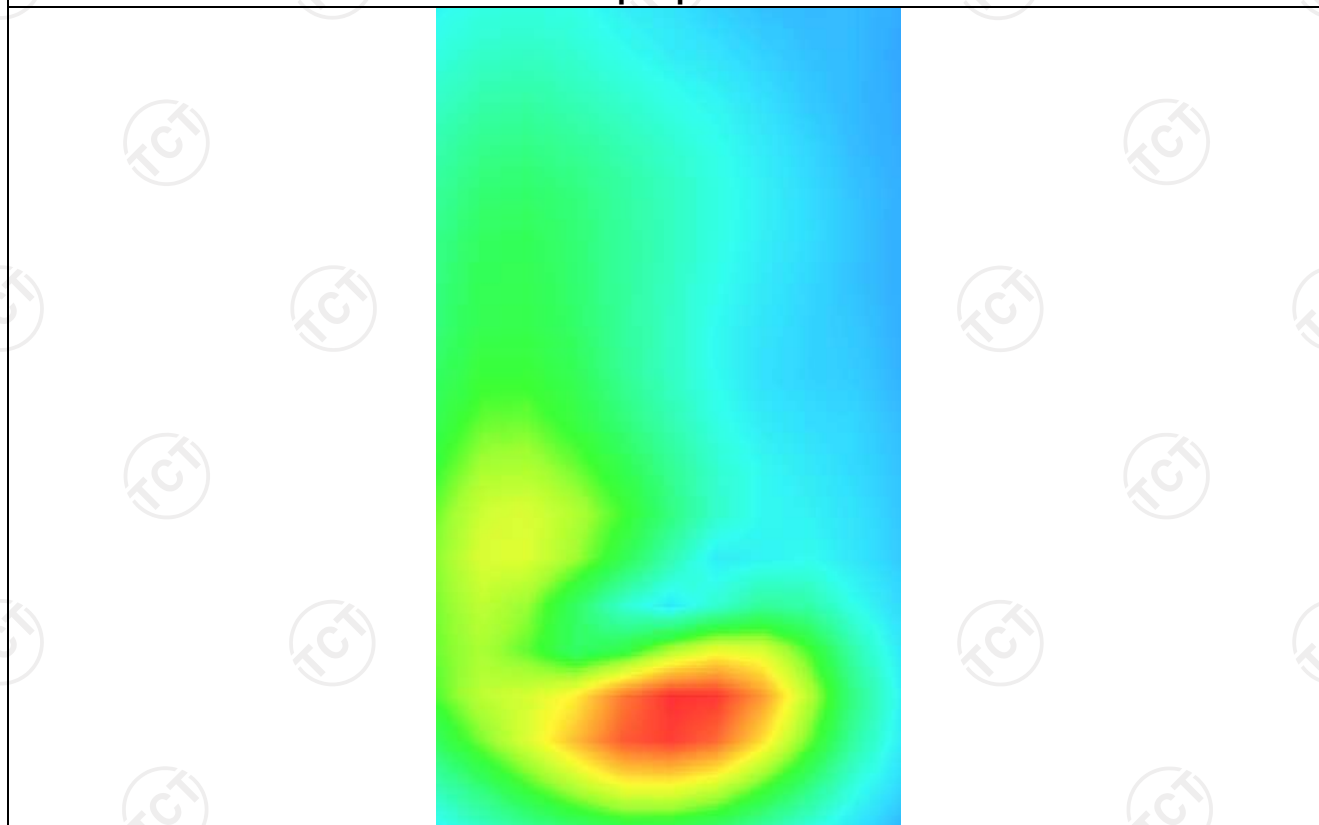


WCDMA Band V MEASUREMENT 1

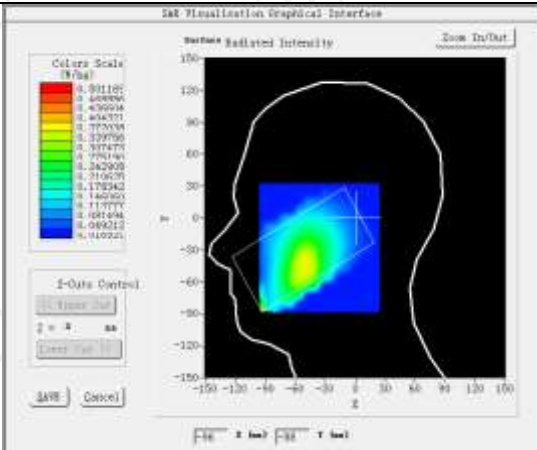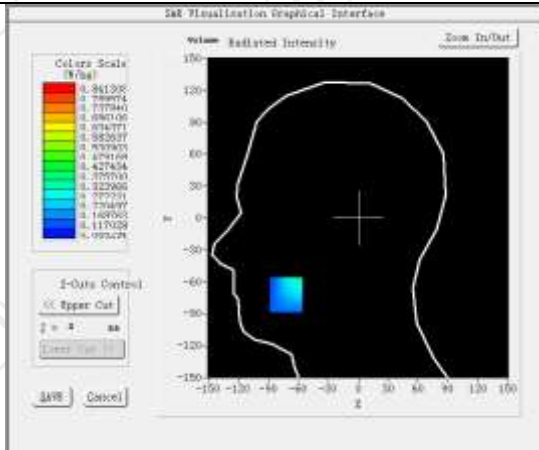
High Band SAR (Channel 4233):		Date: 11/14/2024
Frequency (MHz)	846.600000	
Relative permittivity (real part)	41.388650	
Relative permittivity (imaginary part)	18.011029	
Conductivity (S/m)	0.938384	
Variation (%)	1.020000	
Crest Factor:	1.0	
Probe Conversion factor	1.80	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>	
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>	
Phantom	<u>Left head</u>	
Device Position	<u>Cheek</u>	
Band	<u>BAND5 WCDMA850</u>	
SURFACE SAR		VOLUME SAR
		

Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.42 W/kg


SAR 10g (W/Kg)	0.232198
SAR 1g (W/Kg)	0.312057

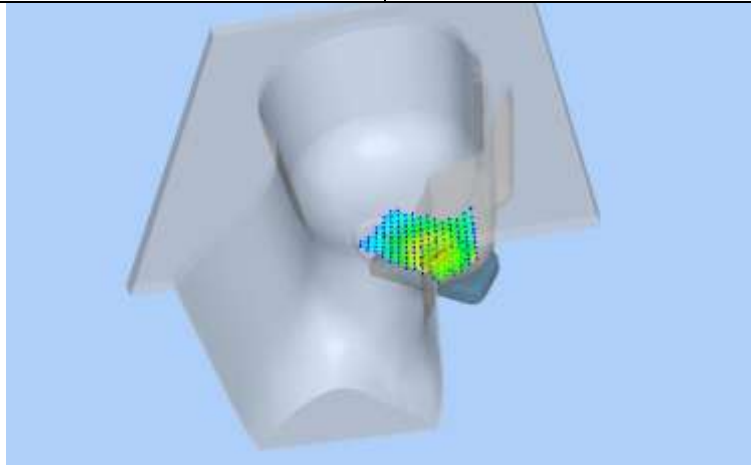

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.0115	0.3480	0.2692	0.2234	0.3315

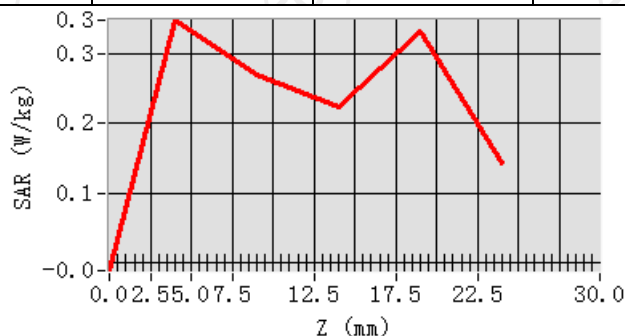

Hot spot position

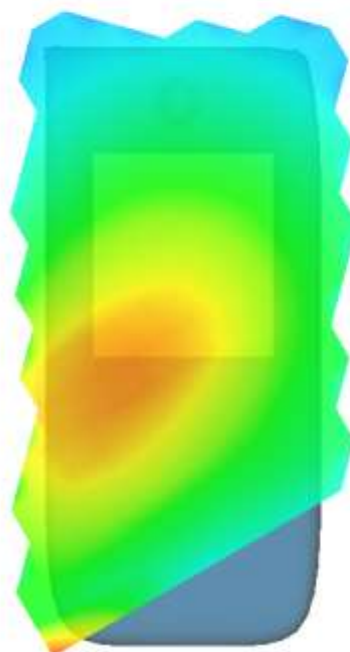



MEASUREMENT 2

High Band SAR (Channel 4233):

Date: 11/14/2024


Frequency (MHz)	846.600000
Relative permittivity (real part)	41.388650
Relative permittivity (imaginary part)	18.011029
Conductivity (S/m)	0.938384
Variation (%)	-3.420000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	BAND5 WCDMA850
SURFACE SAR	VOLUME SAR

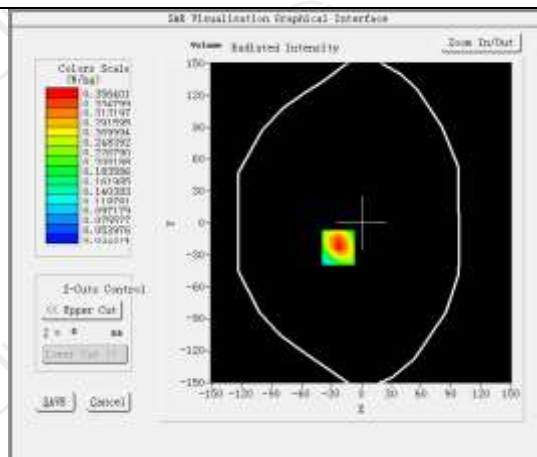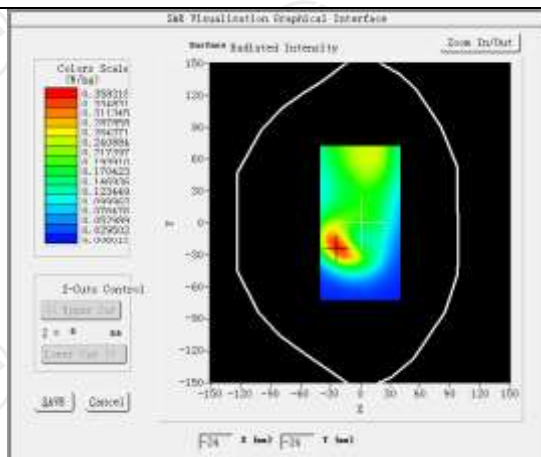


Maximum location: X=-23.00, Y=-23.00 SAR Peak: 0.54 W/kg


SAR 10g (W/Kg)	0.198699
SAR 1g (W/Kg)	0.337258

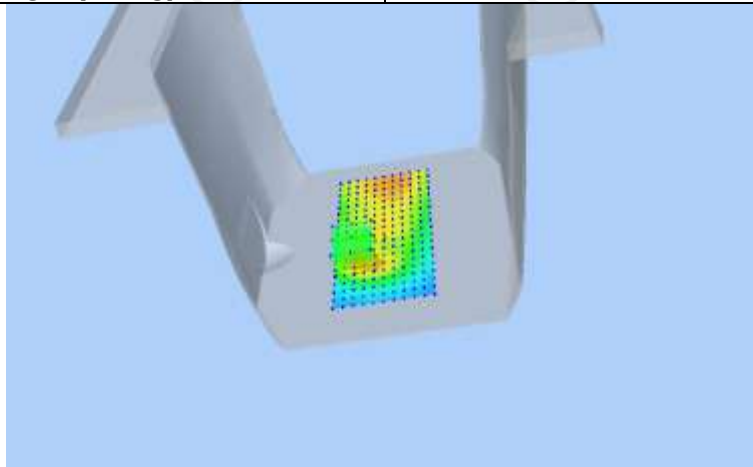

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5274	0.3564	0.2175	0.1373	0.0926

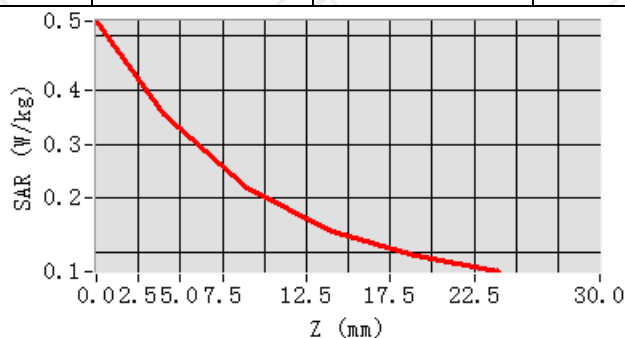

Hot spot position

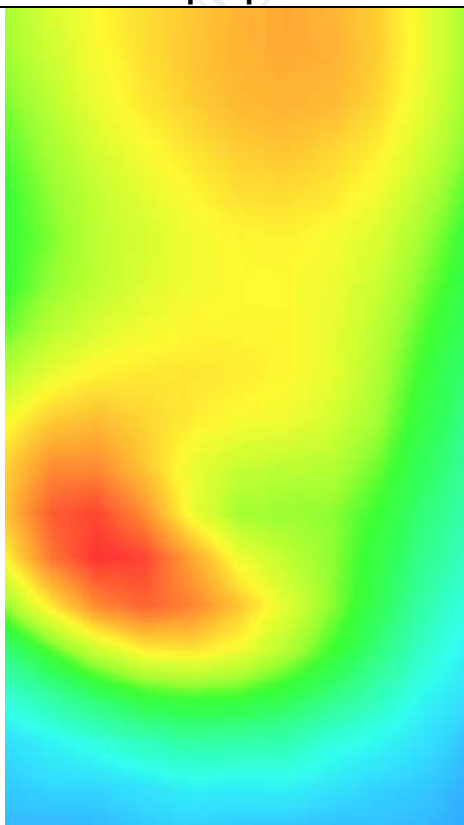



MEASUREMENT 3

High Band SAR (Channel 4233):

Date: 11/14/2024


Frequency (MHz)	846.600000
Relative permittivity (real part)	41.388650
Relative permittivity (imaginary part)	18.011029
Conductivity (S/m)	0.938384
Variation (%)	-3.290000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>BAND5 WCDMA850(hotspot)</u>
SURFACE SAR	VOLUME SAR

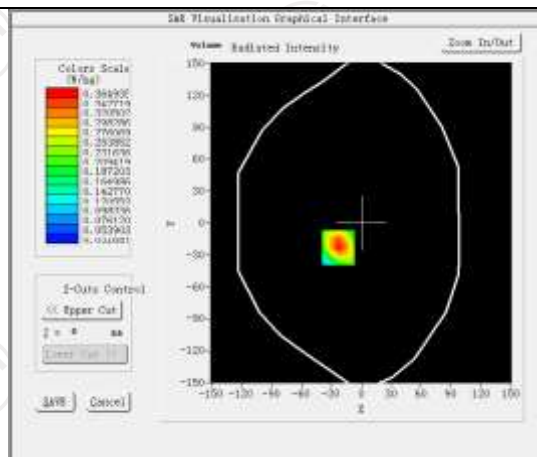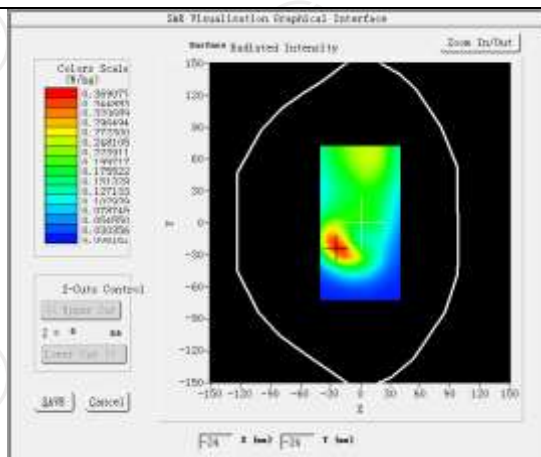


Maximum location: X=-23.00, Y=-23.00 SAR Peak: 0.55 W/kg


SAR 10g (W/Kg)	0.199600
SAR 1g (W/Kg)	0.344003

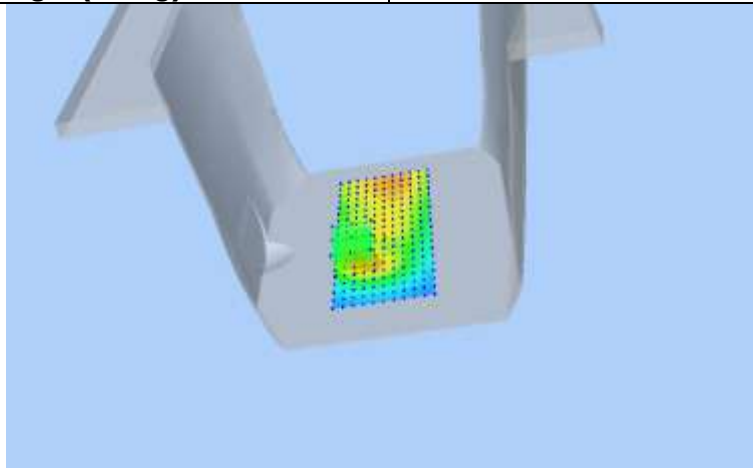

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5482	0.3649	0.2183	0.1354	0.0906


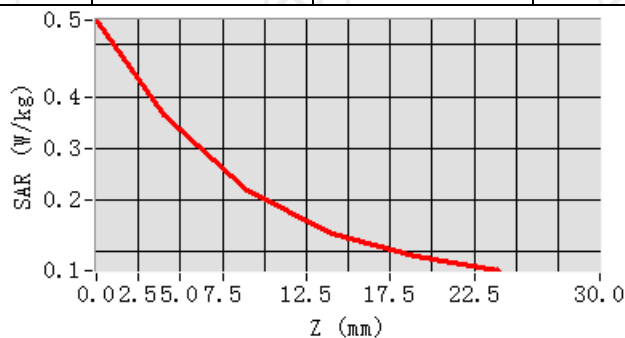


Hot spot position

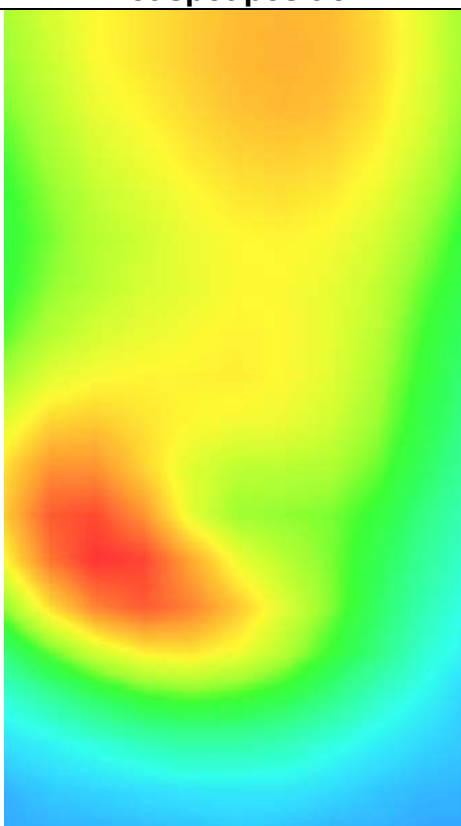

LTE Band 2

MEASUREMENT 1

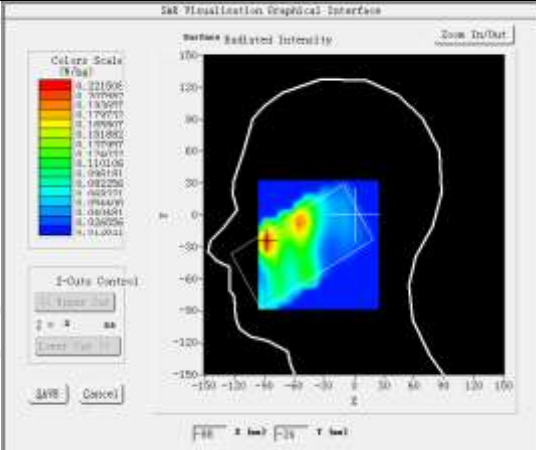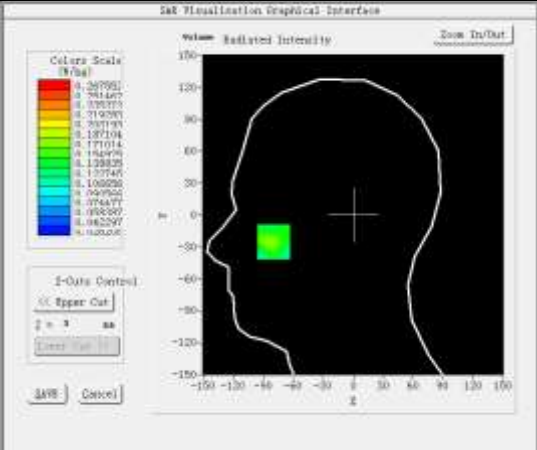Low Band SAR (Channel 18700):		Date: 11/22/2024
Frequency (MHz)	1860.000000	
Relative permittivity (real part)	39.548793	
Relative permittivity (imaginary part)	12.986837	
Conductivity (S/m)	1.390509	
Variation (%)	-4.490000	
Crest Factor	1.0	
Probe Conversion factor	2.23	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	LTE band 2 (1 RB#50)	
SURFACE SAR	VOLUME SAR	
		


Maximum location: X=-80.00, Y=-24.00 SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)


0.157577

SAR 1g (W/Kg)


0.192759

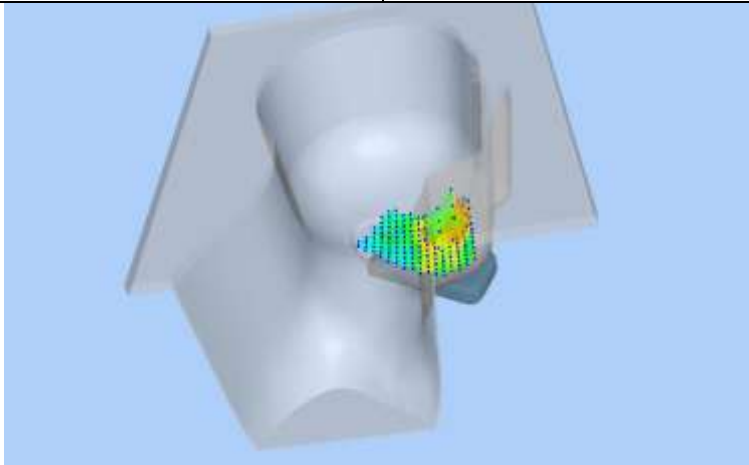

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1202	0.1773	0.1989	0.1664	0.0998

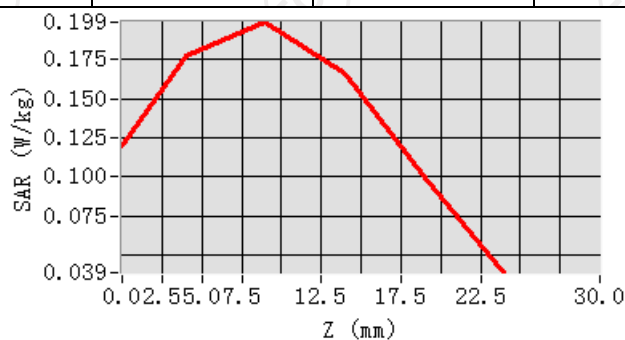

Hot spot position

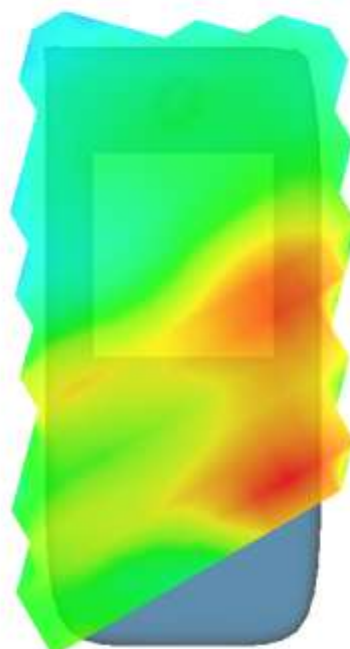



MEASUREMENT 2

Low Band SAR (Channel 18700):

Date: 11/22/2024


Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.548793
Relative permittivity (imaginary part)	12.986837
Conductivity (S/m)	1.390509
Variation (%)	-2.310000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 2 (1 RB#50)</u>
SURFACE SAR	VOLUME SAR

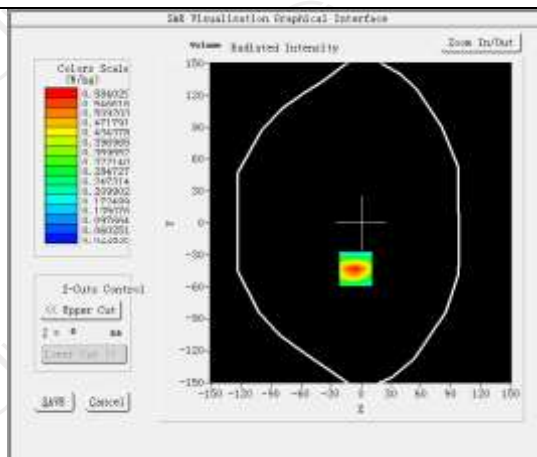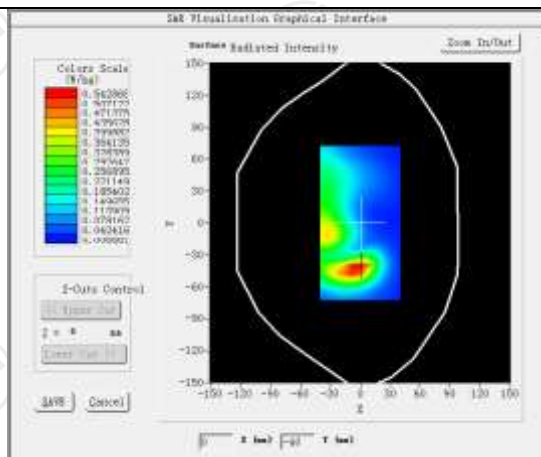


Maximum location: X=-5.00, Y=-43.00 SAR Peak: 0.90 W/kg


SAR 10g (W/Kg)	0.290069
SAR 1g (W/Kg)	0.541857

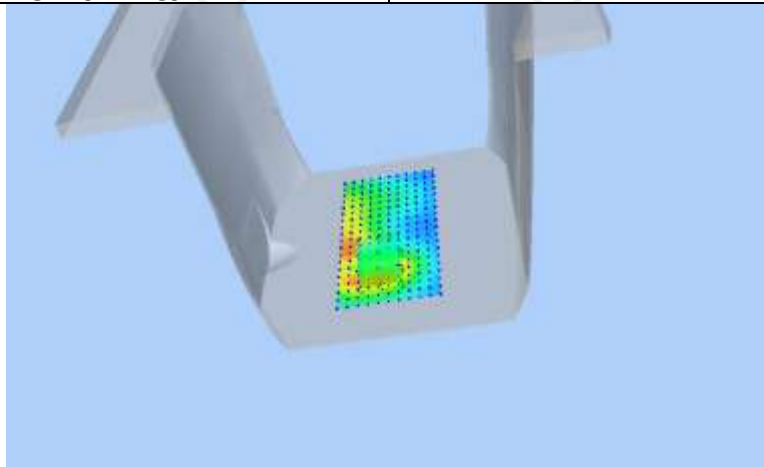

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8911	0.5840	0.3374	0.1965	0.1189

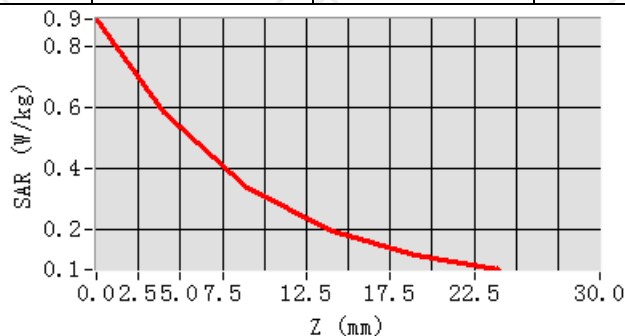

Hot spot position

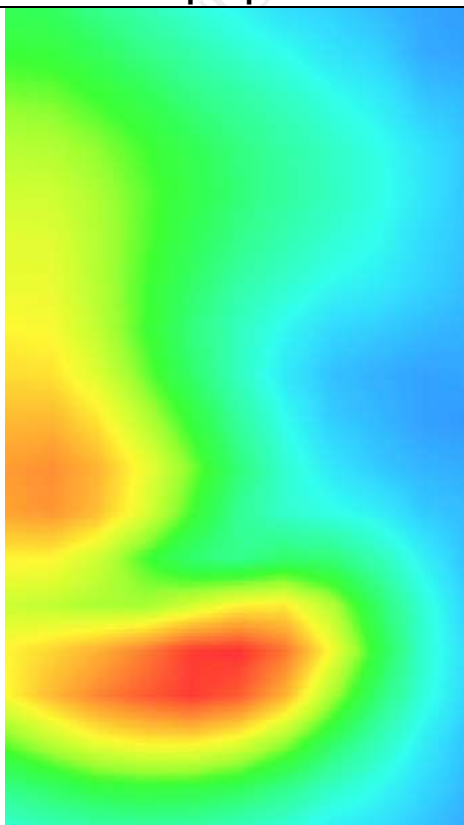



MEASUREMENT 3

Low Band SAR (Channel 18700):

Date: 11/22/2024


Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.548793
Relative permittivity (imaginary part)	12.986837
Conductivity (S/m)	1.390509
Variation (%)	-1.400000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 2 (1 RB#50)</u>
SURFACE SAR	VOLUME SAR

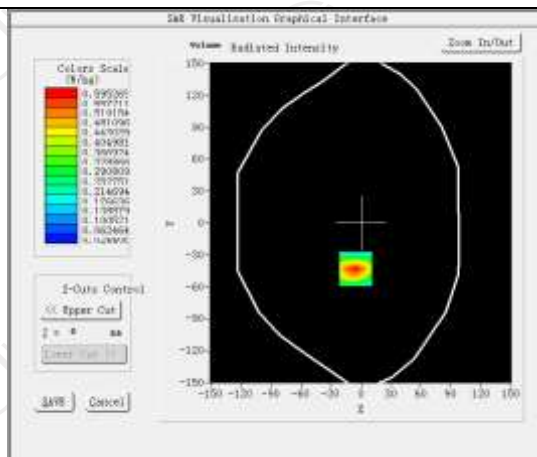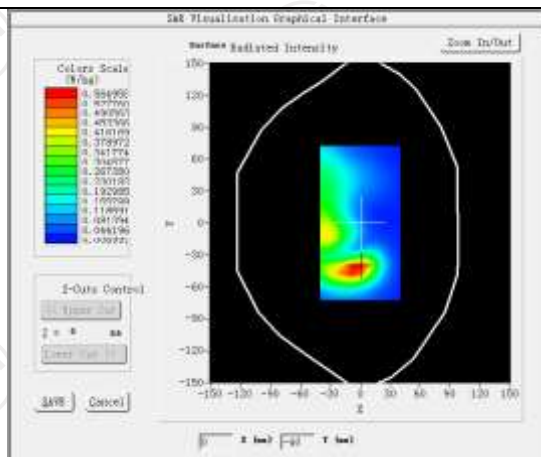


Maximum location: X=-5.00, Y=-43.00 SAR Peak: 0.92 W/kg


SAR 10g (W/Kg)	0.295884
SAR 1g (W/Kg)	0.552709

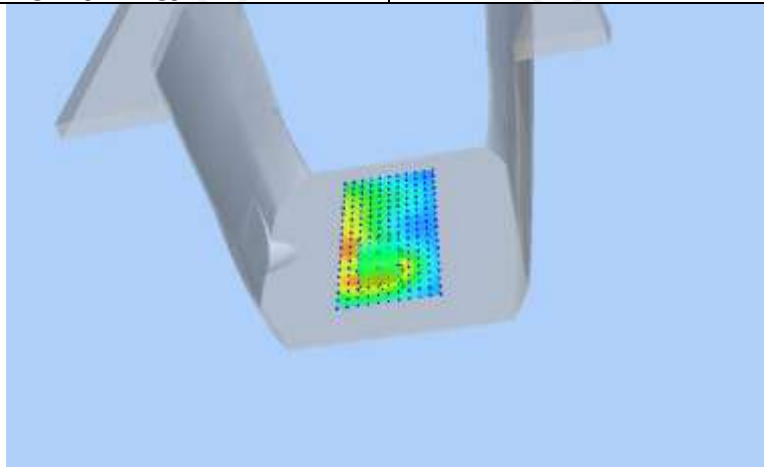

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9089	0.5953	0.3438	0.2005	0.1218

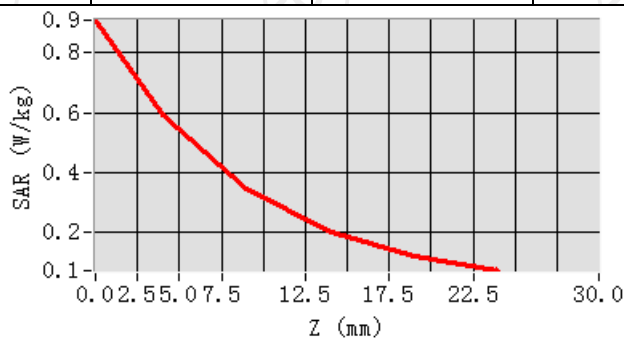

Hot spot position

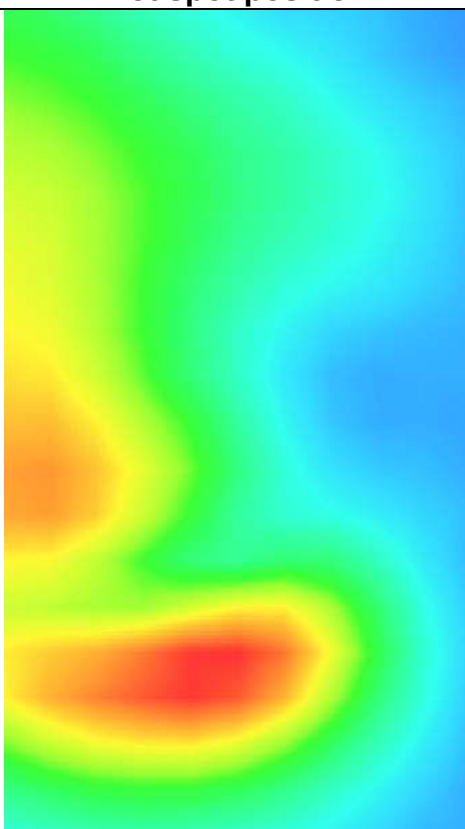



LTE Band 4

MEASUREMENT 1

High Band SAR (Channel 20300):

Date: 11/19/2024

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.758215
Relative permittivity (imaginary part)	13.905349
Conductivity (S/m)	1.347325
Variation (%)	-4.270000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 4(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

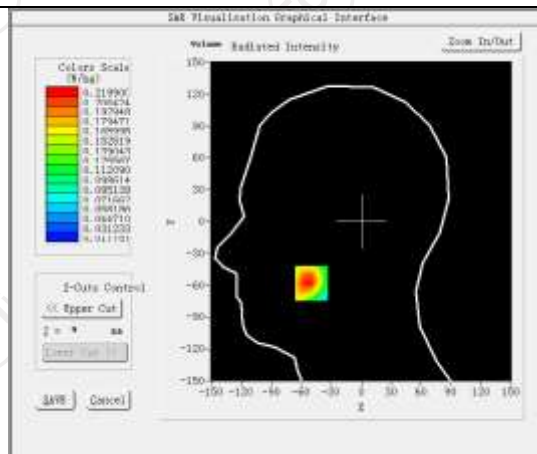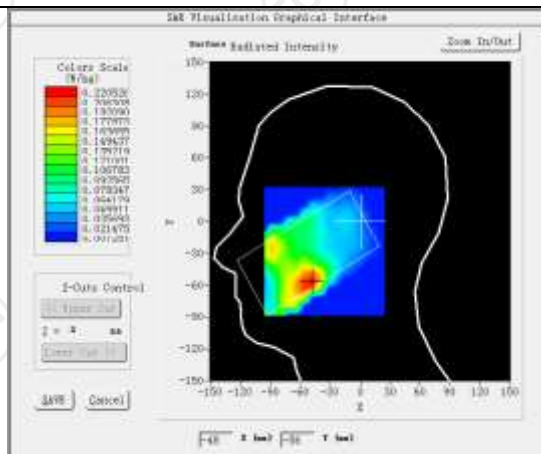


Maximum location: X=-50.00, Y=-58.00 SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)


0.156667

SAR 1g (W/Kg)


0.213162

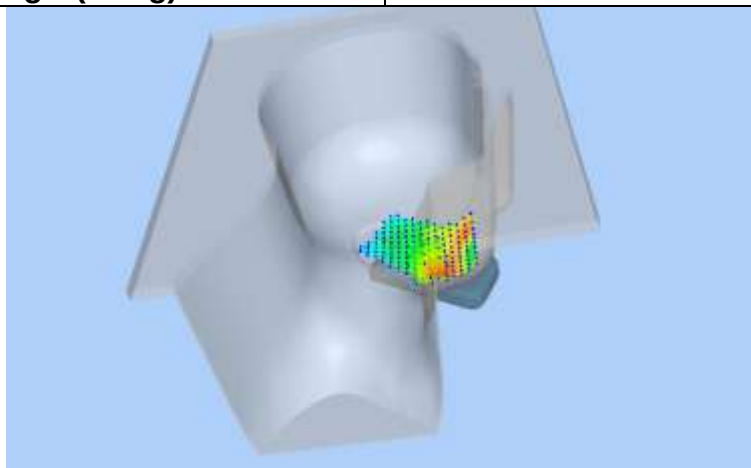

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2364	0.2199	0.1913	0.1559	0.1176

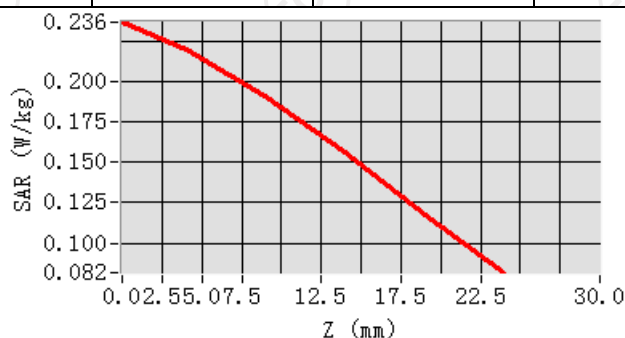

Hot spot position

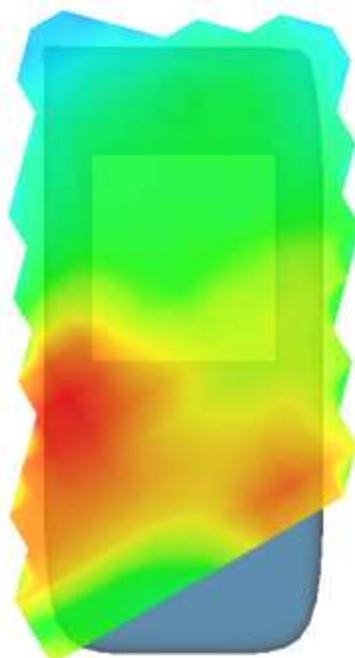



MEASUREMENT 2

High Band SAR (Channel 20300):

Date: 11/19/2024


Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.758215
Relative permittivity (imaginary part)	13.905349
Conductivity (S/m)	1.347325
Variation (%)	0.890000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 4(1 RB#50)
SURFACE SAR	VOLUME SAR

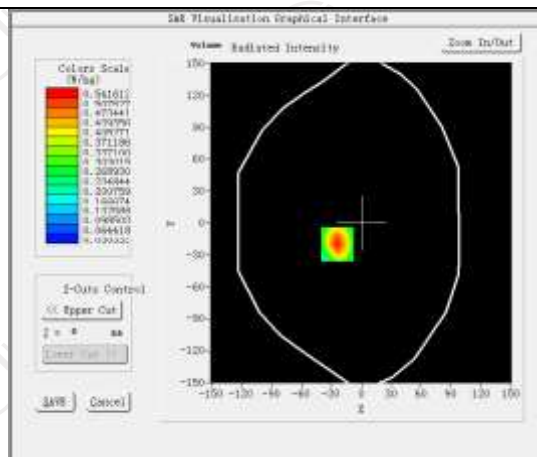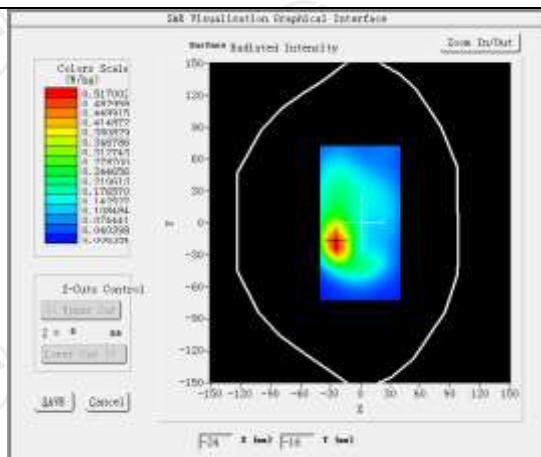


Maximum location: X=-24.00, Y=-20.00 SAR Peak: 0.80 W/kg


SAR 10g (W/Kg)	0.286921
SAR 1g (W/Kg)	0.506009

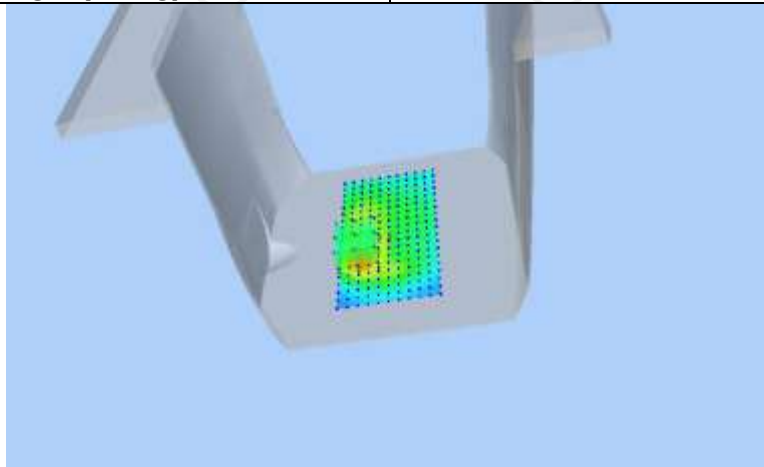

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8030	0.5416	0.3252	0.1959	0.1208

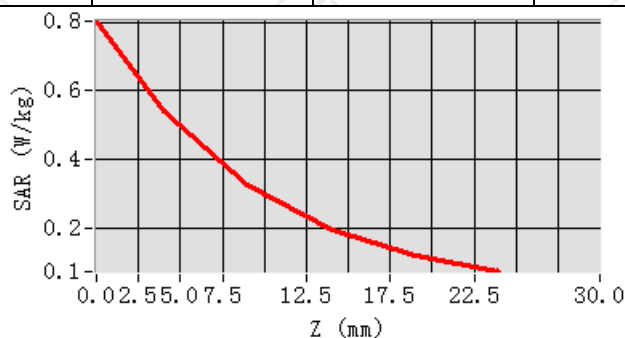

Hot spot position


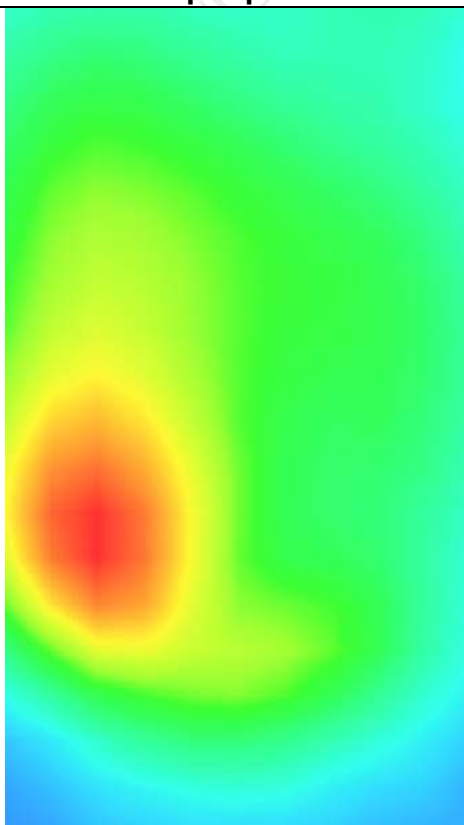


MEASUREMENT 3

High Band SAR (Channel 20300):

Date: 11/19/2024

Frequency (MHz)	1745.000000
Relative permittivity (real part)	39.758215
Relative permittivity (imaginary part)	13.905349
Conductivity (S/m)	1.347325
Variation (%)	-2.780000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 4(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

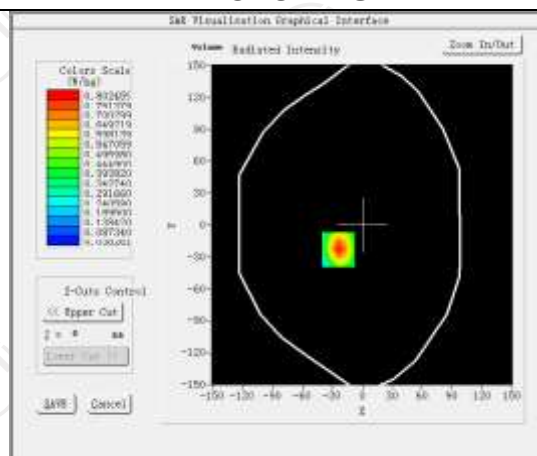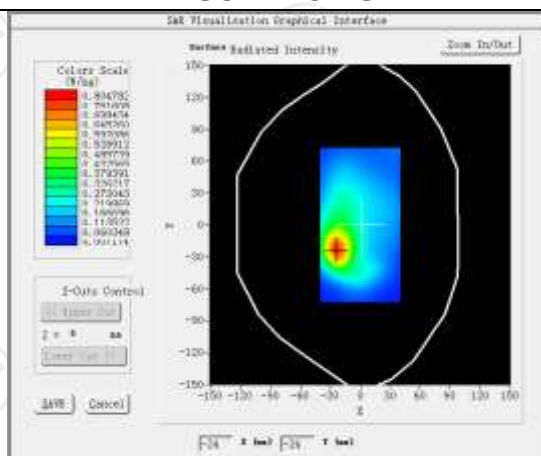


Maximum location: X=-24.00, Y=-23.00 SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)


0.419520

SAR 1g (W/Kg)


0.748781

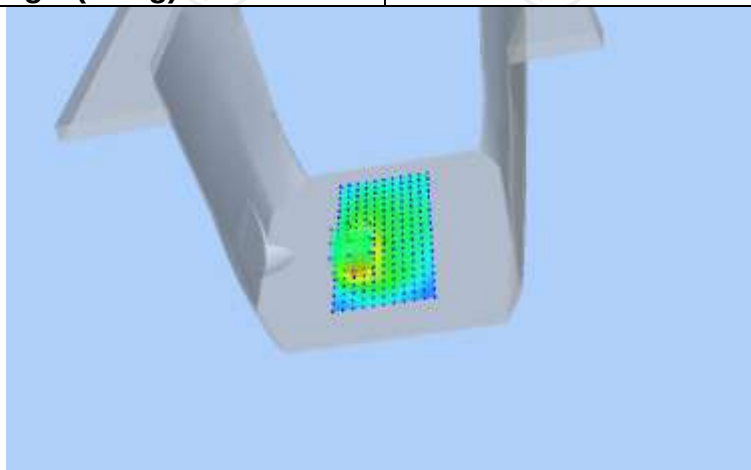


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1935	0.8025	0.4790	0.2860	0.1741

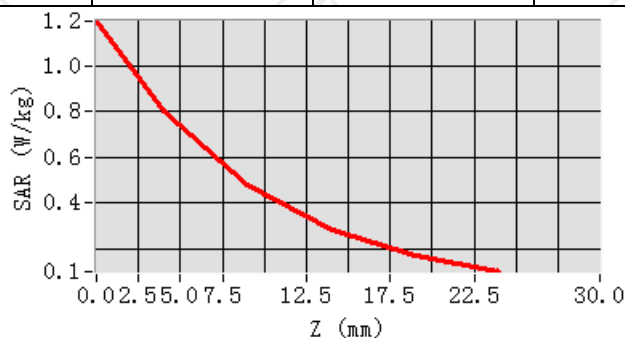


Hot spot position

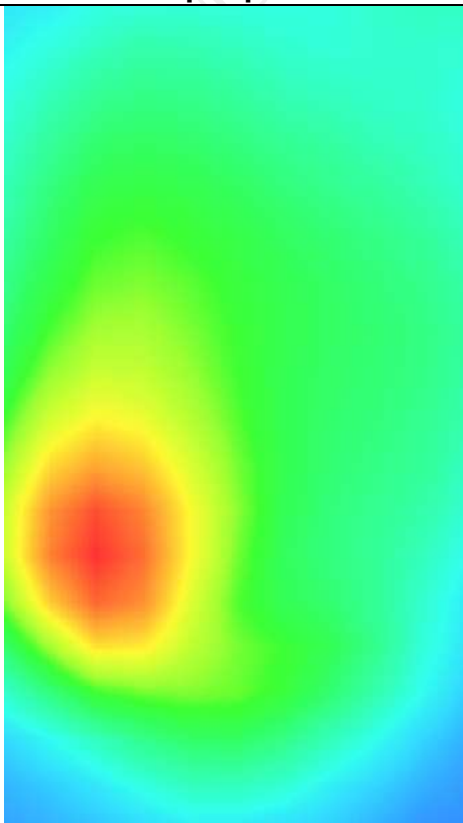

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7660	0.3929	0.2317	0.2490	0.2745

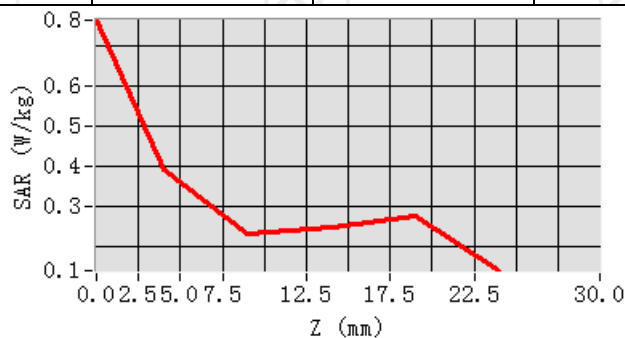

Hot spot position

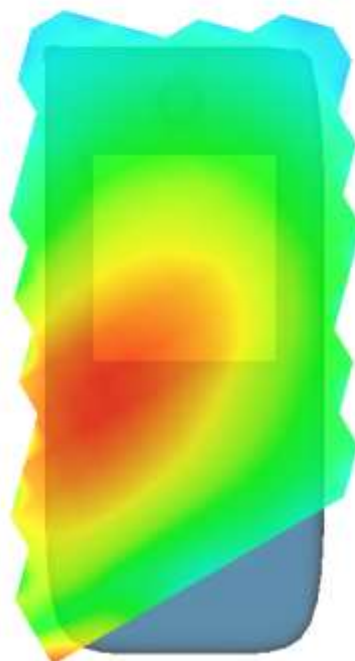



MEASUREMENT 2

Low Band SAR (Channel 20450):

Date: 11/14/2024


Frequency (MHz)	829.000000
Relative permittivity (real part)	41.429163
Relative permittivity (imaginary part)	17.988030
Conductivity (S/m)	0.931025
Variation (%)	-3.550000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 5(1 RB#25)
SURFACE SAR	VOLUME SAR

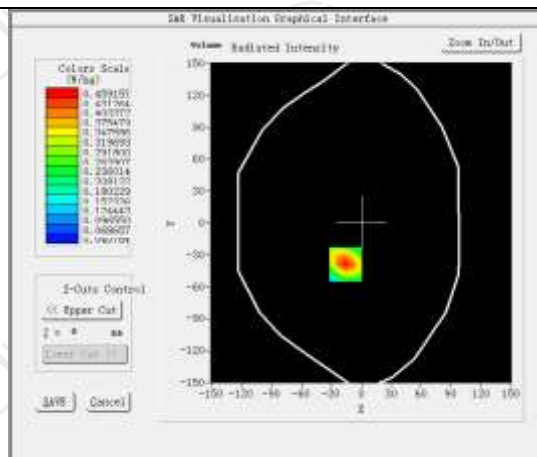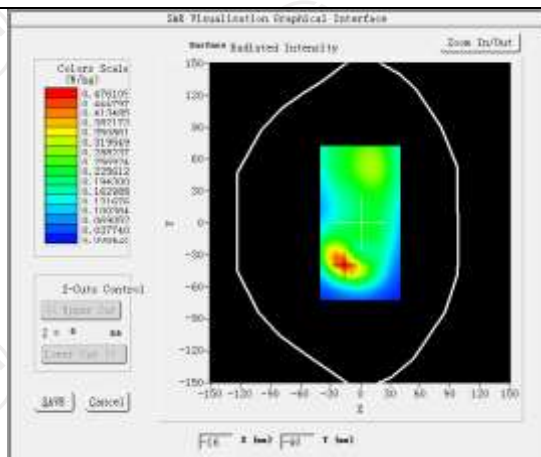


Maximum location: X=-16.00, Y=-39.00 SAR Peak: 0.70 W/kg


SAR 10g (W/Kg)	0.245153
SAR 1g (W/Kg)	0.430316

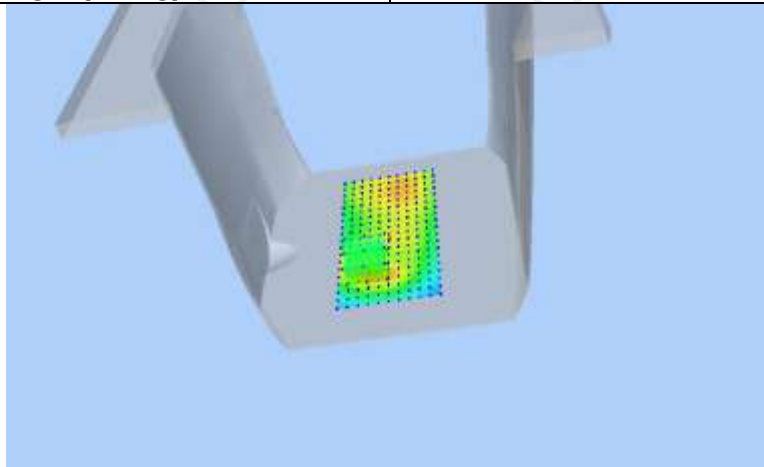

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6939	0.4592	0.2705	0.1628	0.1037

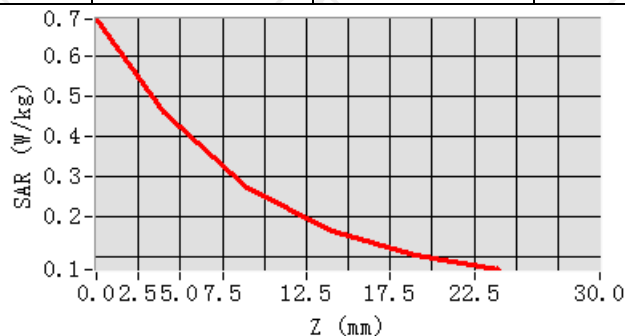

Hot spot position

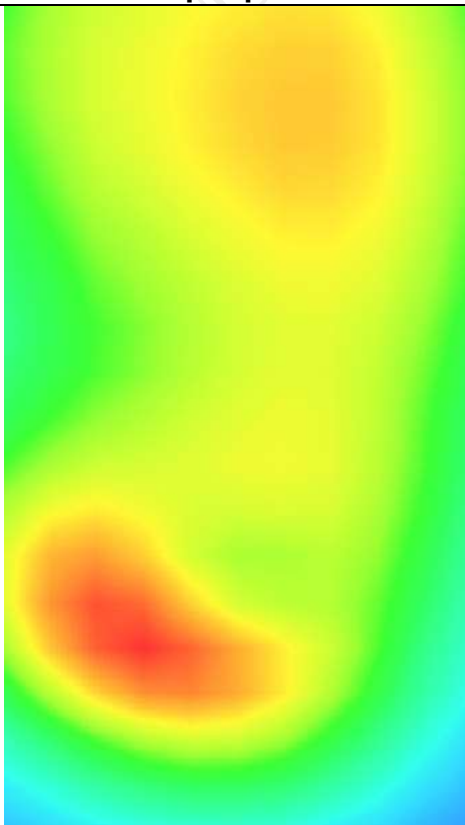



MEASUREMENT 3

Low Band SAR (Channel 20450):

Date: 11/14/2024


Frequency (MHz)	829.000000
Relative permittivity (real part)	41.429163
Relative permittivity (imaginary part)	17.988030
Conductivity (S/m)	0.931025
Variation (%)	-2.150000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back((hotspot 10mm)</u>
Band	<u>LTE band 5(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

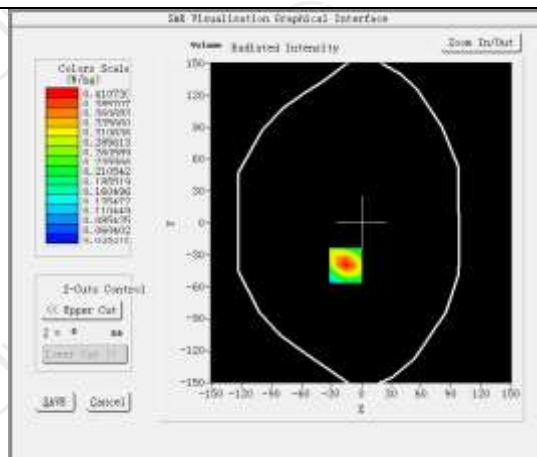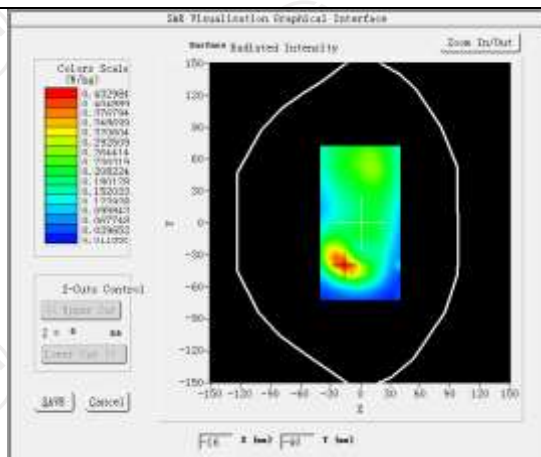


Maximum location: X=-16.00, Y=-40.00 SAR Peak: 0.57 W/kg


SAR 10g (W/Kg)	0.226558
SAR 1g (W/Kg)	0.384329

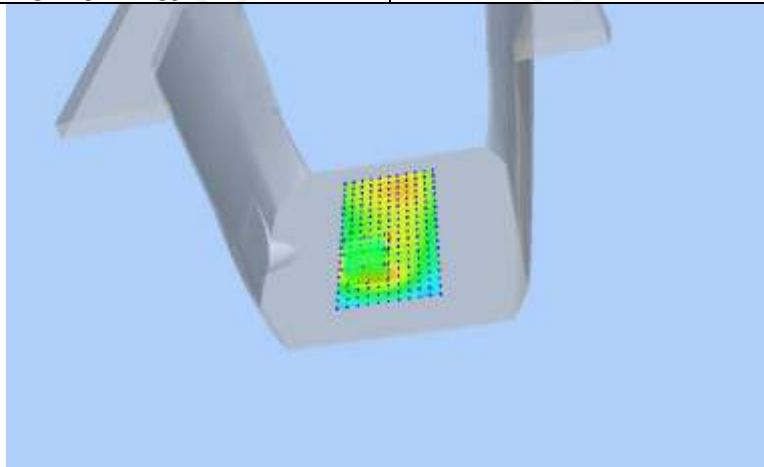

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5681	0.4107	0.2687	0.1731	0.1096

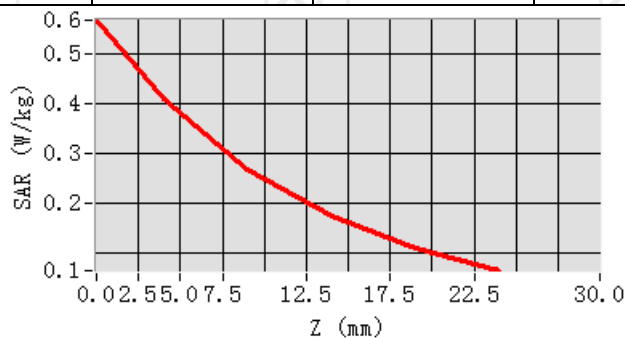

Hot spot position

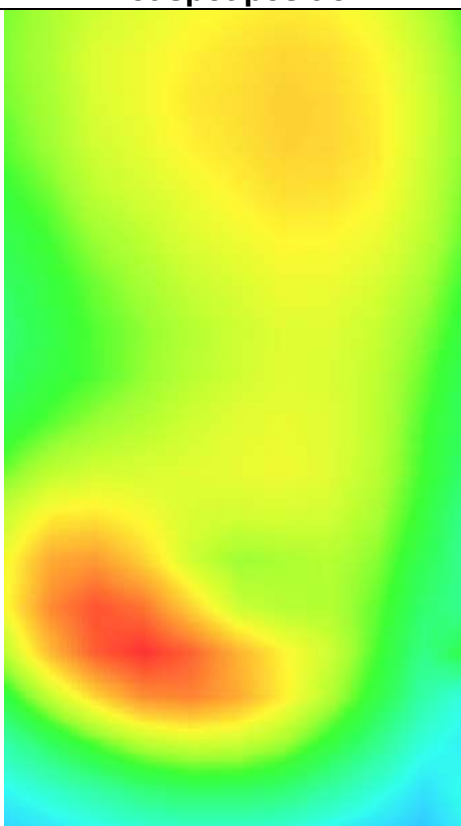



LTE Band 12

MEASUREMENT 1

Low Band SAR (Channel 23060):

Date: 11/11/2024

Frequency (MHz)	704.000000
Relative permittivity (real part)	41.834601
Relative permittivity (imaginary) part	16.404461
Conductivity (S/m)	0.887712
Variation (%)	-4.960000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 12(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

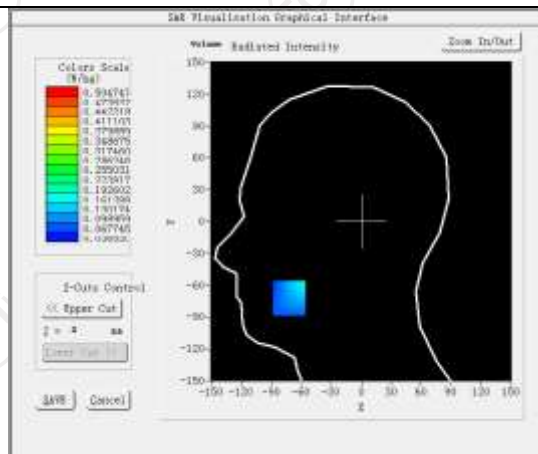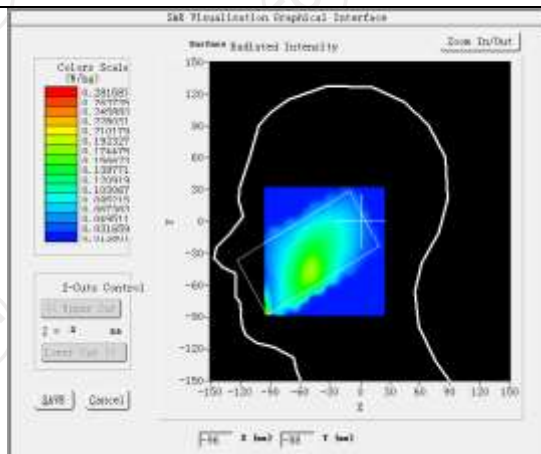


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)


0.123824

SAR 1g (W/Kg)


0.152903

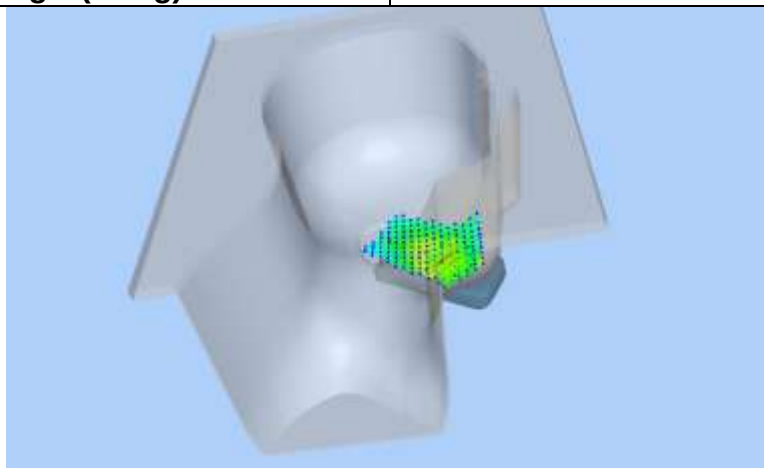

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.2874	0.1728	0.1615	0.1141	0.1994

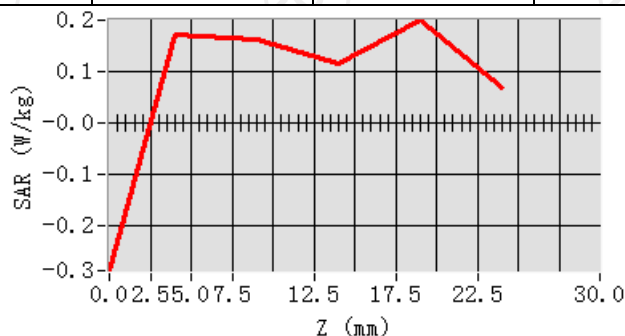

Hot spot position

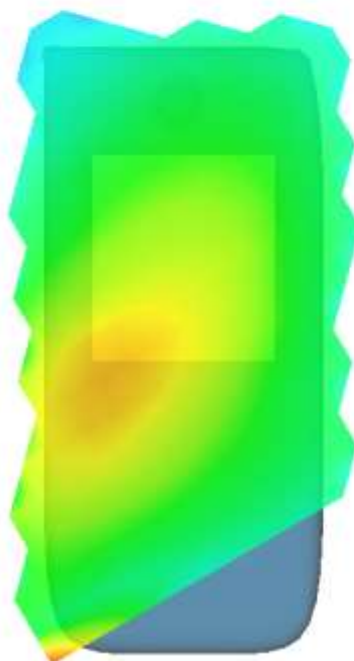



MEASUREMENT 2

Low Band SAR (Channel 23060):

Date: 11/11/2024


Frequency (MHz)	704.000000
Relative permittivity (real part)	41.834601
Relative permittivity (imaginary part)	16.404461
Conductivity (S/m)	0.887712
Variation (%)	-4.880000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 12(1 RB#25)
SURFACE SAR	VOLUME SAR

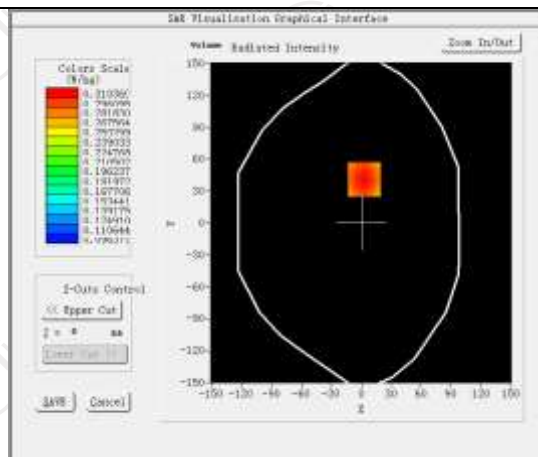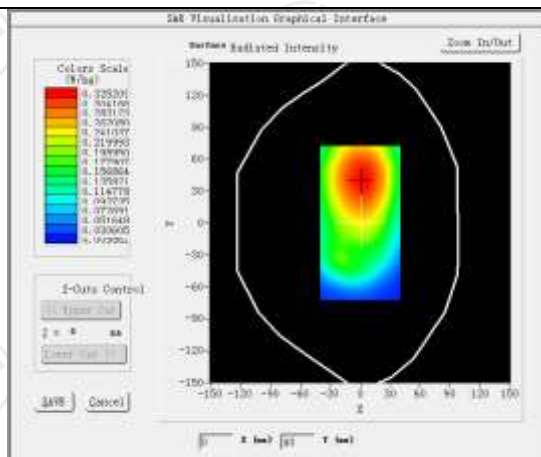


Maximum location: X=3.00, Y=41.00 SAR Peak: 0.39 W/kg


SAR 10g (W/Kg)	0.228106
SAR 1g (W/Kg)	0.306708

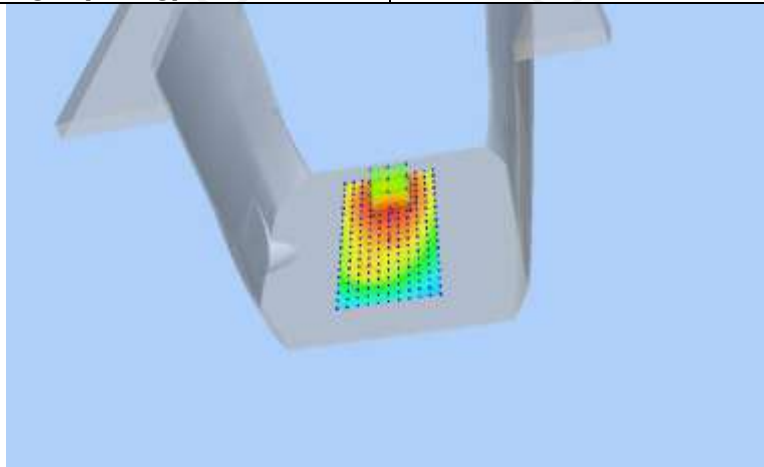

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3928	0.3104	0.2342	0.1821	0.1469

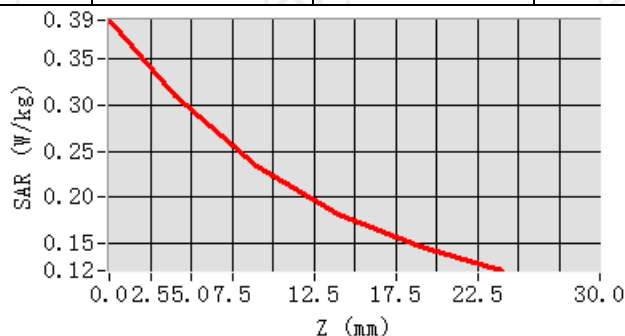

Hot spot position

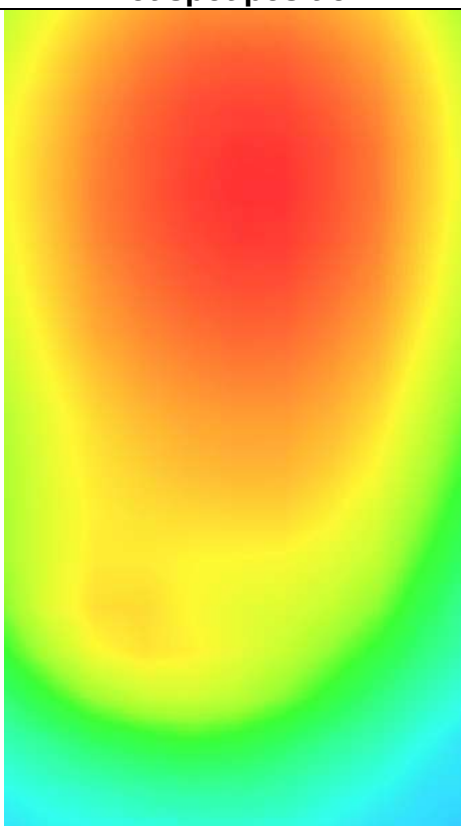



MEASUREMENT 3

Low Band SAR (Channel 23060):

Date: 11/11/2024


Frequency (MHz)	704.000000
Relative permittivity (real part)	41.834601
Relative permittivity (imaginary part)	16.404461
Conductivity (S/m)	0.887712
Variation (%)	-1.130000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 12(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

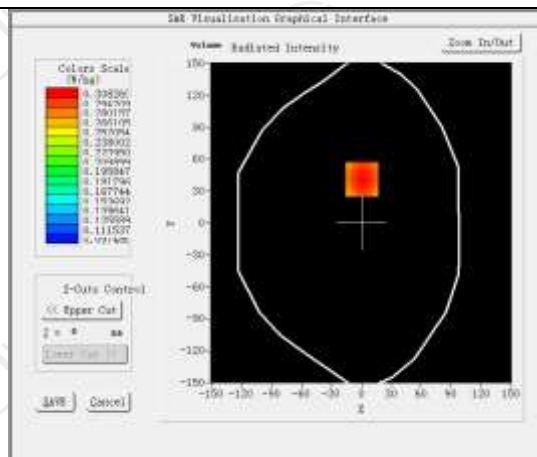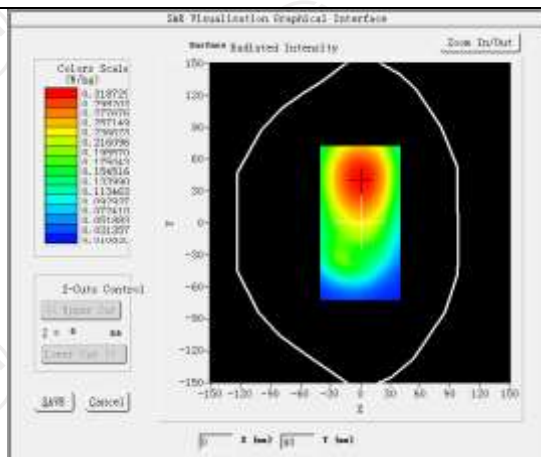


Maximum location: X=1.00, Y=41.00 SAR Peak: 0.39 W/kg


SAR 10g (W/Kg)	0.226025
SAR 1g (W/Kg)	0.304595

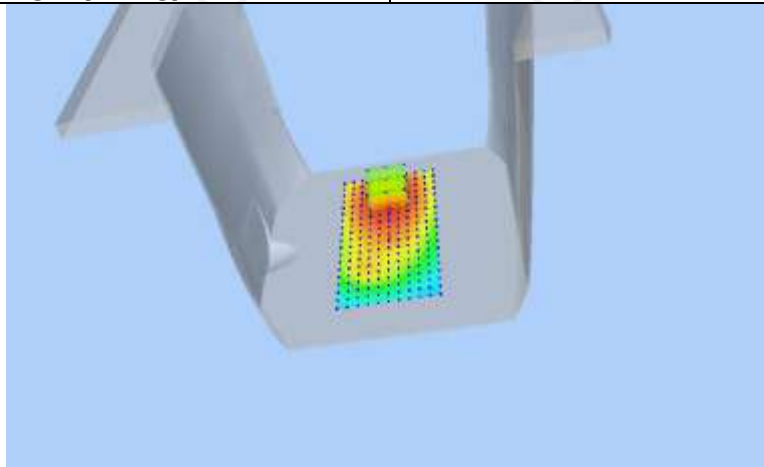

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3941	0.3083	0.2304	0.1786	0.1449

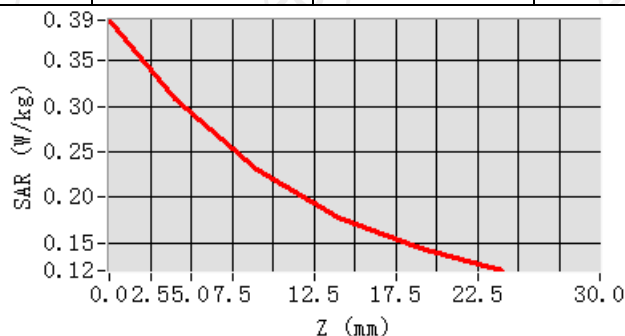

Hot spot position

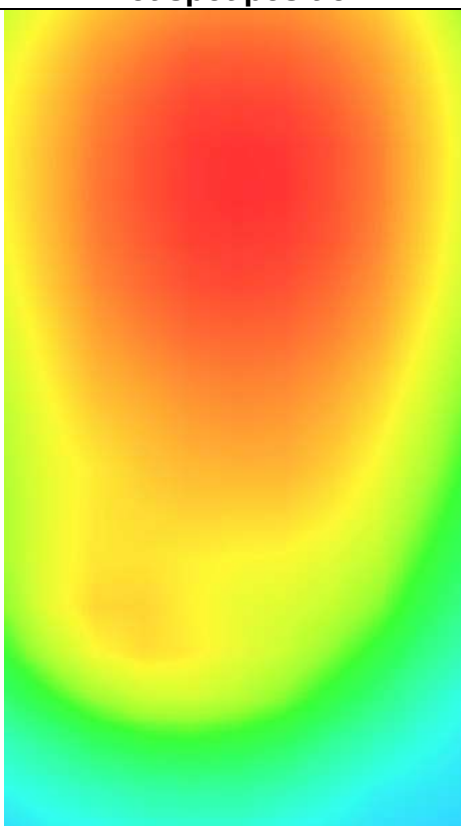



LTE Band 13

MEASUREMENT 1

Middle Band SAR (Channel 23230):

Date: 11/11/2024

Frequency (MHz)	782.000000
Relative permittivity (real part)	41.581608
Relative permittivity (imaginary part)	17.392608
Conductivity (S/m)	0.914739
Variation (%)	-2.030000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 13(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

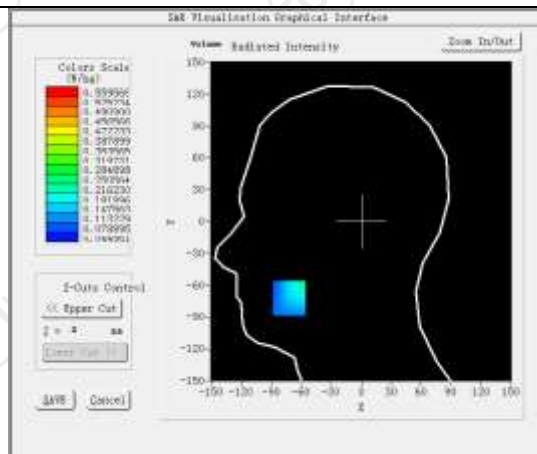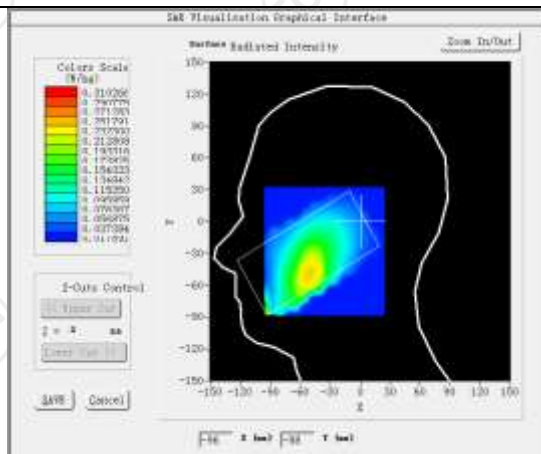


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)


0.159076

SAR 1g (W/Kg)


0.215609

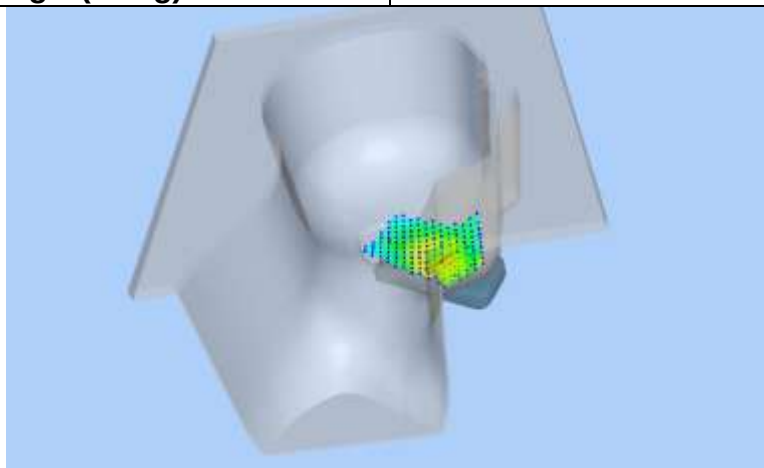

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2656	0.2427	0.1645	0.1542	0.1902

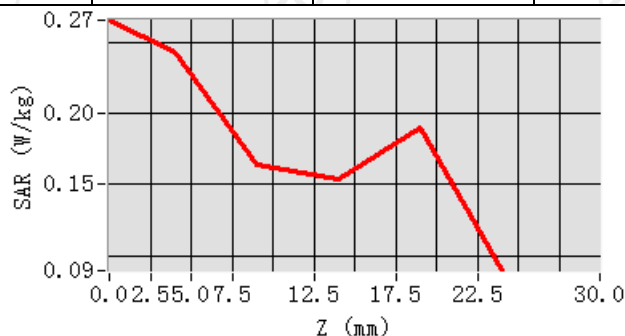

Hot spot position


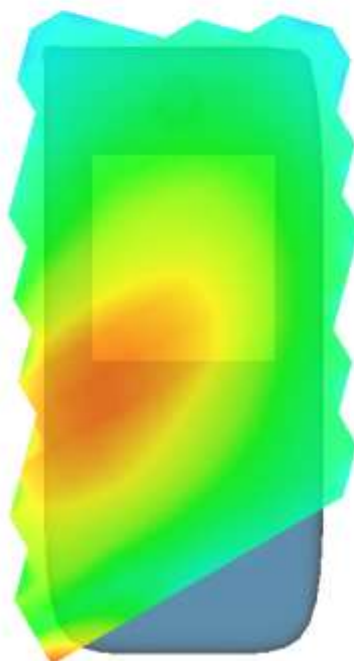


MEASUREMENT 2

Middle Band SAR (Channel 23230):

Date: 11/11/2024

Frequency (MHz)	782.000000
Relative permittivity (real part)	41.581608
Relative permittivity (imaginary part)	17.392608
Conductivity (S/m)	0.914739
Variation (%)	-4.780000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 13(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

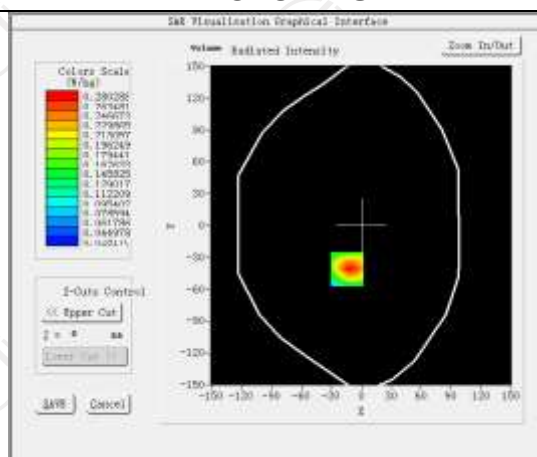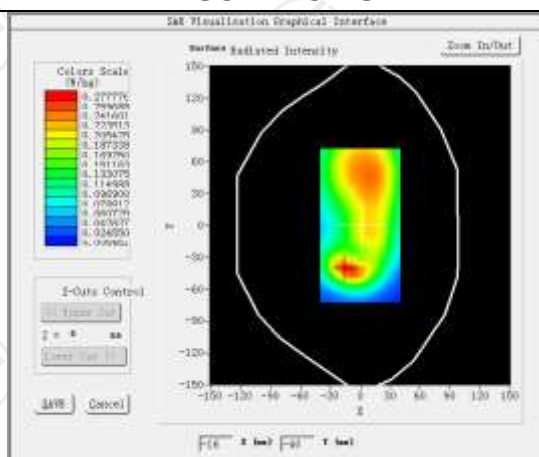


Maximum location: X=-11.00, Y=-44.00 SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)


0.153610

SAR 1g (W/Kg)


0.265539

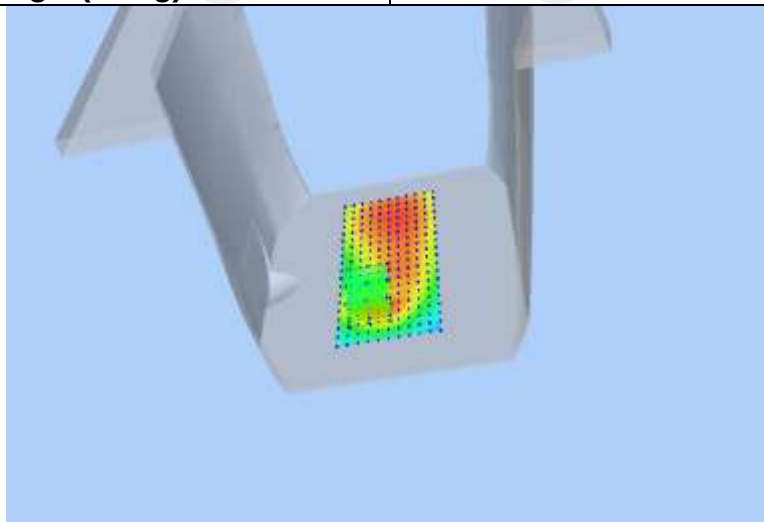

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4309	0.2803	0.1623	0.0976	0.0640

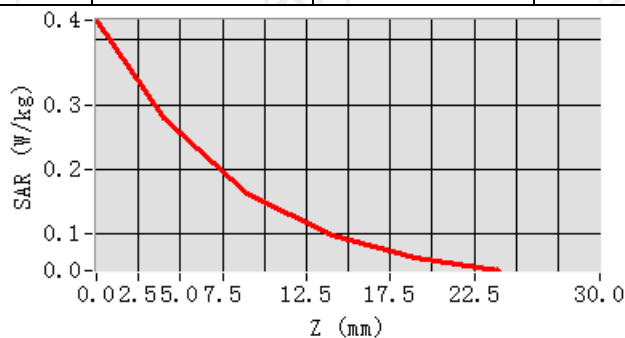

Hot spot position


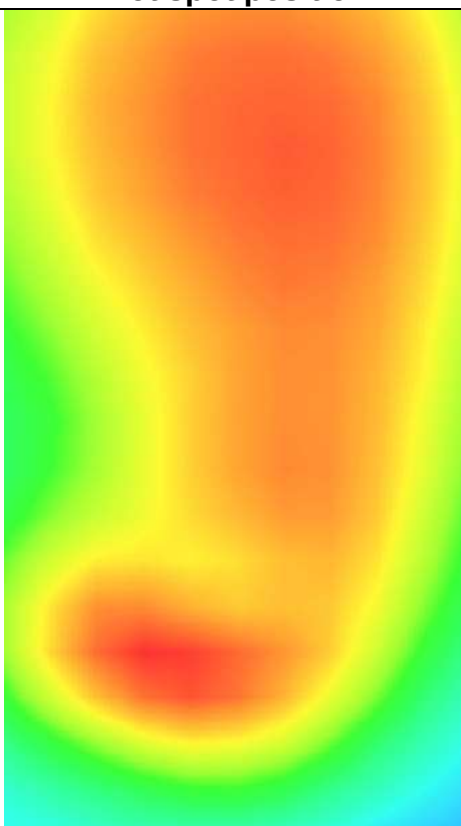


MEASUREMENT 3

Middle Band SAR (Channel 23230):

Date: 11/11/2024

Frequency (MHz)	782.000000
Relative permittivity (real part)	41.581608
Relative permittivity (imaginary part)	17.392608
Conductivity (S/m)	0.914739
Variation (%)	-3.260000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 13(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

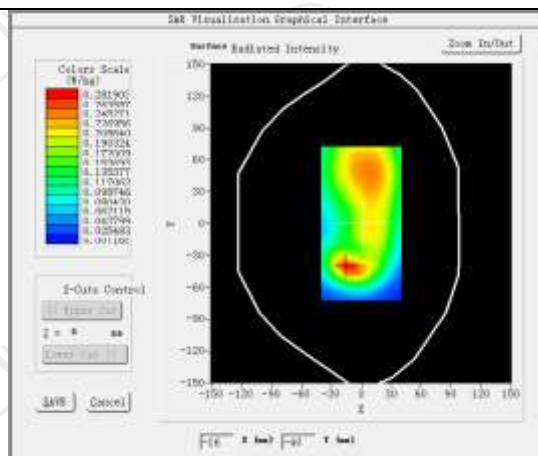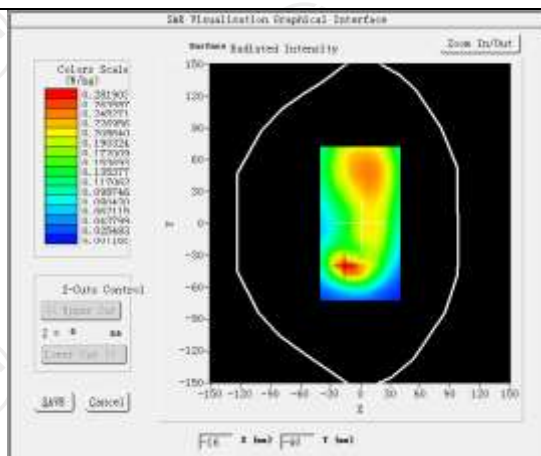


Maximum location: X=-11.00, Y=-41.00 SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)


0.153111

SAR 1g (W/Kg)


0.263272

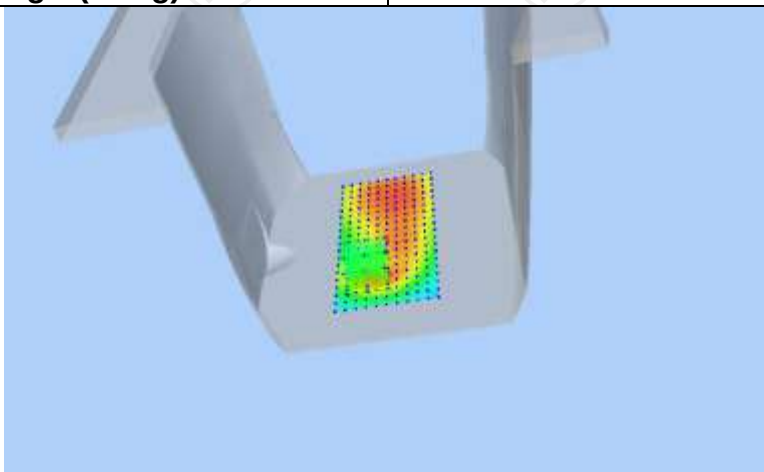

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4206	0.2775	0.1635	0.0994	0.0649


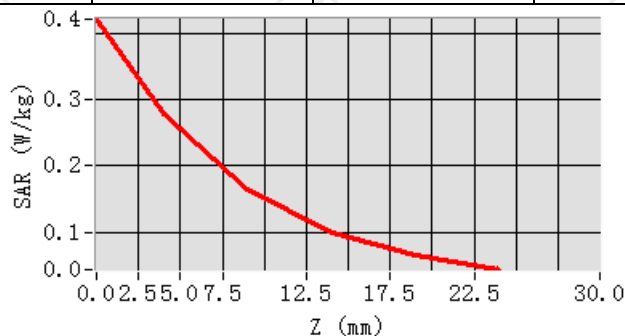



Hot spot position

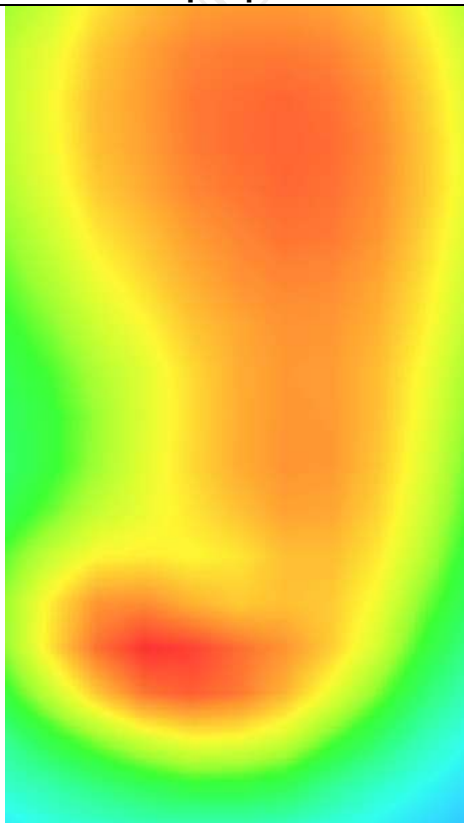


LTE Band 17

MEASUREMENT 1

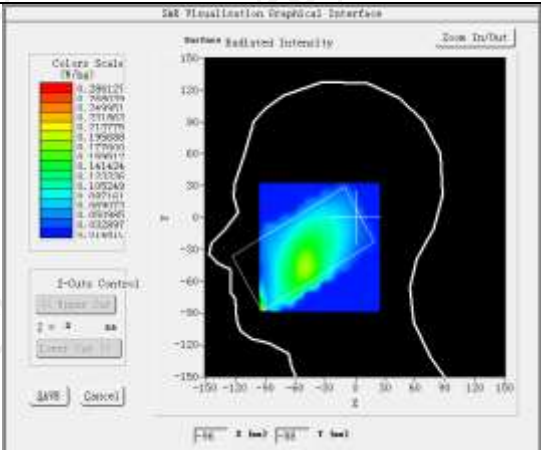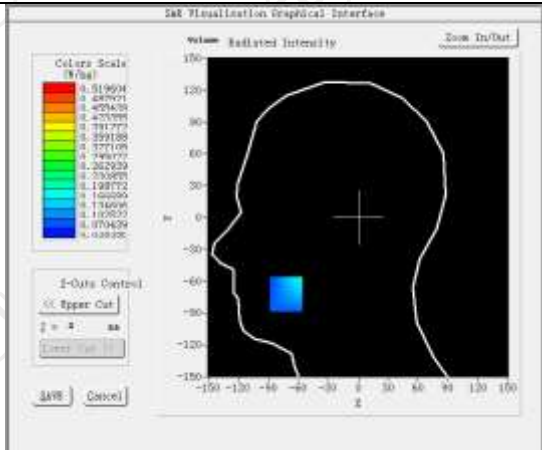
Low Band SAR (Channel 23780):		Date: 11/11/2024
Frequency (MHz)	709.000000	
Relative permittivity (real part)	41.818384	
Relative permittivity (imaginary part)	16.467803	
Conductivity (S/m)	0.889444	
Variation (%)	-2.260000	
Crest Factor	1.0	
Probe Conversion factor	1.71	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	LTE band 17(1 RB#25)	
SURFACE SAR	VOLUME SAR	
 		
Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.21 W/kg		
SAR 10g (W/Kg)	0.129304	
SAR 1g (W/Kg)	0.157753	

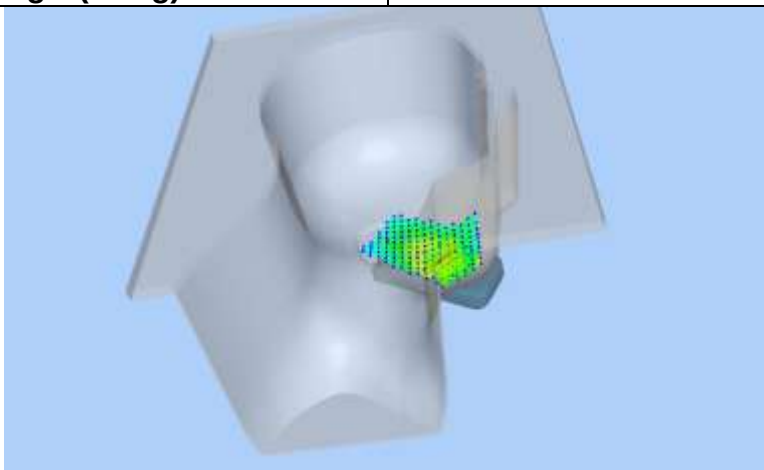

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.3278	0.1772	0.1701	0.1195	0.2123

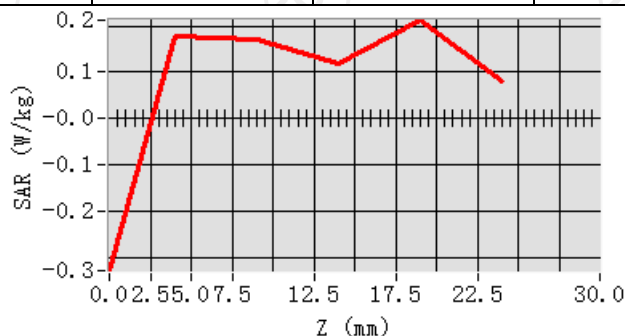

Hot spot position

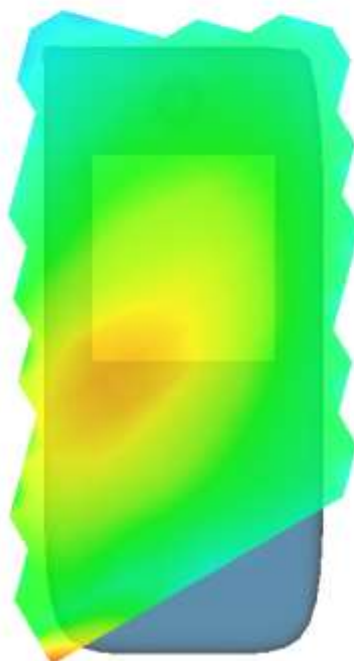



MEASUREMENT 2

Low Band SAR (Channel 23780):

Date: 11/11/2024


Frequency (MHz)	709.000000
Relative permittivity (real part)	41.818384
Relative permittivity (imaginary part)	16.467803
Conductivity (S/m)	0.889444
Variation (%)	-3.200000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 17(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

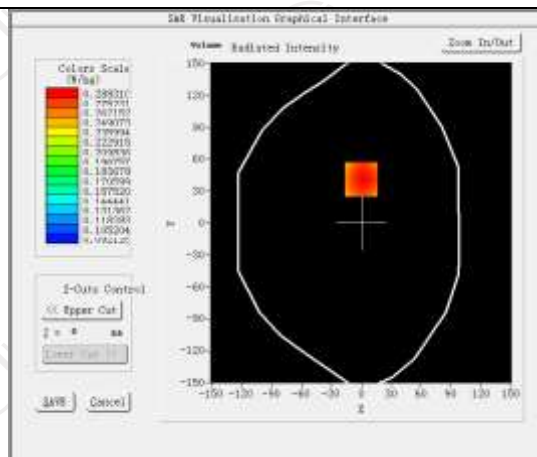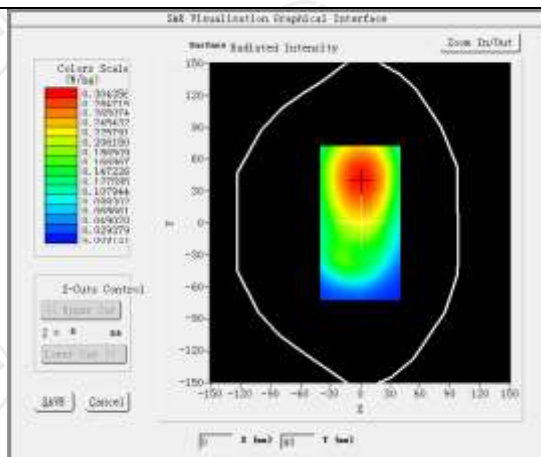


Maximum location: X=0.00, Y=41.00 SAR Peak: 0.37 W/kg


SAR 10g (W/Kg)	0.212663
SAR 1g (W/Kg)	0.285229

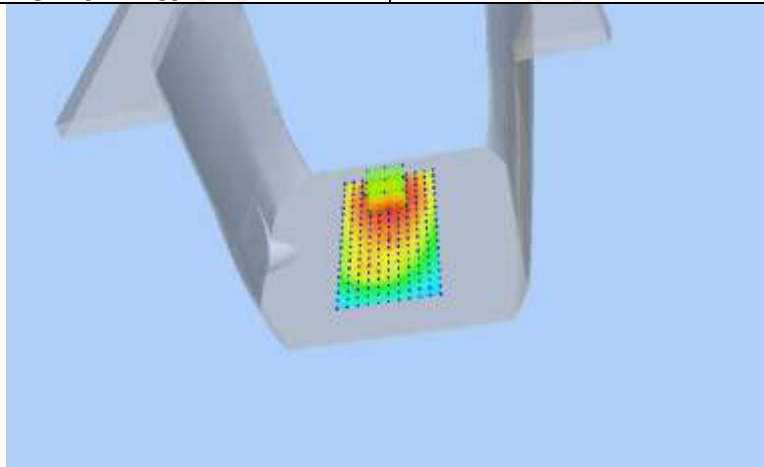

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3670	0.2883	0.2163	0.1677	0.1355

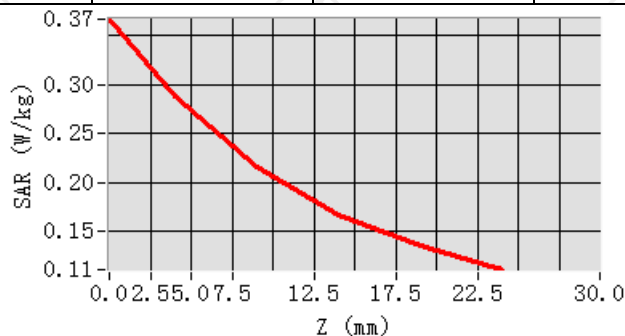

Hot spot position

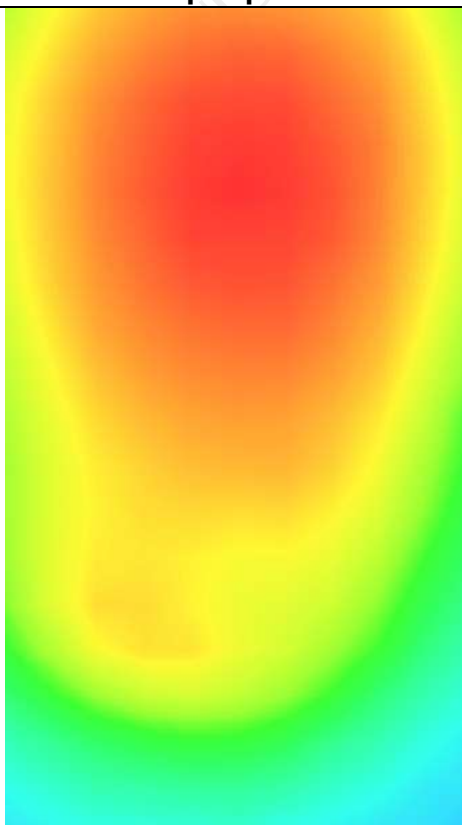



MEASUREMENT 3

Low Band SAR (Channel 23780):

Date: 11/11/2023


Frequency (MHz)	709.000000
Relative permittivity (real part)	41.818384
Relative permittivity (imaginary part)	16.467803
Conductivity (S/m)	0.889444
Variation (%)	-3.110000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 17(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

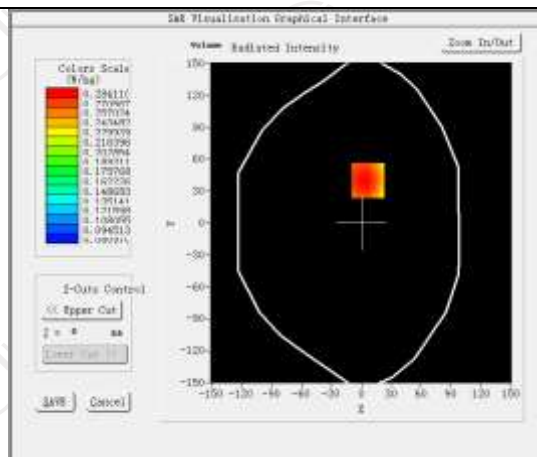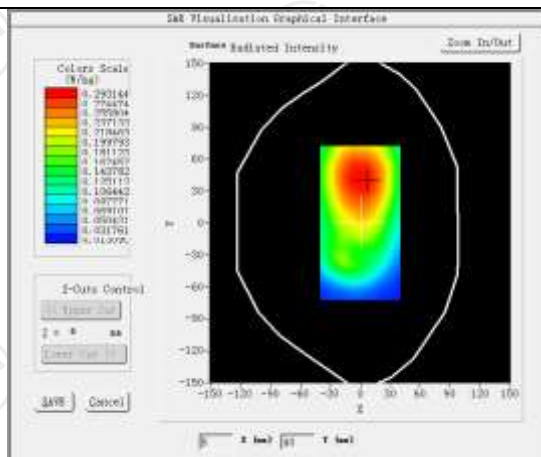


Maximum location: X=7.00, Y=40.00 SAR Peak: 0.37 W/kg


SAR 10g (W/Kg)	0.207528
SAR 1g (W/Kg)	0.281760

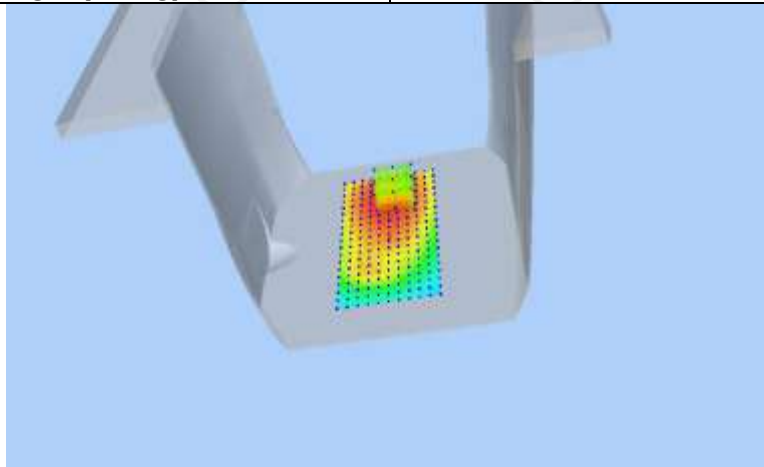

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3688	0.2841	0.2086	0.1596	0.1287

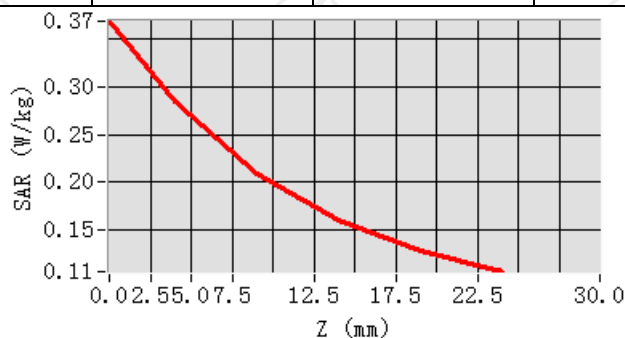

Hot spot position

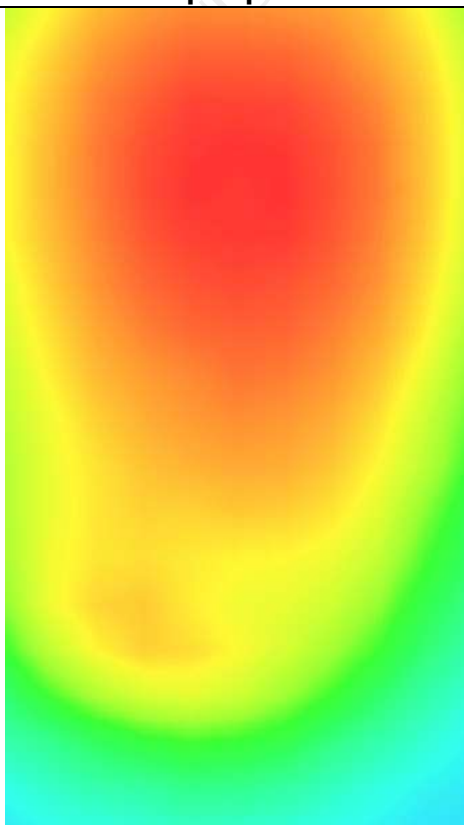



LTE Band 25

MEASUREMENT 1

Low Band SAR (Channel 26140):

Date: 11/22/2024

Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.548793
Relative permittivity (imaginary part)	12.986837
Conductivity (S/m)	1.390509
Variation (%)	0.140000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 25(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

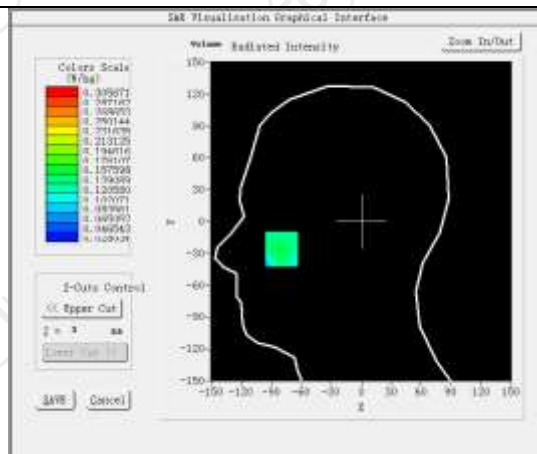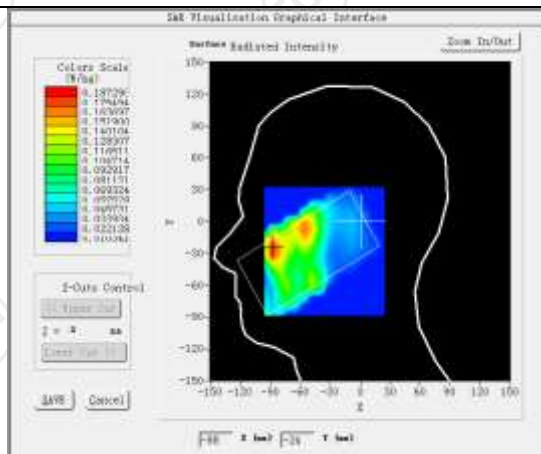


Maximum location: X=-80.00, Y=-25.00 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)


0.146625

SAR 1g (W/Kg)


0.175708

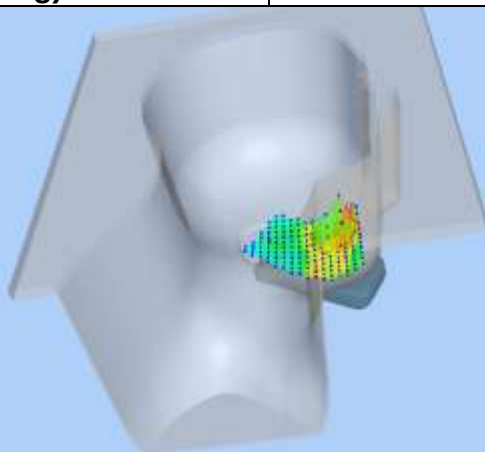

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1111	0.1563	0.1708	0.1412	0.0844

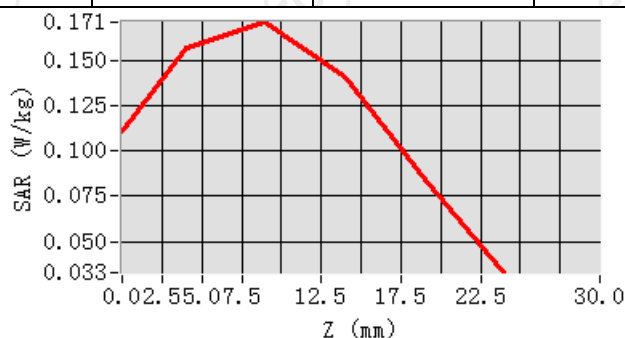

Hot spot position

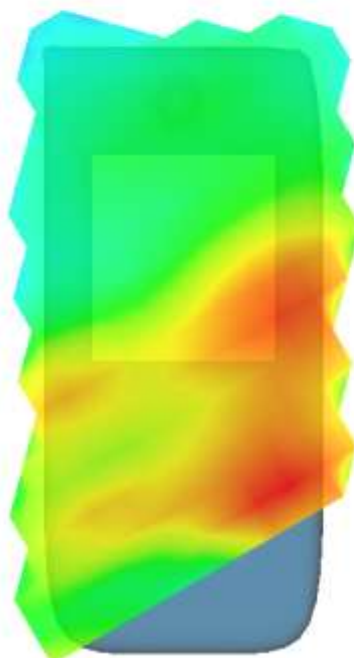



MEASUREMENT 2

Low Band SAR (Channel 26140):

Date: 11/22/2024


Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.548793
Relative permittivity (imaginary part)	12.986837
Conductivity (S/m)	1.390509
Variation (%)	-3.000000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>LTE band 25(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

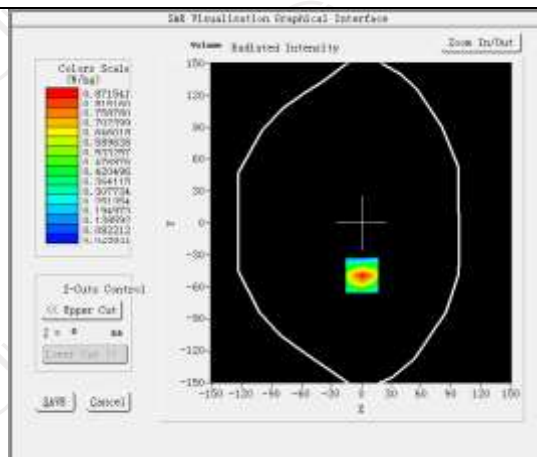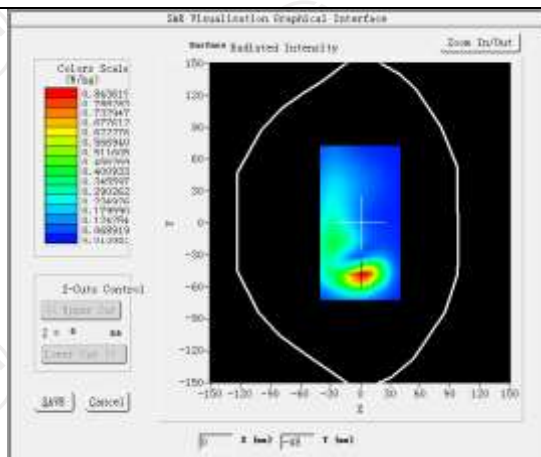


Maximum location: X=1.00, Y=-49.00 SAR Peak: 1.31 W/kg


SAR 10g (W/Kg)	0.422460
SAR 1g (W/Kg)	0.801535

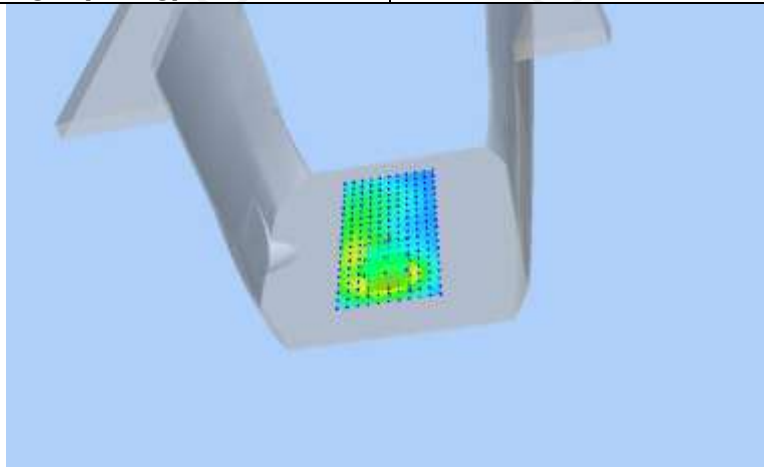

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.2979	0.8715	0.5194	0.3097	0.1883

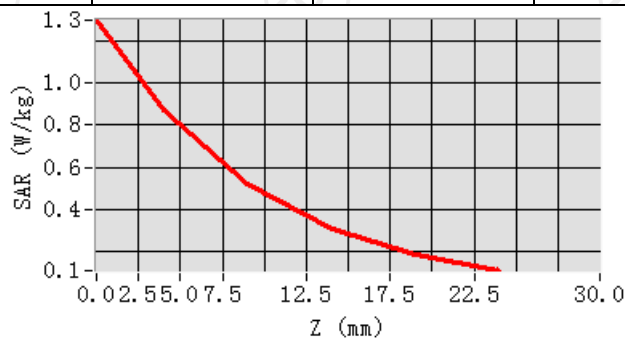

Hot spot position

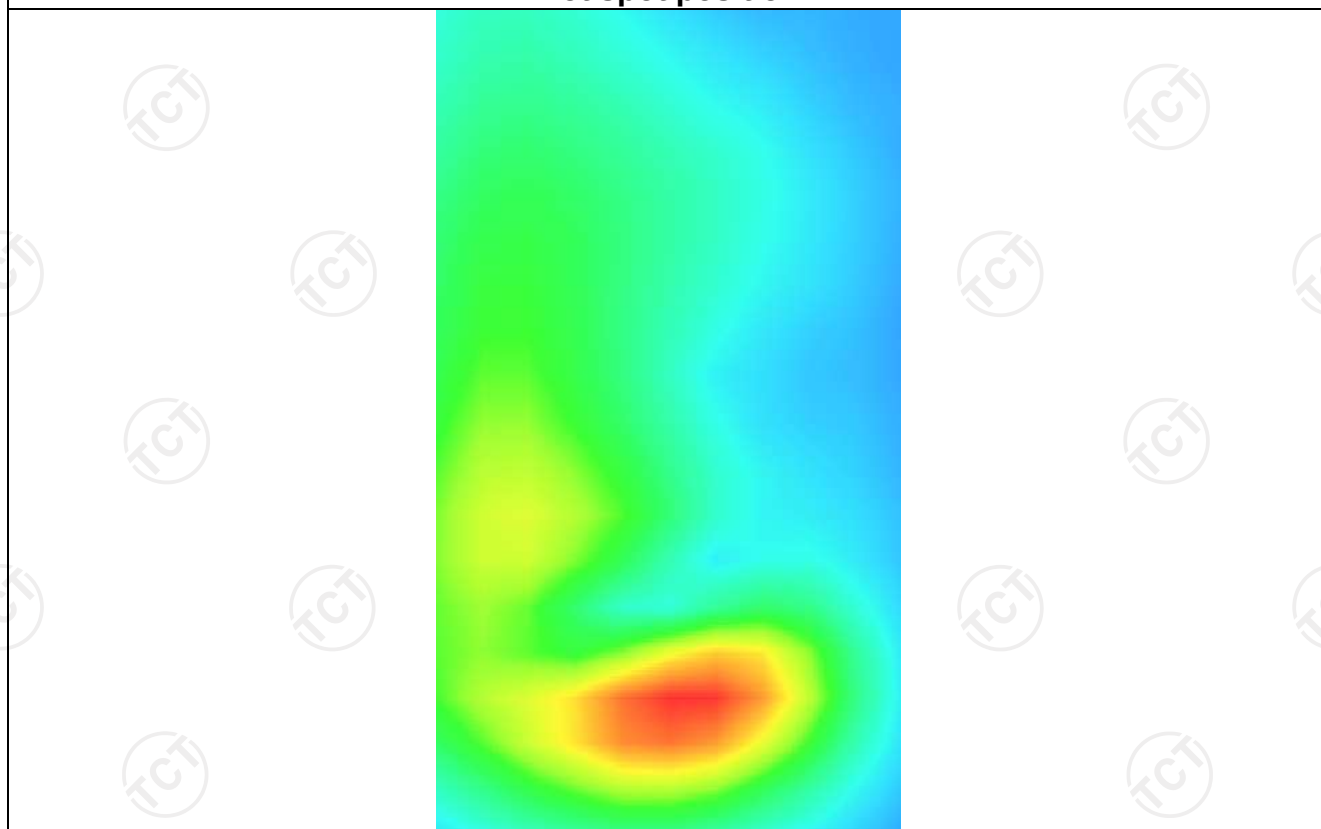



MEASUREMENT 3

Low Band SAR (Channel 26140):

Date: 11/22/2024

Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.548793
Relative permittivity (imaginary part)	12.986837
Conductivity (S/m)	1.390509
Variation (%)	-2.560000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>


Phantom	<u>Validation plane</u>
Device Position	<u>Body back((hotspot 10mm)</u>
Band	<u>LTE band 25(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

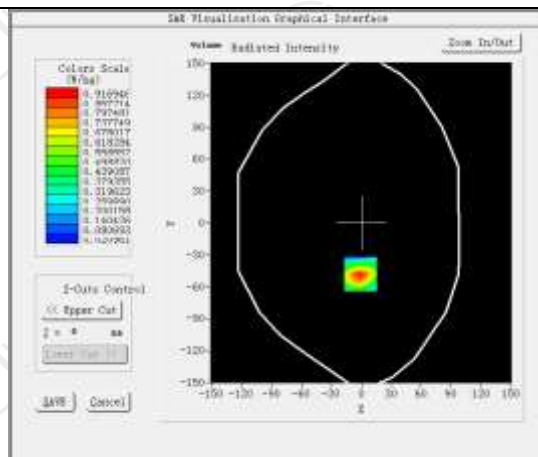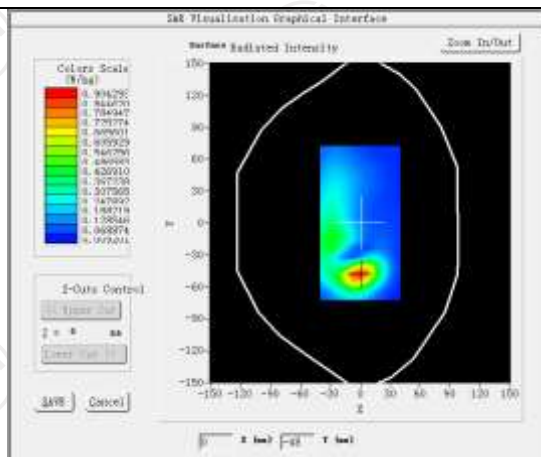


Maximum location: X=-1.00, Y=-48.00

SAR Peak: 1.39 W/kg


SAR 10g (W/Kg)	0.447130
SAR 1g (W/Kg)	0.851451

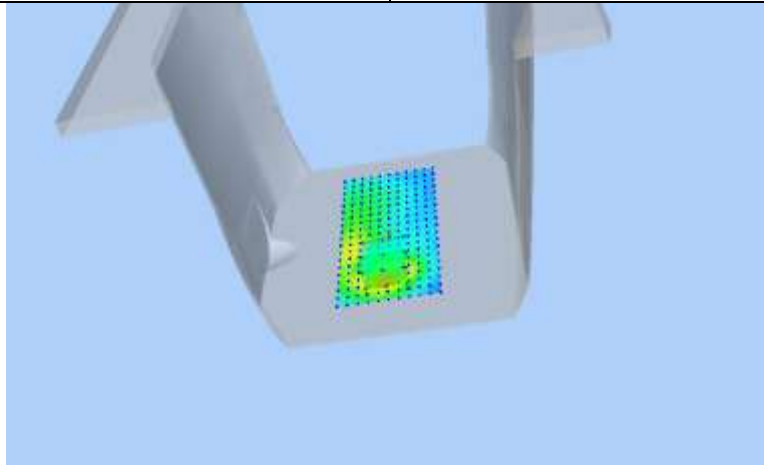

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3739	0.9169	0.5414	0.3194	0.1920

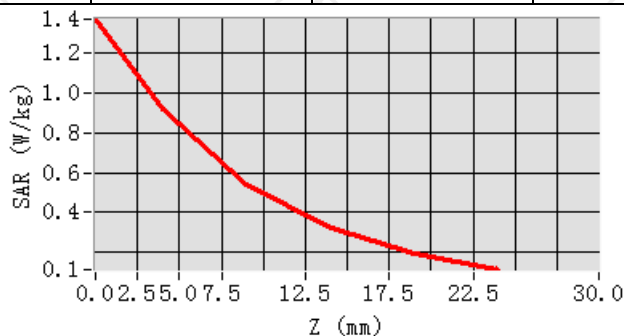

Hot spot position

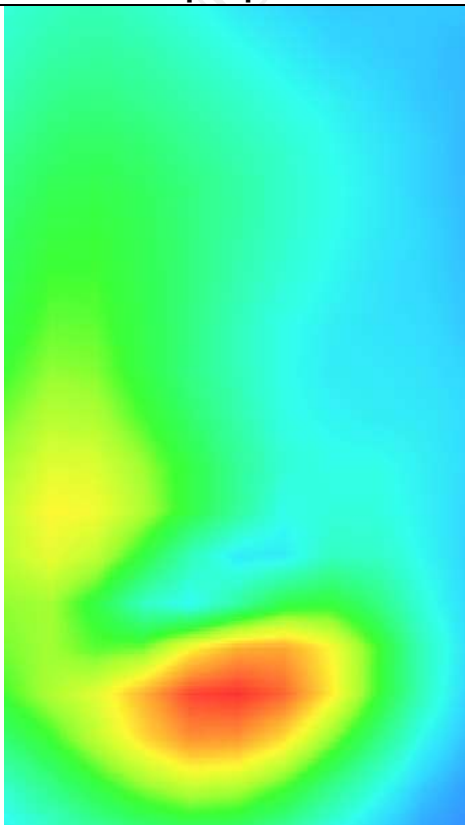



LTE Band 26-1

MEASUREMENT 1

Middle Band SAR (Channel 26740):

Date: 11/14/2024

Frequency (MHz)	819.000000
Relative permittivity (real part)	41.461598
Relative permittivity (imaginary part)	17.861344
Conductivity (S/m)	0.927560
Variation (%)	-0.050000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 26-1(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

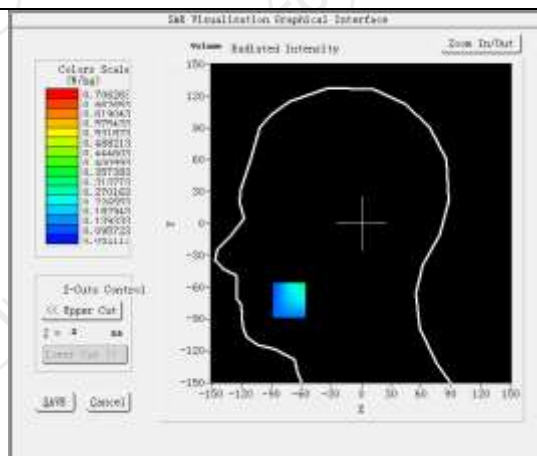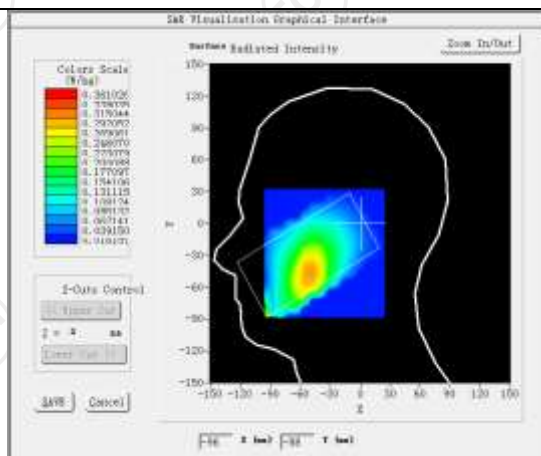


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)


0.199930

SAR 1g (W/Kg)


0.272479

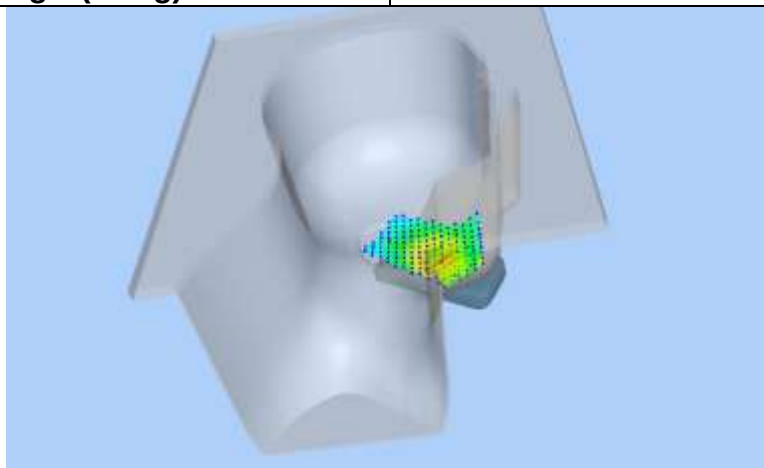

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3856	0.3036	0.2073	0.2044	0.2438

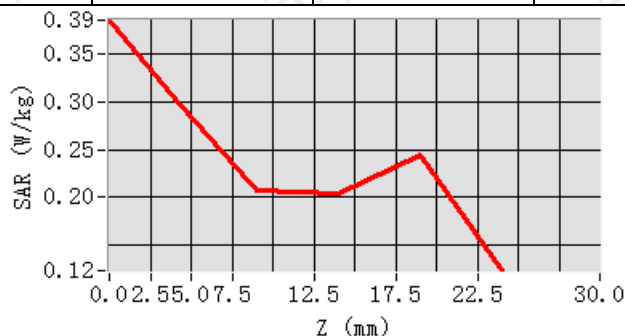

Hot spot position

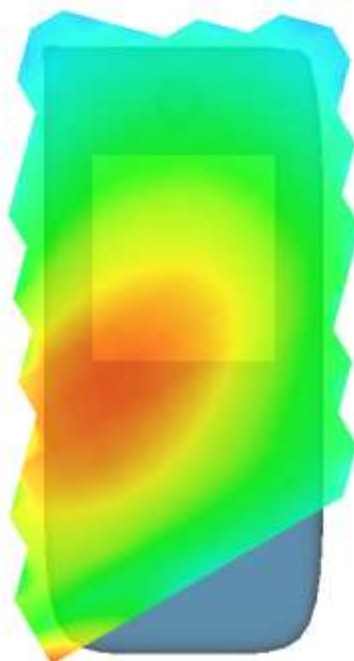



MEASUREMENT 2

Middle Band SAR (Channel 26740):

Date: 11/14/2024


Frequency (MHz)	819.000000
Relative permittivity (real part)	41.461598
Relative permittivity (imaginary part)	17.861344
Conductivity (S/m)	0.927560
Variation (%)	-2.670000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 26-1(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

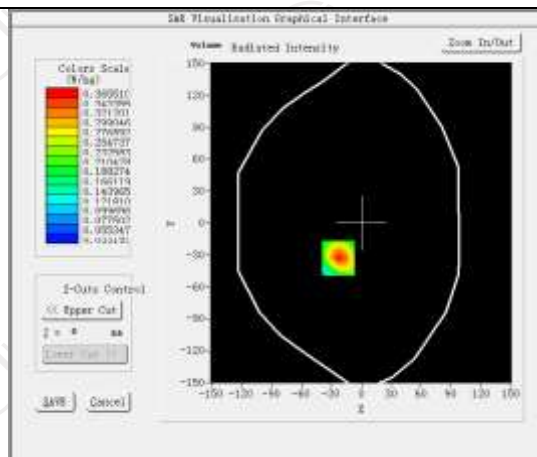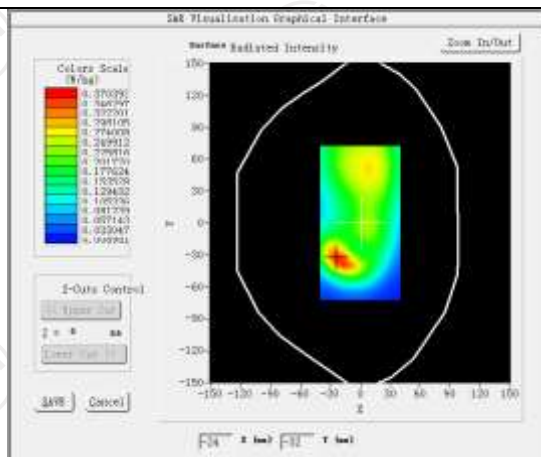


Maximum location: X=-23.00, Y=-33.00 SAR Peak: 0.56 W/kg


SAR 10g (W/Kg)	0.195206
SAR 1g (W/Kg)	0.342988

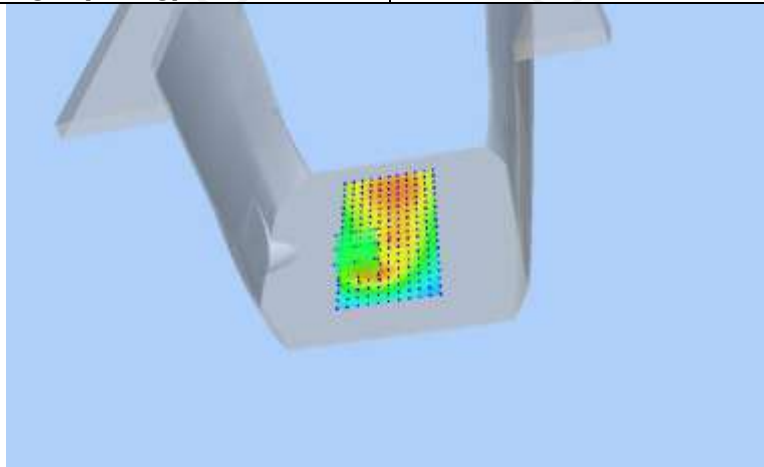

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5558	0.3655	0.2140	0.1287	0.0827

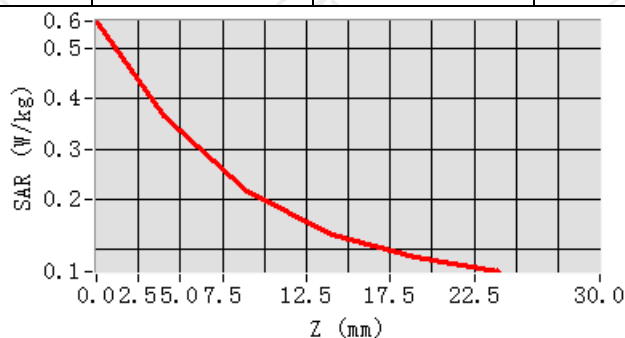

Hot spot position


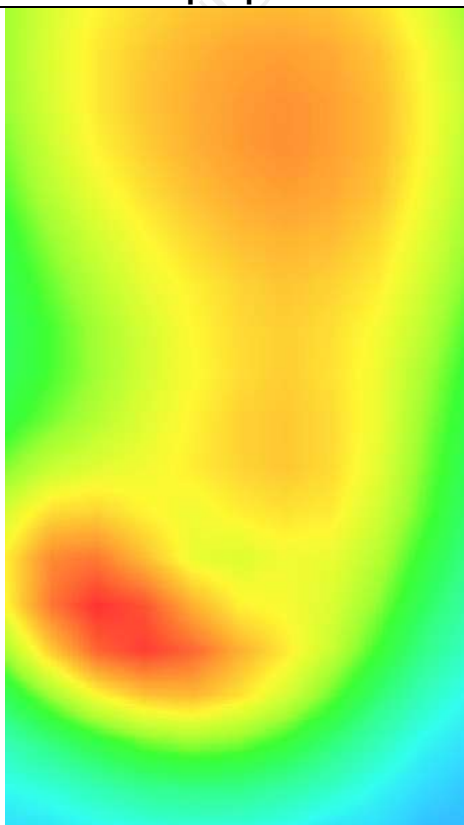


MEASUREMENT 3

Middle Band SAR (Channel 26740):

Date: 11/14/2024

Frequency (MHz)	819.000000
Relative permittivity (real part)	41.461598
Relative permittivity (imaginary part)	17.861344
Conductivity (S/m)	0.927560
Variation (%)	-3.470000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(hotspot 10mm)</u>
Band	<u>LTE band 26-1(1 RB#25)</u>
SURFACE SAR	VOLUME SAR

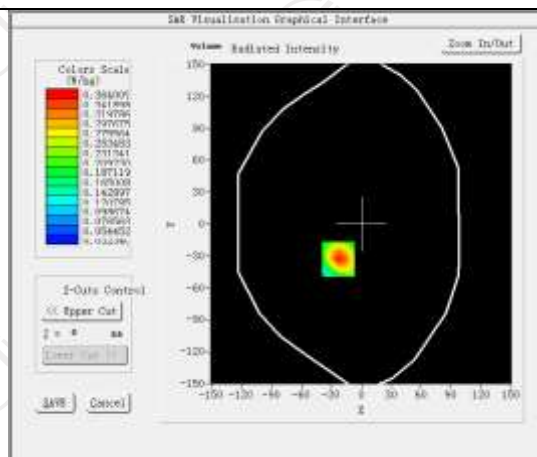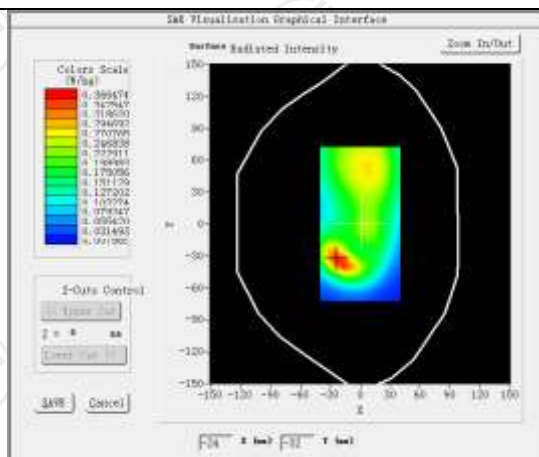


Maximum location: X=-23.00, Y=-33.00 SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)


0.195207

SAR 1g (W/Kg)


0.342015

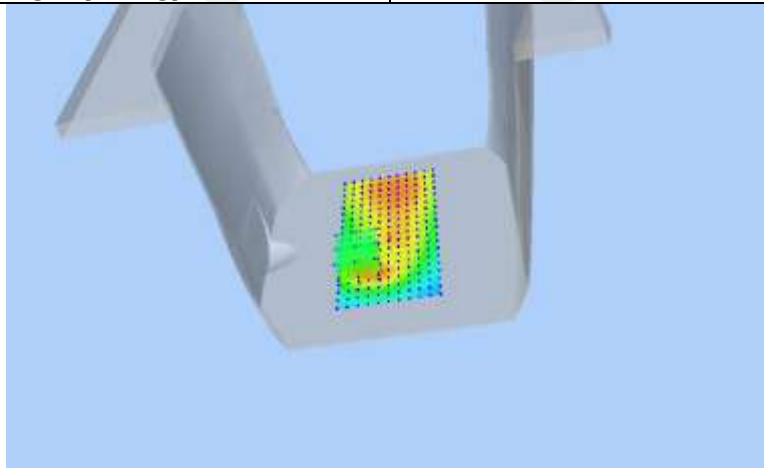

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5497	0.3640	0.2149	0.1299	0.0833

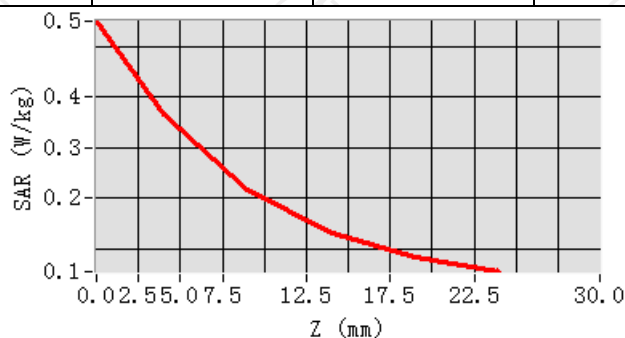

Hot spot position

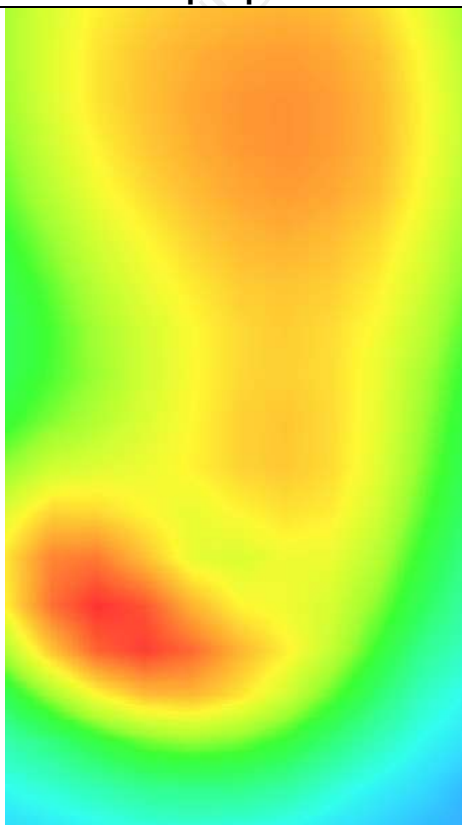



LTE Band 26-2

MEASUREMENT 1

Low Band SAR (Channel 26865):

Date: 11/14/2024

Frequency (MHz)	831.500000
Relative permittivity (real part)	41.421054
Relative permittivity (imaginary part)	18.019701
Conductivity (S/m)	0.931891
Variation (%)	-2.900000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 26-2(1 RB#38)</u>
SURFACE SAR	VOLUME SAR

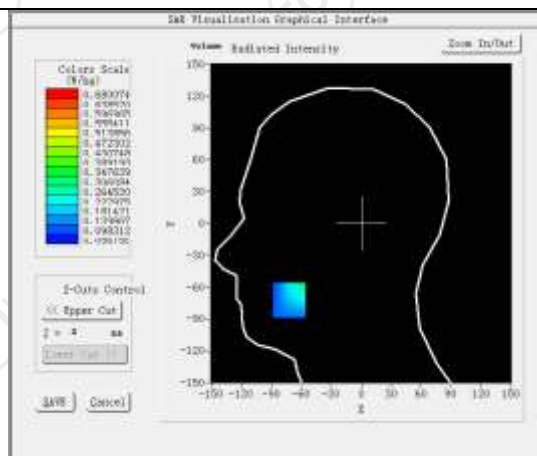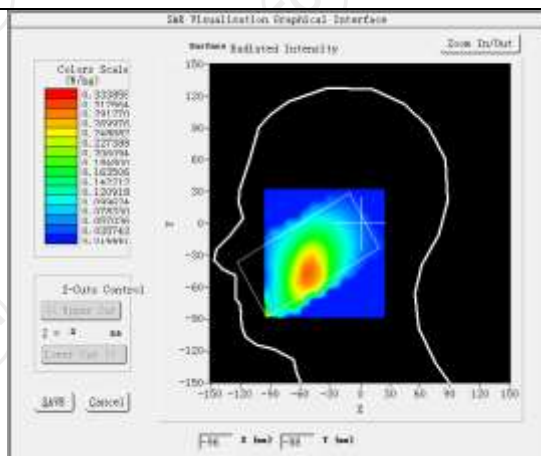


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)


0.201655

SAR 1g (W/Kg)


0.270078

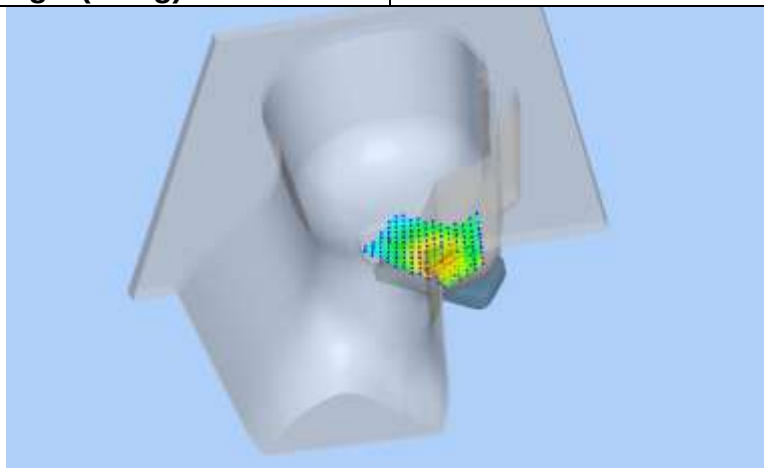

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4591	0.2994	0.1951	0.1997	0.2316

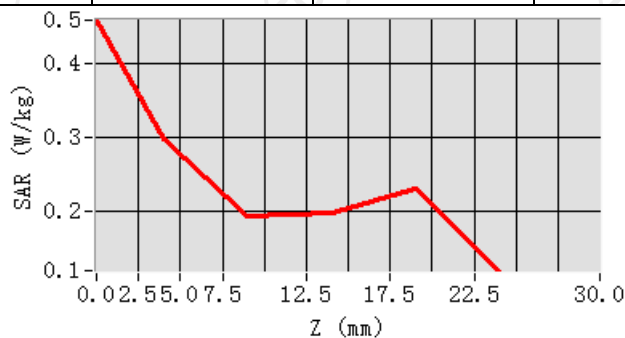

Hot spot position

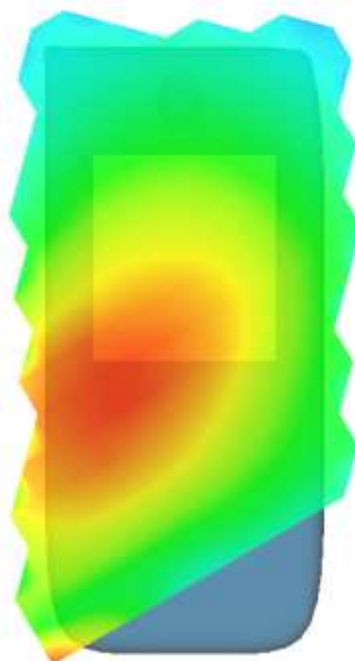



MEASUREMENT 2

Low Band SAR (Channel 26865):

Date: 11/14/2024


Frequency (MHz)	831.500000
Relative permittivity (real part)	41.421054
Relative permittivity (imaginary part)	18.019701
Conductivity (S/m)	0.931891
Variation (%)	-2.730000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 26-2(1 RB#38)</u>
SURFACE SAR	VOLUME SAR

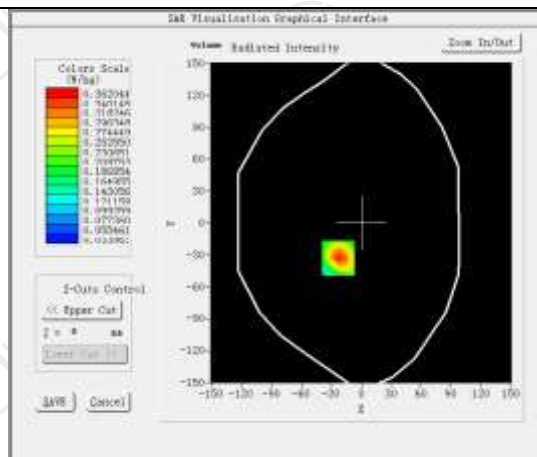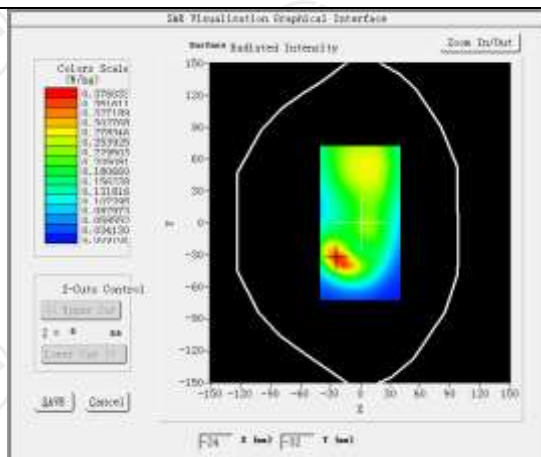


Maximum location: X=-23.00, Y=-33.00 SAR Peak: 0.55 W/kg


SAR 10g (W/Kg)	0.193142
SAR 1g (W/Kg)	0.339808

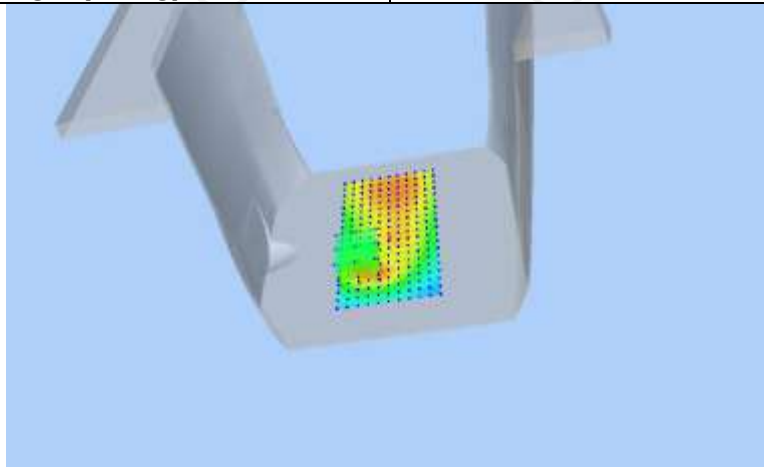

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5490	0.3620	0.2124	0.1274	0.0811

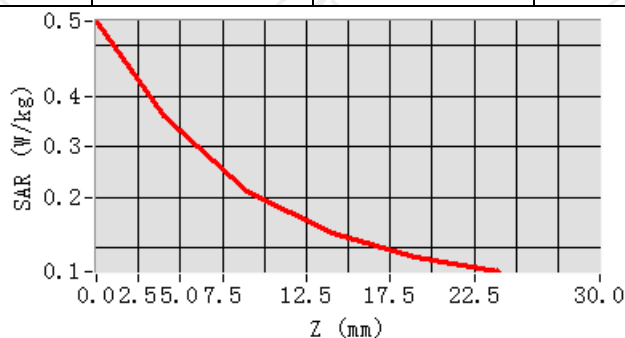

Hot spot position

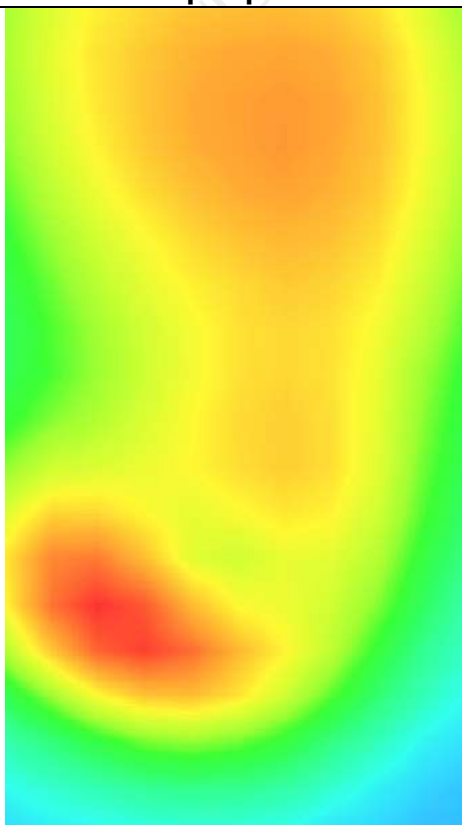



MEASUREMENT 3

Low Band SAR (Channel 26865):

Date: 11/14/2024


Frequency (MHz)	831.500000
Relative permittivity (real part)	41.421054
Relative permittivity (imaginary part)	18.019701
Conductivity (S/m)	0.931891
Variation (%)	-3.050000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back((hotspot 10mm)</u>
Band	<u>LTE band 26-2(1 RB#38)</u>
SURFACE SAR	VOLUME SAR

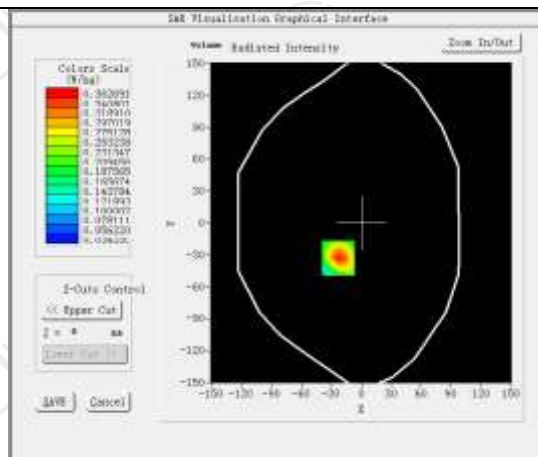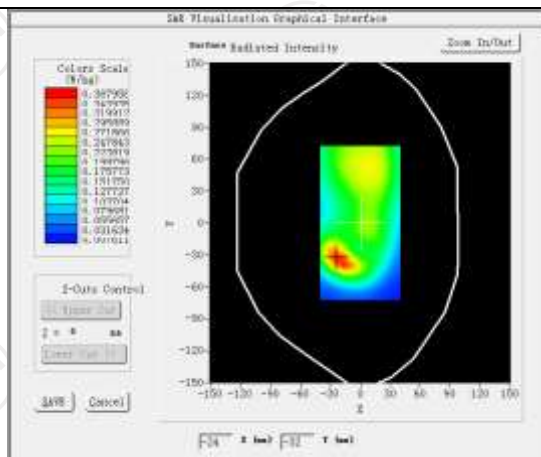


Maximum location: X=-23.00, Y=-33.00 SAR Peak: 0.56 W/kg


SAR 10g (W/Kg)	0.194176
SAR 1g (W/Kg)	0.340655

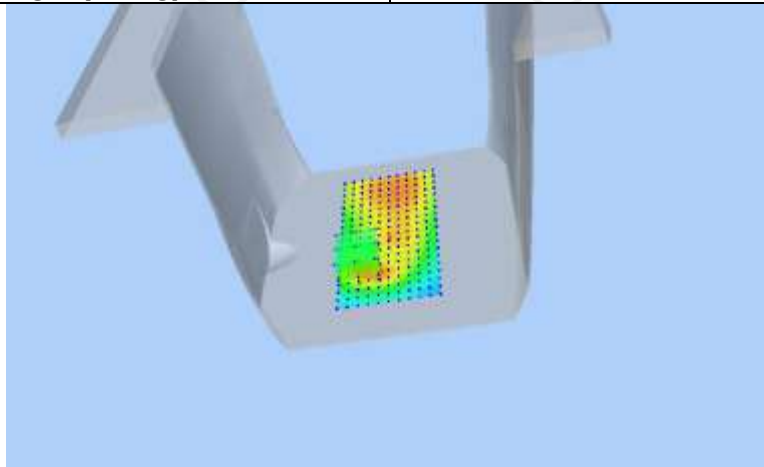

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5541	0.3627	0.2115	0.1277	0.0833

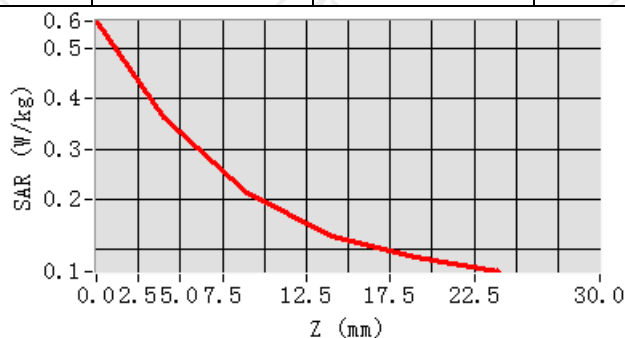

Hot spot position

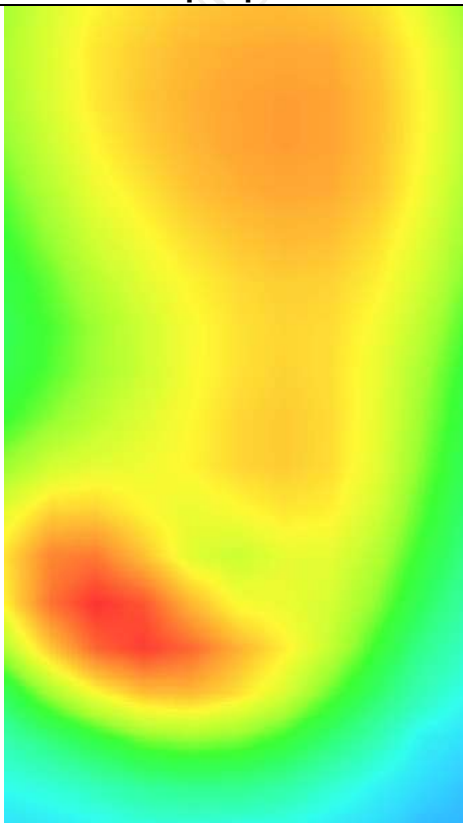



LTE Band 41

MEASUREMENT 1

High Band SAR (Channel 41490):

Date: 11/29/2024

Frequency (MHz)	2680.000000
Relative permittivity (real part)	38.065380
Relative permittivity (imaginary part)	13.555212
Conductivity (S/m)	2.033466
Variation (%)	-2.910000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 41(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

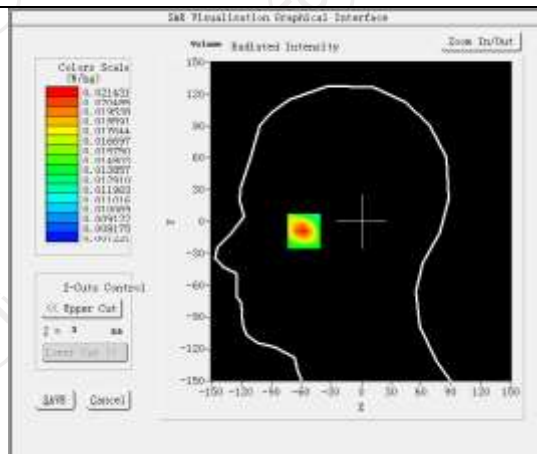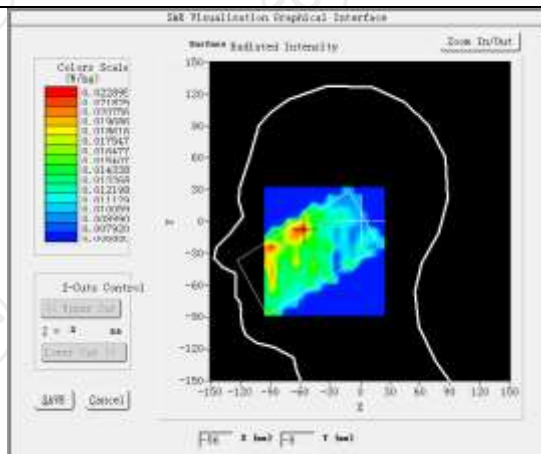


Maximum location: X=-57.00, Y=-7.00 SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)


0.014527

SAR 1g (W/Kg)


0.020582

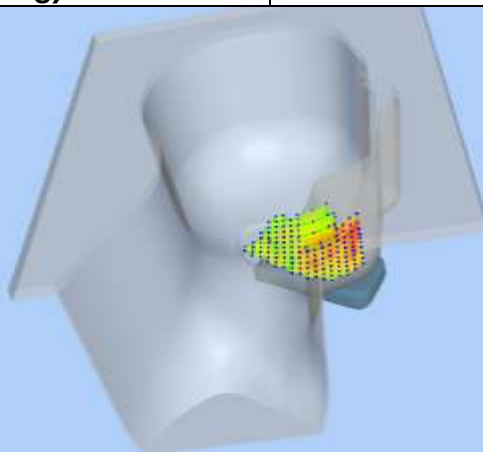

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0324	0.0214	0.0135	0.0102	0.0097

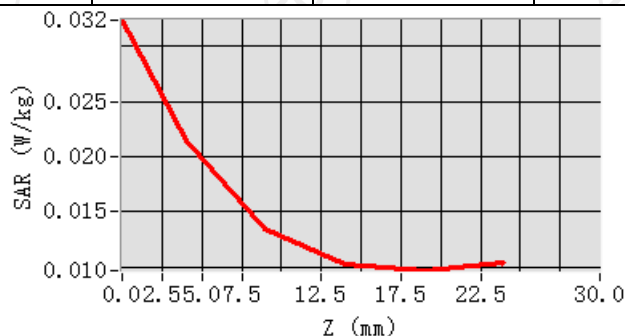

Hot spot position

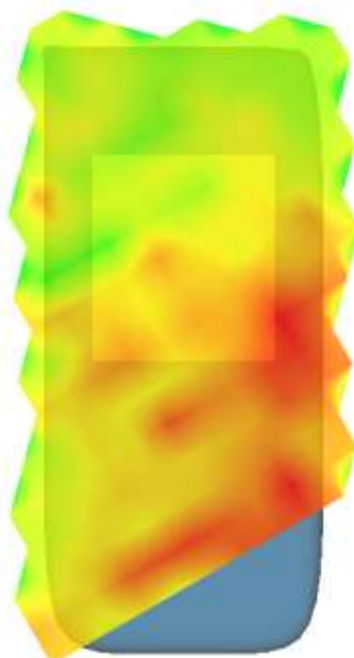



MEASUREMENT 2

High Band SAR (Channel 41490):

Date: 11/29/2024


Frequency (MHz)	2680.000000
Relative permittivity (real part)	38.065380
Relative permittivity (imaginary part)	13.555212
Conductivity (S/m)	2.033466
Variation (%)	-2.070000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back (10mm)
Band	<u>LTE band 41(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

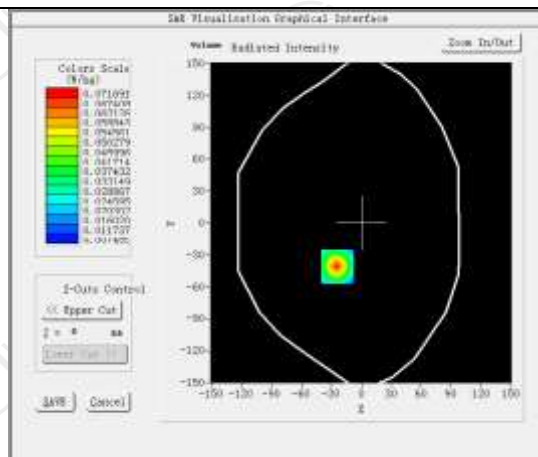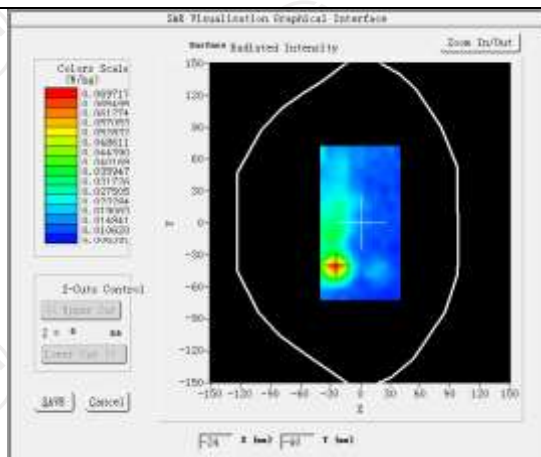


Maximum location: X=-24.00, Y=-41.00 SAR Peak: 0.12 W/kg


SAR 10g (W/Kg)	0.033139
SAR 1g (W/Kg)	0.065566

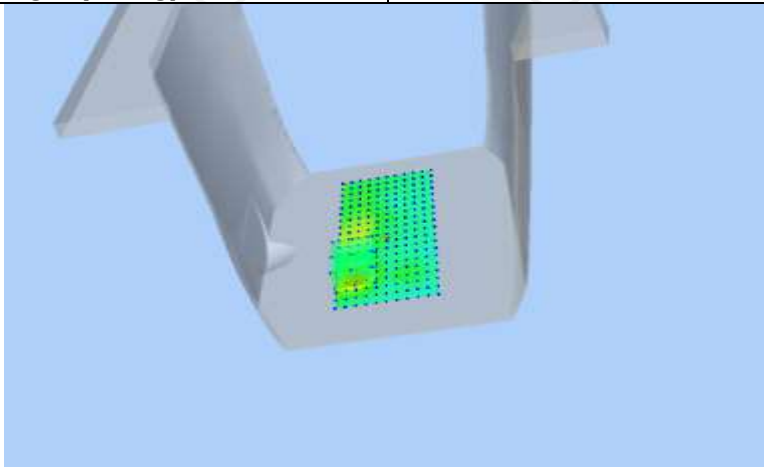

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1157	0.0717	0.0384	0.0210	0.0125

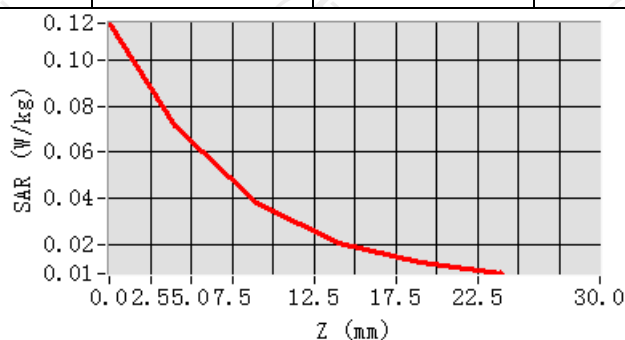

Hot spot position

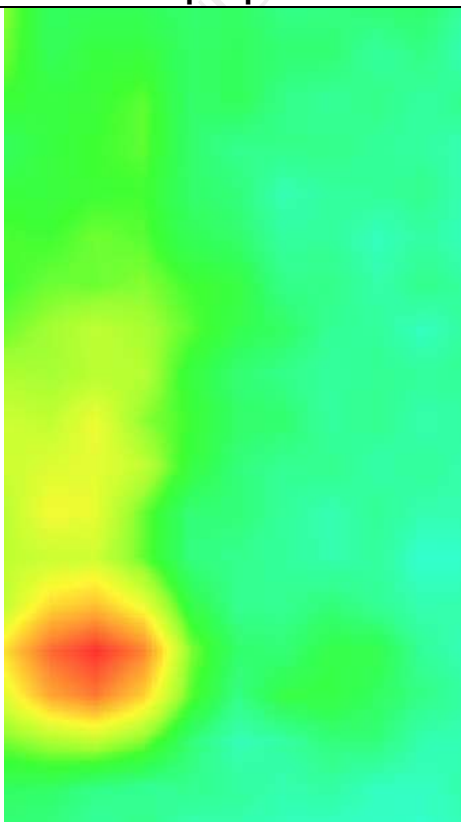



MEASUREMENT 3

High Band SAR (Channel 41490):

Date: 11/29/2024


Frequency (MHz)	2680.000000
Relative permittivity (real part)	38.065380
Relative permittivity (imaginary part)	13.555212
Conductivity (S/m)	2.033466
Variation (%)	2.360000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back (hotspot 10mm)
Band	<u>LTE band 41(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

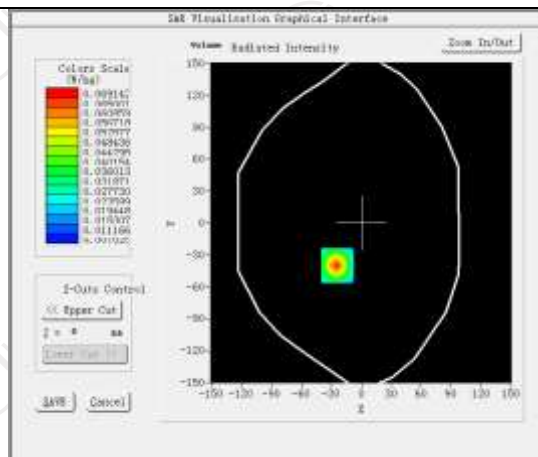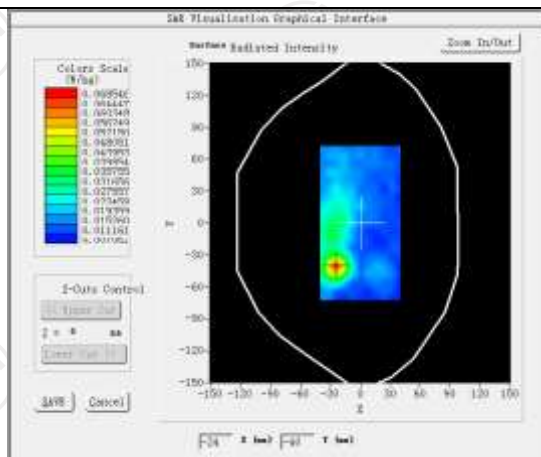


Maximum location: X=-24.00, Y=-40.00 SAR Peak: 0.11 W/kg


SAR 10g (W/Kg)	0.033741
SAR 1g (W/Kg)	0.063850

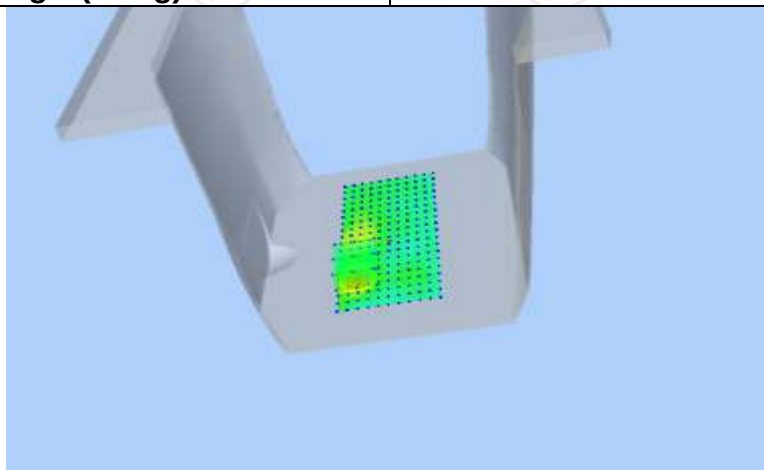

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1138	0.0691	0.0369	0.0216	0.0153


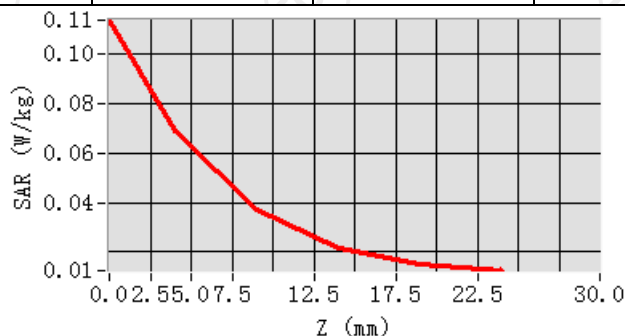



Hot spot position

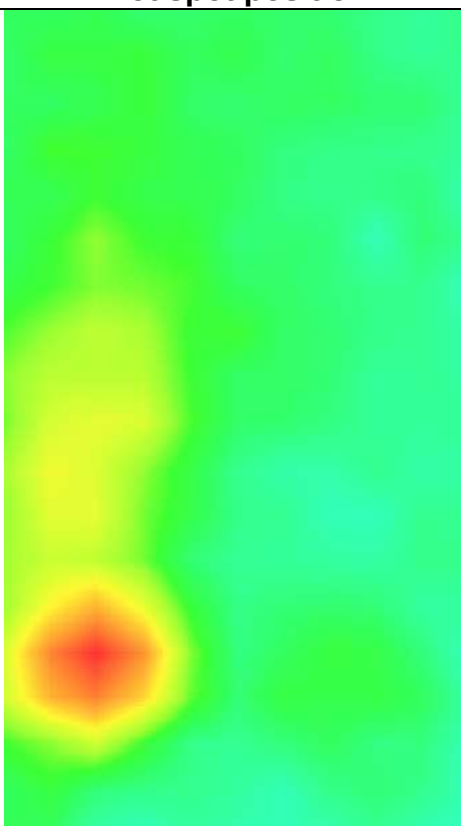


LTE Band 66

MEASUREMENT 1

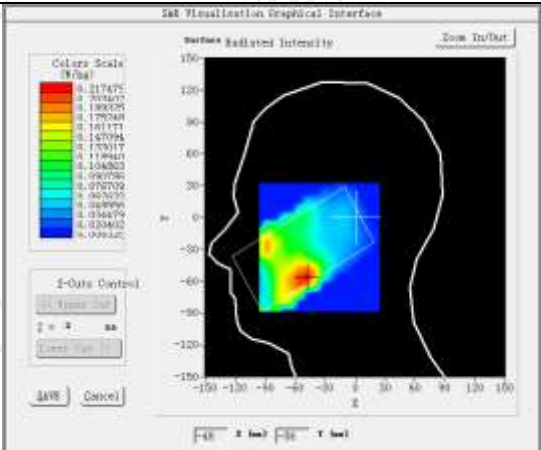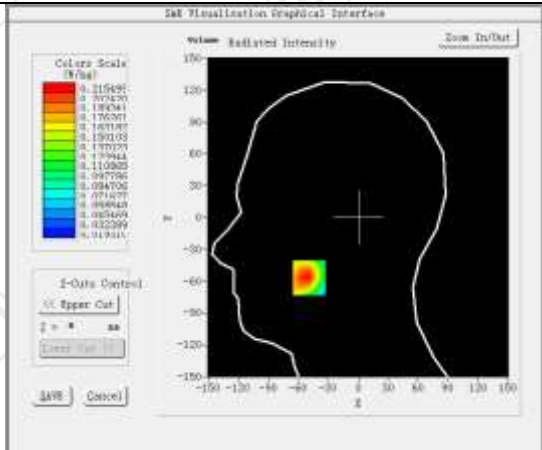
Low Band SAR (Channel 132072):		Date: 11/19/2024
Frequency (MHz)	1720.000000	
Relative permittivity (real part)	39.803586	
Relative permittivity (imaginary part)	14.019599	
Conductivity (S/m)	1.335945	
Variation (%)	1.980000	
Crest Factor	1.0	
Probe Conversion factor	2.08	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	LTE band 66(1 RB#50)	
SURFACE SAR	VOLUME SAR	
 		
Maximum location: X=-49.00, Y=-57.00 SAR Peak: 0.24 W/kg		
SAR 10g (W/Kg)	0.153107	
SAR 1g (W/Kg)	0.209160	

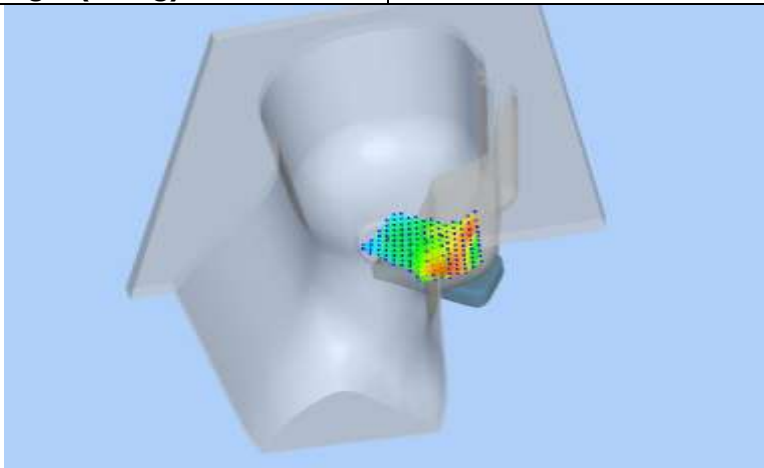

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2383	0.2155	0.1830	0.1477	0.1119

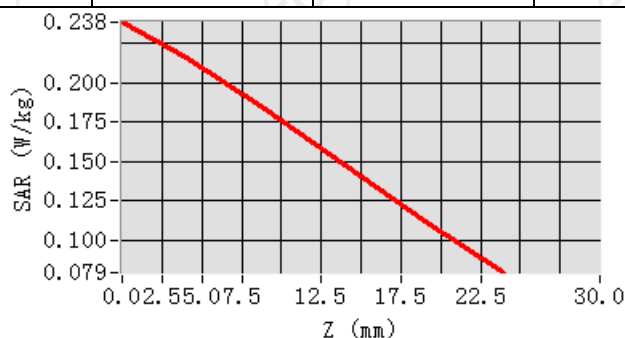

Hot spot position

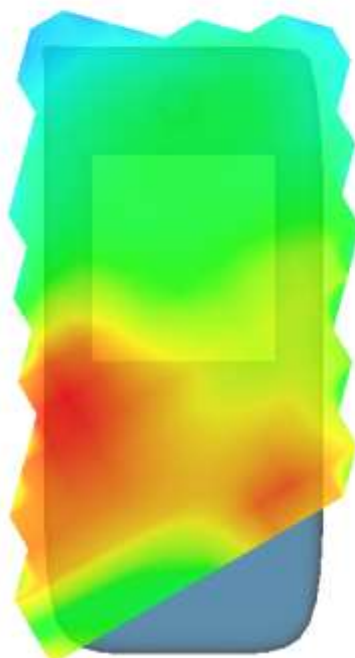



MEASUREMENT 2

Low Band SAR (Channel 132072):

Date: 11/19/2024


Frequency (MHz)	1720.000000
Relative permittivity (real part)	39.803586
Relative permittivity (imaginary part)	14.019599
Conductivity (S/m)	1.335945
Variation (%)	-2.890000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>LTE band 66(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

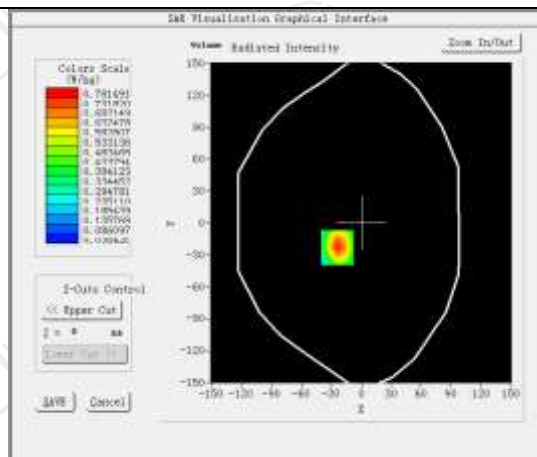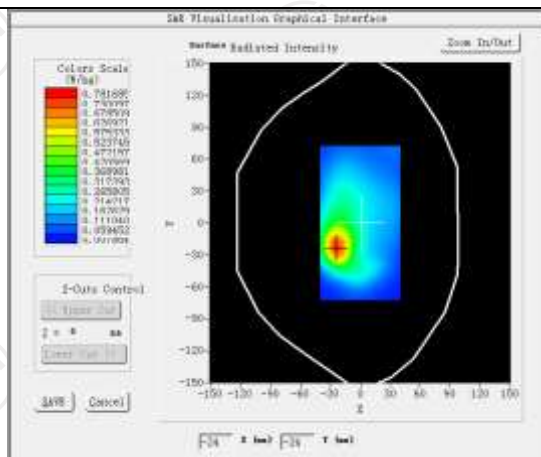


Maximum location: X=-24.00, Y=-23.00 SAR Peak: 1.17W/kg


SAR 10g (W/Kg)	0.409799
SAR 1g (W/Kg)	0.730147

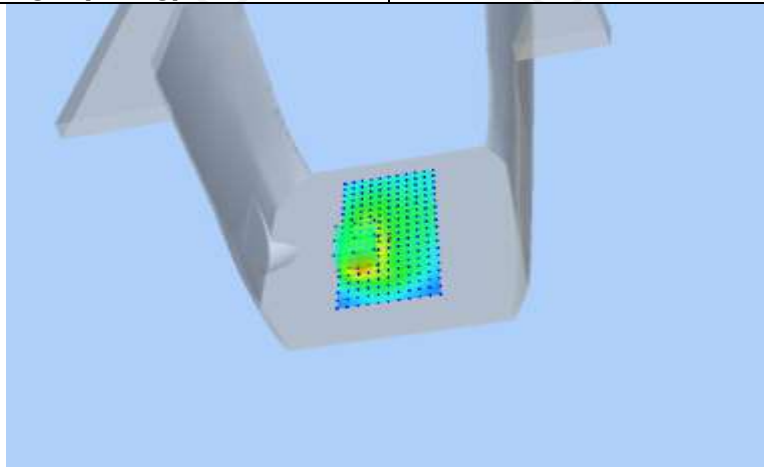

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1626	0.7815	0.4664	0.2784	0.1694

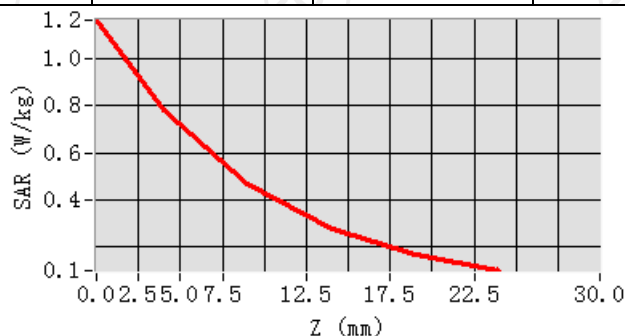

Hot spot position

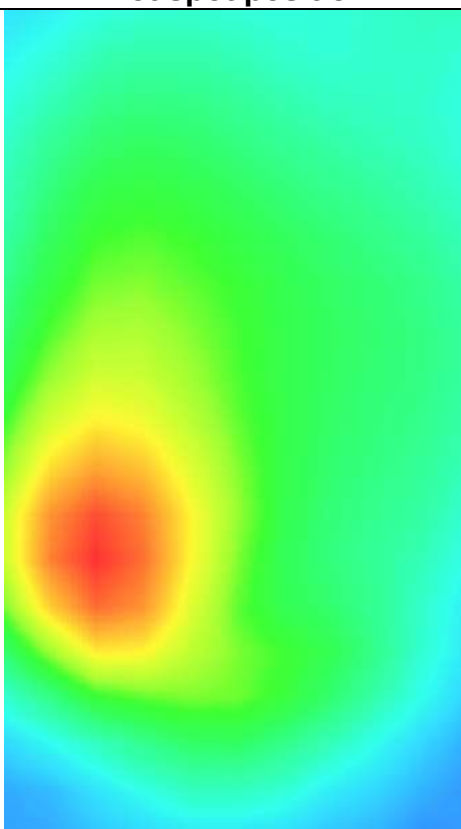



MEASUREMENT 3

Low Band SAR (Channel 132072):

Date: 11/19/2024


Frequency (MHz)	1720.000000
Relative permittivity (real part)	39.803586
Relative permittivity (imaginary part)	14.019599
Conductivity (S/m)	1.335945
Variation (%)	-3.350000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back((hotspot10mm)
Band	<u>LTE band 66(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

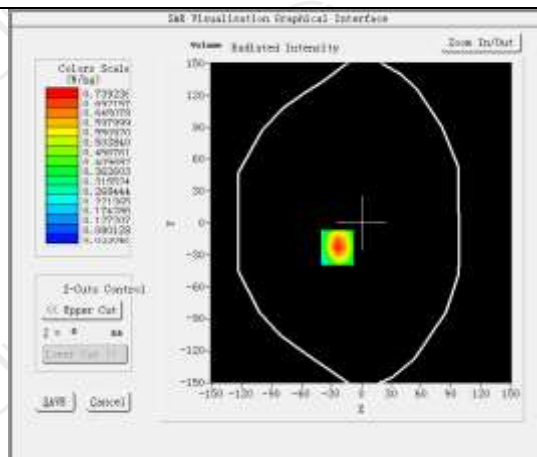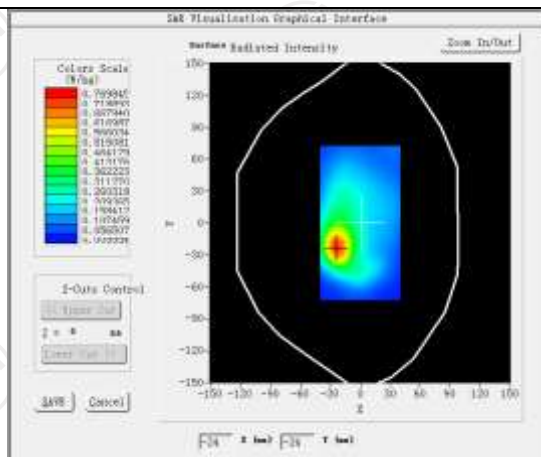


Maximum location: X=-24.00, Y=-23.00 SAR Peak: 1.11 W/kg


SAR 10g (W/Kg)	0.387148
SAR 1g (W/Kg)	0.690846

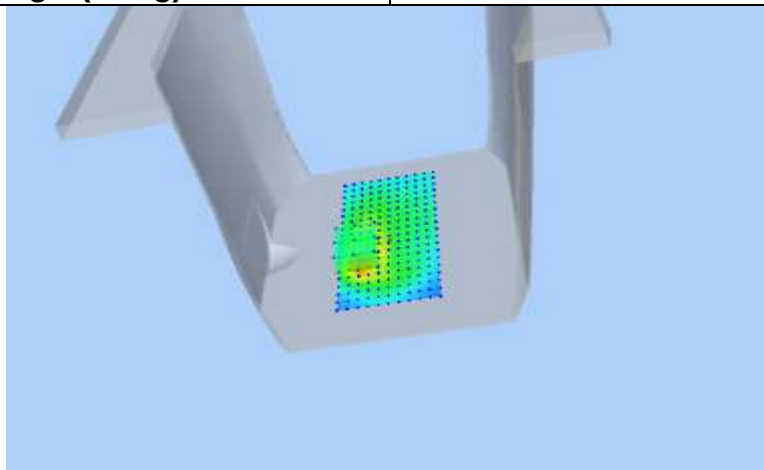

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1003	0.7392	0.4409	0.2632	0.1604

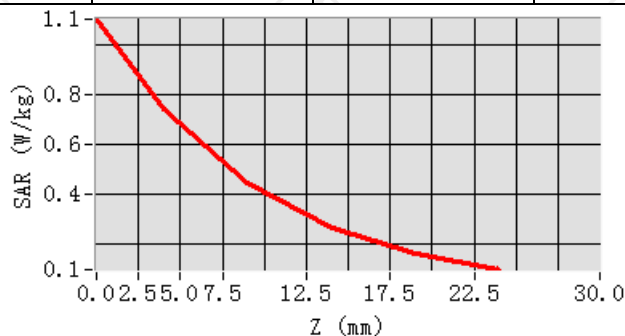

Hot spot position

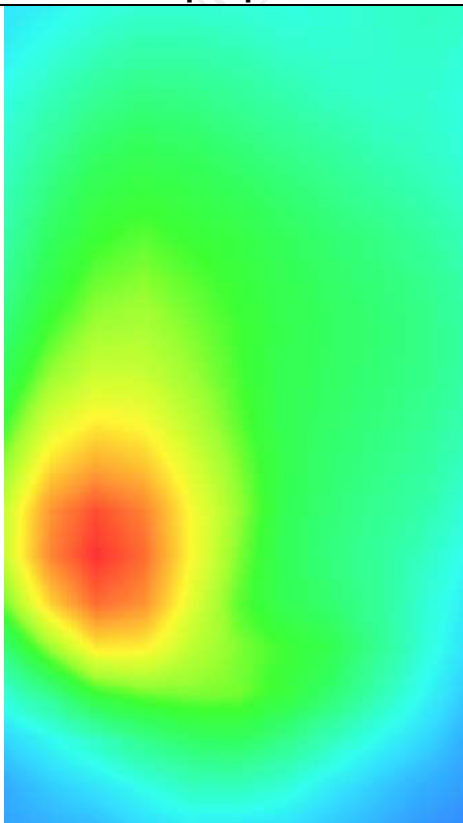



LTE Band 71

MEASUREMENT 1

Low Band SAR (Channel 133222):

Date: 11/11/2024

Frequency (MHz)	673.000000
Relative permittivity (real part)	41.935150
Relative permittivity (imaginary part)	16.011735
Conductivity (S/m)	0.876970
Variation (%)	-4.480000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 71(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

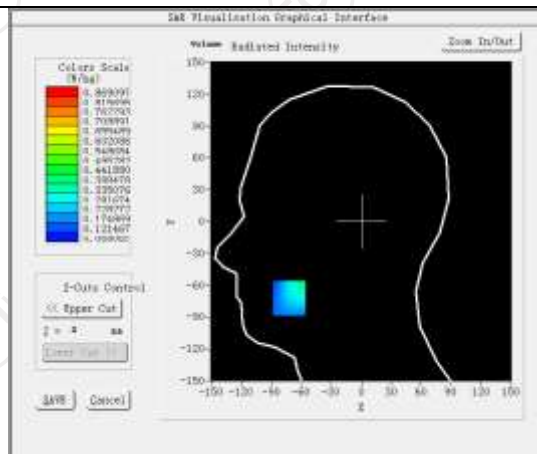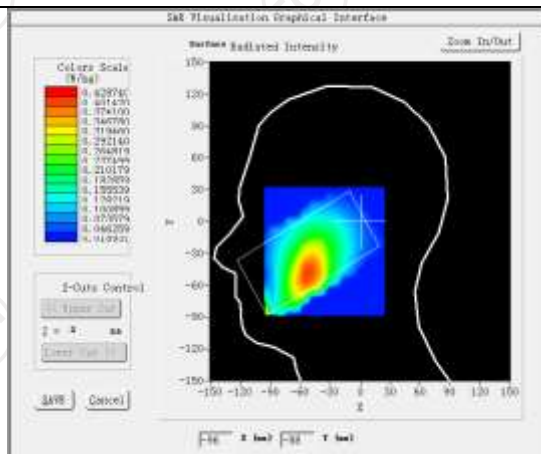


Maximum location: X=-72.00, Y=-72.00 SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)


0.252930

SAR 1g (W/Kg)


0.330855

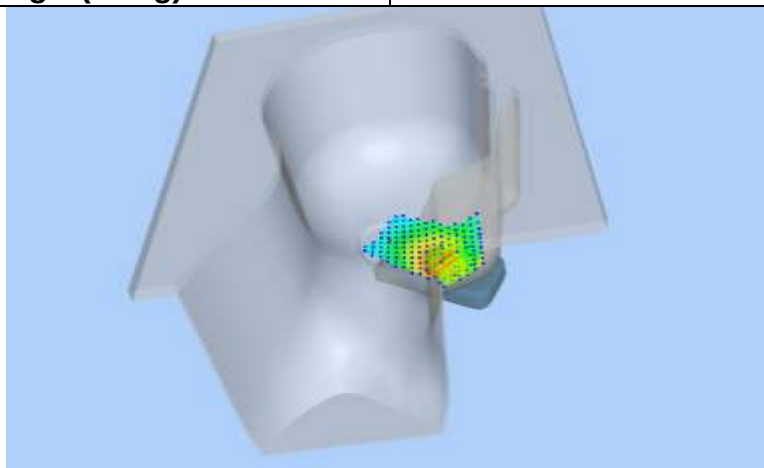

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8904	0.3914	0.2181	0.2511	0.2681

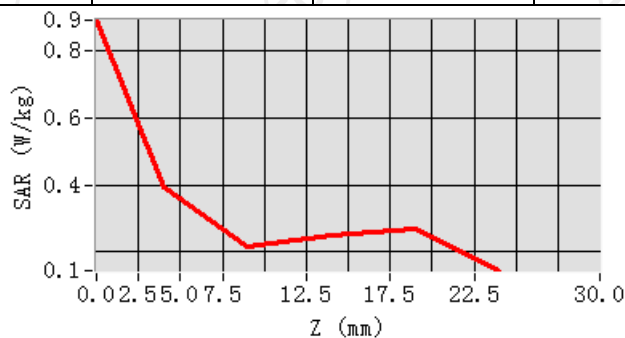

Hot spot position

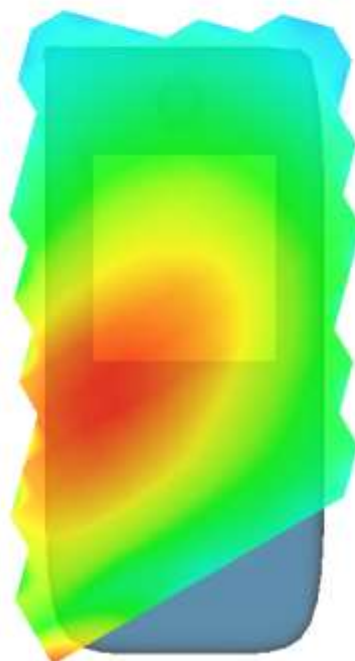



MEASUREMENT 2

Low Band SAR (Channel 133222):

Date: 11/11/2024

Frequency (MHz)	673.000000
Relative permittivity (real part)	41.935150
Relative permittivity (imaginary part)	16.011735
Conductivity (S/m)	0.876970
Variation (%)	-3.160000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>


Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 71(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

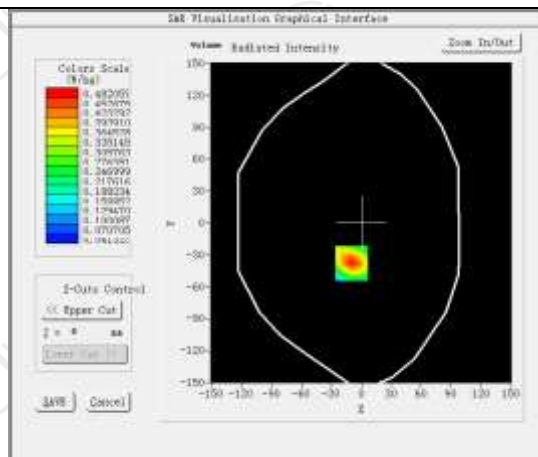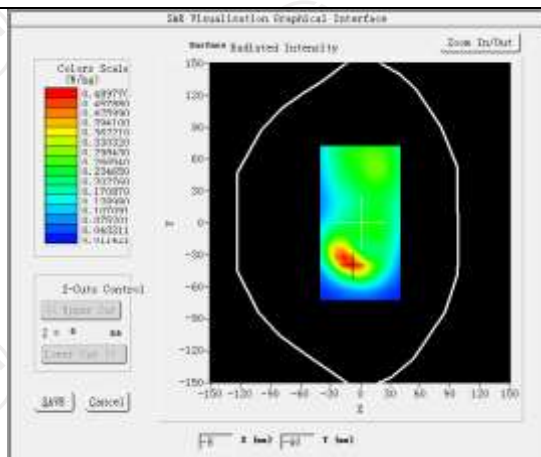


Maximum location: X=-10.00, Y=-38.00

SAR Peak: 0.74W/kg


SAR 10g (W/Kg)	0.256150
SAR 1g (W/Kg)	0.452310

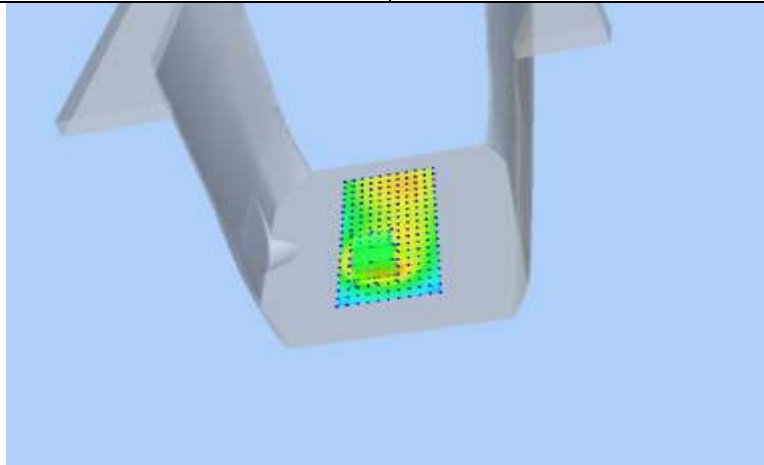

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7363	0.4821	0.2811	0.1692	0.1099

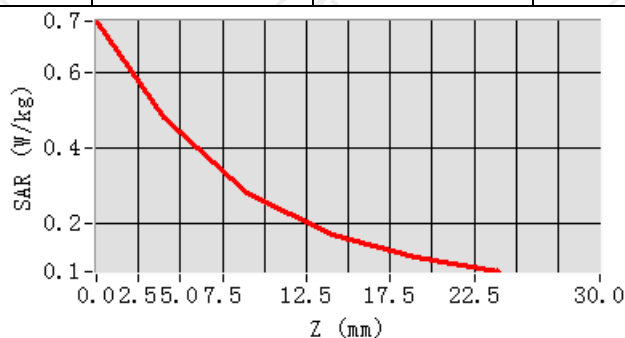

Hot spot position

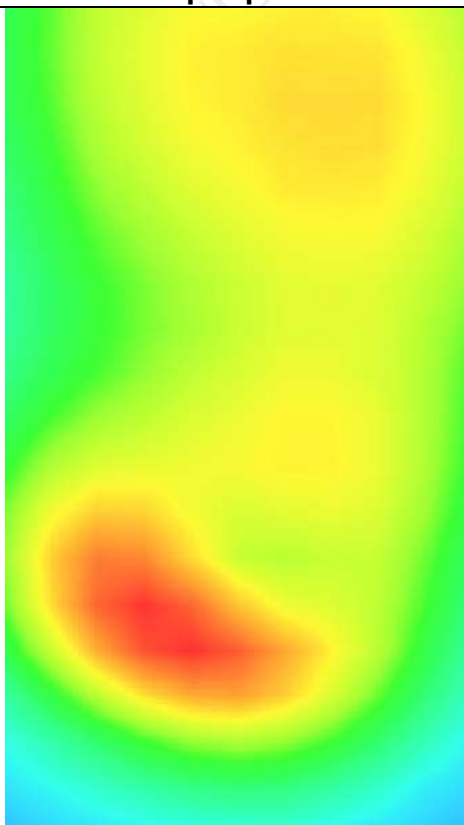



MEASUREMENT 3

Low Band SAR (Channel 133222):

Date: 11/11/2024

Frequency (MHz)	673.000000
Relative permittivity (real part)	41.935150
Relative permittivity (imaginary part)	16.011735
Conductivity (S/m)	0.876970
Variation (%)	3.870000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>


Phantom	Validation plane
Device Position	Body back((hotspot10mm)
Band	<u>LTE band 71(1 RB#50)</u>
SURFACE SAR	VOLUME SAR

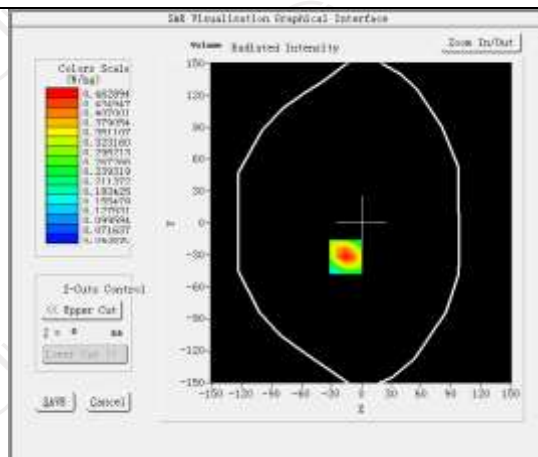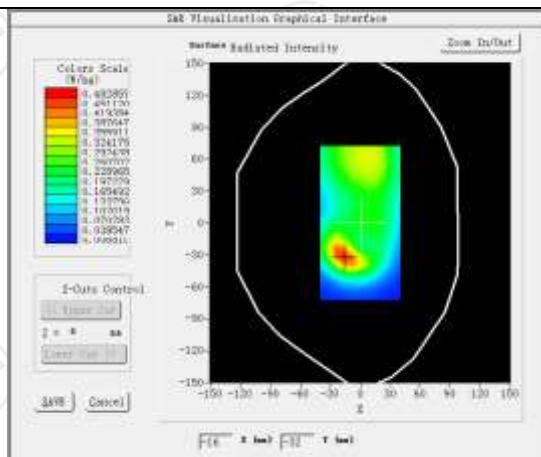


Maximum location: X=-16.00, Y=-32.00

SAR Peak: 0.70 W/kg


SAR 10g (W/Kg)	0.251808
SAR 1g (W/Kg)	0.435196

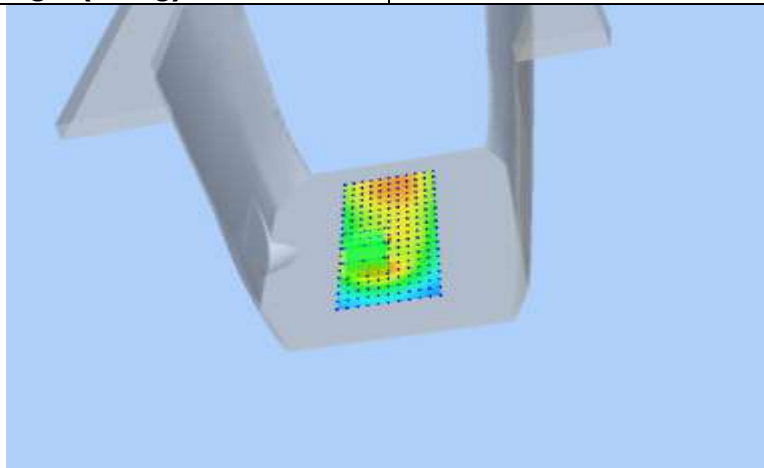

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6962	0.4629	0.2763	0.1710	0.1140


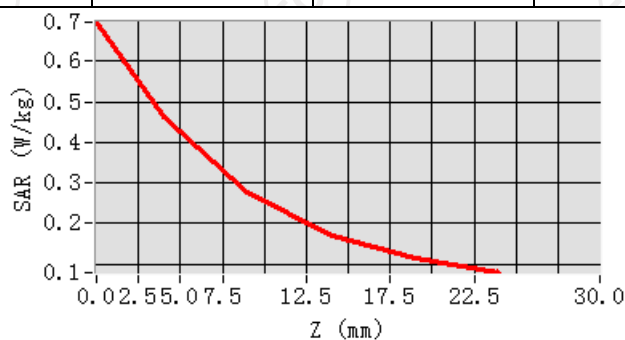



Hot spot position

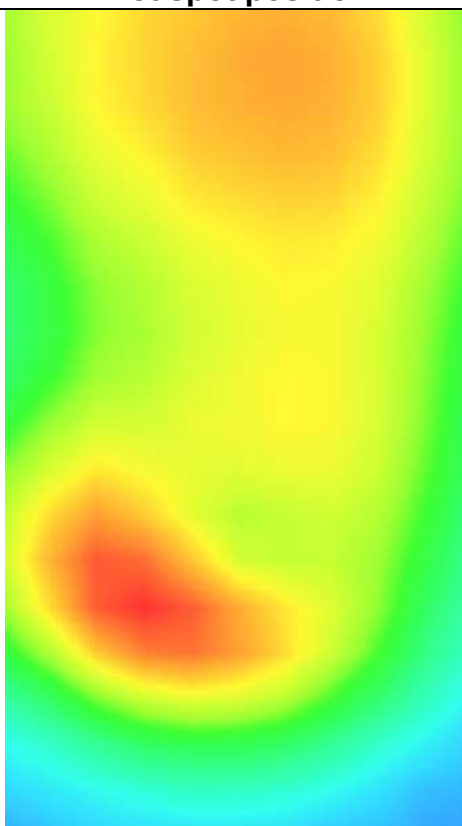


WLAN 2.4G

MEASUREMENT 1

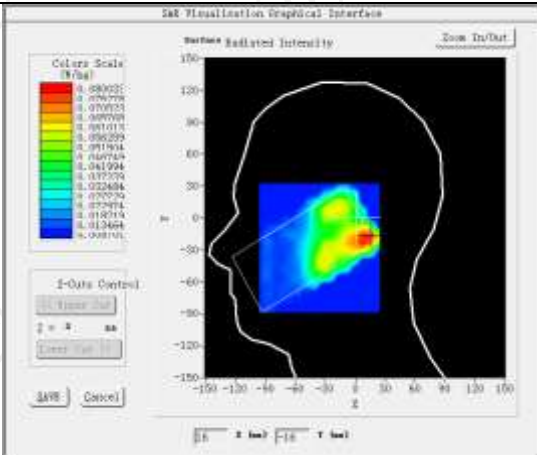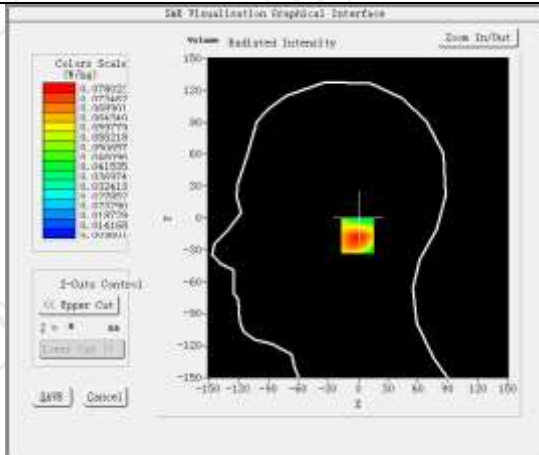
Low Band SAR (Channel 1):		Date: 11/26/2024
Frequency (MHz)	2412.000000	
Relative permittivity (real part)	38.401193	
Relative permittivity (imaginary part)	13.605829	
Conductivity (S/m)	1.796190	
Variation (%)	-2.120000	
Crest Factor	1.0	
Probe Conversion factor	2.31	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=12mm dy=12mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	IEEE 802.11b ISM	
SURFACE SAR	VOLUME SAR	
 		
Maximum location: X=6.00, Y=-17.00 SAR Peak: 0.13 W/kg		
SAR 10g (W/Kg)	0.044359	
SAR 1g (W/Kg)	0.075033	

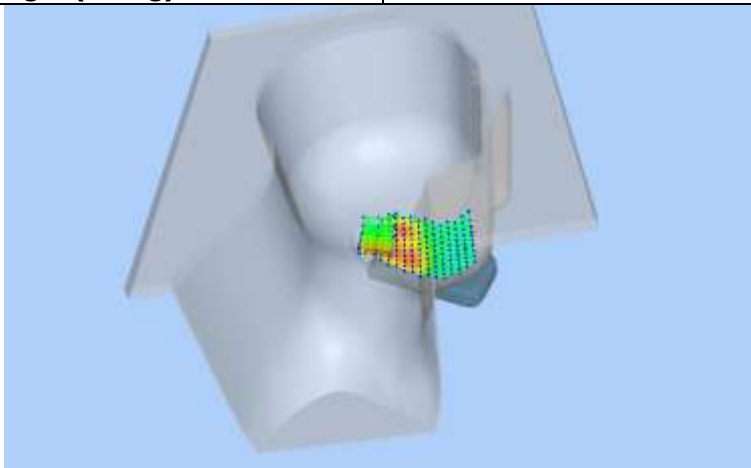

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1262	0.0780	0.0430	0.0262	0.0194

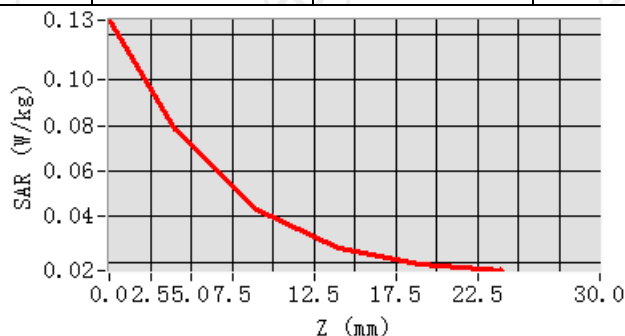

Hot spot position

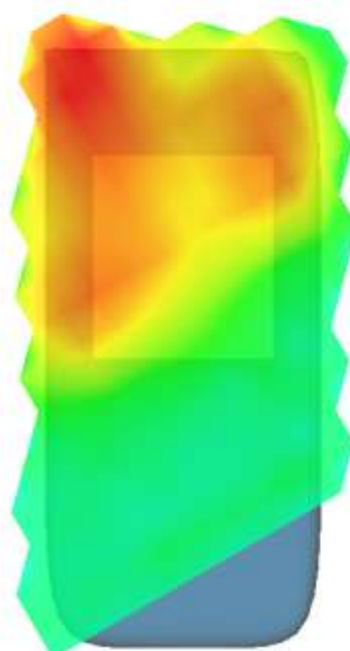



MEASUREMENT 2

Low Band SAR (Channel 1):

Date: 11/26/2024


Frequency (MHz)	2412.000000
Relative permittivity (real part)	38.401193
Relative permittivity (imaginary part)	13.605829
Conductivity (S/m)	1.796190
Variation (%)	-1.090000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11b ISM</u>
SURFACE SAR	VOLUME SAR

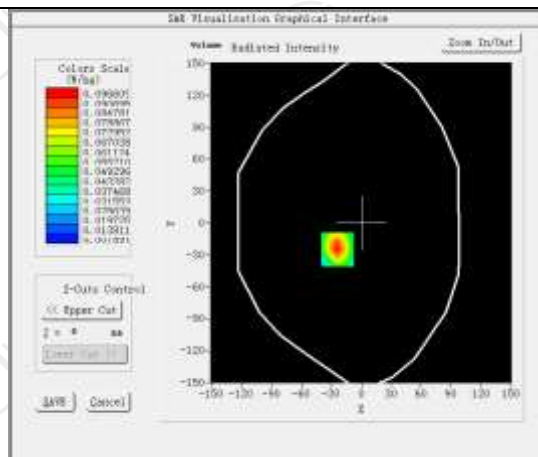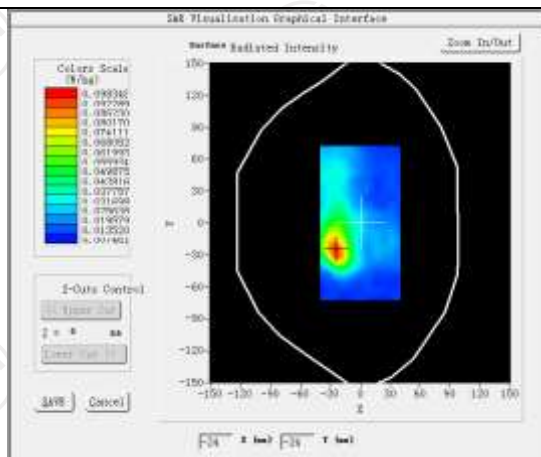


Maximum location: X=-24.00, Y=-25.00 SAR Peak: 0.16 W/kg


SAR 10g (W/Kg)	0.050127
SAR 1g (W/Kg)	0.090860

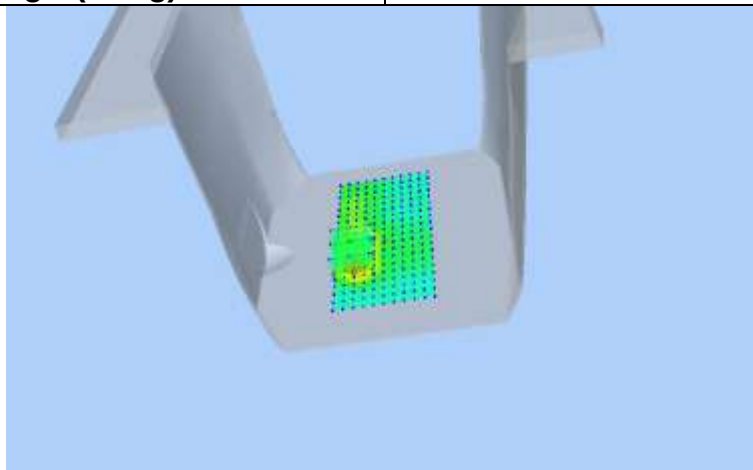

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1571	0.0966	0.0524	0.0308	0.0215

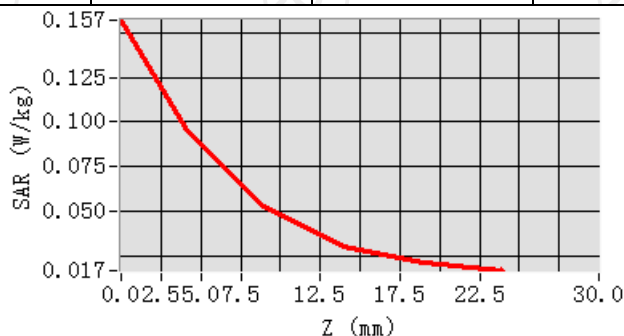

Hot spot position

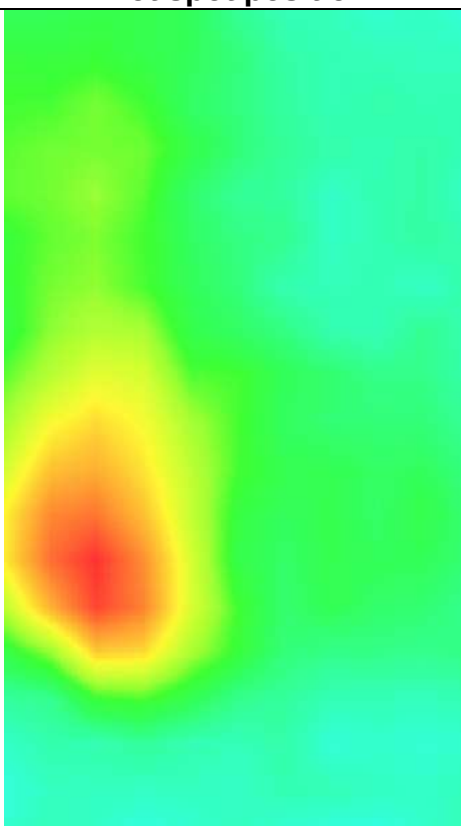



MEASUREMENT 3

Low Band SAR (Channel 1):

Date: 11/26/2024


Frequency (MHz)	2412.000000
Relative permittivity (real part)	38.401193
Relative permittivity (imaginary part)	13.605829
Conductivity (S/m)	1.796190
Variation (%)	-1.210000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11b ISM(hotspot)</u>
SURFACE SAR	VOLUME SAR

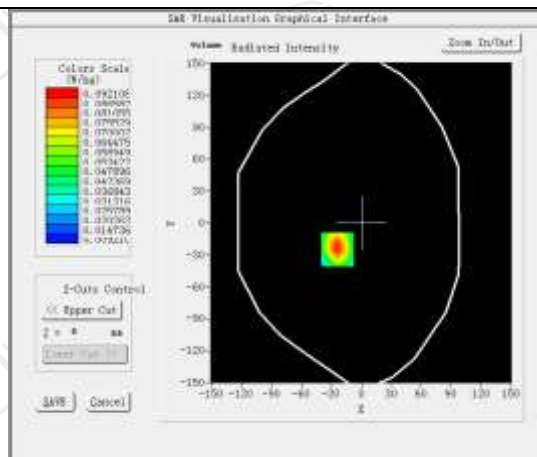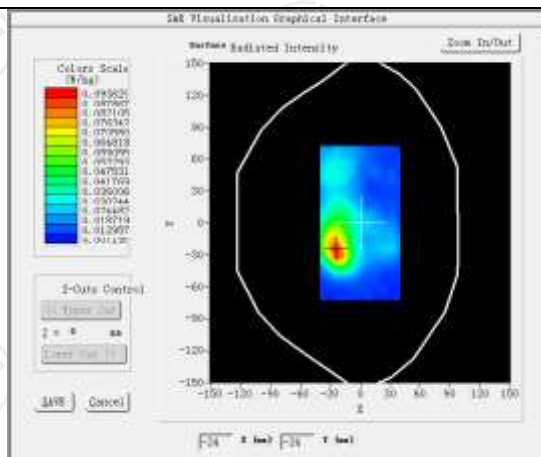


Maximum location: X=-24.00, Y=-25.00 SAR Peak: 0.14 W/kg


SAR 10g (W/Kg)	0.048889
SAR 1g (W/Kg)	0.086520

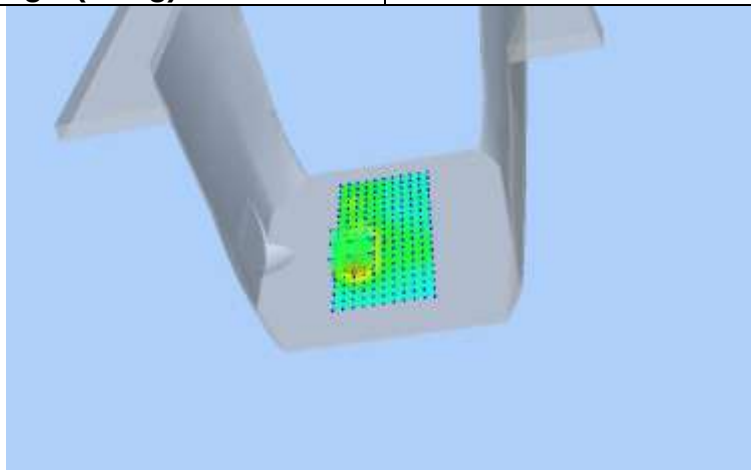

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1420	0.0921	0.0531	0.0318	0.0207


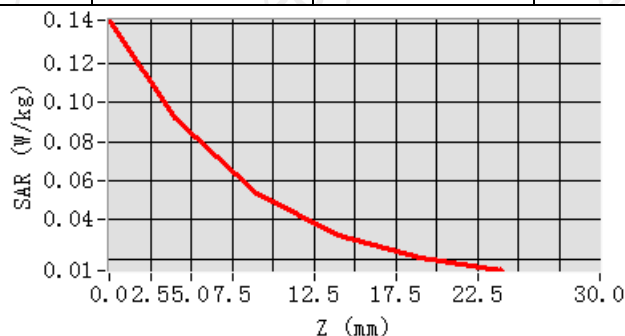



Hot spot position

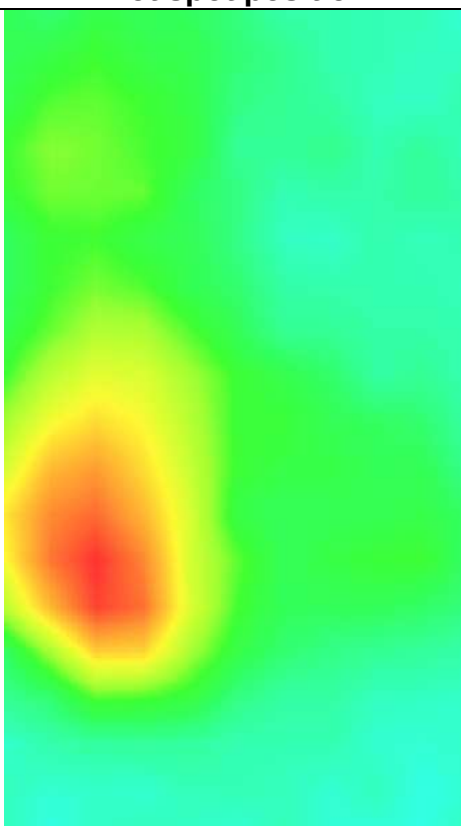


WLAN 5.2G

MEASUREMENT 1

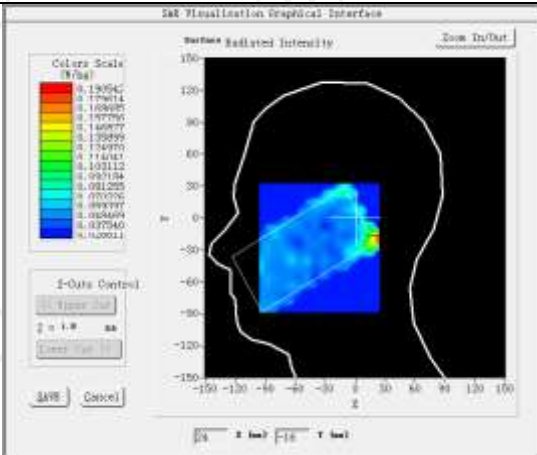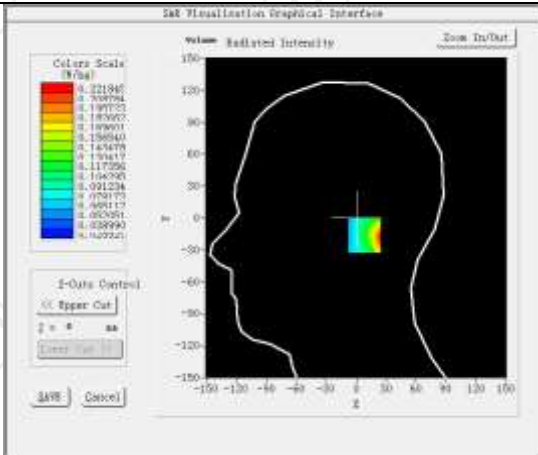
High Band SAR (Channel 48):		Date: 12/02/2024
Frequency (MHz)	5240.000000	
Relative permittivity (real part)	35.676992	
Relative permittivity (imaginary part)	13.605972	
Conductivity (S/m)	4.609588	
Variation (%)	1.970000	
Crest Factor	1.0	
Probe Conversion factor	2.01	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=10mm dy=10mm, h= 5.00 mm	
ZoomScan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=4mm dy=4mm, h= 2.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	IEEE 802.11n U-NII	
SURFACE SAR	VOLUME SAR	
		
Maximum location: X=16.00, Y=-16.00 SAR Peak: 0.48 W/kg		
SAR 10g (W/Kg)	0.094237	
SAR 1g (W/Kg)	0.200206	

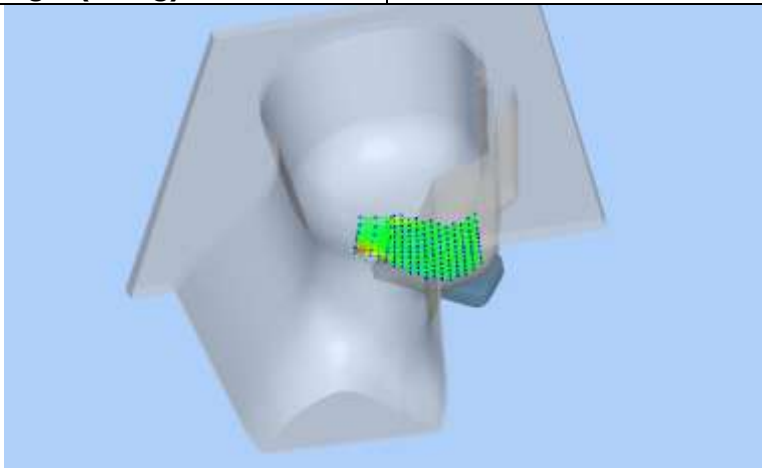

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.4093	0.2218	0.0427	0.0376	0.0400

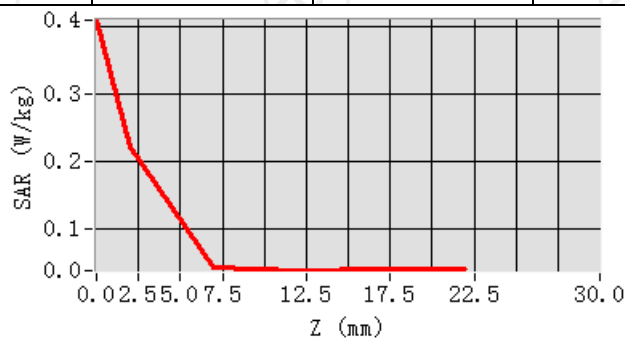

Hot spot position

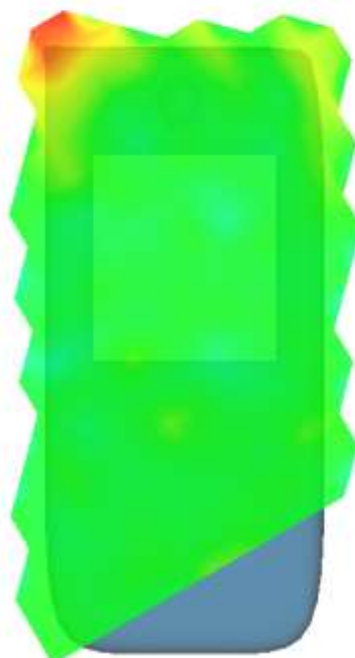



MEASUREMENT 2

High Band SAR (Channel 48):

Date: 12/02/2024


Frequency (MHz)	5240.000000
Relative permittivity (real part)	35.676992
Relative permittivity (imaginary part)	13.605972
Conductivity (S/m)	4.609588
Variation (%)	-1.000000
Crest Factor	1.0
Probe Conversion factor	2.01
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	IEEE 802.11n U-NII
SURFACE SAR	VOLUME SAR

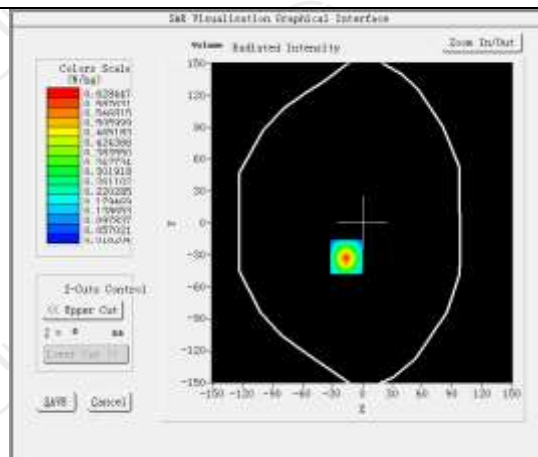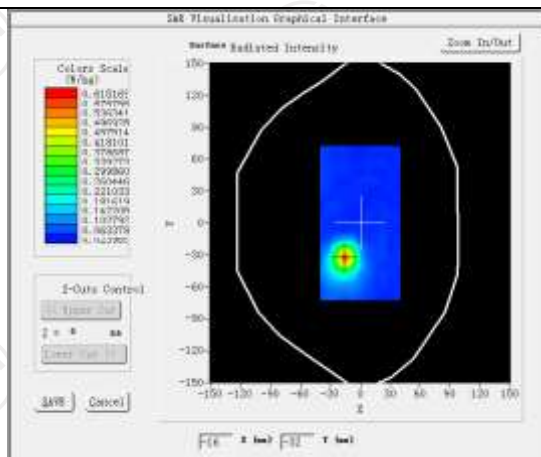


Maximum location: X=-16.00, Y=-32.00 SAR Peak: 1.30 W/kg


SAR 10g (W/Kg)	0.147374
SAR 1g (W/Kg)	0.367260

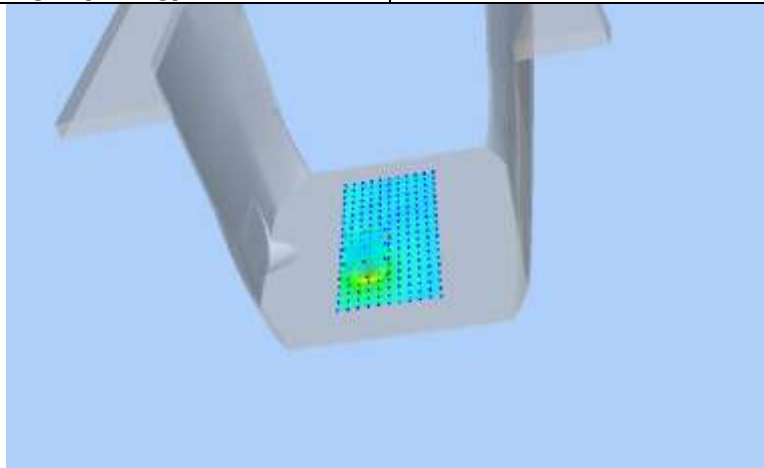

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.9989	0.6284	0.1571	0.0336	0.0162

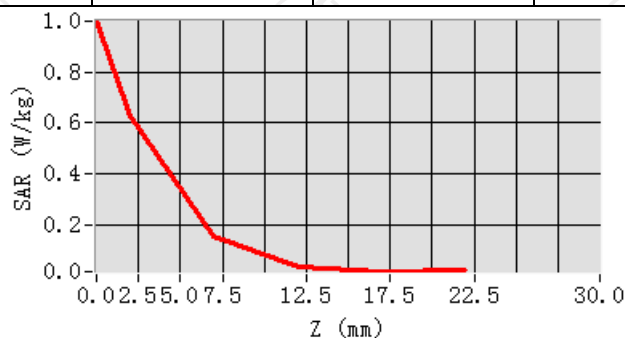

Hot spot position

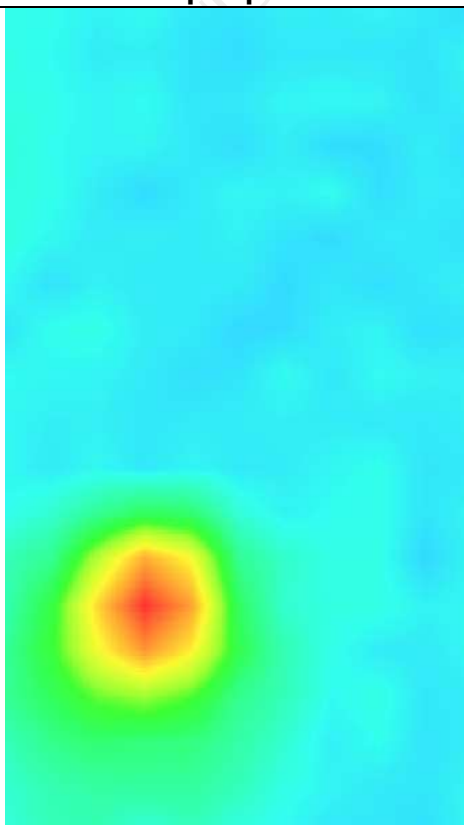



MEASUREMENT 3

High Band SAR (Channel 48):

Date: 12/02/2024


Frequency (MHz)	5240.000000
Relative permittivity (real part)	35.676992
Relative permittivity (imaginary part)	13.605972
Conductivity (S/m)	4.609588
Variation (%)	1.140000
Crest Factor	1.0
Probe Conversion factor	2.01
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11n U-NII(hotspot)</u>
SURFACE SAR	VOLUME SAR

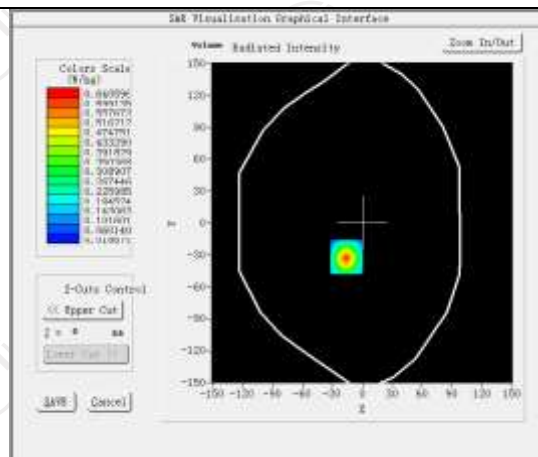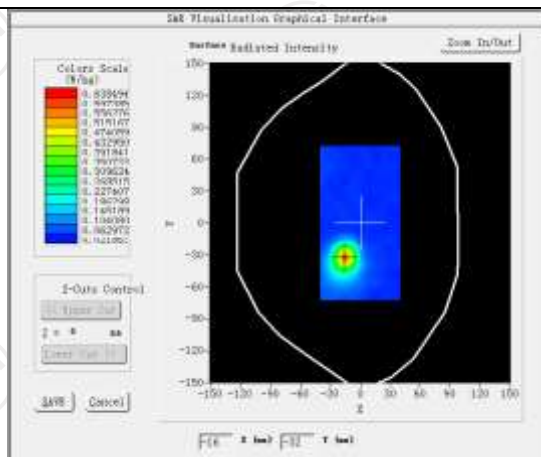


Maximum location: X=-16.00, Y=-32.00 SAR Peak: 1.04 W/kg


SAR 10g (W/Kg)	0.151734
SAR 1g (W/Kg)	0.377640

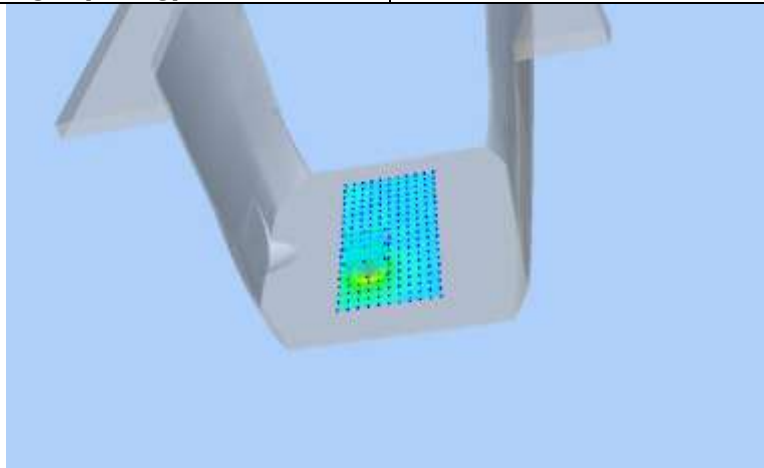

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.0103	0.6406	0.1672	0.0409	0.0237

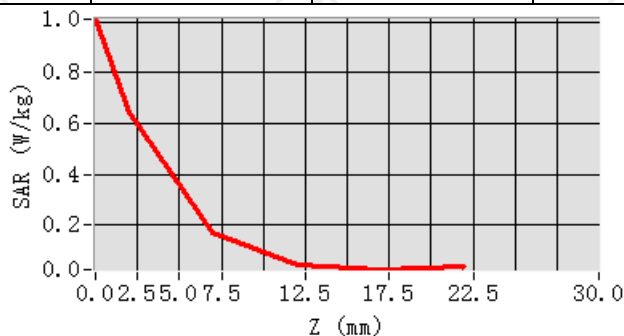


Hot spot position

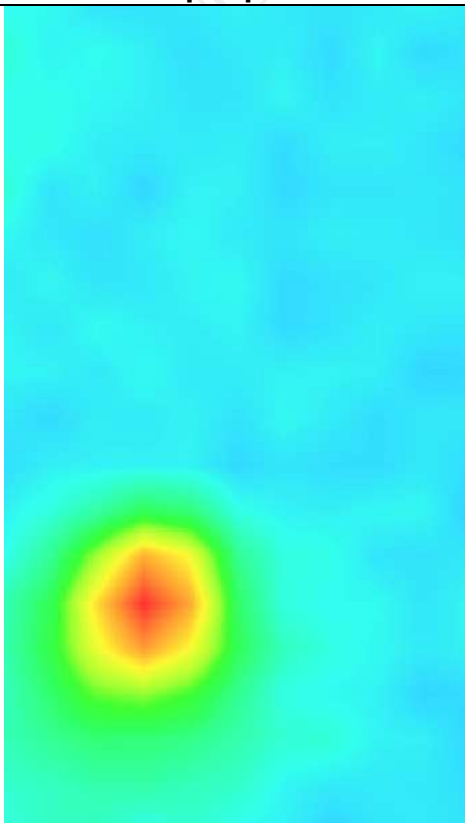


WLAN 5.3G

MEASUREMENT 1


High Band SAR (Channel 58):		Date: 12/04/2024
Frequency (MHz)	5290.000000	
Relative permittivity (real part)	35.632692	
Relative permittivity (imaginary part)	13.633087	
Conductivity (S/m)	4.644338	
Variation (%)	-2.810000	
Crest Factor	1.0	
Probe Conversion factor	1.94	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=10mm dy=10mm, h= 5.00 mm	
ZoomScan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=4mm dy=4mm, h= 2.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	IEEE 802.11ac U-NII	
SURFACE SAR	VOLUME SAR	
Maximum location: X=16.00, Y=-14.00 SAR Peak: 0.78 W/kg		
SAR 10g (W/Kg)	0.114075	
SAR 1g (W/Kg)	0.296186	

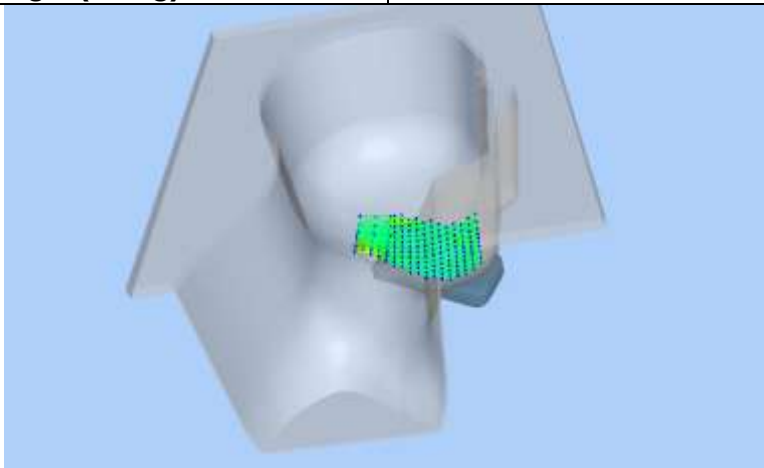

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.6877	0.3450	0.0360	0.0366	0.0339

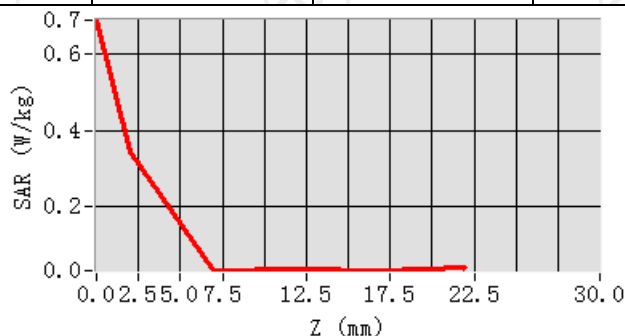

Hot spot position

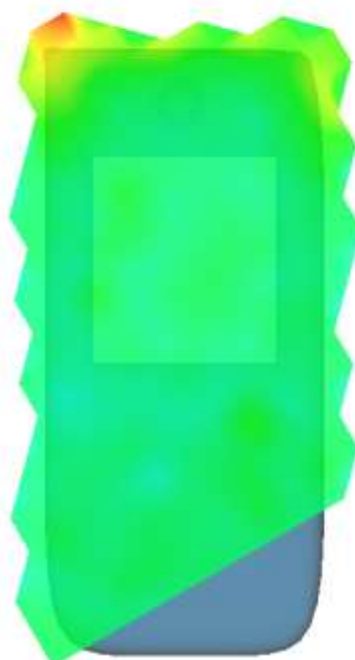



MEASUREMENT 2

High Band SAR (Channel 58):

Date: 12/04/2024


Frequency (MHz)	5290.000000
Relative permittivity (real part)	35.632692
Relative permittivity (imaginary part)	13.633087
Conductivity (S/m)	4.644338
Variation (%)	-1.710000
Crest Factor	1.0
Probe Conversion factor	1.94
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	IEEE 802.11ac U-NII
SURFACE SAR	VOLUME SAR

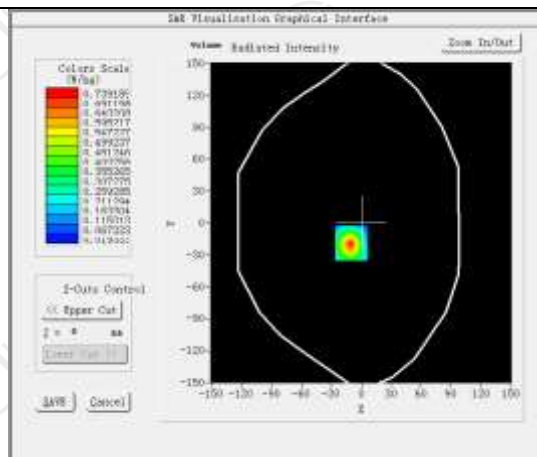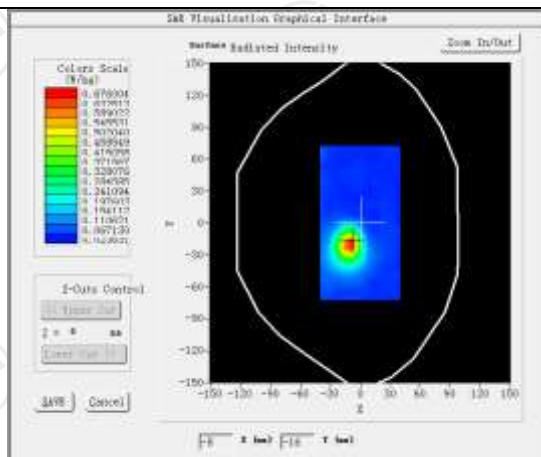


Maximum location: X=-10.00, Y=-19.00 SAR Peak: 1.22 W/kg


SAR 10g (W/Kg)	0.175756
SAR 1g (W/Kg)	0.437160

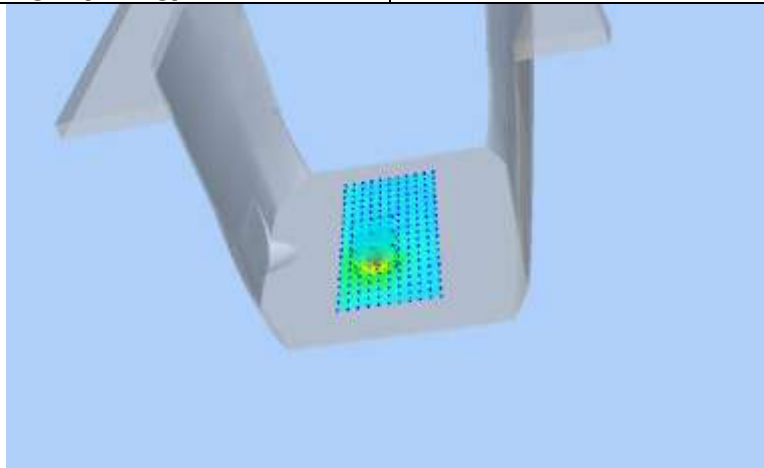

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.1730	0.7392	0.1860	0.0402	0.0193

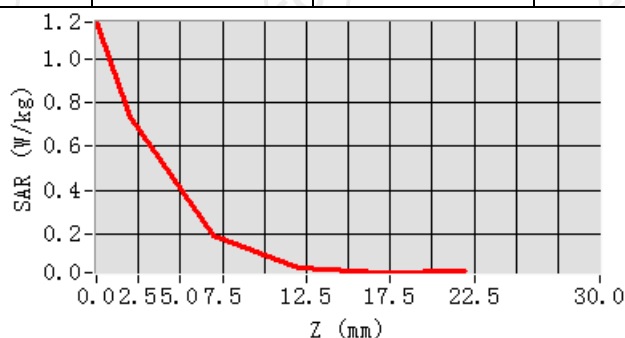

Hot spot position

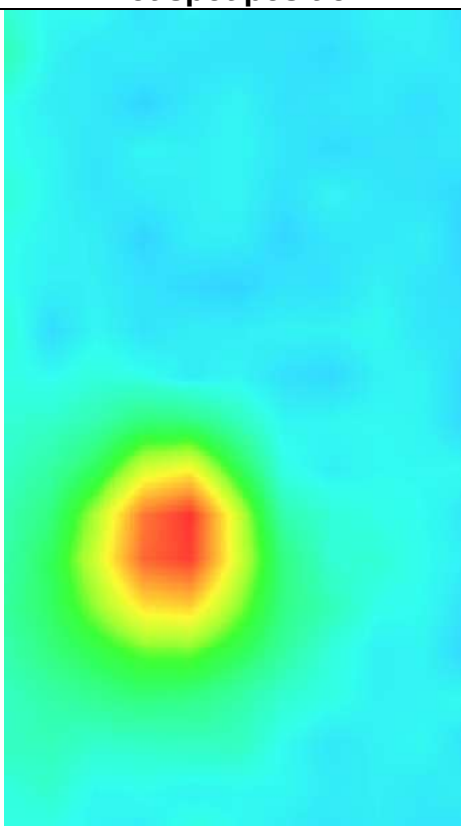



MEASUREMENT 3

High Band SAR (Channel 58):

Date: 12/04/2024


Frequency (MHz)	5290.000000
Relative permittivity (real part)	35.632692
Relative permittivity (imaginary part)	13.633087
Conductivity (S/m)	4.644338
Variation (%)	0.030000
Crest Factor	1.0
Probe Conversion factor	1.94
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11ac U-NII(hotspot)</u>
SURFACE SAR	VOLUME SAR

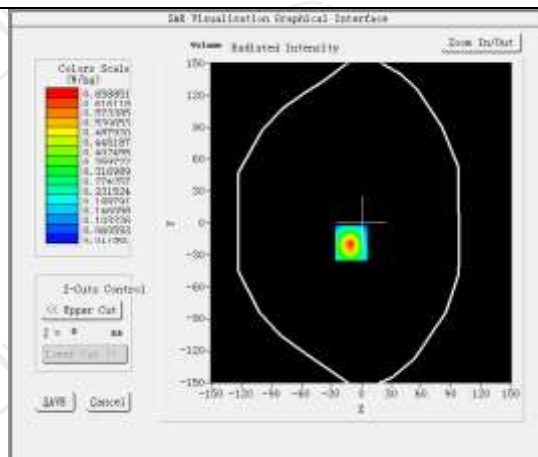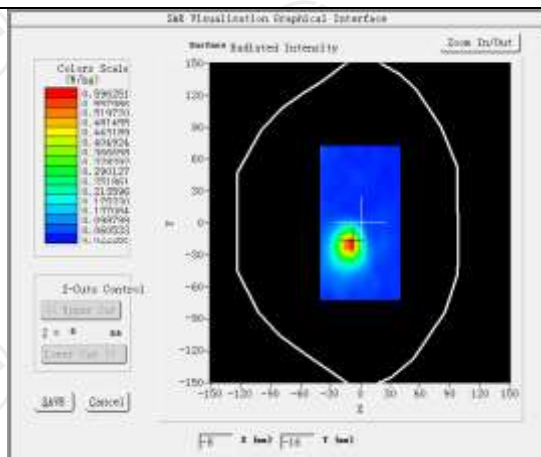


Maximum location: X=-10.00, Y=-19.00 SAR Peak: 1.10 W/kg


SAR 10g (W/Kg)	0.157535
SAR 1g (W/Kg)	0.388533

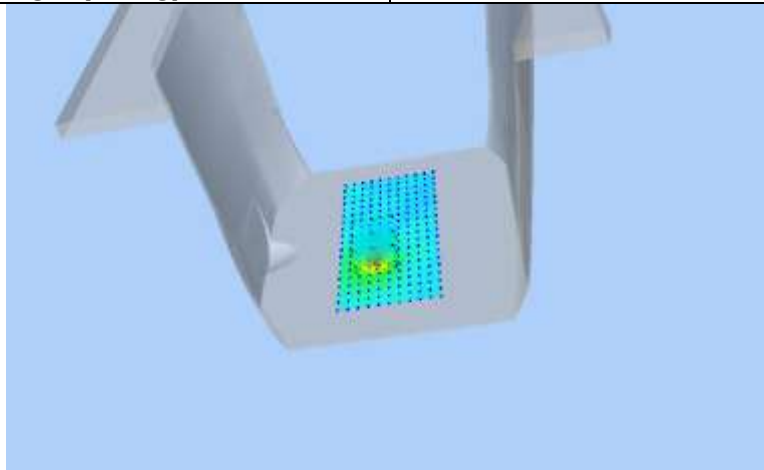

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.0530	0.6589	0.1612	0.0341	0.0179


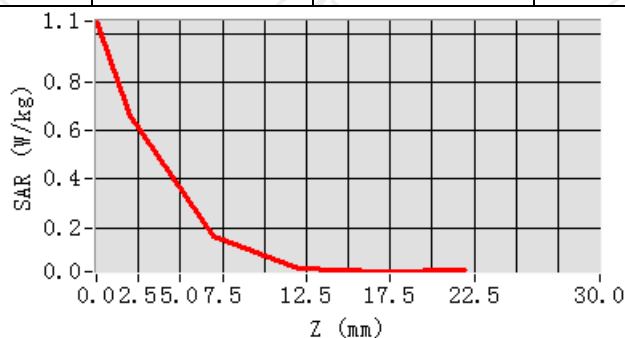



Hot spot position

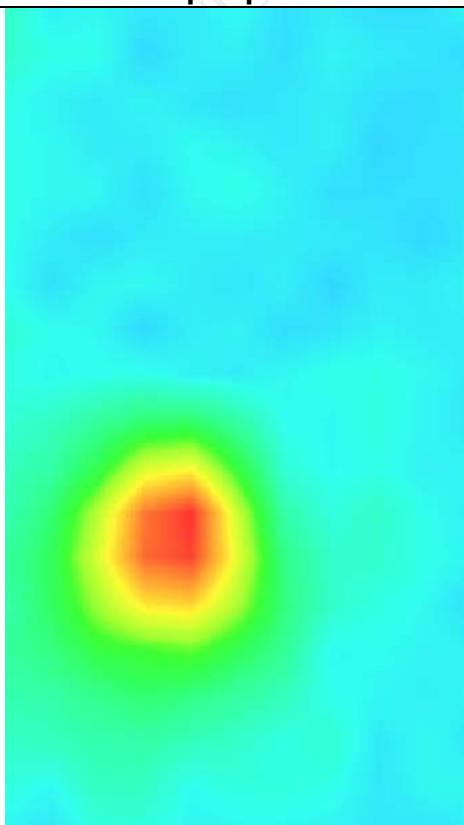


WLAN 5.8G

MEASUREMENT 1

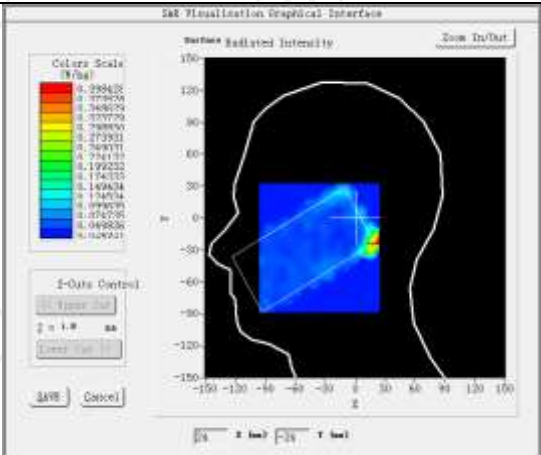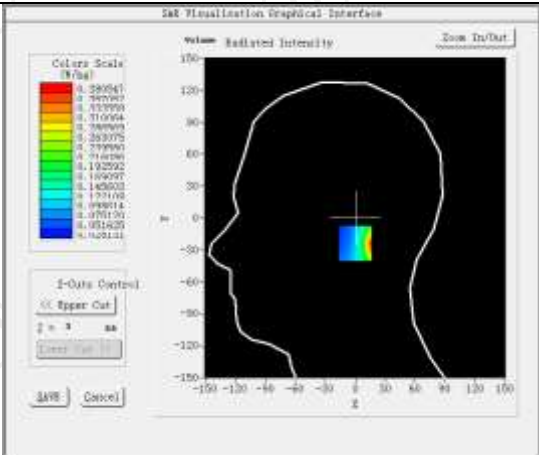
High Band SAR (Channel 155):		Date: 12/06/2024
Frequency (MHz)	5775.000000	
Relative permittivity (real part)	34.803475	
Relative permittivity (imaginary part)	13.811216	
Conductivity (S/m)	5.162225	
Variation (%)	-1.730000	
Crest Factor	1.0	
Probe Conversion factor	2.06	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=10mm dy=10mm, h= 5.00 mm	
ZoomScan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=4mm dy=4mm, h= 2.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	IEEE 802.11ac U-NII	
SURFACE SAR	VOLUME SAR	
		
Maximum location: X=8.00, Y=-24.00 SAR Peak: 0.78 W/kg		
SAR 10g (W/Kg)	0.114866	
SAR 1g (W/Kg)	0.308724	

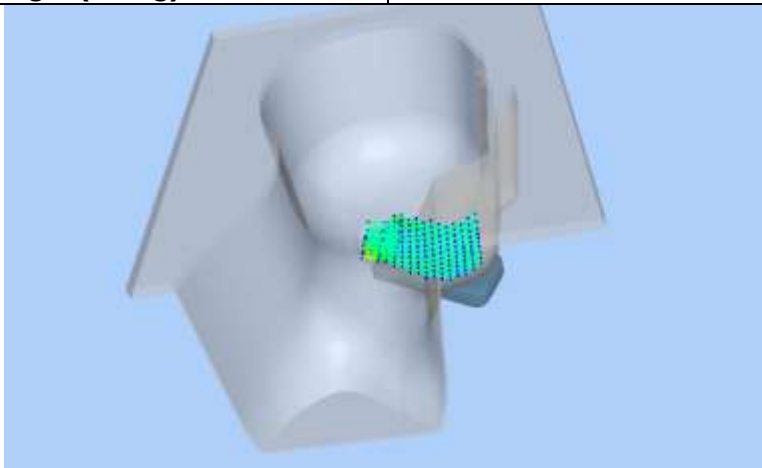

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	0.7860	0.3805	0.0430	0.0568	0.0358

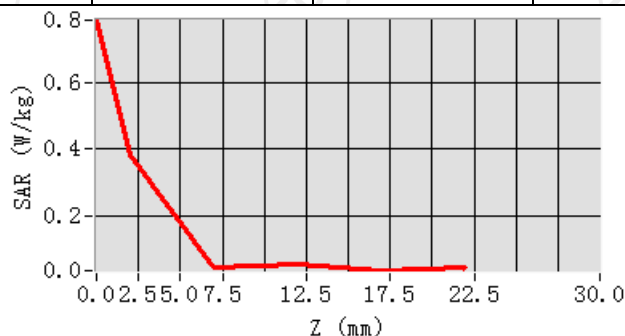

Hot spot position

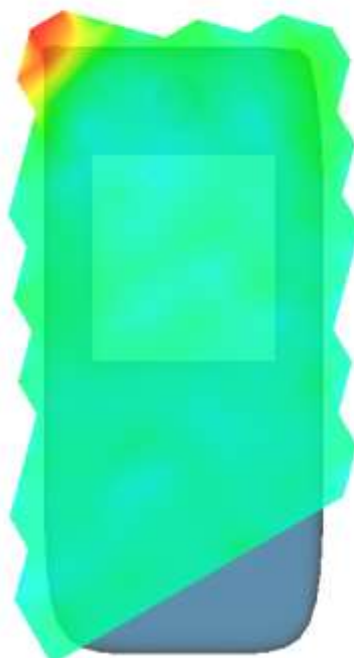



MEASUREMENT 2

High Band SAR (Channel 155):

Date: 12/06/2024


Frequency (MHz)	5775.000000
Relative permittivity (real part)	34.803475
Relative permittivity (imaginary part)	13.811216
Conductivity (S/m)	5.162225
Variation (%)	-1.480000
Crest Factor	1.0
Probe Conversion factor	2.06
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	IEEE 802.11ac U-NII
SURFACE SAR	VOLUME SAR

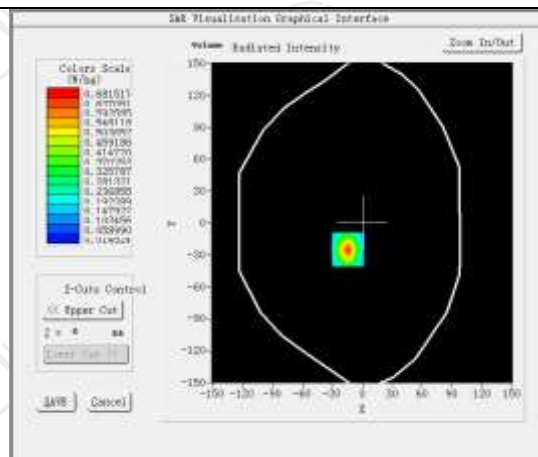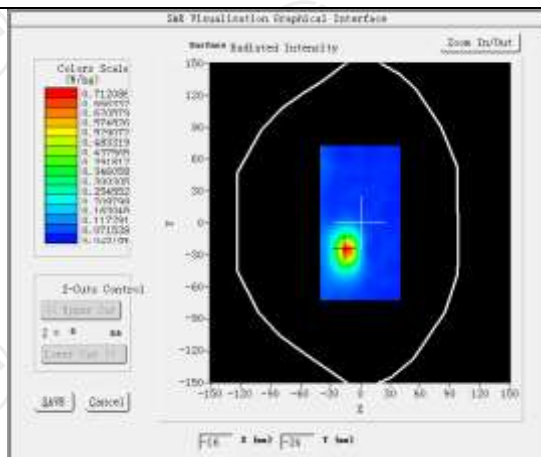


Maximum location: X=-14.00, Y=-25.00 SAR Peak: 1.18 W/kg


SAR 10g (W/Kg)	0.155642
SAR 1g (W/Kg)	0.390553

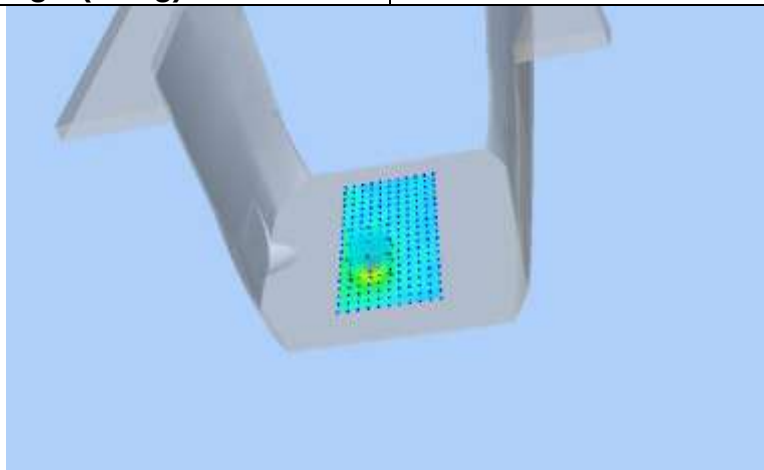

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.1334	0.6815	0.1391	0.0222	0.0145

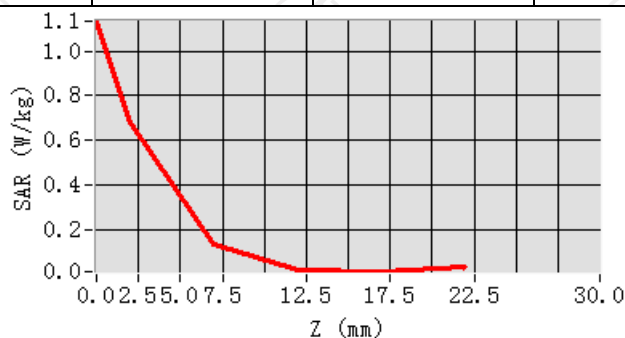

Hot spot position

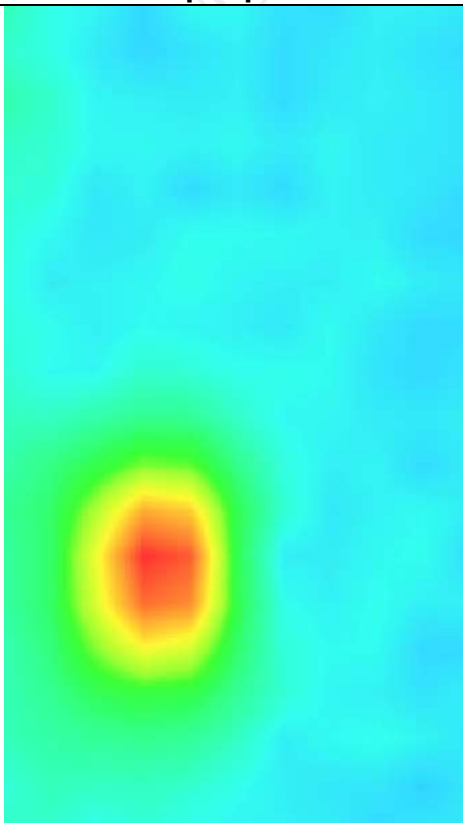



MEASUREMENT 3

High Band SAR (Channel 155):

Date: 12/06/2024


Frequency (MHz)	5775.000000
Relative permittivity (real part)	34.803475
Relative permittivity (imaginary part)	13.811216
Conductivity (S/m)	5.162225
Variation (%)	-1.040000
Crest Factor	1.0
Probe Conversion factor	2.06
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=10mm dy=10mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm</u> <u>dz=2mm,Complete/ndx=4mm dy=4mm, h=</u> <u>2.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11ac U-NII(hotspot)</u>
SURFACE SAR	VOLUME SAR

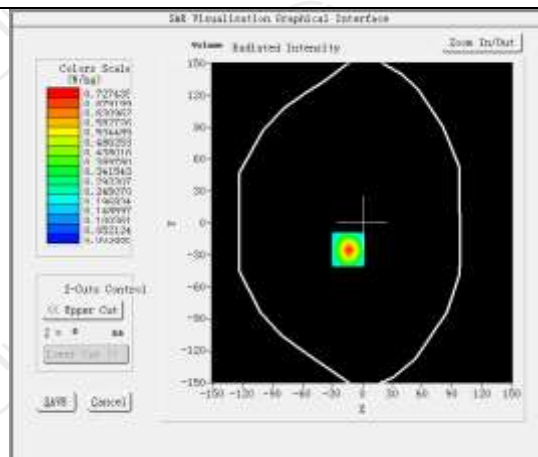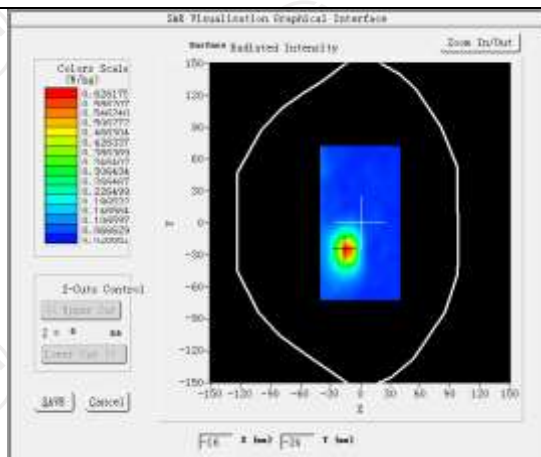


Maximum location: X=-14.00, Y=-25.00 SAR Peak: 1.27 W/kg


SAR 10g (W/Kg)	0.172300
SAR 1g (W/Kg)	0.423377

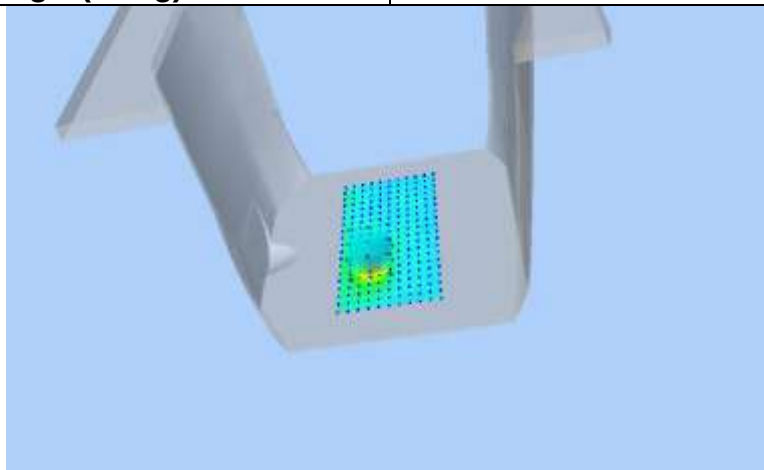

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.2176	0.7274	0.1434	0.0209	0.0135



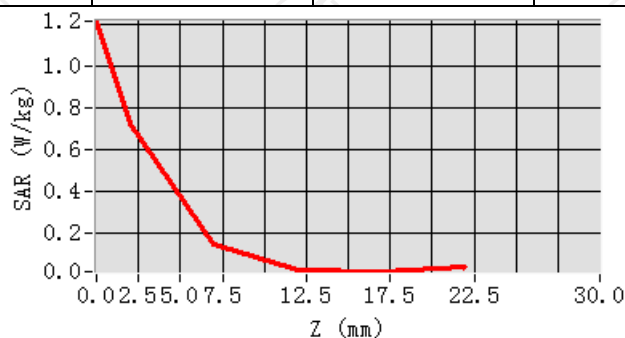


Hot spot position

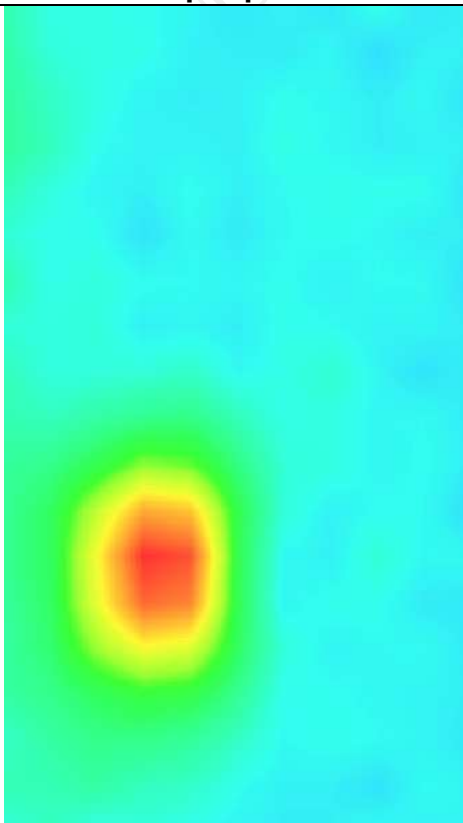


Bluetooth


MEASUREMENT 1

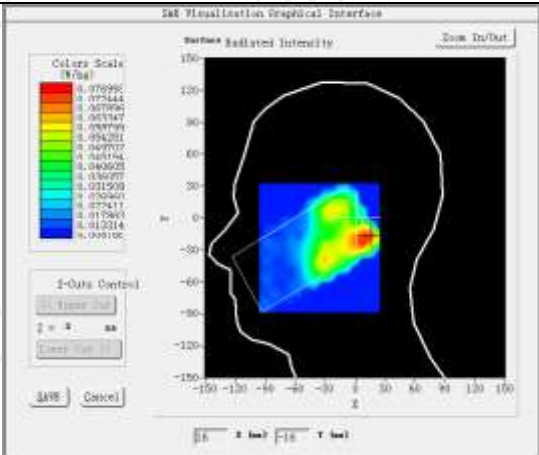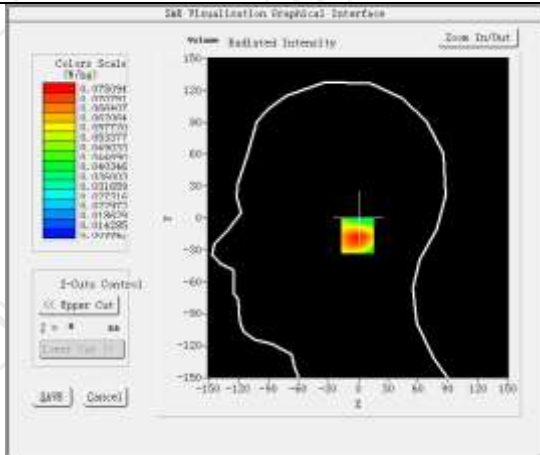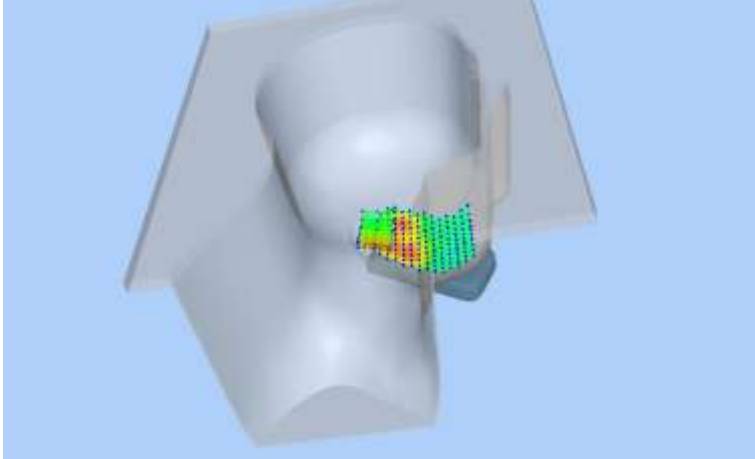High Band SAR (Channel 78):		Date: 11/26/2024				
Frequency (MHz)	2480.000000					
Relative permittivity (real part)	38.285170					
Relative permittivity (imaginary part)	13.658682					
Conductivity (S/m)	1.850834					
Variation (%)	-1.390000					
Crest Factor	1.0					
Probe Conversion factor	2.31					
E-Field Probe:	SSE2 (SN 25/22 EPG0375)					
Area Scan	dx=12mm dy=12mm, h= 5.00 mm					
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm					
Phantom	Left head					
Device Position	Cheek					
Band	Bluetooth					
SURFACE SAR	VOLUME SAR					
  Maximum location: X=6.00, Y=-17.00 SAR Peak: 0.12 W/kg <table><tr><td>SAR 10g (W/Kg)</td><td>0.042913</td></tr><tr><td>SAR 1g (W/Kg)</td><td>0.071898</td></tr></table> 			SAR 10g (W/Kg)	0.042913	SAR 1g (W/Kg)	0.071898
SAR 10g (W/Kg)	0.042913					
SAR 1g (W/Kg)	0.071898					

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1156	0.0751	0.0439	0.0275	0.0195

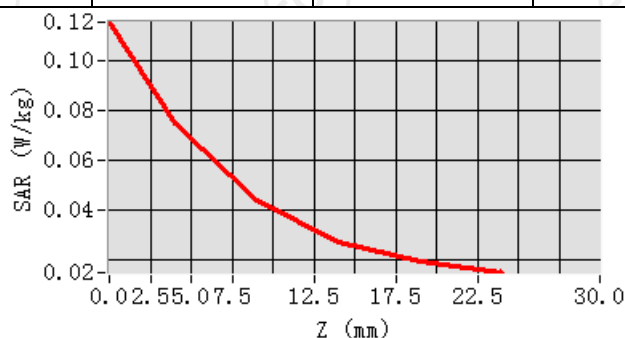

Hot spot position

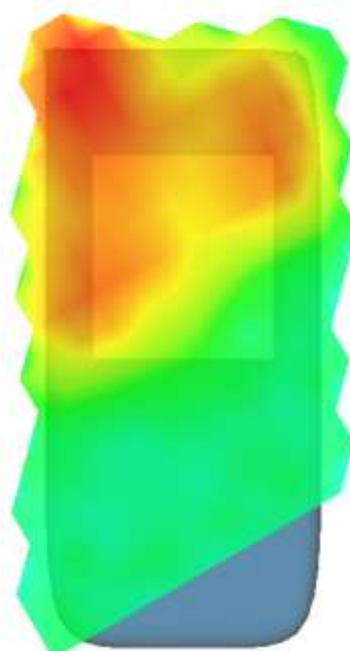



MEASUREMENT 2

High Band SAR (Channel 78):

Date: 11/26/2024

Frequency (MHz)	2480.000000
Relative permittivity (real part)	38.285170
Relative permittivity (imaginary part)	13.658682
Conductivity (S/m)	1.850834
Variation (%)	-2.770000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>


Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>Bluetooth</u>
SURFACE SAR	VOLUME SAR

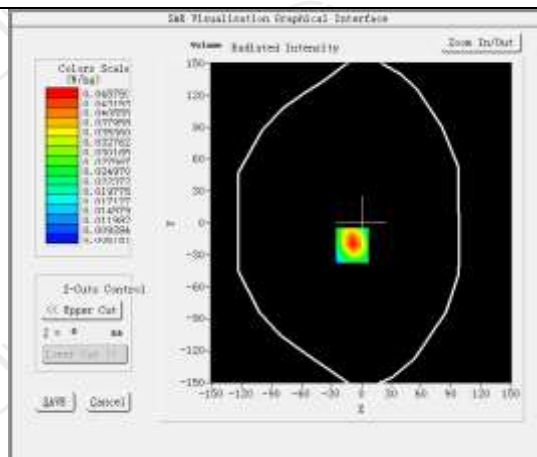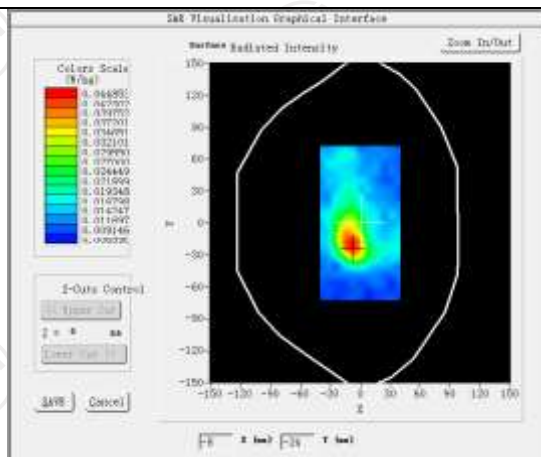


Maximum location: X=-9.00, Y=-21.00

SAR Peak: 0.08 W/kg


SAR 10g (W/Kg)	0.025037
SAR 1g (W/Kg)	0.043790

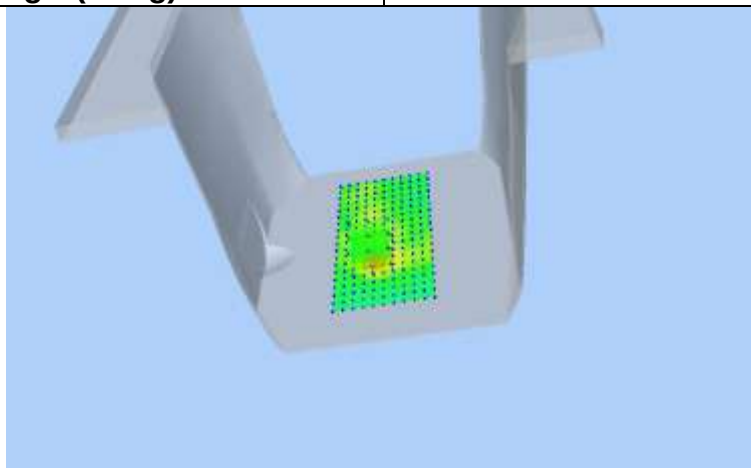

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0794	0.0457	0.0232	0.0140	0.0118

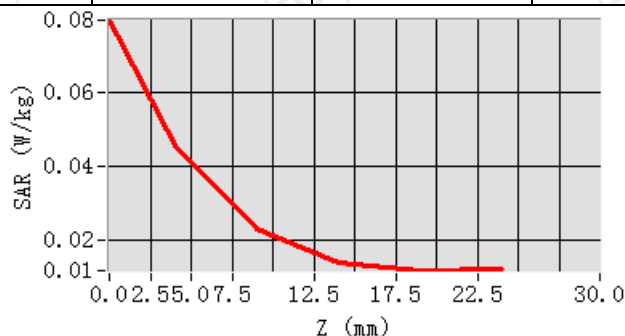

Hot spot position

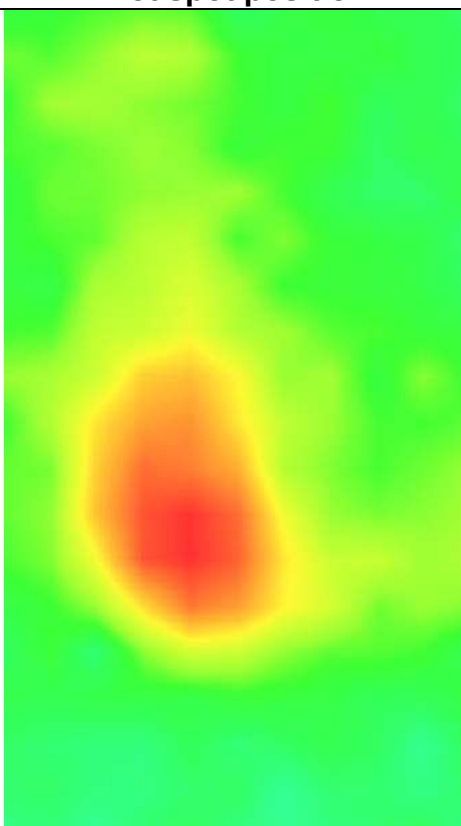

Appendix A: EUT Photos



Liquid depth



The Body Liquid of 835MHz (15.4cm)



The Body Liquid of 1800MHz (15.2 cm)



The Body Liquid of 1900MHz (16.4 cm)



The Body Liquid of 2450MHz (15.3cm)



The Body Liquid of 2600MHz (16.5cm)



The Body Liquid of 5000-6000MHz (16.5cm)



The Head Liquid of 1900MHz (15.5cm)



The Head Liquid of 2450MHz (15.6cm)



The Head Liquid of 835MHz (15.3cm)



The Head Liquid of 1800MHz (15.2cm)



The Head Liquid of 2600MHz (15.1cm)




The Head Liquid of 5000-6000MHz (15.8cm)

Appendix B: Test Setup Photos



Right Cheek

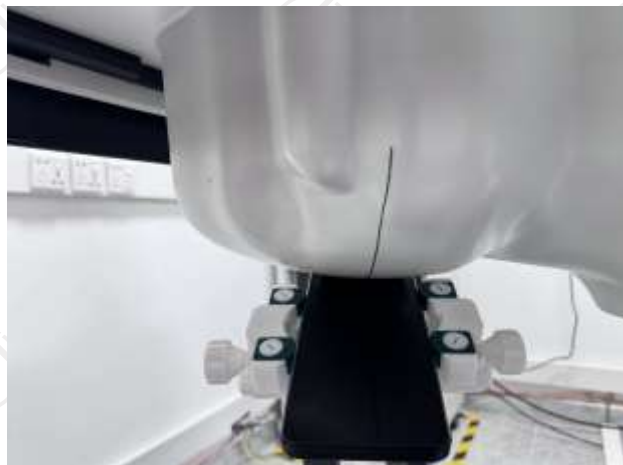

Right Tilted



Left Cheek



Left Tilted




Body worn – Front (10mm)



Body worn – Back (10mm)



Hotspo Front (10mm)

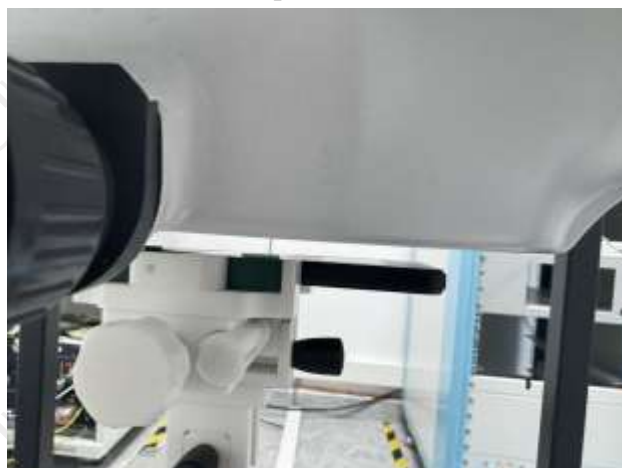

Hotspo Back (10mm)



Hotspot Top (10mm)



Hotspot Right (10mm)



Hotspot Bottom (10mm)



Hotspot Left (10mm)

Appendix C: Probe Calibration Certificate

COMOSAR E-FIELD Probe



COMOSAR E-Field Probe Calibration Report

Ref : ACR.180.7.22.BES.B

SHENZHEN TONGCE TESTING LAB

2101 & 2201, ZHENCHANG FACTORY RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAO'AN DISTRICT SHENZHEN,
GUANGDONG, 518103, PEOPLE'S REPUBLIC OF CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 25/22 EPG0375

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 06/29/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22 BES B

	Name	Function	Date	Signature
Prepared by :	Jérôme Le Gall	Measurement Responsible	6/30/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	6/30/2024	
Authorized by:	Yann Toutain	Laboratory Director	7/05/2024	

	Customer Name
Distribution :	Shenzhen Tongce Testing Lab

Issue	Name	Date	Modifications
A	Jérôme Le Gall	6/30/2024	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22 BES.B

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	4
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10

**1 DEVICE UNDER TEST**

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 25/22 EPG0375
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.197 MΩ Dipole 2: R2=0.230 MΩ Dipole 3: R3=0.208 MΩ

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

Page: 4/11

Template_ACR.DDD.N.IY.MVGB.ISSUE_COMOSAR_Probe_vE

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.