

1_HAC RF_GSM850_GSM Voice_Ch128_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch128/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.32 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 35.19 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 34.49 dBV/m	Grid 2 M4 34.92 dBV/m	Grid 3 M4 34.09 dBV/m
Grid 4 M4 34.77 dBV/m	Grid 5 M4 35.19 dBV/m	Grid 6 M4 34.4 dBV/m
Grid 7 M4 34.64 dBV/m	Grid 8 M4 34.96 dBV/m	Grid 9 M4 34.24 dBV/m

Cursor:

Total = 35.19 dBV/m

E Category: M4

Location: 1, 0, 7.7 mm

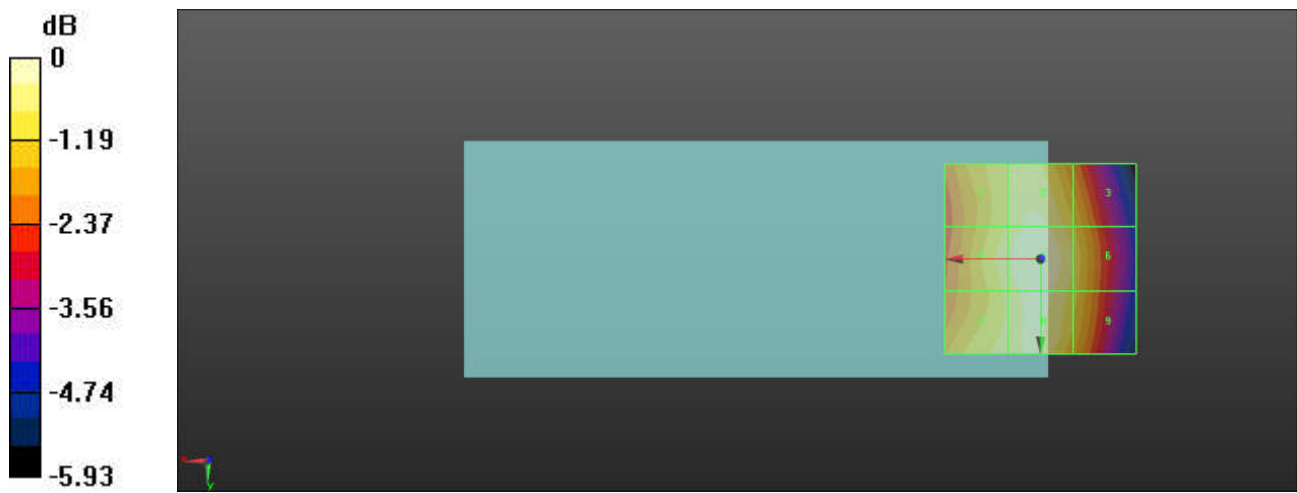

2_HAC RF_GSM850_GSM Voice_Ch189_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch189/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 56.32 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.04 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.25 dBV/m	Grid 2 M4 35.73 dBV/m	Grid 3 M4 34.89 dBV/m
Grid 4 M4 35.55 dBV/m	Grid 5 M4 36.04 dBV/m	Grid 6 M4 35.21 dBV/m
Grid 7 M4 35.48 dBV/m	Grid 8 M4 35.81 dBV/m	Grid 9 M4 35.07 dBV/m

Cursor:

Total = 36.04 dBV/m

E Category: M4

Location: 1, 0, 7.7 mm

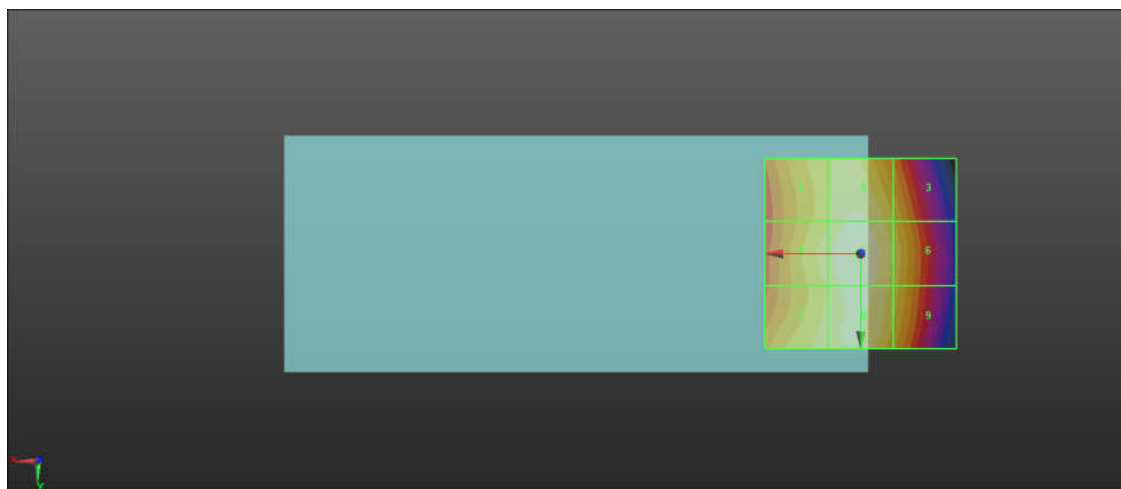

0 dB = 63.39 V/m = 36.04 dBV/m

3_HAC RF_GSM850_GSM Voice_Ch251_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.42 V/m; Power Drift = -0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.25 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 35.5 dBV/m	Grid 2 M4 35.96 dBV/m	Grid 3 M4 35.13 dBV/m
Grid 4 M4 35.82 dBV/m	Grid 5 M4 36.25 dBV/m	Grid 6 M4 35.47 dBV/m
Grid 7 M4 35.79 dBV/m	Grid 8 M4 36.04 dBV/m	Grid 9 M4 35.33 dBV/m

Cursor:

Total = 36.25 dBV/m

E Category: M4

Location: 1, 0.5, 7.7 mm

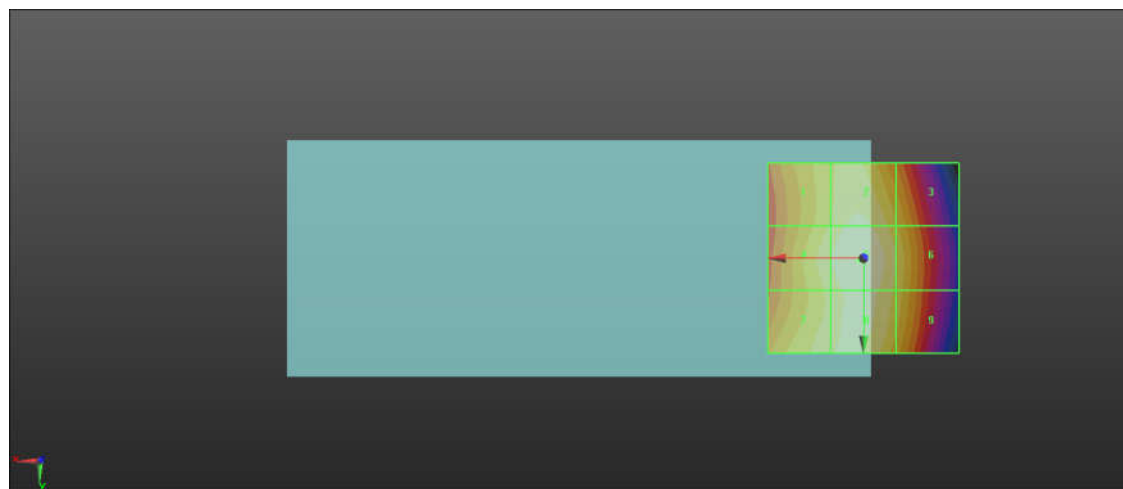

0 dB = 64.92 V/m = 36.25 dBV/m

4_HAC RF_GSM1900_GSM Voice_Ch512_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch512/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.715 V/m; Power Drift = -0.14 dB

Applied MIF = 3.63 dB

RF audio interference level = 25.60 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24 dBV/m	Grid 2 M4 24 dBV/m	Grid 3 M4 22.89 dBV/m
Grid 4 M4 22.37 dBV/m	Grid 5 M4 22.46 dBV/m	Grid 6 M4 22.18 dBV/m
Grid 7 M4 25.53 dBV/m	Grid 8 M4 25.6 dBV/m	Grid 9 M4 24.6 dBV/m

Cursor:

Total = 25.60 dBV/m

E Category: M4

Location: 4.5, 25, 7.7 mm

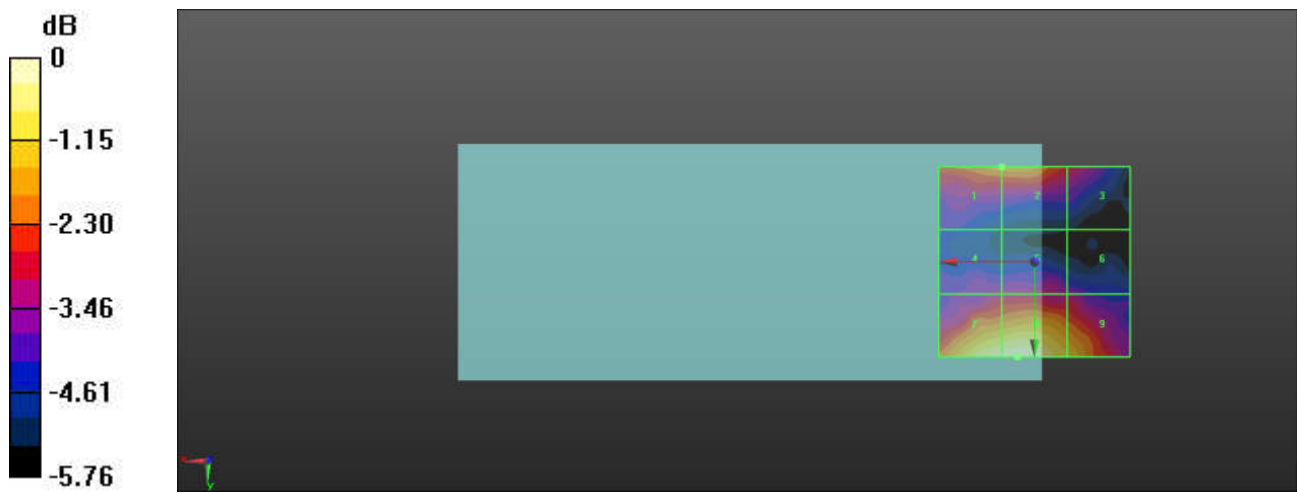

0 dB = 19.06 V/m = 25.60 dBV/m

5_HAC RF_GSM1900_GSM Voice_Ch661_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch661/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.306 V/m; Power Drift = -0.25 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.76 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.97 dBV/m	Grid 2 M4 24.01 dBV/m	Grid 3 M4 22.86 dBV/m
Grid 4 M4 21.82 dBV/m	Grid 5 M4 22.12 dBV/m	Grid 6 M4 21.9 dBV/m
Grid 7 M4 24.47 dBV/m	Grid 8 M4 24.76 dBV/m	Grid 9 M4 23.92 dBV/m

Cursor:

Total = 24.76 dBV/m

E Category: M4

Location: 1, 25, 7.7 mm

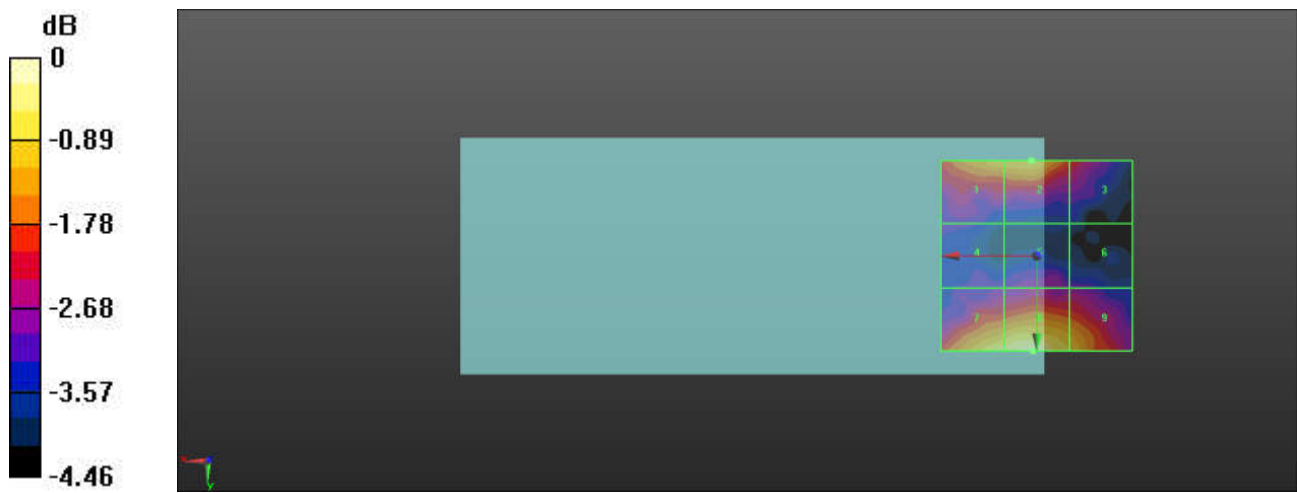

0 dB = 17.30 V/m = 24.76 dBV/m

6_HAC RF_GSM1900_GSM Voice_Ch810_E

Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.638 V/m; Power Drift = -0.34 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.68 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.44 dBV/m	Grid 2 M4 24.43 dBV/m	Grid 3 M4 23.13 dBV/m
Grid 4 M4 22.01 dBV/m	Grid 5 M4 21.98 dBV/m	Grid 6 M4 21.78 dBV/m
Grid 7 M4 24.53 dBV/m	Grid 8 M4 24.68 dBV/m	Grid 9 M4 23.96 dBV/m

Cursor:

Total = 24.68 dBV/m

E Category: M4

Location: 2, 25, 7.7 mm

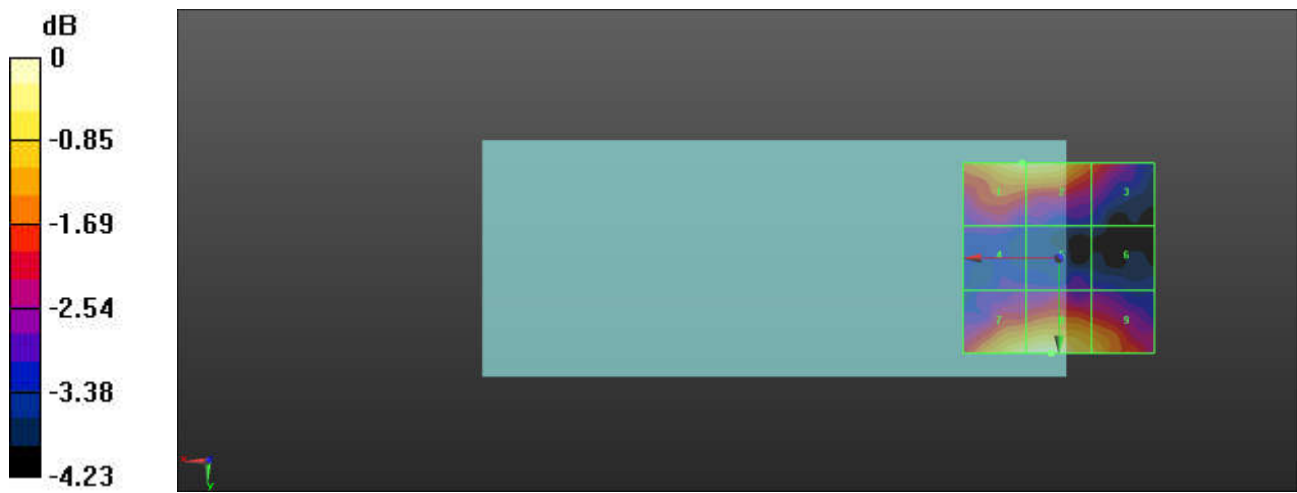

7_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch37850_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2580 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch37850/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.85 V/m; Power Drift = 0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.61 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.04 dBV/m	Grid 2 M4 27.47 dBV/m	Grid 3 M4 27.61 dBV/m
Grid 4 M4 22.88 dBV/m	Grid 5 M4 27.5 dBV/m	Grid 6 M4 27.61 dBV/m
Grid 7 M4 23.04 dBV/m	Grid 8 M4 26.2 dBV/m	Grid 9 M4 26.19 dBV/m

Cursor:

Total = 27.61 dBV/m

E Category: M4

Location: -11.5, -8, 8.7 mm

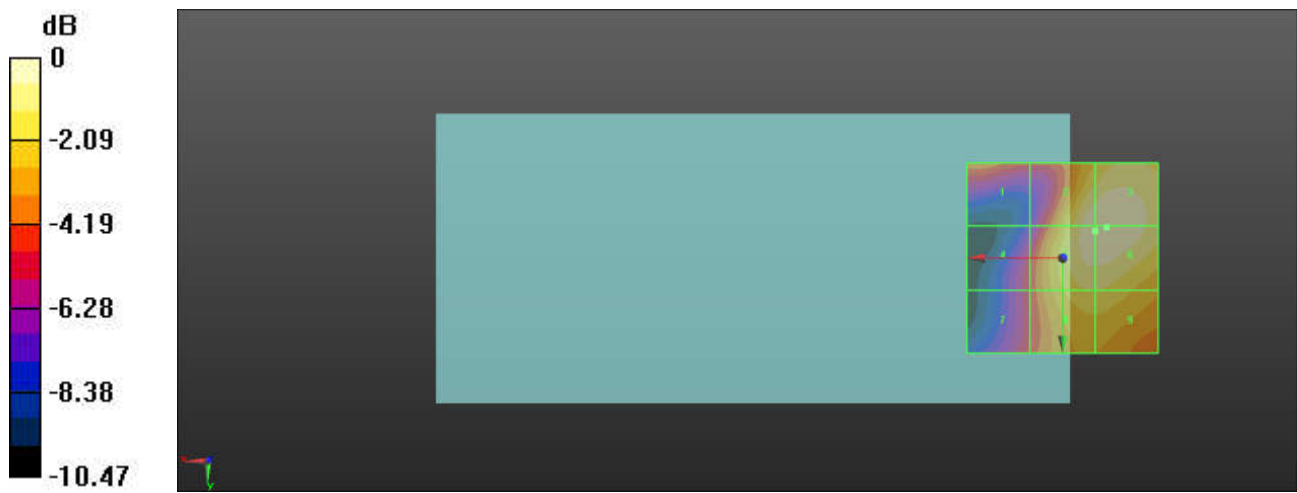

0 dB = 24.01 V/m = 27.61 dBV/m

8_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch38000_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2595 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38000/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.99 V/m; Power Drift = -0.06 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.47 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.05 dBV/m	Grid 2 M4 27.27 dBV/m	Grid 3 M4 27.47 dBV/m
Grid 4 M4 22.75 dBV/m	Grid 5 M4 27.31 dBV/m	Grid 6 M4 27.47 dBV/m
Grid 7 M4 22.96 dBV/m	Grid 8 M4 26.03 dBV/m	Grid 9 M4 26.02 dBV/m

Cursor:

Total = 27.47 dBV/m

E Category: M4

Location: -12, -9, 8.7 mm

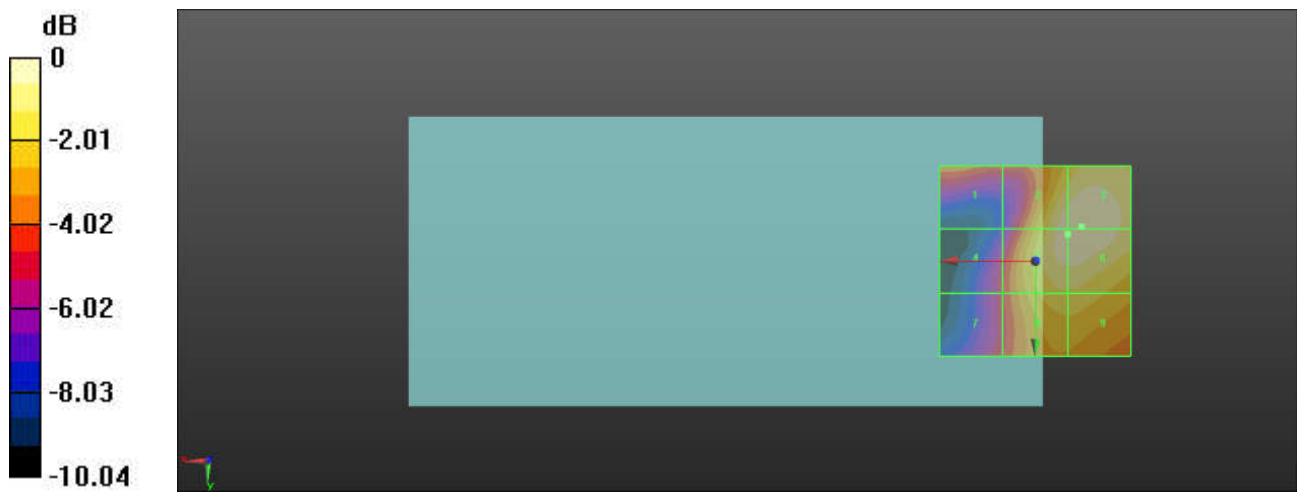

0 dB = 23.62 V/m = 27.47 dBV/m

9_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch38150_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2610 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38150/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.65 V/m; Power Drift = -0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.15 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.71 dBV/m	Grid 2 M4 26.97 dBV/m	Grid 3 M4 27.15 dBV/m
Grid 4 M4 22.65 dBV/m	Grid 5 M4 27 dBV/m	Grid 6 M4 27.15 dBV/m
Grid 7 M4 22.96 dBV/m	Grid 8 M4 25.86 dBV/m	Grid 9 M4 25.83 dBV/m

Cursor:

Total = 27.15 dBV/m

E Category: M4

Location: -11.5, -8.5, 8.7 mm

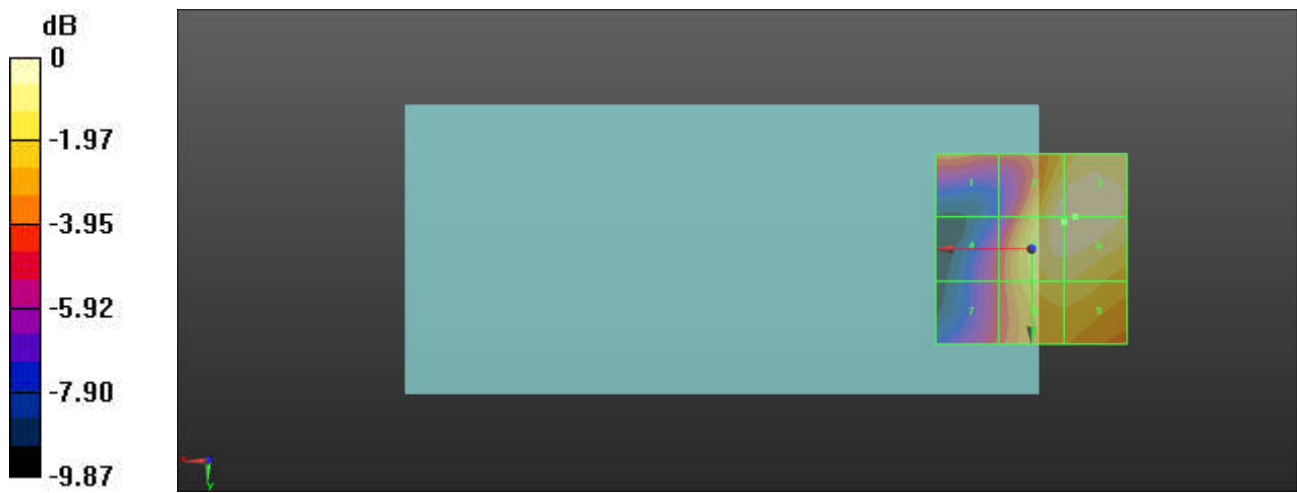

0 dB = 22.77 V/m = 27.15 dBV/m

10_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch37850_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2580 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch37850/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.89 V/m; Power Drift = -0.04 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.63 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.11 dBV/m	Grid 2 M4 27.48 dBV/m	Grid 3 M4 27.63 dBV/m
Grid 4 M4 22.88 dBV/m	Grid 5 M4 27.51 dBV/m	Grid 6 M4 27.63 dBV/m
Grid 7 M4 23.02 dBV/m	Grid 8 M4 26.23 dBV/m	Grid 9 M4 26.22 dBV/m

Cursor:

Total = 27.63 dBV/m

E Category: M4

Location: -11.5, -8, 8.7 mm

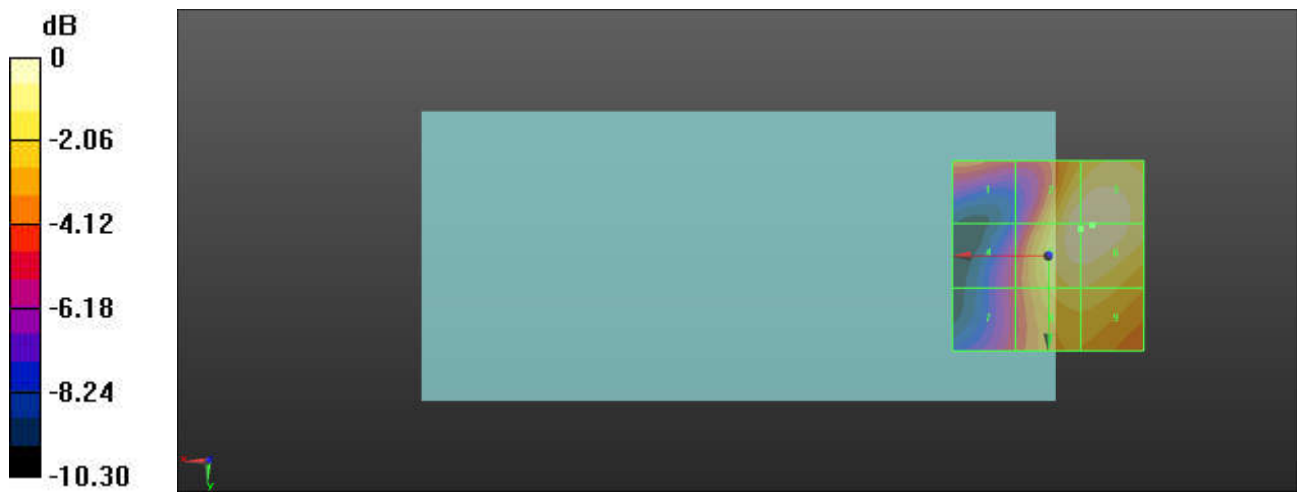

0 dB = 24.07 V/m = 27.63 dBV/m

11_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch38000_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2595 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38000/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.65 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.45 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.03 dBV/m	Grid 2 M4 27.25 dBV/m	Grid 3 M4 27.45 dBV/m
Grid 4 M4 22.7 dBV/m	Grid 5 M4 27.27 dBV/m	Grid 6 M4 27.45 dBV/m
Grid 7 M4 22.93 dBV/m	Grid 8 M4 25.96 dBV/m	Grid 9 M4 25.96 dBV/m

Cursor:

Total = 27.45 dBV/m

E Category: M4

Location: -11.5, -8.5, 8.7 mm

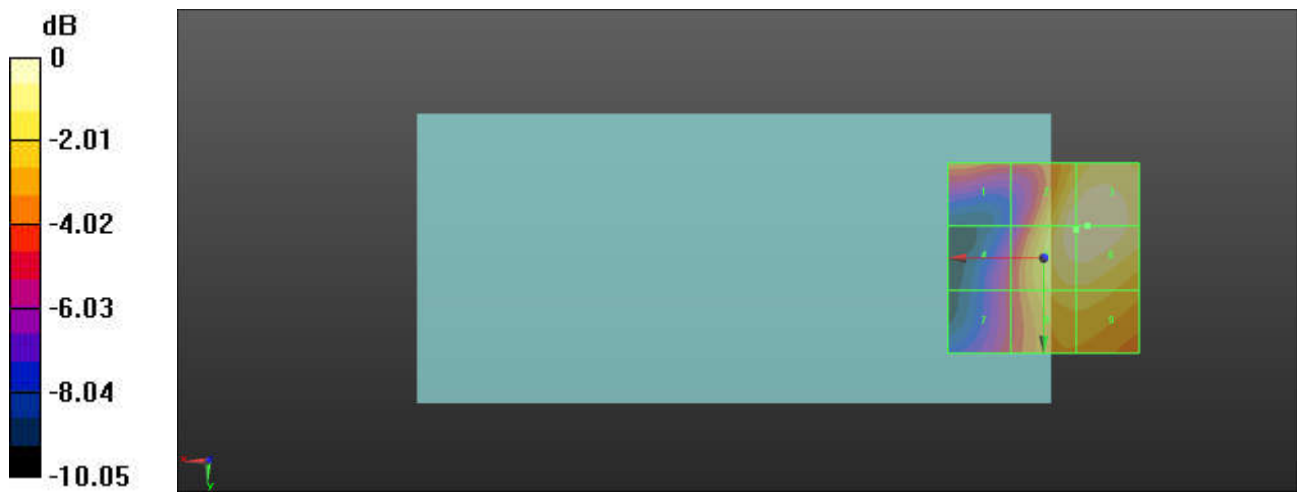

12_HAC RF_LTE Band 38_20M_QPSK_1RB_0Offset_Ch38150_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2610 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch38150/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.53 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 27.17 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.71 dBV/m	Grid 2 M4 26.99 dBV/m	Grid 3 M4 27.17 dBV/m
Grid 4 M4 22.64 dBV/m	Grid 5 M4 27.03 dBV/m	Grid 6 M4 27.17 dBV/m
Grid 7 M4 22.91 dBV/m	Grid 8 M4 25.86 dBV/m	Grid 9 M4 25.85 dBV/m

Cursor:

Total = 27.17 dBV/m

E Category: M4

Location: -11.5, -8, 8.7 mm

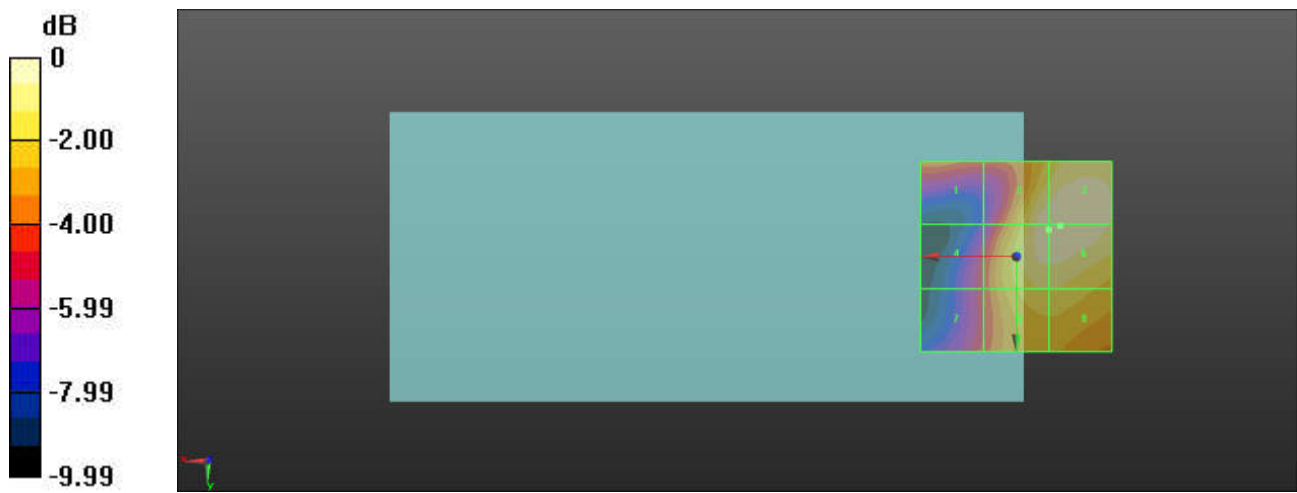

0 dB = 22.83 V/m = 27.17 dBV/m

13_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch39750_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 10.97 V/m; Power Drift = 0.21 dB

Applied MIF = -1.44 dB

RF audio interference level = 21.59 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 16.95 dBV/m	Grid 2 M4 17.87 dBV/m	Grid 3 M4 17.7 dBV/m
Grid 4 M4 18.49 dBV/m	Grid 5 M4 19.11 dBV/m	Grid 6 M4 18.71 dBV/m
Grid 7 M4 21.31 dBV/m	Grid 8 M4 21.59 dBV/m	Grid 9 M4 20.26 dBV/m

Cursor:

Total = 21.59 dBV/m

E Category: M4

Location: 2, 25, 8.7 mm

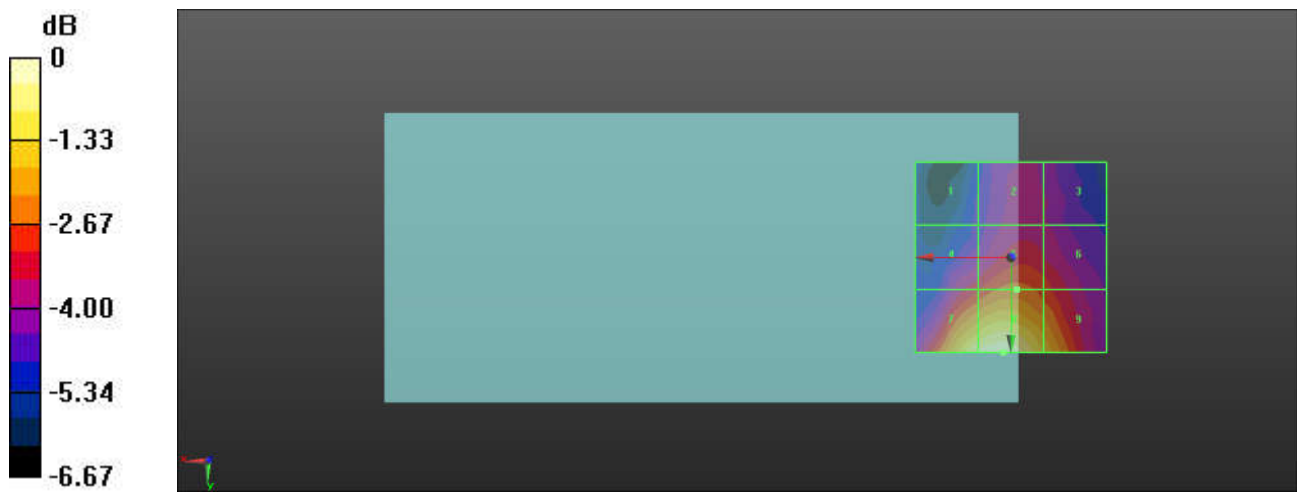

0 dB = 12.00 V/m = 21.59 dBV/m

14_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40185_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.37 V/m; Power Drift = -0.07 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.43 dBV/m

Emission category: M4

MIF scaled E-field




Grid 1 M4 17.58 dBV/m	Grid 2 M4 18.38 dBV/m	Grid 3 M4 18.29 dBV/m
Grid 4 M4 18.11 dBV/m	Grid 5 M4 19.35 dBV/m	Grid 6 M4 19.11 dBV/m
Grid 7 M4 19.97 dBV/m	Grid 8 M4 20.43 dBV/m	Grid 9 M4 19.45 dBV/m

Cursor:

Total = 20.43 dBV/m

E Category: M4

Location: 2, 25, 8.7 mm

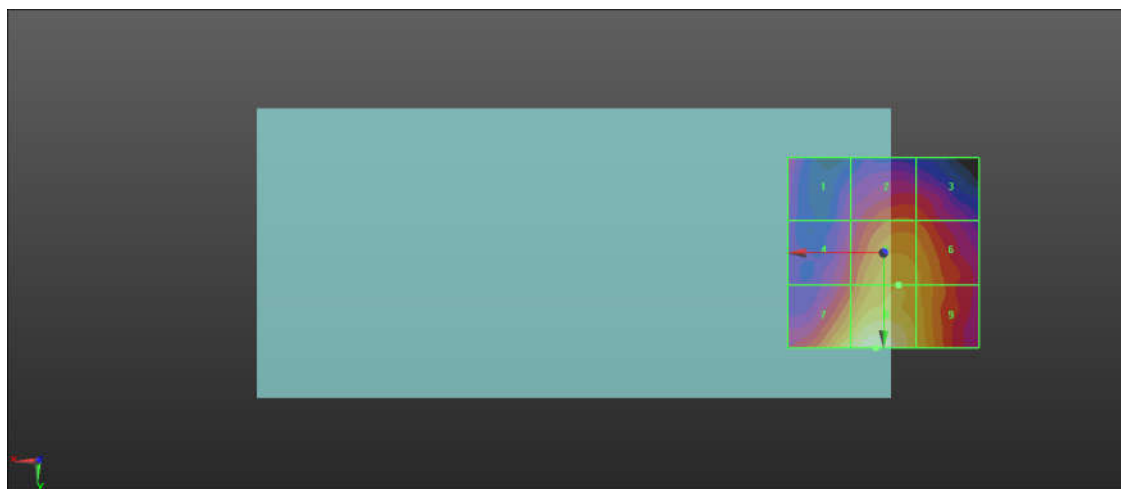

0 dB = 10.51 V/m= 20.43 dBV/m

15_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40620_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.61 V/m; Power Drift = 0.19 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.20 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 17.86 dBV/m	Grid 2 M4 19.43 dBV/m	Grid 3 M4 19.37 dBV/m
Grid 4 M4 18.48 dBV/m	Grid 5 M4 19.87 dBV/m	Grid 6 M4 19.78 dBV/m
Grid 7 M4 19.88 dBV/m	Grid 8 M4 20.2 dBV/m	Grid 9 M4 19.65 dBV/m

Cursor:

Total = 20.20 dBV/m

E Category: M4

Location: 1.5, 25, 8.7 mm

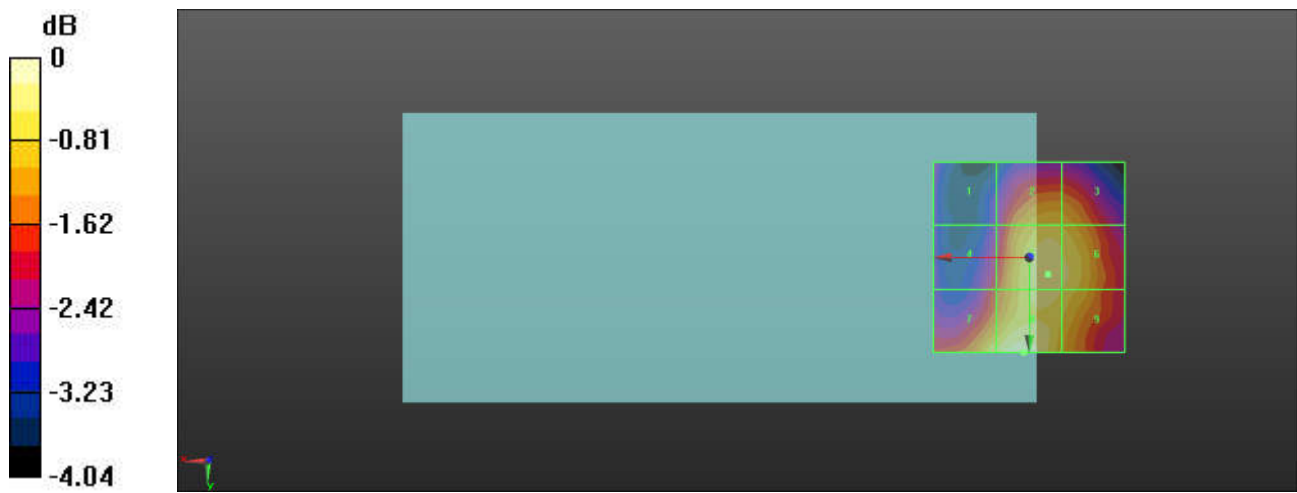

16_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41055_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.06 V/m; Power Drift = -0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.05 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 18.73 dBV/m	Grid 2 M4 19.95 dBV/m	Grid 3 M4 19.81 dBV/m
Grid 4 M4 18.28 dBV/m	Grid 5 M4 20.05 dBV/m	Grid 6 M4 19.92 dBV/m
Grid 7 M4 18.65 dBV/m	Grid 8 M4 19.59 dBV/m	Grid 9 M4 19.37 dBV/m

Cursor:

Total = 20.05 dBV/m

E Category: M4

Location: -5, -4, 8.7 mm

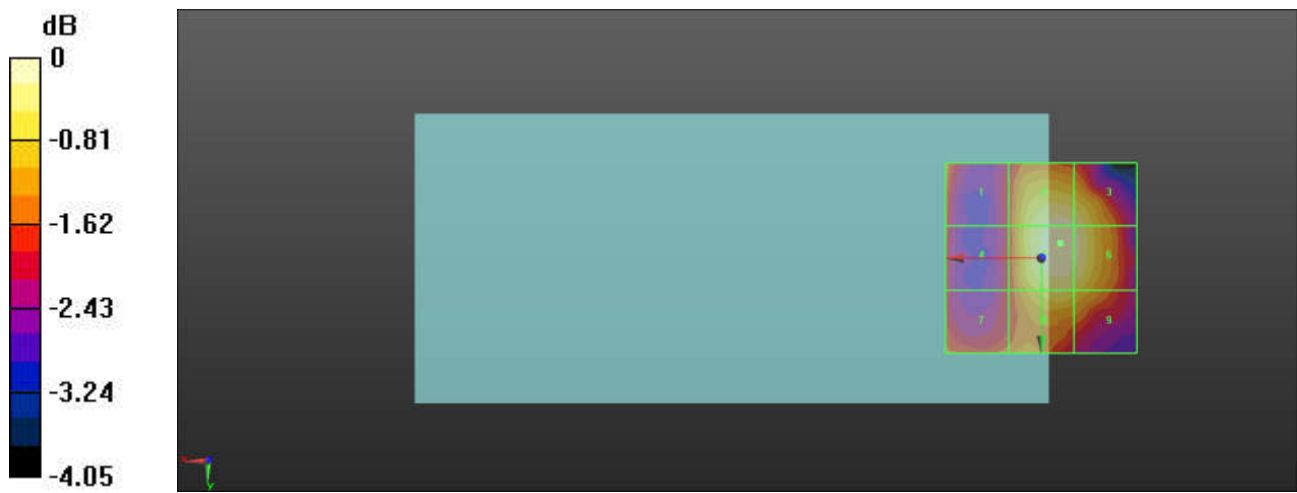

0 dB = 10.06 V/m = 20.05 dBV/m

17_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41490_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.58 V/m; Power Drift = 0.25 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.99 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.06 dBV/m	Grid 2 M4 19.98 dBV/m	Grid 3 M4 19.95 dBV/m
Grid 4 M4 18.28 dBV/m	Grid 5 M4 19.99 dBV/m	Grid 6 M4 19.95 dBV/m
Grid 7 M4 17.67 dBV/m	Grid 8 M4 18.82 dBV/m	Grid 9 M4 18.63 dBV/m

Cursor:

Total = 19.99 dBV/m

E Category: M4

Location: -6, -7.5, 8.7 mm

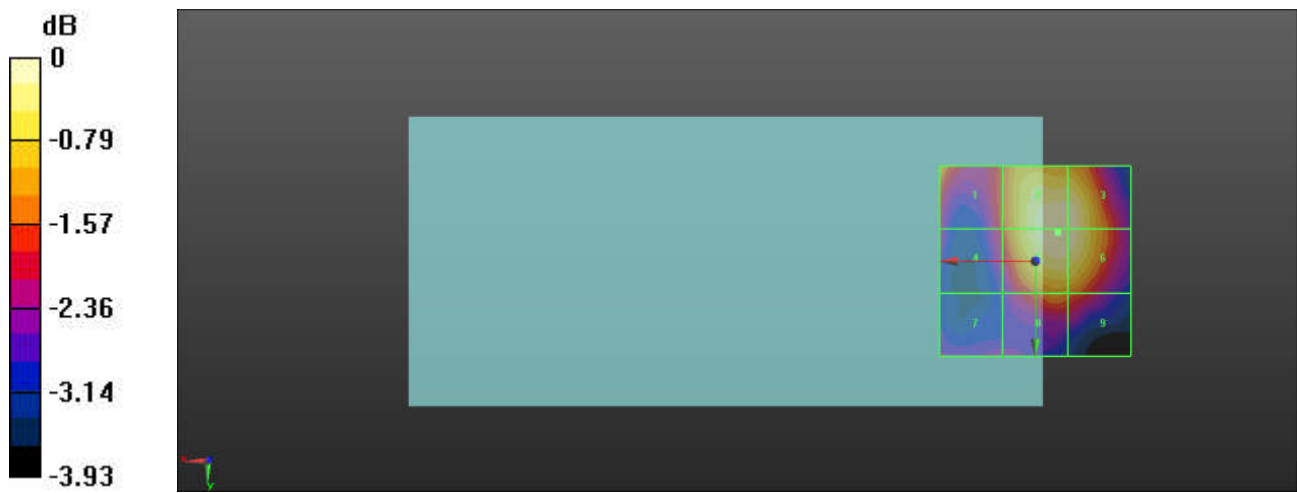

0 dB = 9.984 V/m = 19.99 dBV/m

18_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch39750_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2506 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch39750/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.35 V/m; Power Drift = 0.56 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.74 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 19.47 dBV/m	Grid 2 M4 20.71 dBV/m	Grid 3 M4 20.67 dBV/m
Grid 4 M4 18.59 dBV/m	Grid 5 M4 20.74 dBV/m	Grid 6 M4 20.71 dBV/m
Grid 7 M4 17.96 dBV/m	Grid 8 M4 19.4 dBV/m	Grid 9 M4 19.28 dBV/m

Cursor:

Total = 20.74 dBV/m

E Category: M4

Location: -6.5, -6.5, 8.7 mm

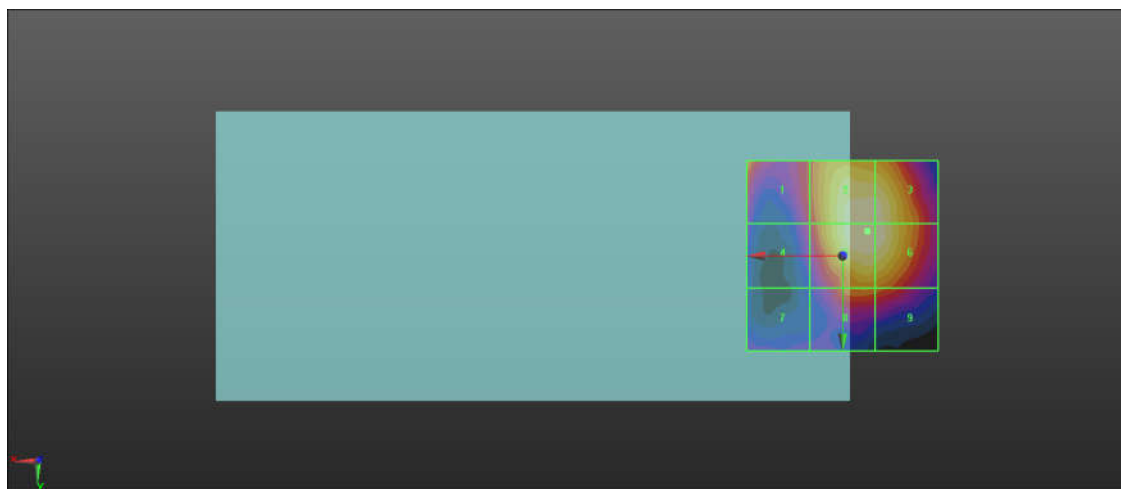

0 dB = 10.88 V/m = 20.74 dBV/m

19_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40185_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2549.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40185/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.92 V/m; Power Drift = -0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.71 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 17.59 dBV/m	Grid 2 M4 18.44 dBV/m	Grid 3 M4 18.38 dBV/m
Grid 4 M4 18.19 dBV/m	Grid 5 M4 19.53 dBV/m	Grid 6 M4 19.37 dBV/m
Grid 7 M4 20.23 dBV/m	Grid 8 M4 20.71 dBV/m	Grid 9 M4 19.81 dBV/m

Cursor:

Total = 20.71 dBV/m

E Category: M4

Location: 1, 25, 8.7 mm

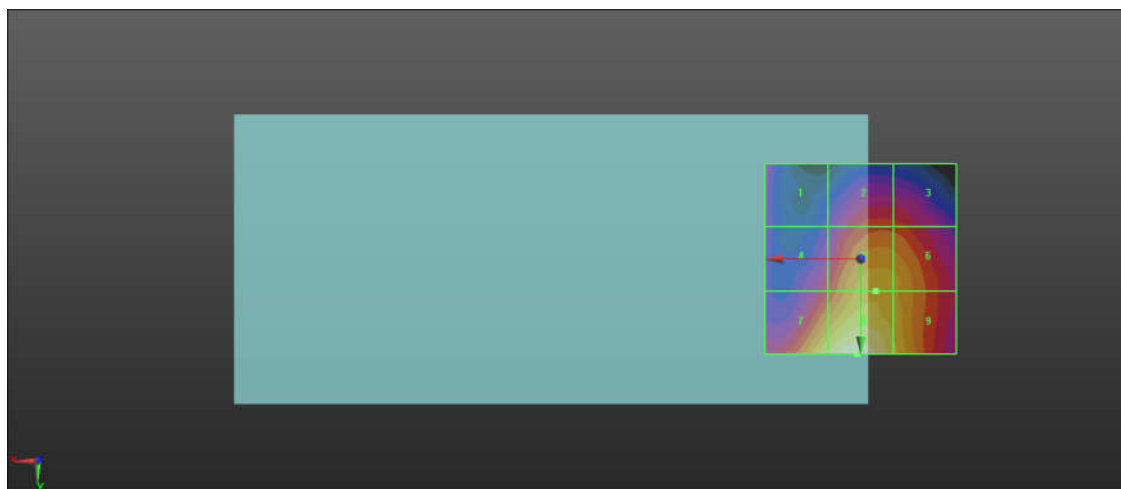

0 dB = 10.85 V/m = 20.71 dBV/m

20_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch40620_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2593 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch40620/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.49 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.62 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 18.2 dBV/m	Grid 2 M4 19.83 dBV/m	Grid 3 M4 19.76 dBV/m
Grid 4 M4 18.79 dBV/m	Grid 5 M4 20.37 dBV/m	Grid 6 M4 20.29 dBV/m
Grid 7 M4 20.29 dBV/m	Grid 8 M4 20.62 dBV/m	Grid 9 M4 20.2 dBV/m

Cursor:

Total = 20.62 dBV/m

E Category: M4

Location: 2.5, 25, 8.7 mm

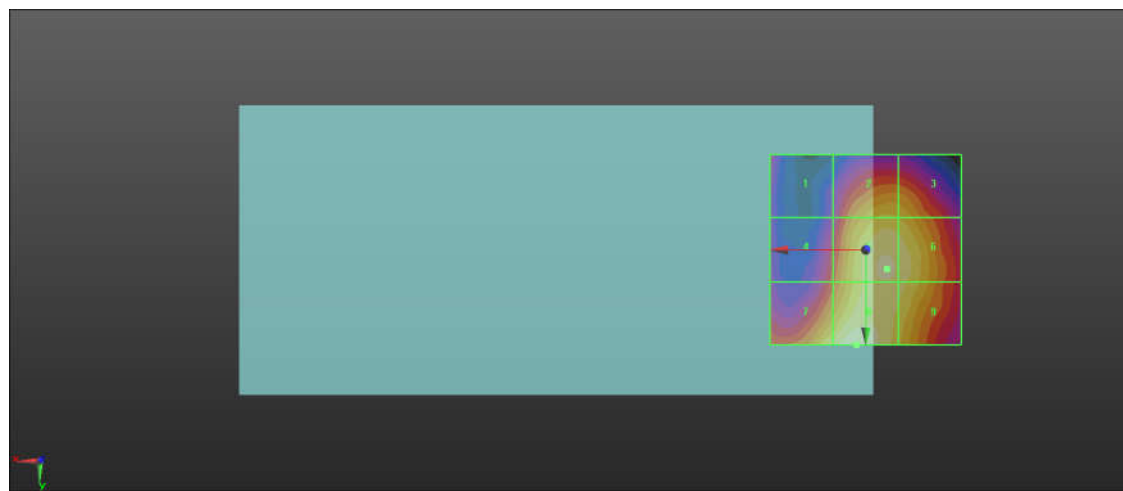

0 dB = 10.74 V/m = 20.62 dBV/m

21_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41055_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2636.5 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41055/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.95 V/m; Power Drift = 0.30 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.75 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.03 dBV/m	Grid 2 M4 20.64 dBV/m	Grid 3 M4 20.49 dBV/m
Grid 4 M4 18.69 dBV/m	Grid 5 M4 20.75 dBV/m	Grid 6 M4 20.62 dBV/m
Grid 7 M4 18.91 dBV/m	Grid 8 M4 20.11 dBV/m	Grid 9 M4 20 dBV/m

Cursor:

Total = 20.75 dBV/m

E Category: M4

Location: -5.5, -4, 8.7 mm

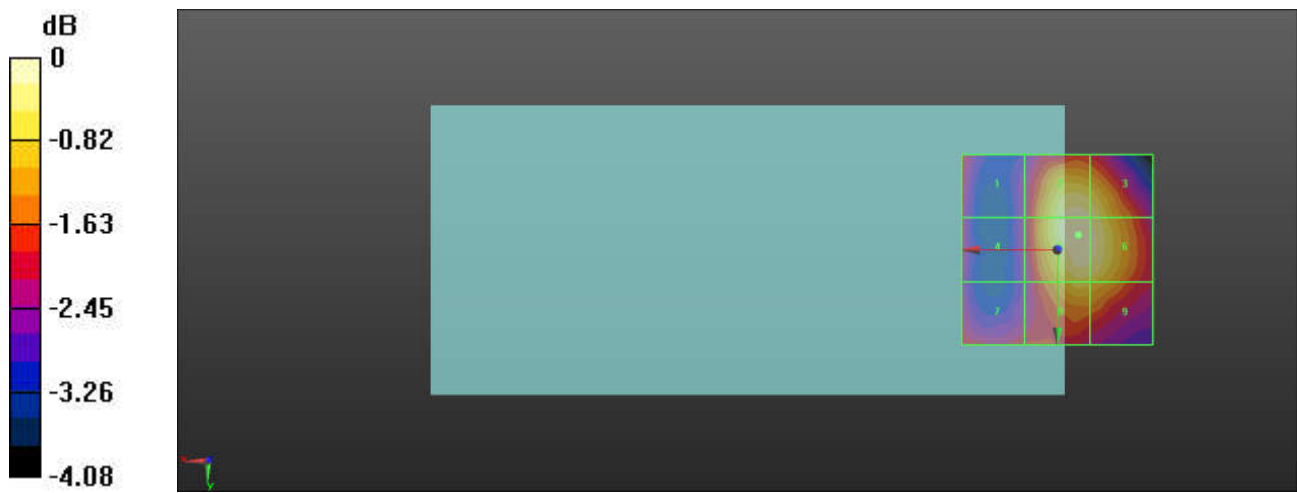

0 dB = 10.90 V/m = 20.75 dBV/m

22_HAC RF_LTE Band 41_20M_QPSK_1RB_0Offset_Ch41490_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 2680 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch41490/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.14 V/m; Power Drift = 0.11 dB

Applied MIF = -1.44 dB

RF audio interference level = 20.84 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 19.87 dBV/m	Grid 2 M4 20.81 dBV/m	Grid 3 M4 20.7 dBV/m
Grid 4 M4 18.69 dBV/m	Grid 5 M4 20.84 dBV/m	Grid 6 M4 20.73 dBV/m
Grid 7 M4 18.29 dBV/m	Grid 8 M4 19.5 dBV/m	Grid 9 M4 19.3 dBV/m

Cursor:

Total = 20.84 dBV/m

E Category: M4

Location: -5.5, -6.5, 8.7 mm

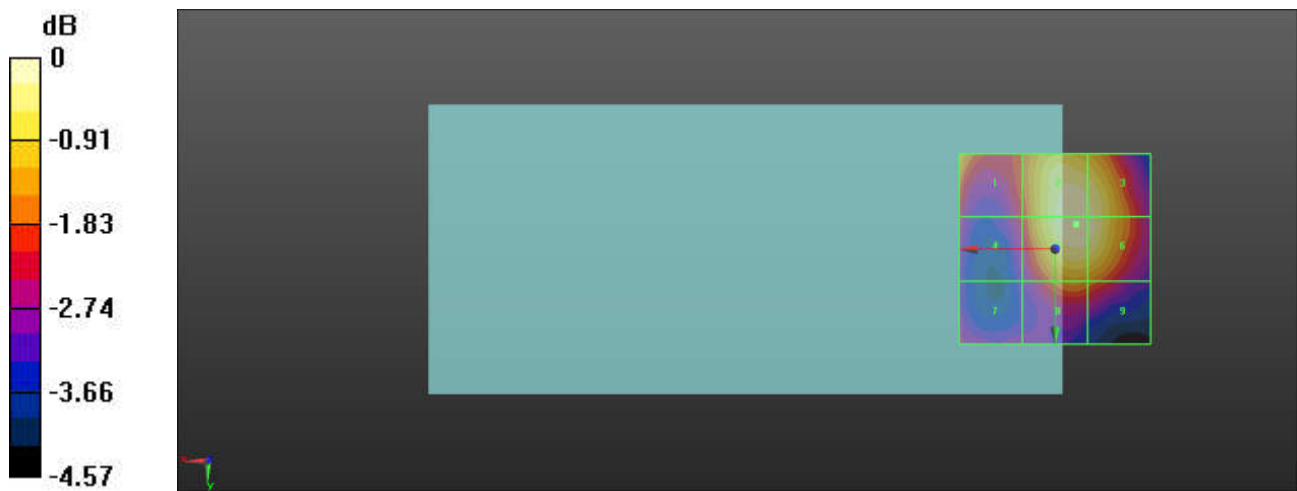

0 dB = 11.02 V/m = 20.84 dBV/m

23_HAC RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42190_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 3460 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42190/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.74 V/m; Power Drift = 0.43 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.19 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 26.19 dBV/m	Grid 2 M4 24.25 dBV/m	Grid 3 M4 22.31 dBV/m
Grid 4 M4 24.95 dBV/m	Grid 5 M4 24.47 dBV/m	Grid 6 M4 21.78 dBV/m
Grid 7 M4 24 dBV/m	Grid 8 M4 22.84 dBV/m	Grid 9 M4 20.56 dBV/m

Cursor:

Total = 26.19 dBV/m

E Category: M4

Location: 21, -25, 8.7 mm

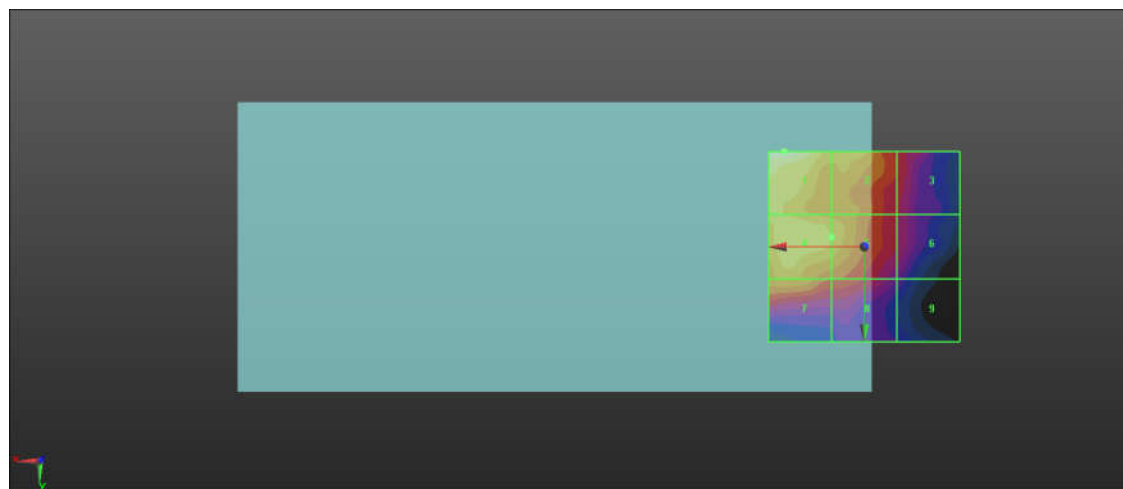

0 dB = 20.40 V/m = 26.19 dBV/m

24_HAC RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42590_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 3500 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42590/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.14 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.21 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 26.21 dBV/m	Grid 2 M4 24.69 dBV/m	Grid 3 M4 22.7 dBV/m
Grid 4 M4 25.12 dBV/m	Grid 5 M4 24.33 dBV/m	Grid 6 M4 22.13 dBV/m
Grid 7 M4 24.23 dBV/m	Grid 8 M4 23.42 dBV/m	Grid 9 M4 20.74 dBV/m

Cursor:

Total = 26.21 dBV/m

E Category: M4

Location: 23, -25, 8.7 mm

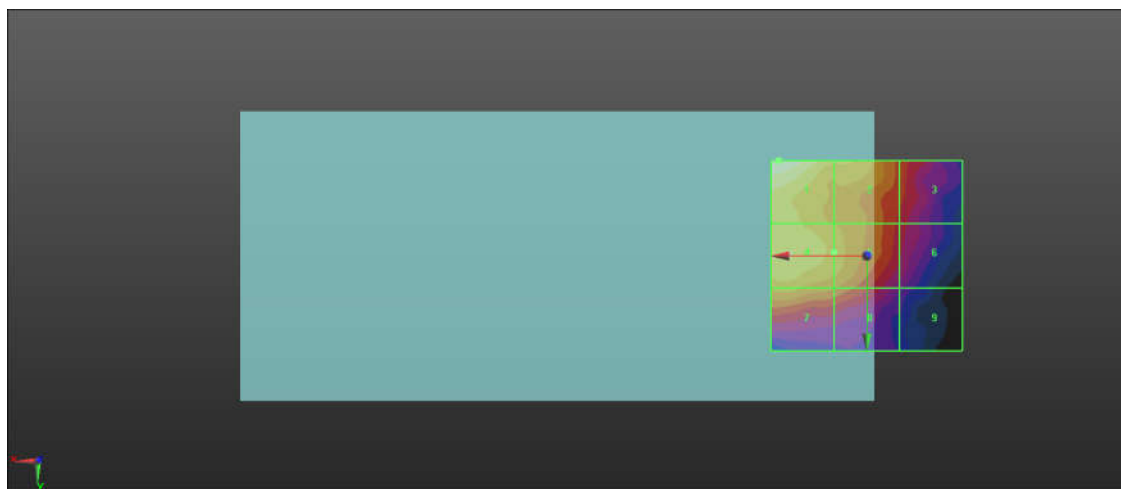

0 dB = 20.45 V/m = 26.21 dBV/m

25_HAC RF_LTE Band 42_20M_QPSK_1RB_0Offset_Ch42990_E

Communication System: UID 10173 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM);

Frequency: 3540 MHz; Duty Cycle: 1:8.8736

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch42990/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.86 V/m; Power Drift = -0.43 dB

Applied MIF = -1.44 dB

RF audio interference level = 26.40 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 26.4 dBV/m	Grid 2 M4 24.64 dBV/m	Grid 3 M4 23.09 dBV/m
Grid 4 M4 25.29 dBV/m	Grid 5 M4 24.18 dBV/m	Grid 6 M4 22.33 dBV/m
Grid 7 M4 24.46 dBV/m	Grid 8 M4 23.58 dBV/m	Grid 9 M4 20.78 dBV/m

Cursor:

Total = 26.40 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

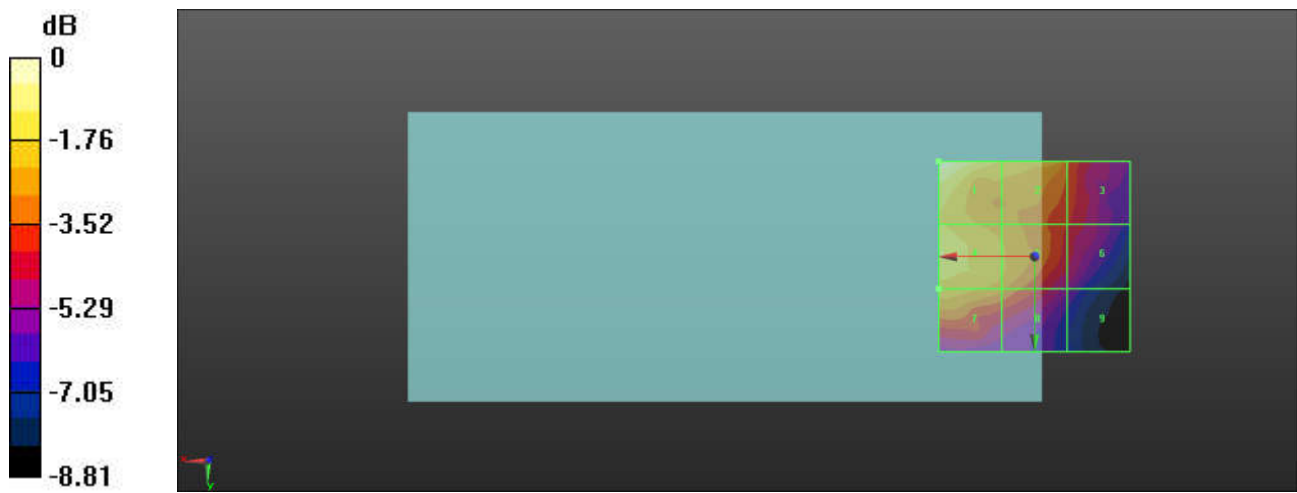

0 dB = 20.88 V/m = 26.40 dBV/m

26_HAC RF_WLAN 2.4G_802.11g 6Mbps_Ch1_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);

Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 36.15 V/m; Power Drift = -0.10 dB

Applied MIF = 0.12 dB

RF audio interference level = 29.27 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.11 dBV/m	Grid 2 M4 27.66 dBV/m	Grid 3 M4 27.66 dBV/m
Grid 4 M4 24.24 dBV/m	Grid 5 M4 29.27 dBV/m	Grid 6 M4 29.26 dBV/m
Grid 7 M4 27.38 dBV/m	Grid 8 M4 29.22 dBV/m	Grid 9 M4 29.22 dBV/m

Cursor:

Total = 29.27 dBV/m

E Category: M4

Location: -7.5, 6.5, 8.7 mm

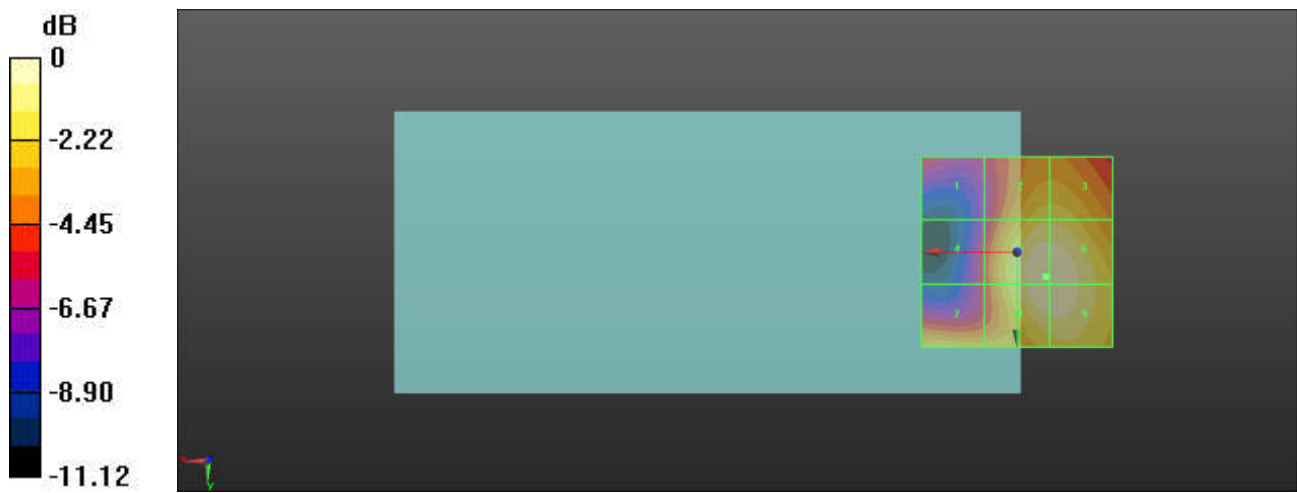

0 dB = 29.06 V/m = 29.27 dBV/m

26A_HAC RF_WLAN 2.4G_802.11g 6Mbps_Ch1_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);

Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch1/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.53 V/m; Power Drift = 0.11 dB

Applied MIF = 0.12 dB

RF audio interference level = 29.07 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 24.53 dBV/m	Grid 2 M4 27.67 dBV/m	Grid 3 M4 27.65 dBV/m
Grid 4 M4 24.44 dBV/m	Grid 5 M4 29.07 dBV/m	Grid 6 M4 29.06 dBV/m
Grid 7 M4 26.96 dBV/m	Grid 8 M4 29.06 dBV/m	Grid 9 M4 29.05 dBV/m

Cursor:

Total = 29.07 dBV/m

E Category: M4

Location: -7.5, 7.5, 8.7 mm

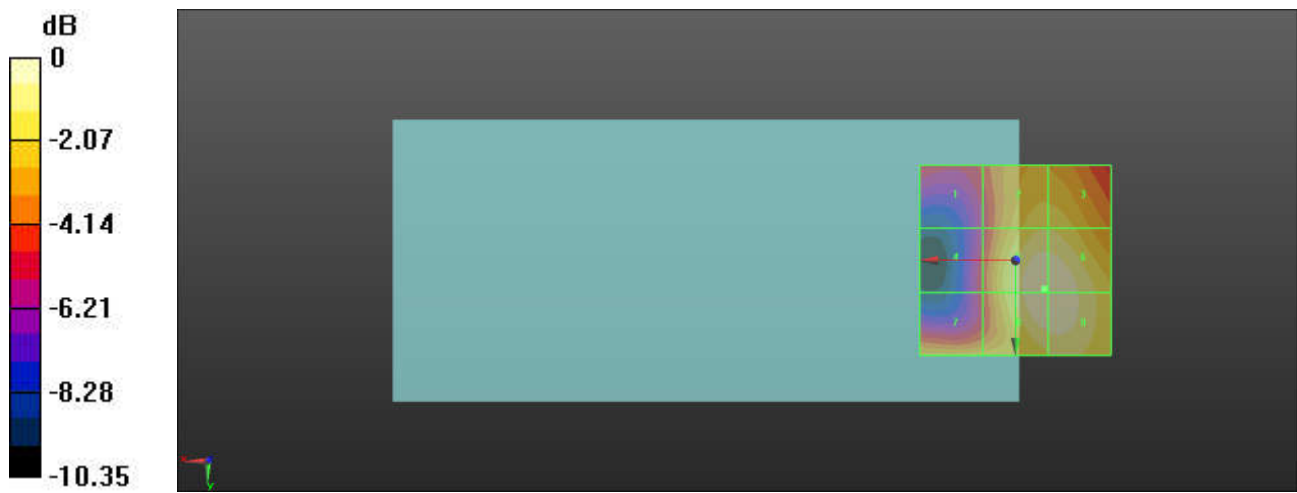

0 dB = 28.40 V/m = 29.07 dBV/m

27_HAC RF_WLAN 2.4G_802.11g 6Mbps_Ch6_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.90 V/m; Power Drift = -0.07 dB

Applied MIF = 0.12 dB

RF audio interference level = 28.56 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.96 dBV/m	Grid 2 M4 26.87 dBV/m	Grid 3 M4 26.87 dBV/m
Grid 4 M4 23.61 dBV/m	Grid 5 M4 28.55 dBV/m	Grid 6 M4 28.56 dBV/m
Grid 7 M4 25.78 dBV/m	Grid 8 M4 28.55 dBV/m	Grid 9 M4 28.56 dBV/m

Cursor:

Total = 28.56 dBV/m

E Category: M4

Location: -9, 9, 8.7 mm

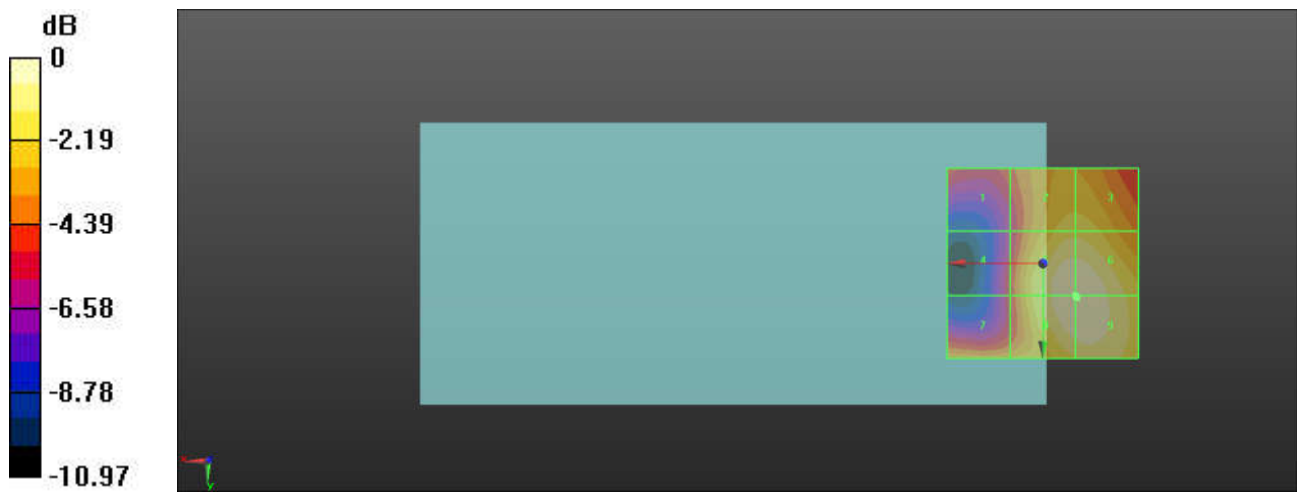

28_HAC RF_WLAN 2.4G_802.11g 6Mbps_Ch11_E

Communication System: UID 10077 - CAB, IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps);

Frequency: 2462 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2302; ConvF(1, 1, 1); Calibrated: 2022/6/16

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn1664; Calibrated: 2022/5/30

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.40 V/m; Power Drift = -0.05 dB

Applied MIF = 0.12 dB

RF audio interference level = 27.16 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 22.64 dBV/m	Grid 2 M4 25.65 dBV/m	Grid 3 M4 25.63 dBV/m
Grid 4 M4 22.81 dBV/m	Grid 5 M4 27.16 dBV/m	Grid 6 M4 27.15 dBV/m
Grid 7 M4 24.5 dBV/m	Grid 8 M4 27.15 dBV/m	Grid 9 M4 27.14 dBV/m

Cursor:

Total = 27.16 dBV/m

E Category: M4

Location: -7.5, 7, 8.7 mm

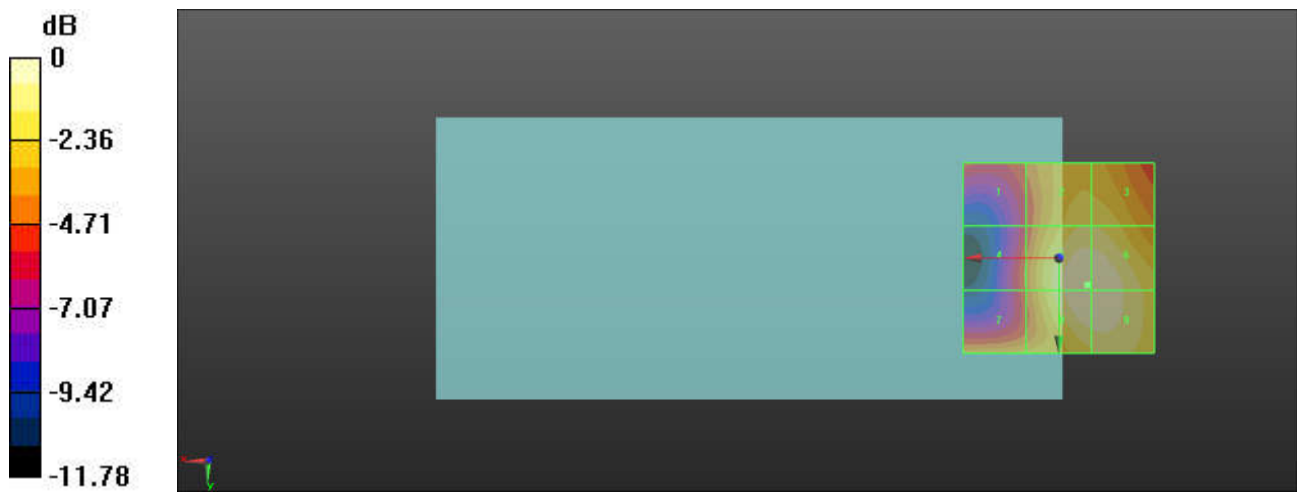

0 dB = 22.80 V/m = 27.16 dBV/m