

FCC Test Report (Part 96)

Report No.: RFBBQJ-WTW-P21030490

FCC ID: ACJ9TGWW18A

Test Model: WW18A

Received Date: Mar. 26, 2021

Test Date: Mar. 26 ~ Apr. 22, 2021

Issued Date: May 03, 2021

Applicant: Panasonic Corporation of North America

Address: Two Riverfront Plaza, 9th Floor, Newark, NJ 07102-5490, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 General Description of Applied Standards and References	11
4 Test Types and Results	12
4.1 Maximum Output Power Measurement	12
4.1.1 Limits of Maximum Output Power Measurement	12
4.1.2 Test Setup	12
4.1.3 Test Instruments	12
4.1.4 Test Procedures	14
4.1.5 Deviation from Test Standard	14
4.1.6 EUT Operating Conditions	14
4.1.7 Test Results	15
4.2 Modulation Characteristics Measurement	21
4.2.1 Limits of Modulation Characteristics	21
4.2.2 Test Procedure	21
4.2.3 Test Setup	21
4.2.4 Test Results	21
4.3 Frequency Stability Measurement	22
4.3.1 Limits of Frequency Stability Measurement	22
4.3.2 Test Procedure	22
4.3.3 Test Setup	22
4.3.4 Test Results	23
4.4 Emission Bandwidth Measurement	27
4.4.1 Emission Bandwidth Measurement	27
4.4.2 Test Setup	27
4.4.3 Test Instruments	27
4.4.4 Test Procedure	27
4.4.5 Deviation from Test Standard	27
4.4.6 EUT Operating Conditions	27
4.4.7 Test Result (-26dB Bandwidth)	28
4.4.8 Test Result (Occupied Bandwidth)	30
4.5 Peak to Average Ratio Measurement	32
4.5.1 Limits of Peak to Average Ratio Measurement	32
4.5.2 Test Setup	32
4.5.3 Test Procedures	32
4.5.4 Test Results	33
4.6 Conducted Spurious Emissions	35
4.6.1 Limits of Conducted Spurious Emissions Measurement	35
4.6.2 Test Setup	35
4.6.3 Test Procedure	35
4.6.4 Test Results	36
4.7 Radiated Emission Measurement	56
4.7.1 Limits of Radiated Emission Measurement	56
4.7.2 Test Instruments	56

4.7.3 Test Procedures.....	56
4.7.4 Deviation from Test Standard	56
4.7.5 Test Set Up	57
4.7.6 Test Results	58
5 Pictures of Test Arrangements	64
Appendix – Information of the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RFBBQJ-WTW-P21030490	Original release	May 03, 2021

1 Certificate of Conformity

Product: Radio Module

Brand: Panasonic

Test Model: WW18A

Sample Status: Engineering Sample


Applicant: Panasonic Corporation of North America

Test Date: Mar. 26 ~ Apr. 22, 2021

Standards: FCC 47 CFR Part 96

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Gina Liu / Specialist

Date:

May 03, 2021

Approved by :



Dylan Chiou / Senior Project Engineer

Date:

May 03, 2021

2 Summary of Test Results

47 CFR FCC Part 96			
FCC Clause	Test Item	Result	Remarks
2.1046 96.41(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047 96.41(a)	Modulation Characteristics	Pass	Meet the requirement
2.1046 96.41(b)	Maximum Power Spectral Density	Pass	Meet the requirement of limit.
96.41(g)	Peak to Average Ration	Pass	Meet the requirement of limit.
2.1049	Emission Bandwidth	Pass	Meet the requirement of limit.
2.1055	Frequency Stability	Pass	Meet the requirement of limit.
2.1051 96.41(e)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 96.41(e)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.72 dB at 7250.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30MHz	3.04 dB
	30 MHz ~ 200 MHz	3.59 dB
	200 MHz ~ 1000 MHz	3.60 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Radio Module			
Brand	Panasonic			
Test Model	WW18A			
Status of EUT	Engineering Sample			
Power Supply Rating	15.6 Vdc (Adapter) 10.8 Vdc (Battery)			
Modulation Type	QPSK, 16QAM, 64QAM			
Operating Frequency	LTE Band 48	Channel Bandwidth 5MHz	TX: 3552.5 ~ 3697.5 MHz RX: 3552.5 ~ 3697.5 MHz	
		Channel Bandwidth 10MHz	TX: 3555 ~ 3695 MHz RX: 3555 ~ 3695 MHz	
		Channel Bandwidth 15MHz	TX: 3557.5 ~ 3692.5 MHz RX: 3557.5 ~ 3692.5 MHz	
		Channel Bandwidth 20MHz	TX: 3560 ~ 3690 MHz RX: 3560 ~ 3690 MHz	
Max. EIRP Power	LTE Band 48		QPSK	16QAM
			64QAM	
		Per 10M		
		Channel Bandwidth 5MHz	91.833 mW (19.63dBm)	70.795 mW (18.50dBm)
		Channel Bandwidth 10MHz	92.683 mW (19.67dBm)	77.804 mW (18.91dBm)
		Channel Bandwidth 15MHz	94.624 mW (19.76dBm)	44.259 mW (16.46dBm)
		Channel Bandwidth 20MHz	96.383 mW (19.84dBm)	46.989 mW (16.72dBm)
		Full Power		
		Channel Bandwidth 5MHz	91.833 mW (19.63dBm)	70.795 mW (18.50dBm)
		Channel Bandwidth 10MHz	92.683 mW (19.67dBm)	77.804 mW (18.91dBm)
Emission Designator	LTE Band 48	Channel Bandwidth 5MHz	4M47G7D	4M46D7W
		Channel Bandwidth 10MHz	8M92G7D	8M92D7W
		Channel Bandwidth 15MHz	13M4G7D	13M4D7W
		Channel Bandwidth 20MHz	17M8G7D	17M8D7W
Antenna Type	Monopole Antenna with 3.65 dBi gain			
Accessory Device	Refer to Note as below			
Data Cable Supplied	Refer to Note as below			

Note:

1. The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product	Brand	Model
Personal Computer	Panasonic	FZ-55

2. The End-product contains following accessory devices.

Product	Brand	Model	Description
Adapter	Panasonic	CF-AA5713A	I/P: 100-240 Vac, 50/60 Hz, 1.5 A O/P: 15.6 Vdc, 7.05 A

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X-plane. Following channel(s) was (were) selected for the final test as listed below:

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Maximum Output Power	55265 to 56715	55265 (3552.5MHz), 55990 (3625.0MHz), 56715 (3697.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55290 to 56690	55290 (3555.0MHz), 55990 (3625.0MHz), 56690 (3695.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55315 to 56665	55315 (3557.5MHz), 55990 (3625.0MHz), 56665 (3692.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 55990 (3625.0MHz), 56640 (3690.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
Modulation Characteristics	55340 to 56640	55990 (3625.0MHz)	20MHz	QPSK / 16QAM / 64QAM	100 RB / 0 RB Offset
Frequency Stability	55265 to 56715	55265 (3552.5MHz), 56715 (3697.5MHz)	5MHz	QPSK	25 RB / 0 RB Offset
	55290 to 56690	55290 (3555.0MHz), 56690 (3695.0MHz)	10MHz	QPSK	50 RB / 0 RB Offset
	55315 to 56665	55315 (3557.5MHz), 56665 (3692.5MHz)	15MHz	QPSK	75 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 56640 (3690.0MHz)	20MHz	QPSK	100 RB / 0 RB Offset
Occupied Bandwidth	55265 to 56715	55265 (3552.5MHz), 55990 (3625.0MHz), 56715 (3697.5MHz)	5MHz	QPSK / 16QAM / 64QAM	25 RB / 0 RB Offset
	55290 to 56690	55290 (3555.0MHz), 55990 (3625.0MHz), 56690 (3695.0MHz)	10MHz	QPSK / 16QAM / 64QAM	50 RB / 0 RB Offset
	55315 to 56665	55315 (3557.5MHz), 55990 (3625.0MHz), 56665 (3692.5MHz)	15MHz	QPSK / 16QAM / 64QAM	75 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 55990 (3625.0MHz), 56640 (3690.0MHz)	20MHz	QPSK / 16QAM / 64QAM	100 RB / 0 RB Offset

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Peak to Average Ratio	55265 to 56715	55265 (3552.5MHz), 55990 (3625.0MHz), 56715 (3697.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55290 to 56690	55290 (3555.0MHz), 55990 (3625.0MHz), 56690 (3695.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55315 to 56665	55315 (3557.5MHz), 55990 (3625.0MHz), 56665 (3692.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 55990 (3625.0MHz), 56640 (3690.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1 RB / 0 RB Offset
Conducted Emission	55265 to 56715	55265 (3552.5MHz), 55990 (3625.0MHz), 56715 (3697.5MHz)	5MHz	QPSK	1 RB / 0 RB Offset
	55290 to 56690	55290 (3555.0MHz), 55990 (3625.0MHz), 56690 (3695.0MHz)	10MHz	QPSK	1 RB / 0 RB Offset
	55315 to 56665	55315 (3557.5MHz), 55990 (3625.0MHz), 56665 (3692.5MHz)	15MHz	QPSK	1 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 55990 (3625.0MHz), 56640 (3690.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Below 1GHz	55340 to 56640	55990 (3625.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset
Radiated Emission Above 1GHz	55265 to 56715	55265 (3552.5MHz), 55990 (3625.0MHz), 56715 (3697.5MHz)	5MHz	QPSK	1 RB / 0 RB Offset
	55340 to 56640	55340 (3560.0MHz), 55990 (3625.0MHz), 56640 (3690.0MHz)	20MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission below 1GHz, low, mid and high channels were pre-tested in chamber. Low channel in 5MHz was found to be the worst case and therefore had been chosen for all final tests.
3. For radiated emission above 1GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5MHz & highest channel bandwidth for final test.


Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Maximum Output Power	22deg. C, 66%RH	10.8 Vdc	Rex Wang
Modulation characteristics	24deg. C, 64%RH	10.8 Vdc	Getaz Yang
Frequency Stability	24deg. C, 64%RH	10.8 Vdc	Getaz Yang
Occupied Bandwidth	24deg. C, 64%RH	10.8 Vdc	Getaz Yang
Peak to Average Ratio	24deg. C, 64%RH	10.8 Vdc	Getaz Yang
Conducuted Emission	24deg. C, 64%RH	10.8 Vdc	Getaz Yang
Radiated Emission	22deg. C, 66%RH	120Vac, 60Hz	Rex Wang

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3.1 Configuration of System under Test

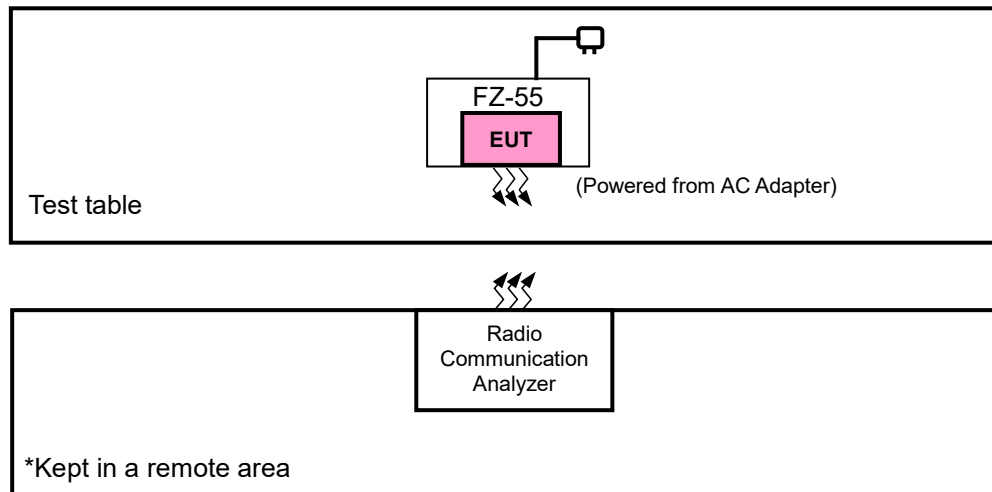

3.4 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 96

ANSI/TIA/EIA-603-D-2010

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 940660 D01 Part 96 CBRS Eqpt v02

All test items have been performed as a reference to the above KDB test guidance.


4 Test Types and Results

4.1 Maximum Output Power Measurement

4.1.1 Limits of Maximum Output Power Measurement

Device		Maximum Output Power (dBm/10 MHz)
☒	End User Device	23
☐	Category A CBSD	30
☐	Category B CBSD	47

4.1.2 Test Setup



4.1.3 Test Instruments

For all tests except Radiated emissions

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer KEYSIGHT	N9030B	MY57140953	Jul. 02, 2020	Jul. 01, 2021
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Feb. 07, 2021	Feb. 07, 2022
RF cable	JB200	Cable-OVEN-02	NA	NA
DC-6GHz 20dB 50W Fixed attenuator Woken	MDC9331N-20	0724	Jun. 24, 2020	Jun. 23, 2022
STANDARD TEMPERATURE & HUMIDITY CHAMBER TERCHY	MHU-225AU	920842	May 27, 2020	May 26, 2021
DC power supply Keysight	U8002A	MY56330015	NA	NA
Digital Multimeter Fluke	87-III	70360742	Jun. 23, 2020	Jun. 22, 2021

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.

For Radiated emissions

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
			Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 06, 2020	Nov. 05, 2021
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Loop Antenna EMCI	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 22, 2021	Jan. 21, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 17, 2021	Feb. 16, 2022
Preamplifier. EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jan. 16, 2021	Jan. 15, 2022
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower &Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.

4.1.4 Test Procedures

EIRP conducted power measurement

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time = auto-couple.
6. Detector = RMS (power averaging).
7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
11. For per 10MHz method, channel power integrating bandwidth 10MHz is used for bandwidth 5M, 10M, 15M and 20M. For full power method, channel power integrating bandwidth 10MHz is used for bandwidth 5M, 10M, integrating bandwidth 15MHz is used for bandwidth 15M, integrating bandwidth 20MHz is used for bandwidth 20M.
12. Measurement method refers to ANSI C63.26 section 5.2.4.

4.1.5 Deviation from Test Standard

No deviation.

4.1.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.1.7 Test Results

Conducted Output Power (dBm) / Per 10M

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55265	55990	56715	55265	55990	56715	55265	55990	56715
			3552.5 MHz	3625 MHz	3697.5 MHz	3552.5 MHz	3625 MHz	3697.5 MHz	3552.5 MHz	3625 MHz	3697.5 MHz
48 / 5M	1	0	16.71	17.10	17.73	15.74	16.20	16.79	14.82	15.12	15.90
	1	12	16.64	16.98	17.65	15.72	16.11	16.62	14.75	15.06	15.83
	1	24	16.61	16.86	17.64	15.69	16.06	16.60	14.80	15.02	15.78
	12	0	15.70	16.01	16.76	14.86	15.26	15.88	13.95	14.23	14.79
	12	6	15.68	16.04	16.74	14.86	15.20	15.73	13.99	14.30	14.83
	12	13	15.59	15.98	16.66	14.82	15.23	15.77	13.93	14.26	14.76
	25	0	15.65	15.94	16.72	14.83	15.19	15.80	13.96	14.27	14.77

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55290	55990	56690	55290	55990	56690	55290	55990	56690
			3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz
48 / 10M	1	0	16.74	17.10	17.77	15.98	16.35	16.91	14.92	15.38	16.01
	1	24	16.67	17.03	17.57	15.83	16.27	16.82	14.77	15.22	15.86
	1	49	16.72	17.00	17.67	15.85	16.26	16.86	14.72	15.24	15.84
	25	0	15.88	16.23	16.75	15.03	15.32	15.99	13.92	14.21	14.77
	25	12	15.83	16.25	16.71	14.96	15.34	15.97	14.00	14.18	14.82
	25	25	15.84	16.19	16.68	14.97	15.29	15.93	13.93	14.17	14.76
	50	0	15.88	16.16	16.75	14.93	15.29	15.95	13.95	14.20	14.73

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55315	55990	56665	55315	55990	56665	55315	55990	56665
			3557.5 MHz	3625 MHz	3692.5 MHz	3557.5 MHz	3625 MHz	3692.5 MHz	3557.5 MHz	3625 MHz	3692.5 MHz
48 / 15M	1	0	16.85	17.32	17.74	13.95	14.34	14.66	13.12	13.49	13.92
	1	37	16.79	17.25	17.66	13.90	14.26	14.59	13.05	13.44	13.83
	1	74	16.83	17.29	17.62	13.93	14.28	14.64	13.09	13.42	13.86
	36	0	13.76	14.23	14.63	12.86	13.09	13.42	11.82	12.13	12.44
	36	19	13.80	14.19	14.62	12.84	13.11	13.43	11.87	12.16	12.48
	36	39	13.74	14.18	14.66	12.81	13.16	13.38	11.82	12.11	12.46
	75	0	12.49	12.91	13.40	11.51	11.97	12.47	10.46	10.95	11.46

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55340	55990	56640	55340	55990	56640	55340	55990	56640
			3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz
48 / 20M	1	0	16.83	17.33	17.78	14.01	14.22	14.80	12.99	13.51	13.84
	1	50	16.79	17.24	17.65	13.92	14.18	14.76	12.94	13.44	13.80
	1	99	16.72	17.21	17.70	13.99	14.11	14.69	12.93	13.42	13.83
	50	0	13.83	14.12	14.62	12.76	13.06	13.37	11.85	12.21	12.36
	50	25	13.74	14.07	14.59	12.78	13.02	13.36	11.80	12.15	12.36
	50	50	13.77	14.05	14.60	12.76	13.10	13.40	11.77	12.13	12.31
	100	0	11.30	11.78	12.18	10.33	10.78	11.18	9.29	9.80	10.16

Full Conducted Output Power

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55265	55990	56715	55265	55990	56715	55265	55990	56715
			3552.5 MHz	3625 MHz	3697.5 MHz	3552.5 MHz	3625 MHz	3697.5 MHz	3552.5 MHz	3625 MHz	3697.5 MHz
48 / 5M	1	0	16.71	17.10	17.73	15.74	16.20	16.79	14.82	15.12	15.90
	1	12	16.64	16.98	17.65	15.72	16.11	16.62	14.75	15.06	15.83
	1	24	16.61	16.86	17.64	15.69	16.06	16.60	14.80	15.02	15.78
	12	0	15.70	16.01	16.76	14.86	15.26	15.88	13.95	14.23	14.79
	12	6	15.68	16.04	16.74	14.86	15.20	15.73	13.99	14.30	14.83
	12	13	15.59	15.98	16.66	14.82	15.23	15.77	13.93	14.26	14.76
	25	0	15.65	15.94	16.72	14.83	15.19	15.80	13.96	14.27	14.77

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55290	55990	56690	55290	55990	56690	55290	55990	56690
			3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz
48 / 10M	1	0	16.74	17.10	17.77	15.98	16.35	16.91	14.92	15.38	16.01
	1	24	16.67	17.03	17.57	15.83	16.27	16.82	14.77	15.22	15.86
	1	49	16.72	17.00	17.67	15.85	16.26	16.86	14.72	15.24	15.84
	25	0	15.88	16.23	16.75	15.03	15.32	15.99	13.92	14.21	14.77
	25	12	15.83	16.25	16.71	14.96	15.34	15.97	14.00	14.18	14.82
	25	25	15.84	16.19	16.68	14.97	15.29	15.93	13.93	14.17	14.76
	50	0	15.88	16.16	16.75	14.93	15.29	15.95	13.95	14.20	14.73

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55315	55990	56665	55315	55990	56665	55315	55990	56665
			3557.5	3625	3692.5	3557.5	3625	3692.5	3557.5	3625	3692.5
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 15M	1	0	16.82	17.33	17.74	13.97	14.32	14.69	13.13	13.51	13.94
	1	37	16.77	17.21	17.65	13.92	14.22	14.62	13.06	13.44	13.86
	1	74	16.76	17.24	17.71	13.88	14.29	14.66	13.10	13.48	13.80
	36	0	13.82	14.22	14.67	12.84	13.14	13.49	11.84	12.18	12.50
	36	19	13.81	14.16	14.62	12.83	13.11	13.42	11.80	12.12	12.47
	36	39	13.75	14.23	14.58	12.77	13.16	13.46	11.76	12.16	12.44
	75	0	13.77	14.18	14.65	12.82	13.15	13.42	11.83	12.17	12.46

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55340	55990	56640	55340	55990	56640	55340	55990	56640
			3560	3625	3690	3560	3625	3690	3560	3625	3690
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 20M	1	0	16.88	17.38	17.81	14.05	14.24	14.84	13.05	13.56	13.86
	1	50	16.80	17.26	17.47	13.94	14.20	14.77	13.01	13.40	13.82
	1	99	16.84	17.28	17.57	13.97	14.16	14.72	13.02	13.45	13.82
	50	0	13.89	14.16	14.64	12.85	13.18	13.44	11.82	12.22	12.44
	50	25	13.82	14.25	14.54	12.80	13.11	13.48	11.90	12.16	12.46
	50	50	13.88	14.22	14.61	12.83	13.11	13.39	11.87	12.18	12.37
	100	0	13.84	14.25	14.60	12.77	13.15	13.37	11.83	12.12	12.42

EIRP Power (dBm) / Per 10M

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55265	55990	56715	55265	55990	56715	55265	55990	56715
			3552.5	3625	3697.5	3552.5	3625	3697.5	3552.5	3625	3697.5
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 5M	1	0	18.01	18.70	19.63	17.04	17.90	18.50	16.82	16.72	17.78
	1	12	18.34	18.78	19.15	17.62	17.91	18.22	16.05	16.36	17.83
	1	24	18.11	18.56	19.04	17.09	17.76	18.10	16.20	16.42	17.40
	12	0	17.30	17.51	18.76	16.56	16.86	17.68	15.65	15.73	16.79
	12	6	17.48	17.74	18.14	16.16	17.20	17.43	15.89	15.60	16.83
	12	13	17.39	17.98	17.96	16.62	17.03	17.67	15.73	16.16	16.06
	25	0	16.95	17.34	18.12	16.83	17.09	17.80	15.96	16.17	16.57

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55290	55990	56690	55290	55990	56690	55290	55990	56690
			3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz	3555 MHz	3625 MHz	3695 MHz
48 / 10M	1	0	18.54	19.00	19.67	17.68	17.65	18.91	16.82	16.68	17.54
	1	24	18.07	18.43	18.87	17.23	18.07	18.82	16.57	16.62	17.86
	1	49	18.32	18.60	19.51	17.85	17.96	18.56	16.22	17.14	17.31
	25	0	17.48	18.13	18.25	16.83	16.72	17.49	15.72	15.91	16.07
	25	12	17.13	17.65	18.21	16.36	16.84	17.47	15.30	15.68	16.42
	25	25	17.44	17.69	18.58	16.37	16.89	17.63	15.53	16.07	16.26
	50	0	17.48	17.66	18.75	16.43	17.29	17.65	15.85	16.00	16.53

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55315	55990	56665	55315	55990	56665	55315	55990	56665
			3557.5 MHz	3625 MHz	3692.5 MHz	3557.5 MHz	3625 MHz	3692.5 MHz	3557.5 MHz	3625 MHz	3692.5 MHz
48 / 15M	1	0	18.34	19.36	19.76	15.29	16.06	16.46	14.77	14.95	15.84
	1	37	18.11	18.94	19.67	15.96	15.65	16.46	14.78	14.78	15.40
	1	74	18.30	18.76	19.14	15.41	15.72	16.20	14.63	15.30	15.67
	36	0	15.74	15.95	16.60	14.38	14.56	15.11	13.76	13.62	14.04
	36	19	15.34	15.88	16.25	14.25	14.73	15.46	13.63	13.96	14.39
	36	39	15.67	15.76	16.21	14.41	15.19	14.89	13.58	13.80	14.46
	75	0	15.20	15.82	16.49	14.85	15.08	15.45	13.57	13.50	13.80

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55340	55990	56640	55340	55990	56640	55340	55990	56640
			3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz
48 / 20M	1	0	18.32	18.80	19.84	15.58	15.78	16.72	14.57	15.49	15.54
	1	50	18.14	19.28	19.29	15.26	15.53	16.29	14.85	15.32	15.28
	1	99	18.17	18.90	19.30	15.61	15.89	16.46	14.75	15.39	15.44
	50	0	15.21	16.00	16.48	14.79	14.91	14.97	13.75	13.86	14.18
	50	25	15.44	15.69	16.58	14.83	15.14	15.21	13.33	13.68	14.50
	50	50	15.31	16.04	16.64	14.75	14.54	15.42	13.41	13.62	13.81
	100	0	15.46	15.67	16.44	14.29	14.99	14.89	13.87	13.84	13.96

EIRP Power (dBm) / Full Power

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55265	55990	56715	55265	55990	56715	55265	55990	56715
			3552.5	3625	3697.5	3552.5	3625	3697.5	3552.5	3625	3697.5
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 5M	1	0	18.01	18.70	19.63	17.04	17.90	18.50	16.82	16.72	17.78
	1	12	18.34	18.78	19.15	17.62	17.91	18.22	16.05	16.36	17.83
	1	24	18.11	18.56	19.04	17.09	17.76	18.10	16.20	16.42	17.40
	12	0	17.30	17.51	18.76	16.56	16.86	17.68	15.65	15.73	16.79
	12	6	17.48	17.74	18.14	16.16	17.20	17.43	15.89	15.60	16.83
	12	13	17.39	17.98	17.96	16.62	17.03	17.67	15.73	16.16	16.06
	25	0	16.95	17.34	18.12	16.83	17.09	17.80	15.96	16.17	16.57

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55290	55990	56690	55290	55990	56690	55290	55990	56690
			3555	3625	3695	3555	3625	3695	3555	3625	3695
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 10M	1	0	18.54	19.00	19.67	17.68	17.65	18.91	16.82	16.68	17.54
	1	24	18.07	18.43	18.87	17.23	18.07	18.82	16.57	16.62	17.86
	1	49	18.32	18.60	19.51	17.85	17.96	18.56	16.22	17.14	17.31
	25	0	17.48	18.13	18.25	16.83	16.72	17.49	15.72	15.91	16.07
	25	12	17.13	17.65	18.21	16.36	16.84	17.47	15.30	15.68	16.42
	25	25	17.44	17.69	18.58	16.37	16.89	17.63	15.53	16.07	16.26
	50	0	17.48	17.66	18.75	16.43	17.29	17.65	15.85	16.00	16.53

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55315	55990	56665	55315	55990	56665	55315	55990	56665
			3557.5	3625	3692.5	3557.5	3625	3692.5	3557.5	3625	3692.5
			MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
48 / 15M	1	0	18.32	19.33	19.74	15.27	16.02	16.44	14.73	14.91	15.80
	1	37	18.07	18.91	19.65	15.92	15.62	16.42	14.76	14.74	15.36
	1	74	18.26	18.74	19.11	15.38	15.69	16.16	14.60	15.28	15.64
	36	0	15.72	15.92	16.57	14.34	14.54	15.09	13.74	13.58	14.00
	36	19	15.31	15.86	16.22	14.23	14.71	15.42	13.60	13.92	14.37
	36	39	15.65	15.73	16.18	14.37	15.16	14.86	13.56	13.76	14.44
	75	0	15.17	15.78	16.45	14.82	15.05	15.42	13.53	13.47	13.76

Band / BW	RB Size	RB Offset	QPSK			16QAM			64QAM		
			Low CH	Mid CH	High CH	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
			55340	55990	56640	55340	55990	56640	55340	55990	56640
			3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz	3560 MHz	3625 MHz	3690 MHz
48 / 20M	1	0	18.28	18.78	19.81	15.55	15.74	16.69	14.55	15.46	15.52
	1	50	18.10	19.26	19.27	15.24	15.50	16.27	14.81	15.30	15.26
	1	99	18.14	18.88	19.27	15.57	15.86	16.42	14.72	15.35	15.42
	50	0	15.19	15.96	16.44	14.75	14.88	14.94	13.72	13.82	14.14
	50	25	15.42	15.65	16.54	14.80	15.11	15.18	13.30	13.66	14.46
	50	50	15.28	16.02	16.61	14.73	14.51	15.39	13.37	13.58	13.77
	100	0	15.44	15.65	16.40	14.27	14.95	14.87	13.83	13.82	13.92

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup



4.2.4 Test Results

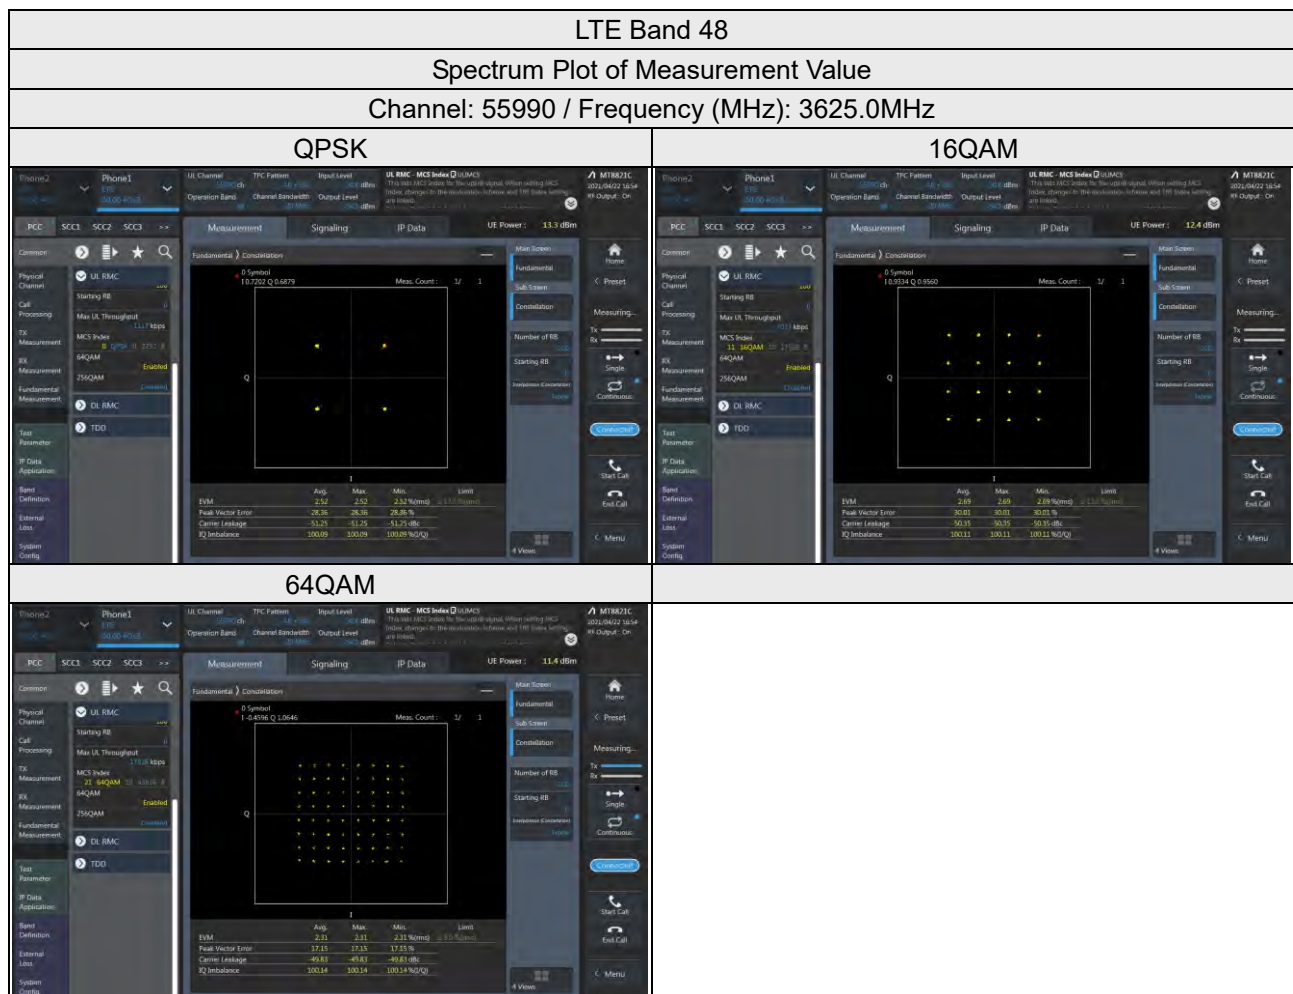

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency band.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

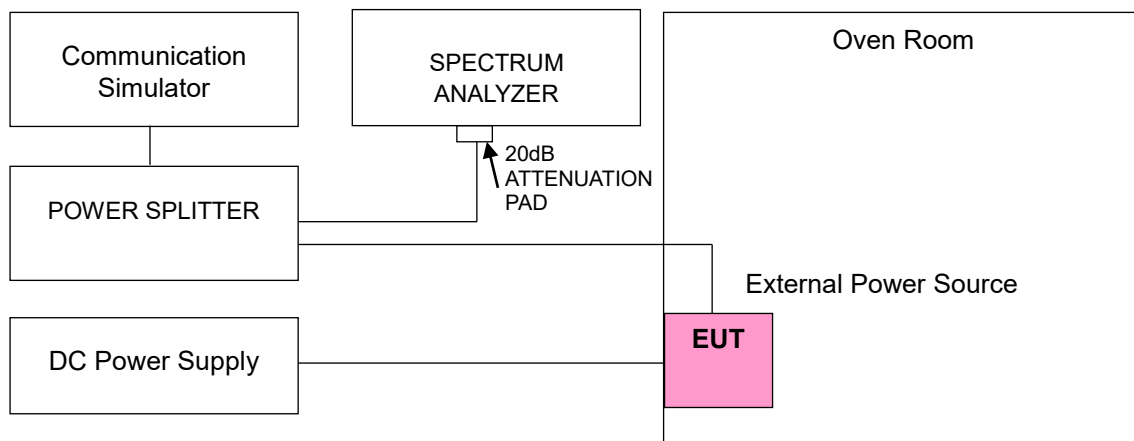

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 48			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
10.8	3552.500003	0.000816	3697.500000	0.000270
9.18	3552.500002	0.000591	3697.500000	0.000297
12.42	3552.500003	0.000929	3697.500000	0.000270

Note: The applicant defined the normal working voltage is from 9.4Vdc to 12.77Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 48			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	3552.500002	0.000647	3697.500000	0.000649
-20	3552.500003	0.000788	3697.500000	0.000352
-10	3552.500003	0.000929	3697.500000	0.000947
0	3552.500002	0.000479	3697.500000	0.000703
10	3552.500004	0.001013	3697.500000	0.000703
20	3552.499999	-0.000338	3697.500000	-0.001001
30	3552.499997	-0.000816	3697.500000	-0.000920
40	3552.499999	-0.000422	3697.500000	-0.000865
50	3552.499997	-0.000816	3697.500000	-0.000433

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 48			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
10.8	3555.000003	0.000731	3695.000000	0.000406
9.18	3555.000004	0.001013	3695.000000	0.000893
12.42	3555.000004	0.001041	3695.000000	0.000758

Note: The applicant defined the normal working voltage is from 9.4Vdc to 12.77Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 48			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	3555.000003	0.000900	3695.000000	0.000271
-20	3555.000003	0.000759	3695.000000	0.000541
-10	3555.000002	0.000647	3695.000000	0.000866
0	3555.000003	0.000816	3695.000000	0.000487
10	3555.000003	0.000759	3695.000000	0.001001
20	3554.999999	-0.000366	3695.000000	-0.000271
30	3554.999998	-0.000591	3695.000000	-0.000947
40	3554.999996	-0.001097	3695.000000	-0.000812
50	3554.999996	-0.001041	3695.000000	-0.000677

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 48			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
10.8	3557.500004	0.000984	3692.500000	0.000271
9.18	3557.500002	0.000534	3692.500000	0.001002
12.42	3557.500003	0.000900	3692.500000	0.001083

Note: The applicant defined the normal working voltage is from 9.4Vdc to 12.77Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 48			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	3557.500001	0.000309	3692.500000	0.000758
-20	3557.500001	0.000394	3692.500000	0.000379
-10	3557.500002	0.000590	3692.500000	0.000867
0	3557.500003	0.000703	3692.500000	0.000569
10	3557.500004	0.001068	3692.500000	0.000975
20	3557.499998	-0.000506	3692.500000	-0.000298
30	3557.499996	-0.001012	3692.500000	-0.000271
40	3557.499997	-0.000928	3692.500000	-0.000433
50	3557.499999	-0.000309	3692.500000	-0.000704

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 48			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
10.8	3555.000003	0.000984	3555.000000	0.000271
9.18	3555.000003	0.000534	3555.000000	0.001002
12.42	3555.000001	0.000900	3555.000000	0.001083

Note: The applicant defined the normal working voltage is from 9.4Vdc to 12.77Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 48			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	3555.000003	0.000309	3555.000000	0.000758
-20	3555.000003	0.000900	3555.000000	0.000298
-10	3555.000003	0.000900	3555.000000	0.001002
0	3555.000003	0.000703	3555.000000	0.000948
10	3555.000003	0.000843	3555.000000	0.000894
20	3554.999998	-0.000675	3555.000000	-0.000785
30	3554.999998	-0.000478	3555.000000	-0.000758
40	3554.999996	-0.001068	3555.000000	-0.000840
50	3554.999997	-0.000984	3555.000000	-0.000894

4.4 Emission Bandwidth Measurement

4.4.1 Emission Bandwidth Measurement

Reference only

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.4.4 Test Procedure

Occupied Bandwidth:

All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth. For the 99% bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

26dBc Bandwidth:

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW =51 kHz (5 MHz bandwidth), 100 kHz (10 MHz bandwidth), 150 kHz (15 MHz bandwidth), 200 kHz (20 MHz bandwidth). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. For the 26dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.4.7 Test Result (-26dB Bandwidth)

LTE Band 48

LTE Band 48, Channel Bandwidth 5MHz				
Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55265	3552.5	4.75	4.73	4.70
55990	3625.0	4.76	4.73	4.73
56715	3697.5	4.73	4.73	4.75
LTE Band 48, Channel Bandwidth 10MHz				
Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55290	3555.0	9.32	9.33	9.34
55990	3625.0	9.33	9.33	9.37
56690	3695.0	9.29	9.30	9.33
LTE Band 48, Channel Bandwidth 15MHz				
Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55315	3557.5	13.93	13.90	13.99
55990	3625.0	13.94	14.00	13.96
56665	3692.5	13.94	13.96	13.93
LTE Band 48, Channel Bandwidth 20MHz				
Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55340	3560.0	18.51	18.57	18.53
55990	3625.0	18.57	18.56	18.59
56640	3690.0	18.53	18.52	18.55

Spectrum Plot of Worst Value

5MHz / QPSK

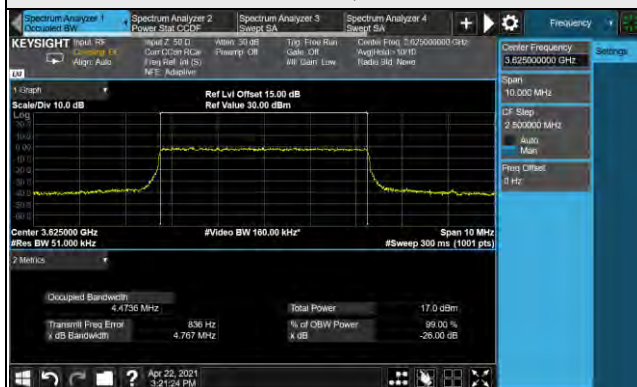

10MHz / 64QAM



15MHz / 16QAM



20MHz / 64QAM




4.4.8 Test Result (Occupied Bandwidth)


LTE Band 48, Channel Bandwidth 5MHz				
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55265	3552.5	4.46	4.45	4.46
55990	3625.0	4.47	4.46	4.46
56715	3697.5	4.46	4.46	4.47
LTE Band 48, Channel Bandwidth 10MHz				
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55290	3555.0	8.92	8.92	8.91
55990	3625.0	8.92	8.91	8.92
56690	3695.0	8.91	8.91	8.92
LTE Band 48, Channel Bandwidth 15MHz				
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55315	3557.5	13.36	13.37	13.37
55990	3625.0	13.38	13.36	13.37
56665	3692.5	13.37	13.37	13.37
LTE Band 48, Channel Bandwidth 20MHz				
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM
55340	3560.0	17.81	17.81	17.81
55990	3625.0	17.81	17.83	17.81
56640	3690.0	17.80	17.82	17.82

Spectrum Plot of Worst Value

5MHz / QPSK

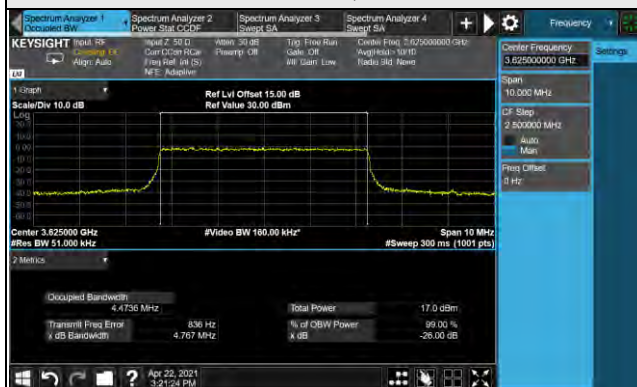

10MHz / QPSK

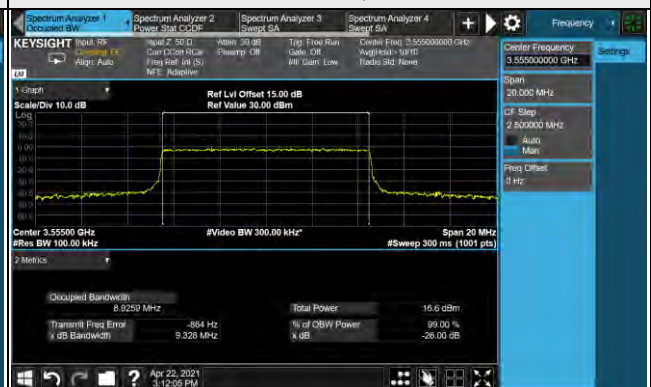

15MHz / QPSK



20MHz / 16QAM




4.5 Peak to Average Ratio Measurement

4.5.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup

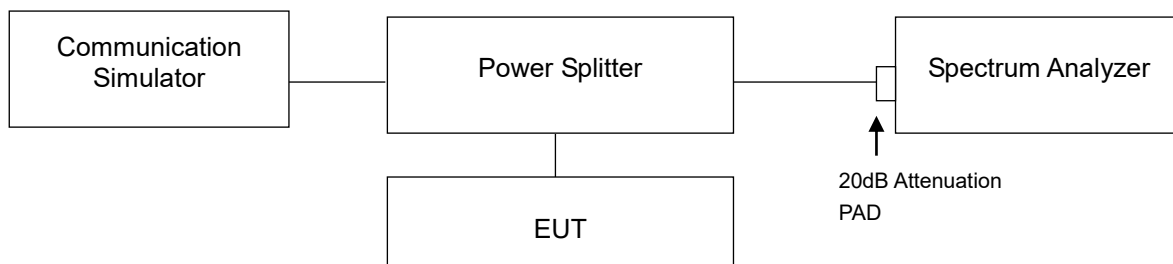

4.5.3 Test Procedures

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

LTE Band 48

LTE Band 48, Channel Bandwidth 5MHz				
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		QPSK	16QAM	64QAM
55265	3552.5	5.62	6.29	6.54
55990	3625.0	5.65	6.33	6.56
56715	3697.5	5.99	6.62	6.93
LTE Band 48, Channel Bandwidth 10MHz				
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		QPSK	16QAM	64QAM
55290	3555.0	5.63	6.25	6.57
55990	3625.0	5.61	6.42	6.54
56690	3695.0	6.03	6.58	6.95
LTE Band 48, Channel Bandwidth 15MHz				
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		QPSK	16QAM	64QAM
55315	3557.5	5.39	6.21	7.39
55990	3625.0	5.32	6.20	6.51
56665	3692.5	5.56	6.38	7.57
LTE Band 48, Channel Bandwidth 20MHz				
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		QPSK	16QAM	64QAM
55340	3560.0	5.54	6.17	7.13
55990	3625.0	5.32	6.16	6.57
56640	3690.0	5.51	6.38	7.41

Spectrum Plot of Worst Value

5MHz / 64QAM



10MHz / 64QAM



15MHz / 64QAM



20MHz / 64QAM




4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

Power of any emissions outside the Fundamental	Limit
Within 0-10MHz above the Assigned Channel	-13 dBm/MHz
Within 0-10MHz below the Assigned Channel	
Greater than 0-10MHz above the Assigned Channel	-25 dBm/MHz
Greater than 0-10MHz below the Assigned Channel	
Power of any emission below 3530MHz	-40 dBm/MHz
Power of any emission above 3720MHz	

4.6.2 Test Setup

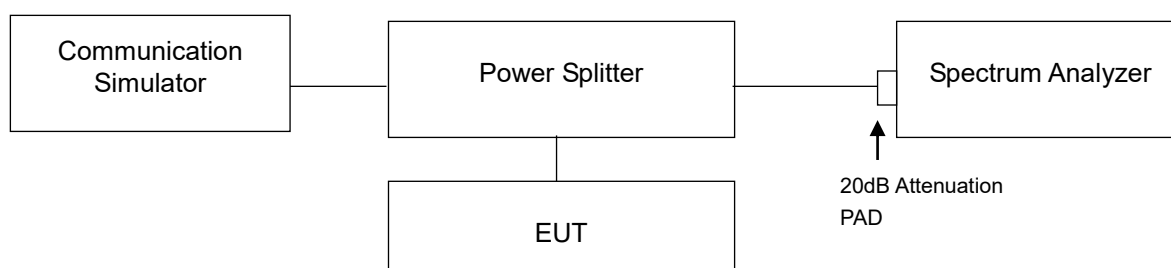

4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 40 GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement. Measurement method refers to FCC Part96 section 96.41 (e)(1)(3).
- When testing in the 5 MHz and 10 MHz channel BW mode, the 1% range is extended from 1M above and below the channel edge to 2M, and then the limit is further reduced by $10 \log (1000/100) = 10\text{dB}$ (that is, the total $-13 + -10 = -23\text{dB}$) to compensate for the integral from 100k to 1M.


4.6.4 Test Results




LTE Band 48, Channel Bandwidth 5MHz

Channel 56715 (3697.5MHz)


1RB

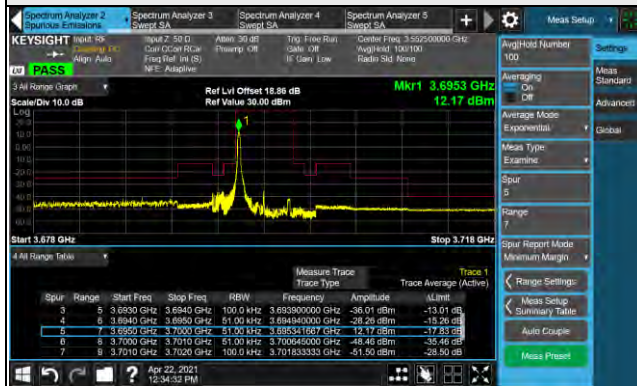

1RB 24

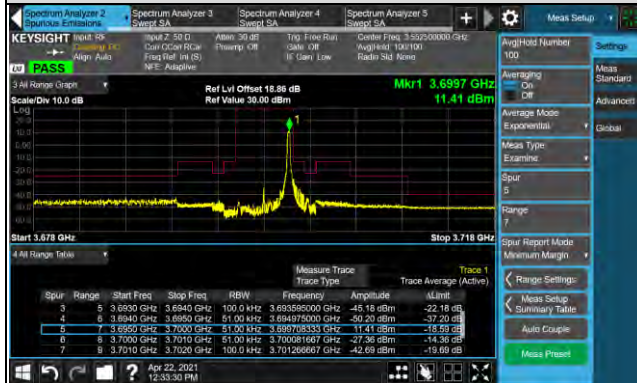


Full RB

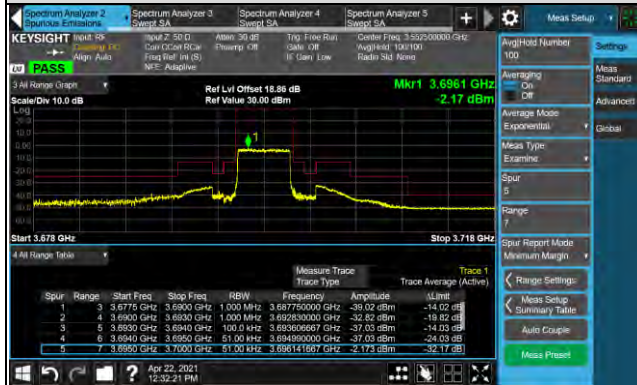


LTE Band 48, Channel Bandwidth 5MHz

Channel 55265 (3552.5MHz)


Frequency Range: 9 kHz ~ 1 GHz

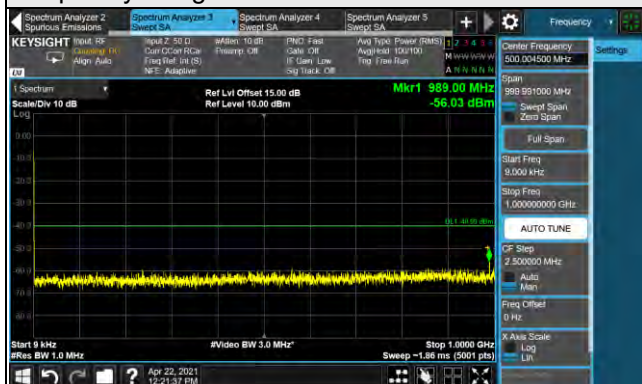

Frequency Range: 1 GHz ~ 10 GHz

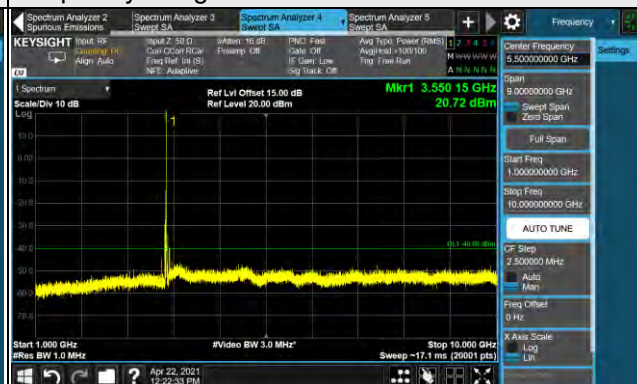

Frequency Range: 10 GHz ~ 40 GHz

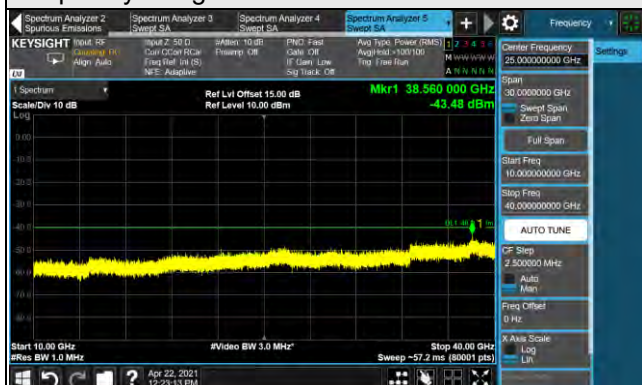


Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 5MHz

Channel 55990 (3625.0MHz)


Frequency Range: 9 kHz ~ 1 GHz

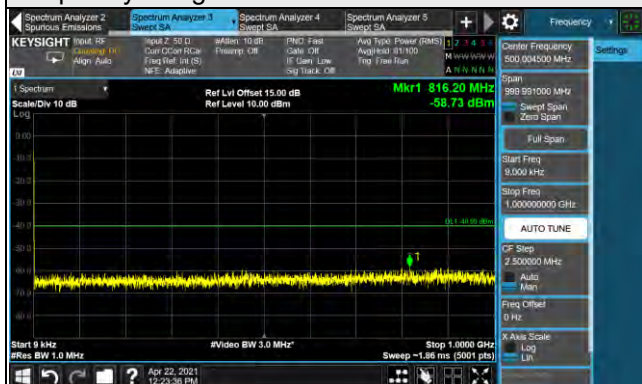

Frequency Range: 1 GHz ~ 10 GHz

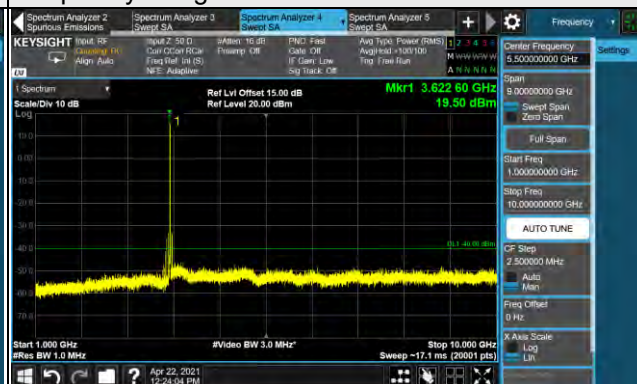

Frequency Range: 10 GHz ~ 40 GHz

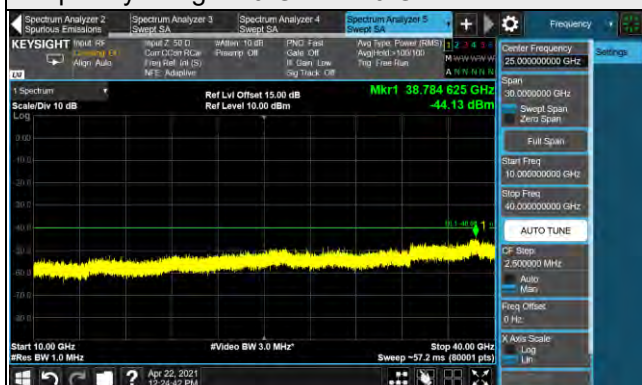


Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 5MHz

Channel 56715 (3697.50MHz)

Frequency Range: 9 kHz ~ 1 GHz

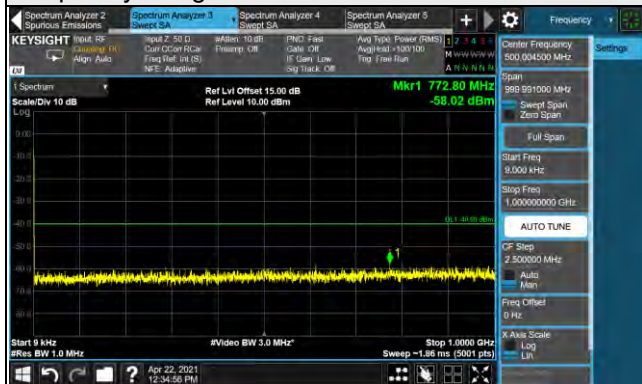

Frequency Range: 1 GHz ~ 10 GHz

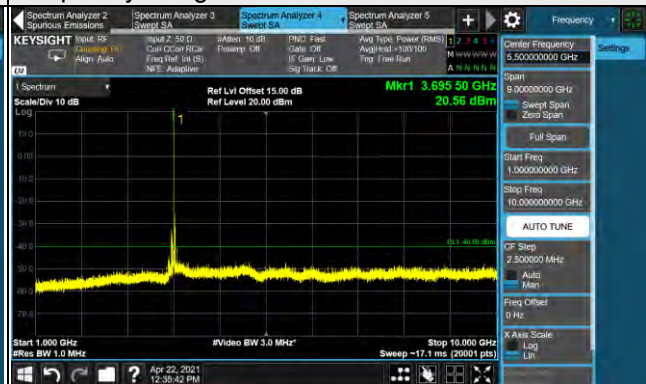

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 48, Channel Bandwidth 10MHz

Channel 55290 (3555.0MHz)

1RB

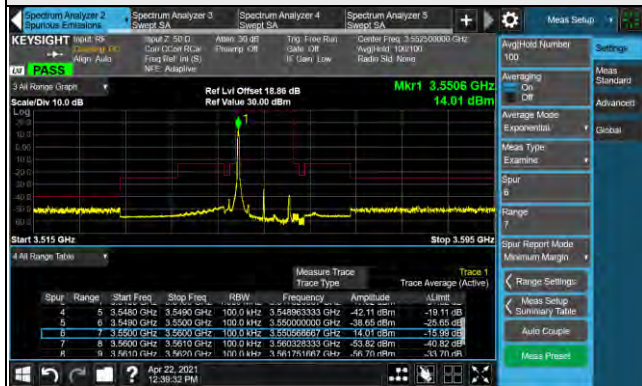


Channel 55990 (3625.0MHz)


1RB



1RB 49

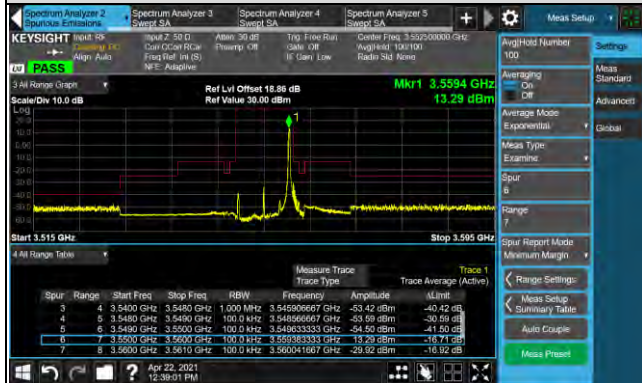

1RB 49

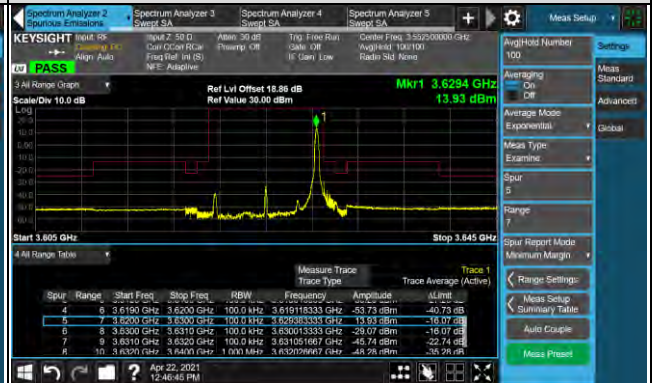

Full RB



Full RB



LTE Band 48, Channel Bandwidth 10MHz

Channel 56690 (3695.0MHz)

1RB



1RB 49




Full RB




LTE Band 48, Channel Bandwidth 10MHz

Channel 55290 (3555.0MHz)

Frequency Range: 9 kHz ~ 1 GHz

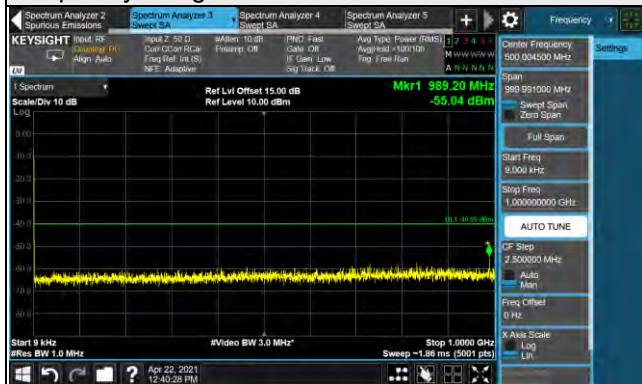

Frequency Range: 1 GHz ~ 10 GHz

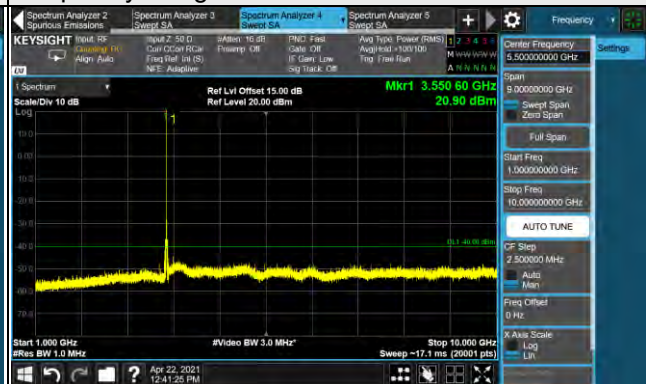

Frequency Range: 10 GHz ~ 40 GHz



Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 10MHz

Channel 55990 (3625.00MHz)

Frequency Range: 9 kHz ~ 1 GHz



Frequency Range: 1 GHz ~ 10 GHz

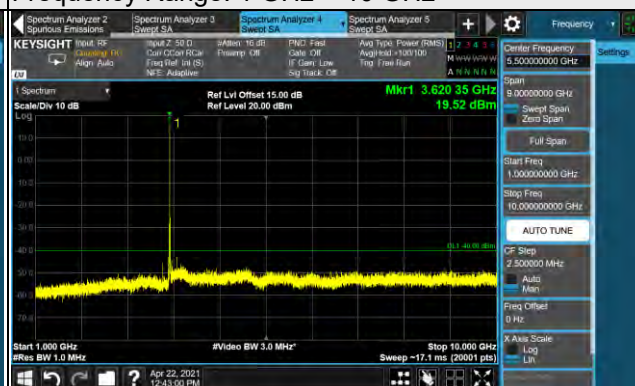

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 48, Channel Bandwidth 10MHz

Channel 56690 (3695.0MHz)

Frequency Range: 9 kHz ~ 1 GHz

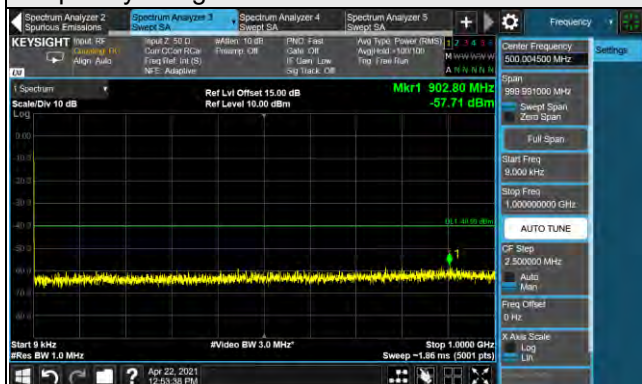

Frequency Range: 1 GHz ~ 10 GHz



Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 48, Channel Bandwidth 15MHz


Channel 55315 (3557.50MHz)

Channel 55990 (3625.0MHz)


1RB

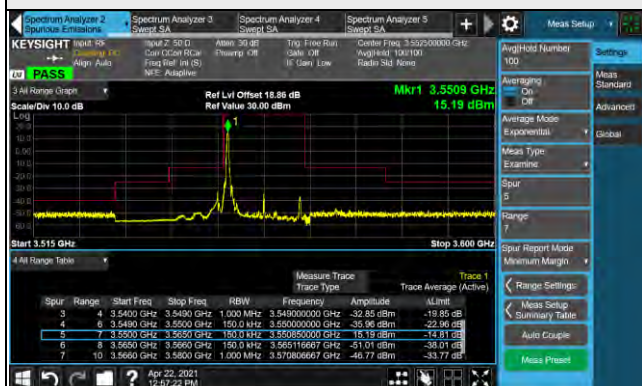


1RB

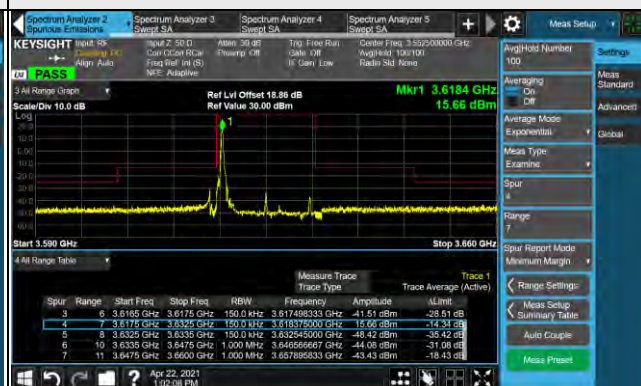


1RB 74

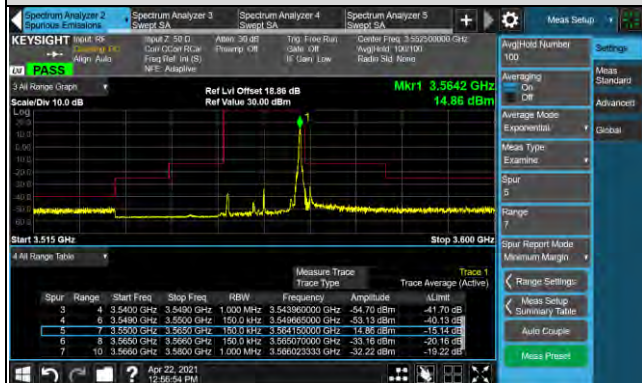


1RB 74

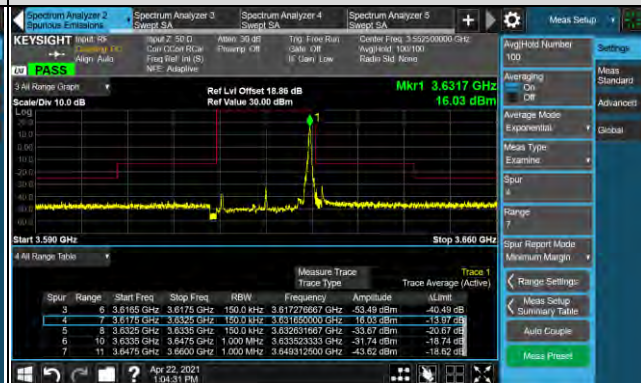

Full RB

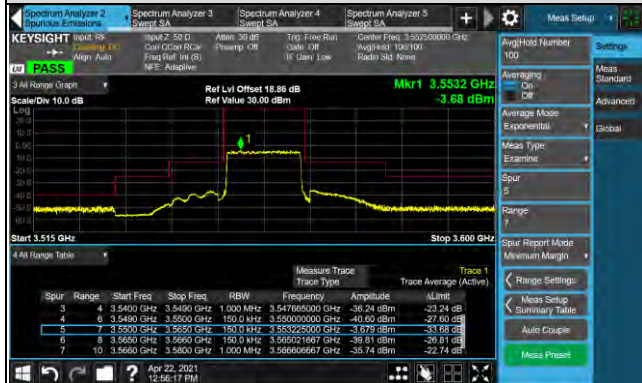


Full RB

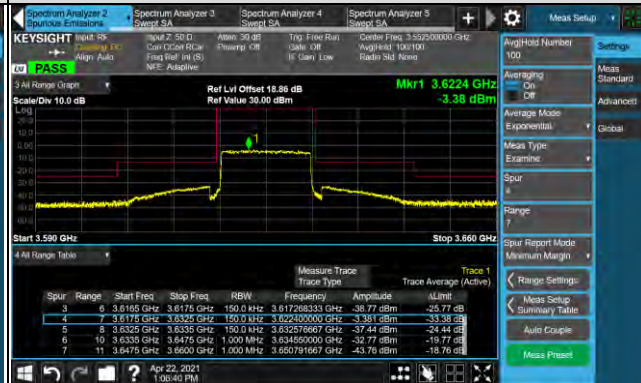


LTE Band 48, Channel Bandwidth 15MHz

Channel 56665 (3692.5MHz)


1RB

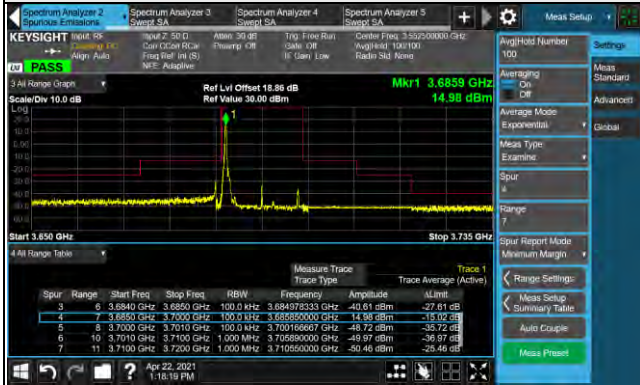

1RB 74

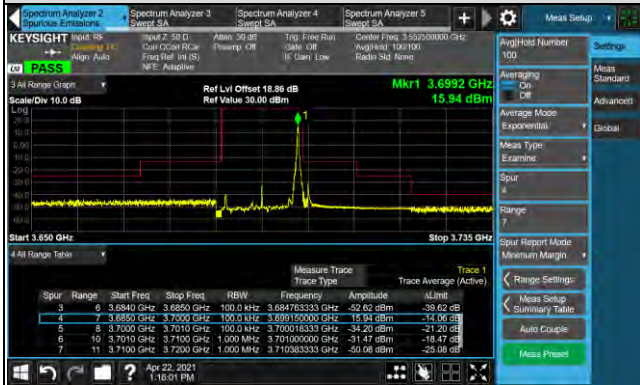


Full RB

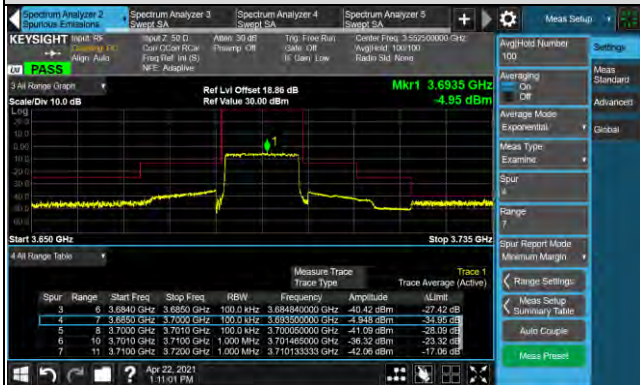


LTE Band 48, Channel Bandwidth 15MHz

Channel 55315 (3557.50MHz)

Frequency Range: 9 kHz ~ 1 GHz

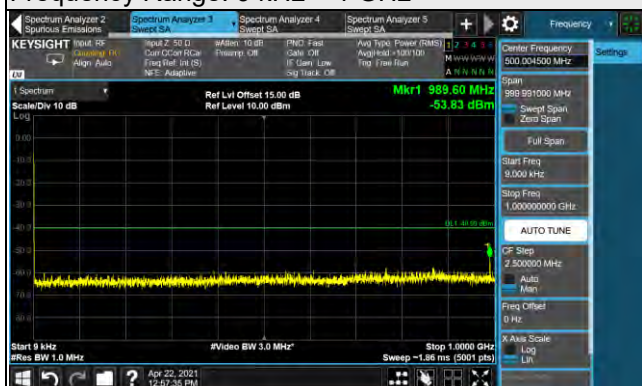

Frequency Range: 1 GHz ~ 10 GHz

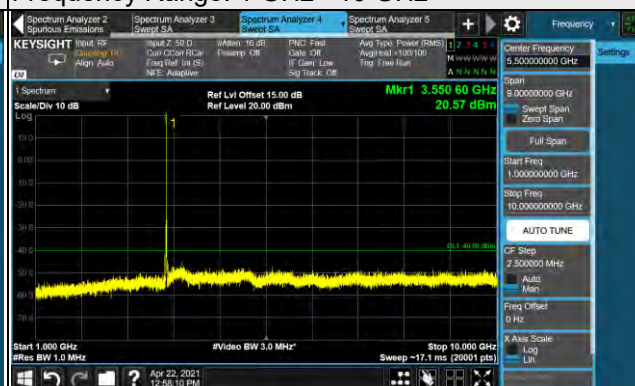

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 15MHz

Channel 55990 (3625.0MHz)

Frequency Range: 9 kHz ~ 1 GHz

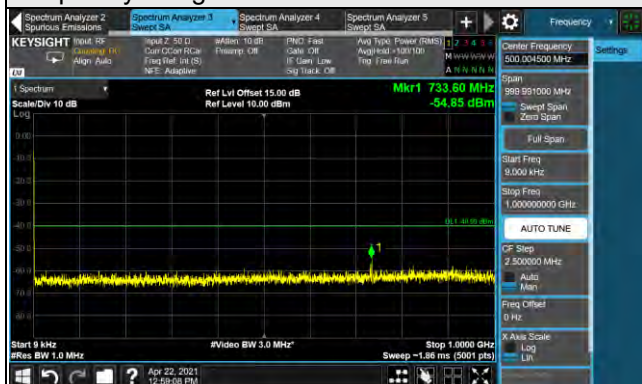

Frequency Range: 1 GHz ~ 10 GHz

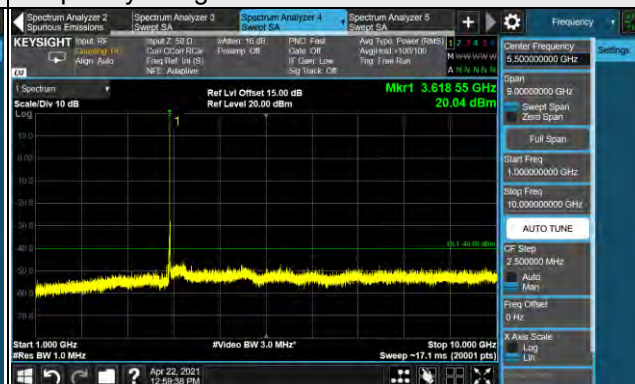

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 15MHz

Channel 56665 (3692.50MHz)

Frequency Range: 9 kHz ~ 1 GHz

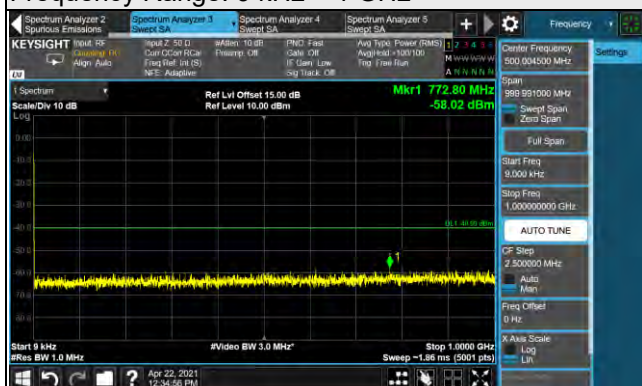

Frequency Range: 1 GHz ~ 10 GHz

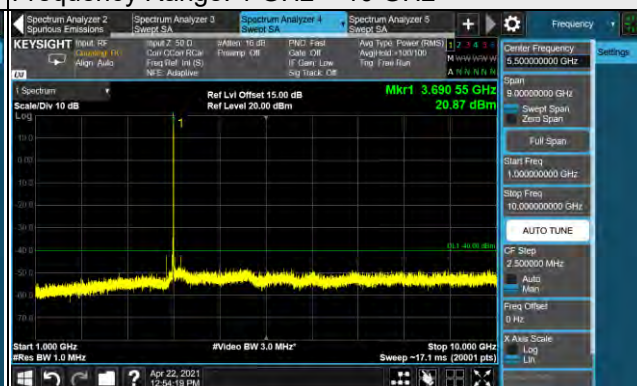

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.

LTE Band 48, Channel Bandwidth 20MHz


Channel 55340 (3560.0MHz)

1RB

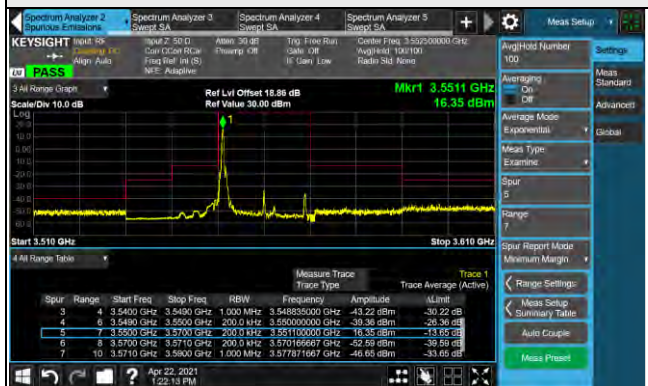


Channel 55990 (3625.0MHz)


1RB

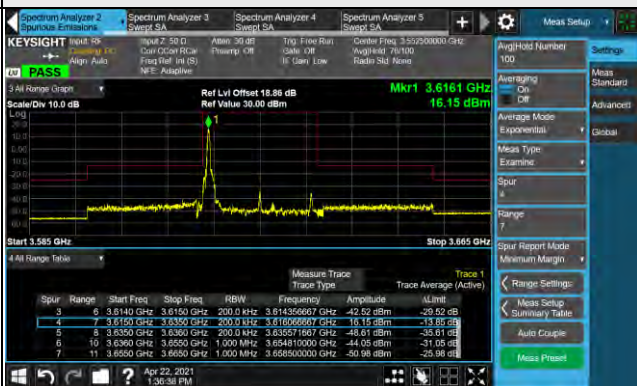

1RB 99

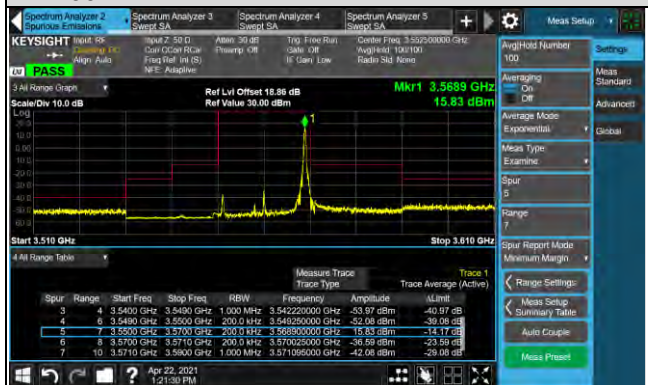


1RB 99

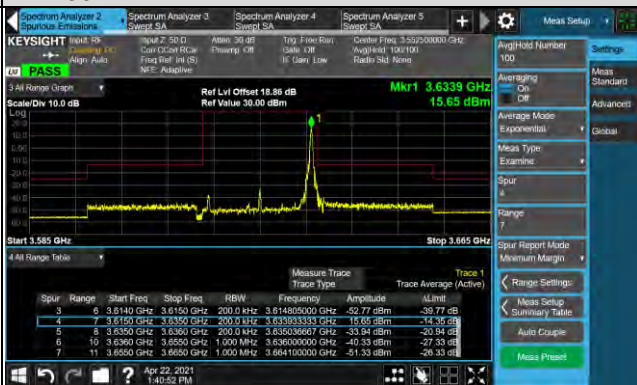

Full RB




Full RB

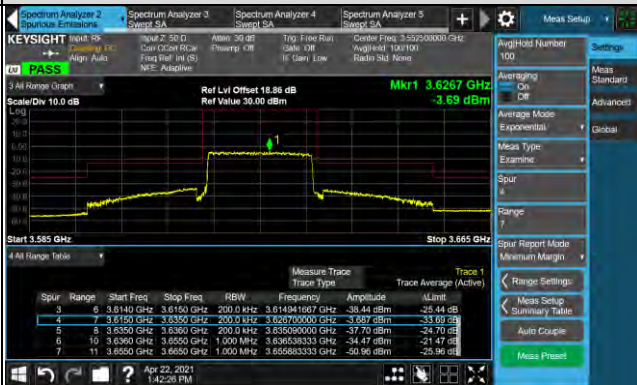


LTE Band 48, Channel Bandwidth 20MHz

Channel 56640 (3690.0MHz)


1RB

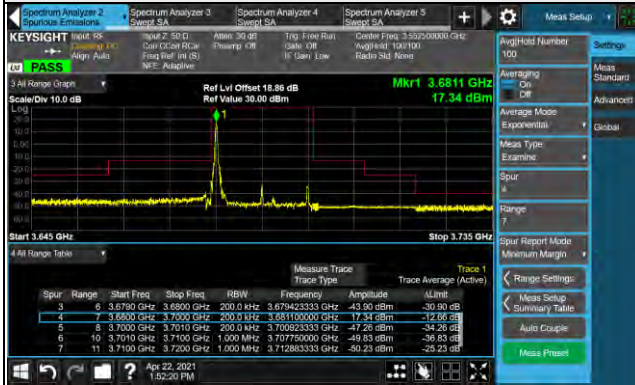

1RB 99

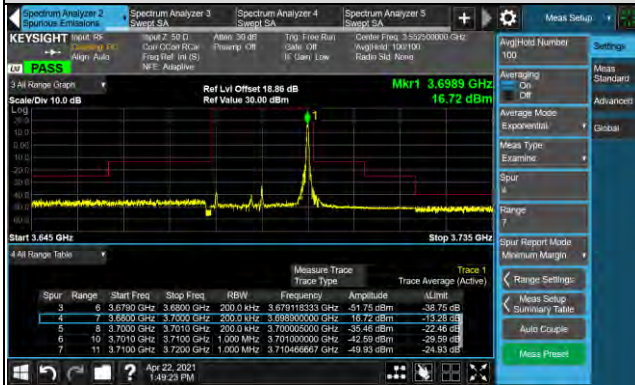


Full RB

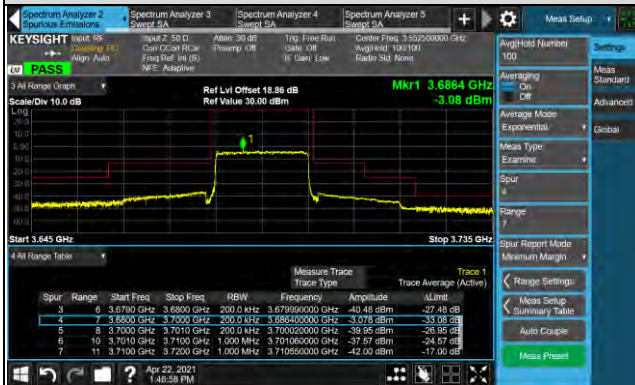


LTE Band 48, Channel Bandwidth 20MHz

Channel 55340 (3560.0MHz)

Frequency Range: 9 kHz ~ 1 GHz

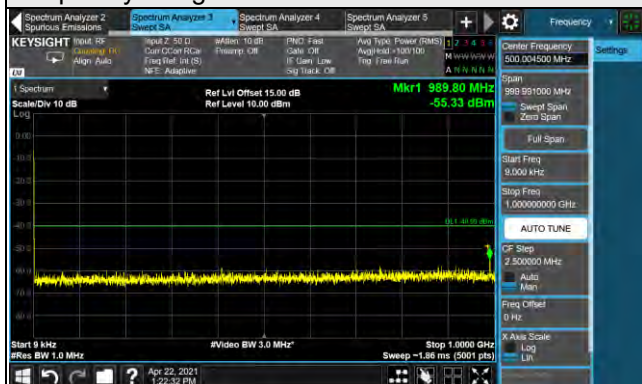

Frequency Range: 1 GHz ~ 10 GHz

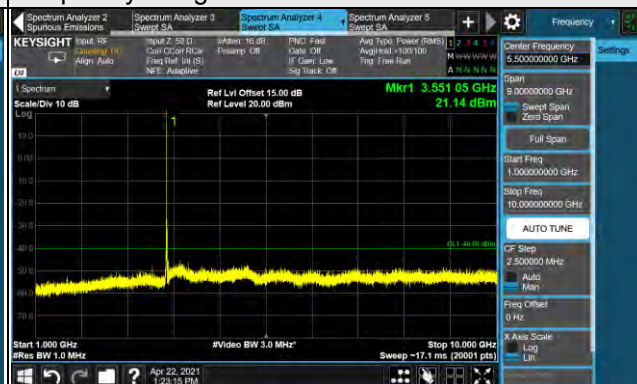

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 20MHz

Channel 55990 (3625.0MHz)

Frequency Range: 9 kHz ~ 1 GHz

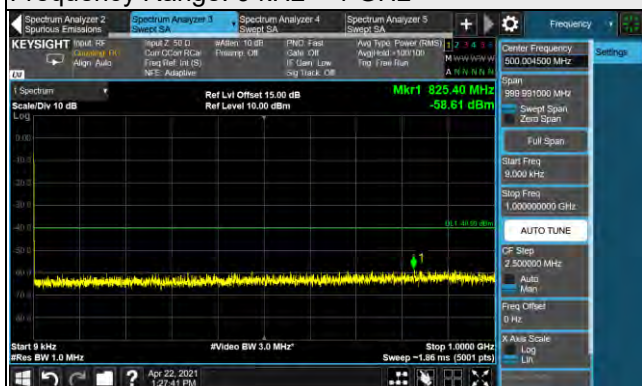

Frequency Range: 1 GHz ~ 10 GHz

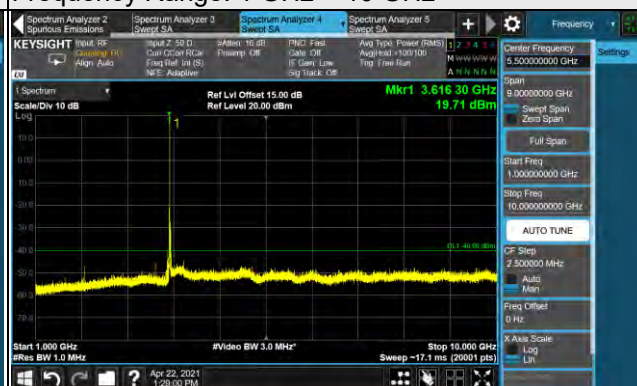

Frequency Range: 10 GHz ~ 40 GHz




Note: The signal at 9 kHz is IF signal from spectrum analyzer.


LTE Band 48, Channel Bandwidth 20MHz

Channel 56640 (3690.0MHz)


Frequency Range: 9 kHz ~ 1 GHz

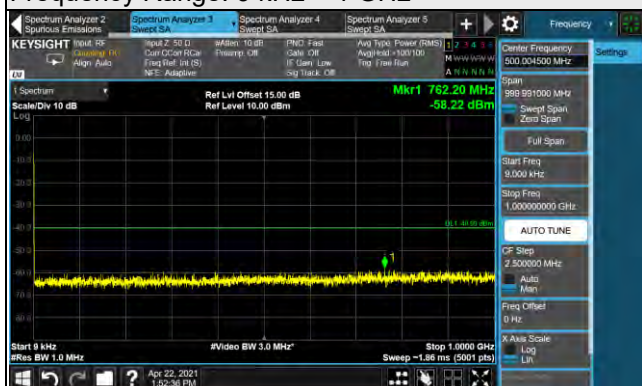

Frequency Range: 1 GHz ~ 10 GHz

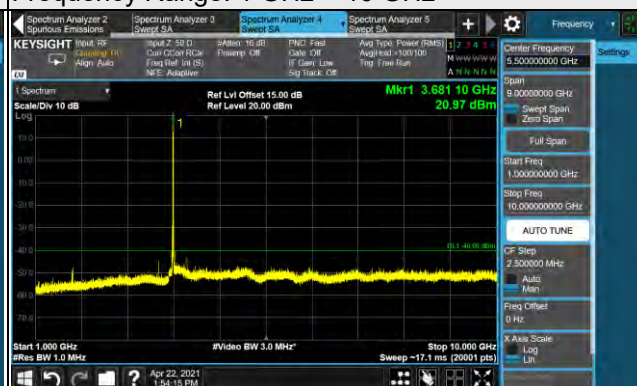

Frequency Range: 10 GHz ~ 40 GHz

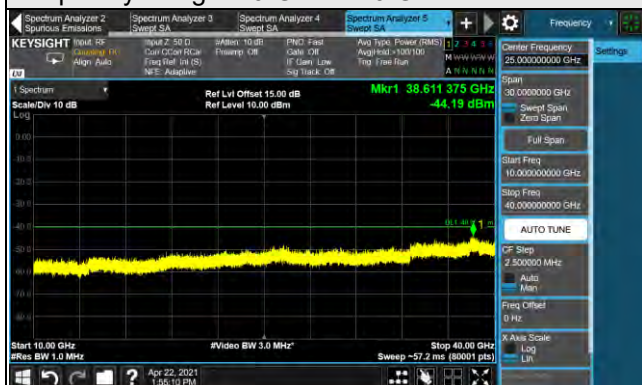

Note: The signal at 9 kHz is IF signal from spectrum analyzer.

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

4.7.2 Test Instruments

Refer to section 4.1.3 to get information of above instrument.

4.7.3 Test Procedures

- a. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. $EIRP = \text{Output power level} - \text{TX cable loss} + \text{Antenna gain of substitution horn. Correction Factor}$
(includes EIRP and ERP unit conversion factor) = $\text{Antenna gain of substitution horn.} - \text{Tx cable loss.}$
Measurement method refers to ANSI C63.26 section 5.5 and 5.2.7.
 $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.7.4 Deviation from Test Standard


No deviation.

4.7.5 Test Set Up

<Frequency Range below 1GHz>

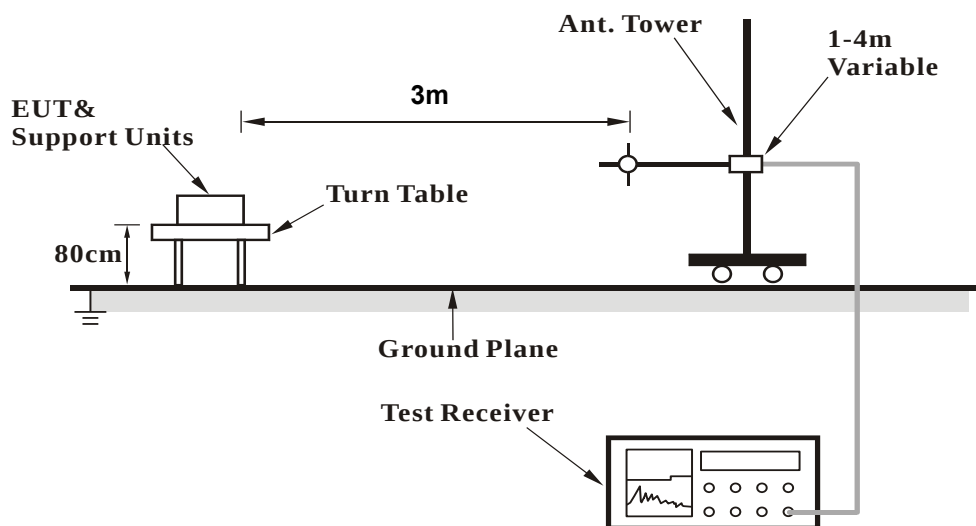

<Frequency Range above 1GHz>

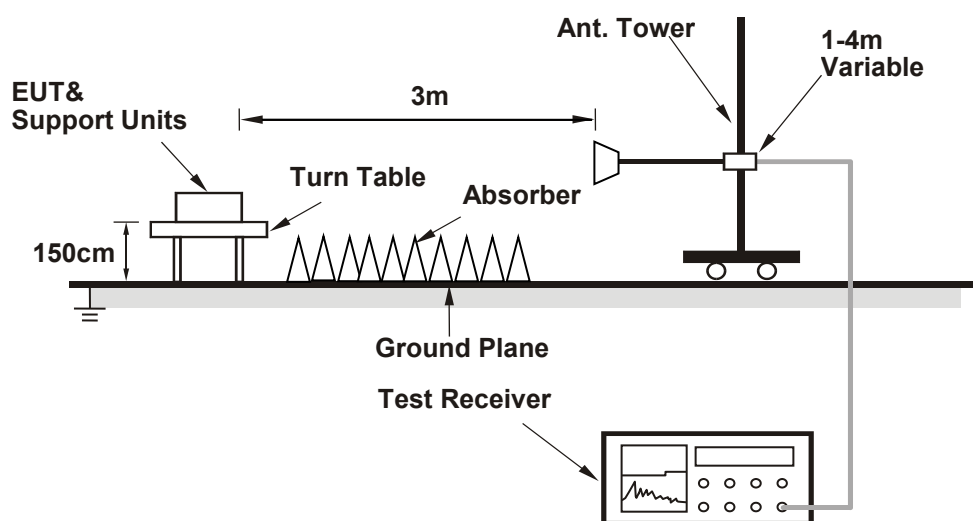

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 Test Results

Below 1GHz Data :

LTE Band 48


Channel Bandwidth: 20 MHz / QPSK

Mode	TX channel 55990 (3625.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	80.44	-48.84	-40.00	-8.84	1.50 H	319	59.80
2	165.80	-53.28	-40.00	-13.28	1.25 H	339	50.42
3	253.10	-60.43	-40.00	-20.43	1.00 H	327	43.39
4	353.01	-56.73	-40.00	-16.73	2.00 H	246	44.19
5	534.40	-57.48	-40.00	-17.48	1.50 H	161	39.91
6	615.88	-57.99	-40.00	-17.99	1.00 H	227	37.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

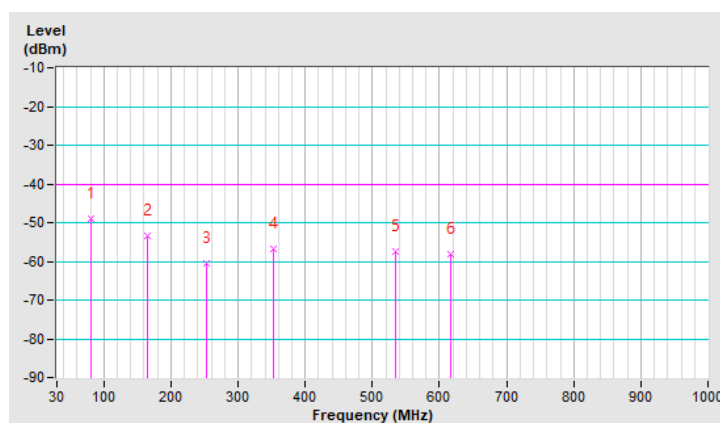


Mode	TX channel 55990 (3625.00MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	41.64	-48.60	-40.00	-8.60	1.50 V	24	55.95
2	97.90	-59.04	-40.00	-19.04	1.00 V	200	49.68
3	163.86	-52.21	-40.00	-12.21	1.25 V	271	51.35
4	404.42	-60.78	-40.00	-20.78	1.00 V	164	39.17
5	589.69	-58.35	-40.00	-18.35	2.00 V	247	37.73
6	932.10	-53.36	-40.00	-13.36	1.00 V	330	36.13

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
+ 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

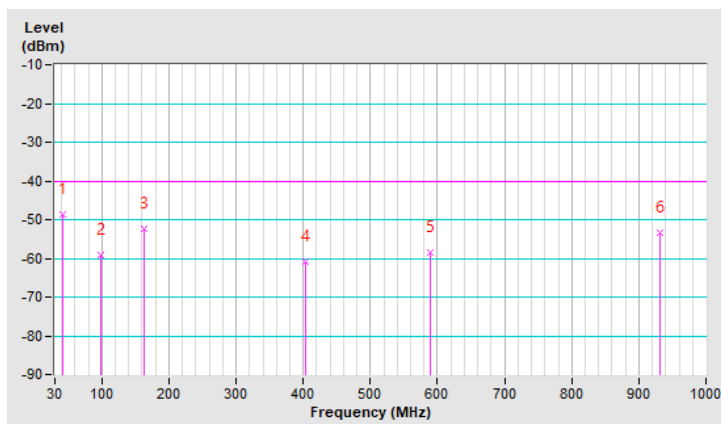

Above 1GHz

LTE Band 48, Channel Bandwidth 5MHz

Mode	TX channel 55265 (3552.5MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7105.00	-45.72	-40.00	-5.72	1.05 H	32	42.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7105.00	-45.82	-40.00	-5.82	3.66 V	198	42.00

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 55990 (3625.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7250.00	-44.87	-40.00	-4.87	1.09 H	35	42.44
Antenna Polarity & Test Distance: Vertical at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7250.00	-45.00	-40.00	-5.00	3.61 V	201	42.31

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 56715 (3697.5MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7395.00	-44.82	-40.00	-4.82	1.07 H	32	42.39
Antenna Polarity & Test Distance: Vertical at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7395.00	-45.62	-40.00	-5.62	3.64 V	196	41.59

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 48, Channel Bandwidth 20MHz

Mode	TX channel 55340 (3560.0MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7120.00	-44.37	-40.00	-4.37	1.04 H	33	43.41

Antenna Polarity & Test Distance: Vertical at 3 M

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7120.00	-44.26	-40.00	-4.26	3.65 V	192	43.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 55990 (3625.00MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7250.00	-43.72	-40.00	-3.72	3.65 H	205	43.59

Antenna Polarity & Test Distance: Vertical at 3 M

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7250.00	-44.16	-40.00	-4.16	1.08 V	39	43.15

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 56640 (3690.00MHz)	Frequency Range	1GHz ~ 40GHz
Environmental Conditions	22deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Rex Wang		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7380.00	-44.13	-40.00	-4.13	1.06 H	31	43.12
Antenna Polarity & Test Distance: Vertical at 3 M							
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	7380.00	-43.83	-40.00	-3.83	3.62 V	194	43.42

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---