



# **RADIO TEST REPORT**

## **FCC ID: Z4T-VOTINGBOXV1**

**Product:** Voting Box  
**Trade Mark:** N/A  
**Model No.:** Voting Box  
**Serial Model:** N/A  
**Report No.:** NTEK-2017NT01091157F1  
**Issue Date:** 14 Apr. 2017

### **Prepared for**

Seed Technology Co., Ltd.  
1F, Tower B, Building 2, Shanshui Building, NanshanYungu Innovation  
Industry Park, Liuxian Ave, Nanshan District, Shenzhen, Guangdong, P.R.C

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China  
Tel.: +86-755-6115 9388  
Fax.: +86-755-6115 6599  
Website: <http://www.ntek.org.cn>

## TABLE OF CONTENTS

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>TEST RESULT CERTIFICATION .....</b>          | <b>3</b>  |
| <b>2</b> | <b>SUMMARY OF TEST RESULTS.....</b>             | <b>4</b>  |
| <b>3</b> | <b>FACILITIES AND ACCREDITATIONS .....</b>      | <b>5</b>  |
| 3.1      | FACILITIES.....                                 | 5         |
| 3.2      | LABORATORY ACCREDITATIONS AND LISTINGS .....    | 5         |
| 3.3      | MEASUREMENT UNCERTAINTY .....                   | 5         |
| <b>4</b> | <b>GENERAL DESCRIPTION OF EUT .....</b>         | <b>6</b>  |
| <b>5</b> | <b>DESCRIPTION OF TEST MODES .....</b>          | <b>8</b>  |
| <b>6</b> | <b>SETUP OF EQUIPMENT UNDER TEST .....</b>      | <b>9</b>  |
| 6.1      | BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM..... | 9         |
| 6.2      | SUPPORT EQUIPMENT.....                          | 10        |
| 6.3      | EQUIPMENTS LIST FOR ALL TEST ITEMS.....         | 11        |
| <b>7</b> | <b>TEST REQUIREMENTS .....</b>                  | <b>13</b> |
| 7.1      | CONDUCTED EMISSIONS TEST .....                  | 13        |
| 7.2      | RADIATED SPURIOUS EMISSION .....                | 15        |
| 7.3      | 6DB BANDWIDTH.....                              | 24        |
| 7.4      | PEAK OUTPUT POWER .....                         | 27        |
| 7.5      | POWER SPECTRAL DENSITY .....                    | 30        |
| 7.6      | CONDUCTED BAND EDGE MEASUREMENT.....            | 34        |
| 7.7      | SPURIOUS RF CONDUCTED EMISSIONS.....            | 36        |
| 7.8      | ANTENNA APPLICATION .....                       | 40        |

## 1 TEST RESULT CERTIFICATION

|                                   |   |
|-----------------------------------|---|
| Applicant's name .....            | Seed Technology Co., Ltd.   |
| Address .....                     | F5, Building 8, Shiling Industrial Park, Xinwei, Number32, Tongsha Road Xili Town, Nanshan District, Shenzhen, China. P.R.C |
| Manufacturer's Name .....         | Seed Technology Co., Ltd.   |
| Address .....                     | F5, Building 8, Shiling Industrial Park, Xinwei, Number32, Tongsha Road Xili Town, Nanshan District, Shenzhen, China. P.R.C |
| Product description               |   |
| Product name .....                | Voting Box  |
| Model and/or type reference ..... | Voting Box  |
| Serial Model .....                | N/A   |

Measurement Procedure Used:


| APPLICABLE STANDARDS   |             |
|--|-------------|
| APPLICABLE STANDARD/ TEST PROCEDURE  | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J:2016<br>FCC 47 CFR Part 15, Subpart C:2016<br>KDB 174176 D01 Line Conducted FAQ v01r01<br>ANSI C63.10-2013<br>FCC KDB 558074 D01 DTS Meas Guidance v03r05 | Complied    |


This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 09 Jan. 2017 ~ 14 Apr. 2017

Testing Engineer :   
(Susan Su)

Technical Manager :   
(Jason Chen)

Authorized Signatory :   
(Sam Chen)

## 2 SUMMARY OF TEST RESULTS

| FCC Part15 (15.247), Subpart C |                            |         |        |
|--------------------------------|----------------------------|---------|--------|
| Standard Section               | Test Item                  | Verdict | Remark |
| 15.207                         | Conducted Emission         | N/A     |        |
| 15.247 (a)(2)                  | 6dB Bandwidth              | PASS    |        |
| 15.247 (b)                     | Peak Output Power          | PASS    |        |
| 15.247 (c)                     | Radiated Spurious Emission | PASS    |        |
| 15.247 (d)                     | Power Spectral Density     | PASS    |        |
| 15.205                         | Band Edge Emission         | PASS    |        |
| 15.203                         | Antenna Requirement        | PASS    |        |

**Remark:**

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

### 3 FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at  
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen  
518126 P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2014.09.04

The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012  
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013  
The Certificate Registration Number is 238937.

Name of Firm

: NTEK Testing Technology Co., Ltd

Site Location

: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang  
Street, Bao'an District, Shenzhen P.R. China.

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                          | Uncertainty             |
|-----|-------------------------------|-------------------------|
| 1   | Conducted Emission Test       | $\pm 1.38\text{dB}$     |
| 2   | RF power, conducted           | $\pm 0.16\text{dB}$     |
| 3   | Spurious emissions, conducted | $\pm 0.21\text{dB}$     |
| 4   | All emissions, radiated(<1G)  | $\pm 4.68\text{dB}$     |
| 5   | All emissions, radiated(>1G)  | $\pm 4.89\text{dB}$     |
| 6   | Temperature                   | $\pm 0.5^\circ\text{C}$ |
| 7   | Humidity                      | $\pm 2\%$               |

## 4 GENERAL DESCRIPTION OF EUT

| Product Feature and Specification |  |
|-----------------------------------|--|
| Equipment                         | Voting Box   |
| Trade Mark                        | N/A  |
| FCC ID                            | Z4T-VOTINGBOXV1  |
| Model No.                         | Voting Box   |
| Serial Model                      | N/A  |
| Model Difference                  | N/A  |
| Operating Frequency               | 2402MHz~2480MHz  |
| Modulation                        | GFSK   |
| Number of Channels                | 40 Channels  |
| Bluetooth Version                 | BT V4.0(EDR+BLE)   |
| Antenna Type                      | Ceramic Antenna  |
| Antenna Gain                      | 1 dBi  |
| Rating(s)                         | DC 3.7V from battery   |
| Power supply                      | <input checked="" type="checkbox"/> DC supply:<br>DC 3.7V, 1500mAh |
|                                   | <input type="checkbox"/> Adapter supply:<br>N/A                    |
| HW Version                        | v1   |
| SW Version                        | v1.22  |

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.



## 5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

| Channel | Frequency(MHz) |
|---------|----------------|
| 0       | 2402           |
| 1       | 2404           |
| ...     | ...            |
| 19      | 2440           |
| 20      | 2442           |
| ...     | ...            |
| 38      | 2478           |
| 39      | 2480           |

Note:  $f_c = 2402\text{MHz} + k \times 2\text{MHz}$   $k=0$  to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Test Cases            |   |
|-----------------------|---|
| Test Item             | Data Rate/ Modulation                   |
|                       | Bluetooth 4.0_LE / GFSK                 |
| AC Conducted Emission | Mode 1: normal link mode                |
| Radiated Test Cases   | Mode 1: normal link mode                |
|                       | Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps |
|                       | Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps |
|                       | Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps |
| Conducted Test Cases  | Mode 2: Bluetooth Tx Ch00_2402MHz_1Mbps |
|                       | Mode 3: Bluetooth Tx Ch19_2440MHz_1Mbps |
|                       | Mode 4: Bluetooth Tx Ch39_2480MHz_1Mbps |


Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. AC power line Conducted Emission was tested under maximum output power.
3. For radiated test cases, the worst mode was only reported for data rate 1Mbps, because this data rate has the highest RF output power at preliminary tests, and it doesn't found other significantly frequencies in conducted spurious emission.
4. EUT is set to continuous transmission mode. duty cycle greater than 98%.


## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For Radiated Test Cases

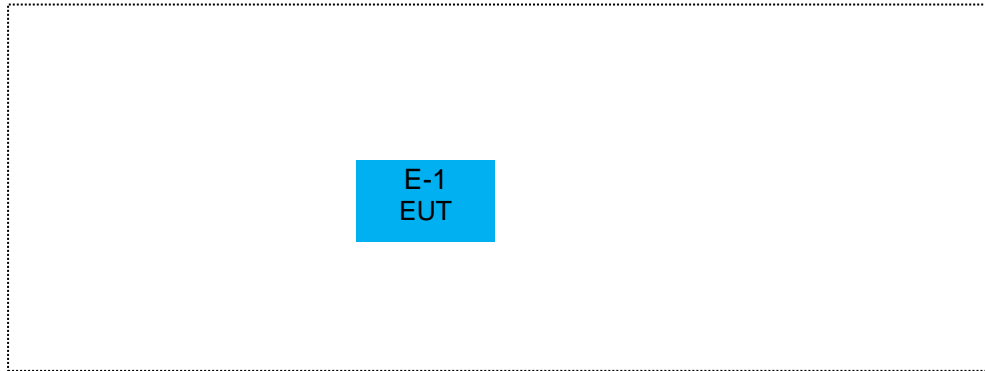

For Conducted Test Cases

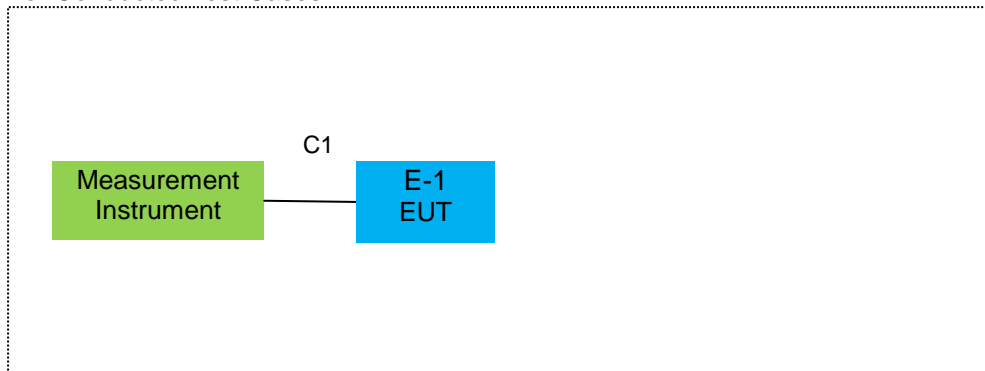

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment  | Mfr/Brand | Model/Type No. | FCC ID          | Note |
|------|------------|-----------|----------------|-----------------|------|
| E-1  | Voting Box | N/A       | Voting Box     | Z4T-VOTINGBOXV1 | EUT  |
|      |            |           |                |                 |      |
|      |            |           |                |                 |      |
|      |            |           |                |                 |      |
|      |            |           |                |                 |      |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| C-1  | RF Cable   | NO            | NO           | 0.5m   |
|      |            |               |              |        |
|      |            |               |              |        |
|      |            |               |              |        |
|      |            |               |              |        |
|      |            |               |              |        |

### Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

### 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

| Item | Kind of Equipment                         | Manufacturer | Type No.      | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|---|--------------|---------------|------------|------------------|------------------|--------------------|
| 1    | Spectrum Analyzer                         | Agilent      | E4407B        | MY45108040 | 2016.07.06       | 2017.07.05       | 1 year             |
| 2    | Spectrum Analyzer                         | Agilent      | N9020A        | MY49100060 | 2016.07.06       | 2017.07.05       | 1 year             |
| 3    | EMI Test Receiver                         | Agilent      | N9038A        | MY53227146 | 2016.06.06       | 2017.06.05       | 1 year             |
| 4    | Test Receiver                             | R&S          | ESPI          | 101318     | 2016.06.06       | 2017.06.05       | 1 year             |
| 5    | Bilog Antenna                             | TESEQ        | CBL6111D      | 31216      | 2016.07.06       | 2017.07.05       | 1 year             |
| 6    | 50Ω Coaxial Switch                        | Anritsu      | MP59B         | 6200264416 | 2016.06.06       | 2017.06.05       | 1 year             |
| 7    | Horn Antenna                              | EM           | EM-AH-10180   | 2011071402 | 2016.07.06       | 2017.07.05       | 1 year             |
| 8    | Horn Ant                                  | Schwarzbeck  | BBHA 9170     | 9170-181   | 2016.07.06       | 2017.07.05       | 1 year             |
| 9    | Amplifier                                 | EM           | EM-30180      | 060538     | 2016.12.22       | 2017.12.21       | 1 year             |
| 10   | Amplifier                                 | MITEQ        | TTA1840-35-HG | 177156     | 2016.06.06       | 2017.06.05       | 1 year             |
| 11   | Loop Antenna                              | ARA          | PLA-1030/B    | 1029       | 2016.06.06       | 2017.06.05       | 1 year             |
| 12   | Power Meter                               | DARE         | RPR3006W      | 100696     | 2016.07.06       | 2017.07.05       | 1 year             |
| 13   | Test Cable (9KHz-30MHz)                   | N/A          | R-01          | N/A        | 2016.07.06       | 2017.07.05       | 1 year             |
| 14   | Test Cable (30MHz-1GHz)                   | N/A          | R-02          | N/A        | 2016.07.06       | 2017.07.05       | 1 year             |
| 15   | High Test Cable(1G-40G Hz)                | N/A          | R-03          | N/A        | 2016.06.06       | 2017.06.05       | 1 year             |
| 16   | High Test Cable(1G-40G Hz)                | N/A          | R-04          | N/A        | 2016.06.06       | 2017.06.05       | 1 year             |
| 17   | temporary antenna connector<br><br>(Note) | NTS          | R001          | N/A        | N/A              | N/A              | N/A                |

#### Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

## Conduction Test equipment

| Item | Kind of Equipment       | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-------------------------|--------------|----------|------------|------------------|------------------|--------------------|
| 1    | Test Receiver           | R&S          | ESCI     | 101160     | 2016.06.06       | 2017.06.05       | 1 year             |
| 2    | LISN                    | R&S          | ENV216   | 101313     | 2016.08.24       | 2017.08.23       | 1 year             |
| 3    | LISN                    | EMCO         | 3816/2   | 00042990   | 2016.08.24       | 2017.08.23       | 1 year             |
| 4    | 50Ω Coaxial Switch      | Anritsu      | MP59B    | 6200264417 | 2016.06.07       | 2017.06.06       | 1 year             |
| 5    | Passive Voltage Probe   | R&S          | ESH2-Z3  | 100196     | 2016.06.07       | 2017.06.06       | 1 year             |
| 6    | Absorbing clamp         | R&S          | MOS-21   | 100423     | 2016.06.08       | 2017.06.07       | 1 year             |
| 7    | Test Cable (9KHz-30MHz) | N/A          | C01      | N/A        | 2016.06.08       | 2017.06.07       | 1 year             |
| 8    | Test Cable (9KHz-30MHz) | N/A          | C02      | N/A        | 2016.06.08       | 2017.06.07       | 1 year             |
| 9    | Test Cable (9KHz-30MHz) | N/A          | C03      | N/A        | 2016.06.08       | 2017.06.07       | 1 year             |

Note: Each piece of equipment is scheduled for calibration once a year.

## 7 TEST REQUIREMENTS

### 7.1 CONDUCTED EMISSIONS TEST

#### 7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

#### 7.1.2 Conformance Limit


| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56*                   | 56-46*  |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.1.4 Test Configuration

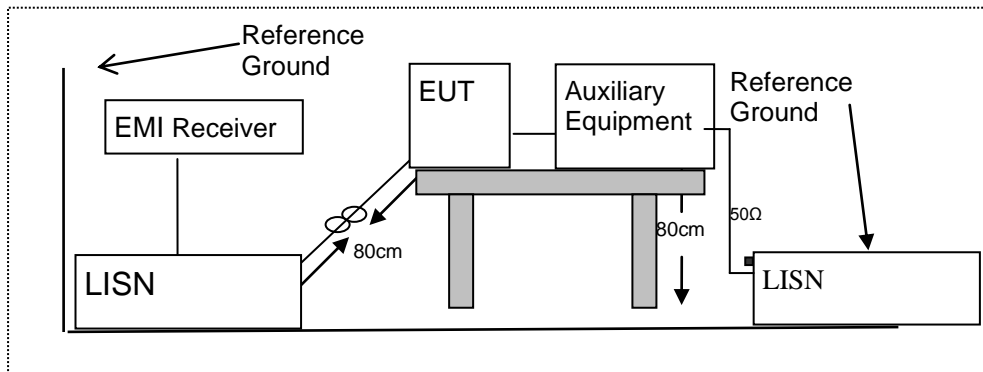

#### 7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 7.1.6 Test Results

|                |            |                    |            |
|----------------|------------|--------------------|------------|
| EUT:           | Voting Box | Model Name :       | Voting Box |
| Temperature:   | 26 °C      | Relative Humidity: | 54%        |
| Pressure:      | 1010hPa    | Phase :            | L          |
| Test Voltage : | N/A        | Test Mode:         | N/A        |

## 7.2 RADIATED SPURIOUS EMISSION

### 7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

### 7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009~0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490~1.705               | 2400/F(KHz)           | 20 log (uV/m)           | 30                   |
| 1.705~30.0                | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) |         |
|----------------|--------------------------|---------|
|                | PEAK                     | AVERAGE |
| Above 1000     | 74                       | 54      |


Remark :1. Emission level in dBuV/m=20 log (uV/m)  
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);  
Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

### 7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

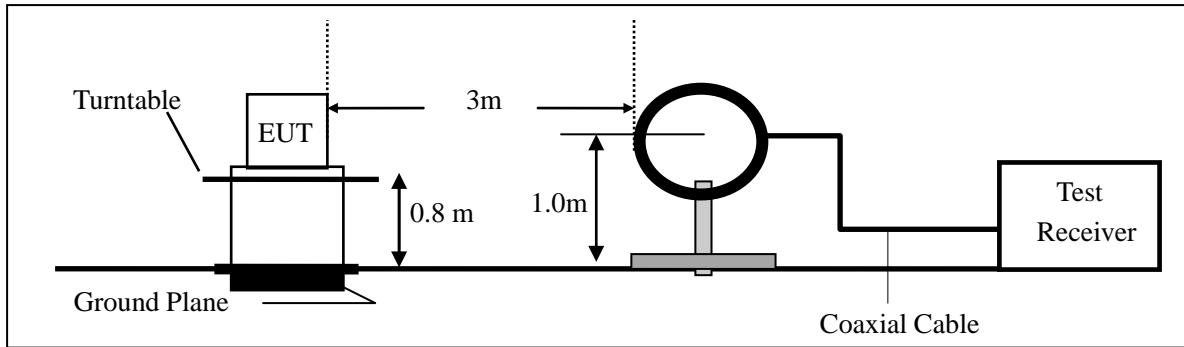

(b) For radiated emissions from 30MHz to 1000MHz

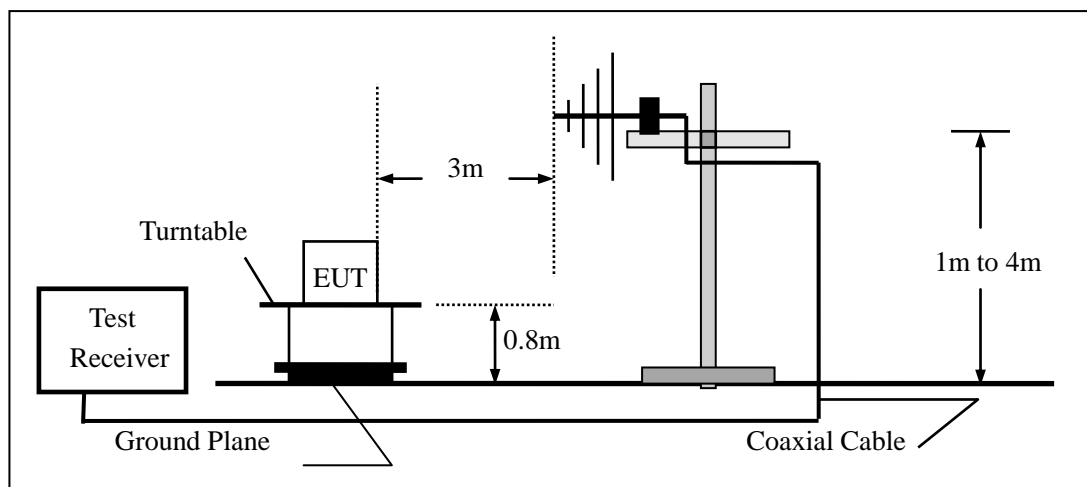

(c) For radiated emissions above 1000MHz

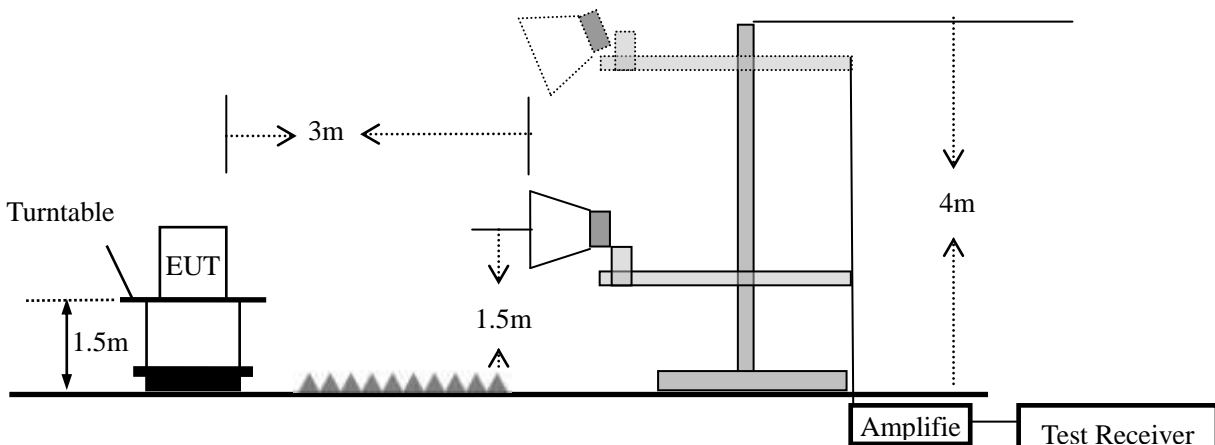

## 7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting  |
|---------------------------------------|--|
| Attenuation                           | Auto   |
| Start Frequency                       | 1000 MHz   |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.2.6 Test Results

### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| EUT:         | Voting Box        | Model No.:         | Voting Box |
| Temperature: | 20 °C             | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode3/Mode4 | Test By:           | Susan Su   |

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission Level(dBuV/m) |    | Limit 3m(dBuV/m) |    | Over(dB) |    |
|----------------|-----------------|------------------------|----|------------------|----|----------|----|
|                |                 | PK                     | AV | PK               | AV | PK       | AV |
| --             | --              | --                     | -- | --               | -- | --       | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $20 \log(\text{Specific distance} / \text{test distance})$  ( dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

|                |            |                    |            |
|----------------|------------|--------------------|------------|
| EUT:           | Voting Box | Model Name :       | Voting Box |
| Temperature:   | 20 °C      | Relative Humidity: | 48%        |
| Pressure:      | 1010hPa    | Test Mode:         | Mode 1     |
| Test Voltage : | DC 3.7V    |                    |            |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 32.8637   | 6.98             | 18.35  | 25.33             | 40       | -14.67 | QP     |
| V              | 37.155    | 5.25             | 16.28  | 21.53             | 40       | -18.47 | QP     |
| V              | 96.7749   | 6.59             | 11.61  | 18.2              | 43.5     | -25.3  | QP     |
| V              | 126.3286  | 6.22             | 13.55  | 19.77             | 43.5     | -23.73 | QP     |
| V              | 270.3747  | 6.21             | 15.63  | 21.84             | 46       | -24.16 | QP     |
| V              | 397.6334  | 6.13             | 20.12  | 26.25             | 46       | -19.75 | QP     |

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

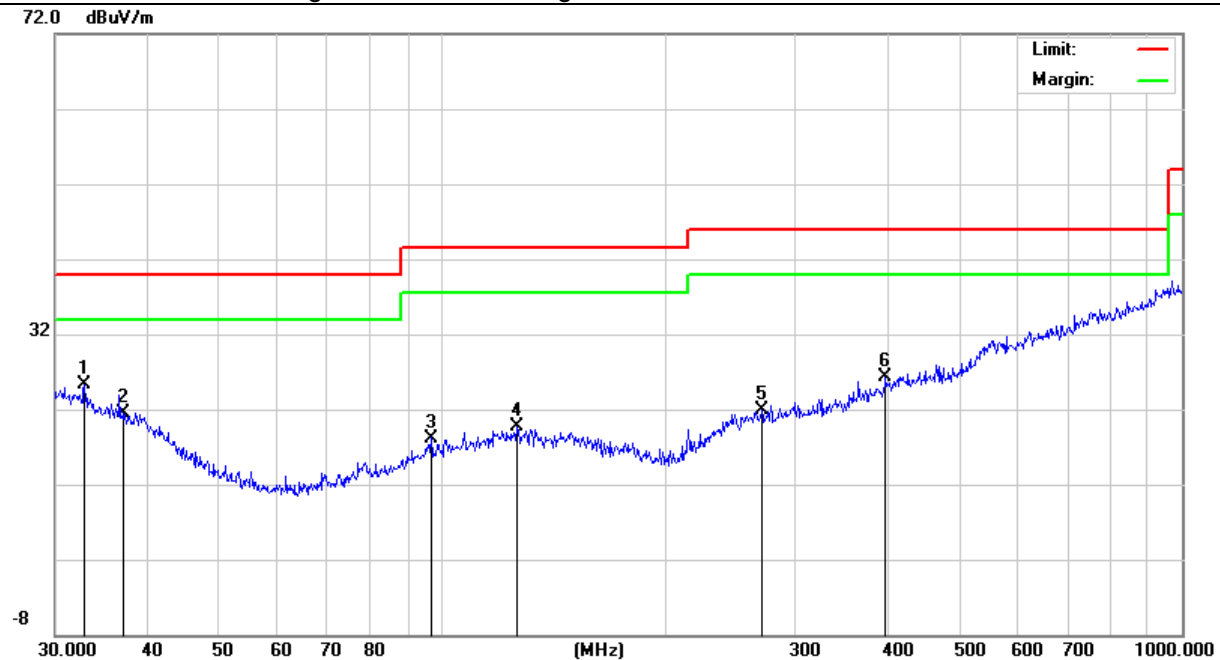

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 31.6202   | 6.22             | 19.02  | 25.24             | 40       | -14.76 | QP     |
| H              | 36.2541   | 5.47             | 16.68  | 22.15             | 40       | -17.85 | QP     |
| H              | 102.3597  | 8                | 12.05  | 20.05             | 43.5     | -23.45 | QP     |
| H              | 123.6985  | 6.44             | 13.69  | 20.13             | 43.5     | -23.37 | QP     |
| H              | 393.4723  | 6.31             | 19.91  | 26.22             | 46       | -19.78 | QP     |
| H              | 663.4729  | 7.56             | 25.49  | 33.05             | 46       | -12.95 | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

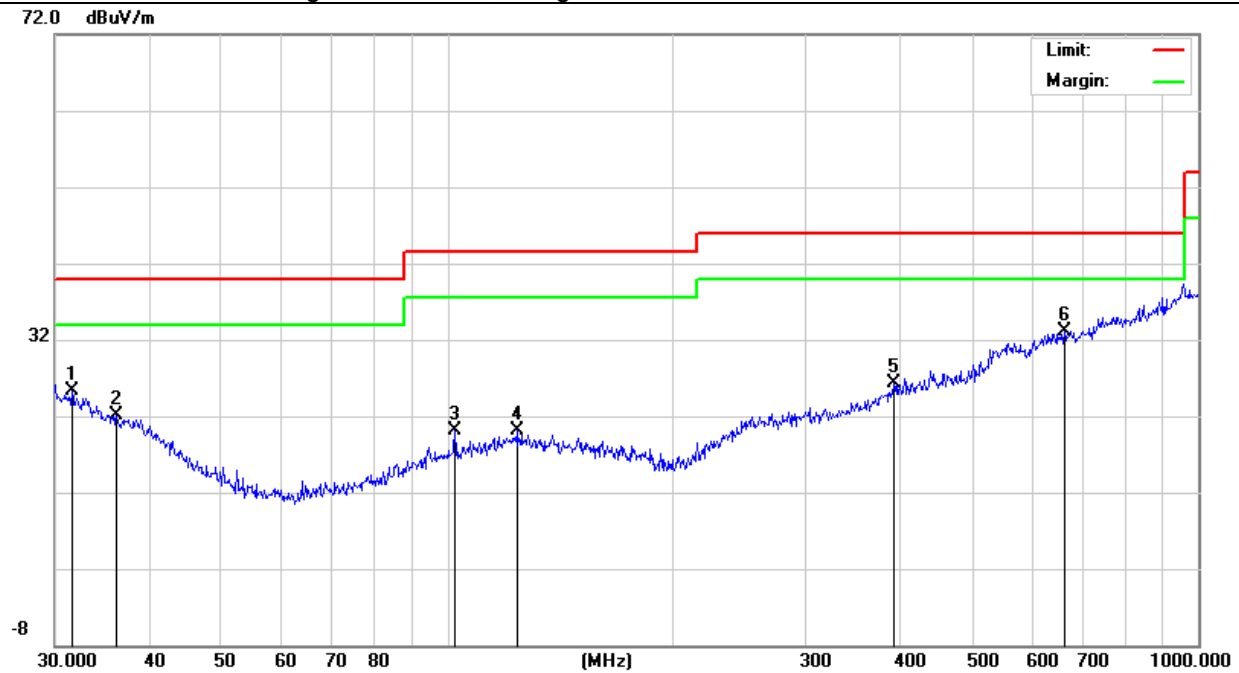

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| EUT:         | Voting Box        | Model No.:         | Voting Box |
| Temperature: | 20 °C             | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode3/Mode4 | Test By:           | Susan Su   |

| Frequency<br>(MHz)                | Read Level<br>(dBμV) | Cable loss<br>(dB) | Antenna Factor<br>(dB/m) | Preamp Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Remark | Comment    |
|-----------------------------------|----------------------|--------------------|--------------------------|-----------------------|----------------------------|--------------------|----------------|--------|------------|
| Low Channel (2402 MHz)-Above 1G   |                      |                    |                          |                       |                            |                    |                |        |            |
| 4804.308                          | 62.55                | 5.21               | 35.59                    | 44.30                 | 59.05                      | 74.00              | -14.95         | Pk     | Vertical   |
| 4804.308                          | 40.17                | 5.21               | 35.59                    | 44.30                 | 36.67                      | 54.00              | -17.33         | AV     | Vertical   |
| 7206.162                          | 59.85                | 6.48               | 36.27                    | 44.60                 | 58.00                      | 74.00              | -16.00         | Pk     | Vertical   |
| 7206.162                          | 43.36                | 6.48               | 36.27                    | 44.60                 | 41.51                      | 54.00              | -12.49         | AV     | Vertical   |
| 4804.245                          | 60.52                | 5.21               | 35.55                    | 44.30                 | 56.98                      | 74.00              | -17.02         | Pk     | Horizontal |
| 4804.245                          | 42.29                | 5.21               | 35.55                    | 44.30                 | 38.75                      | 54.00              | -15.25         | AV     | Horizontal |
| 7206.131                          | 62.28                | 6.48               | 36.27                    | 44.52                 | 60.51                      | 74.00              | -13.49         | Pk     | Horizontal |
| 7206.131                          | 46.74                | 6.48               | 36.27                    | 44.52                 | 44.97                      | 54.00              | -9.03          | AV     | Horizontal |
| Mid Channel (2440 MHz)-Above 1G   |                      |                    |                          |                       |                            |                    |                |        |            |
| 4882.273                          | 62.33                | 5.21               | 35.66                    | 44.20                 | 59.00                      | 74.00              | -15.00         | Pk     | Vertical   |
| 4882.273                          | 42.26                | 5.21               | 35.66                    | 44.20                 | 38.93                      | 54.00              | -15.07         | AV     | Vertical   |
| 7323.152                          | 59.56                | 7.10               | 36.50                    | 44.43                 | 58.73                      | 74.00              | -15.27         | Pk     | Vertical   |
| 7323.152                          | 46.65                | 7.10               | 36.50                    | 44.43                 | 45.82                      | 54.00              | -8.18          | AV     | Vertical   |
| 4882.168                          | 60.41                | 5.21               | 35.66                    | 44.20                 | 57.08                      | 74.00              | -16.92         | Pk     | Horizontal |
| 4882.168                          | 47.78                | 5.21               | 35.66                    | 44.20                 | 44.45                      | 54.00              | -9.55          | AV     | Horizontal |
| 7323.113                          | 59.85                | 7.10               | 36.50                    | 44.43                 | 59.02                      | 74.00              | -14.98         | Pk     | Horizontal |
| 7323.113                          | 41.22                | 7.10               | 36.50                    | 44.43                 | 40.39                      | 54.00              | -13.61         | AV     | Horizontal |
| High Channel (2480 MHz)- Above 1G |                      |                    |                          |                       |                            |                    |                |        |            |
| 4960.241                          | 65.56                | 5.21               | 35.52                    | 44.21                 | 62.08                      | 74.00              | -11.92         | Pk     | Vertical   |
| 4960.241                          | 42.25                | 5.21               | 35.52                    | 44.21                 | 38.77                      | 54.00              | -15.23         | AV     | Vertical   |
| 7440.137                          | 60.59                | 7.10               | 36.53                    | 44.60                 | 59.62                      | 74.00              | -14.38         | Pk     | Vertical   |
| 7440.137                          | 44.47                | 7.10               | 36.53                    | 44.60                 | 43.50                      | 54.00              | -10.50         | AV     | Vertical   |
| 4960.256                          | 66.69                | 5.21               | 35.52                    | 44.21                 | 63.21                      | 74.00              | -10.79         | Pk     | Horizontal |
| 4960.256                          | 46.63                | 5.21               | 35.52                    | 44.21                 | 43.15                      | 54.00              | -10.85         | AV     | Horizontal |
| 7440.108                          | 60.52                | 7.10               | 36.53                    | 44.60                 | 59.55                      | 74.00              | -14.45         | Pk     | Horizontal |
| 7440.108                          | 44.47                | 7.10               | 36.53                    | 44.60                 | 43.50                      | 54.00              | -10.50         | AV     | Horizontal |

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).  
(2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor  
(3)All other emissions more than 20dB below the limit.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

|              |              |                    |            |
|--------------|--------------|--------------------|------------|
| EUT:         | Voting Box   | Model No.:         | Voting Box |
| Temperature: | 20 °C        | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/ Mode4 | Test By:           | Susan Su   |

| Frequency<br>(MHz) | Meter<br>Reading<br>(dBμV) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>dB/m | Preamp<br>Factor<br>(dB) | Emission<br>Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type | Comment    |
|--------------------|----------------------------|-----------------------|---------------------------|--------------------------|-------------------------------|--------------------|----------------|------------------|------------|
| GFSK               |                            |                       |                           |                          |                               |                    |                |                  |            |
| 2310.00            | 57.26                      | 2.97                  | 27.80                     | 43.80                    | 44.23                         | 74                 | -29.77         | Pk               | Horizontal |
| 2310.00            | 43.15                      | 2.97                  | 27.80                     | 43.80                    | 30.12                         | 54                 | -23.88         | AV               | Horizontal |
| 2310.00            | 58.09                      | 2.97                  | 27.80                     | 43.80                    | 45.06                         | 74                 | -28.94         | Pk               | Vertical   |
| 2310.00            | 41.86                      | 2.97                  | 27.80                     | 43.80                    | 28.83                         | 54                 | -25.17         | AV               | Vertical   |
| 2390.00            | 57.66                      | 3.14                  | 27.21                     | 43.80                    | 44.21                         | 74                 | -29.79         | Pk               | Vertical   |
| 2390.00            | 41.82                      | 3.14                  | 27.21                     | 43.80                    | 28.37                         | 54                 | -25.63         | AV               | Vertical   |
| 2390.00            | 56.19                      | 3.14                  | 27.21                     | 43.80                    | 42.74                         | 74                 | -31.26         | Pk               | Horizontal |
| 2390.00            | 41.82                      | 3.14                  | 27.21                     | 43.80                    | 28.37                         | 54                 | -25.63         | AV               | Horizontal |
| 2483.50            | 57.54                      | 3.58                  | 27.70                     | 44.00                    | 44.82                         | 74                 | -29.18         | Pk               | Vertical   |
| 2483.50            | 42.16                      | 3.58                  | 27.70                     | 44.00                    | 29.44                         | 54                 | -24.56         | AV               | Vertical   |
| 2483.50            | 58.64                      | 3.58                  | 27.70                     | 44.00                    | 45.92                         | 74                 | -28.08         | Pk               | Horizontal |
| 2483.50            | 41.69                      | 3.58                  | 27.70                     | 44.00                    | 28.97                         | 54                 | -25.03         | AV               | Horizontal |

Note: (1) All other emissions more than 20dB below the limit.

■ Spurious Emission in Restricted Band 3260MHz-18000MHz

|              |              |                    |            |
|--------------|--------------|--------------------|------------|
| EUT:         | Voting Box   | Model No.:         | Voting Box |
| Temperature: | 20 °C        | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/ Mode4 | Test By:           | Susan Su   |

| Frequency | Reading Level | Cable Loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|----------|------------|
| (MHz)     | (dBμV)        | (dB)       | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 3260      | 60.04         | 4.04       | 29.57          | 44.70               | 48.95          | 74       | -25.05 | Pk       | Vertical   |
| 3260      | 55.73         | 4.04       | 29.57          | 44.70               | 44.64          | 54       | -9.36  | AV       | Vertical   |
| 3260      | 61.08         | 4.04       | 29.57          | 44.70               | 49.99          | 74       | -24.01 | Pk       | Horizontal |
| 3260      | 56.54         | 4.04       | 29.57          | 44.70               | 45.45          | 54       | -8.55  | AV       | Horizontal |
| 3332      | 64.18         | 4.26       | 29.87          | 44.40               | 53.91          | 74       | -20.09 | Pk       | Vertical   |
| 3332      | 53.08         | 4.26       | 29.87          | 44.40               | 42.81          | 54       | -11.19 | AV       | Vertical   |
| 3332      | 62.11         | 4.26       | 29.87          | 44.40               | 51.84          | 74       | -22.16 | Pk       | Horizontal |
| 3332      | 52.18         | 4.26       | 29.87          | 44.40               | 41.91          | 54       | -12.09 | AV       | Horizontal |
| 17797     | 42.87         | 10.99      | 43.95          | 43.50               | 54.31          | 74       | -19.69 | Pk       | Vertical   |
| 17797     | 32.06         | 10.99      | 43.95          | 43.50               | 43.50          | 54       | -10.50 | AV       | Vertical   |
| 17788     | 43.75         | 11.81      | 43.69          | 44.60               | 54.65          | 74       | -19.35 | Pk       | Horizontal |
| 17788     | 31.05         | 11.81      | 43.69          | 44.60               | 41.95          | 54       | -12.05 | AV       | Horizontal |

Note: (1) All other emissions more than 20dB below the limit.

### 7.3 6DB BANDWIDTH

#### 7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r05

#### 7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

#### 7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

#### 7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

#### 7.3.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW = 100KHz

VBW  $\geq$  3\*RBW

Sweep = auto

Detector function = peak

Trace = max hold


#### 7.3.6 Test Results

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| EUT:         | Voting Box        | Model No.:         | Voting Box |
| Temperature: | 20 °C             | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode3/Mode4 | Test By:           | Susan Su   |

| Channel | Frequency (MHz) | 6dB bandwidth (kHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low     | 2402            | 656.129             | 500         | Pass   |
| Middle  | 2440            | 673.297             | 500         | Pass   |
| High    | 2480            | 676.388             | 500         | Pass   |


6dB Bandwidth plot on channel 00

1Mbps

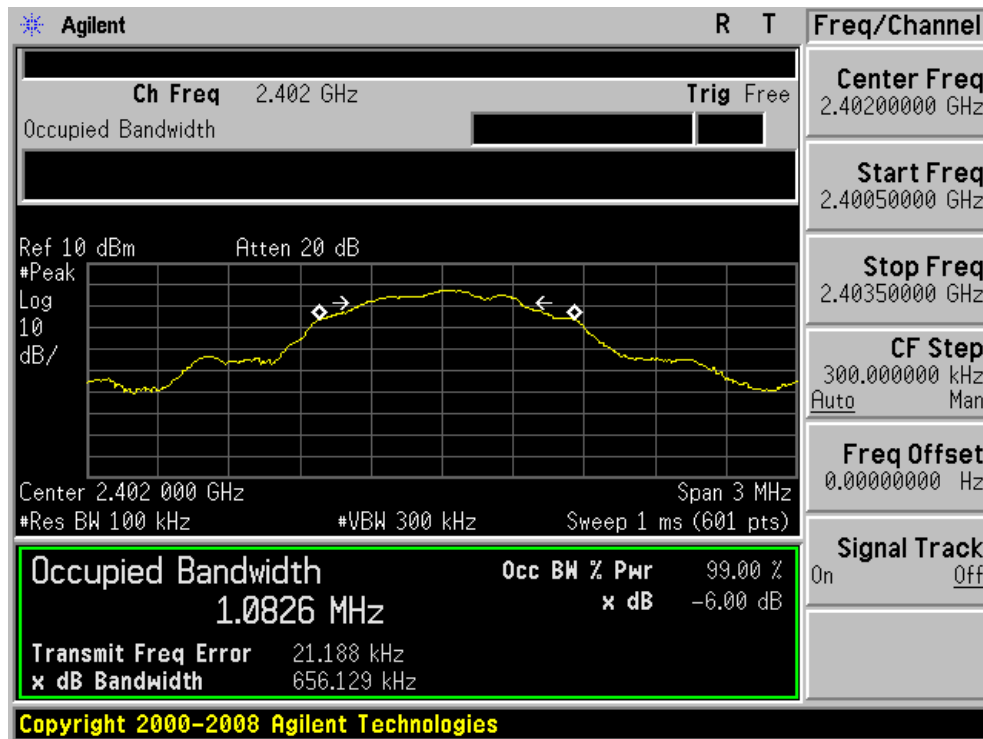


6dB Bandwidth plot on channel 19

1Mbps

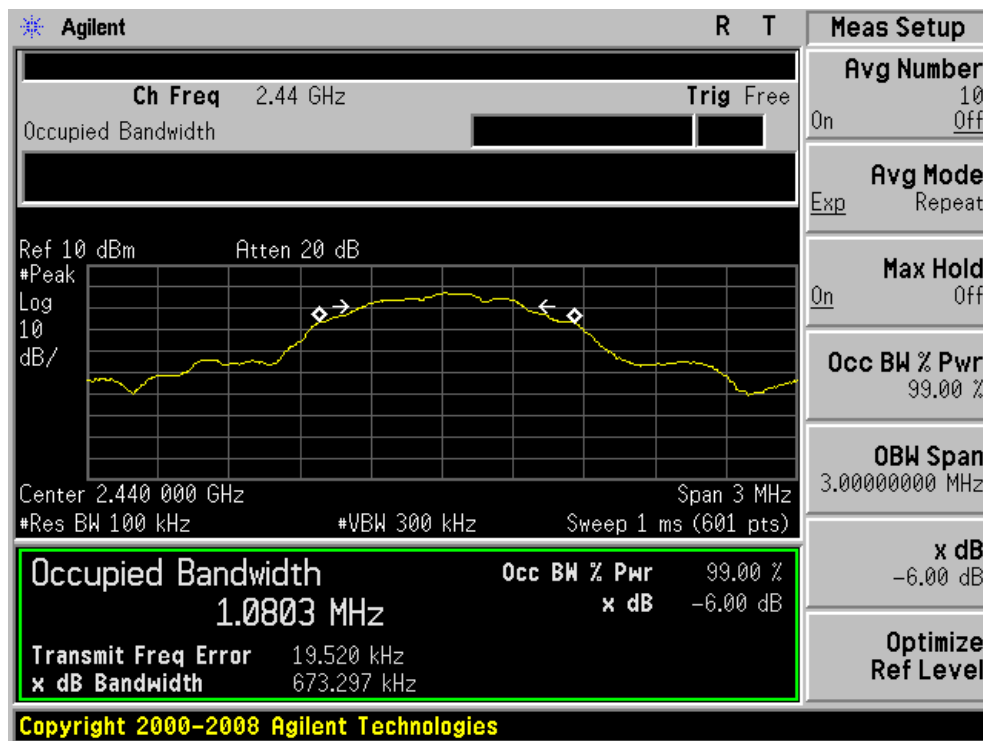

6dB Bandwidth plot on channel 39

1Mbps

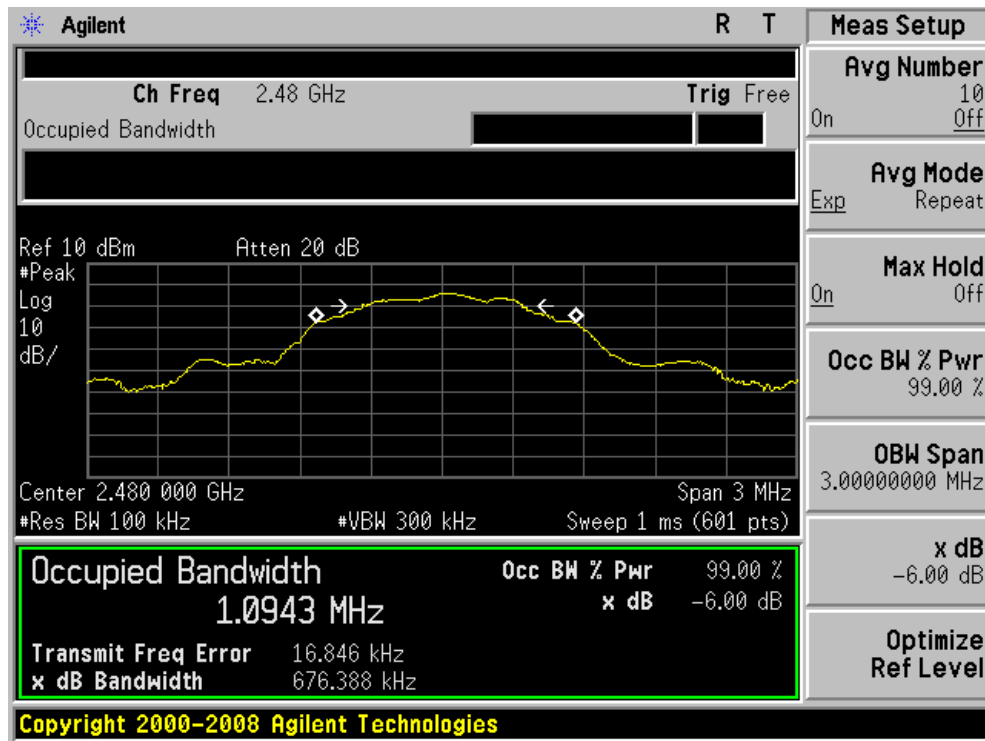

## 7.4 PEAK OUTPUT POWER

### 7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r05

### 7.4.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.4.5 Test Procedure

The testing follows KDB 558074 DTS 01 Meas. Guidance v03r05

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW  $\cong$  DTS bandwidth(about 1MHz).

Set VBW  $\cong$  3\*RBW(about 3MHz)

Set the span  $\cong$  3\*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.


Allow trace to fully stabilize.


Use peak marker function to determine the peak amplitude level.

### 7.4.6 Test Results

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| EUT:         | Voting Box        | Model No.:         | Voting Box |
| Temperature: | 20 °C             | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode3/Mode4 | Test By:           | Susan Su   |

| Test Channel | Frequency (MHz) | Power Setting | Peak Output Power (dBm) | LIMIT (dBm) | Verdict |
|--------------|-----------------|---------------|-------------------------|-------------|---------|
| <b>1Mbps</b> |                 |               |                         |             |         |
| 00           | 2402            | Default       | -2.84                   | 30          | PASS    |
| 19           | 2440            | Default       | -3.23                   | 30          | PASS    |
| 39           | 2480            | Default       | -3.90                   | 30          | PASS    |

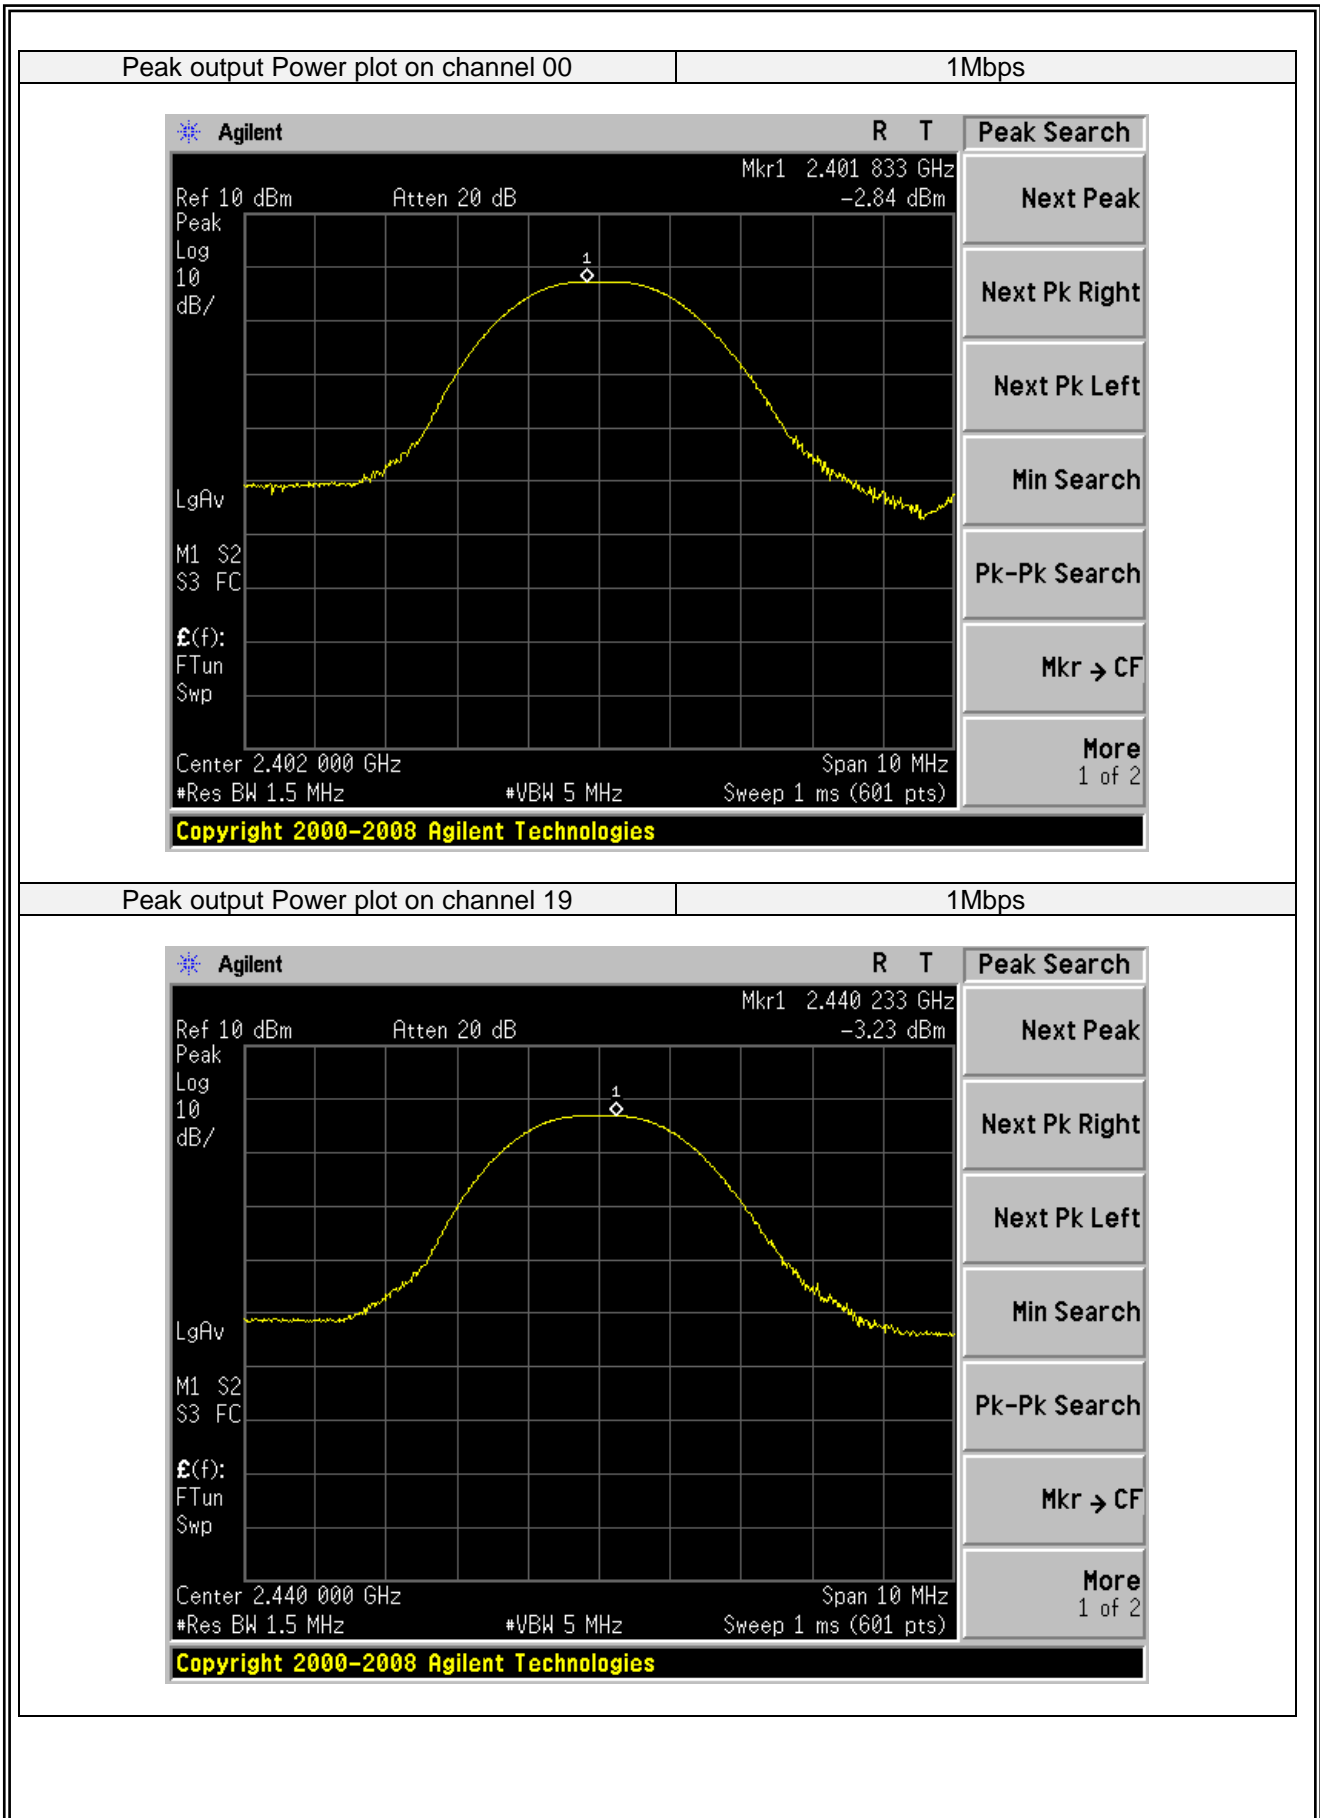

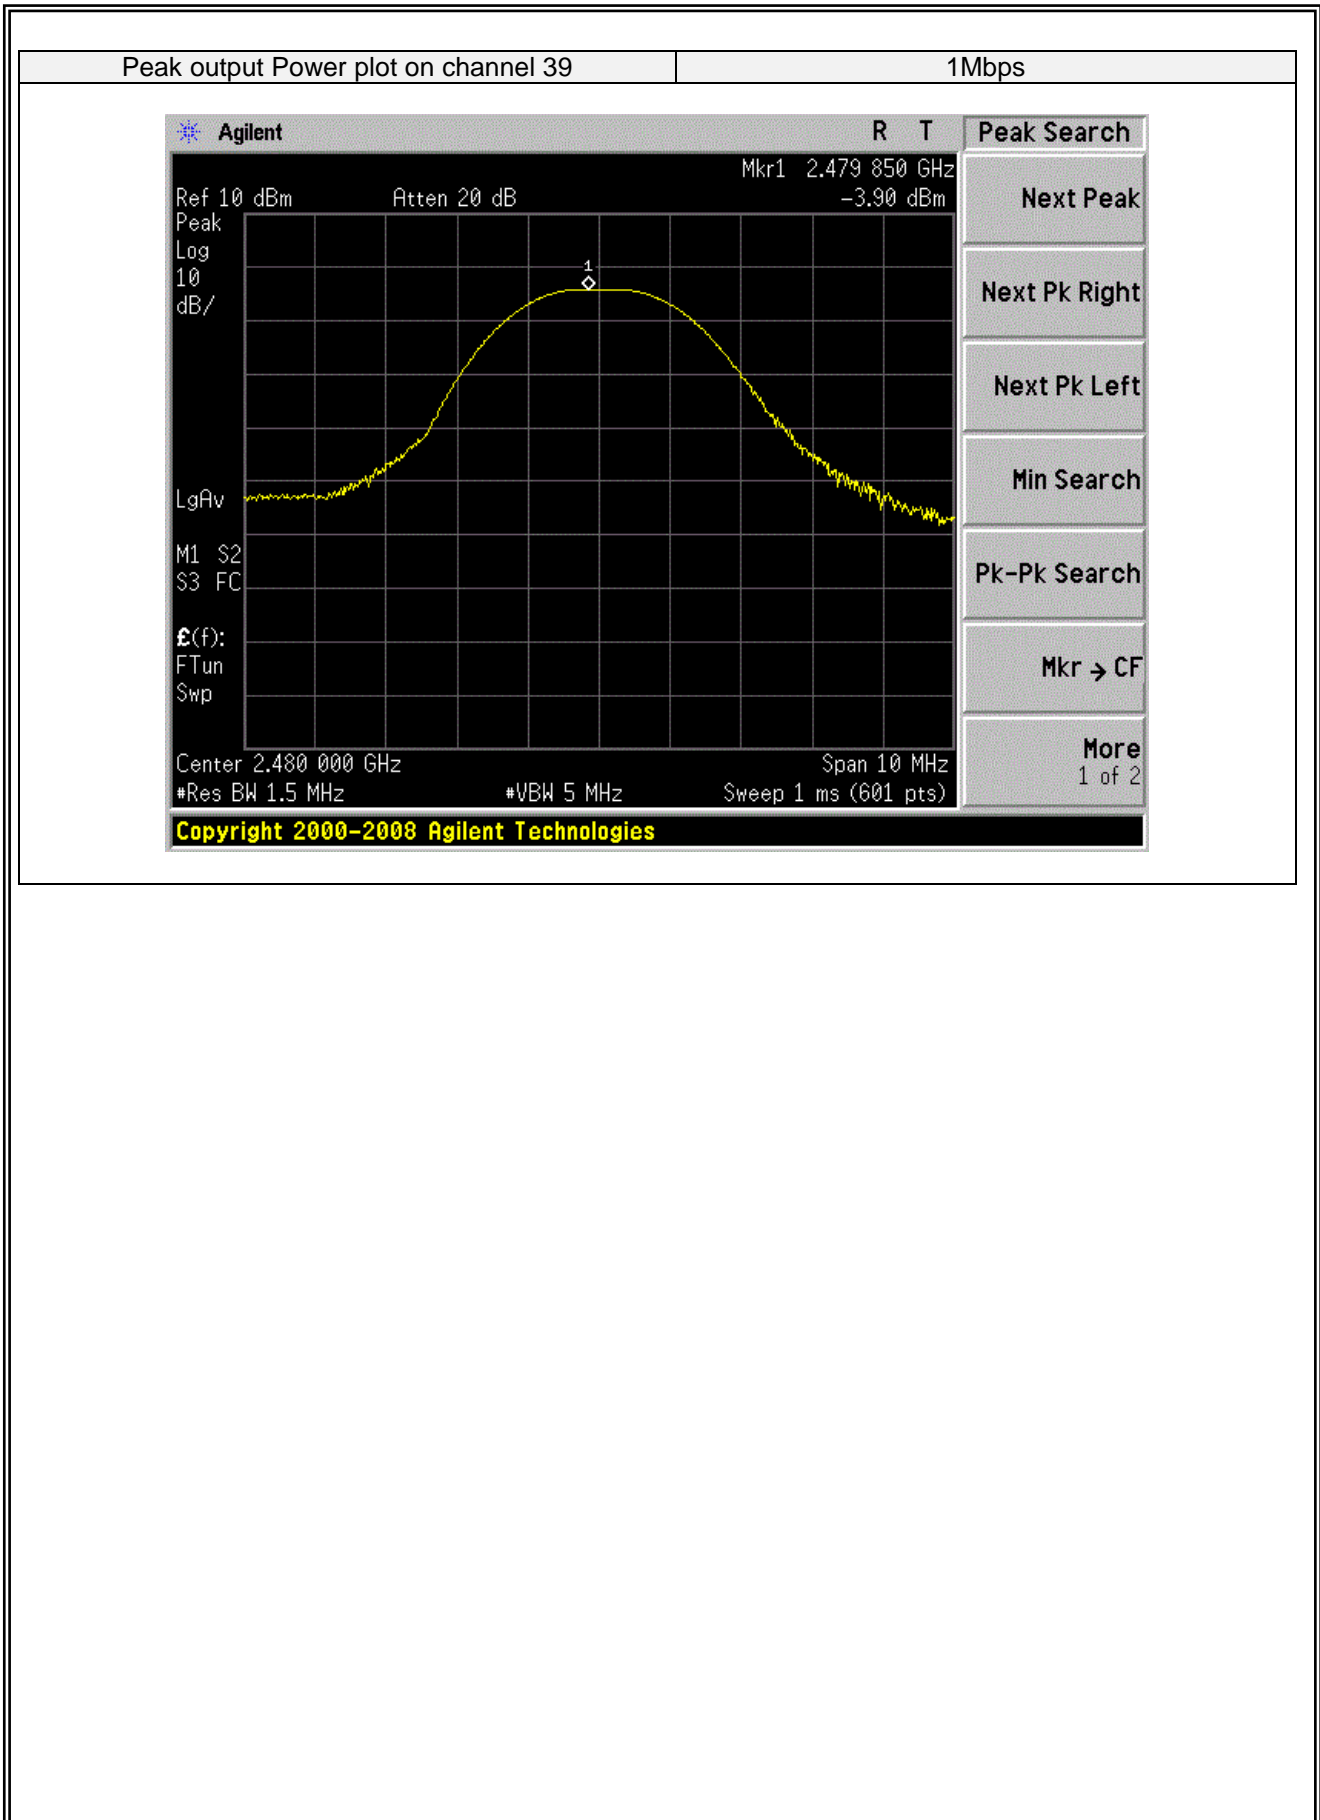

## 7.5 POWER SPECTRAL DENSITY

### 7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r05

### 7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.5.5 Test Procedure

The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05

This procedure may be used when the maximum (average) conducted output power was used to demonstrate compliance to the output power limit. This is the baseline method for determining the maximum (average) conducted PSD level. If the instrument has an RMS power averaging detector, it must be used; otherwise, use the sample detector. The EUT must be configured to transmit continuously (duty cycle  $\geq 98\%$ ); otherwise sweep triggering/signal gating must be implemented to ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter off time is to be considered).

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing


### 7.5.6 Test Results

|              |                   |                    |            |
|--------------|-------------------|--------------------|------------|
| EUT:         | Voting Box        | Model No.:         | Voting Box |
| Temperature: | 20 °C             | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode3/Mode4 | Test By:           | Susan Su   |

| Test Channel | Frequency (MHz) | Power Density (dBm/3KHz) | Limit (dBm/3KHz) | Verdict |
|--------------|-----------------|--------------------------|------------------|---------|
| <b>1Mbps</b> |                 |                          |                  |         |
| 00           | 2402            | -3.03                    | 8                | PASS    |
| 19           | 2440            | -3.5                     | 8                | PASS    |
| 39           | 2480            | -4.55                    | 8                | PASS    |


Power spectral density plot on channel 00


1Mbps

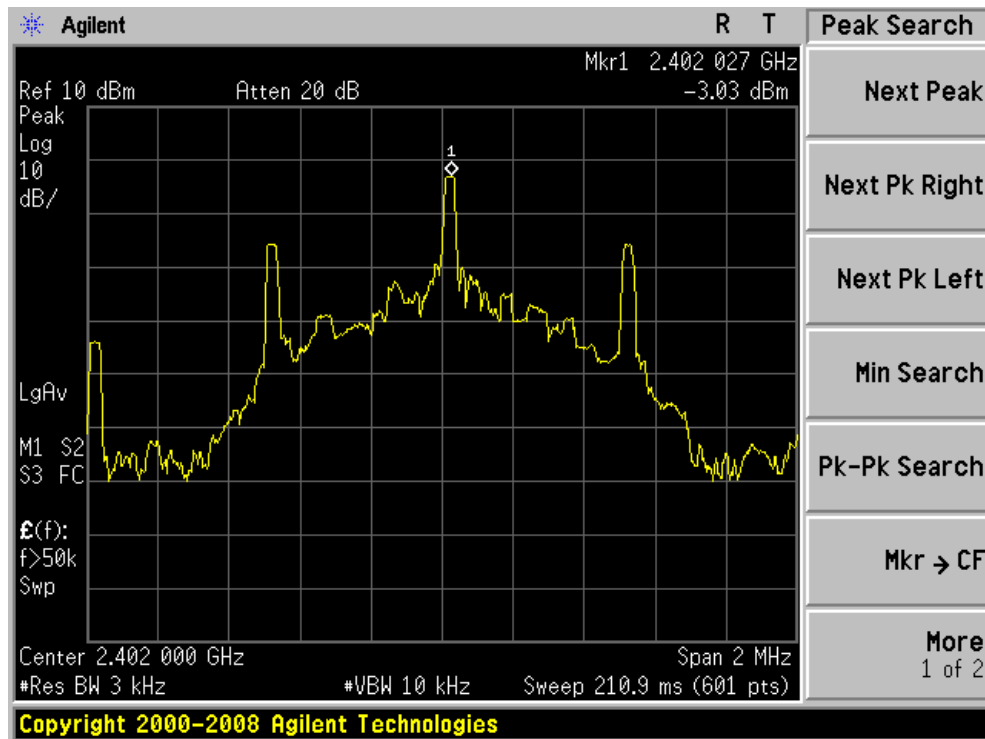

Power spectral density plot on channel 19

1Mbps

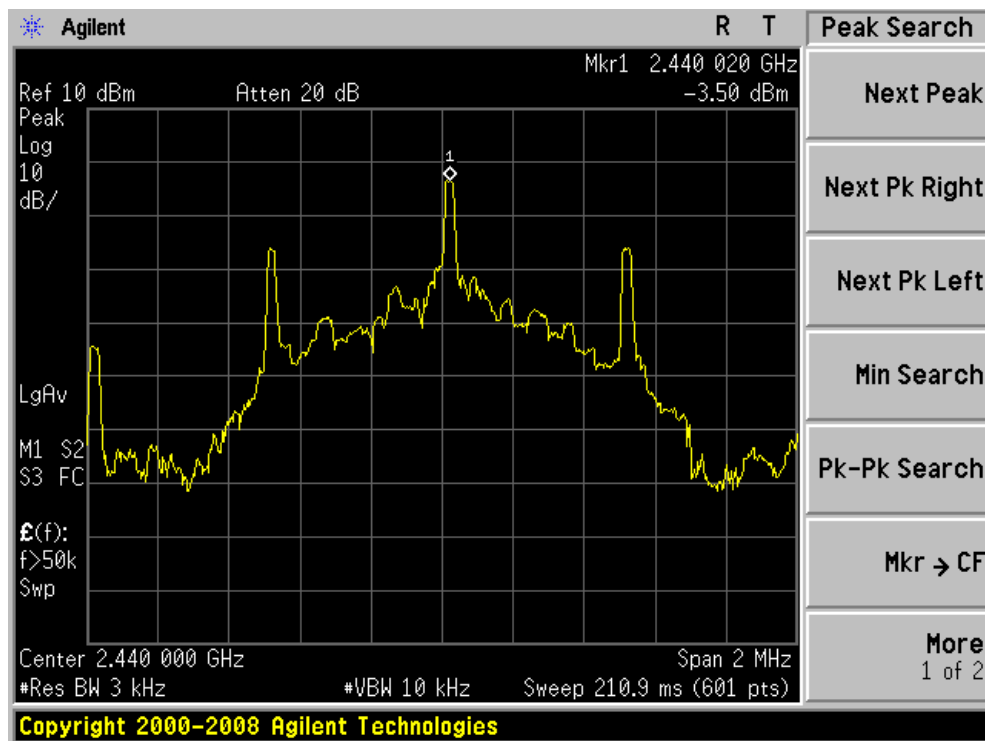

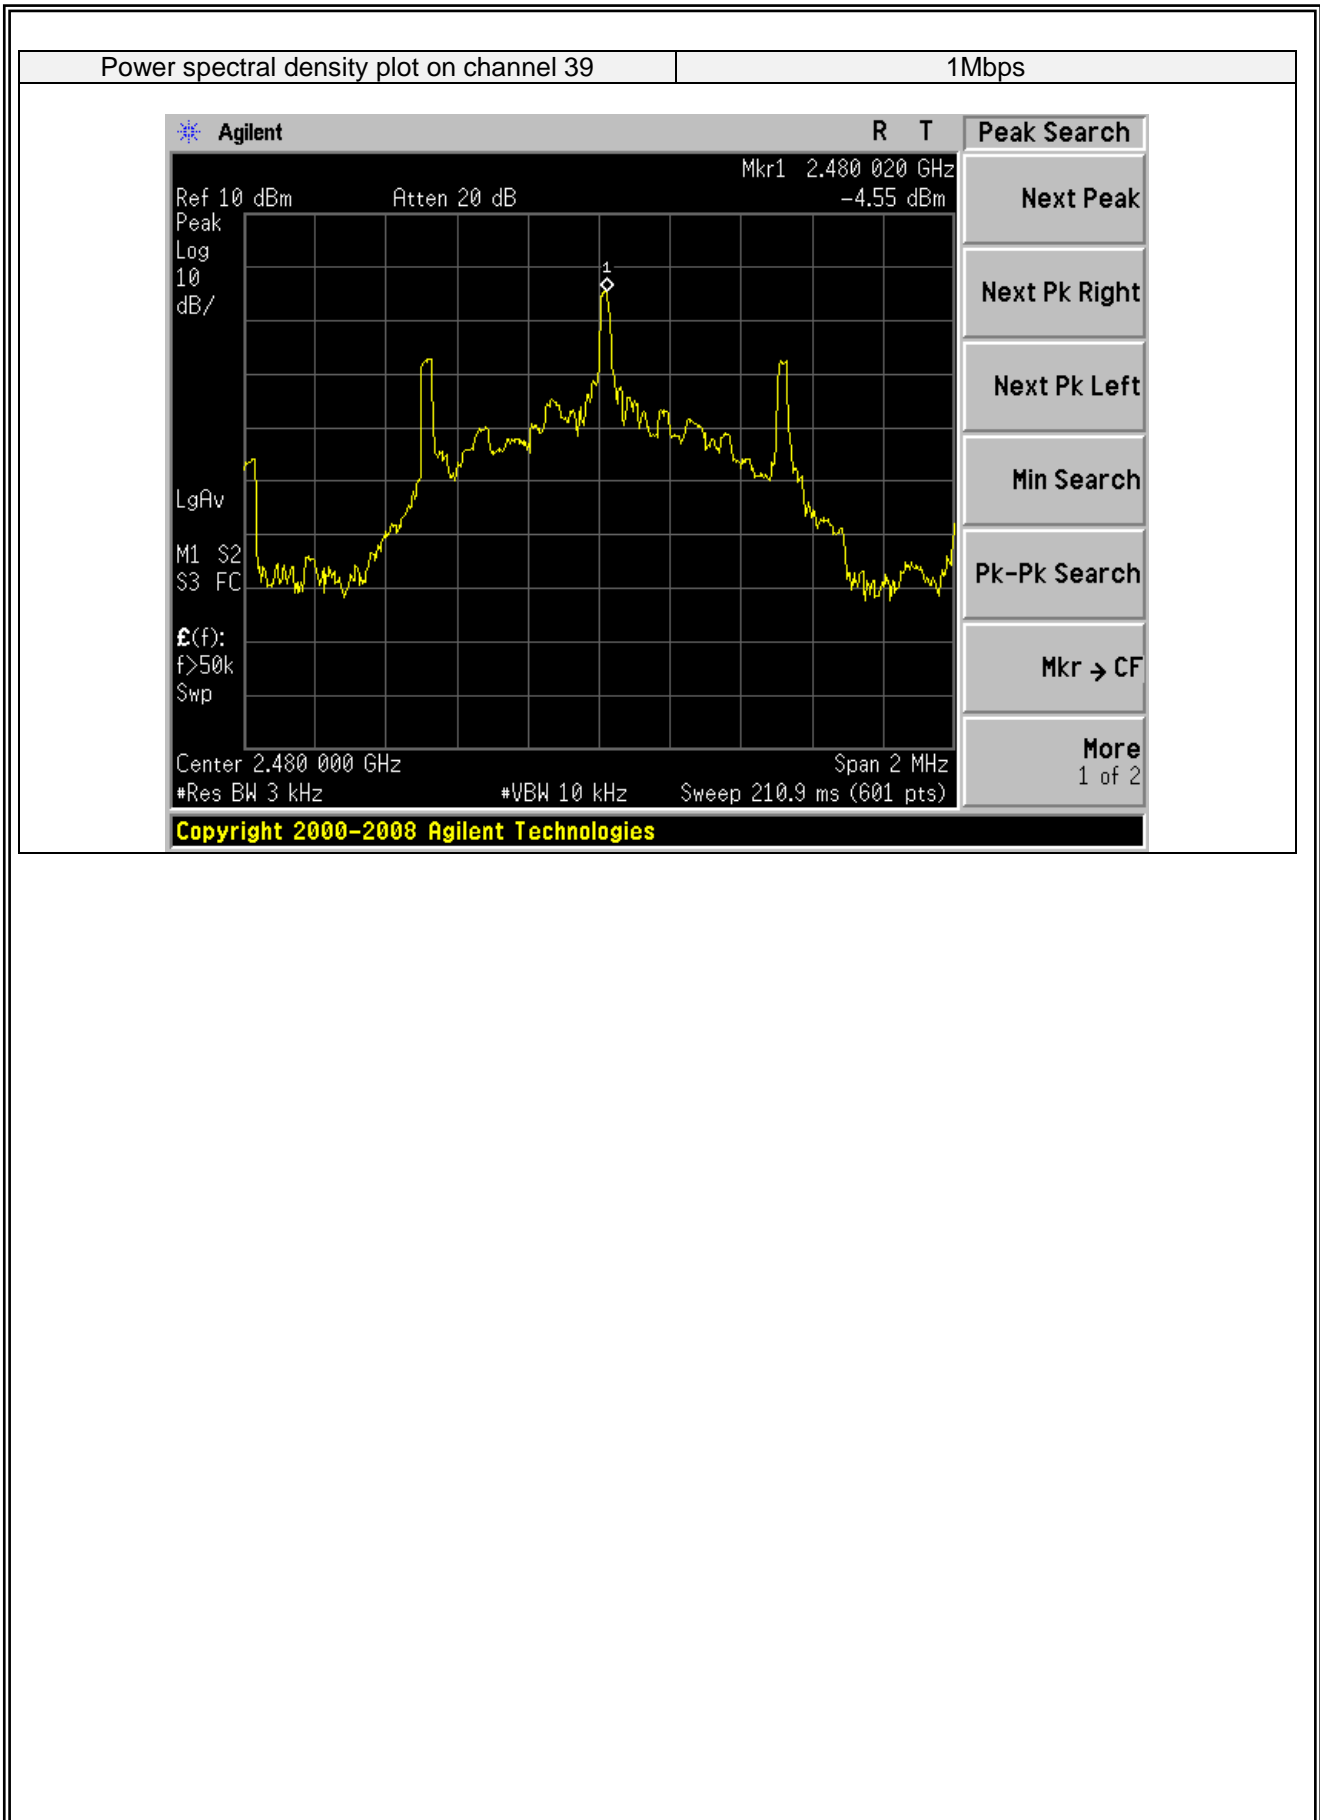

## 7.6 CONDUCTED BAND EDGE MEASUREMENT

### 7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r05

### 7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

### 7.6.5 Test Procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.


Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.


### 7.6.6 Test Results

|              |             |                    |            |
|--------------|-------------|--------------------|------------|
| EUT:         | Voting Box  | Model No.:         | Voting Box |
| Temperature: | 20 °C       | Relative Humidity: | 48%        |
| Test Mode:   | Mode2/Mode4 | Test By:           | Susan Su   |

## GFSK mode: Band Edge-Low Channel

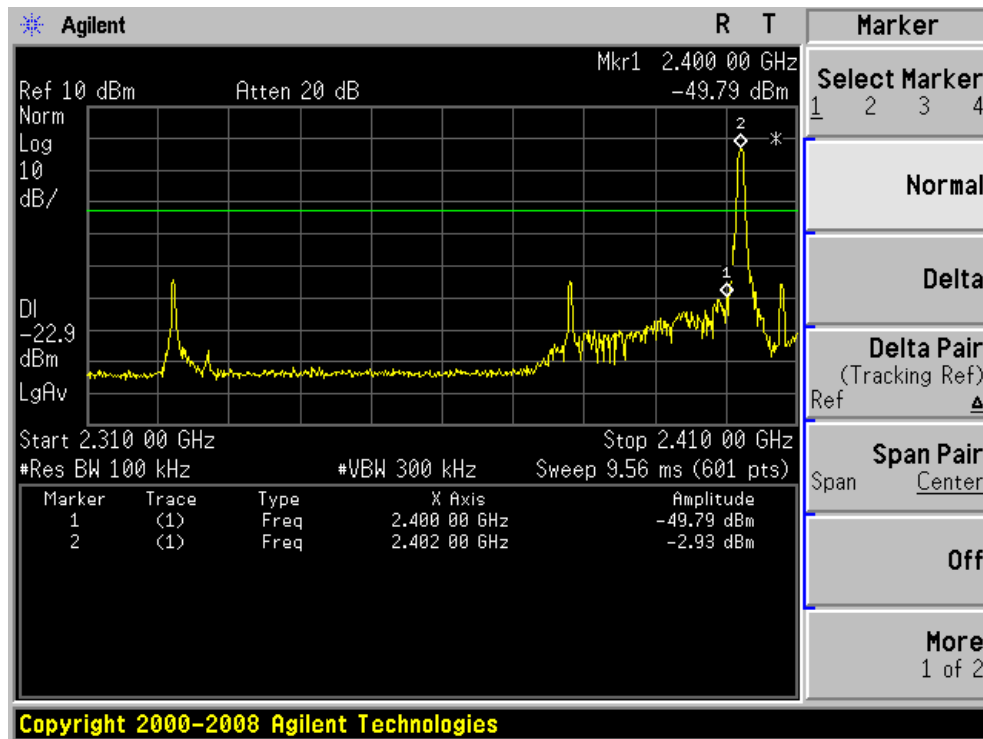

## GFSK mode: Band Edge-High Channel

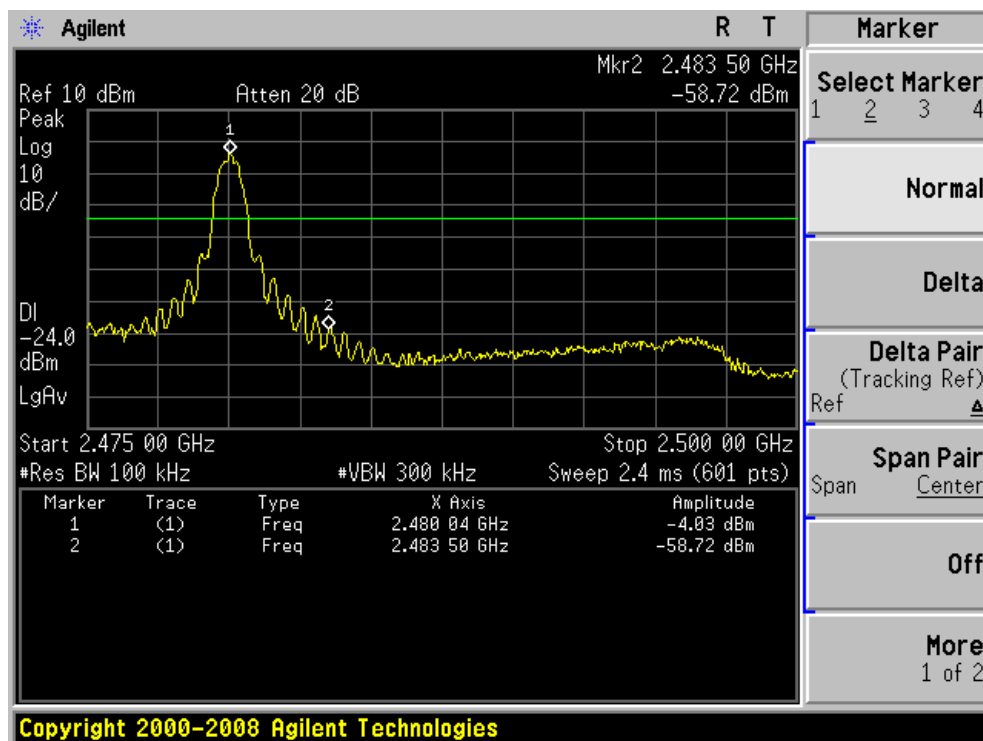

## **7.7 SPURIOUS RF CONDUCTED EMISSIONS**

### **7.7.1 Conformance Limit**

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **7.7.2 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.7.3 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.7.4 Test Procedure**


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

### **7.7.5 Test Results**


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

## Test Plot


GFSK on channel 00

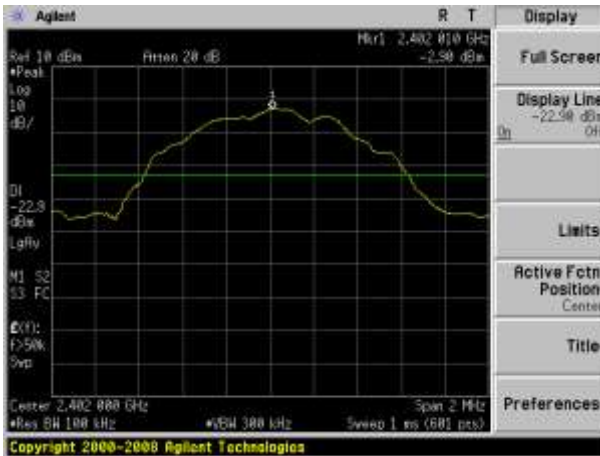

GFSK on channel 00

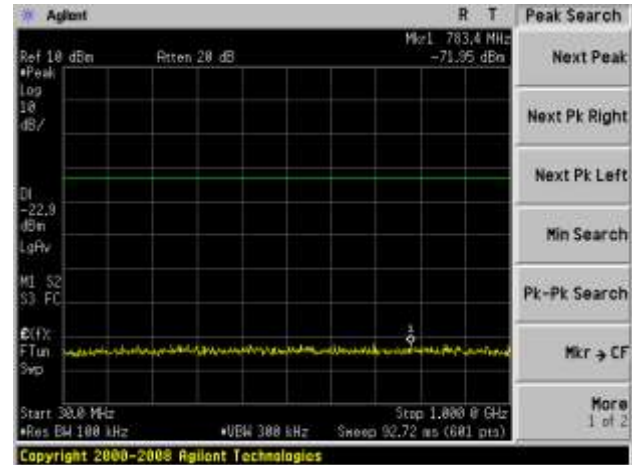

GFSK on channel 00

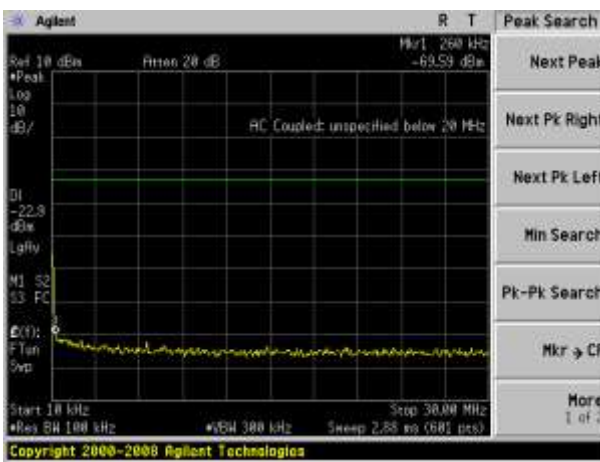


GFSK on channel 00




## Test Plot


GFSK on channel 19

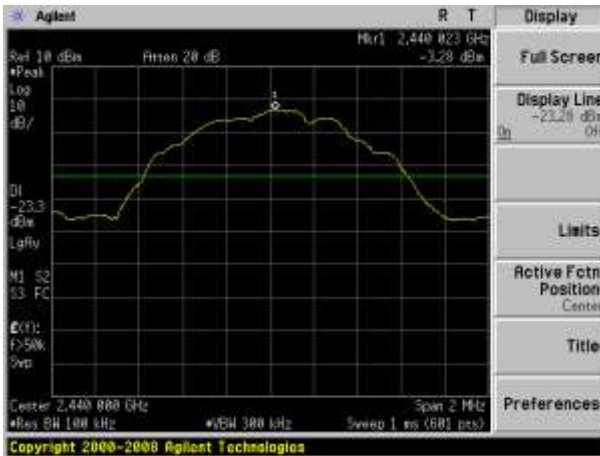


GFSK on channel 19

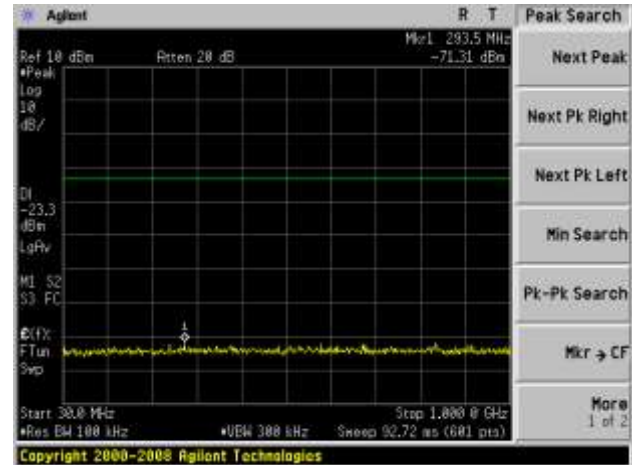

GFSK on channel 19

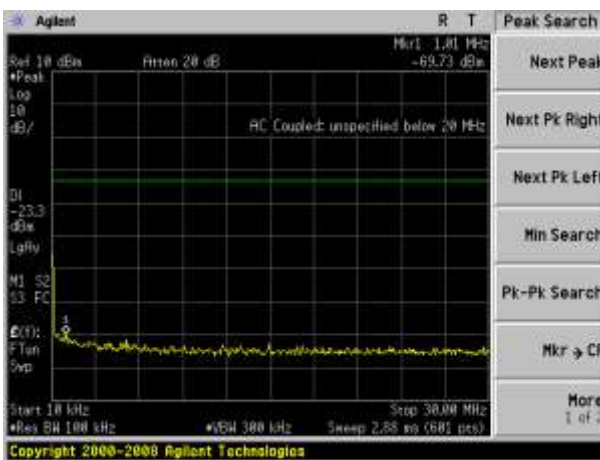


GFSK on channel 19

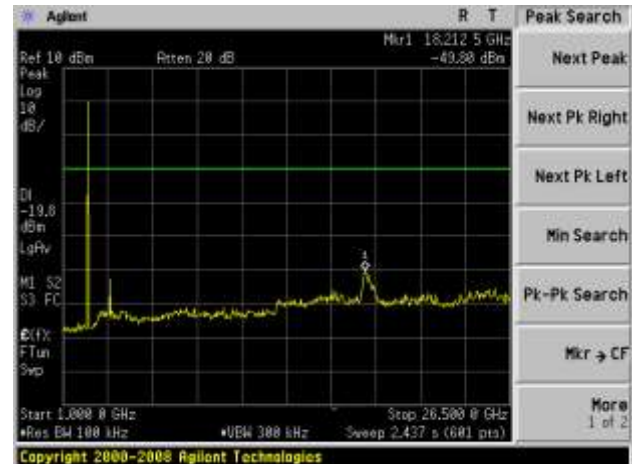


## Test Plot


GFSK on channel 39

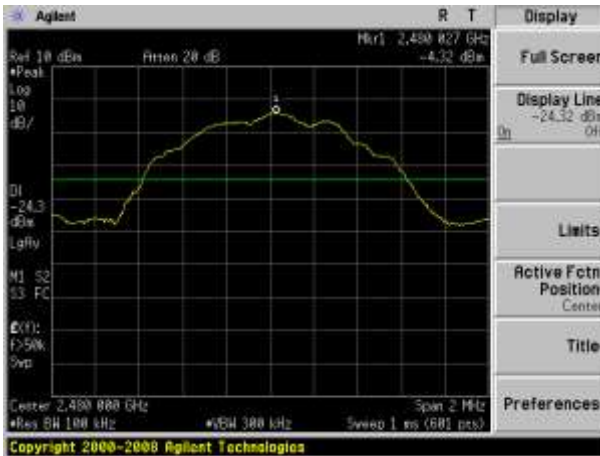


GFSK on channel 39

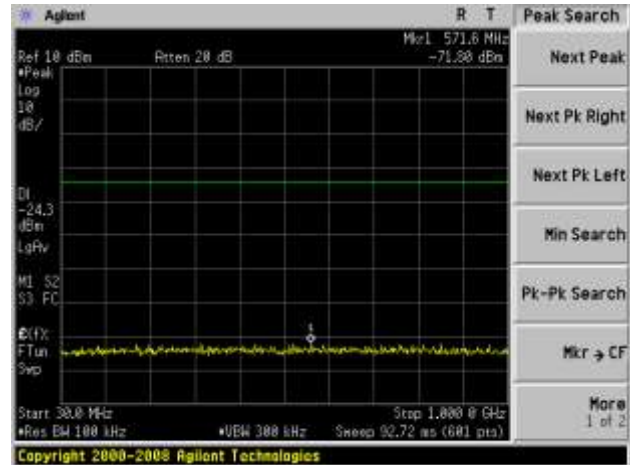

GFSK on channel 39

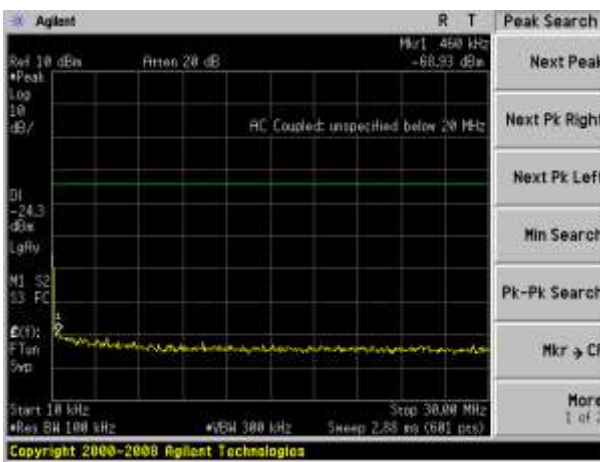

GFSK on channel 39

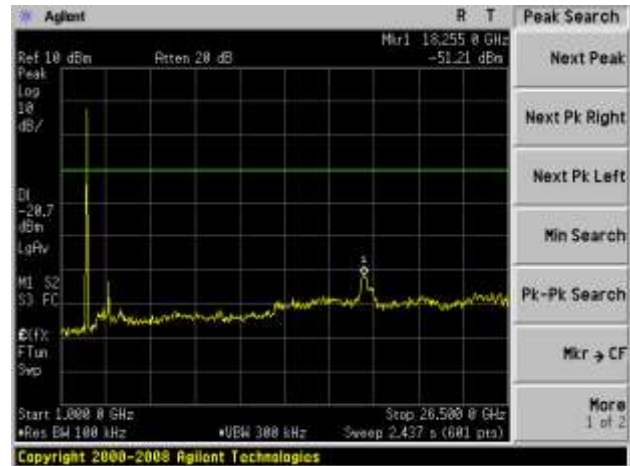

## **7.8 ANTENNA APPLICATION**

### **7.8.1 Antenna Requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **7.8.2 Result**

The EUT antenna is permanent attached Ceramic antenna(Gain:1dBi). It comply with the standard requirement.

END OF REPORT