

Page: 1 of 138

RF Exposure report





The following samples were submitted and identified on behalf of the client as:

Notebook PC **Product Name**

HP **Brand Name**

TPN-C164 Model No. HP Inc **Applicant**

1501 Page Mill Road, Palo Alto, CA 94304, USA

IEEE/ANSI C95.1-1992, IEEE 1528-2013 **Standards**

FCC ID B94-RTL8852CEB

Date of EUT Receipt Dec. 16, 2022

Date of Test(s) Dec. 24, 2022 ~ Dec. 30, 2022

Date of Issue Mar. 15. 2023

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Kimmy Chiou	PM / Tom Chiang	Approved By / John Yeh
Kimmy Chiou	Tom Chiang	John Teh
<u> </u>		Date: Mar. 15, 202

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 2 of 138

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2212000629ES	00	Initial creation of document	Feb. 09, 2023	Kimmy Chiou	*
TESA2212000629ES	01	Modify Applicant information and FCC ID	Mar. 15, 2023	Kimmy Chiou	

N	0	b۵	

1. Ihe	e mark " * "	is the	revised	version	of the re	port due	to comments	submitted by	√ the certification.
--------	--------------	--------	---------	---------	-----------	----------	-------------	--------------	----------------------

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 3 of 138

Contents

1	GENERAL INFORMATION	
	1.1 Test Methodology	5
	1.2 Description of EUT	6
	1.3 Maximum value	7
	1.4 Antenna Information	7
2	MEASUREMENT SYSTEM	8
	2.1 Test Facility	8
	2.2 SAR System	9
	2.3 PD system	13
3	SAR SYSTEM VERIFICATION	15
	3.1 Tissue Simulating Liquid	15
	3.2 Tissue Simulant Liquid measurement	15
	3.3 Measurement results of Tissue Simulant Liquid	16
	3.4 The composition of the tissue simulating liquid:	
	3.5 System check	
	3.6 System check results	
4	PD SYSTEM VERIFICATION	
	4.1 System check	19
	4.2 System check result	
5	TEST CONFIGURATIONS	
	5.1 Test Environment	21
	5.2 Test Note	
	5.3 Test position	
	5.4 Test limit	
6	MAXIMUM OUTPUT POWER	
	6.1 WLAN	
	6.2 WIFI 6E	
	6.3 Bluetooth	
	6.4 BLE	
7	DUTY CYCLE	
8	SUMMARY OF RESULTS	48
_	8.1 Decision rules	
	8.2 Summary of SAR Results	
	8.3 Summary of PD Results	
	8.4 Reporting statements of conformity	
	8.5 Conclusion	
9	SIMULTANEOUS TRANSMISSION ANALYSIS	
	9.1 Simultaneous Transmission Scenarios:	
	9.2 Estimated SAR calculation	
	9.3 SPLSR evaluation and analysis	
	9.4 Conclusion	
10	INSTRUMENTS LIST	
11	UNCERTAINTY BUDGET	
12		ຄວ

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

所非另有說明・此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 4 of 138

13	PD	MEASUREMENT RESULTS	111
14	SA	R SYSTEM CHECK RESULTS	. 131
15	PD	SYSTEM CHECK RESULTS	. 137
16	AP	PENDIXES	. 138
	16.1	SAR_Appendix A Photographs	. 138
	16.2	SAR_Appendix B DAE & Probe Cal. Certificate	. 138
	16.3	SAR Appendix C Phantom Description & Dipole Cal. Certificate	. 138

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

所非另有說明・此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 5 of 138

1 GENERAL INFORMATION

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB616217D04v01r02

KDB248227D01v02r01

IEC/IEEE 62209-1528:2020

SPEAG DASY6 System Handbook

SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

IEC TR 63170:2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,併報生结果僅對測試之樣是負責,同時什樣是僅保留的手。大報生主憑太公司事而許可,不可執份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 6 of 138

1.2 Description of EUT

Product Name	Notebook PC						
Brand Name	HP						
Model No.	TPN-C164						
FCC ID	B94-RTL8852CEB						
Integrated WLAN Module	Brand Name: REALTEK Model Name: RTL8852CE						
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/ HE160 Bluetooth BR/EDR/LE						
Duty Cyclo	WLAN802.11	Please refer to section 7					
Duty Cycle	Bluetooth	Please refer to section 7					
	802.11 b/g/n/ax	2.4GHz (2400.0 – 2483.5 MHz)					
Supported radios (TX	802.11a/n/ac/ax	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) 5.9GHz (5850.0 – 5895.0 MHz)					
Frequency Range, MHz)	802.11ax	6.2GHz (5925.0 – 6425.0 MHz) 6.5GHz (6425.0 – 6525.0 MHz) 6.7GHz (6525.0 – 6875.0 MHz) 7.0GHz (6875.0 – 7125.0 MHz)					
	Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此想华红用魔影测验之缘具色素,同时此缘只属是2000子。太想华土领太公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 138

Maximum value

Summary of Maximum SAR and Power Density Value									
Mode	Highest SAR 1g Body (W/kg)	Highest APD (W/m^2)	Highest PD (W/m^2)						
Bluetooth(GFSK)	0.02	N/A	N/A						
2.4G WLAN	0.35	N/A	N/A						
5G WLAN	1.01	N/A	N/A						
6G WLAN	0.36	2.87	8.81						

Antenna Information

Vendor		Vendor 1																		
Antenna		Main							Aux											
Part Number		DC33002SH00 (0ACCN022003N)								DC33002SH10 (0ACCN022004N)										
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	-0.84	2.78	2.78	2.19	2.07	-1.50	2.76	-1.36	-0.40	-0.63	-1.25	2.09	2.77	1.95	0.97	0.97	0.18	1.64	2.73	2.84

Vendor		Vendor 2																		
Antenna		Main							Aux											
Part Number		81EABP15.G41								81EABP15.G42										
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	5850~5895	5925~6425	6425~6525	6525~6875	6875~7125
Gain (dBi)	0.79	-0.53	-0.12	0.66	1.06	0.71	0.77	0.34	0.04	-0.40	0.16	0.78	0.32	-0.02	0.16	0.75	0.64	-0.49	1.29	0.66

Note: Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 8 of 138

2 MEASUREMENT SYSTEM

2.1 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier	
	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu	SAR 2			
	District, Taipei City, 11493, Taiwan.	SAR 6	TW0029	TW3702	
SGS Taiwan Ltd.	No. 2, Keji 1st Rd., Guishan	SAR 1			
Central RF Lab. (TAF code 3702)	Township, Taoyuan County, 33383, Taiwan	SAR 4	TW0028		
	No.134, Wu Kung Road, New Taipei Industrial Park,	SAR 3			
	Wuku District, New Taipei City, Taiwan	SAR 7	TW0027		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此模具属是2000年。木梨生主概木公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw




Page: 9 of 138

2.2 SAR System

Block Diagram (DASY5)

A block diagram of the SAR measurement System is given in below. This SAR measurement system uses a computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|²)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

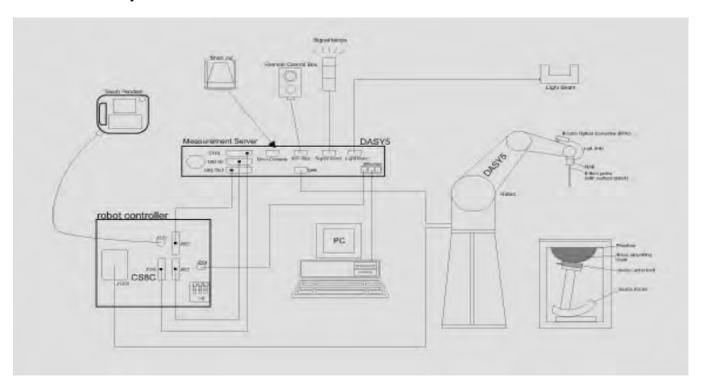

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华结甲属影测过之样只有含,同时此样只属是例如于。大规华主领大风司事而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Talwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


f (886-2) 2298-0488



Page: 10 of 138

Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

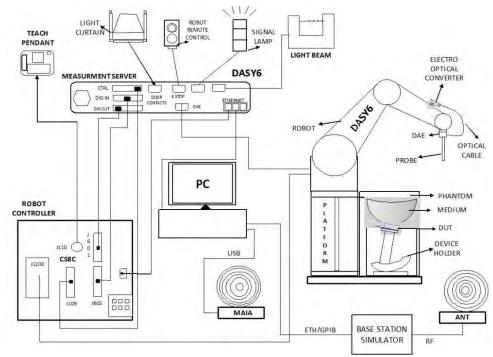

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 11 of 138

EX3DV4 E-Field Probe

LX3DV4 L-I	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5250/5600/5750/6500/7000 MHz Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz
Directivity	± 0.3 dB in HSL (rotation around probe axis)
	± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此就是结果做新加速之緣具有書,同時此緣具屬風內內干。大報集主極大公司書面鈍可,不可如公道制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886



Page: 12 of 138

PHANTOM (ELI)

PHANTOW (E	LI)
Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell	2 ± 0.2 mm
Thickness	
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm

DEVICE HOLDER (ELI)

DEVICE HOLD	EK (ELI)	
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	基
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只方的时,此就是处理度保护的关键,是是是是一种企业,是是不是一种企业的企业,是是是一种企业的企业的企业。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 13 of 138

PD system

Block Diagram (DASY6)

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

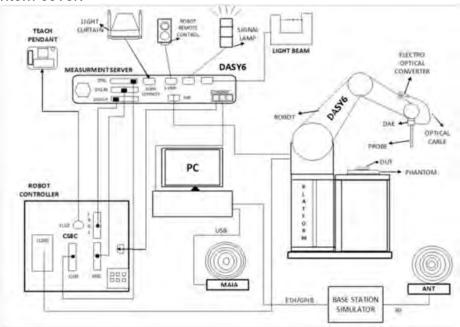

EUmmWVx probe

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consist of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 14 of 138

	Two dipoles optimally arranged to obtain pseudovector information. Minimum 3 measurements/point, 120° rotated around probe axis. Sensors (0.8mm length) printed on glass substrate protected by high density foam. Low perturbation of the measured field. Requires positioner which can do accurate probe rotation.
Frequency Range	750 MHz – 110 GHz
Dynamic Range	< 20 V/m – 10,000 V/m with PRE-10 (min <
	50 V/m - 3000 V/m)
Position Precision	< 0.2 mm (DASY6)
Dimensions	Overall length: 337 mm (tip: 20 mm)
	Tip diameter: encapsulation 8 mm
	(internal sensor < 1mm)
	Distance from probe tip to dipole centers:
	< 2 mm. Sensor displacement to probe's
	calibration point: < 0.3 mm
Applications	E-field measurements of 5G devices and
	other mm-wave transmitters operating
	above 10GHz in < 2 mm distance from
	device (free-space).Power density, H-field
	and far-field analysis using total field
	reconstruction (cDASY6 5G module
sensor 1,5mm calibrated	required)
uw Z	
device	
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

mmWave Phantom

The mmWave Phantom approximates free-space conditions, allowing for the evaluation of the antenna side of the device and the front (screen) side or any opposite-radiating side of wireless devices operating above 10 GHz without distorting the RF field. It consists of a 40mm thick Rohacell plate used as a test bed, which has a loss tangent (tan δ) \leq 0.05 and a relative permittivity (ϵ r) \leq 1.2. High-performance RF absorbers are placed below the foam.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,他都是好用魔影测验之样只有害,同时他接见魔鬼匆匆子。太祖华主领太公司事而验证,太司刘公道测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 138

SAR SYSTEM VERIFICATION

Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

3.2 **Tissue Simulant Liquid measurement**

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within ± 5% of the target values.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 16 of 138

3.3 Measurement results of Tissue Simulant Liquid

Measured Frequency (MHz)	Liquid Temp. (°C)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Limit	Measurement Date
2402		39.282	1.757	38.785	1.773	-1.27%	0.91%	± 5%	
2412		39.265	1.766	38.769	1.781	-1.26%	0.85%	± 5%	
2417		39.257	1.771	38.755	1.789	-1.28%	1.02%	± 5%	
2437		39.222	1.788	38.728	1.795	-1.26%	0.39%	± 5%	
2441	22.3	39.215	1.792	38.716	1.806	-1.27%	0.78%	± 5%	Dec. 24, 2022
2450		39.200	1.800	38.700	1.814	-1.28%	0.78%	± 5%	
2457		39.191	1.807	38.692	1.820	-1.27%	0.72%	± 5%	
2462		39.184	1.813	38.685	1.825	-1.27%	0.66%	± 5%	
2480		39.160	1.832	38.662	1.841	-1.27%	0.49%	± 5%	
5190		36.010	4.650	36.876	4.784	2.40%	2.88%	± 5%	
5200		36.000	4.660	36.862	4.794	2.39%	2.88%	± 5%	
5220		35.980	4.680	36.845	4.800	2.40%	2.56%	± 5%	
5230		35.970	4.690	36.821	4.825	2.37%	2.88%	± 5%	
5240	22.2	35.960	4.700	36.810	4.832	2.36%	2.81%	± 5%	
5250		35.950	4.710	36.779	4.843	2.31%	2.82%	± 5%	Dec. 25, 2022
5260		35.940	4.720	36.756	4.859	2.27%	2.94%	± 5%	
5270		35.930	4.730	36.738	4.870	2.25%	2.96%	± 5%	
5280		35.920	4.740	36.725	4.886	2.24%	3.08%	± 5%	
5300		35.900	4.760	36.701	4.919	2.23%	3.34%	± 5%	
5310		35.890	4.770	36.688	4.945	2.22%	3.67%	± 5%	
5510		35.635	4.976	36.481	5.118	2.37%	2.85%	± 5%	
5550		35.575	5.018	36.436	5.159	2.42%	2.81%	± 5%	
5590	00.4	35.515	5.060	36.390	5.201	2.46%	2.79%	± 5%	D 00 0000
5600	22.4	35.500	5.070	36.379	5.211	2.48%	2.78%	± 5%	Dec. 26, 2022
5670		35.430	5.140	36.299	5.285	2.45%	2.82%	± 5%	
5710		35.390	5.180	36.263	5.326	2.47%	2.82%	± 5%	
5745		35.355	5.215	36.219	5.356	2.44%	2.70%	± 5%	
5750		35.350	5.220	36.207	5.369	2.42%	2.85%	± 5%	
5785	00.0	35.315	5.255	36.192	5.458	2.48%	3.86%	± 5%	D 07 0000
5825	22.2	35.275	5.296	36.172	5.475	2.54%	3.38%	± 5%	Dec. 27, 2022
5835		35.260	5.306	36.143	5.483	2.50%	3.34%	± 5%	
5855	1	35.237	5.326	36.101	5.522	2.45%	3.68%	± 5%	
6025		35.070	5.510	35.961	5.670	2.54%	2.90%	± 5%	
6185	1	34.878	5.698	35.769	5.841	2.55%	2.51%	± 5%	
6345	1	34.686	5.887	35.577	6.012	2.57%	2.12%	± 5%	
6500	1	34.500	6.070	35.391	6.180	2.58%	1.81%	± 5%	
6505	00.5	34.494	6.076	35.365	6.187	2.53%	1.83%	± 5%	B 06 222-
6665	22.3	34.302	6.261	35.073	6.257	2.25%	-0.06%	± 5%	Dec. 28, 2022
6825	1	34.110	6.447	34.881	6.429	2.26%	-0.28%	± 5%	
6865	1	34.062	6.493	34.837	6.473	2.28%	-0.31%	± 5%	
6945	1	33.966	6.586	34.771	6.557	2.37%	-0.44%	± 5%	
7000		33.900	6.650	34.713	6.617	2.40%	-0.50%	± 5%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只方的时,此起生处田茂縣和建立建立,居时此接且茂原河の子。太祖华上海大河自東西地方,无可如此海剿。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 138

The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz. Manufactured by SPEAG:


Broad-band head tissue simulating	SPEAG Product	Frequency range (MHz)	Main Ingredients
liquids	HBBL600- 10000V6	600 - 10000	Water, Oil

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

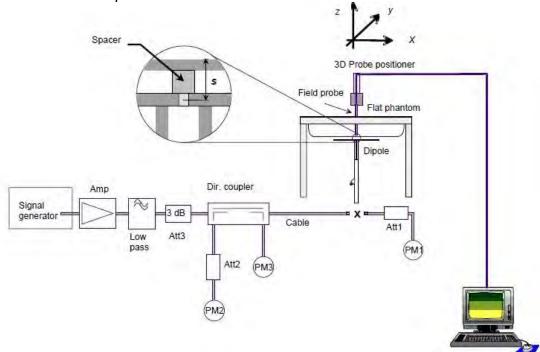

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format

documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 18 of 138

3.6 System check results

,	√alidation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
	D2450V2	727	2450	52.8	13.1	52.4	-0.76	± 10%	Dec.24,2022

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81	8.09	80.9	-0.12	± 10%	Dec.25,2022
D5GHzV2	1023	5600	84.4	8.82	88.2	4.50	± 10%	Dec.26,2022
D5GHzV2	1023	5750	81	7.93	79.3	-2.10	± 10%	Dec.27,2022
Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D6.5GHzV2	1006	6500	292	29.9	299	2.40	± 10%	Dec.28,2022
D7GHzV2	1007	7000	278	26.8	268	-3.60	± 10%	Dec.28,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此数华结甲属影测过之样只有含,同时此样只属是例如于。大规华主领大风司事而连可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 19 of 138

PD SYSTEM VERIFICATION

System check

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

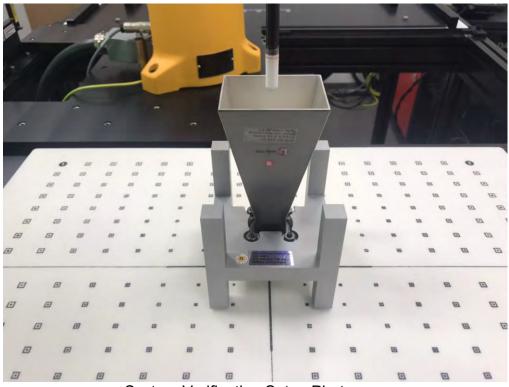

System Verification Setup Photo

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 20 of 138

System check result

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (MHz)	PD Verification Source (MHz)	Probe S/N	DAE S/N	Distance (mm)	Prad (mW)	Measured 4cm^2 (W/m^2)	Target 4cm^2 (W/m^2)	Deviation (dB)	Date
10000	10000	9579	1665	10	86.1	51	51.7	-0.06	Dec.29,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 21 of 138

TEST CONFIGURATIONS

5.1 **Test Environment**

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

5.2 **Test Note**

- General: Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).
- General: The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- General: During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- **General:** According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- WLAN 2.4GHz: 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- WLAN 2.4GHz: 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- WLAN 5GHz: Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488

www.sqs.com.tw



Page: 22 of 138

specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

- WLAN 5GHz: Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.
- WLAN 6GHz: Per October 2020 & April 2021 TCB Workshop Interim procedures and FCC guidance, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02. WIFI 6E SAR is measured by using 6-7GHz parameters per IEC/IEEE62209- 1528:2020 and report also estimated absorbed PD (for reference purposes only, not specifically for compliance). For the highest SAR test configurations also measure incident PD (total) using mmW near-field probe and total-field/power-density reconstruction method.
- WLAN 6GHz: Per equipment manufacturer guidance, power density was measured at d=2mm with the grid step (0.0625λ) for determining compliance at d=2mm.
- WLAN 6GHz: According to October 2020 TCB Workshop Interim procedures, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.67 dB (85%) was used to determine the psPD measurement scaling factor.
- WLAN 6GHz: Per FCC guidance, for simultaneous transmission evaluation, using SAR sum and SPLSR for simultaneous transmit exclusion analyses and evaluations.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 隆北무方와마,此茲史廷田萬默剛建之粹모白書,同時世撰史萬是陳四四王。太親史王極太八司東西姓司,太司刘公道制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 23 of 138

5.3 **Test position**

Laptop mode SAR test position (0mm)

For laptop PC, according to KDB 616217 D04, SAR evaluation is required for the bottom surface of the keyboard. This EUT was tested in the base of EUT directly against the flat phantom. The required minimum test separation distance for incorporating transmitters and antennas into laptop computer display is determined with the display screen opened at an angle of 90° to the keyboard compartment.

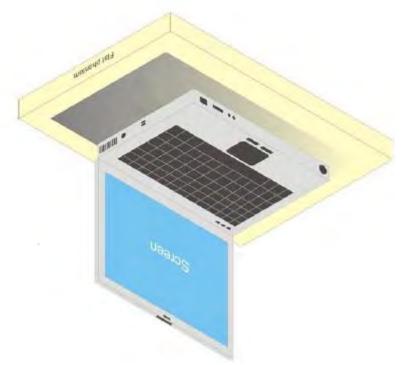


Illustration for Laptop Setup

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 24 of 138

5.4 **Test limit**

§ 2.1093(d)(1)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in § 1.1310 as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in § 1.1310(a) through (c) of this chapter shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure.

Radiofrequency radiation exposure limits.

§ 1.1310(a)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

§ 1.1310(b)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.

§ 1.1310(c)

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatialaverage SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 25 of 138

Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5, copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in Section 4.1 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes



Page: 26 of 138

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
	(i) Limits for Oc	cupational/Controlled Ex	posure	
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500- 100,000			5	<6
	(ii) Limits for Genera	l Population/Uncontrolle	d Exposure	
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500- 100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density. Table 1 to § 1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 27 of 138

MAXIMUM OUTPUT POWER

6.1 **WLAN**

		Au	x (S1)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.50	20.38
	802.11b	6	2437	1Mbps	20.50	20.31
		11	2462		19.50	19.45
		1	2412		18.00	17.61
	802.11g	6	2437	6Mbps	21.50	21.31
		11	2462		17.00	16.68
	802.11n20-HT0	1	2412		17.50	17.17
		6	2437	MCS0	21.50	21.12
		11	2462		16.00	15.71
		1	2412	MCS0	17.50	17.26
	802.11ac20-VHT0	6	2437		21.50	21.14
2.45GHz		11	2462		16.00	15.78
2.430112		1	2412		17.50	17.18
	802.11ax20-HE0	6	2437	MCS0	21.50	21.17
		11	2462		16.00	15.64
		3	2422		16.50	16.18
	802.11n40-HT0	6	2437	MCS0	16.50	16.11
		9	2452		15.00	14.62
		3	2422		16.50	16.25
	802.11ac40-VHT0	6	2437	MCS0	16.50	16.18
		9	2452		15.00	14.76
		3	2422		16.50	16.22
	802.11ax40-HE0	6	2437	MCS0	16.50	16.10
		9	2452		15.00	14.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 28 of 138

		Au	x (S1)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		16.50	16.17
	802.11a	40	5200	GMb no	16.50	16.18
	802.11a	44	5220	6Mbps	16.50	16.12
		48	5240	1	16.50	16.19
		36	5180		16.50	16.28
	000 44×00 LITO	40	5200	MCS0	17.00	16.93
	802.11n20-HT0	44	5220	IVICSU	17.00	16.91
		48	5240	1	17.00	16.81
	802.11ac20-VHT0	36	5180	MCS0	16.50	16.26
		40	5200		17.00	16.66
		44	5220		17.00	16.63
		48	5240	1	17.00	16.61
5.15-5.25 GHz		36	5180		16.50	16.12
5.15-5.25 GHZ	000 44 00 1 150	40	5200	MOCO	17.00	16.68
	802.11ax20-HE0	44	5220	MCS0	17.00	16.77
		48	5240	1	17.00	16.70
	000 44-40 LITO	38	5190	MOCO	15.00	14.61
	802.11n40-HT0	46	5230	MCS0	18.50	18.48
	000 44 as 40 \ // ITO	38	5190	MCCO	15.00	14.71
	802.11ac40-VHT0	46	5230	MCS0	18.50	18.19
	000 44 av 40 LIFO	38	5190	MCCO	15.00	14.70
	802.11ax40-HE0	46	5230	MCS0	18.50	18.14
	802.11ac80-VHT0	42	5210	MCS0	13.50	13.25
	802.11ax80-HE0	42	5210	MCS0	13.50	13.16
	802.11ac160-VHT0	50	5250	MCS0	9.50	9.16
	802.11ax160-HE0	50	5250	MCS0	9.50	9.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 29 of 138

		٨٠٠	x (S1)			
		Au I	X (31)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		17.00	16.80
	000 44-	56	5280	CN //	17.00	16.89
	802.11a	60	5300	6Mbps	17.00	16.85
		64	5320]	16.50	16.13
		52	5260		17.00	16.67
	802.11n20-HT0	56	5280	MCS0	17.00	16.69
	802.111120-F110	60	5300	- IVICSU	17.00	16.63
		64	5320		17.00	16.77
		52	5260	MCS0	17.00	16.78
	902 11cc20 \/UT0	56	5280		17.00	16.71
	802.11ac20-VHT0	60	5300		17.00	16.79
5.25-5.35 GHz		64	5320		17.00	16.60
5.25-5.35 GHZ		52	5260		17.00	16.67
	802.11ax20-HE0	56	5280	MCS0	17.00	16.71
	002.11dX20-11L0	60	5300	IVICOU	17.00	16.63
		64	5320		17.00	16.76
	802.11n40-HT0	54	5270	MCS0	18.50	18.37
	002.111140-1110	62	5310	IVICOU	15.00	14.60
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.26
	OUZ. I IAU-HU- VIIIU	62	5310	IVICOU	15.00	14.73
	802.11ax40-HE0	54	5270	MCS0	18.50	18.24
	UUZ. I IAA+U-I ILU	62	5310	IVICOU	15.00	14.62
	802.11ac80-VHT0	58	5290	MCS0	11.00	10.74
	802.11ax80-HE0	58	5290	MCS0	11.00	10.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Page: 30 of 138

		Aı	ıx (S1)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		16.50	16.18
	000.44-	120	5600	CN //	16.50	16.14
	802.11a	140	5700	6Mbps	14.50	14.27
		144	5720	1	17.00	16.79
		100	5500		16.50	16.29
	000 44 00 1170	120	5600	1	17.00	16.62
	802.11n20-HT0	140	5700	MCS0	13.00	12.74
		144	5720	1	17.50	17.16
		100	5500		16.50	16.13
	000 44 00 14 170	120	5600	1	17.00	16.69
	802.11ac20-VHT0	140	5700	MCS0	13.00	12.62
		144	5720	1	17.50	17.29
		100	5500		16.50	16.22
		120	5600		17.00	16.62
	802.11ax20-HE0	140	5700	MCS0	13.00	12.65
		144	5720	1	17.50	17.29
		102	5510	-	15.50	15.42
		118	5590		18.50	18.33
5.6GHz	802.11n40-HT0	134	5670	MCS0	15.50	15.37
		142	5710		18.50	18.48
		102	5510		15.50	15.12
		118	5590		18.50	18.25
	802.11ac40-VHT0	134	5670	MCS0	15.50	15.30
		142	5710		18.50	18.29
		102	5510		15.50	15.15
		118	5590	1	18.50	18.23
	802.11ax40-HE0	134	5670	MCS0	15.50	15.28
		142	5710	1	18.50	18.28
		106	5530		14.00	13.70
	802.11ac80-VHT0	122	5610	MCS0	14.50	14.12
	332.11.3333 VIII 0	138	5690	†	17.00	16.78
		106	5530		14.00	13.66
	802.11ax80-HE0	122	5610	MCS0	14.50	14.12
	002.11ax00-11L0	138	5690	141555	17.00	16.68
	802.11ac160-VHT0	114	5570	MCS0	10.50	10.00
	802.11ax160-HE0	114	5570	MCS0	10.50	10.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clients' instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 31 of 138

	1	Δ.	(0.1)			
		Au	x (S1)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		19.50	19.44
	802.11a	157	5785	6Mbps	19.50	19.42
		165	5825		19.50	19.47
		149	5745		19.50	19.18
	802.11n20-HT0	157	5785	MCS0	19.50	19.30
		165	5825		19.50	19.24
	802.11ac20-VHT0	149	5745	MCS0	19.50	19.35
		157	5785		19.50	19.31
		165	5825		19.50	19.23
5.8GHz		149	5745		19.50	19.21
3.0GHZ	802.11ax20-HE0	157	5785	MCS0	19.50	19.33
		165	5825		19.29	
	802.11n40-HT0	151	5755	MCS0	18.50	18.37
	002.111140-1110	159	5795	IVICOU	18.50	18.23
	802.11ac40-VHT0	151	5755	MCS0	18.50	18.32
	002.11a040-VH10	159	5795	IVICSU	18.50	18.30
	802.11ax40-HE0	151	5755	MCS0	18.50	18.37
	002.11ax40-11EU	159	5795	IVICOU	18.50	18.22
	802.11ac80-VHT0	155	5775	MCS0	16.50	16.19
	802.11ax80-HE0	155	5775	MCS0	16.50	16.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 32 of 138

		Au	ıx (S1)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		169	5845		13.50	13.06
	802.11a	173	5865	6Mbps	13.50	13.04
		177	5885	1 '	13.50	13.16
		169	5845	MCS0 13.50 14.00 13.50	13.09	
	802.11n20-HT0	173	5865		14.00	13.63
		177	5885		13.50	13.15
	802.11ac20-VHT0	169	5845	MCS0	13.50	13.12
		173	5865		14.00	13.67
		177	5885		13.50	13.02
5 0CL -		169	5845		13.50	13.08
5.9GHz	802.11ax20-HE0	173	5865	MCS0	14.00	13.64
		177	5885		13.50	13.11
	802.11n40-HT0	167	5835	MCS0	17.00	16.79
	ου2.111 14 0-Π10	175	5875	IVICSU	16.50	16.33
	802.11ac40-VHT0	167	5835	MCS0	17.00	16.55
	002.11ac40-vf110	175	5875	IVICSU	16.50	16.05
	802.11ax40-HE0	167	5835	MCS0	17.00	16.60
	002.118X40-ΠΕU	175	5875	IVICSU	16.50	16.04
	802.11ac80-VHT0	171	5855	MCS0	17.00	16.92
	802.11ax80-HE0	171	5855	MCS0	17.00	16.68

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 33 of 138

		Ma	in (S0)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		20.50	20.37
	802.11b	6	2437	1Mbps	20.50	20.41
		11	2462]	19.50	19.26
		1	2412		18.00	17.64
	802.11g	6	2437	6Mbps	21.50	21.42
		11	2462	i i	17.00	16.75
	802.11n20-HT0	1	2412	MCS0	17.50	17.29
		6	2437		21.50	21.12
		11	2462]	16.00	15.77
		1	2412	MCS0	17.50	17.20
	802.11ac20-VHT0	6	2437		21.50	21.16
0.45011-		11	2462		16.00	15.63
2.45GHz		1	2412		17.50	17.28
	802.11ax20-HE0	6	2437	MCS0	21.50	21.20
		11	2462	1	16.00	15.69
		3	2422		16.50	16.22
	802.11n40-HT0	6	2437	MCS0	16.50	16.25
		9	2452	1	15.00	14.63
		3	2422		16.50	16.12
	802.11ac40-VHT0		MCS0	16.50	16.18	
		9	2452]	15.00	14.76
		3	2422		16.50	16.28
	802.11ax40-HE0	6	2437	MCS0	16.50	16.21
		9	2452	1	15.00	14.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 34 of 138

	'	N 4-	: (CO)			
		IVIA	in (S0)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		16.50	16.19
	802.11a	40	5200	GMb no	16.50	16.15
	802.11a	44	5220	olviops	16.50	16.34
		48	5240	1	16.50	16.09
		36	5180		16.50	16.10
	000 44×00 LITO	40	5200	MOSO	17.00	16.87
	802.11n20-HT0	44	5220	MCSU	17.00	16.98
		48	5240		17.00	16.96
	802.11ac20-VHT0	36	5180	MCS0	16.50	16.18
		40	5200		17.00	16.61
		44	5220		17.00	16.56
		48	5240	1	17.00	16.67
5 45 5 05 OLL-		36	5180	MOCO	16.50	16.09
5.15-5.25 GHz	000 44 00 1150	40	5200		17.00	16.67
	802.11ax20-HE0	44	5220	MCSU	17.00	16.56
		48	5240	1		16.68
		38	5190	6Mbps 16.50 16.50 16.50 16.50 16.50 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 17.00 18.50 MCS0 18.50 MCS0 18.50 MCS0 18.50 MCS0 13.50		14.68
	802.11n40-HT0	46	5230		18.23	
	000 44 40 \ // ITO	38	5190	14000	15.00	14.53
	802.11ac40-VHT0	46	5230	MCSU		18.12
	000 44 40 1 1 1 7 0	38	5190	MOCO		14.54
	802.11ax40-HE0	46	5230	INICSU		18.08
	802.11ac80-VHT0	42	5210	MCS0		13.08
	802.11ax80-HE0	42	5210	MCS0	13.50	13.01
	802.11ac160-VHT0	50	5250	MCS0	9.50	9.06
	802.11ax160-HE0	50	5250	MCS0	9.50	9.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices duterwise satesture results shown in this test report teller only to the satisfies (sever an source satisfies) and source satisfies the satisfies t Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 35 of 138

		Ma	in (S0)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		17.00	16.97
	000 11-	56	5280	GMb no	17.00	16.96
	802.11a	60	5300	6Mbps	17.00	16.93
		64	5320]	16.50	16.25
		52	5260	17.00	16.74	
	802.11n20-HT0	56	5280	MCS0	17.00	16.71
	002.111120-1110	60	5300	IVICSU	17.00	16.87
		64	5320	1	17.00	16.85
	000 44 00 1/1/170	52	5260	MCS0	17.00	16.71
		56	5280		17.00	16.85
	802.11ac20-VHT0	60	5300	IVICSU	17.00	16.83
5.25-5.35 GHz		64	5320		17.00	16.80
5.25-5.35 GHZ		52	5260	MCS0	17.00	16.84
	802.11ax20-HE0	56	5280		17.00	16.78
	002.11dX20-11E0	60	5300	IVICSU	17.00	16.86
		64	5320		17.00	16.76
	802.11n40-HT0	54	5270	MCS0	18.50	18.47
	002.111140-1110	62	5310	IVICSU	15.00	14.71
	802.11ac40-VHT0	54	5270	MCS0	18.50	18.22
	002.11a040-VH10	62	5310	IVICOU	15.00	14.83
	802.11ax40-HE0	54	5270	MCS0	18.50	18.26
	002.11aX40-NE0	62	5310	IVICOU	15.00	14.82
	802.11ac80-VHT0	58	5290	MCS0	11.00	10.70
	802.11ax80-HE0	58	5290	MCS0	11.00	10.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 138

	1	Ma	ain (S0)			
		1410				
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		16.50	16.22
	000.44	120	5600	0.04	16.50	16.11
	802.11a	140	5700	6Mbps	14.50	14.17
		144	5720	1	17.00	16.61
		100	5500		16.50	16.25
	000 44 00 1170	120	5600	1	17.00	16.76
	802.11n20-HT0	140	5700	MCS0	13.00	12.70
		144	5720	1	17.50	17.14
		100	5500	16.50	16.16	
		120	5600	1	17.00	16.73
	802.11ac20-VHT0	140	5700	MCS0	13.00	12.61
		144	5720	1	17.50	17.12
		100	5500		16.50	16.10
		120	5600		17.00	16.69
	802.11ax20-HE0	140	5700	MCS0	13.00	12.71
		144	5720	1	17.50	17.18
		102	5510		15.50	15.44
		118	5590	†	18.50	18.35
5.6GHz	802.11n40-HT0	134	5670	MCS0	15.50	15.47
		142	5710	1	18.50	18.47
		102	5510		15.50	15.21
		118	5590		18.50	18.23
	802.11ac40-VHT0	134	5670	MCS0	15.50	15.22
		142	5710	1	18.50	18.22
		102	5510		15.50	15.27
		118	5590	1	18.50	18.30
	802.11ax40-HE0	134	5670	MCS0	15.50	15.15
		142	5710	1	18.50	18.24
		106	5530		14.00	13.68
	802.11ac80-VHT0	122	5610	MCS0	14.50	14.18
	302.11d000-V1110	138	5690	"""	17.00	16.80
		106	5530		14.00	13.62
	802.11ax80-HE0	122	5610	MCS0	14.50	14.26
	002.11ax00-11L0	138	5690	10000	17.00	16.74
	802.11ac160-VHT0	114	5570	MCS0	17.00	10.13
	802.11ac160-VH10	114	5570	MCS0	10.50	10.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 37 of 138

		N4-	: (CO)			
		ıvıa ı	in (S0)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		19.50	19.48
	802.11a	157	5785	6Mbps	19.50	19.46
		165	5825		19.50	19.39
		149	5745		19.50	19.27
	802.11n20-HT0	157	5785	MCS0	19.50	19.17
		165	5825		19.50	19.13
		149	5745		19.50	19.11
	802.11ac20-VHT0	157	5785	MCS0	19.50	19.15
		165	5825		19.50	19.22
5.8GHz		149	5745		19.50	19.21
3.0GHZ	802.11ax20-HE0	157	5785	MCS0	19.50	19.24
		165	5825		19.50	19.15
	802.11n40-HT0	151	5755	MCS0	18.50	18.14
	002.111140-1110	159	5795	IVICOU	18.50	18.17
	802.11ac40-VHT0	151	5755	MCS0	18.50	18.25
	002.11a040-VH10	159	5795	IVICOU	18.50	18.29
	802.11ax40-HE0	151	5755	MCS0	18.50	18.16
	002.11ax40-11⊑0	159	5795	IVICOU	18.50	18.30
	802.11ac80-VHT0	155	5775	MCS0	16.50	16.11
	802.11ax80-HE0	155	5775	MCS0	16.50	16.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 38 of 138

		Ma	in (S0)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		169	5845		13.50	13.22
	802.11a	173	5865	6Mbps	13.50	13.27
		177	5885		13.50	13.24
		169	5845		13.50	13.30
	802.11n20-HT0	173	5865	MCS0	14.00	13.80
		177	5885]	13.50	13.27
		169	5845		13.50	13.35
	802.11ac20-VHT0	173	5865	MCS0	14.00	13.82
		177	5885]	13.50	13.26
5 00L		169	5845		13.50	13.24
5.9GHz	802.11ax20-HE0	173	5865	MCS0	14.00	13.79
		177	5885	1	13.50	13.25
	902 11p40 LITO	167	5835	MCS0	17.00	16.93
	802.11n40-HT0	175	5875	IVICSU	16.50	16.18
	902 11aa 10 \/LITO	167	5835	MCCO	17.00	16.75
	802.11ac40-VHT0	175	5875	MCS0	16.50	16.33
	802.11ax40-HE0	167	5835	MCS0	17.00	16.77
	802.118X40-HEU	175	5875	IVICSU	16.50	16.22
	802.11ac80-VHT0	171	5855	MCS0	17.00	16.97
	802.11ax80-HE0	171	5855	MCS0	17.00	16.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WIFI 6E

Report No.: TESA2212000629ES

Page: 39 of 138

			Aux (S1)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.50	7.03
	802.11ax20-HE0	45	6175	MCS0	7.00	6.64
		93	6415	1 [7.00	6.60
		3	5965		10.00	9.53
	802.11ax40-HE0	43	6165	MCS0	10.00	9.68
U-NII-5		91	6405	165 MCS0 10.00 405 10.00 985 13.00	9.60	
6.2GHz		7	5985		13.00 12	12.68
	802.11ax80-HE0	39	6145	MCS0	13.00	12.51
		87	6385	1	13.00	12.60
		15	6025		14.50	14.09
	802.11ax160-HE0	47	6185	MCS0	14.50	14.11
		79	6345	1	14.50	14.18
			Aux (S1)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.73
	802.11ax20-HE0	105	6475	MCS0	7.50	7.32
		113	6515		7.00	6.87
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.88
6.5GHz	002.11ax40-11EU	107	6485	IVICOU	10.00	9.71
	802.11ax80-HE0	103	6465	MCS0	13.00	12.80
	002.11ax00-HEU	119	6545	IVICSU	13.00	12.88
	802.11ax160-HE0	111	6505	MCS0	15.00	14.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 40 of 138

			Aux (S1)			
		T	Aux (ST)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	16.87
		117	6535		7.00	6.65
	802.11ax20-HE0	149	6695	MCS0	7.50	7.24
		181	6855		7.00	6.60
		115	6525		10.50	10.20
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.70
6.7GHz		179	6845		10.00	9.72
0.7 GHZ		135	6625		13.00	12.80
	802.11ax80-HE0	151	6705	MCS0	13.00	12.75
		167	6785		13.00	12.73
	802.11ax160-HE0	143	6665	MCS0	15.00	14.74
	002.11ax100-HE0	175	6825	IVICSU	15.00	14.77
			Aux (S1)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		7.00	6.67
	802.11ax20-HE0	209	6995	MCS0	7.00	6.63
		233	7115		7.50	7.17
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.61
0-1111-0 7.0GHz	002.11dX40-MEU	227	7085	IVICOU	10.50	10.20
1.001 IZ		183	6865		13.00	12.63
	802.11ax80-HE0	199	6945	MCS0	13.00	12.69
		215	7025		12.50	12.22
	802.11ax160-HE0	207	6985	MCS0	11.50	11.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 41 of 138

	•					
	T	1	Main (S0)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	5955		7.50	7.14
	802.11ax20-HE0	45	6175	MCS0	7.00	6.61
		93	6415		7.00	6.63
		3	5965		10.00	9.74
	802.11ax40-HE0	43	6165	MCS0	10.00	9.66
U-NII-5		91	6405		10.00	9.77
6.2GHz		7	5985		13.00	12.63
	802.11ax80-HE0	39	6145	MCS0	13.00	12.66
		87	6385		13.00	12.64
		15	6025]	14.50	14.23
	802.11ax160-HE0	47	6185	MCS0	14.50	14.29
		79	6345		14.50	14.26
			Main (S0)			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		97	6435		7.00	6.67
	802.11ax20-HE0	105	6475	MCS0	7.50	7.24
		113	6515		7.00	6.73
U-NII-6	802.11ax40-HE0	99	6445	MCS0	10.00	9.67
6.5GHz	002.11ax+0-11E0	107	6485	IVICOU	10.00	9.80
	802.11ax80-HE0	103	6465	MCS0	13.00	12.77
	002.11ax00-11E0	119	6545		13.00	12.68
	802.11ax160-HE0	111	6505	MCS0	15.00	14.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 42 of 138

			Main (SO)			
		T	Main (S0)	Т		<u> </u>
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	16.93
		117	6535		7.00	6.74
	802.11ax20-HE0	149	6695	MCS0	7.50	7.18
		181	6855] [7.00	6.69
		115	6525		10.50	10.26
U-NII-7	802.11ax40-HE0	147	6685	MCS0	10.00	9.84
0-MI-7 6.7GHz		179	6845		10.00	9.77
0.7 GHZ		135	135 6625	13.00	12.77	
	802.11ax80-HE0	151	6705	MCS0	13.00	12.68
		167	6785		13.00	12.72
	802.11ax160-HE0	143	6665	MCS0	15.00	14.78
	002.11ax100-⊓⊑0	175 6825		IVICSU	15.00	14.71
			Main (S0)			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		185	6875		7.00	6.52
	802.11ax20-HE0	209	6995	MCS0	7.00	6.60
		233	7115		7.50	7.20
U-NII-8	802.11ax40-HE0	187	6885	MCS0	10.00	9.64
7.0GHz	002.11ax40-11E0	227	7085	IVICOU	10.50	10.07
1.00112		183	6865] [13.00	12.60
	802.11ax80-HE0	199	6945	MCS0	13.00	12.58
		215	7025		12.50	12.13
	802.11ax160-HE0	207	6985	MCS0	11.50	11.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 43 of 138

6.3 **Bluetooth**

			1Mbps		2Mbps		3Mbps_		
Mode	Aux (S1)	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
	CH 00	2402		5.33		5.91		5.94	
BR/EDR	CH 39	2441	6.00	5.48	6.00	5.95	6.00	5.88	
	CH 78	2480		4.85		5.56		5.33	

BLE 6.4

Mode	A. v. (C1)	Frequency	GFSK					
Mode	Aux (S1)	(MHz) Max. Rated Avg.P + Max. Tolerance (2402 2440 2480 Frequency (MHz) Max. Rated Avg.P + Max. Tolerance (2402 2402	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)				
	CH 00	2402		5.34				
BLE_1M	CH 19	2440	6	5.17				
	CH 39	2480		4.59				
Mode	Channol	Frequency	(GFSK				
Mode	Channel		Max. Rated Avg.Power + Max. Tolerance (dBm)	GFSK Average Output Power (dBm)				
Mode	Channel CH 00	(MHz)	Max. Rated Avg.Power					
Mode BLE_2M		(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)				


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 44 of 138

DUTY CYCLE

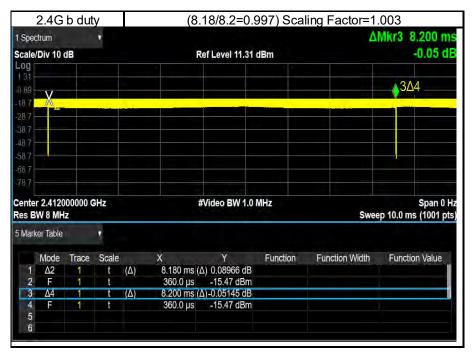

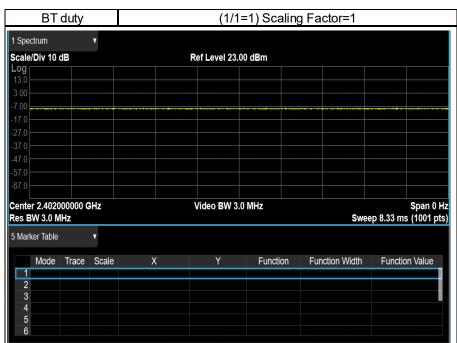


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 45 of 138

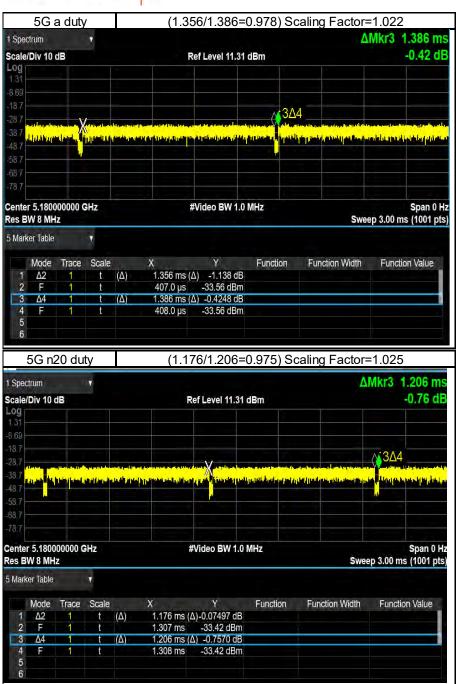


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 46 of 138

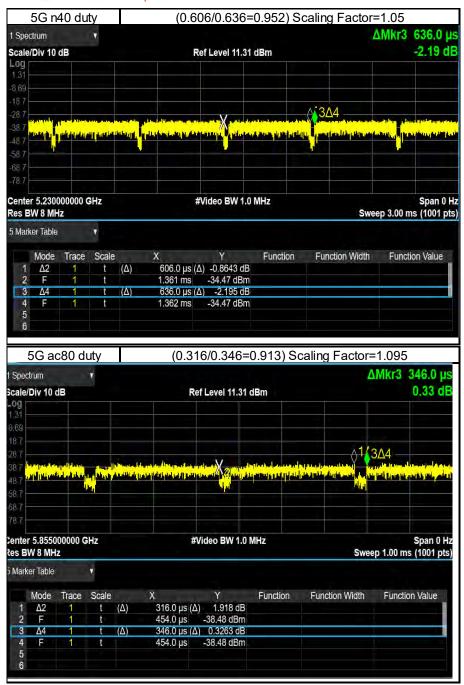


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 47 of 138

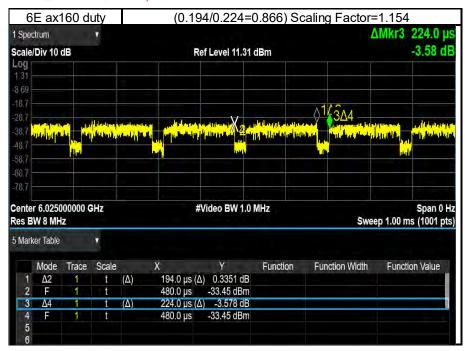

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 48 of 138

SUMMARY OF RESULTS

8.1 **Decision rules**

Reported measurement data comply with Test Methodology in section 1.1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 49 of 138

8.2 **Summary of SAR Results**

Vendor 1

vendor i												
Mode	Antenna	Position	Distance	Channel	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	ID
Wode	Antenna	Position	(mm)	Chamilei	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	ID
WLAN 802.11b	Aux (S1)	Bottom Surface	0	1	2412	20.50	20.38	1.00	102.80%	0.255	0.263	001
WLAN 802.11b	Aux (S1)	Bottom Surface	0	6	2437	20.50	20.31	1.00	104.47%	0.222	0.233	-
WLAN 802.11b	Aux (S1)	Bottom Surface	0	11	2462	19.50	19.45	1.00	101.16%	0.241	0.245	
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
Bluetooth(GFSK)	Aux (S1)	Bottom Surface	0	39	2441	6.00	5.48	1.00	112.72%	0.014	0.016	002
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	ID
			` '		` ′	Tolerance (dBm)	(dBm)			Measured	Reported	
WLAN 802.11n(40M) 5.2G	Aux (S1)	Bottom Surface	0	46	5230	18.50	18.48	1.05	100.46%	0.345	0.364	003
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.3G	Aux (S1)	Bottom Surface	0	54	5270	18.50	18.37	1.05	103.04%	0.408	0.441	004
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11n(40M) 5.6G	Aux (S1)	Bottom Surface	0	142	5710	18.50	18.48	1.05	100.46%	0.320	0.338	005
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11a 5.8G	Aux (S1)	Bottom Surface	0	149	5745	19.50	19.44	1.02	101.39%	0.511	0.530	-
WLAN 802.11a 5.8G	Aux (S1)	Bottom Surface	0	157	5785	19.50	19.42	1.02	101.86%	0.487	0.507	-
WLAN 802.11a 5.8G	Aux (S1)	Bottom Surface	0	165	5825	19.50	19.47	1.02	100.69%	0.526	0.541	006
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.9G	Aux (S1)	Bottom Surface	0	171	5855	17.00	16.92	1.10	101.86%	0.317	0.354	007
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11b	Main (S0)	Bottom Surface	0	1	2412	20.50	20.37	1.00	103.04%	0.275	0.284	-
WLAN 802.11b	Main (S0)	Bottom Surface	0	6	2437	20.50	20.41	1.00	102.09%	0.295	0.302	008
WLAN 802.11b	Main (S0)	Bottom Surface	0	11	2462	19.50	19.26	1.00	105.68%	0.281	0.298	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged S (W/		ID
WLAN 802.11n(40M) 5.2G	Main (S0)	Bottom Surface	0	38	5190	15.00	14.68	1.05	107.65%	0.425	0.480	-
WLAN 802.11n(40M) 5.2G	Main (S0)	Bottom Surface	0	46	5230	18.50	18.23	1.05	106.41%	0.900	1.006	009
Repeat	Main (S0)	Bottom Surface	0	46	5230	18.50	18.23	1.05	106.41%	0.885	0.989	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11n(40M) 5.3G	Main (S0)	Bottom Surface	0	54	5270	18.50	18.47	1.05	100.69%	0.831	0.879	010
WLAN 802.11n(40M) 5.3G	Main (S0)	Bottom Surface	0	62	5310	15.00	14.71	1.05	106.91%	0.400	0.449	-
Repeat	Main (S0)	Bottom Surface	0	54	5270	18.50	18.47	1.05	100.69%	0.816	0.863	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11n(40M) 5.6G	Main (S0)	Bottom Surface	0	142	5710	18.50	18.47	1.05	100.69%	0.722	0.763	011
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11a 5.8G	Main (S0)	Bottom Surface	0	149	5745	19.50	19.48	1.02	100.46%	0.741	0.761	012
		·										
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	ID
WLAN 802.11ac(80M) 5.9G	Main (S0)	Bottom Surface	0	171	5855	17.00	16.97	1.10	100.69%	0.400	0.441	013

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 138

WIFL 6F

VIET OE														
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Souring	oddinig	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	15	6025	14.50	14.09	1.15	109.90%	0.151	0.192	1.160	1.471	014
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	47	6185	14.50	14.11	1.15	109.40%	0.174	0.220	1.340	1.692	015
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	79	6345	14.50	14.18	1.15	107.65%	0.132	0.164	0.948	1.178	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			(11111)		(IVII-12)	Tolerance (dBm)	(dBm)	scamy	Scaling	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-6 6.5GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	111	6505	15.00	14.74	1.15	106.17%	0.133	0.163	0.990	1.213	016
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Journal	Journa	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-7 6.7GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	175	6825	15.00	14.77	1.15	105.44%	0.159	0.193	1.140	1.387	017
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Souring	oodiiiig	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-8 7.0GHz802.11ax(80M)	Aux (S1)	Bottom Surface	0	199	6945	13.00	12.69	1.00	107.40%	0.084	0.090	0.596	0.640	018
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		()	Tolerance (dBm)	(dBm)			Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	15	6025	14.50	14.23	1.15	106.41%	0.289	0.355	2.340	2.874	019
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	47	6185	14.50	14.29	1.15	104.95%	0.221	0.268	1.630	1.974	-
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	79	6345	14.50	14.26	1.15	105.68%	0.276	0.337	2.010	2.451	020
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			(11111)		(IVII IZ)	Tolerance (dBm)	(dBm)	Scanny	Scanny	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-6 6.5GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	111	6505	15.00	14.72	1.15	106.66%	0.238	0.293	1.720	2.117	021
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		()	Tolerance (dBm)	(dBm)			Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-7 6.7GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	143	6665	15.00	14.78	1.15	105.20%	0.190	0.231	1.360	1.651	022
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
						Tolerance (dBm)	(dBm)			Measured	Reported	. ,	W/m^2 (4cm^2)	
U-NII-8 7.0GHz802.11ax(80M)	Main (S0)	Bottom Surface	0	183	6865	13.00	12.60	1.00	109.65%	0.086	0.094	0.618	0.678	023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 51 of 138

Vendor 2

VCHGOI Z												
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR		ID
WLAN 802.11b	Aux (S1)	Bottom Surface	0	1	2412	Tolerance (dBm) 20.50	(dBm) 20.38	1.00	102.80%	Measured 0.261	Reported 0.269	024
WLAN 802.11b WLAN 802.11b	Aux (S1)	Bottom Surface	0	6	2412	20.50	20.38	1.00	102.80%	0.261	0.269	- 024
WLAN 802.11b	Aux (S1)	Bottom Surface	0	11	2462	19.50	19.45	1.00	101.16%	0.244	0.248	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR		ID
Bluetooth(GFSK)	Aux (S1)	Bottom Surface	0	39	2441	6.00	5.48	1.00	112.72%	0.011	0.012	025
Bidetostif(GFOR)	Aux (O1)	Dottom Gunace		03	2771	Max. Rated Avg.	Measured	1.00	112.7270			020
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.2G	Aux (S1)	Bottom Surface	0	46	5230	18.50	18.48	1.05	100.46%	0.458	0.483	026
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	ID
WLAN 802.11n(40M) 5.3G	Aux (S1)	Bottom Surface	0	54	5270	18.50	18.37	1.05	103.04%	0.454	0.491	027
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg) Reported	ID
WLAN 802.11n(40M) 5.6G	Aux (S1)	Bottom Surface	0	118	5590	18.50	18.33	1.05	103.99%	0.701	0.765	-
WLAN 802.11n(40M) 5.6G	Aux (S1)	Bottom Surface	0	142	5710	18.50	18.48	1.05	100.46%	0.730	0.770	028
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR of Measured	over 1g (W/kg) Reported	ID
WLAN 802.11a 5.8G	Aux (S1)	Bottom Surface	0	165	5825	19.50	19.47	1.02	100.69%	0.710	0.731	029
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR of Measured	over 1g (W/kg) Reported	ID
WLAN 802.11ac(80M) 5.9G	Aux (S1)	Bottom Surface	0	171	5855	17.00	16.92	1.10	101.86%	0.403	0.449	030
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg) Reported	ID
WLAN 802.11b	Main (S0)	Bottom Surface	0	1	2412	20.50	20.37	1.00	103.04%	0.283	0.292	-
WLAN 802.11b	Main (S0)	Bottom Surface	0	6	2437	20.50	20.41	1.00	102.09%	0.337	0.345	031
WLAN 802.11b	Main (S0)	Bottom Surface	0	11	2462	19.50	19.26	1.00	105.68%	0.311	0.330	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged Si (W/I	kg) Reported	ID
WLAN 802.11n(40M) 5.2G	Main (S0)	Bottom Surface	0	38	5190	15.00	14.68	1.05	107.65%	0.413	0.467	-
WLAN 802.11n(40M) 5.2G	Main (S0)	Bottom Surface	0	46	5230	18.50	18.23	1.05	106.41%	0.887	0.991	032
Repeat	Main (S0) Antenna	Bottom Surface	0 Distance	46 Channel	5230 Freq.	18.50 Max. Rated Avg. Power + Max.	18.23 Measured Avg. Power	1.05 Duty cycle	106.41% Power	0.848 Averaged SAR	0.948 over 1g (W/kg)	- ID
Wode	Antonna	1 OSILIOI1	(mm)	Onamici	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	10
WLAN 802.11n(40M) 5.3G	Main (S0)	Bottom Surface	0	54	5270	18.50	18.47	1.05	100.69%	0.816	0.863	033
WLAN 802.11n(40M) 5.3G	Main (S0)	Bottom Surface	0	62	5310	15.00	14.71	1.05	106.91%	0.376	0.422	-
Repeat	Main (S0)	Bottom Surface	0	54	5270	18.50	18.47	1.05	100.69%	0.801	0.847	-
	(==)	Dottom ounacc	Ü	34	3210	10.30	10.47					
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR		ID
Mode WLAN 802.11n(40M) 5.6G			Distance		Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle		Averaged SAR of Measured 0.636	Reported 0.672	ID 034
	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	scaling	Measured	Reported 0.672	
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0)	Position Bottom Surface Position Bottom Surface	Distance (mm) 0 Distance (mm) 0	Channel 142 Channel 149	Freq. (MHz) 5710 Freq. (MHz) 5745	Max. Rated Avg. Power + Max. Tolerance (dBm) 18.50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19.50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm) 19.48	Duty cycle scaling 1.05 Duty cycle scaling 1.02	scaling 100.69% Power scaling 100.46%	Measured 0.636 Averaged SAR of Measured 0.867	Reported 0.672 over 1g (W/kg) Reported 0.890	034
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0) Main (S0)	Position Bottom Surface Position	Distance (mm) 0 Distance (mm) 0 0	Channel 142 Channel 149 157	Freq. (MHz) 5710 Freq. (MHz) 5745 5785	Max. Rated Avg. Power + Max. Tolerance (dBm) 18.50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19.50 19.50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm)	Duty cycle scaling 1.05 Duty cycle scaling 1.02 1.02	scaling 100.69% Power scaling 100.46% 100.93%	Measured 0.636 Averaged SAR (Measured 0.867 0.811	Reported 0.672 over 1g (W/kg) Reported 0.890 0.837	034 ID
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G WLAN 802.11a 5.8G WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0) Main (S0) Main (S0)	Position Bottom Surface Position Bottom Surface Bottom Surface Bottom Surface	Distance (mm) 0 Distance (mm) 0 0 0 0	Channel 142 Channel 149 157 165	Freq. (MHz) 5710 Freq. (MHz) 5745 5785 5825	Max. Rated Avg. Power + Max. Tolerance (dBm) 18.50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19.50 19.50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm) 19.48 19.46	Duty cycle scaling 1.05 Duty cycle scaling 1.02 1.02 1.02	scaling 100.69% Power scaling 100.46% 100.93% 102.57%	Measured 0.636 Averaged SAR (Measured 0.867 0.811 0.832	Reported 0.672 over 1g (W/kg) Reported 0.890 0.837 0.872	034 ID 035
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0) Main (S0)	Position Bottom Surface Position Bottom Surface Bottom Surface	Distance (mm) 0 Distance (mm) 0 0	Channel 142 Channel 149 157	Freq. (MHz) 5710 Freq. (MHz) 5745 5785	Max. Rated Avg. Power + Max. Tolerance (dBm) 18.50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19.50 19.50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm) 19.48	Duty cycle scaling 1.05 Duty cycle scaling 1.02 1.02	scaling 100.69% Power scaling 100.46% 100.93%	Measured 0.636 Averaged SAR (Measured 0.867 0.811	Reported 0.672 over 1g (W/kg) Reported 0.890 0.837	034 ID 035
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G WLAN 802.11a 5.8G WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0) Main (S0) Main (S0)	Position Bottom Surface Position Bottom Surface Bottom Surface Bottom Surface	Distance (mm) 0 Distance (mm) 0 0 0 0	Channel 142 Channel 149 157 165	Freq. (MHz) 5710 Freq. (MHz) 5745 5785 5825	Max. Rated Avg. Power + Max. Tolerance (dBm) 18:50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19:50 19:50 19:50 19:50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm) 19.48 19.46	Duty cycle scaling 1.05 Duty cycle scaling 1.02 1.02 1.02	scaling 100.69% Power scaling 100.46% 100.93% 102.57%	Measured 0.636 Averaged SAR (Measured 0.867 0.811 0.832	Reported 0.672 over 1g (W/kg) Reported 0.890 0.837 0.872	034 ID 035 -
WLAN 802.11n(40M) 5.6G Mode WLAN 802.11a 5.8G WLAN 802.11a 5.8G WLAN 802.11a 5.8G	Antenna Main (S0) Antenna Main (S0) Main (S0) Main (S0)	Position Bottom Surface Position Bottom Surface Bottom Surface Bottom Surface	Distance (mm) 0 Distance (mm) 0 0 0 0	Channel 142 Channel 149 157 165	Freq. (MHz) 5710 Freq. (MHz) 5745 5785 5825	Max. Rated Avg. Power + Max. Tolerance (dBm) 18.50 Max. Rated Avg. Power + Max. Tolerance (dBm) 19.50 19.50	Measured Avg. Power (dBm) 18.47 Measured Avg. Power (dBm) 19.48 19.46	Duty cycle scaling 1.05 Duty cycle scaling 1.02 1.02 1.02	scaling 100.69% Power scaling 100.46% 100.93% 102.57%	Measured 0.636 Averaged SAR (Measured 0.867 0.811 0.832	Reported 0.672 over 1g (W/kg) Reported 0.890 0.837 0.872 0.883	034 ID 035 -

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 52 of 138

WIFI 6E

Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	Estimated Measured APD W/m^2 (4cm^2)	Estimated Reported APD W/m^2 (4cm^2)	ID
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	15	6025	14.50	14.09	1.15	109.90%	0.142	0.180	1.010	1.281	037
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	47	6185	14.50	14.11	1.15	109.40%	0.148	0.187	1.010	1.275	038
U-NII-5 6.2GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	79	6345	14.50	14.18	1.15	107.65%	0.098	0.122	0.627	0.779	-
Mode Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD W/m^2 (4cm^2)	ID
						, ,	` ′			Measured	Reported	. ,	, ,	
U-NII-6 6.5GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	111	6505	15.00	14.74	1.15	106.17%	0.131	0.161	0.825	1.011	039
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR Measured	over 1g (W/kg)	Estimated Measured APD W/m^2 (4cm^2)	Estimated Reported APD W/m^2 (4cm^2)	ID
U-NII-7 6.7GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	143	6665	15.00	14.74	1.15	106.17%	0.114	0.140	0.747	0.915	
U-NII-7 6.7GHz802.11ax(160M)	Aux (S1)	Bottom Surface	0	175	6825	15.00	14.77	1.15	105.44%	0.157	0.191	0.969	1.179	040
Mode Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling		over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Journal	Joanny	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-8 7.0GHz802.11ax(80M)	Aux (S1)	Bottom Surface	0	199	6945	13.00	12.69	1.00	107.40%	0.067	0.072	0.455	0.489	041
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling		over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD W/m^2 (4cm^2)	ID
						, ,	. ,			Measured	Reported	. ,	, ,	
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	15	6025	14.50	14.23	1.15	106.41%	0.157	0.193	1.140	1.400	042
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	47	6185	14.50	14.29	1.15	104.95%	0.145	0.176	1.040	1.260	043
U-NII-5 6.2GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	79	6345	14.50	14.26	1.15	105.68%	0.107	0.130	0.721	0.879	-
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			()		(111112)	Tolerance (dBm)	(dBm)	Journal	Joanny	Measured	Reported	W/m^2 (4cm^2)	W/m^2 (4cm^2)	
U-NII-6 6.5GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	111	6505	15.00	14.72	1.15	106.66%	0.096	0.118	0.668	0.822	044
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR	over 1g (W/kg)	Estimated Measured APD	Estimated Reported APD	ID
			` ′		` ′	Tolerance (dBm)	(dBm)		, and the second	Measured	Reported		W/m^2 (4cm^2)	
U-NII-7 6.7GHz802.11ax(160M)	Main (S0)	Bottom Surface	0	143	6665	15.00	14.78	1.15	105.20%	0.078	0.095	0.547	0.664	045
Mode	Antenna	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling		over 1g (W/kg)	Estimated Measured APD W/m^2 (4cm^2)	Estimated Reported APD W/m^2 (4cm^2)	ID
U NIII O 7 OOU OOO 44 (OOLD	14 : (00)	2 " 2 "		400	2005	, ,	1 /	4.00	400.050/	Measured	Reported	. ,	, ,	046
U-NII-8 7.0GHz802.11ax(80M)	Main (S0)	Bottom Surface	0	183	6865	13.00	12.60	1.00	109.65%	0.086	0.094	0.543	0.595	U46

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling Reported APD = measured APD * Power scaling * Duty cycle scaling

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 53 of 138

8.3 **Summary of PD Results**

Vendor 1

		Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD res	ult(4cm)		
Mode	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Bottom Surface	2	15	6025	14.50	14.09	109.90%	1.15	1.55	2.140	4.207	1.860	3.656	047
U-NII-5	Bottom Surface	2	47	6185	14.50	14.11	109.40%	1.15	1.55	2.150	4.207	1.980	3.874	048
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	15.00	14.74	106.17%	1.15	1.55	2.400	4.558	2.050	3.893	049
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	175	6825	15.00	14.77	105.44%	1.15	1.55	2.260	4.262	1.980	3.734	050
WLAN 6E 802.11ax(80M) U-NII-8	Bottom Surface	2	199	6945	13.00	12.69	107.40%	1.15	1.55	1.310	2.517	1.200	2.305	051
		Distance		Eron	Max. Rated Avg.	Measured	Tungun	Duty avala	Magaurament		PD res	ult(4cm)		
Mode	Position	Distance (mm)	Channel	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Tune-up Scaling	Duty cycle scaling	Measurement uncertainty	Measured Total psPD (W/m^2)	PD res Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
Mode WLAN 6E 802.11ax(160M)	Position Bottom Surface		Channel		Power + Max.	Avg. Power				Total psPD	Reported Total psPD	Measured Normal psPD	Normal psPD	ID 052
		(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Normal psPD (W/m^2)	
WLAN 6E 802.11ax(160M)	Bottom Surface	(mm) 2	15	(MHz) 6025	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling 106.41%	scaling 1.15	uncertainty 1.55	Total psPD (W/m^2) 4.630	Reported Total psPD (W/m^2) 8.813	Measured Normal psPD (W/m^2) 3.720	Normal psPD (W/m^2) 7.081	052
WLAN 6E 802.11ax(160M) U-NIL-5 WLAN 6E 802.11ax(160M)	Bottom Surface Bottom Surface	(mm) 2 2	15 47	(MHz) 6025 6185	Power + Max. Tolerance (dBm) 14.50	Avg. Power (dBm) 14.23	Scaling 106.41% 104.95%	1.15 1.15	1.55 1.55	Total psPD (W/m^2) 4.630 3.450	Reported Total psPD (W/m^2) 8.813 6.477	Measured Normal psPD (W/m^2) 3.720 2.880	Normal psPD (W/m^2) 7.081 5.407	052 053

Vendor 2

		Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Dutu mula	Measurement		PD resi	ult(4cm)		
Mode	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Duty cycle scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Bottom Surface	2	15	6025	14.50	14.09	109.90%	1.15	1.55	2.160	4.246	2.030	3.991	057
U-NII-5	Bottom Surface	2	47	6185	14.50	14.11	109.40%	1.15	1.55	2.780	5.440	2.440	4.774	058
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	15.00	14.74	106.17%	1.15	1.55	2.110	4.007	1.850	3.513	059
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	175	6825	15.00	14.77	105.44%	1.15	1.55	3.020	5.696	2.540	4.790	060
WLAN 6E 802.11ax(80M) U-NII-8	Bottom Surface	2	199	6945	13.00	12.69	107.40%	1.15	1.55	1.210	2.324	1.120	2.152	061
		Distance		Freq.	Max. Rated Avg.	Measured	Tune-up	Duty cycle	Measurement		PD resi	ult(4cm)		
Mode	Position	(mm)	Channel	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	scaling	uncertainty	Measured Total psPD (W/m^2)	Reported Total psPD (W/m^2)	Measured Normal psPD (W/m^2)	Reported Normal psPD (W/m^2)	ID
WLAN 6E 802.11ax(160M)	Bottom Surface	2	15	6025	14.50	14.23	106.41%	1.15	1.55	3.060	5.825	1.650	3.141	062
U-NII-5	Bottom Surface	2	47	6185	14.50	14.29	104.95%	1.15	1.55	2.730	5.125	2.060	3.867	063
WLAN 6E 802.11ax(160M) U-NII-6	Bottom Surface	2	111	6505	15.00	14.72	106.66%	1.15	1.55	3.350	6.391	3.120	5.952	064
WLAN 6E 802.11ax(160M) U-NII-7	Bottom Surface	2	143	6665	15.00	14.78	105.20%	1.15	1.55	1.920	3.613	1.420	2.672	065
WLAN 6E 802.11ax(80M) U-NII-8	Bottom Surface	2	183	6865	13.00	12.60	109.65%	1.15	1.55	1.840	3.609	1.660	3.256	066

Note:

Reported PD = measured PD * Power scaling * Duty cycle scaling * Uncertainty scaling

Reporting statements of conformity 8.4

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Conclusion 8.5

The device is compliant because all the standalone results are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 54 of 138

SIMULTANEOUS TRANSMISSION ANALYSIS

9.1 **Simultaneous Transmission Scenarios:**

Simultaneous Transmit Configurations	Body
WLAN 2.4GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 5GHz Aux + BT Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 6GHz Aux + BT Aux	Yes
WLAN 2.4GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 2.4GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 2.4GHz Aux	Yes
WLAN 5GHz Main + WLAN 6GHz Aux	Yes
WLAN 6GHz Main + WLAN 5GHz Aux	Yes
WLAN 5GHz Main + WLAN 6GHz Aux + BT Aux	Yes
WLAN 6GHz Main + WLAN 5GHz Aux + BT Aux	Yes

Note:

- 1. Bluetooth and WLAN Aux share the same antenna path, and BT can transmit with WLAN Main simultaneously.
- 2. For 2.4/5GHz WLAN Main and Aux antennas, the maximum output power of each antenna during simultaneous transmission is the same with or less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 55 of 138

9.2 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{\text{f(GHz)}}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

9.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 56 of 138

Simultaneous Transmission Combination


Vendor 1

					FCC Reported SAR				Scenario1	Scenario2	Scenario3	Scenario4	Scenario5	Scenario6	Scenario7	Scenario8	Scenario9	Scenario10	Scenario11	Scenario12	Scenario13
		2	3	4	5	6	8	9	2+3	2+5	3+4	3+8	2+9	4+5	4+5+6	5+8	5+6+8	8+9	6+8+9	4+9	4+6+9
Exposure Pos	sition	2.4GHz WLAN Aux (S1)	2.4GHz WLAN Main (S0)	5GHz WLAN Aux (S1)	5GHz WLAN Main (S0)	Bluetooth Aux (S1)	6GHz WLAN Aux (S1)	6GHz WLAN Main (S0)	Summed	Summed											
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg											
Bottom Surface	0	0.263	0.302	0.541	1.006	0.016	0.220	0.355	0.565	1.269	0.843	0.522	0.618	1.547	1.563	1.226	1.242	0.575	0.591	0.896	0.912

Vendor 2

		FCC Reported SAR					Scenario1	Scenario2	Scenario3	Scenario4	Scenario5	Scenario6	Scenario7	Scenario8	Scenario9	Scenario10	Scenario11	Scenario12	Scenario13	
	2	3	4	5	6	8	9	2+3	3+4	2+5	3+8	2+9	4+5	4+5+6	4+9	5+8	8+9	6+8+9	5+6+8	4+6+9
	2.4GHz WLAN	2.4GHz WLAN	5GHz WLAN Aux	5GHz WLAN Main	Bluetooth Aux	6GHz WLAN Aux	6GHz WLAN Main	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed	Summed
Exposure Position	Aux (S1)	Main (S0)	(S1)	(S0)	(S1)	(S1)	(S0)	Guillinea	Guilling	Cullina	Guillinea	Guinned	Guilling	Guilling	Guillinea	Cullina	Guilling	Cullina	Guillinea	Culling
	1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	1g SAR	In SAR (W/kn)	In SAR (W/kn)	1n SAR (W/kn)	1n SAR (W/kn)	1n SAR (W/kn)	1g SAR (W/kg)	1n SAR (W/kn)	1n SAR (W/kn)	1n SAR (W/kn)	In SAR (W/kn)	1n SAR (W/kn)	1n SAR (W/kn)	1n SAR (W/kn)
	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	19 4141 (11119)	19 41 41 (411119)	19 = 11 (11119)	19 =111 (11119)	18 4141 (41118)	19 == 11 (11119)	19 ==== (+===9)	-9 act (comg)	18 == 11 (111118)	19 =111 (11119)	·9 = · · · (· · · · · g)	19 414 (41119)	-9 == - ()
Bottom Surface 0	0.269	0.345	0.770	0.991	0.012	0.191	0.193	0.614	1.115	1.260	0.536	0.462	1.761	1.773	0.963	1.182	0.384	0.396	1.194	0.975

				Sc	enario 5				
Position	Conditions	SAR Value	Co	oordinates (c	:m)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
1 conton	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	OF EGIN	Test
	WLAN 5G Main	0.770	0.00	72.40	-0.17	-	-	-	-
Bottom	WLAN 5G Aux	0.991	-2.00	12.00	-0.42	1.761	60.43	0.039	SPLSR ≤ 0.04, Not required
Surface	BT Aux	0.012	4.80	13.50	0.46	0.782	59.10	0.012	SPLSR ≤ 0.04, Not required
	WLAN5G + BT Aux	1.003	4.80	13.50	0.46	1.773	59.10	0.040	SPLSR ≤ 0.04, Not required

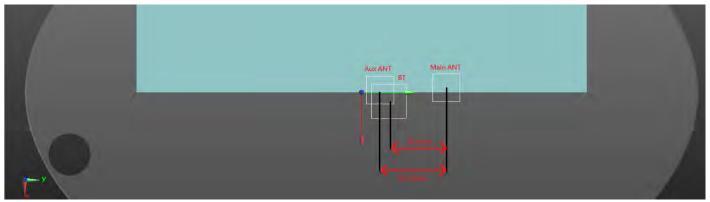

9.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 57 of 138

10 INSTRUMENTS LIST

		Equi	pment List	_	
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Data acquisition Electronics	DAE4	1665	Feb/28/2022	Feb/27/2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7642	Mar/02/2022	Mar/01/2023
SPEAG	E-field Probe for Near Field Application	EUmmWV4	9579	Sep/23/2022	Sep/22/2023
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023
SPEAG	System Validation Dipole	D6.5GHzV2	1006	Aug/23/2022	Aug/22/2023
SPEAG	System Validation Dipole	D7GHzV2	1007	Aug/24/2022	Aug/23/2023
SPEAG	5G Verification Source 10GHz	5G-Veri10	1021	Jan/24/2022	Jan/23/2023
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023
R&S	MXG Analog Signal Generator	SMB100A03	182012	Jun/13/2022	Jun/12/2023
Agilent	Dual-directional coupler	772D	MY52180142	Oct/19/2022	Oct/18/2023
Agilent	Dual-directional coupler	778D	MY52180302	Oct/19/2022	Oct/18/2023
EMCI	Amplifier	ZHL-42	980189	Calibration not required	Calibration not required
EMCI	Amplifier	ZVE-8G	980190	Calibration not required	Calibration not required
R&S	Power Sensor	NRP18S	101973	Jan/22/2022	Jan/21/2023
R&S	Power Meter	NRX	102191	Jan/22/2022	Jan/21/2023
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023
SPEAG	Software	DASY 6 V16.0.2.136	N/A	Calibration not required	Calibration not required
SPEAG	Software	DASY 52 V52.10.4.152 7	N/A	Calibration not required	Calibration not required
SPEAG	Software	DASY 6 mmWave V2.4.2.62	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	mmWave Phantom	N/A	Calibration not required	Calibration not required
LKM	Digital thermometer	DTM3000	EC14010603	Sep/27/2022	Sep/26/2023
TECPEL	Digital thermometer	DTM-303A	TP130077	Sep/29/2022	Sep/28/2023

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the research and the seasons british in this test report test of unity to the samples he seed and united states the seasons of the seasons british in this test report test of unity to the samples he seasons british the seasons british seasons between the seasons british seasons between the seasons british seasons brites british seasons british seasons british seasons british seaso Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 58 of 138

11 UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

А	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	80
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	80
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	2.54%	N	1	1	0.64	0.43	1.63%	1.09%	М
Liquid Conductivity (mea.)	3.86%	N	1	1	0.6	0.49	2.32%	1.89%	М
Combined standard uncertainty		RSS					12.05%	11.91%	
Expant uncertainty (95% confidence interval), K=2							24.11%	23.82%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

_I No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 59 of 138

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	8
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	8
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.28%	N	1	1	0.64	0.43	0.82%	0.55%	М
Liquid Conductivity (mea.)	1.02%	N	1	1	0.6	0.49	0.61%	0.50%	М
Combined standard uncertainty		RSS					11.46%	11.43%	
Expant uncertainty (95% confidence interval), K=2							22.93%	22.86%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 60 of 138

DASY6 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 6GHz - 10GHz range)

	(1.100	1401109	Dalla.			<u> </u>	1190)	
а	b	С	d		е	е	f=b * e / d	f=b * e / d
Source of Uncertainty	Uncertainty Value (±%)	Probability Distributioin	Div.	Div. Value	(ci) 1g	(ci) 10g	Std. uncertainty (1g) (±%)	Std. uncertainty (10g) (±%)
Measurement system errors	•							
Probe calibration	18.6	N	2	2	1	1	9.3	9.3
Probe Calibration Drift	1.7	R	√3	1.732	1	1	1.0	1.0
Probe Linearity	4.7	R	√3	1.732	1	1	2.7	2.7
Broadband Signal	2.8	R	√3	1.732	1	1	1.6	1.6
Probe Isotropy	7.6	R	√3	1.732	1	1	4.4	4.4
Data Acquisition	0.3	N	1	1	1	1	0.3	0.3
RF Ambient	1.8	N	1	1	1	1	1.8	1.8
Probe positioning	0.2	N	1	1	0.67	0.67	0.1	0.1
Data Processing	3.5	N	1	1	1	1	3.5	3.5
Phantom and device errors	•		•	•				
Conductivity (meas.)DAK	2.5	N	1	1	0.78	0.71	2.0	1.8
Conductivity (temp.)BB	2.4	R	√3	1.732	0.78	0.71	1.1	1.0
Phantom Permittivity	14.0	R	√3	1.732	0.5	0.5	4.0	4.0
Distance DUT - TSL	2.0	N	1	1	2	2	4.0	4.0
Device Positioning (±0.5mm)	1.0	N	1	1	1	1	1.0	1.0
Device Holder	3.6	N	1	1	1	1	3.6	3.6
DUT Modulationm	2.4	R	√3	1.732	1	1	1.4	1.4
Time-average SAR	0.0	R	√3	1.732	1	1	0.0	0.0
DUT drift	2.5	N	1	1	1	1	2.5	2.5
Val Antenna Unc.	0.0	N	1	1	1	1	0.0	0.0
Unc. Input Power	0.0	N	1	1	1	1	0.0	0.0
Correction to the SAR results								
Deviation to Target	1.90	N	1	1	1	0.84	1.9	1.6
SAR scaling		R	√3	1.732	1	1	0.0	0.0
Combined Std. uncertainty							14.0	13.9
Expanded Std. uncertainty (95% confidence interval), K=2							28.0	27.8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 61 of 138

cDASY6 Module mmWave Uncertainty Budget for PD Evaluation Distances to the Antennas $\geq \lambda / 5$ In Compliance with IEC/IEEE 63195

	Compii	ance v	vitii i	EC/IE		3133	
a	b	С	d		е	f=b * e / d	g
Source of Uncertainty	Uncertainty Value (+-dB)	Probability Distributioin	Div.	Div. Value	ci	Std. uncertainty (+-dB)	(vi) Veff
Uncertainty terms dependent on the	e measurement	system					
Probe calibration	0.49	N	1	1	1	0.49	00
Probe correction	0.00	R	√3	1.732	1	0.00	00
Frequency response (BW ≦1GHz)	0.20	R	√3	1.732	1	0.12	∞
Sensor cross coupling	0.00	R	√3	1.732	1	0.00	œ
Isotropy	0.50	R	√3	1.732	1	0.29	œ
Linearity	0.20	R	√3	1.732	1	0.12	œ
Probe scattering	0.00	R	√3	1.732	1	0.00	œ
Probe positioning offset	0.30	R	√3	1.732	1	0.17	œ
Probe positioning repeatability	0.04	R	√3	1.732	1	0.02	œ
Sensor mechanical offset	0.00	R	√3	1.732	1	0.00	∞
Probe spatial resolution	0.00	R	√3	1.732	1	0.00	00
Field impedance dependance	0.00	R	√3	1.732	1	0.00	00
Amplitude and phase drift	0.00	R	√3	1.732	1	0.00	∞
Amplitude and phase noise	0.04	R	√3	1.732	1	0.02	∞
Measurement area truncation	0.00	R	√3	1.732	1	0.00	∞
Data acquisition	0.03	N	1	1	1	0.03	œ
Sampling	0.00	R	√3	1	1	0.00	œ
Field reconstruction	2.00	R	√3	1.732	1	1.15	00
Forward transformation	0.00	R	√3	1.732	1	0.00	œ
Power density scaling	-	R	√3	1.732	1	-	œ
Spatial averaging	0.10	R	√3	1.732	1	0.06	œ
System detection limit	0.04	R	√3	1.732	1	0.02	00
Uncertainty terms dependent on the	e DUT and envir	onmental facto	ors	1			1
Probe coupling with DUT	0.00	R	√3	1.732	1	0.00	00
Modulation response	0.40	R	√3	1.732	1	0.23	∞
Integration time	0.00	R	√3	1.732	1	0.00	∞
Response time	0.00	R	√3	1.732	1	0.00	œ
Device holder influence	0.10	R	√3	1.732	1	0.06	œ
DUT alignment	0.00	R	√3	1.732	1	0.00	œ
RF ambient conditions	0.04	R	√3	1.732	1	0.02	œ
Ambient reflections	0.04	R	√3	1.732	1	0.02	œ
Immunity / secondary reception	0.00	R	√3	1.732	1	0.00	œ
Drift of the DUT	-	R	√3	1.732	1	-	œ
Combined Std. uncertainty						1.33	
Expanded Std. uncertainty (95% confidence interval), K=2						2.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

United States the results shown in this test report test only to the samples) result and such samples) are tested at the state of the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 62 of 138

12 SAR MEASUREMENT RESULTS

Date: 2022/12/24

ID: 001

Report No.: TESA2212000629ES

WLAN 802.11b_Body Bottom Surface CH 1 0mm Aux

Communication System: WLAN; Frequency: 2412 MHz; Duty cycle= 1:1.003

Medium parameters used: f = 2412 MHz; $\sigma = 1.781 \text{ S/m}$; $\epsilon_r = 38.769$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.316 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.24 V/m: Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.348 W/kg

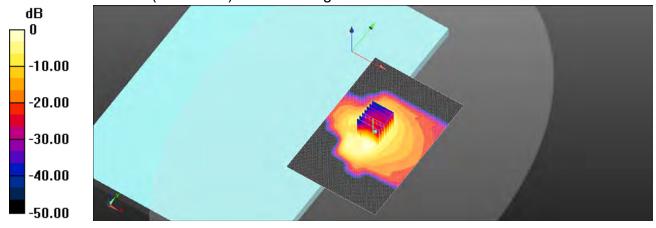

0 dB = 0.348 W/kg = -4.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 63 of 138

Date: 2022/12/24

ID: 002

Report No.: TESA2212000629ES

Bluetooth(GFSK)_Body_Bottom Surface_CH 39_0mm_Aux

Communication System: Bluetooth; Frequency: 2441 MHz; Duty cycle= 1:1

Medium parameters used: f = 2441 MHz; $\sigma = 1.806$ S/m; $\varepsilon_r = 38.716$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0197 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.138 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00535 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.0191 W/kg

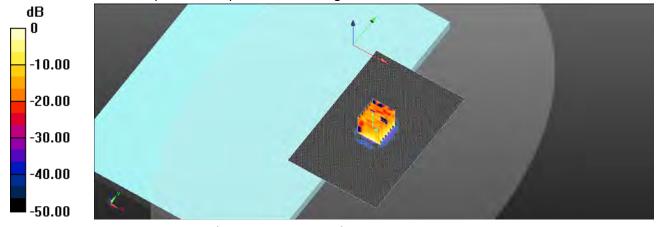

0 dB = 0.0191 W/kg = -17.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 64 of 138

Date: 2022/12/25

ID: 003

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 46_0mm_Aux

Communication System: WLAN; Frequency: 5230 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5230 MHz; $\sigma = 4.825 \text{ S/m}$; $\epsilon_r = 36.821$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.032 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.637 W/kg

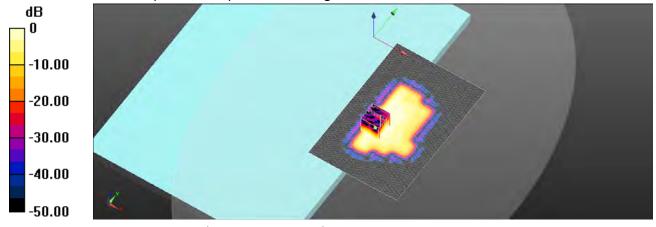

0 dB = 0.637 W/kg = -1.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 65 of 138

Date: 2022/12/25

ID: 004

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Aux

Communication System: WLAN; Frequency: 5270 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5270 MHz; $\sigma = 4.87 \text{ S/m}$; $\epsilon_r = 36.738$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.754 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.294 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.773 W/kg

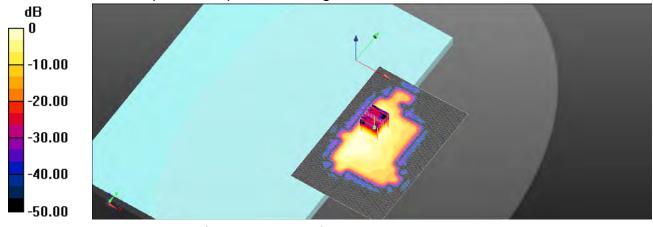

0 dB = 0.773 W/kg = -1.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents as divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

505 laiwan Eta.

」No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 66 of 138

Date: 2022/12/26

ID: 005

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.6G_Body_Bottom Surface_CH 142_0mm_Aux Communication System: WLAN; Frequency: 5710 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5710 MHz; σ = 5.326 S/m; ε_r = 36.263; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.834 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.119 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.646 W/kg

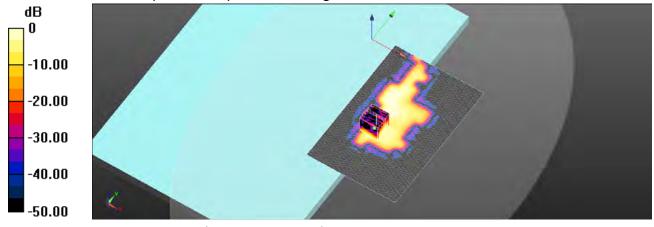

0 dB = 0.646 W/kg = -1.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 67 of 138

Date: 2022/12/27

ID: 006

Report No.: TESA2212000629ES

WLAN 802.11a 5.8G_Body_Bottom Surface_CH 165_0mm_Aux

Communication System: WLAN; Frequency: 5825 MHz; Duty cycle= 1:1.022

Medium parameters used: f = 5825 MHz; σ = 5.475 S/m; $ε_r$ = 36.172; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.800 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 1.02 W/kg

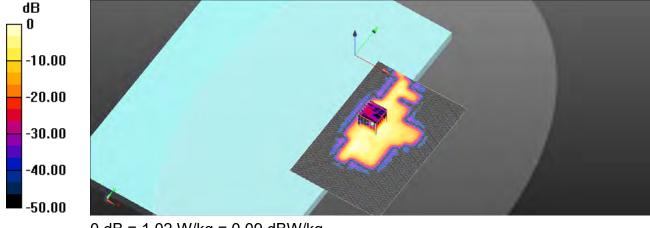

0 dB = 1.02 W/kg = 0.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.

」No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 68 of 138

Date: 2022/12/27

ID: 007

Report No.: TESA2212000629ES

WLAN 802.11ac(80M) 5.9G_Body_Bottom Surface_CH 171_0mm_Aux

Communication System: WLAN; Frequency: 5855 MHz; Duty cycle= 1:1.095

Medium parameters used: f = 5855 MHz; σ = 5.522 S/m; ε_r = 36.101; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.747 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.747 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 0.623 W/kg

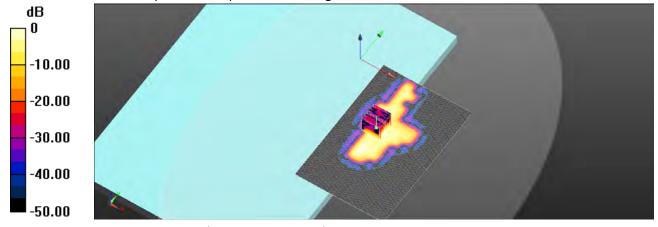

0 dB = 0.623 W/kg = -2.06 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 69 of 138

Date: 2022/12/24

ID: 008

Report No.: TESA2212000629ES

WLAN 802.11b_Body_Bottom Surface_CH 6_0mm_Main

Communication System: WLAN; Frequency: 2437 MHz; Duty cycle= 1:1.003

Medium parameters used: f = 2437 MHz; $\sigma = 1.795 \text{ S/m}$; $\epsilon_r = 38.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.424 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.159 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.413 W/kg

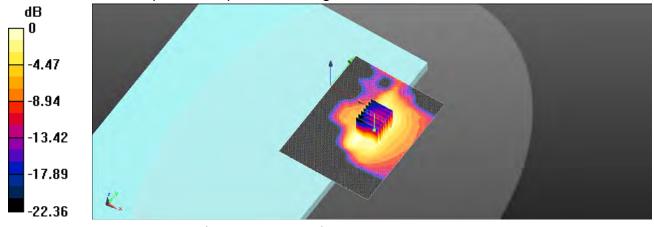

0 dB = 0.413 W/kg = -3.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 70 of 138

Date: 2022/12/25

ID: 009

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 46_0mm_Main Communication System: WLAN; Frequency: 5230 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5230 MHz; $\sigma = 4.825 \text{ S/m}$; $\epsilon_r = 36.821$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.972 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 1.68 W/kg

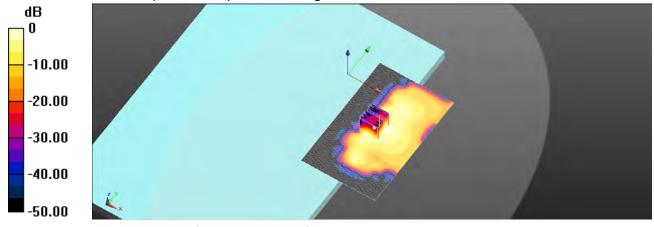

0 dB = 1.68 W/kg = 2.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 71 of 138

Date: 2022/12/25

ID: 010

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Main

Communication System: WLAN; Frequency: 5270 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5270 MHz; $\sigma = 4.87 \text{ S/m}$; $\epsilon_r = 36.738$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.59 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.756 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 1.54 W/kg

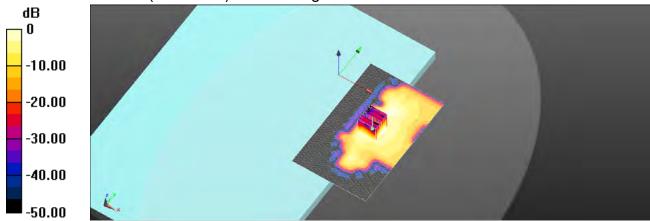

0 dB = 1.54 W/kg = 1.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 72 of 138

Date: 2022/12/26

ID: 011

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.6G_Body_Bottom Surface_CH 142_0mm_Main Communication System: WLAN; Frequency: 5710 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5710 MHz; σ = 5.326 S/m; ε_r = 36.263; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

• Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.311 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 1.34 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.311 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 q) = 0.722 W/kq; SAR(10 q) = 0.201 W/kq

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.41 W/kg

Zoom Scan (7x7x12)/Cube 2: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.311 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.20 W/kg


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 73 of 138

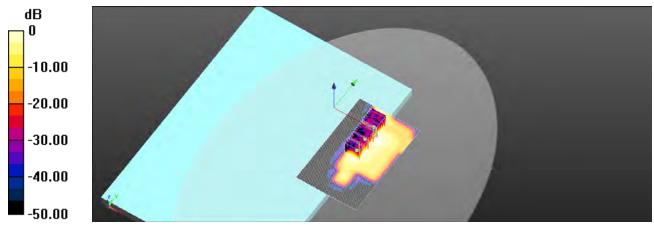

0 dB = 1.41 W/kg = 0.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 74 of 138

Date: 2022/12/27

ID: 012

Report No.: TESA2212000629ES

WLAN 802.11a 5.8G_Body_Bottom Surface_CH 149_0mm_Main

Communication System: WLAN; Frequency: 5745 MHz; Duty cycle= 1:1.022

Medium parameters used: f = 5745 MHz; $\sigma = 5.356 \text{ S/m}$; $\epsilon_r = 36.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.13 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.011 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 1.43 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.011 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 q) = 0.702 W/kq; SAR(10 q) = 0.222 W/kq

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.35 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 75 of 138

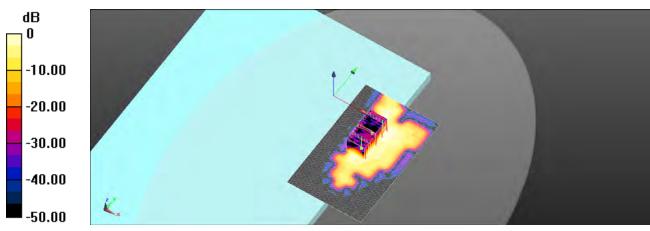

0 dB = 1.43 W/kg = 1.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

台灣檢驗科技股份有限公司

prosecuted to the fullest extent of the law.



Page: 76 of 138

Date: 2022/12/27

ID: 013

Report No.: TESA2212000629ES

WLAN 802.11ac(80M) 5.9G_Body_Bottom Surface_CH 171_0mm_Main

Communication System: WLAN; Frequency: 5855 MHz; Duty cycle= 1:1.095

Medium parameters used: f = 5855 MHz; σ = 5.522 S/m; ε_r = 36.101; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.036 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.765 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.036 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 q) = 0.255 W/kq; SAR(10 q) = 0.086 W/kq

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.591 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 77 of 138

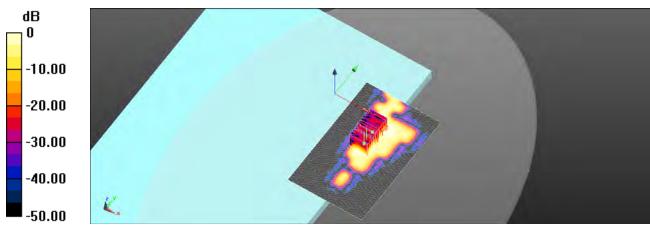

0 dB = 0.765 W/kg = -2.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sqs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 78 of 138

ID: 014

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz)_0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.67	35.961

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.148	0.151
psSAR8g [W/kg]	0.058	0.058
psSAR10g [W/kg]	0.051	0.050
psPDab (4.0cm2, sq) [W/m2]		1.16
Power Drift [dB]	0.13	-0.19
M2/M1 [%]		53.6
Dist 3dB Peak [mm]		7.6

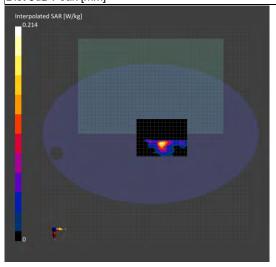

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 79 of 138

ID: 015

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz)_0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.841	35.769

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

mode an official recounts			
	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.168	0.174	
psSAR8g [W/kg]	0.065	0.067	
psSAR10g [W/kg]	0.058	0.058	
psPDab (4.0cm2, sq) [W/m2]		1.34	
Power Drift [dB]	0.13	0.12	
M2/M1 [%]		57.3	
Dist 3dB Peak [mm]		6.3	

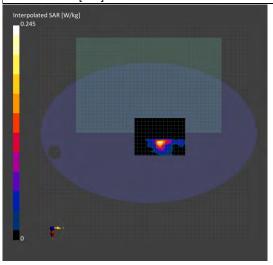

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 80 of 138

ID: 016

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz)_0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.187	35.365

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

mode an only it to bailt			
	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.130	0.133	
psSAR8g [W/kg]	0.048	0.050	
psSAR10g [W/kg]	0.043	0.043	
psPDab (4.0cm2, sq) [W/m2]		0.990	
Power Drift [dB]	-0.15	-0.17	
M2/M1 [%]		54.8	
Dist 3dB Peak [mm]		6.3	

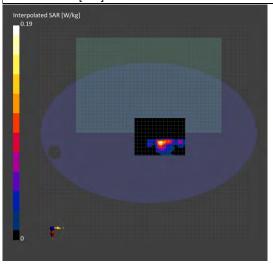

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 81 of 138

ID: 017

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 175 (6825.0 MHz)_0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.429	34.881

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

indudui dindin i todano			
	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.160	0.159	
psSAR8g [W/kg]	0.058	0.057	
psSAR10g [W/kg]	0.051	0.050	
psPDab (4.0cm2, sq) [W/m2]		1.14	
Power Drift [dB]	0.16	0.12	
M2/M1 [%]		52.7	
Dist 3dB Peak [mm]		6.1	

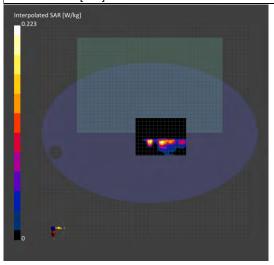

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 82 of 138

ID: 018

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-8,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 199 (6945.0 MHz)_0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.7	6.557	34.771

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.081	0.084	
psSAR8g [W/kg]	0.029	0.030	
psSAR10g [W/kg]	0.026	0.026	
psPDab (4.0cm2, sq) [W/m2]		0.596	
Power Drift [dB]	0.13	0.15	
M2/M1 [%]		51.2	
Dist 3dB Peak [mm]		5.6	

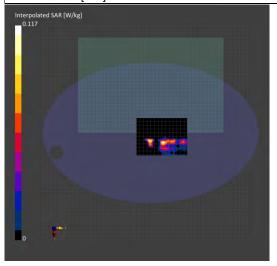

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 laiwan Eta.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sqs.com.tw



Page: 83 of 138

ID: 019

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz)_0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.67	35.961

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

inouour on one recourse			
	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.277	0.289	
psSAR8g [W/kg]	0.114	0.117	
psSAR10g [W/kg]	0.102	0.103	
psPDab (4.0cm2, sq) [W/m2]		2.34	
Power Drift [dB]	0.09	-0.03	
M2/M1 [%]		57.7	
Dist 3dB Peak [mm]		7.3	

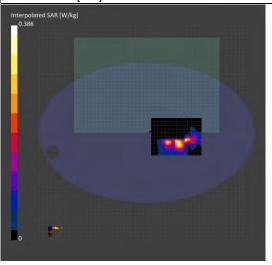

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

 科技股份有限公司
 t (886-2) 2299-3279



Page: 84 of 138

ID: 020

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 79 (6345.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.012	35.577

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

inouour ontone reoduce				
	Area Scan	Zoom Scan		
Date	2022-12-28	2022-12-28		
psSAR1g [W/kg]	0.261	0.276		
psSAR8g [W/kg]	0.096	0.100		
psSAR10g [W/kg]	0.084	0.086		
psPDab (4.0cm2, sq) [W/m2]		2.01		
Power Drift [dB]	0.01	-0.14		
M2/M1 [%]		54.9		
Dist 3dB Peak [mm]		7.4		

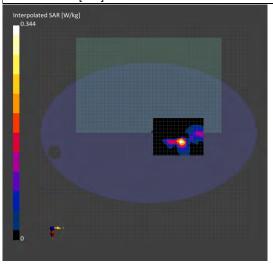

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 85 of 138

ID: 021

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.187	35.365

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

inouour ontone i toourto			
	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.220	0.238	
psSAR8g [W/kg]	0.081	0.086	
psSAR10g [W/kg]	0.071	0.074	
psPDab (4.0cm2, sq) [W/m2]		1.72	
Power Drift [dB]	0.17	-0.13	
M2/M1 [%]		51.4	
Dist 3dB Peak [mm]		7.5	

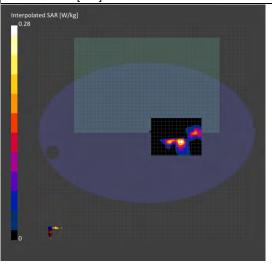

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 86 of 138

ID: 022

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 143 (6665.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.257	35.073

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.181	0.190	
psSAR8g [W/kg]	0.064	0.068	
psSAR10g [W/kg]	0.056	0.058	
psPDab (4.0cm2, sq) [W/m2]		1.36	
Power Drift [dB]	-0.14	-0.19	
M2/M1 [%]		49.8	
Dist 3dB Peak [mm]		7.5	

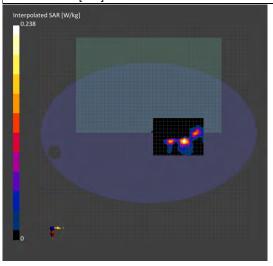

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 87 of 138

ID: 023

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 183 (6865.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.473	34.837

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan	
Date	2022-12-28	2022-12-28	
psSAR1g [W/kg]	0.087	0.086	
psSAR8g [W/kg]	0.029	0.031	
psSAR10g [W/kg]	0.025	0.027	
psPDab (4.0cm2, sq) [W/m2]		0.618	
Power Drift [dB]	0.18	0.15	
M2/M1 [%]		53.1	
Dist 3dB Peak [mm]		6.7	

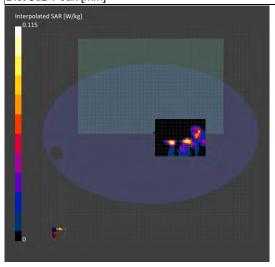

Date: 2022/12/24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 88 of 138

ID: 024

Report No.: TESA2212000629ES

WLAN 802.11b Body Bottom Surface CH 1 0mm Aux

Communication System: WLAN; Frequency: 2412 MHz; Duty cycle= 1:1.003

Medium parameters used: f = 2412 MHz; $\sigma = 1.781 \text{ S/m}$; $\epsilon_r = 38.769$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.445 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.56 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 0.452 W/kg

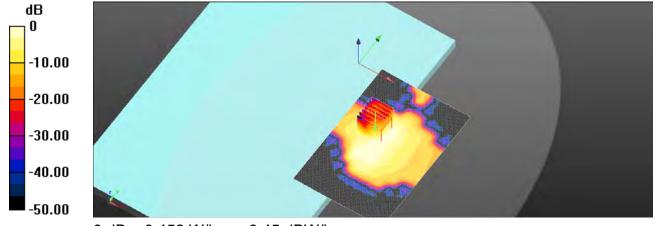

0 dB = 0.452 W/kg = -3.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 89 of 138

Date: 2022/12/24

ID: 025

Report No.: TESA2212000629ES

Bluetooth(GFSK)_Body_Bottom Surface_CH 39_0mm_Aux

Communication System: Bluetooth; Frequency: 2441 MHz; Duty cycle= 1:1

Medium parameters used: f = 2441 MHz; $\sigma = 1.806$ S/m; $\varepsilon_r = 38.716$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0200 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.788 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00397 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.0163 W/kg

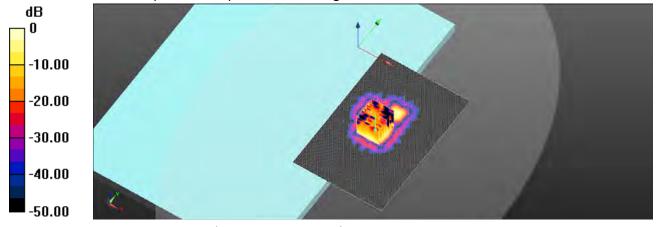

0 dB = 0.0163 W/kg = -17.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 90 of 138

Date: 2022/12/25

ID: 026

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 46_0mm_Aux

Communication System: WLAN; Frequency: 5230 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5230 MHz; $\sigma = 4.825 \text{ S/m}$; $\epsilon_r = 36.821$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.85 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.883 W/kg

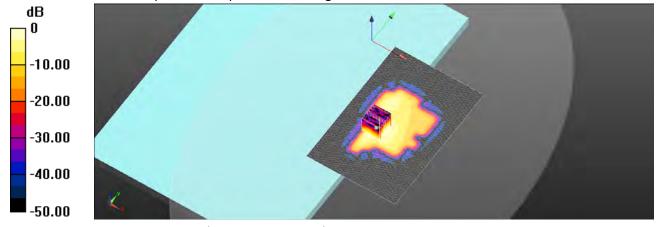

0 dB = 0.883 W/kg = -0.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 91 of 138

Date: 2022/12/25

ID: 027

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Aux

Communication System: WLAN; Frequency: 5270 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5270 MHz; $\sigma = 4.87 \text{ S/m}$; $\epsilon_r = 36.738$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.967 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.04 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.866 W/kg

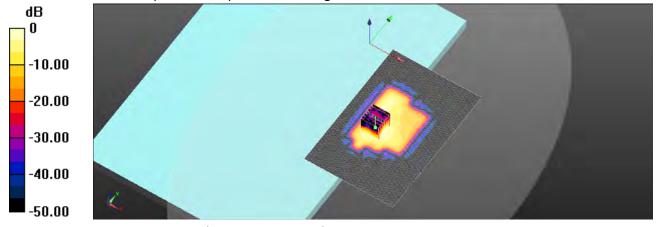

0 dB = 0.866 W/kg = -0.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 92 of 138

Date: 2022/12/26

ID: 028

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.6G_Body_Bottom Surface_CH 142_0mm_Aux Communication System: WLAN; Frequency: 5710 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5710 MHz; σ = 5.326 S/m; ε_r = 36.263; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.69 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.80 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 1.44 W/kg

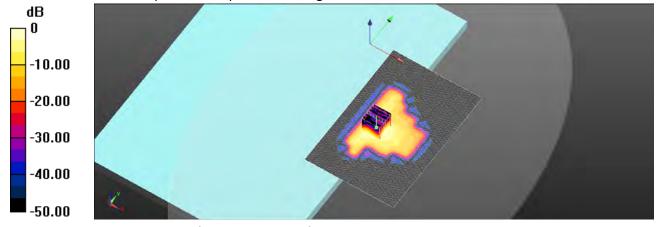

0 dB = 1.44 W/kg = 1.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 93 of 138

Date: 2022/12/27

ID: 029

Report No.: TESA2212000629ES

WLAN 802.11a 5.8G_Body_Bottom Surface_CH 165_0mm_Aux

Communication System: WLAN; Frequency: 5825 MHz; Duty cycle= 1:1.022

Medium parameters used: f = 5825 MHz; $\sigma = 5.475 \text{ S/m}$; $\epsilon_r = 36.172$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.57 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 1.36 W/kg

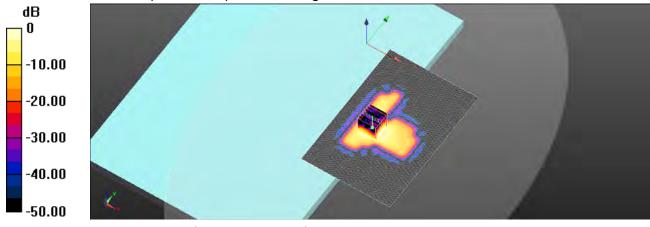

0 dB = 1.36 W/kg = 1.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 94 of 138

Date: 2022/12/27

ID: 030

Report No.: TESA2212000629ES

WLAN 802.11ac(80M) 5.9G_Body_Bottom Surface_CH 171_0mm_Aux

Communication System: WLAN; Frequency: 5855 MHz; Duty cycle= 1:1.095

Medium parameters used: f = 5855 MHz; σ = 5.522 S/m; ε_r = 36.101; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.905 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.803 W/kg

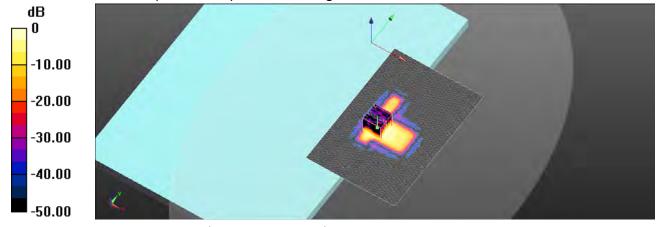

0 dB = 0.803 W/kg = -0.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司



Page: 95 of 138

Date: 2022/12/24

ID: 031

Report No.: TESA2212000629ES

WLAN 802.11b_Body_Bottom Surface_CH 6_0mm_Main

Communication System: WLAN; Frequency: 2437 MHz; Duty cycle= 1:1.003

Medium parameters used: f = 2437 MHz; $\sigma = 1.795 \text{ S/m}$; $\epsilon_r = 38.728$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.450 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.773 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.630 W/kg

SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.475 W/kg

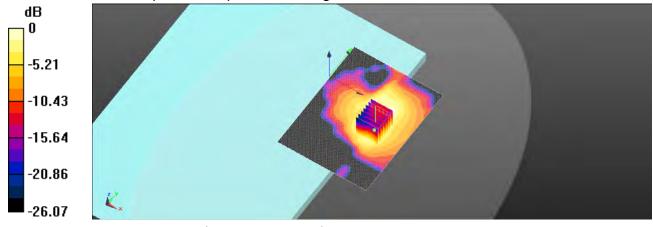

0 dB = 0.475 W/kg = -3.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 138

Date: 2022/12/25

ID: 032

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.2G_Body_Bottom Surface_CH 46_0mm_Main

Communication System: WLAN; Frequency: 5230 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5230 MHz; σ = 4.825 S/m; $ε_r$ = 36.821; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

· Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.78 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.91 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 1.66 W/kg

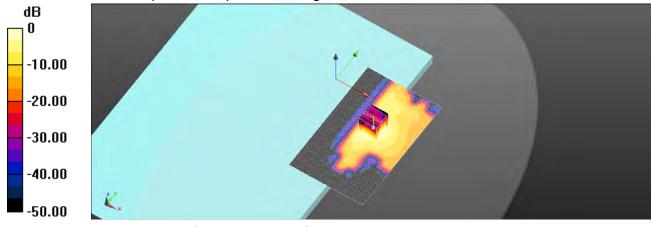

0 dB = 1.66 W/kg = 2.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Etd.



Page: 97 of 138

Date: 2022/12/25

ID: 033

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.3G_Body_Bottom Surface_CH 54_0mm_Main

Communication System: WLAN; Frequency: 5270 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5270 MHz; $\sigma = 4.87 \text{ S/m}$; $\epsilon_r = 36.738$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.32 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 0.816 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.53 W/kg

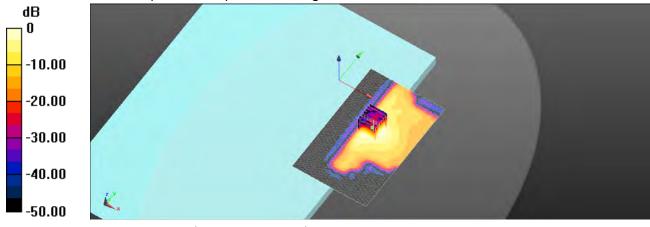

0 dB = 1.53 W/kg = 1.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 98 of 138

Date: 2022/12/26

ID: 034

Report No.: TESA2212000629ES

WLAN 802.11n(40M) 5.6G_Body_Bottom Surface_CH 142_0mm_Main Communication System: WLAN; Frequency: 5710 MHz; Duty cycle= 1:1.05

Medium parameters used: f = 5710 MHz; σ = 5.326 S/m; ε_r = 36.263; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.69 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.27 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.20 W/kg

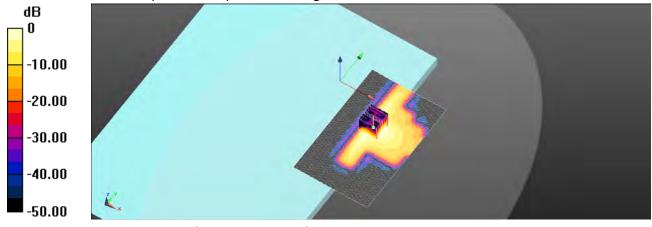

0 dB = 1.20 W/kg = 0.78 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279



Page: 99 of 138

Date: 2022/12/27

ID: 035

Report No.: TESA2212000629ES

WLAN 802.11a 5.8G_Body_Bottom Surface_CH 149_0mm_Main

Communication System: WLAN; Frequency: 5745 MHz; Duty cycle= 1:1.022

Medium parameters used: f = 5745 MHz; $\sigma = 5.356 \text{ S/m}$; $\epsilon_r = 36.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

• Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.22 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.01 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 1.62 W/kg

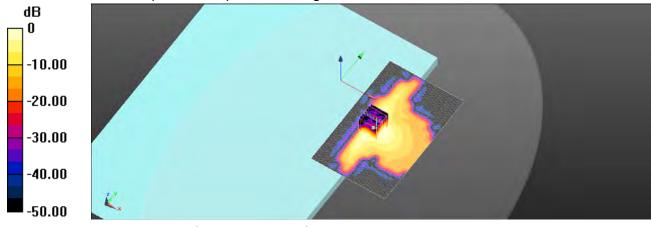

0 dB = 1.62 W/kg = 2.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 100 of 138

Date: 2022/12/27

ID: 036

Report No.: TESA2212000629ES

WLAN 802.11ac(80M) 5.9G Body Bottom Surface CH 171 0mm Main

Communication System: WLAN; Frequency: 5855 MHz; Duty cycle= 1:1.095

Medium parameters used: f = 5855 MHz; $\sigma = 5.522$ S/m; $\varepsilon_r = 36.101$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/3/2

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/2/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.59 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 q) = 0.529 W/kq; SAR(10 q) = 0.178 W/kq

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.03 W/kg

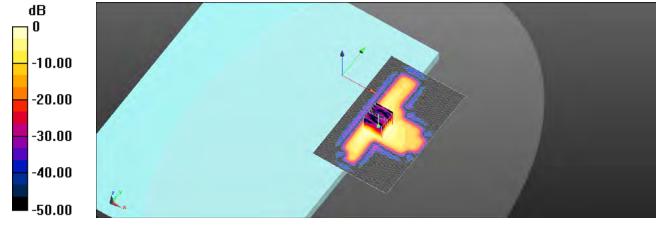

0 dB = 1.03 W/kg = 0.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 101 of 138

ID: 037

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz) _0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.67	35.961

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.129	0.142
psSAR8g [W/kg]	0.047	0.050
psSAR10g [W/kg]	0.041	0.043
psPDab (4.0cm2, sq) [W/m2]		1.01
Power Drift [dB]	0.16	0.16
M2/M1 [%]		60.5
Dist 3dB Peak [mm]		6.9

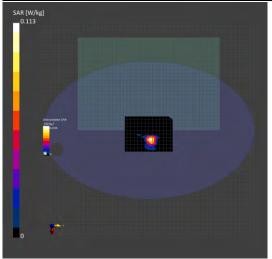

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄有论明,此都华结里倚卧侧对之缘是台香,同时此楼是倚尺空的子。木都华丰德木公司聿而纯可,不可驾份海剿。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 102 of 138

ID: 038

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz) _0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.841	35.769

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

<u></u>		
	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.132	0.148
psSAR8g [W/kg]	0.048	0.050
psSAR10g [W/kg]	0.041	0.043
psPDab (4.0cm2, sq) [W/m2]		1.01
Power Drift [dB]	0.17	-0.14
M2/M1 [%]		61.0
Dist 3dB Peak [mm]		6.3

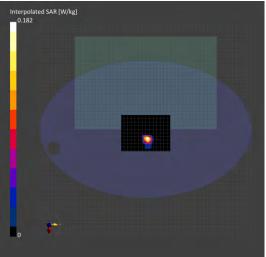

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此类只属是2000年。木梨生主概木公司丰富纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 103 of 138

ID: 039

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) _0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.187	35.365

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0	
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.111	0.131
psSAR8g [W/kg]	0.038	0.041
psSAR10g [W/kg]	0.032	0.035
psPDab (4.0cm2, sq) [W/m2]		0.825
Power Drift [dB]	0.11	0.13
M2/M1 [%]		58.3
Dist 3dB Peak [mm]	·	4.8

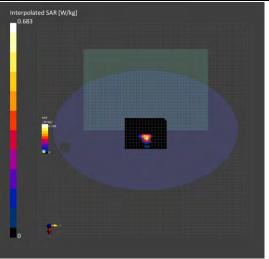

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此类只属是2000年。木梨生主概木公司丰富纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 104 of 138

ID: 040

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 175 (6825.0 MHz) 0mm Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.429	34.881

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.151	0.157
psSAR8g [W/kg]	0.048	0.048
psSAR10g [W/kg]	0.042	0.041
psPDab (4.0cm2, sq) [W/m2]		0.969
Power Drift [dB]	0.08	0.06
M2/M1 [%]		55.4
Dist 3dB Peak [mm]		6.3

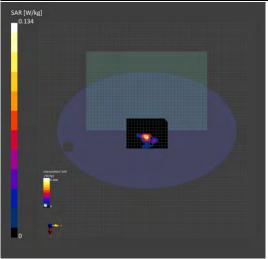

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 105 of 138

ID: 041

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-8,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 199 (6945.0 MHz) _0mm_Aux

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.7	6.557	34.771

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan	
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0	
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	
Sensor Surface [mm]	3.0	1.4	

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.070	0.067
psSAR8g [W/kg]	0.023	0.023
psSAR10g [W/kg]	0.020	0.019
psPDab (4.0cm2, sq) [W/m2]		0.455
Power Drift [dB]	-0.10	-0.11
M2/M1 [%]		52.6
Dist 3dB Peak [mm]		6.3

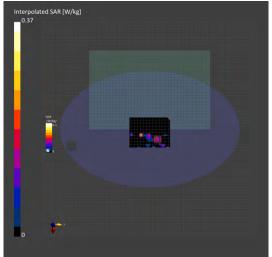

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此类只属是2000年。木梨生主概木公司丰富纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 106 of 138

ID: 042

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz) 0mm Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	5.67	35.961

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

·	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.146	0.157
psSAR8g [W/kg]	0.054	0.057
psSAR10g [W/kg]	0.048	0.049
psPDab (4.0cm2, sq) [W/m2]		1.14
Power Drift [dB]	0.10	-0.09
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		7.5

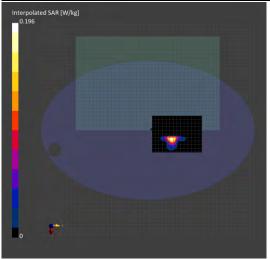

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 107 of 138

ID: 043

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz) 0mm Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.012	35.577

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

_	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.128	0.145
psSAR8g [W/kg]	0.048	0.052
psSAR10g [W/kg]	0.042	0.045
psPDab (4.0cm2, sq) [W/m2]		1.04
Power Drift [dB]	0.16	0.18
M2/M1 [%]		57.3
Dist 3dB Peak [mm]		5.4

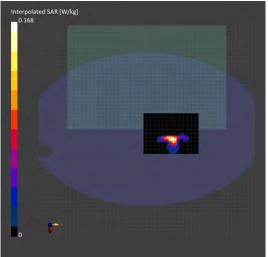

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 108 of 138

ID: 044

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.187	35.365

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.078	0.096
psSAR8g [W/kg]	0.028	0.033
psSAR10g [W/kg]	0.024	0.029
psPDab (4.0cm2, sq) [W/m2]		0.668
Power Drift [dB]	0.03	0.01
M2/M1 [%]		58.2
Dist 3dB Peak [mm]		6.1

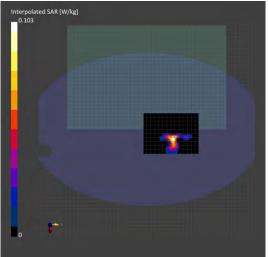

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 109 of 138

ID: 045

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 143 (6665.0 MHz) 0mm Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.257	35.073

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

•	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.070	0.078
psSAR8g [W/kg]	0.025	0.027
psSAR10g [W/kg]	0.021	0.023
psPDab (4.0cm2, sq) [W/m2]		0.547
Power Drift [dB]	0.10	-0.08
M2/M1 [%]		61.9
Dist 3dB Peak [mm]		4.8

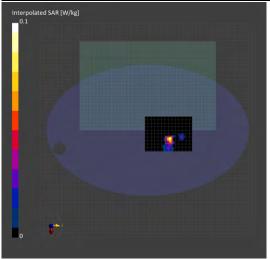

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 110 of 138

ID: 046

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 183 (6865.0 MHz) _0mm_Main

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	Bottom Surface, 0.00	5.8	6.473	34.837

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

_	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 136.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	0.078	0.086
psSAR8g [W/kg]	0.025	0.027
psSAR10g [W/kg]	0.021	0.023
psPDab (4.0cm2, sq) [W/m2]		0.543
Power Drift [dB]	0.05	-0.17
M2/M1 [%]		88.3
Dist 3dB Peak [mm]		4.8

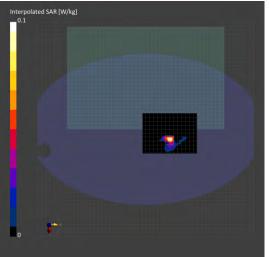

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此模具属是2000年。木梨生主概木公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 $134 \,$ 號

www.sqs.com.tw



Page: 111 of 138

13 PD MEASUREMENT RESULTS

ID: 047

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz)_0mm_Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-55GHz, 2022-01-26	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.86
psPDtot+ [W/m ²]	2.14
psPDmod+ [W/m²]	2.98
E _{max} [V/m]	51.5
Power Drift [dB]	-0.17

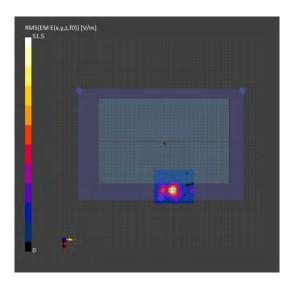

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 112 of 138

ID: 048

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-55GHz, 2022-01-26	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

mode di oni oni di condito	
Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.98
psPDtot+ [W/m²]	2.15
psPDmod+ [W/m²]	2.98
E _{max} [V/m]	52.8
Power Drift [dB]	0.15

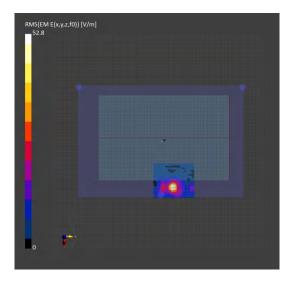

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.sqs.com.tw



Page: 113 of 138

ID: 049

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz)_0mm_Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-55GHz, 2022-01-26	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.05
psPDtot+ [W/m²]	2.40
psPDmod+ [W/m²]	3.15
E _{max} [V/m]	53.0
Power Drift [dB]	0.11

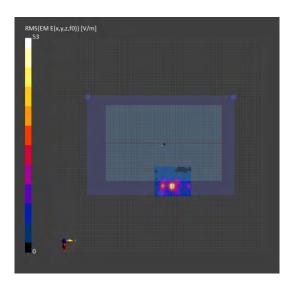

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 114 of 138

ID: 050

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 175 (6825.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV3 - SN9399_F1-55GHz, 2022-01-26	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.98
psPDtot+ [W/m²]	2.26
psPDmod+ [W/m²]	3.25
E _{max} [V/m]	57.8
Power Drift [dB]	-0.14

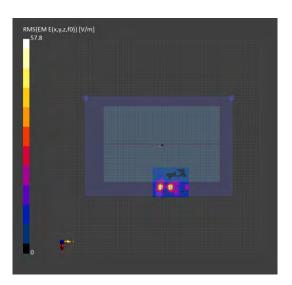

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 115 of 138

ID: 051

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-8,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 199 (6945.0 MHz)_0mm_Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.20
psPDtot+ [W/m²]	1.31
psPDmod+ [W/m²]	1.92
E _{max} [V/m]	46.9
Power Drift [dB]	-0.15

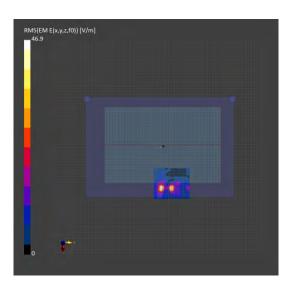

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此模具属是2000年。木梨生主概木公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

iGS Taiwan Ltd. _| No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 116 of 138

ID: 052

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz)_0mm_Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	3.72
psPDtot+ [W/m²]	4.63
psPDmod+ [W/m²]	5.27
E _{max} [V/m]	62.3
Power Drift [dB]	0.01

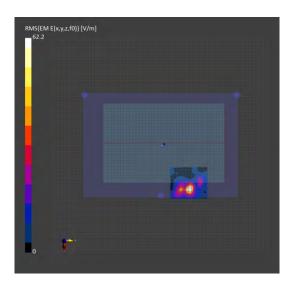

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Page: 117 of 138

ID: 053

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.88
psPDtot+ [W/m²]	3.45
psPDmod+ [W/m²]	3.98
E _{max} [V/m]	53.1
Power Drift [dB]	-0.05

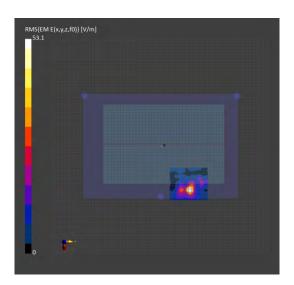

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 118 of 138

ID: 054

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.03
psPDtot+ [W/m²]	1.27
psPDmod+ [W/m²]	1.93
E _{max} [V/m]	40.3
Power Drift [dB]	-0.16

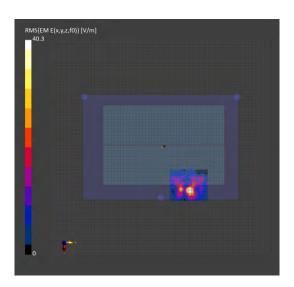

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 119 of 138

ID: 055

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 143 (6665.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.36
psPDtot+ [W/m²]	1.54
psPDmod+ [W/m²]	2.12
E _{max} [V/m]	43.4
Power Drift [dB]	-0.13

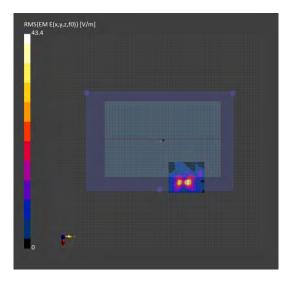

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 120 of 138

ID: 056

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 183 (6865.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.15
psPDtot+ [W/m²]	1.47
psPDmod+ [W/m²]	1.81
E _{max} [V/m]	36.6
Power Drift [dB]	-0.13

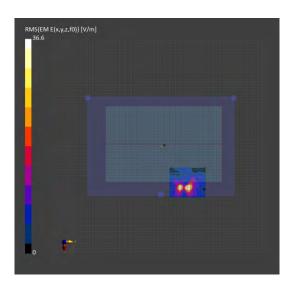

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 121 of 138

ID: 057

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.03
psPDtot+ [W/m²]	2.16
psPDmod+ [W/m²]	2.82
E _{max} [V/m]	51.7
Power Drift [dB]	-0.14

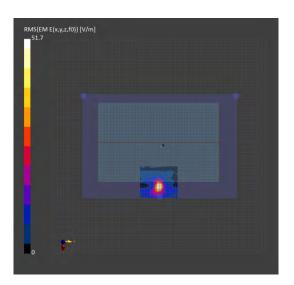

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279



Page: 122 of 138

ID: 058

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.44
psPDtot+ [W/m²]	2.78
psPDmod+ [W/m²]	3.16
E _{max} [V/m]	51.0
Power Drift [dB]	0.12

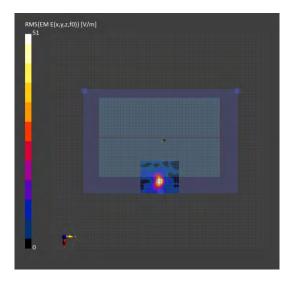

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 123 of 138

ID: 059

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.85
psPDtot+ [W/m²]	2.11
psPDmod+ [W/m²]	2.51
E _{max} [V/m]	50.0
Power Drift [dB]	-0.10

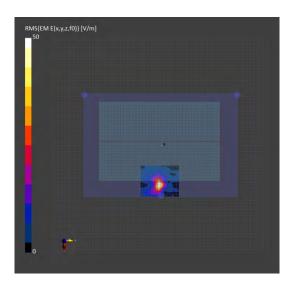

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 124 of 138

ID: 060

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 175 (6825.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m ²]	2.54
psPDtot+ [W/m²]	3.02
psPDmod+ [W/m²]	3.24
E _{max} [V/m]	50.9
Power Drift [dB]	0.18

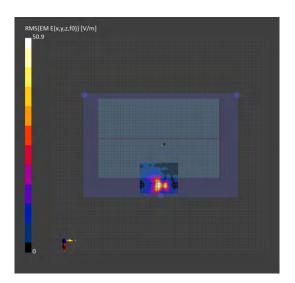

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 125 of 138

ID: 061

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-8,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 199 (6945.0 MHz) 0mm Aux

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.12
psPDtot+ [W/m²]	1.21
psPDmod+ [W/m²]	1.66
E _{max} [V/m]	40.3
Power Drift [dB]	-0.16

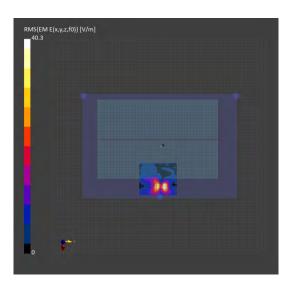

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 126 of 138

ID: 062

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 15 (6025.0 MHz)_0mm_Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m²]	1.65
psPDtot+ [W/m²]	3.06
psPDmod+ [W/m²]	3.97
E _{max} [V/m]	51.4
Power Drift [dB]	0.18

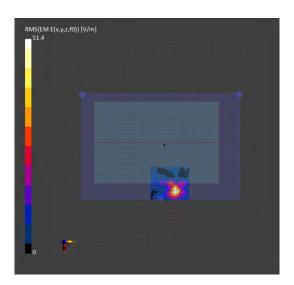

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的时,此想生红用魔影测验之缘具色素,同时此模具属是2000年。木梨生主概木公司事面纯可,不可如以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 127 of 138

ID: 063

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-5,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 47 (6185.0 MHz)_0mm_Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	2.06
psPDtot+ [W/m²]	2.73
psPDmod+ [W/m²]	3.95
E _{max} [V/m]	56.4
Power Drift [dB]	-0.06

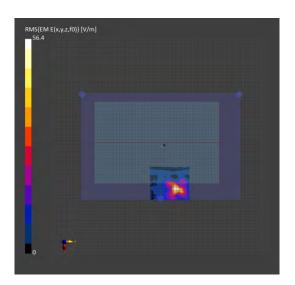

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有验明,此就是结果既是为键与合善,同时此键与原况如何工,才就是主领于八司事而统可,不可如以推制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 128 of 138

ID: 064

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-6,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 111 (6505.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	3.12
psPDtot+ [W/m²]	3.35
psPDmod+ [W/m²]	4.24
E _{max} [V/m]	63.6
Power Drift [dB]	0.12

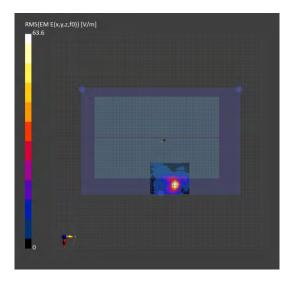

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 129 of 138

ID: 065

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), Channel 143 (6665.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm²]	4.00
psPDn+ [W/m²]	1.42
psPDtot+ [W/m²]	1.92
psPDmod+ [W/m²]	2.40
E _{max} [V/m]	43.6
Power Drift [dB]	0.13

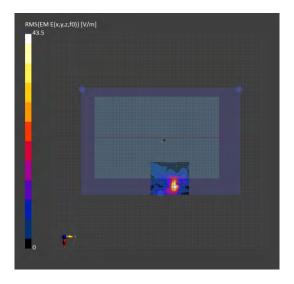

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 130 of 138

ID: 066

Report No.: TESA2212000629ES

Measurement Report for Device, Bottom Surface, U-NII-7,

IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle), Channel 183 (6865.0 MHz) 0mm Main

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	Bottom Surface, 2.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Date	2022-12-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.66
psPDtot+ [W/m²]	1.84
psPDmod+ [W/m²]	2.19
E _{max} [V/m]	46.9
Power Drift [dB]	-0.12

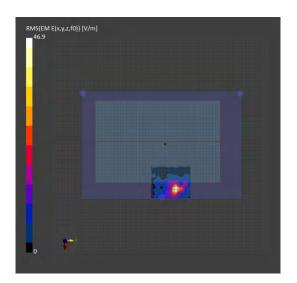

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 131 of 138

14 SAR SYSTEM CHECK RESULTS

Date: 2022/12/17

Report No.: TESA2212000629ES

Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.814 \text{ S/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12); Calibrated: 2022/03/02

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.8 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.8 V/m: Power Drift = 0.04 dB


Peak SAR (extrapolated) = 26.2 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.36 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 19.6 W/kg

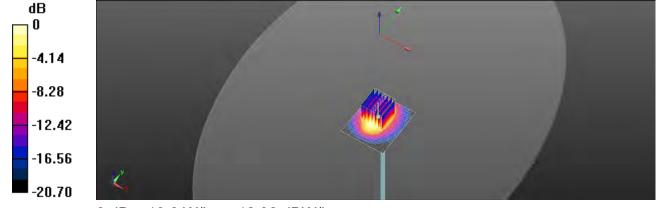

0 dB = 19.6 W/kg = 12.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 132 of 138

Date: 2022/12/18

Report No.: TESA2212000629ES Dipole 5250 MHz_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5250 MHz; $\sigma = 4.843 \text{ S/m}$; $\varepsilon_r = 36.779$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.69, 5.69, 5.69); Calibrated: 2022/03/02

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 76.23 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 16.8 W/kg

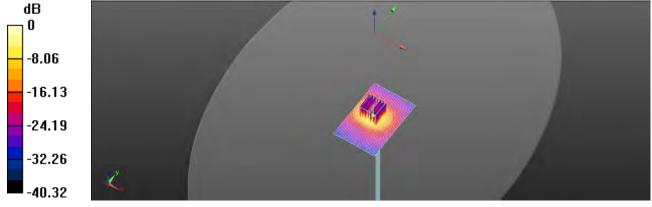

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Page: 133 of 138

Date: 2022/12/19

Report No. :TESA2212000629ES Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; σ = 5.211 S/m; ϵ_r = 36.379; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/03/02

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 79.51 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 38.3 W/kg

SAR(1 g) = 8.82 W/kg; SAR(10 g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 18.7 W/kg

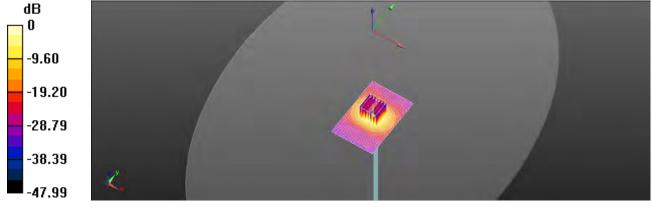

0 dB = 18.7 W/kg = 12.72 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只方的时,此起先处田居卧御建了梯口召录,同时此美里居见河内工。太祝先上领大八司隶石处五河,太元河四边海剿。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

505 Talwari Etd.



Page: 134 of 138

Date: 2022/12/20

Report No.: TESA2212000629ES Dipole 5750 MHz_SN:1023

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5750 MHz; $\sigma = 5.369 \text{ S/m}$; $\varepsilon_r = 36.207$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7642; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/03/02

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 71.88 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 35.2 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 16.9 W/kg

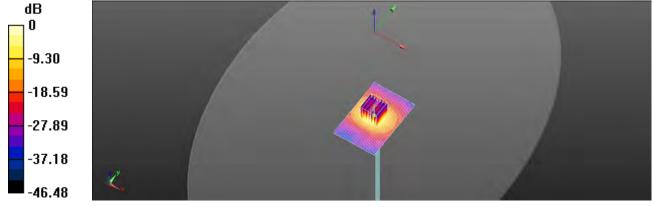

0 dB = 16.9 W/kg = 12.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 135 of 138

Report No.: TESA2212000629ES

Measurement Report for Device, FRONT, Validation band,

CW, Channel 6500 (6500.0 MHz)_SN:1006

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 0.00	5.8	6.617	34.713

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

_	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 102.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	6.0 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2022-12-28	2022-12-28
psSAR1g [W/kg]	27.5	29.9
psSAR8g [W/kg]	6.11	6.64
psSAR10g [W/kg]	5.26	5.46
psPDab (4.0cm2, sq) [W/m2]		133
Power Drift [dB]	0.02	0.03
M2/M1 [%]		50.7
Dist 3dB Peak [mm]		4.6

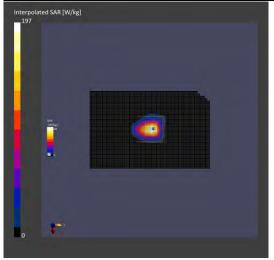

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 136 of 138

Report No.: TESA2212000629ES

Measurement Report for Device, FRONT, Validation band,

CW, Channel 7000 (7000.0 MHz)_SN:1007

Ambient temperature: 22.4; Liquid temperature: 22.3

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 0.00	5.7	6.69	33.2

Hardware Setup


Phantom	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1141	EX3DV4 - SN7642, 2022-03-02	DAE4 Sn1665, 2022-02-28

Scans Setup

	Area Scan	Zoom Scan		
Grid Extents [mm]	36.0 x 45.0	28.0 x 28.0 x 24.0		
Grid Steps [mm]	6.0 x 7.5	3.4 x 3.4 x 1.4		
Sensor Surface [mm]	3.0	1.4		

Measurement Results

	Area Scan	Zoom Scan		
Date	2022-12-28	2022-12-28		
psSAR1g [W/kg]	26.3	26.8		
psSAR8g [W/kg]	5.56	5.43		
psSAR10g [W/kg]	4.79	4.68		
psPDab (4.0cm2, sq) [W/m2]		114		
Power Drift [dB]	-0.09	-0.13		
M2/M1 [%]		48.3		
Dist 3dB Peak [mm]		4.6		

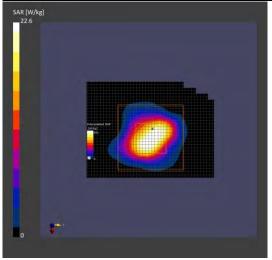

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 137 of 138

15 PD SYSTEM CHECK RESULTS

Report No.: TESA2212000629ES

Measurement Report for Device, FRONT, Validation band,

CW, Channel 10000 (10000.0 MHz), SN:1021

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Conversion Factor
5G	FRONT, 10.00	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1076	Air -	EUmmWV4 - SN9579_F1-55GHz, 2022-09-23	DAE4 Sn1665, 2022-02-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

5G Scan		
2022-12-29		
1.00		
50.9		
51.0		
51.2		
144		
0.05		

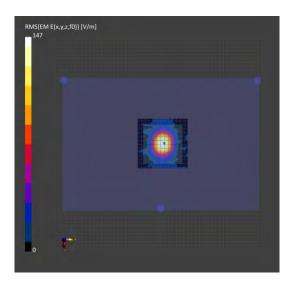

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 138 of 138

Refer to separated files for the following appendixes.

- 16.1 SAR_Appendix A Photographs
- 16.2 SAR Appendix B DAE & Probe Cal. Certificate
- 16.3 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除北只有約明,此親先は田原釈師子之辞『台書,同時世経『原原の四千。大親先土徳大八司書高統司,太司朝以海朝。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.