



## MEASUREMENT REPORT GSM / GPRS / EDGE / WCDMA

**Applicant Name:**

LG Electronics USA, Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

2/25 – 4/6/2020

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2002240025-02-R1.ZNF

**FCC ID:**

**ZNFQ730AM**

**APPLICANT:**

**LG Electronics USA, Inc.**

**Application Type:**

Certification

**Model:**

LM-Q730AM

**Additional Model(s):**

LMQ730AM, Q730AM

**EUT Type:**

Portable Handset

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**

22, 24, & 27


**Test Procedure(s):**

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised test report (S/N: 1M2002240025-06-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 1 of 85

## T A B L E O F C O N T E N T S


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Measurements .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS.....	10
7.1	Summary .....	10
7.2	Occupied Bandwidth .....	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	16
7.4	Band Edge Emissions at Antenna Terminal.....	42
7.5	Peak-Average Ratio .....	51
7.6	Radiated Power (ERP/EIRP).....	56
7.7	Radiated Spurious Emissions Measurements .....	61
7.8	Frequency Stability / Temperature Variation .....	74
8.0	CONCLUSION.....	85

<b>FCC ID:</b> ZNFQ730AM	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset	Page 2 of 85



## MEASUREMENT REPORT

### GSM / GPRS / EDGE / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.468	26.70	0.767	28.85	246KGXW
EDGE850	22H	824.2 - 848.8	0.101	20.04	0.166	22.19	245KG7W
WCDMA850	22H	826.4 - 846.6	0.053	17.25	0.087	19.40	4M20F9W
WCDMA1700	27	1712.4 - 1752.6			0.155	21.89	4M19F9W
GPRS1900	24E	1850.2 - 1909.8			0.631	28.00	245KGXW
EDGE1900	24E	1850.2 - 1909.8			0.161	22.08	246KG7W
WCDMA1900	24E	1852.4 - 1907.6			0.136	21.35	4M20F9W

#### EUT Overview

<b>FCC ID:</b> ZNFQ730AM		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 3 of 85

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 4 of 85

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFQ730AM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** 04721, 04739, 04747, 04754, 04792, 04853

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 5 of 85

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$ .

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 6 of 85

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFQ730AM	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset	Page 7 of 85

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
Agilent	E5515C	Wireless Communications Test Set	N/A			GB43193563
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			833855/0010
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	10/16/2019	Annual	10/16/2020	101716
Rohde & Schwarz	HL562E	Ultralog Antenna	3/29/2018	Biennial	3/29/2020	101012
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/9/2019	Annual	7/9/2020	102138
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	8/17/2018	Biennial	8/17/2020	101072
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Test Antenna	7/16/2018	Biennial	7/16/2020	101073
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	N/A

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 8 of 85



## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 9 of 85

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
 FCC ID: ZNFQ730AM  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / GPRS / EDGE / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Conducted Band Edge / Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d) 27.50(d)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS	Section 7.5
2.1046	RSS-132(5.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-132(5.3) RSS-133(6.3) RSS-139(6.4)	Frequency Stability	$< 2.5 \text{ ppm}$ (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS	Section 7.6
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	$< 1 \text{ Watts max. EIRP}$		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.2.

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 10 of 85

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	LG	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 11 of 85

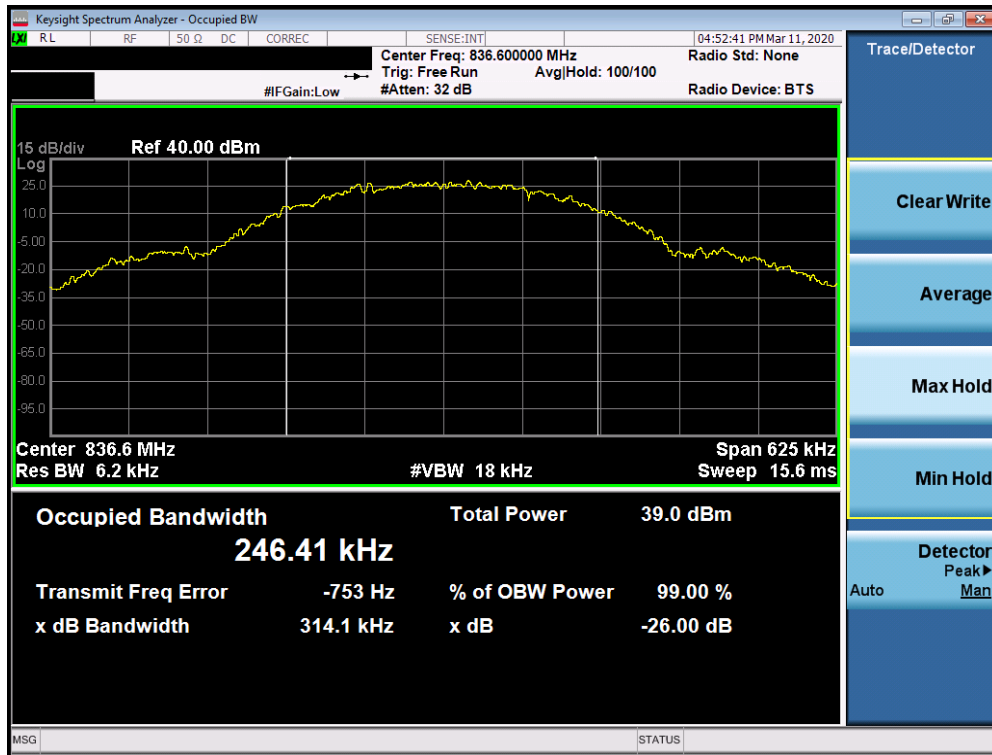


Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)




Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 12 of 85

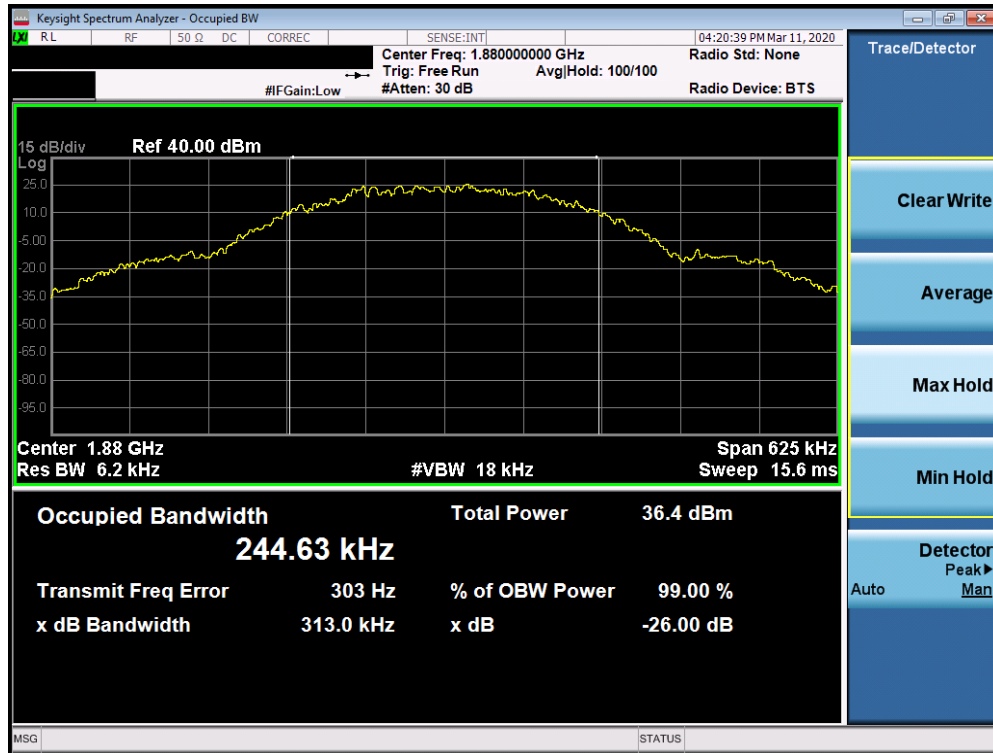


Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

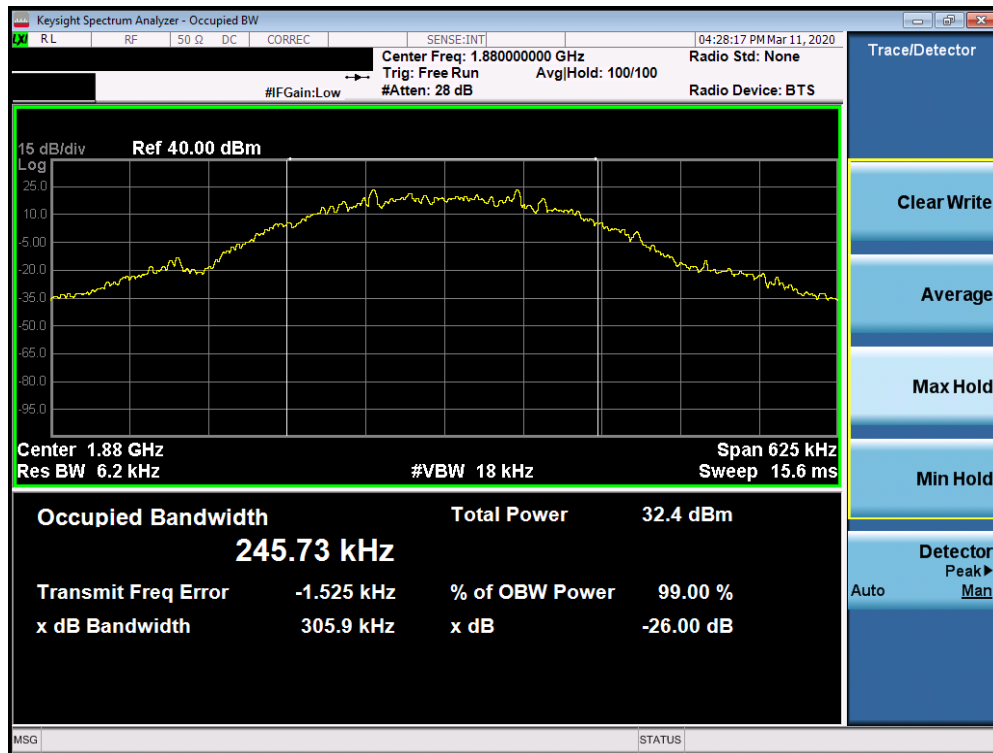


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 13 of 85

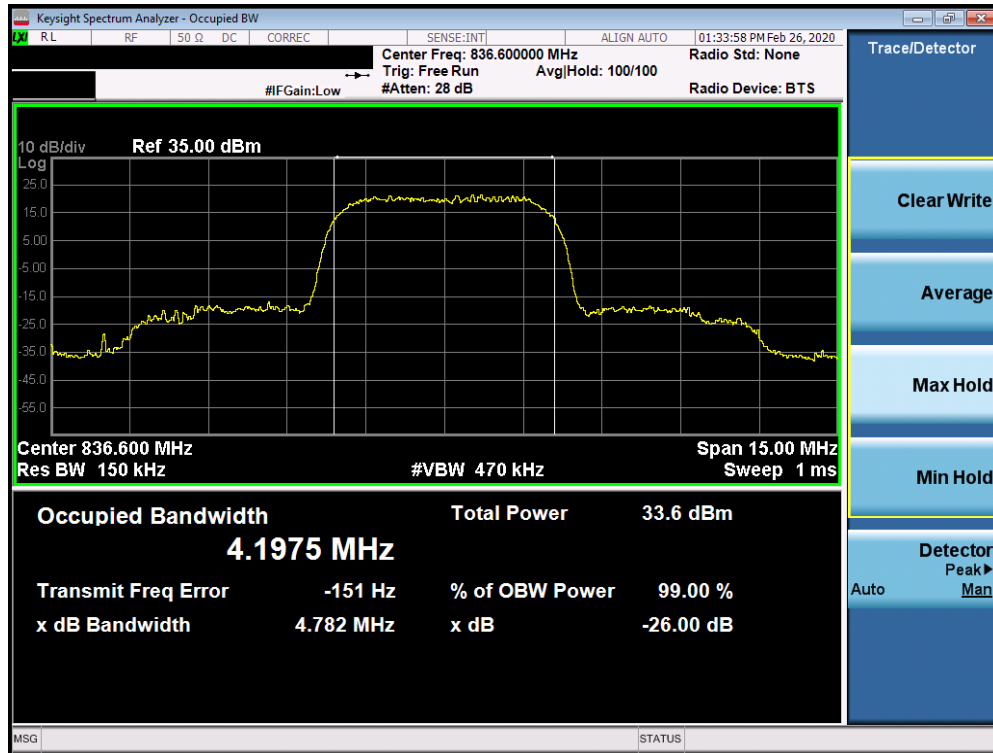

Plot 7-5. Occupied Bandwidth Plot (Cellular WCDMA Mode)

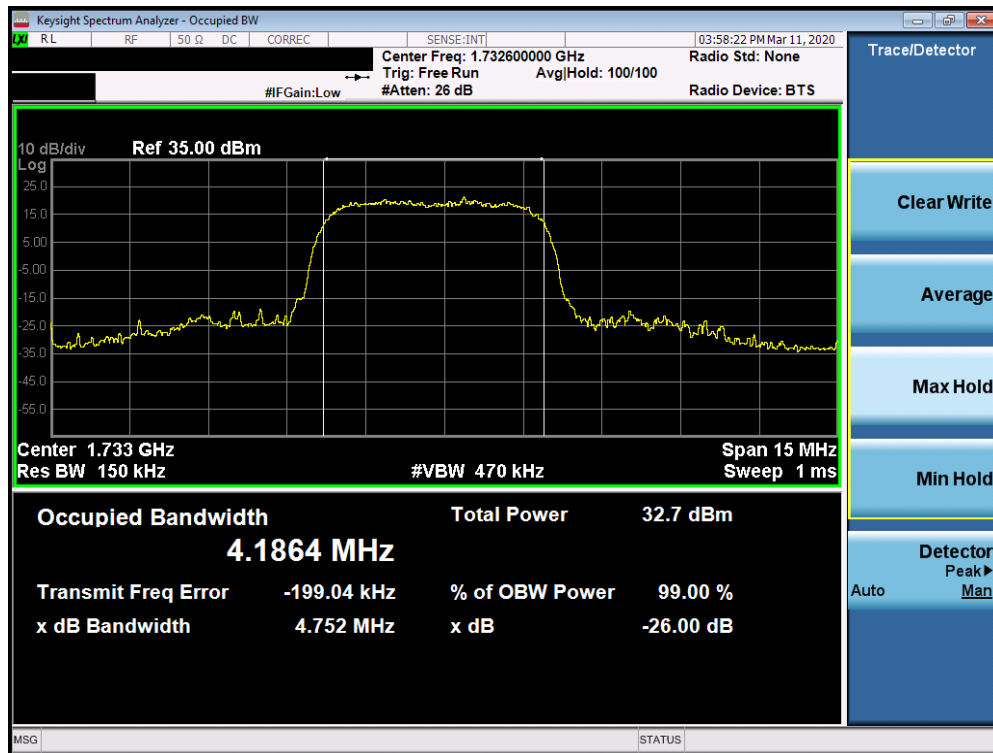

Plot 7-6. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 14 of 85



Plot 7-7. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 15 of 85

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10\log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**


### Test Notes

Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	LG	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 16 of 85





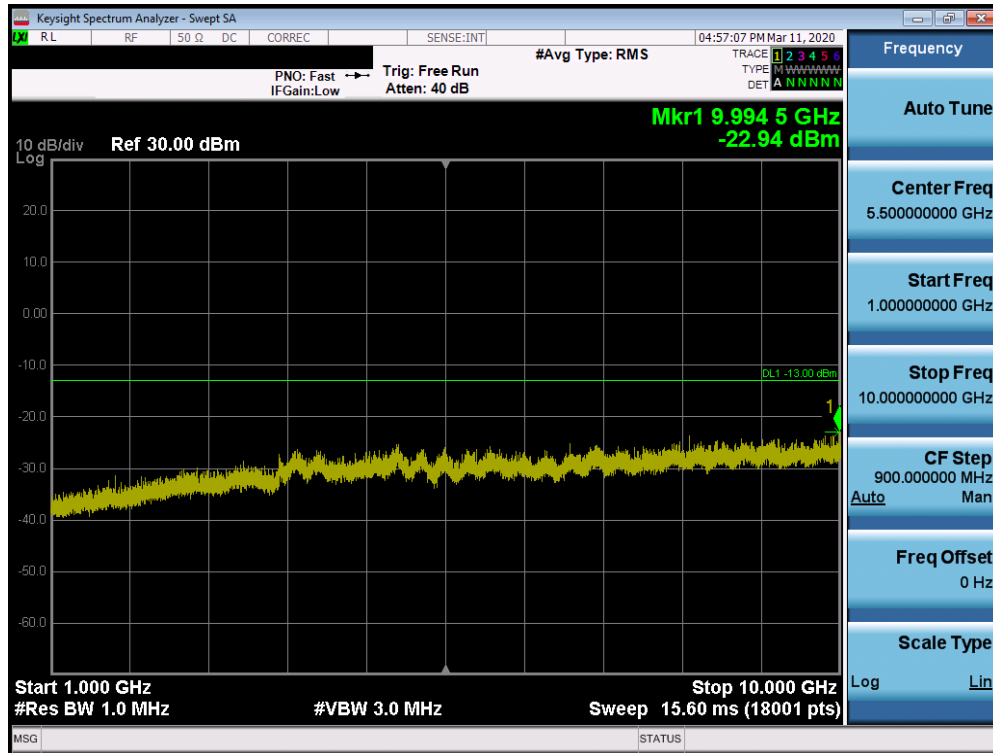


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

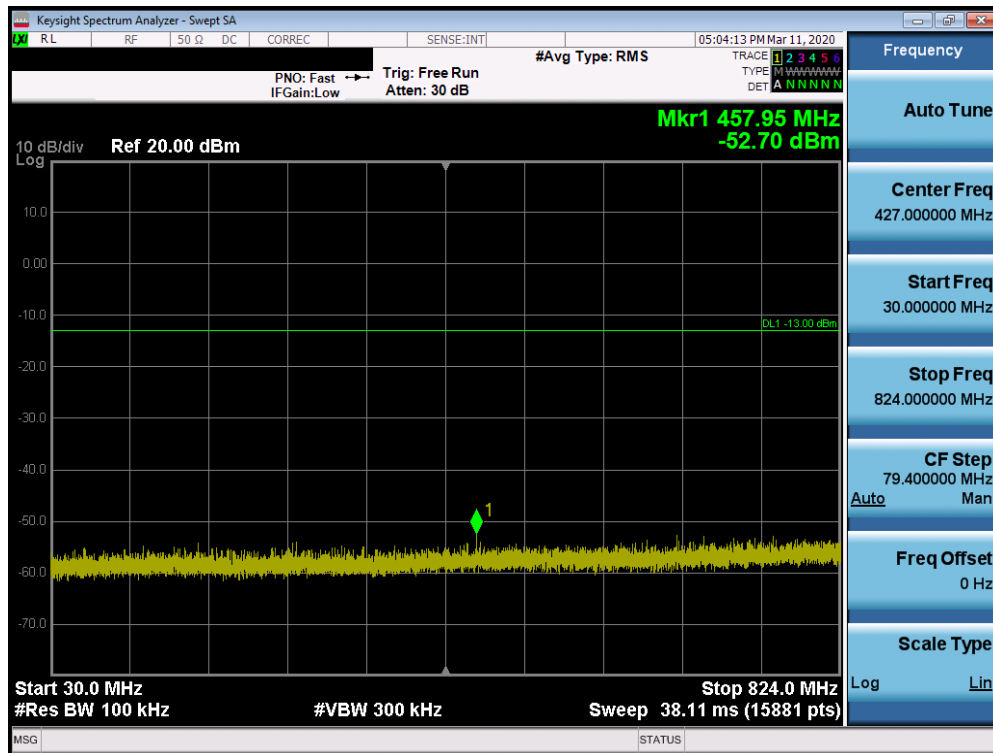


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 18 of 85

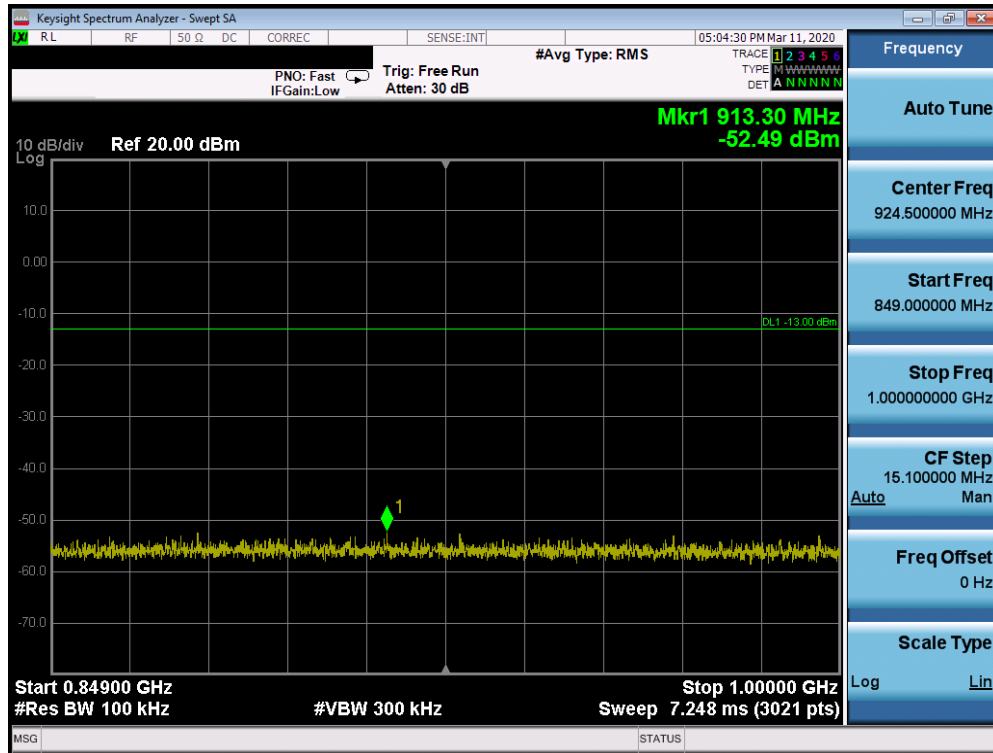


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

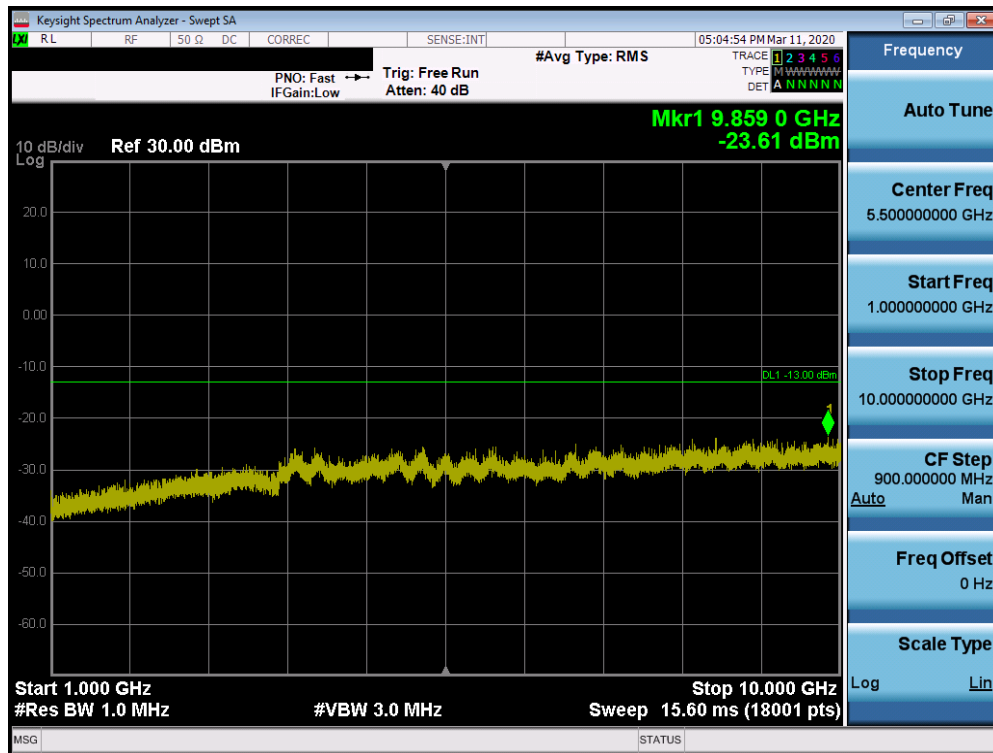


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 19 of 85

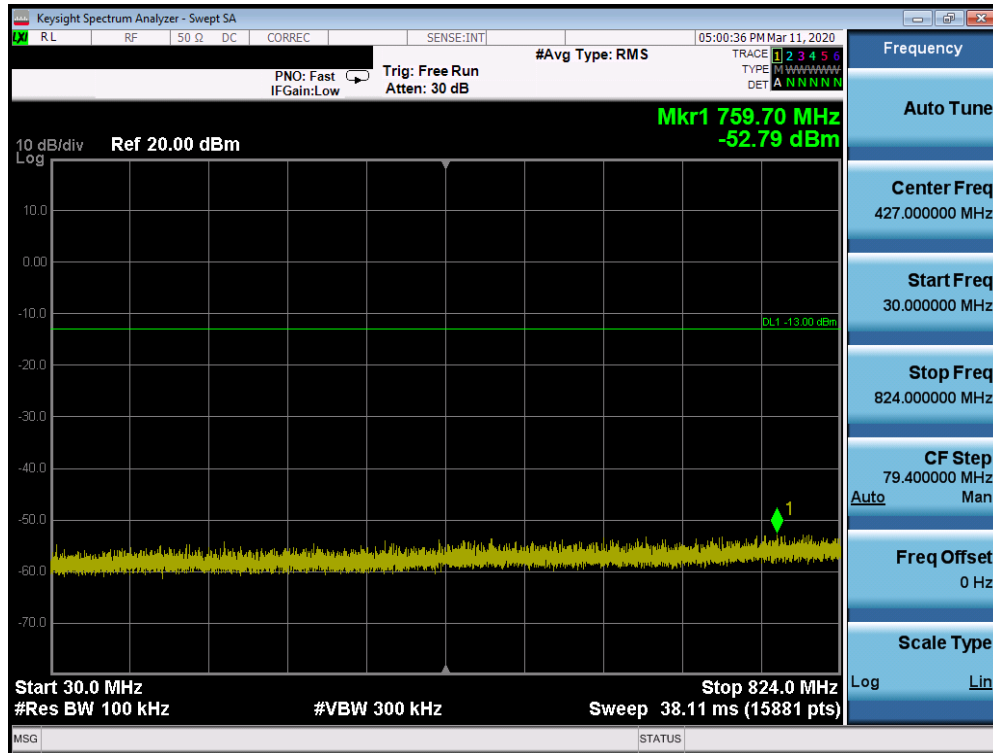


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

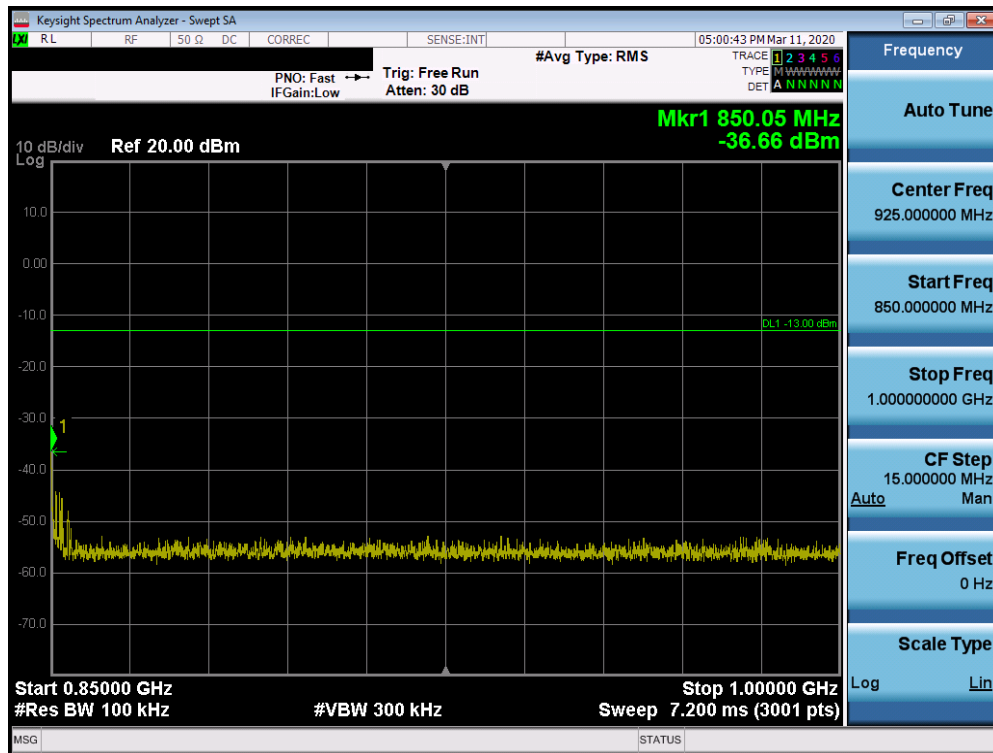

Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 20 of 85

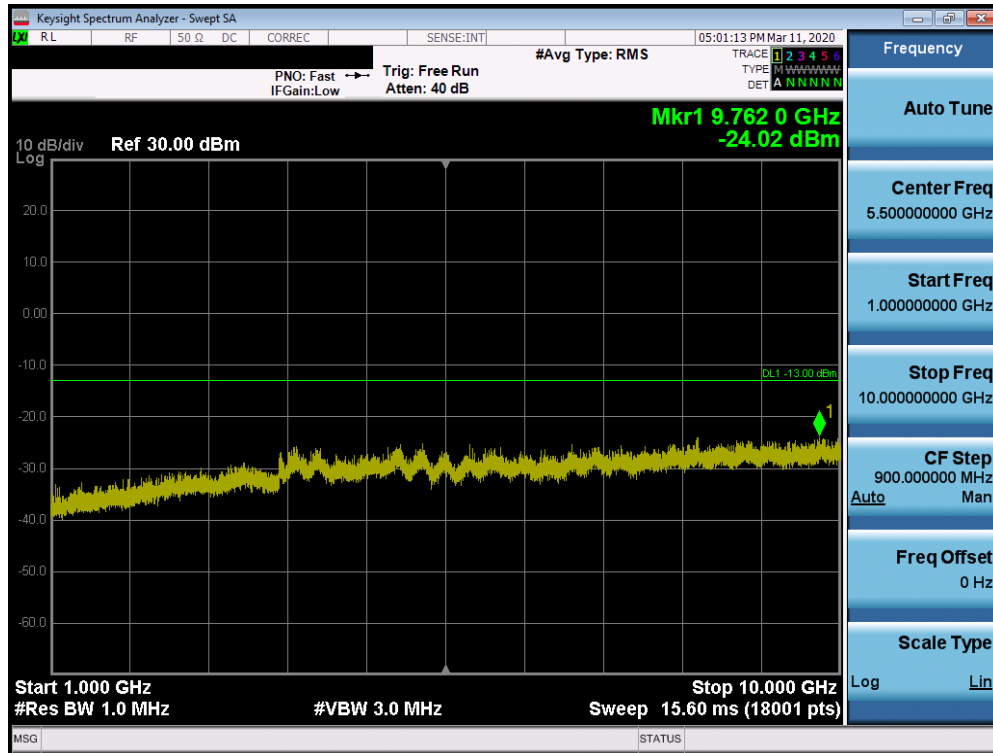


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: ZNFQ730AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 21 of 85

## PCS GPRS Mode

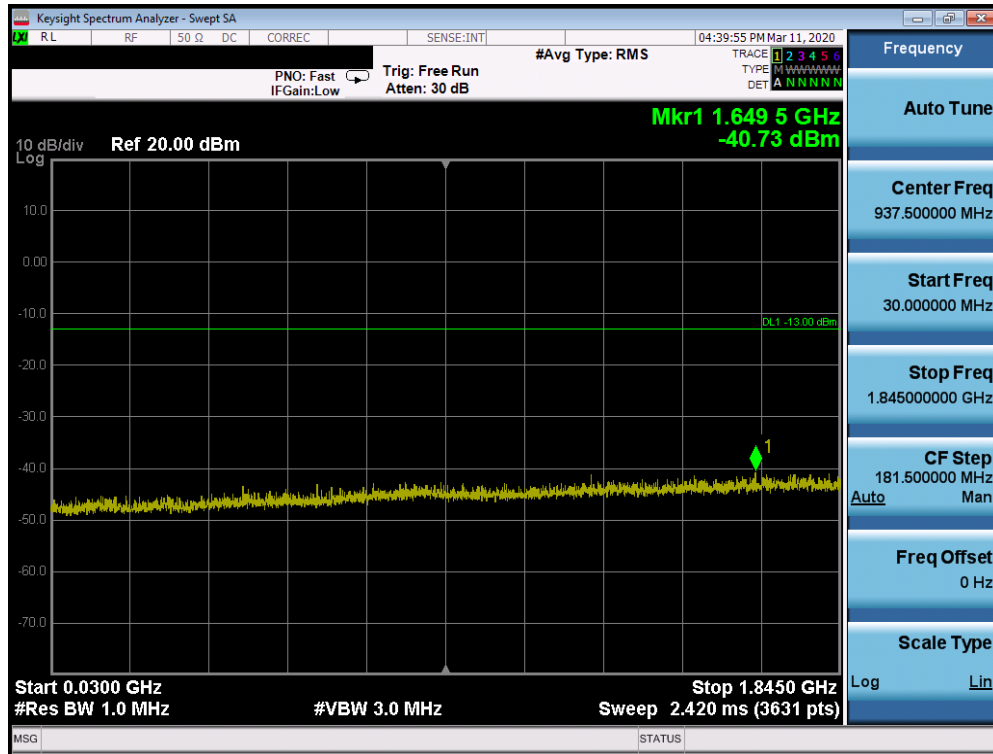


Plot 7-17. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

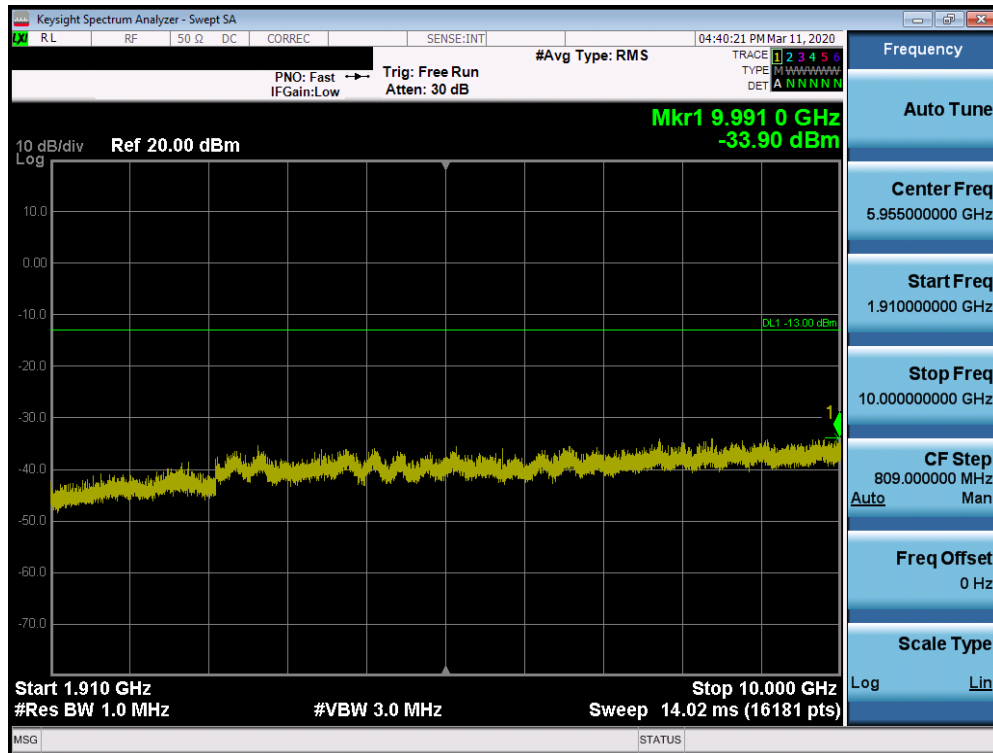


Plot 7-18. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 22 of 85

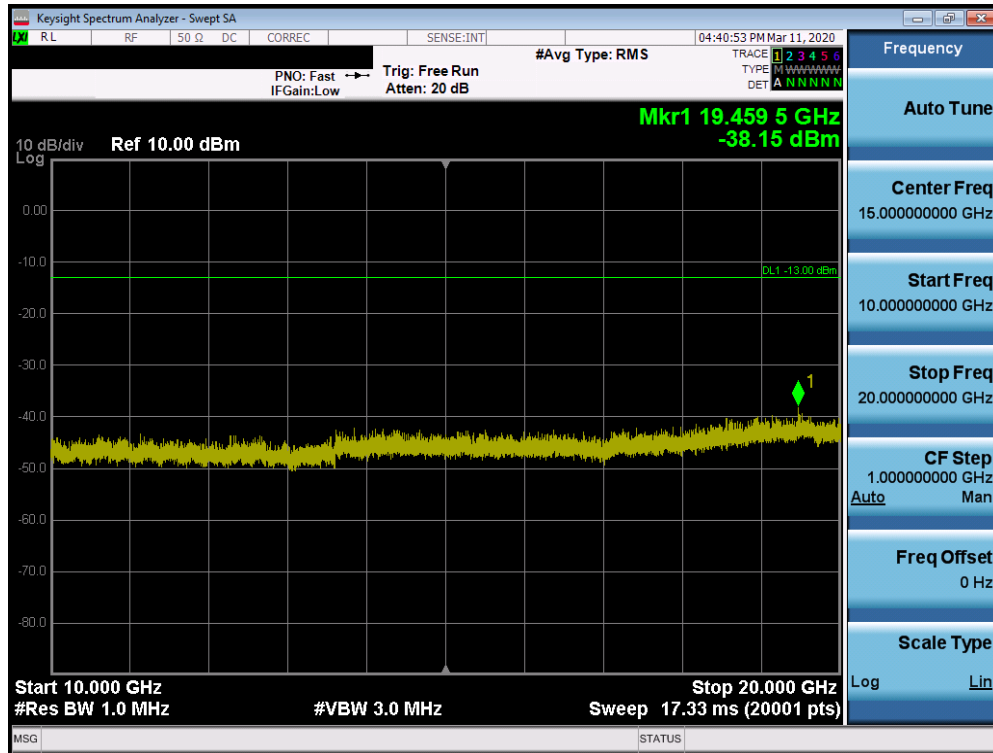


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

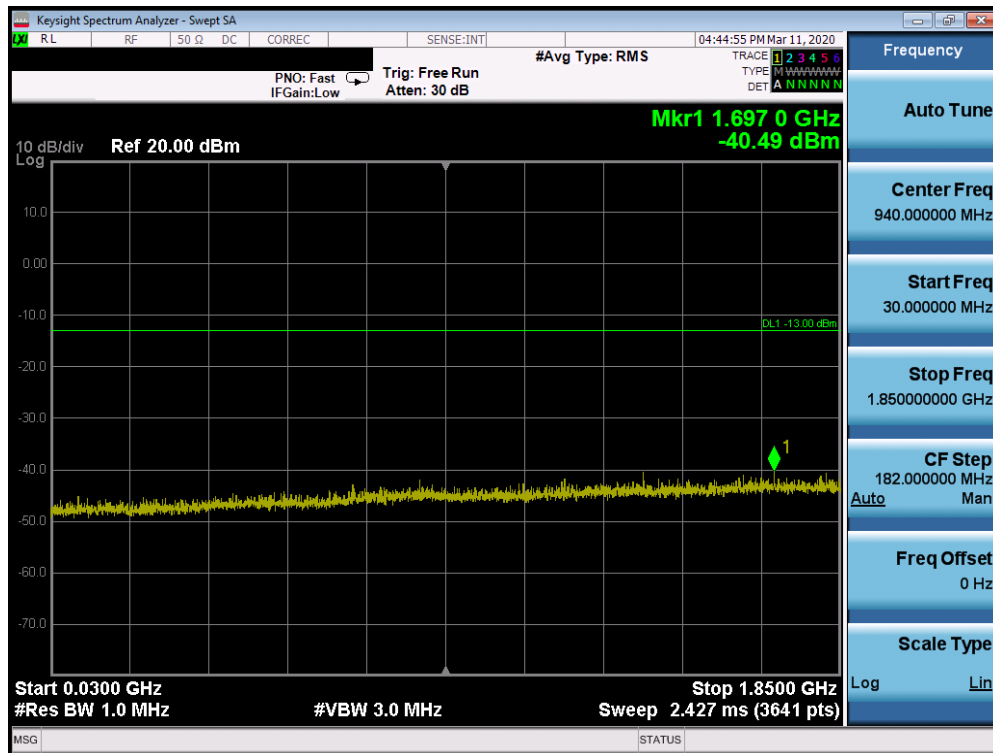


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 23 of 85



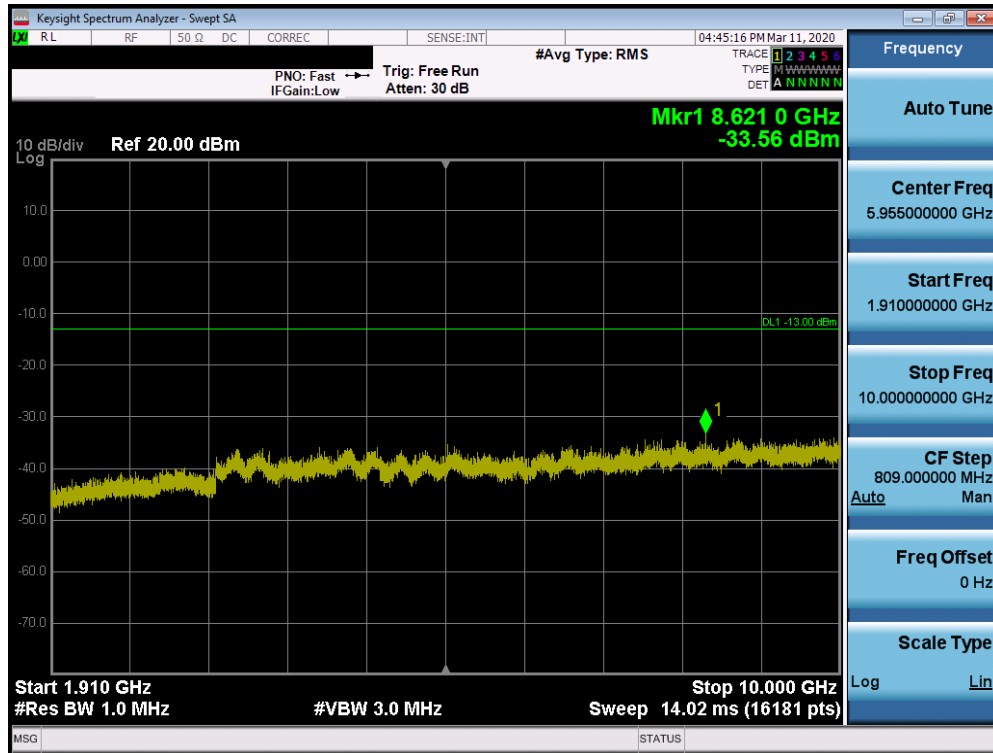


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

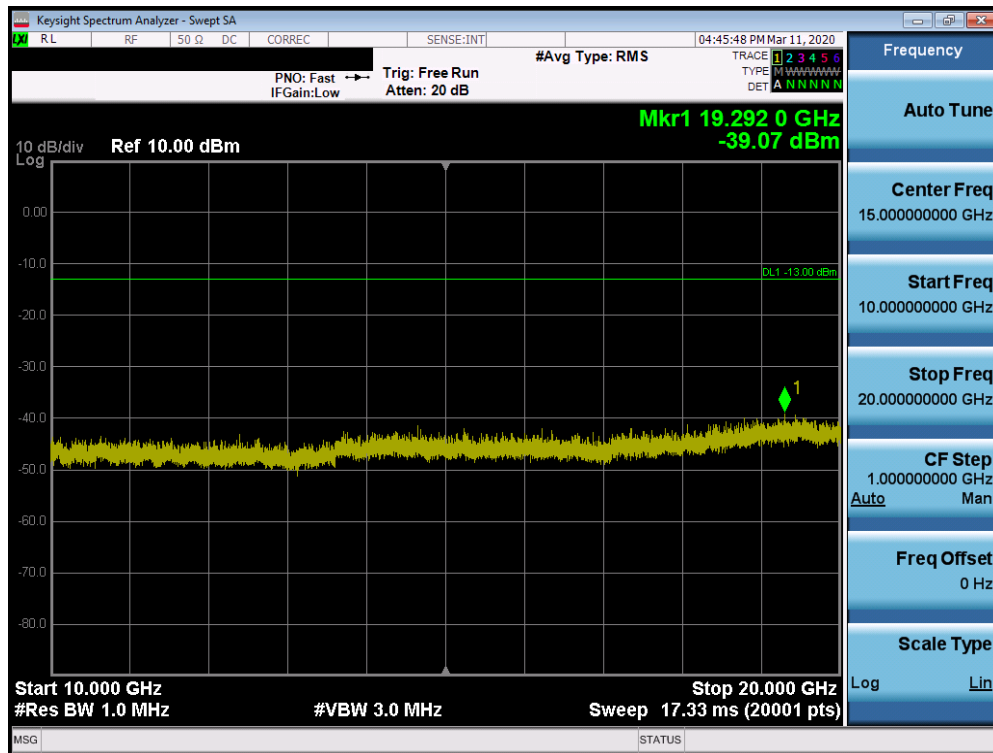


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 24 of 85



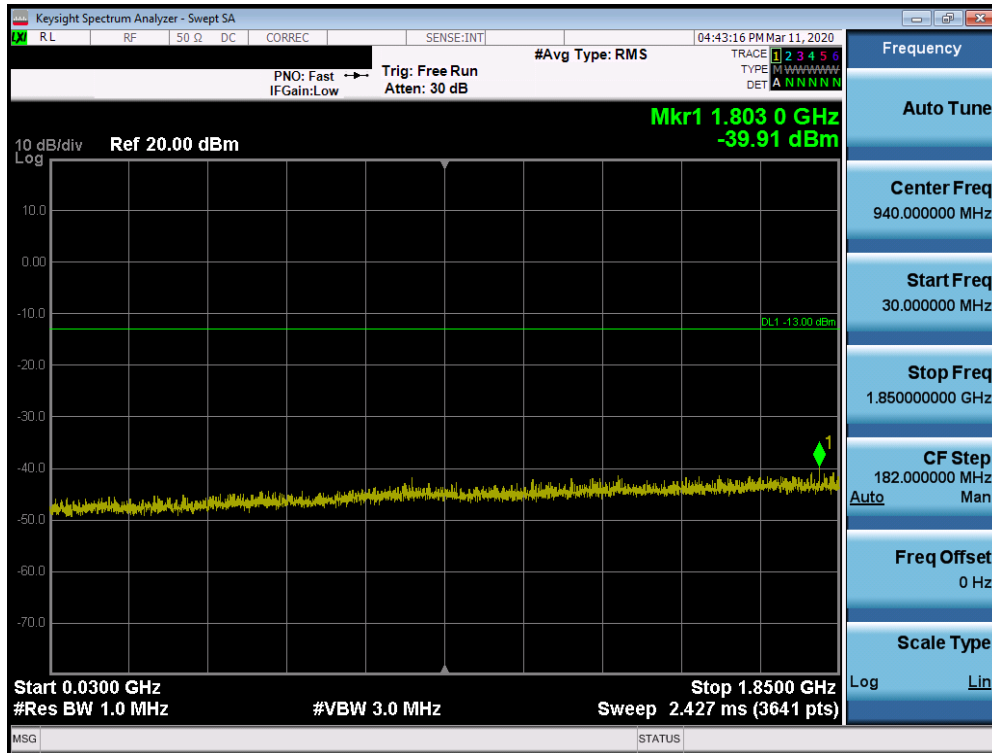


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

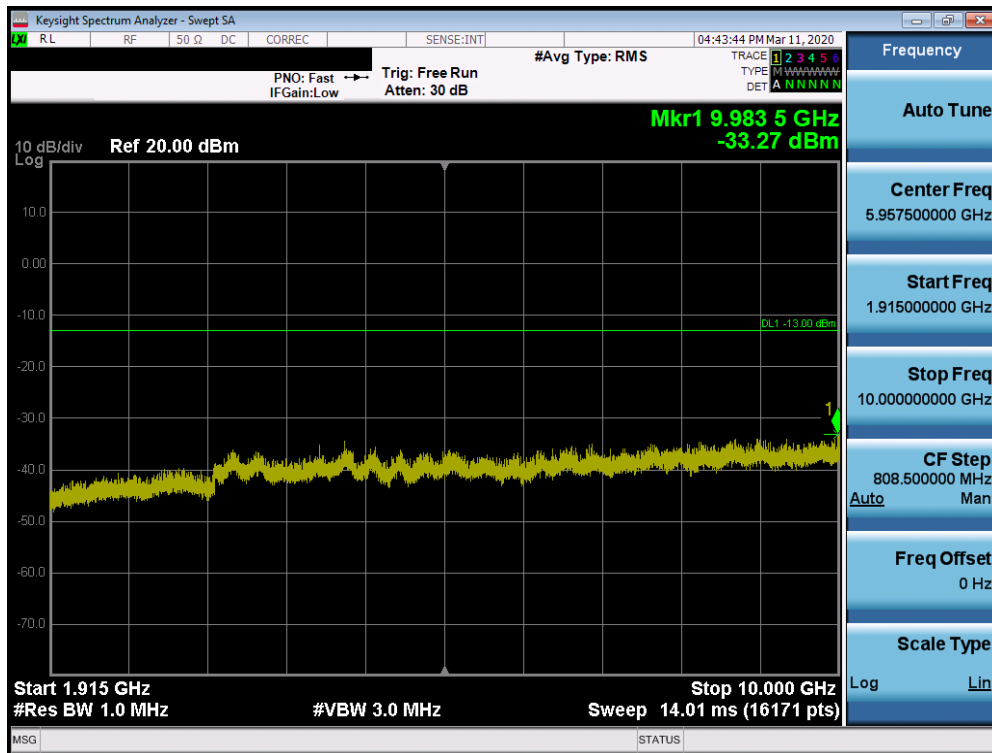

Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 25 of 85

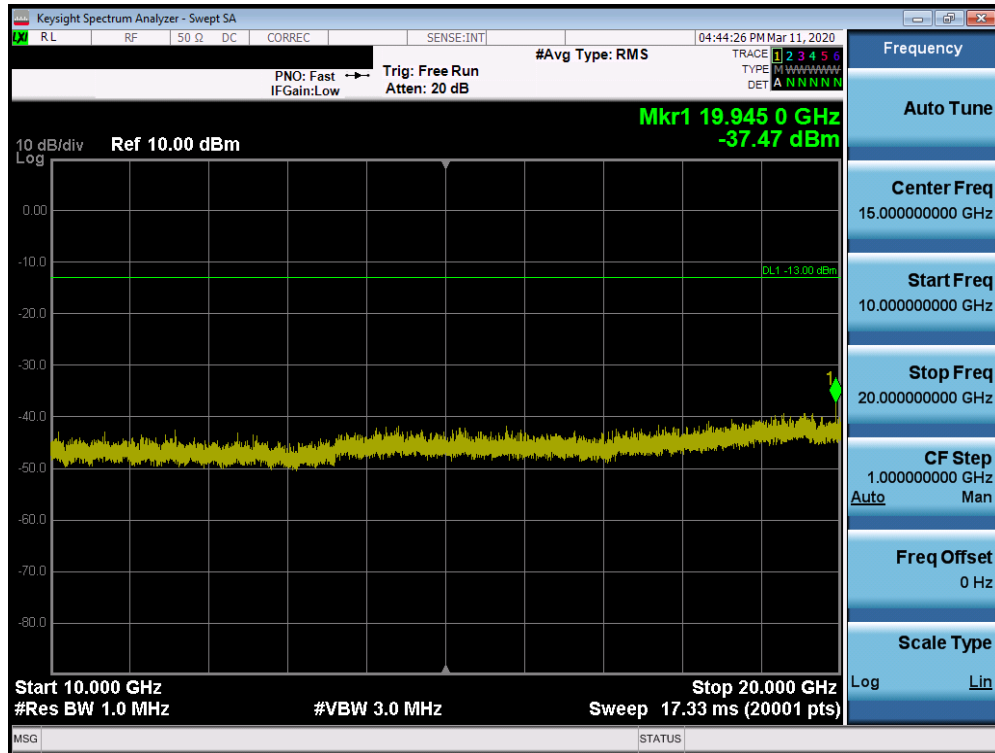


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 26 of 85

## Cellular WCDMA Mode

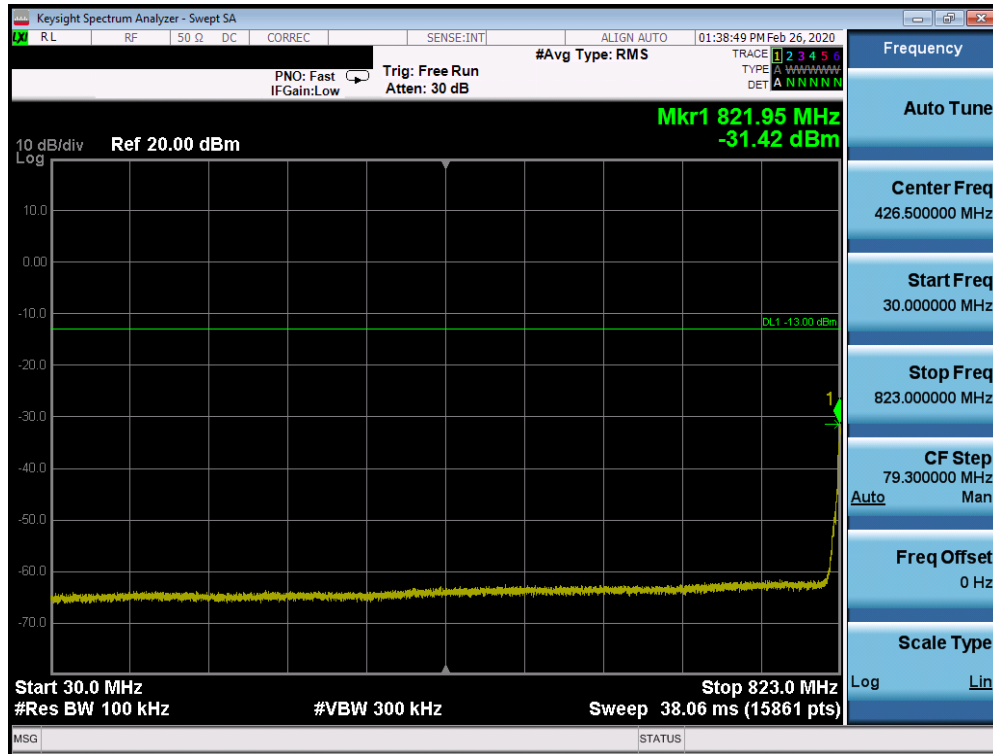


Plot 7-26. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

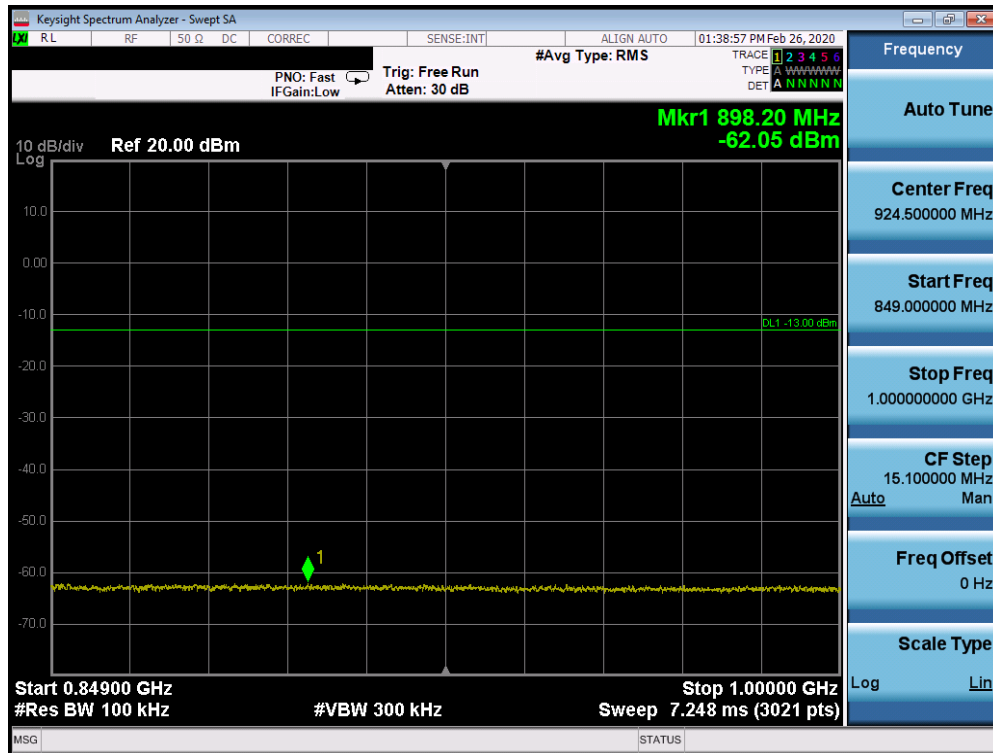


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 27 of 85

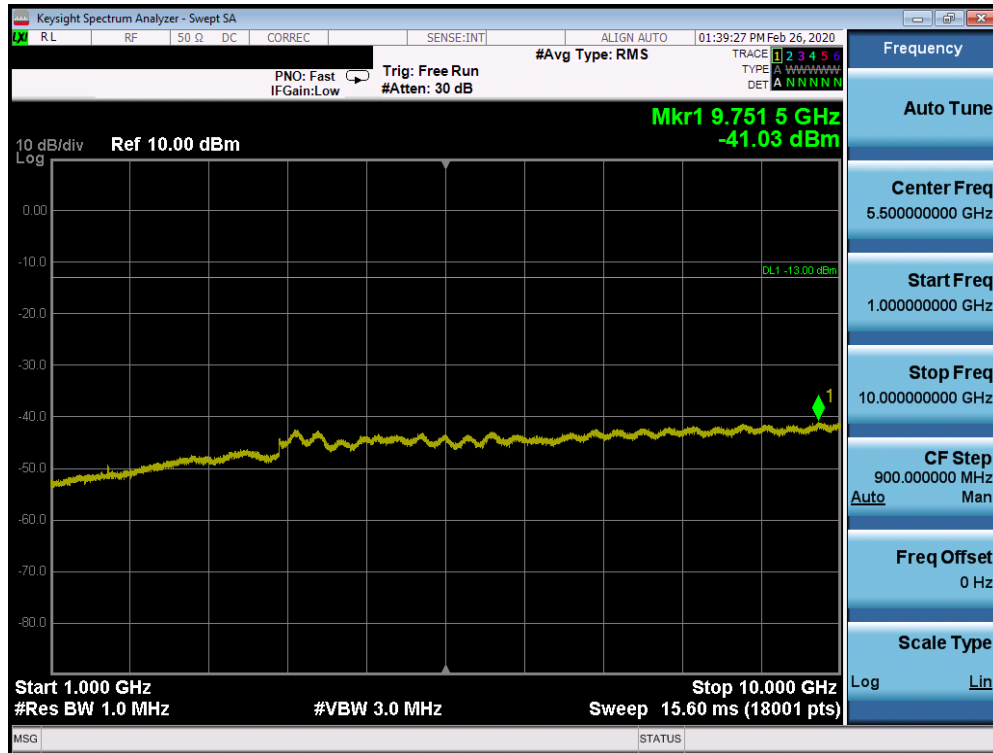


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

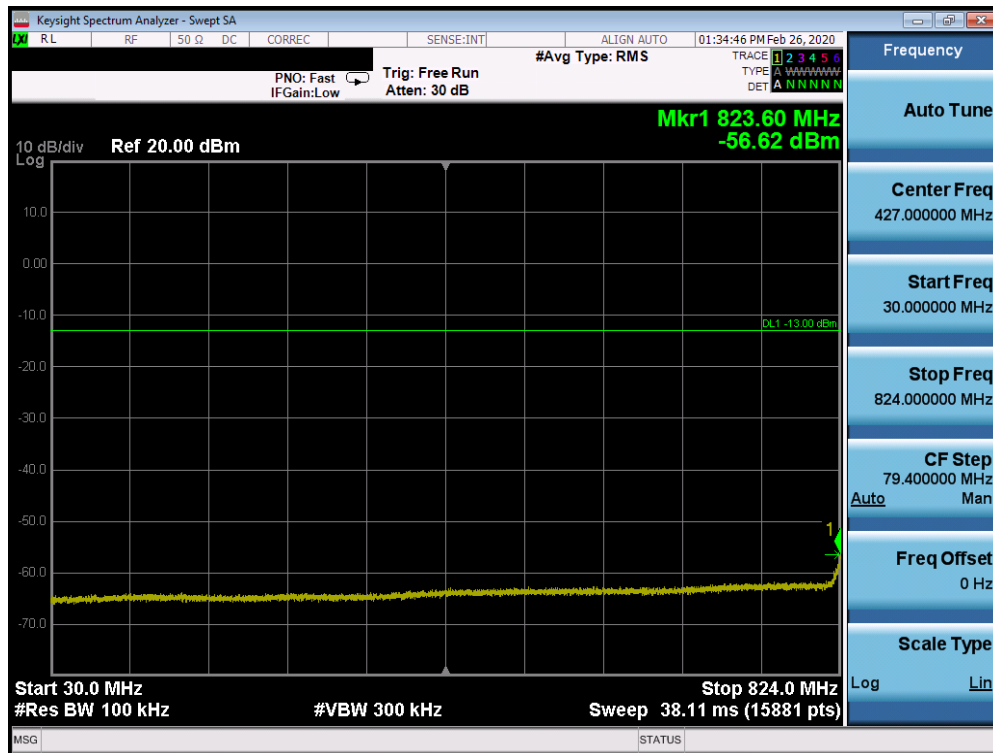


Plot 7-29. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 28 of 85

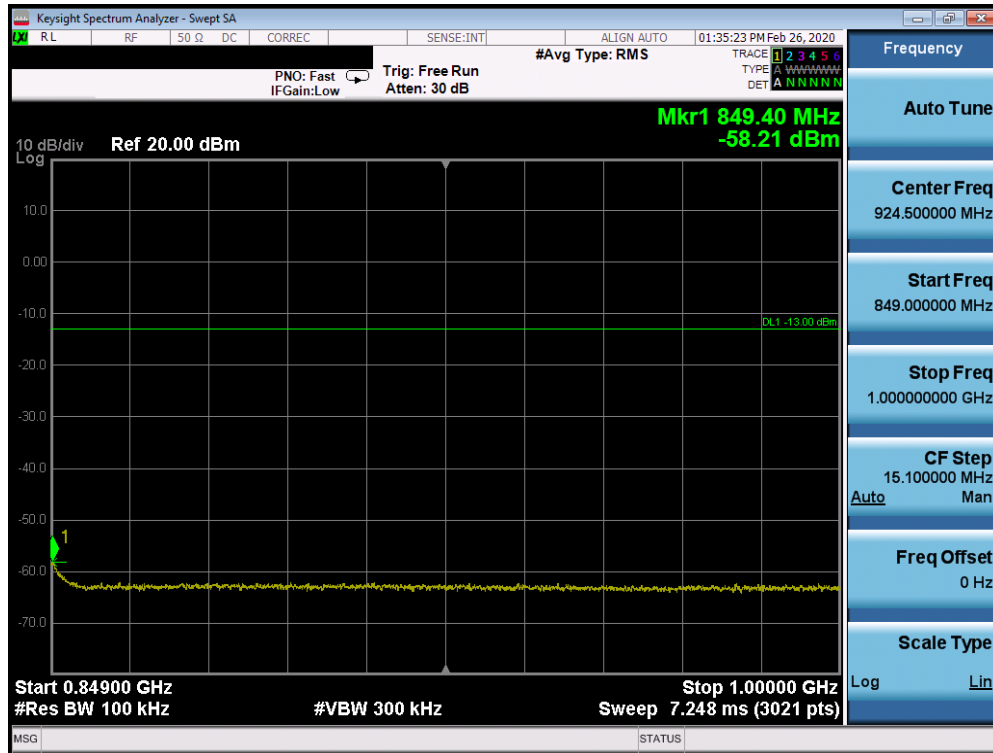


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

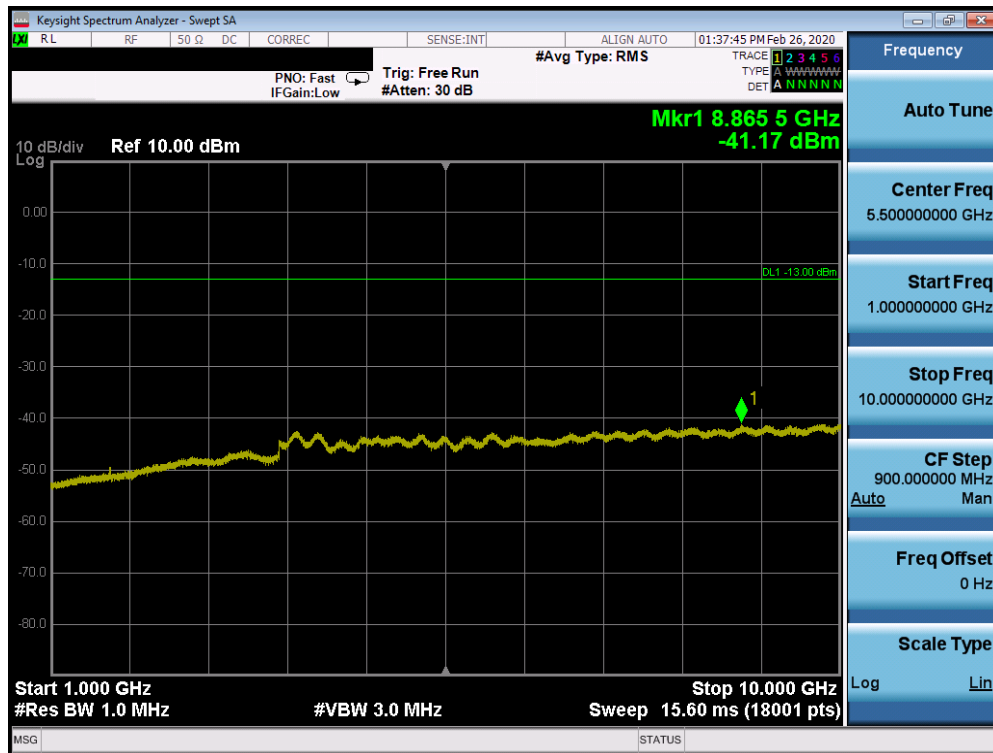


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 29 of 85

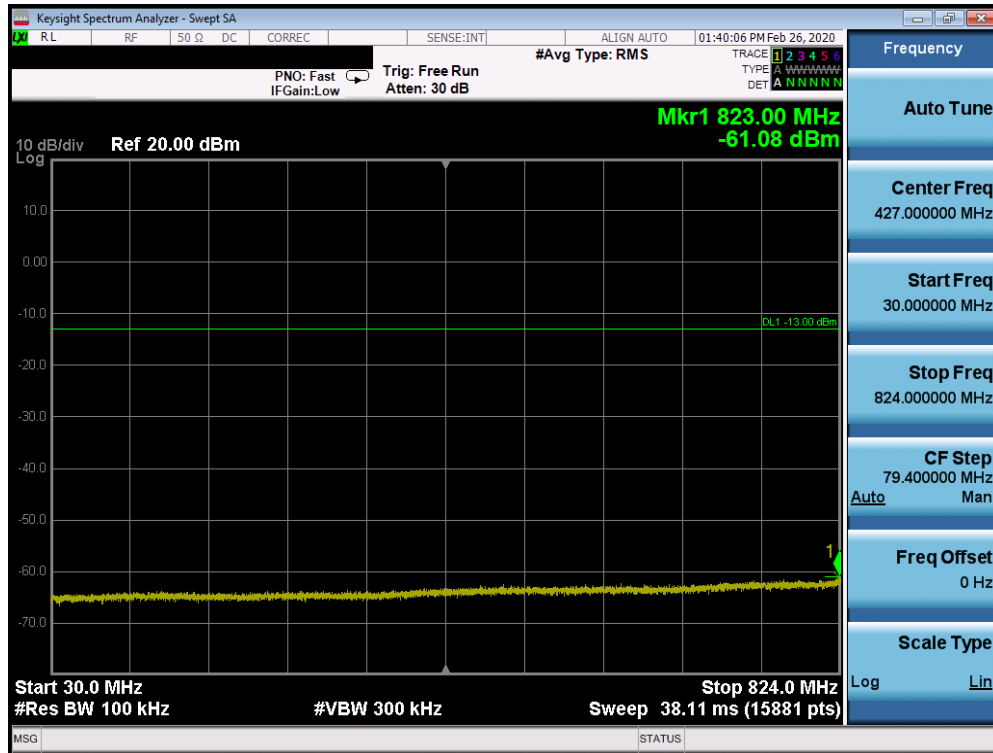


Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

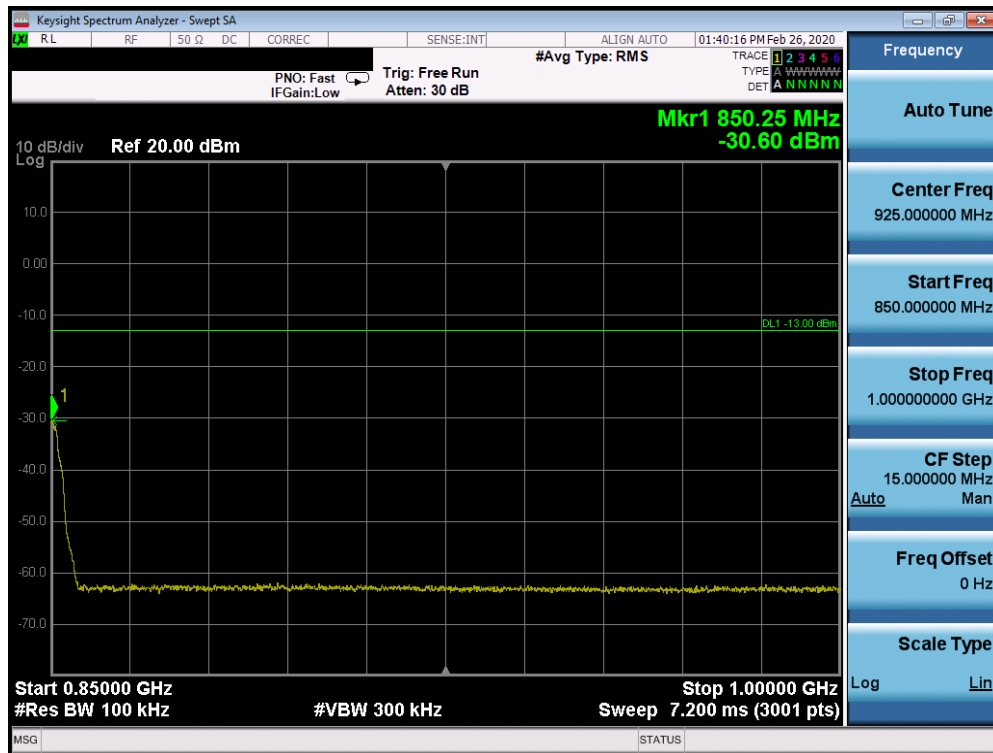

Plot 7-33. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 30 of 85

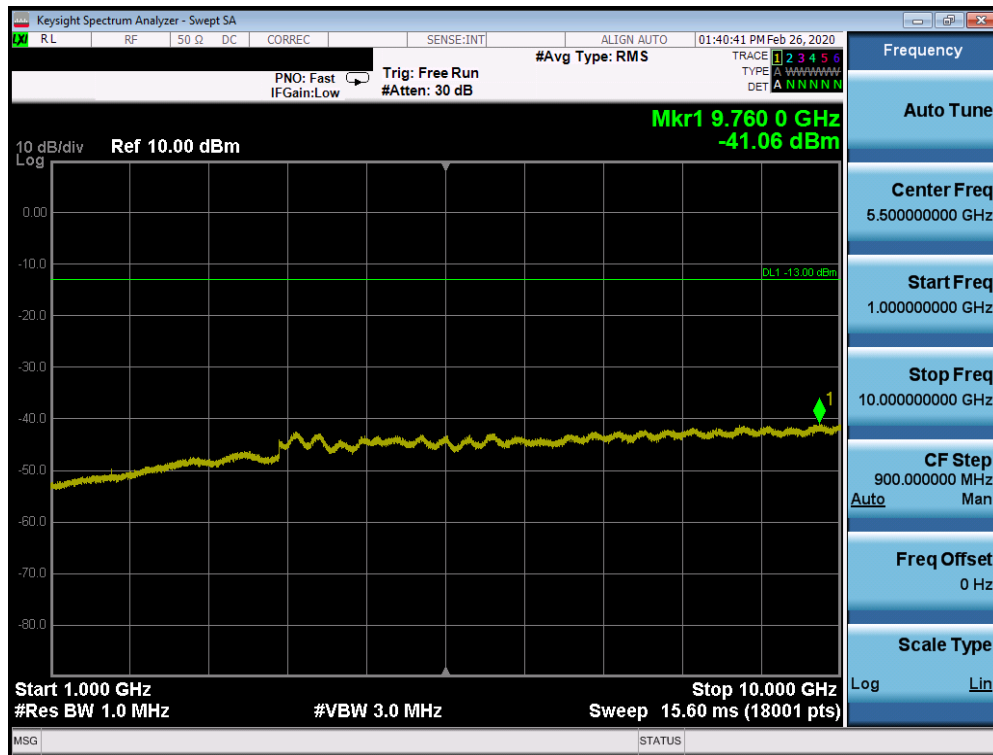


Plot 7-34. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 31 of 85

## AWS WCDMA Mode

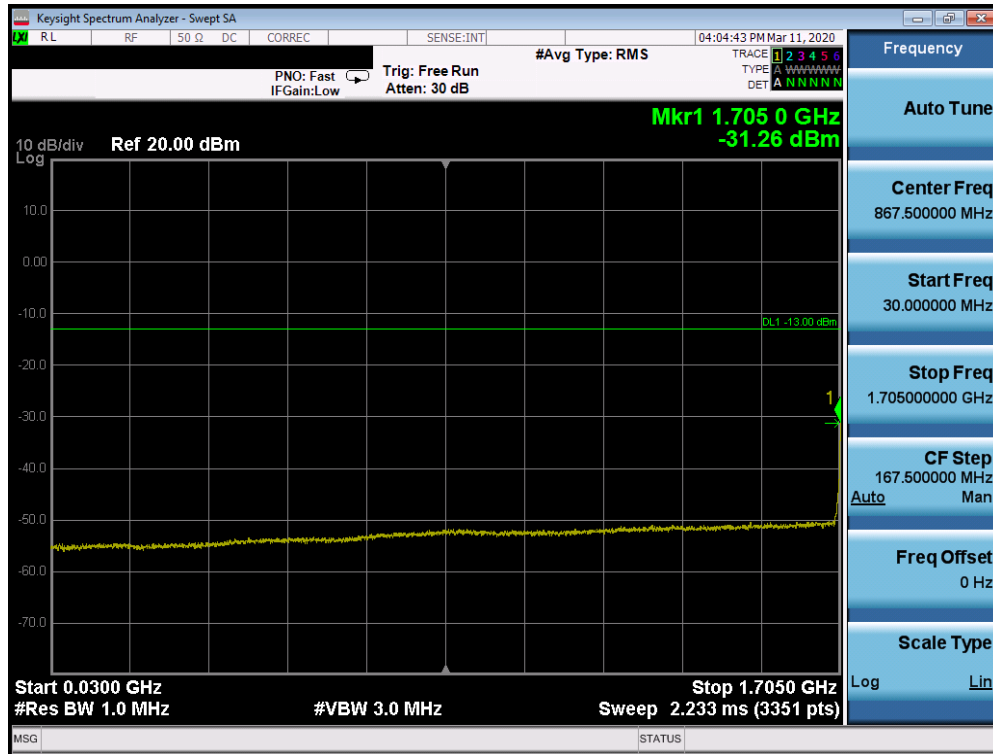


Plot 7-35. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

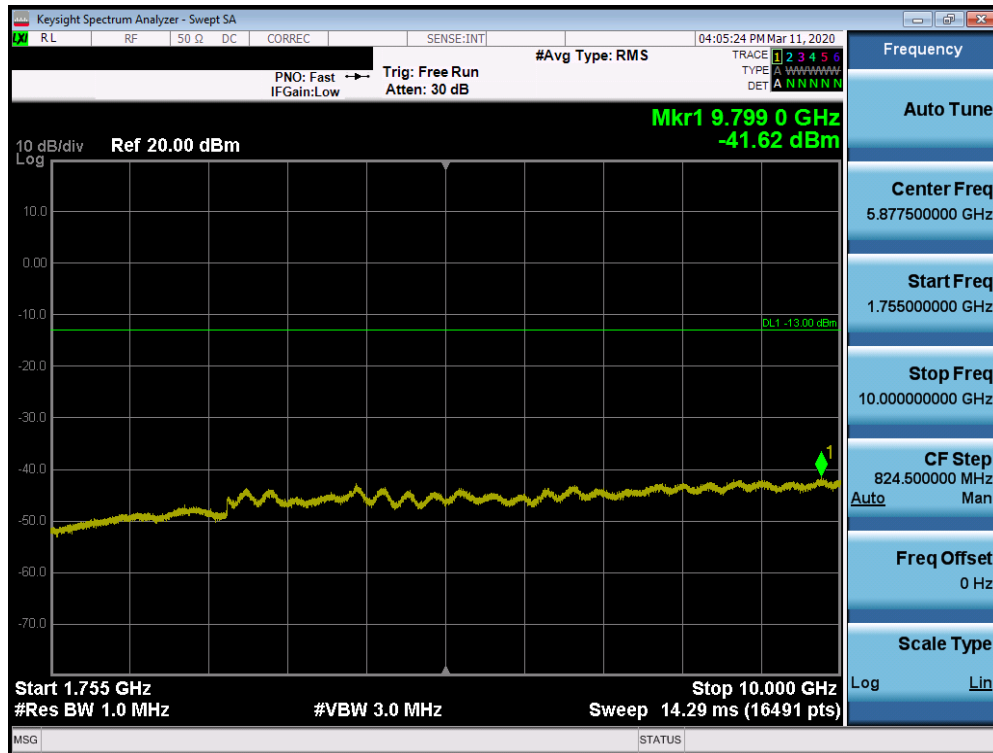


Plot 7-36. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 32 of 85



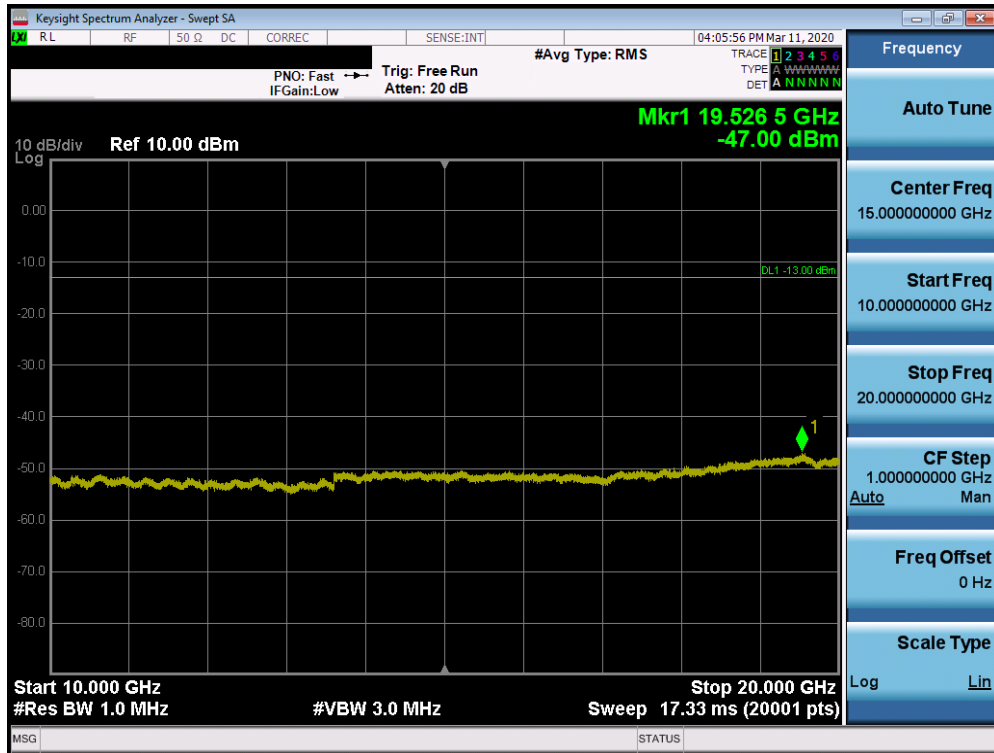


Plot 7-37. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

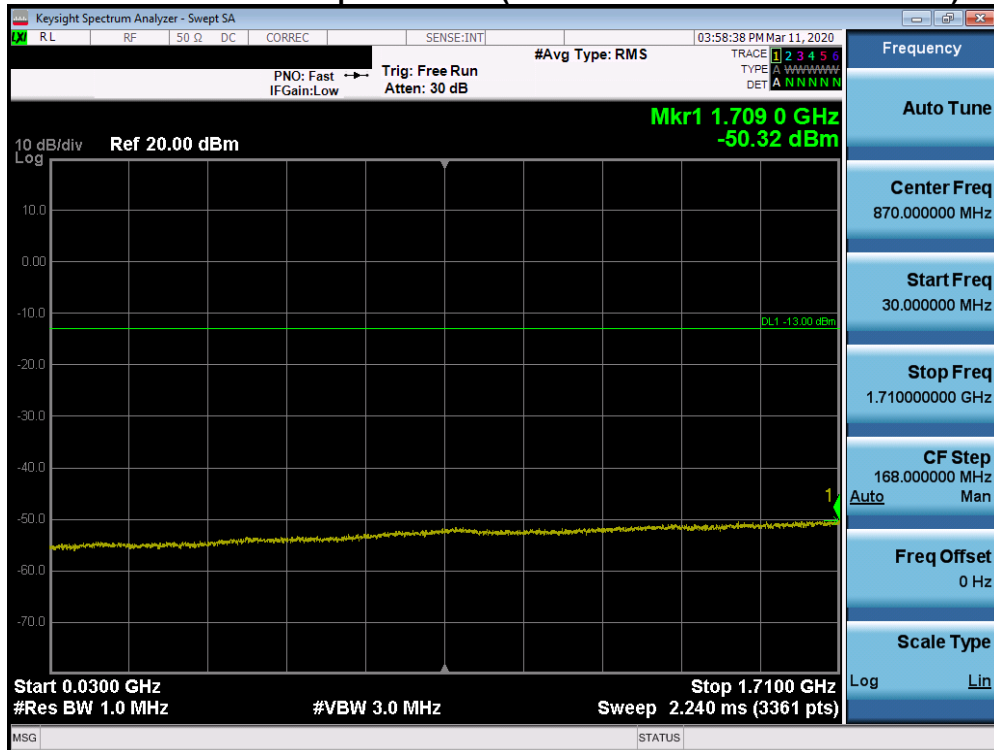


Plot 7-38. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 33 of 85

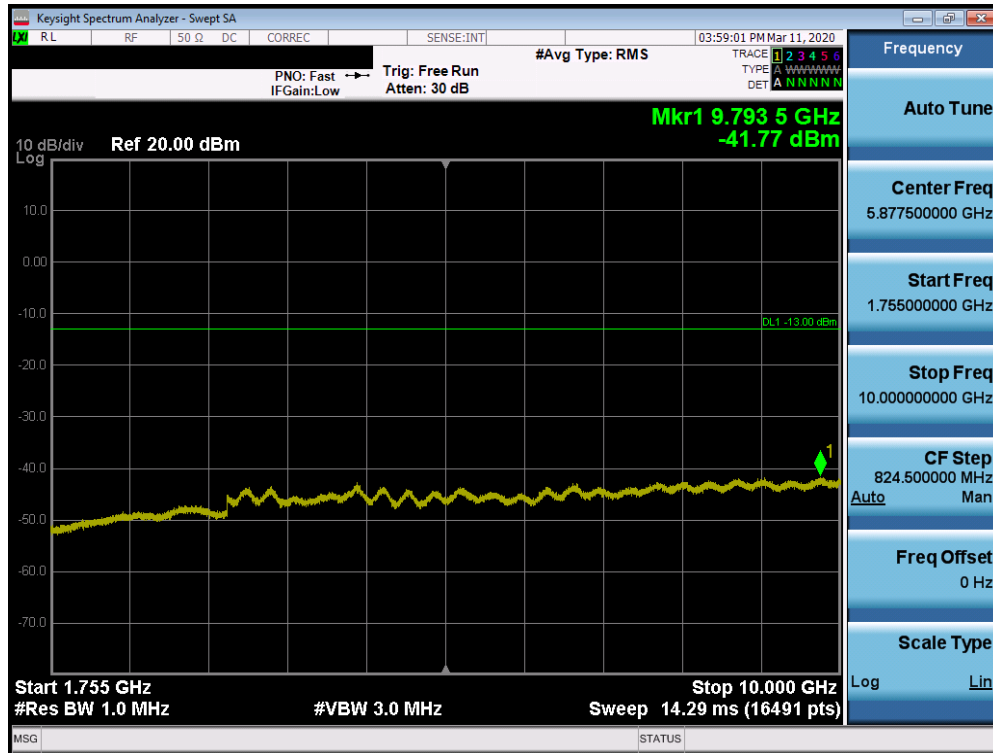


Plot 7-39. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

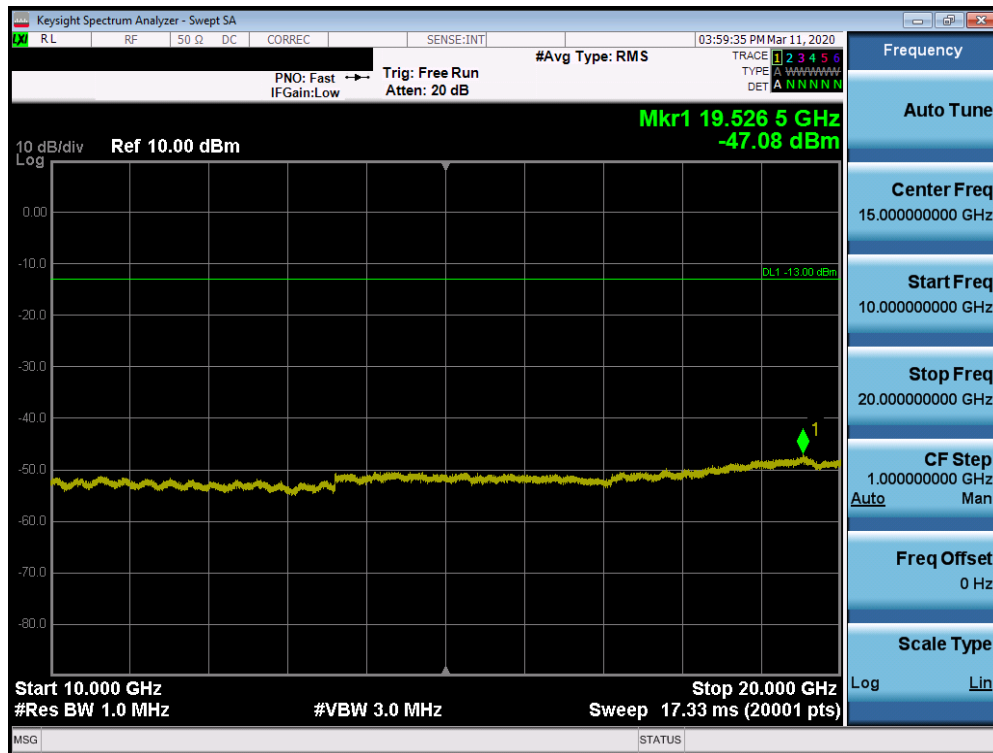


Plot 7-40. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 34 of 85

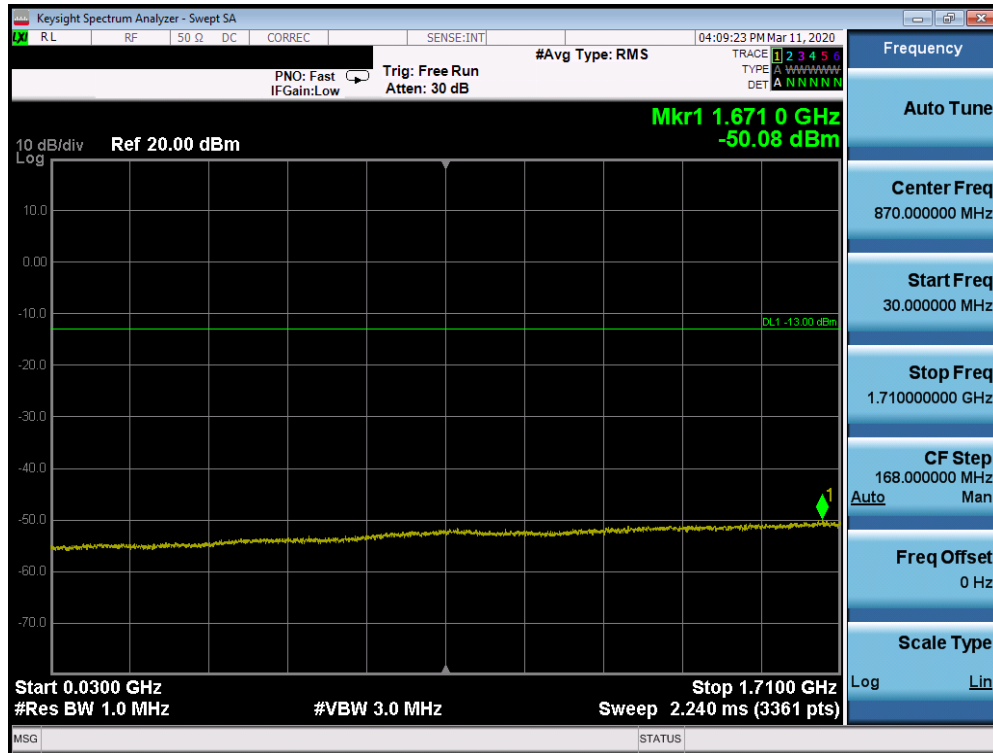


Plot 7-41. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

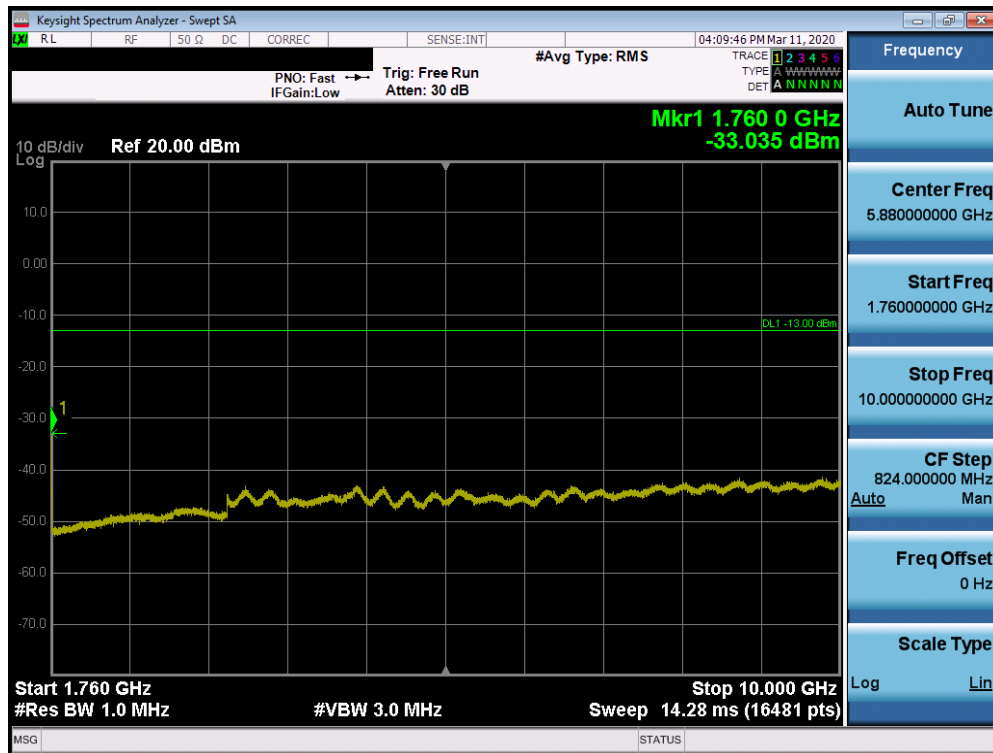

Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 35 of 85

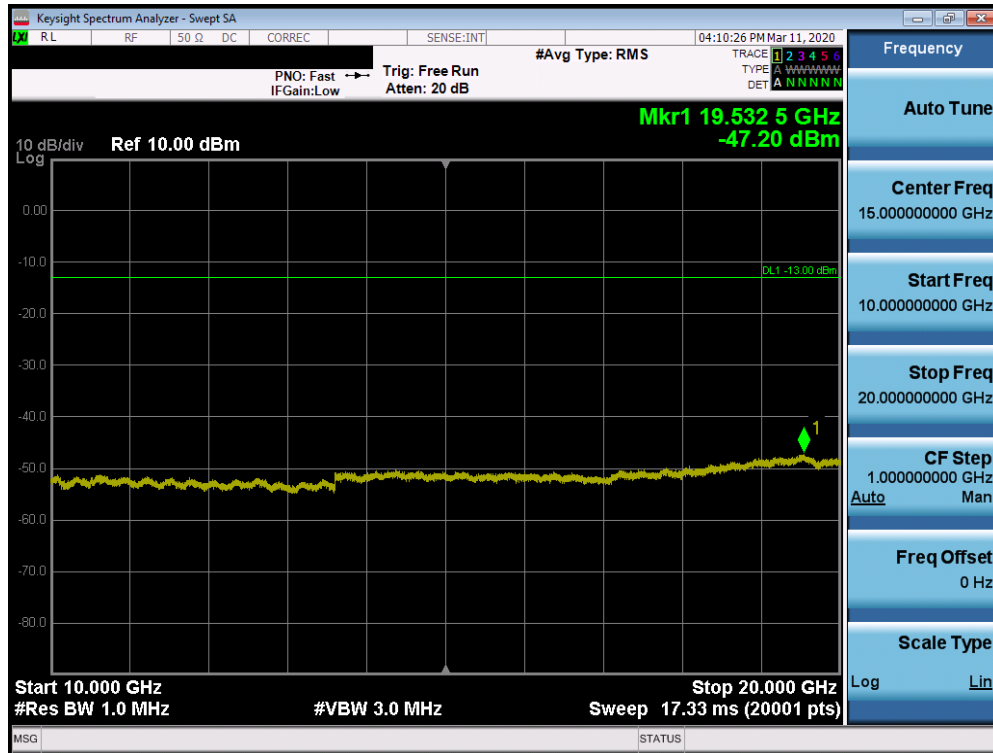


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 36 of 85

## PCS WCDMA Mode

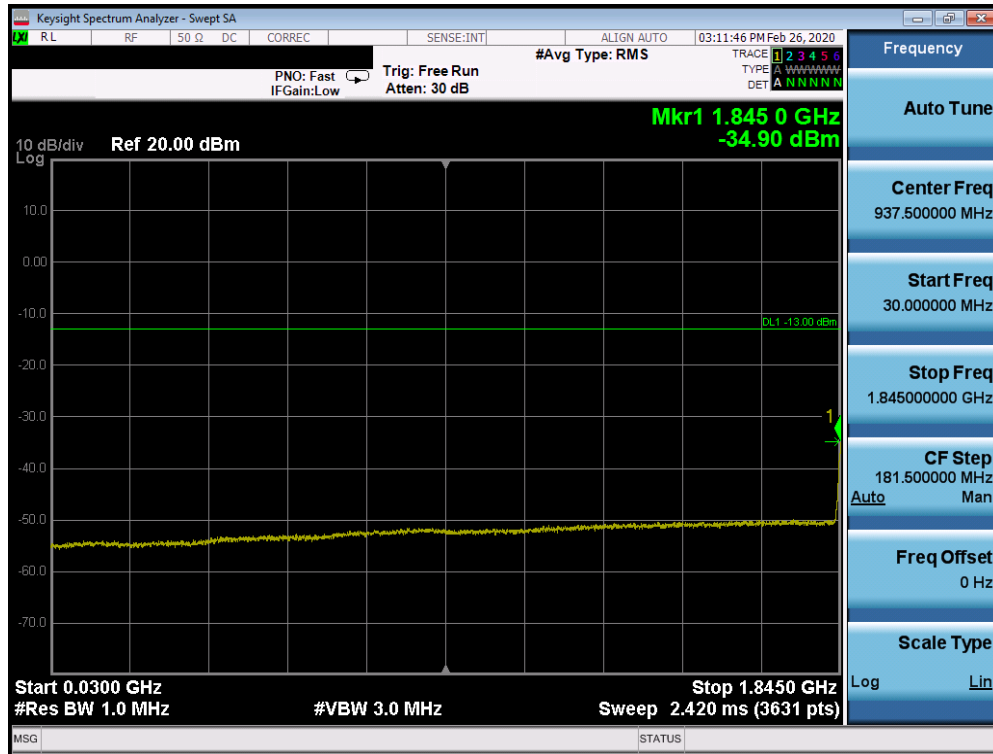


Plot 7-44. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

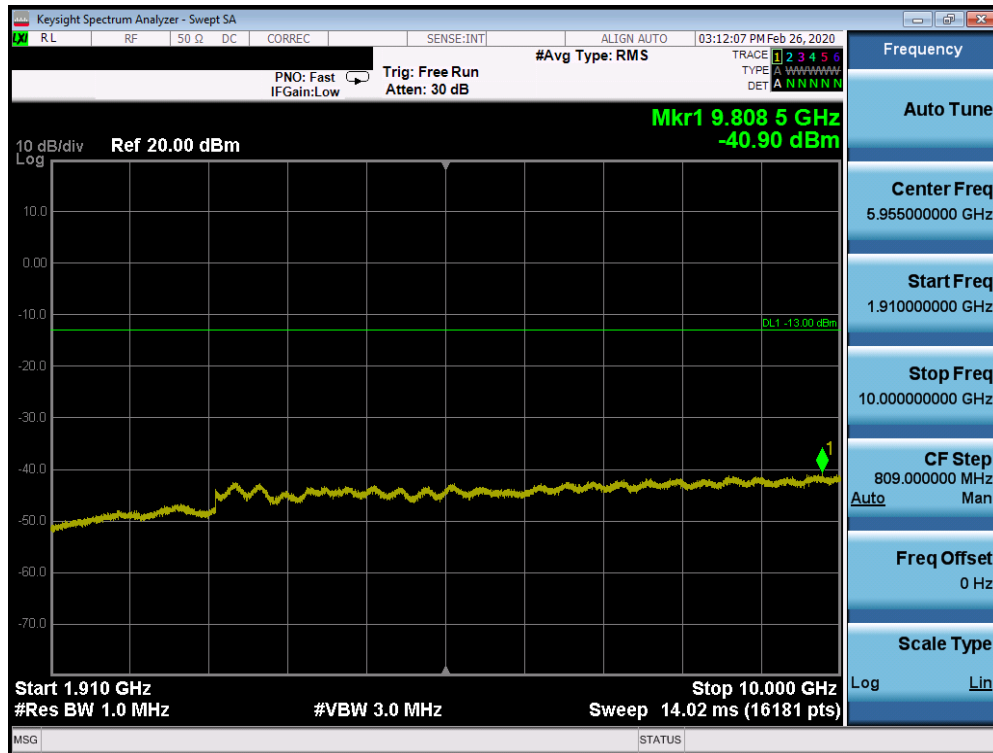


Plot 7-45. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 37 of 85

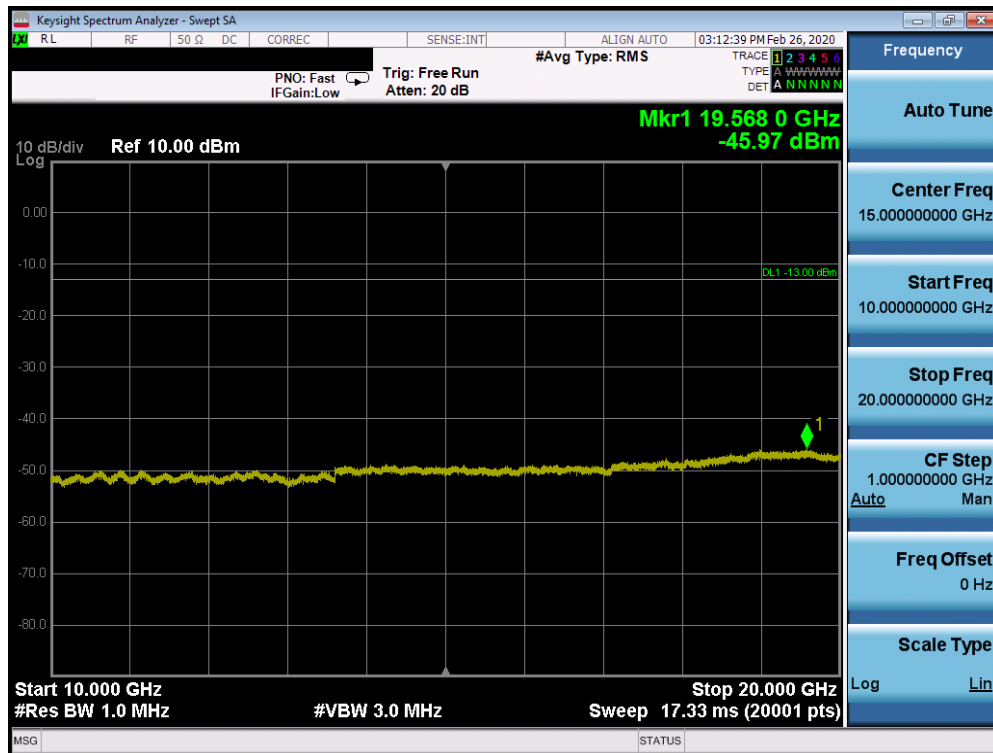


Plot 7-46. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

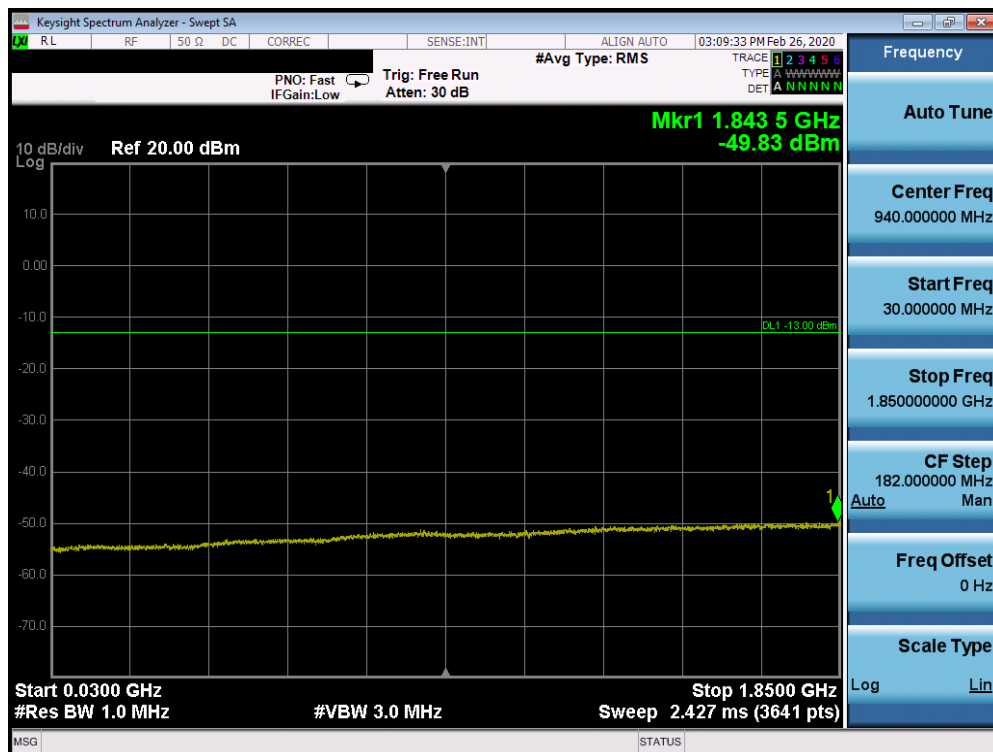


Plot 7-47. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 38 of 85

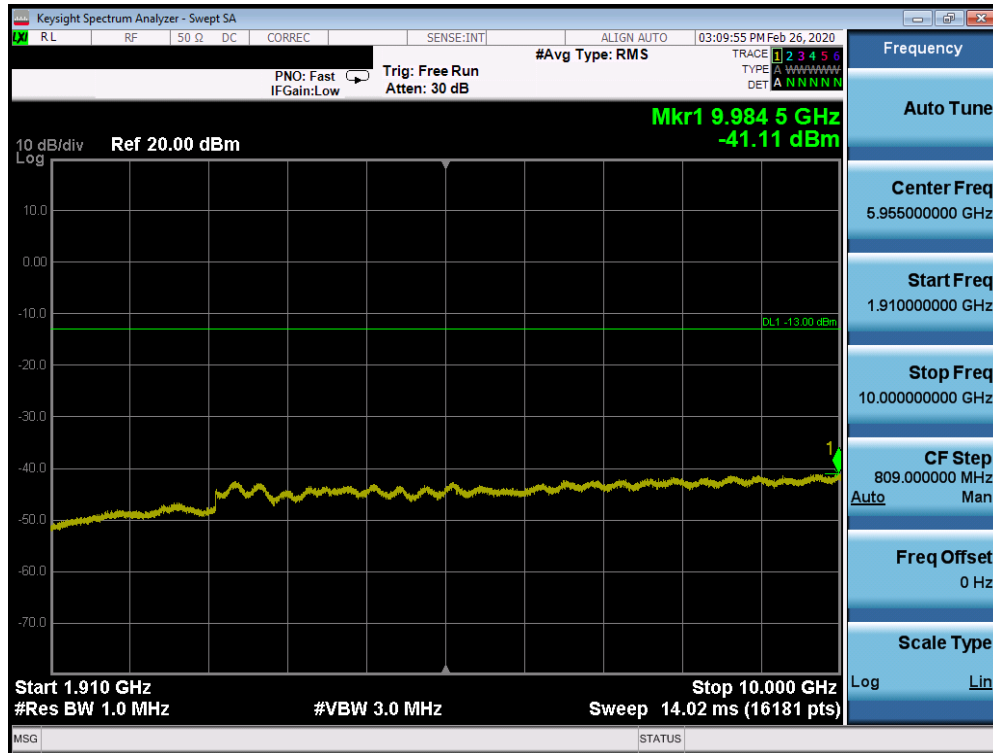


Plot 7-48. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

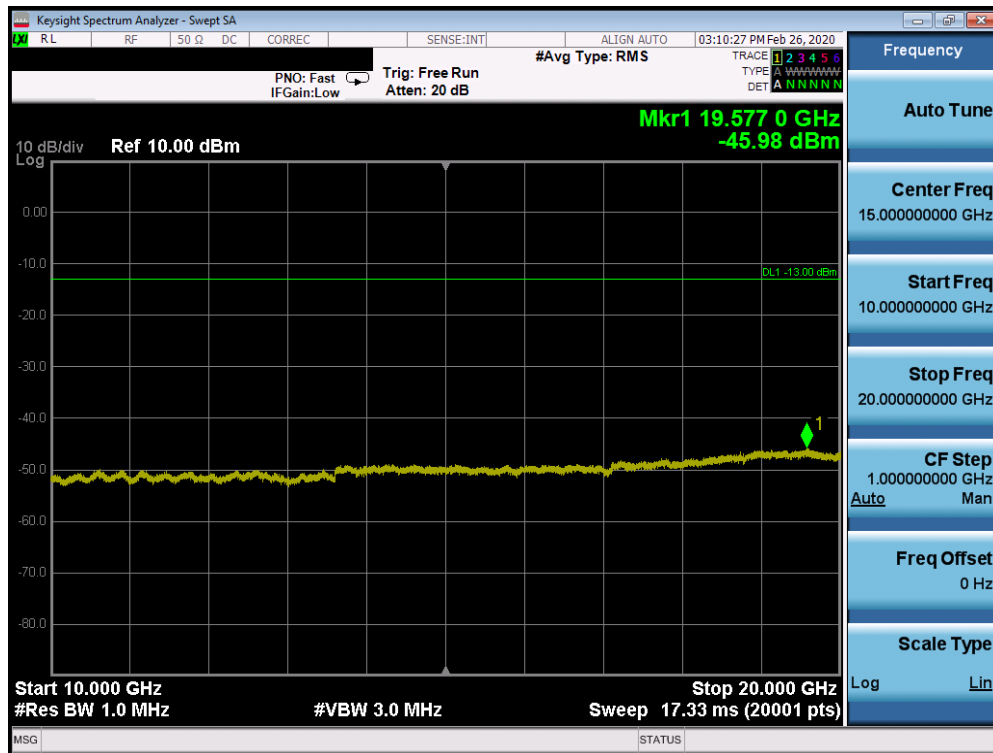


Plot 7-49. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 39 of 85

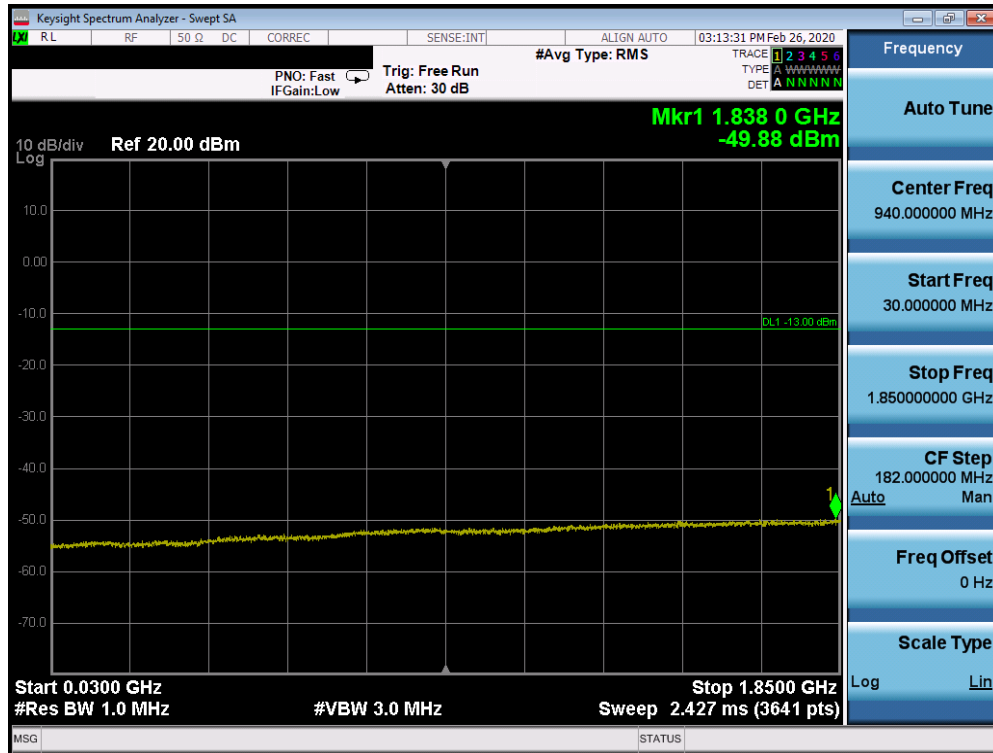


Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

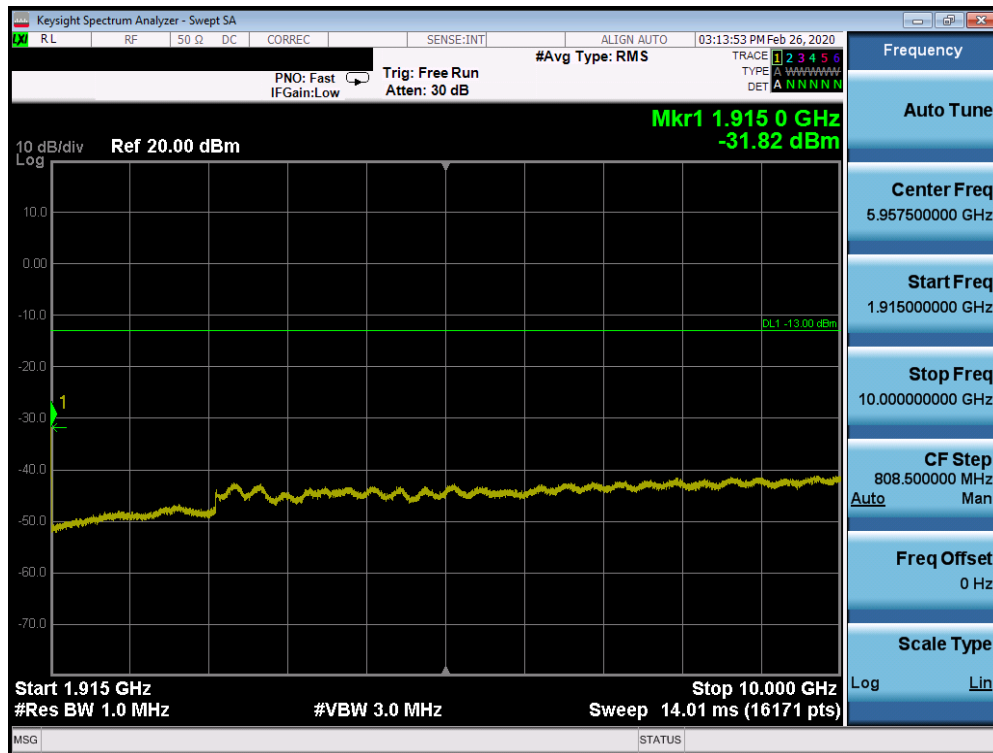

Plot 7-51. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 40 of 85



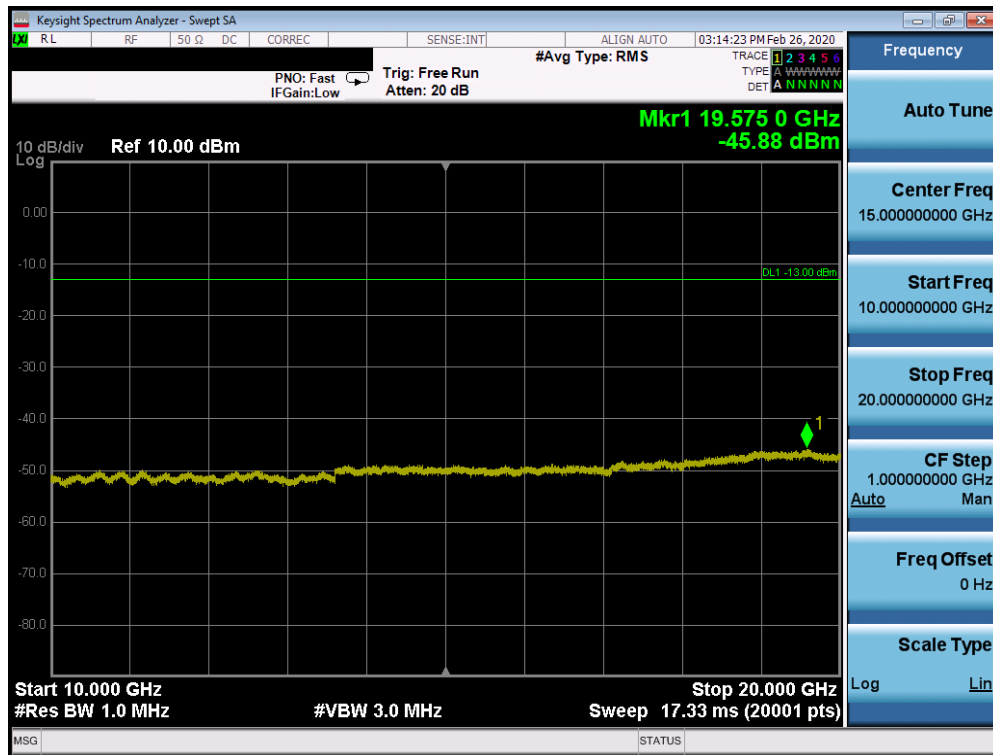

Plot 7-52. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 41 of 85

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3.  $\text{RBW} \geq 1\%$  of the emission bandwidth
4.  $\text{VBW} \geq 3 \times \text{RBW}$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**


### Test Notes

Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 42 of 85



## PCS GPRS Mode

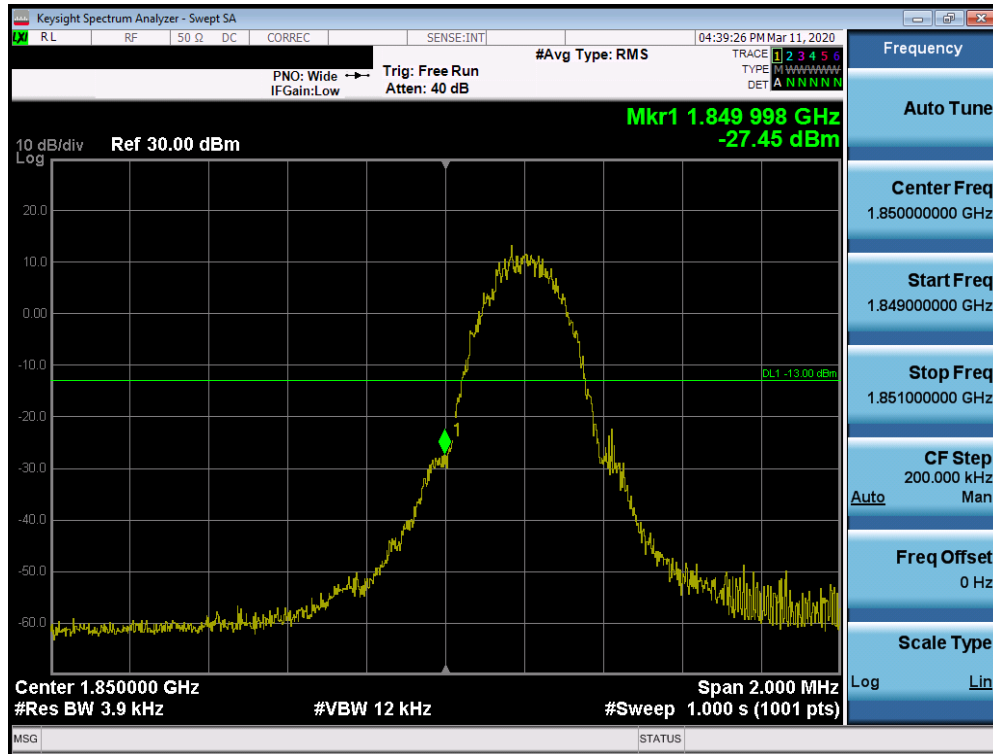


Plot 7-55. Band Edge Plot (PCS GPRS Mode - Low Channel)

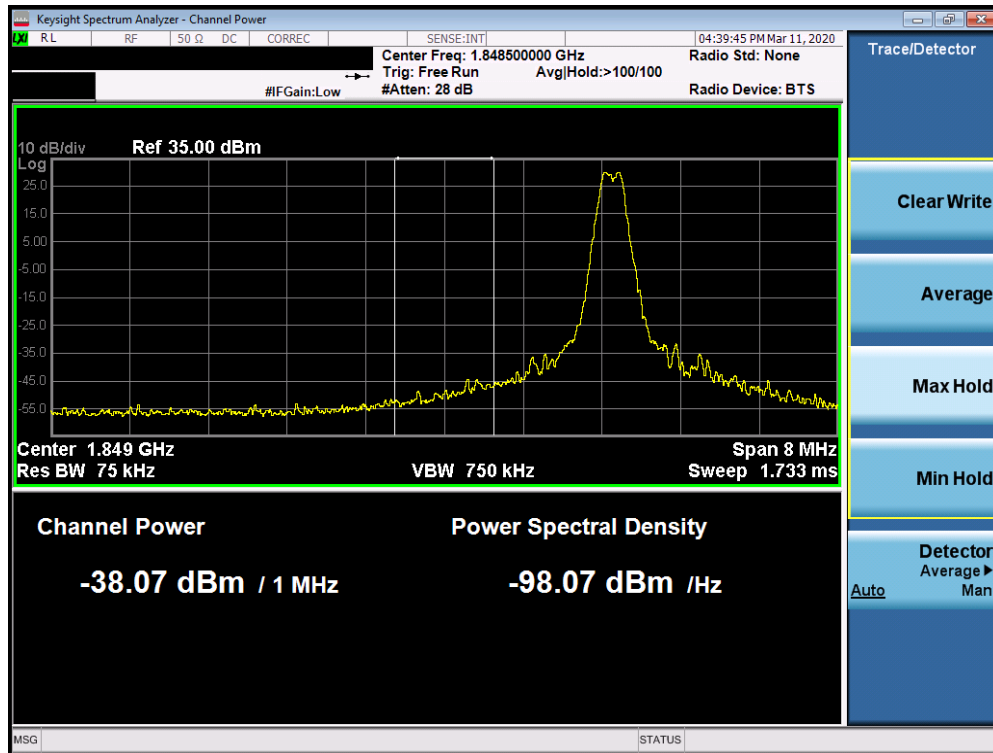


Plot 7-56. 4MHz Span Plot (PCS GPRS Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 44 of 85

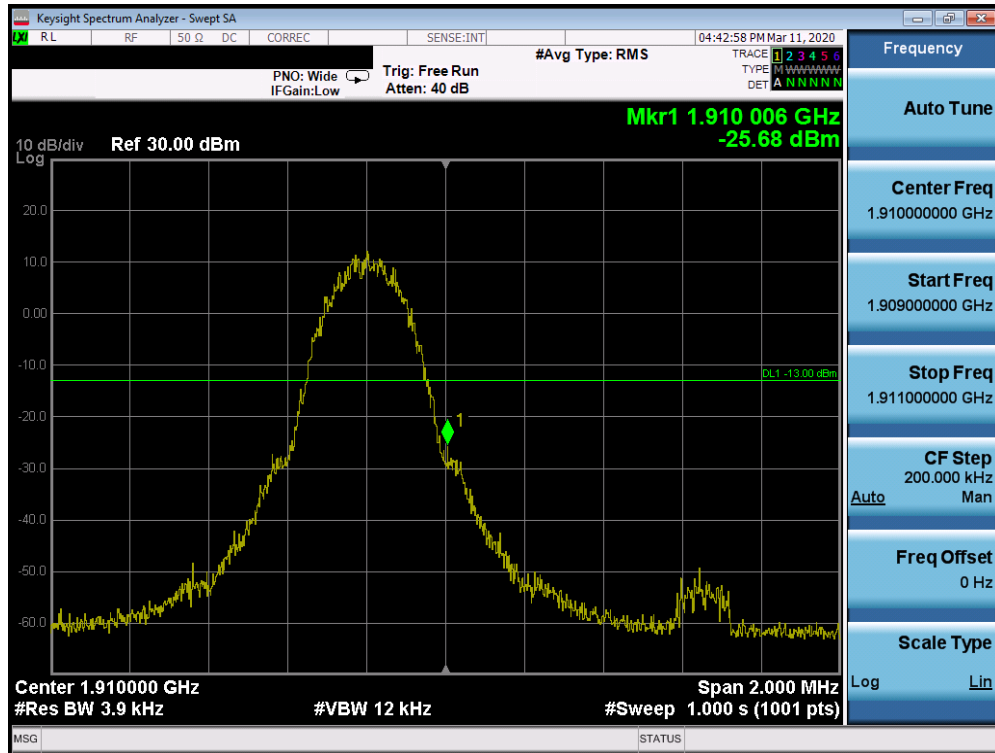


Plot 7-57. Band Edge Plot (PCS GPRS Mode - High Channel)

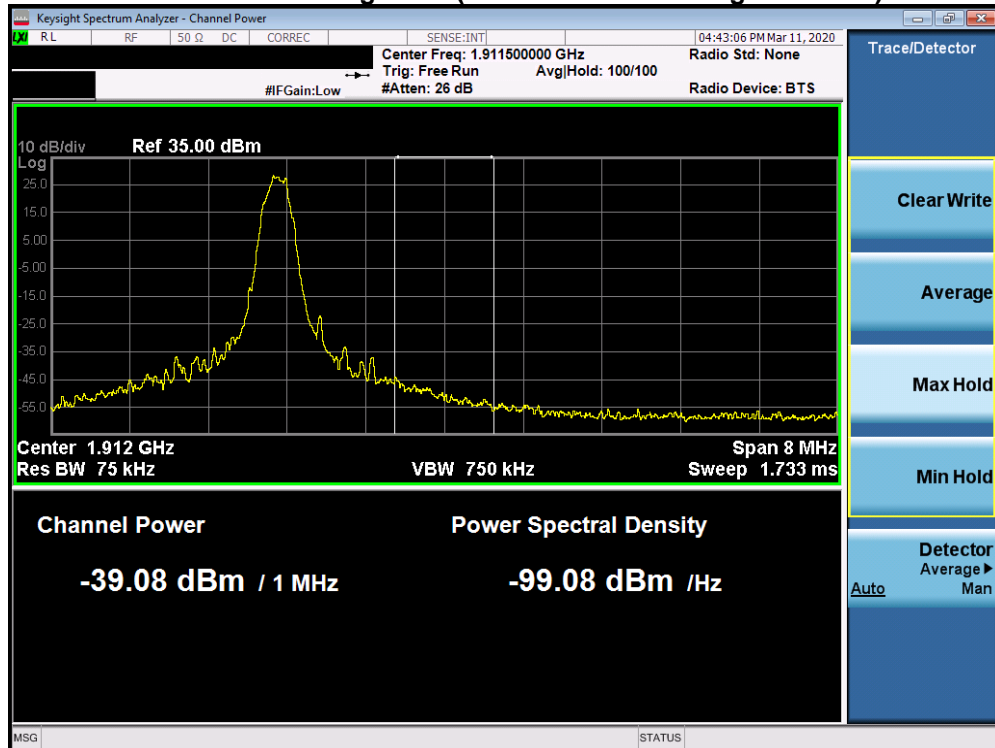


Plot 7-58. 4MHz Span Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 45 of 85

## Cellular WCDMA Mode

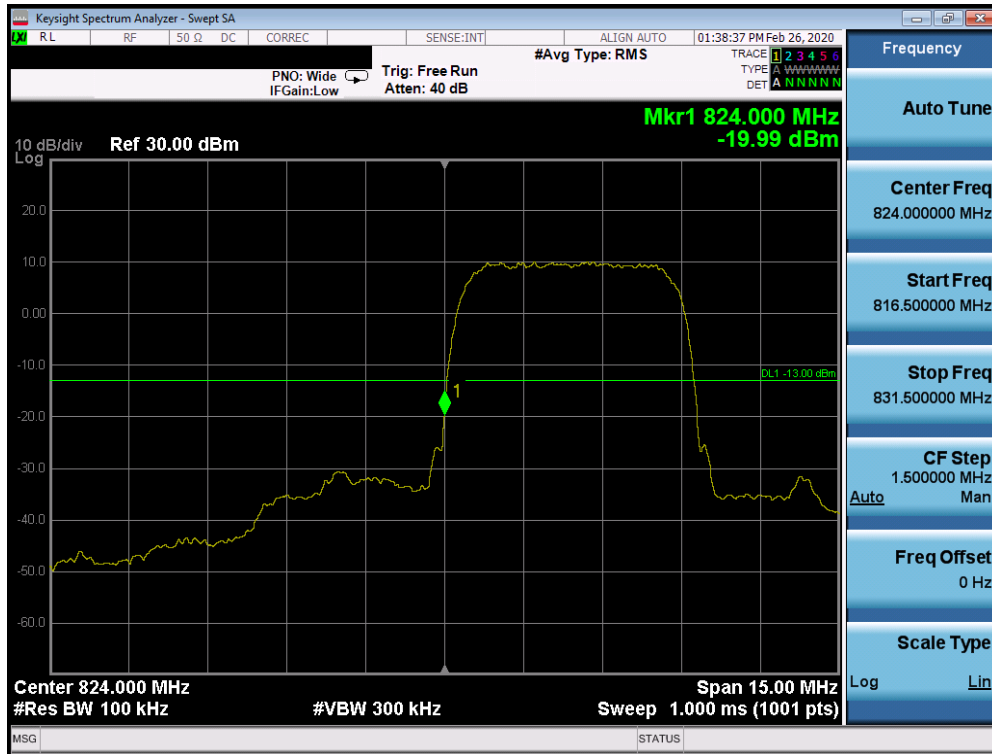


Plot 7-59. Band Edge Plot (Cellular WCDMA Mode - Low Channel)

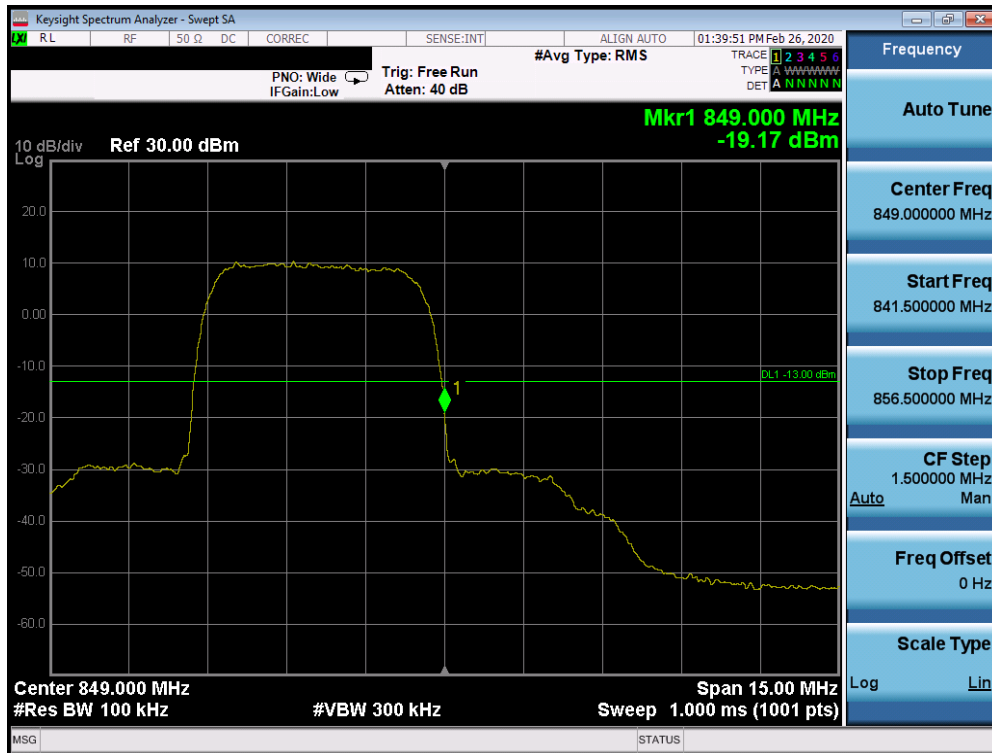


Plot 7-60. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 46 of 85

## AWS WCDMA Mode

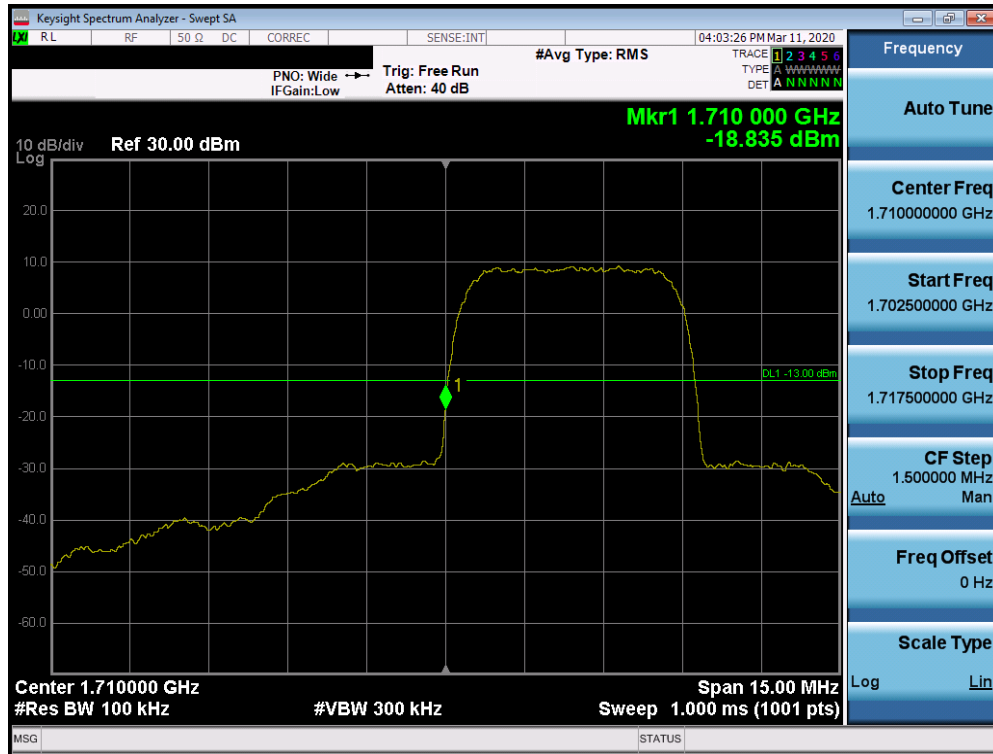

Plot 7-61. Band Edge Plot (AWS WCDMA Mode - Low Channel)

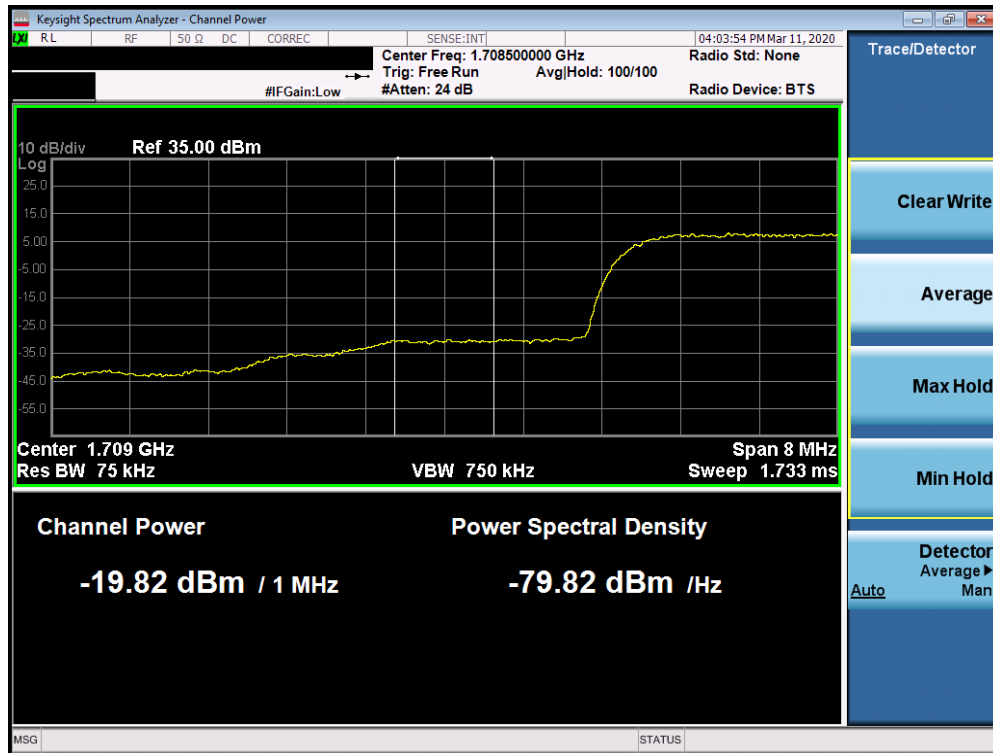

Plot 7-62. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 47 of 85










Plot 7-67. Band Edge Plot (PCS WCDMA Mode - High Channel)

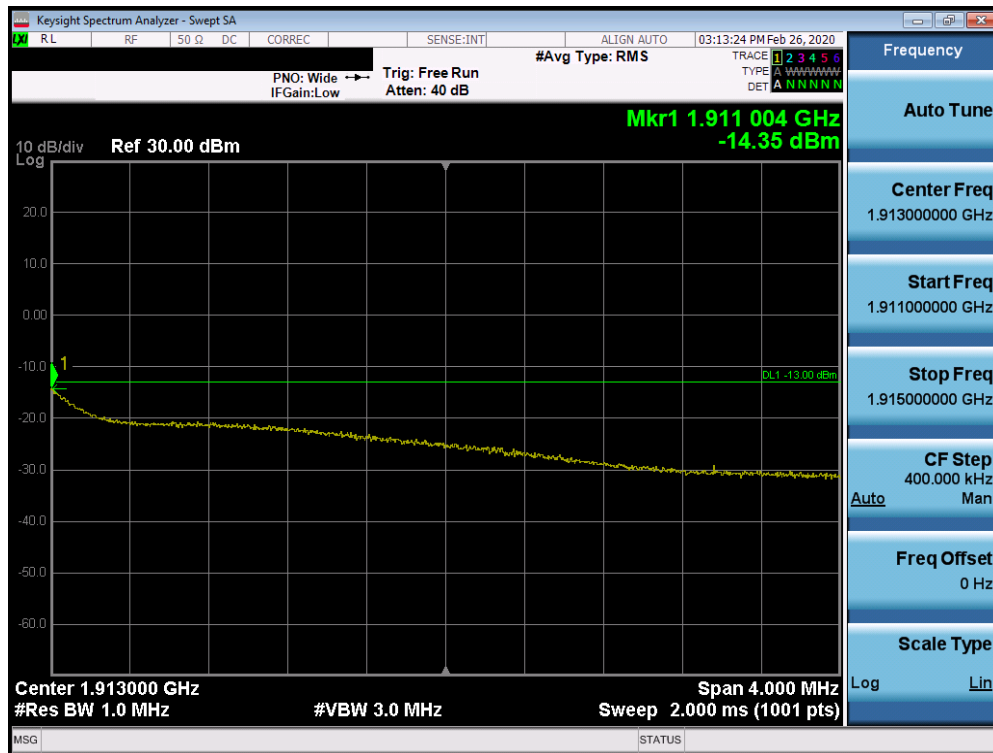

Plot 7-68. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 50 of 85

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**


### Test Notes

None

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 51 of 85

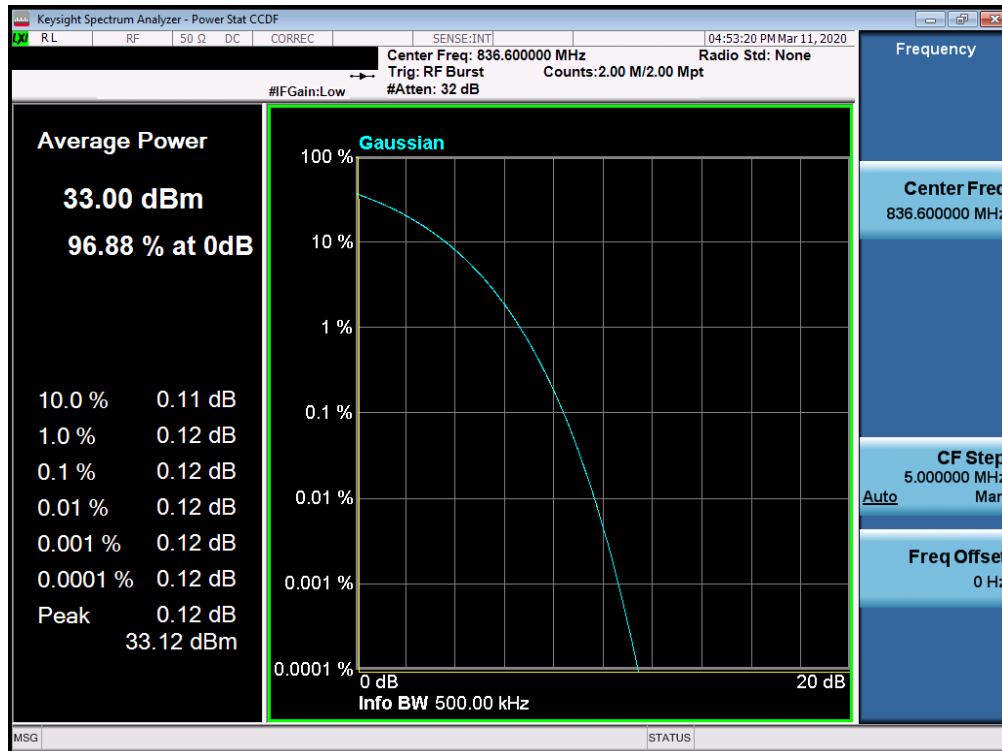


Plot 7-69. Peak-Average Ratio Plot (Cellular GPRS Mode)

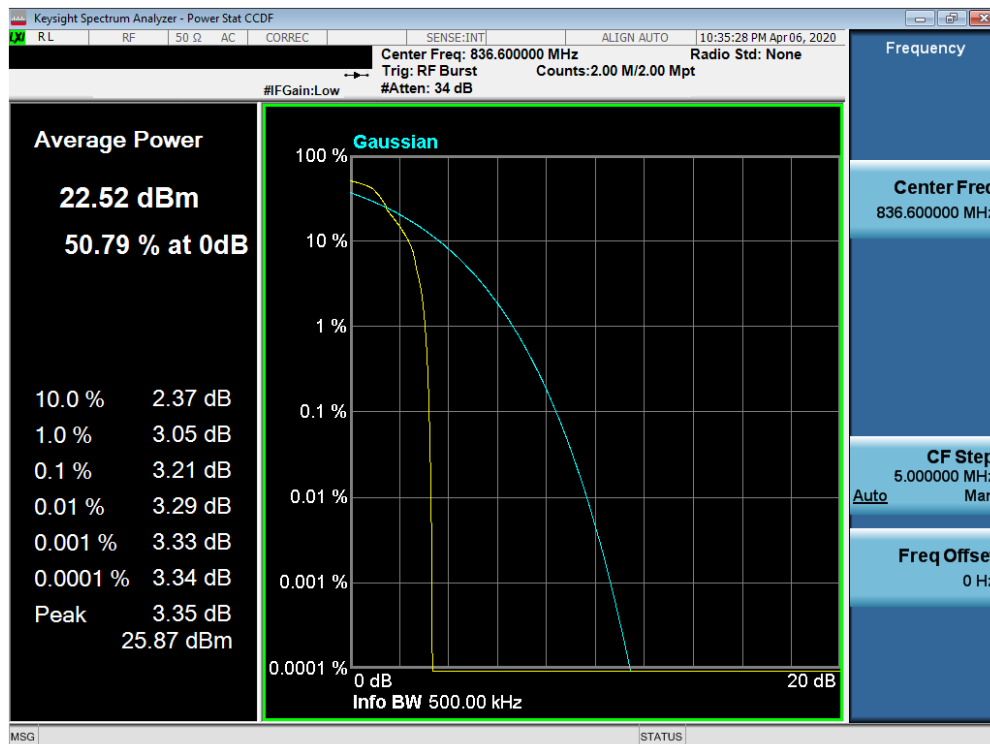


Plot 7-70. Peak-Average Ratio Plot (EDGE850 Mode)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 52 of 85

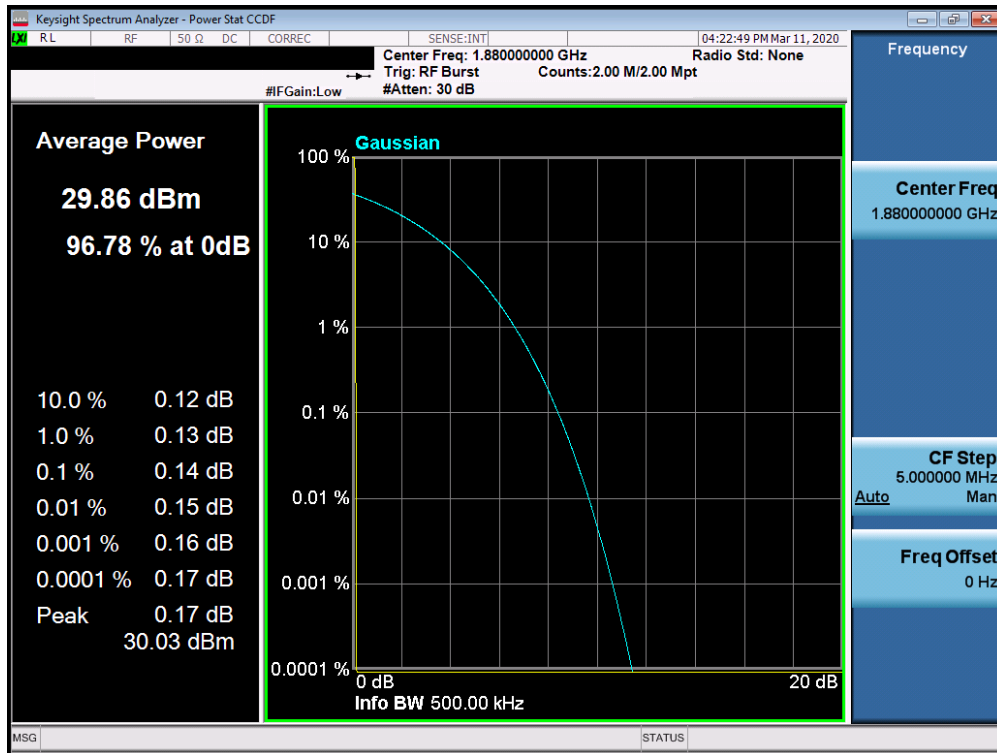


Plot 7-71. Peak-Average Ratio Plot (PCS GPRS Mode)

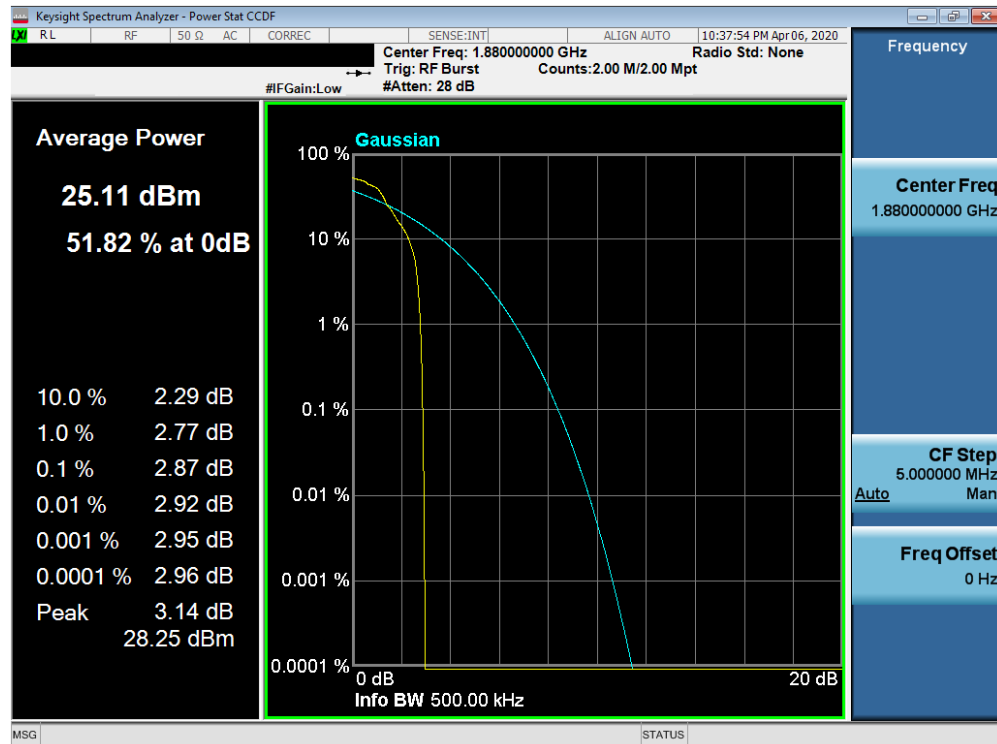


Plot 7-72. Peak-Average Ratio Plot (EDGE1900 Mode)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 53 of 85

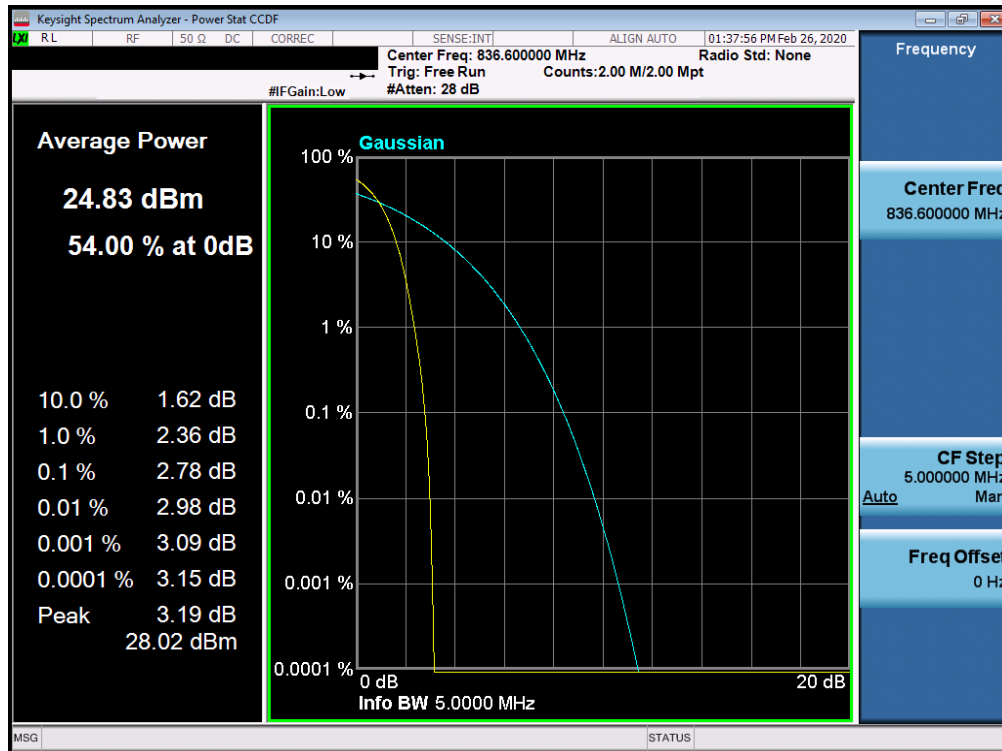


Plot 7-73. Peak-Average Ratio Plot (Cellular WCDMA Mode)

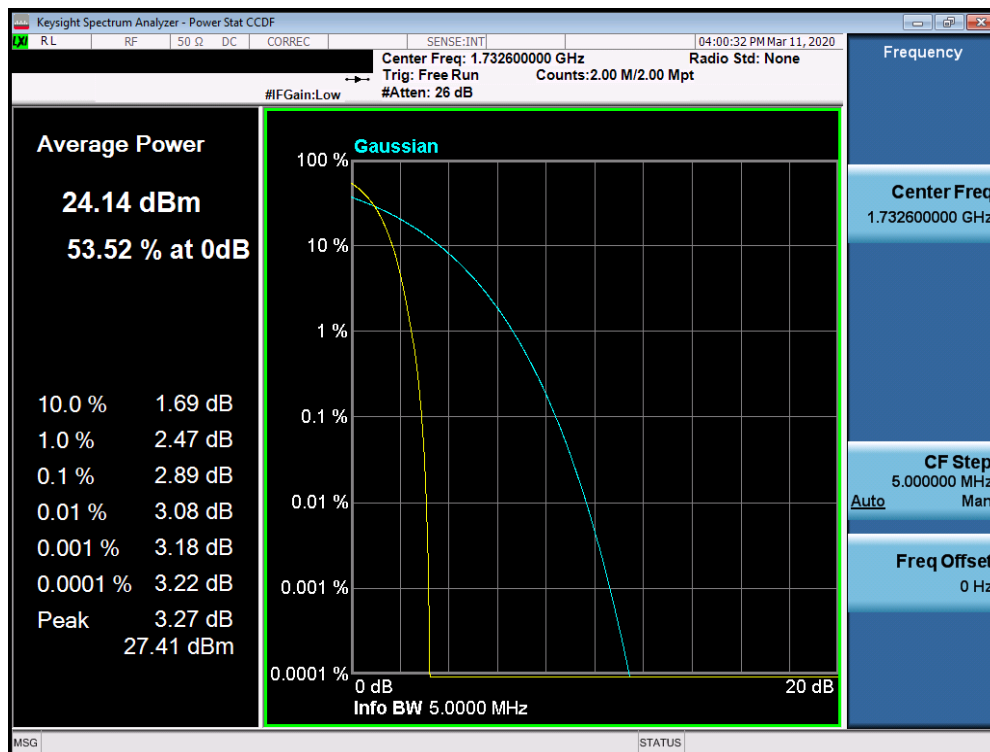

Plot 7-74. Peak-Average Ratio Plot (AWS WCDMA Mode)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 - 4/6/2020	EUT Type: Portable Handset		Page 54 of 85

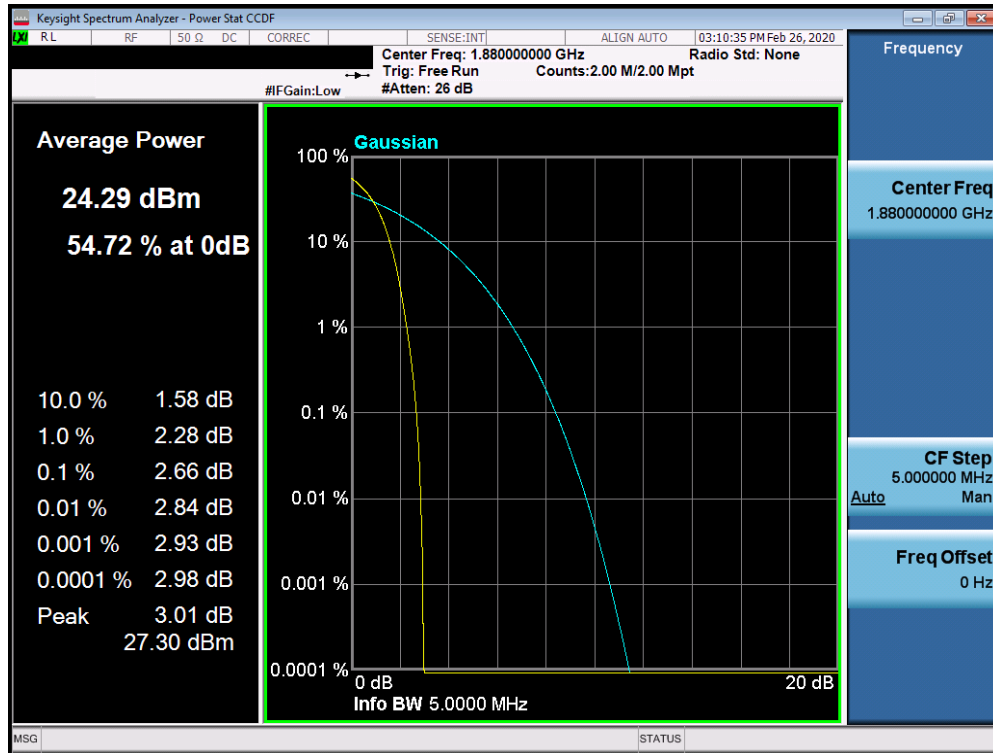

Plot 7-75. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 55 of 85

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

### Test Settings


1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 56 of 85




## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

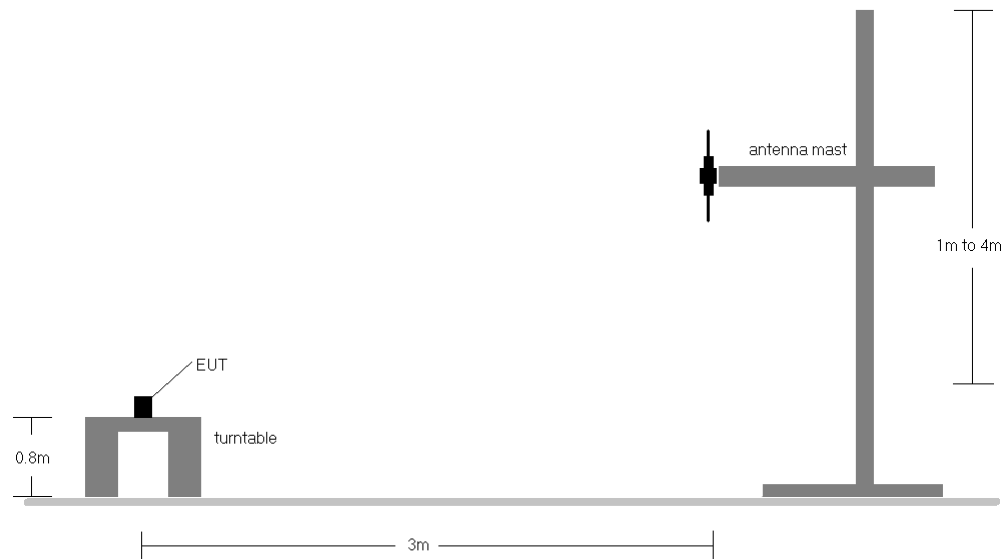

**Figure 7-5. Radiated Test Setup <1GHz**

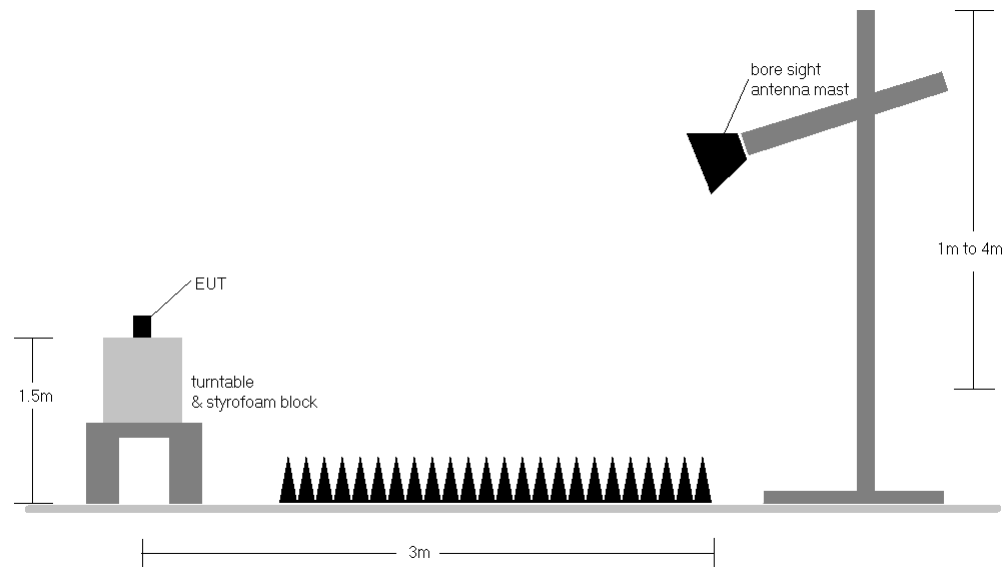

**Figure 7-6. Radiated Test Setup >1GHz**

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS

FCC ID: ZNFQ730AM	 <b>PCTEST</b> Proud to be part of element	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 57 of 85

emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."

- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

<b>FCC ID:</b> ZNFQ730AM		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 58 of 85

## Radiated Power (ERP/EIRP)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	137	196	21.12	6.30	25.27	0.337	38.45	-13.18	27.42	0.552	40.61	-13.19
836.60	GPRS850	V	137	183	22.45	6.40	<b>26.70</b>	<b>0.468</b>	38.45	-11.75	<b>28.85</b>	<b>0.767</b>	40.61	-11.76
848.80	GPRS850	V	140	180	21.76	6.50	26.11	0.408	38.45	-12.34	28.26	0.670	40.61	-12.35
836.60	GPRS850	H	224	49	21.66	6.70	26.21	0.418	38.45	-12.24	28.36	0.685	40.61	-12.25
836.60	EDGE850	V	138	184	15.79	6.40	<b>20.04</b>	0.101	38.45	-18.41	<b>22.19</b>	<b>0.166</b>	40.61	-18.42

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	128	201	12.62	6.30	16.77	0.048	38.45	-21.68	18.92	0.078	40.61	-21.69
836.60	WCDMA850	V	125	192	13.00	6.40	<b>17.25</b>	<b>0.053</b>	38.45	-21.20	<b>19.40</b>	<b>0.087</b>	40.61	-21.21
846.60	WCDMA850	V	139	198	12.68	6.50	17.03	0.050	38.45	-21.42	19.18	0.083	40.61	-21.43
836.60	WCDMA850	H	199	55	11.72	6.70	16.27	0.042	38.45	-22.18	18.42	0.070	40.61	-22.19

Table 7-3. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	V	126	118	11.85	9.34	21.19	0.131	30.00	-8.81
1732.60	WCDMA1700	V	141	120	12.20	9.19	21.39	0.138	30.00	-8.61
1752.60	WCDMA1700	V	126	124	12.81	9.08	<b>21.89</b>	<b>0.155</b>	30.00	-8.11
1752.60	WCDMA1700	H	102	354	12.12	9.08	21.20	0.132	30.00	-8.80

Table 7-4. EIRP (AWS WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	V	106	227	17.93	9.87	27.80	0.603	33.01	-5.21
1880.00	GPRS1900	V	112	333	17.13	10.10	27.23	0.529	33.01	-5.78
1909.80	GPRS1900	V	101	98	17.69	10.31	<b>28.00</b>	<b>0.631</b>	33.01	-5.01
1909.80	GPRS1900	H	289	327	9.15	10.31	19.46	0.088	33.01	-13.55
1909.80	EDGE1900	V	100	175	11.77	10.31	<b>22.08</b>	0.161	33.01	-10.93

Table 7-5. EIRP (PCS GPRS)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 59 of 85

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	123	5	11.84	9.51	21.35	0.136	33.01	-11.66
1880.00	WCDMA1900	H	115	4	11.15	9.90	21.05	0.127	33.01	-11.96
1907.60	WCDMA1900	H	108	2	11.11	10.24	<b>21.35</b>	<b>0.136</b>	33.01	-11.66
1907.60	WCDMA1900	V	139	132	10.52	10.30	20.82	0.121	33.01	-12.19

**Table 7-6. EIRP (PCS WCDMA)**

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 60 of 85

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 61 of 85

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

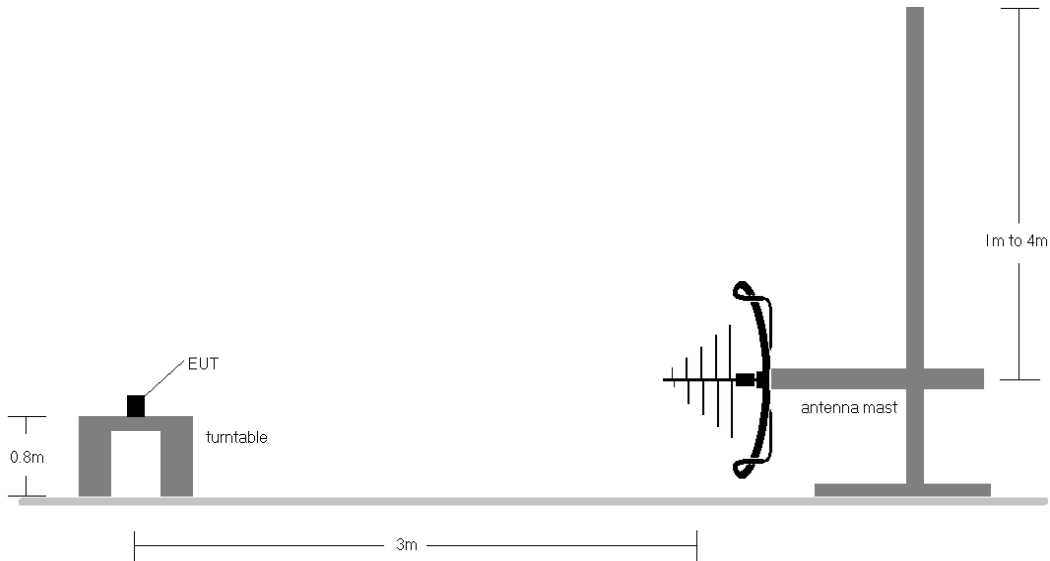

**Figure 7-7. Test Instrument & Measurement Setup < 1GHz**

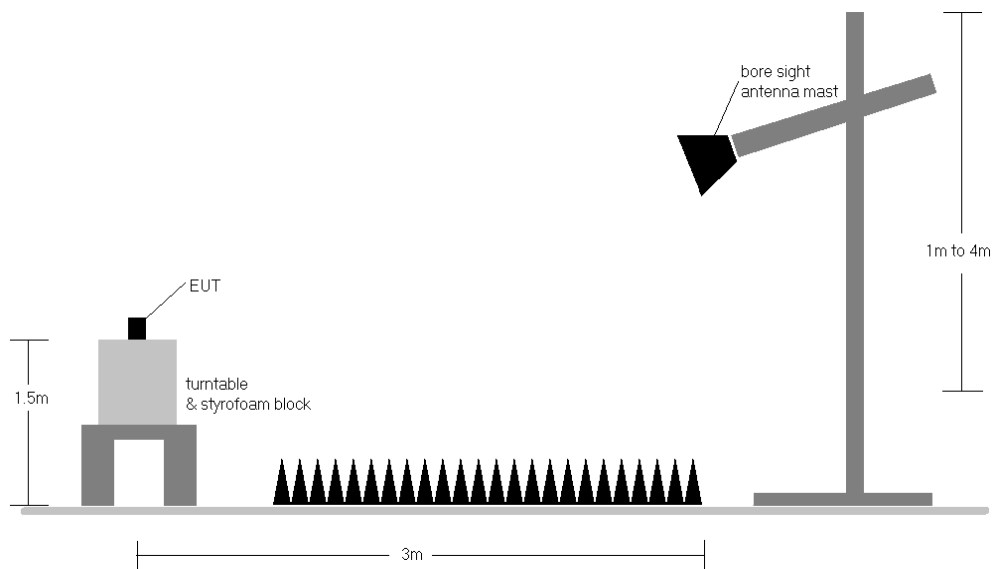

**Figure 7-8. Test Instrument & Measurement Setup >1 GHz**


FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 62 of 85

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFQ730AM	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 63 of 85

## Cellular GPRS Mode

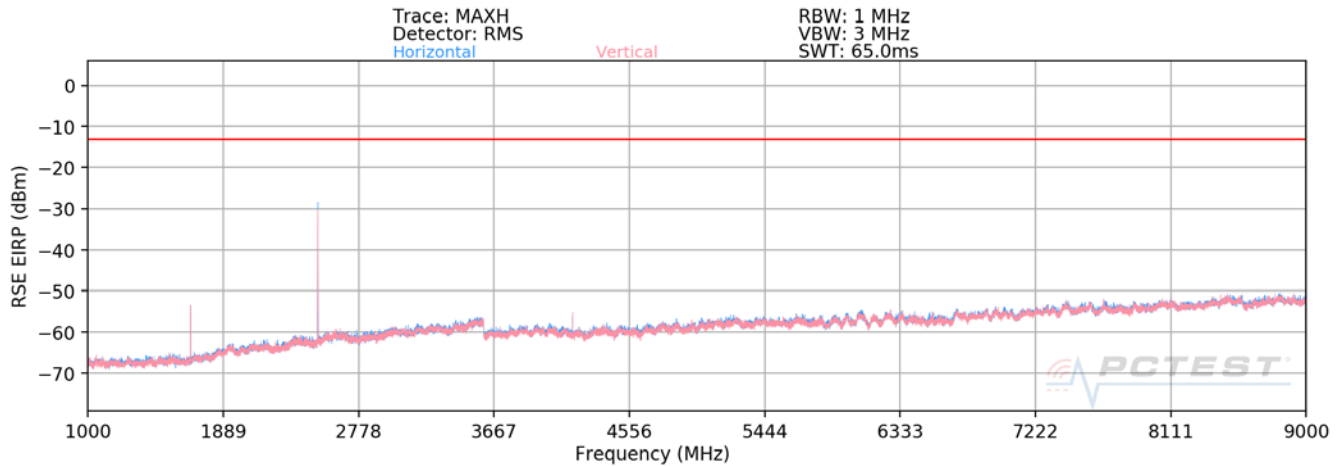

**Plot 7-76. Radiated Spurious Plot above 1GHz (Cellular GPRS Mode)**

OPERATING FREQUENCY: 824.20 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	197	85	-61.80	8.97	-52.83	-39.8
2472.60	V	129	38	-45.51	9.67	-35.84	-22.8
3296.80	V	160	87	-68.82	9.60	-59.22	-46.2
4121.00	V	210	5	-71.47	10.20	-61.28	-48.3
4945.20	V	-	-	-71.76	10.93	-60.82	-47.8
5769.40	V	-	-	-72.55	11.49	-61.05	-48.1

**Table 7-7. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)**

FCC ID: ZNFQ730AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 64 of 85



OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	184	87	-61.10	8.98	-52.12	-39.1
2509.80	V	112	58	-34.67	9.78	-24.89	-11.9
3346.40	V	129	104	-68.23	9.63	-58.60	-45.6
4183.00	V	213	3	-66.56	10.38	-56.19	-43.2
5019.60	V	-	-	-73.35	10.91	-62.44	-49.4
5856.20	V	-	-	-73.00	11.54	-61.45	-48.5

**Table 7-8. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)**


OPERATING FREQUENCY: 848.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	184	89	-60.19	8.98	-51.20	-38.2
2546.40	V	111	59	-39.08	9.77	-29.31	-16.3
3395.20	V	115	104	-69.07	9.81	-59.26	-46.3
4244.00	V	138	62	-63.17	10.61	-52.57	-39.6
5092.80	V	-	-	-73.17	10.72	-62.45	-49.4
5941.60	V	-	-	-72.20	11.48	-60.72	-47.7

**Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)**

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 65 of 85

## Cellular WCDMA Mode

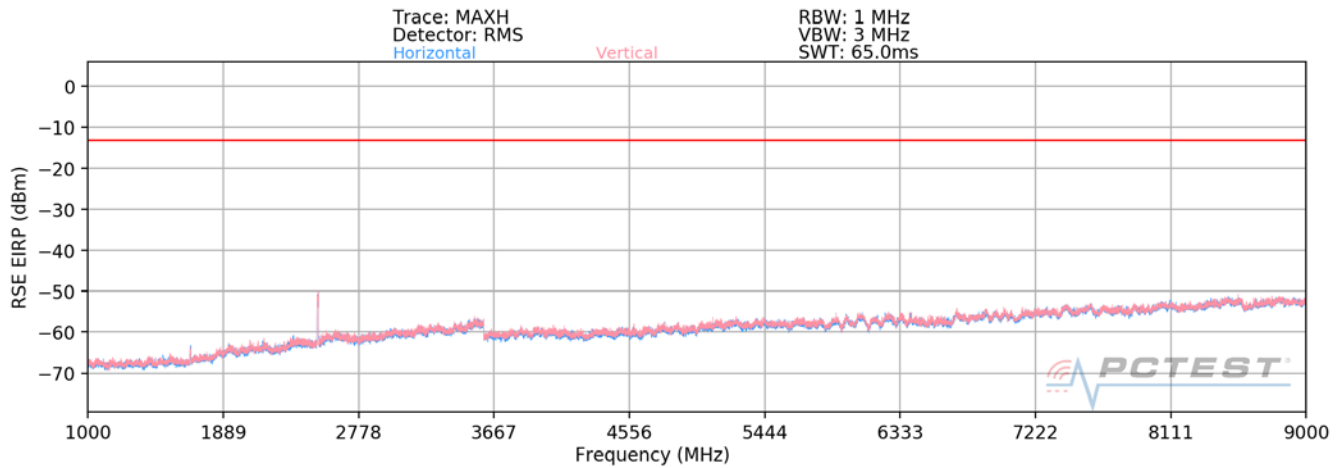

**Plot 7-77. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)**

OPERATING FREQUENCY: 826.40 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	V	133	87	-77.63	8.98	-68.65	-55.7
2479.20	V	150	61	-63.60	9.70	-53.90	-40.9
3305.60	V	-	-	-75.85	9.61	-66.24	-53.2
4132.00	V	-	-	-75.66	10.22	-65.44	-52.4

**Table 7-10. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

FCC ID: ZNFQ730AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 66 of 85

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	211	206	-79.81	8.98	-70.83	-57.8
2509.80	V	150	35	-63.53	9.78	-53.75	-40.8
3346.40	V	-	-	-75.75	9.63	-66.11	-53.1
4183.00	V	-	-	-76.30	10.38	-65.93	-52.9

Table 7-11. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)


OPERATING FREQUENCY: 846.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	V	181	59	-76.40	8.98	-67.41	-54.4
2539.80	V	158	59	-61.23	9.77	-51.46	-38.5
3386.40	V	-	-	-77.47	9.78	-67.69	-54.7
4233.00	V	-	-	-76.97	10.56	-66.41	-53.4

Table 7-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 67 of 85

## AWS WCDMA Mode

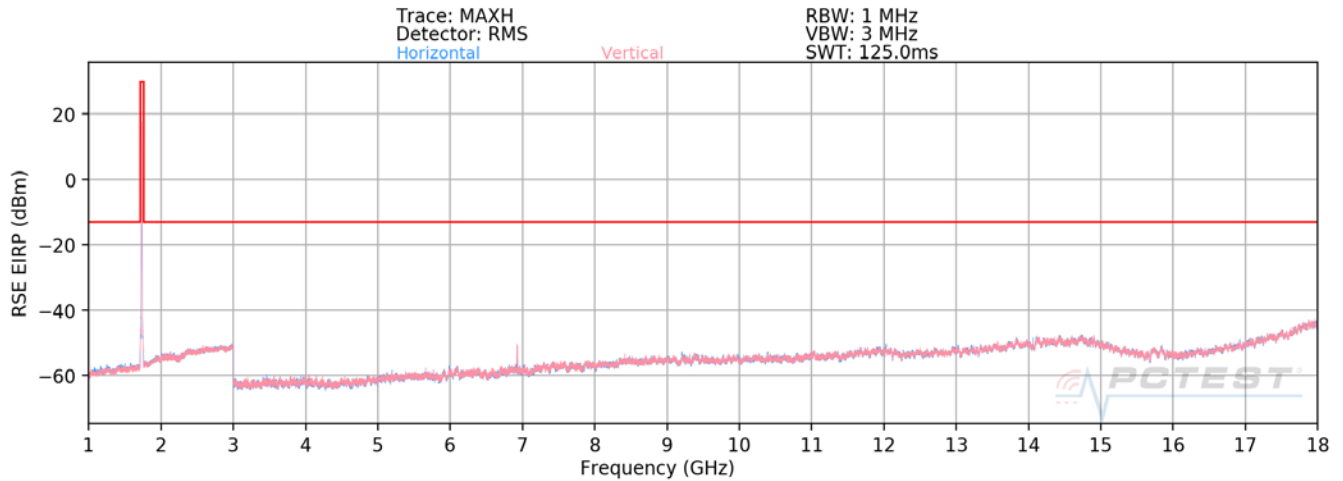

**Plot 7-78. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)**

OPERATING FREQUENCY: 1712.40 MHz  
MODULATION SIGNAL: WCDMA  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	152	308	-70.84	9.86	-60.98	-48.0
5137.20	H	400	300	-71.66	10.72	-60.94	-47.9
6849.60	H	111	348	-65.50	11.67	-53.83	-40.8
8562.00	H	-	-	-71.46	11.17	-60.29	-47.3
10274.40	H	115	293	-66.32	12.27	-54.04	-41.0
11986.80	H	-	-	-70.58	12.61	-57.97	-45.0
13699.20	H	-	-	-68.18	12.14	-56.04	-43.0

**Table 7-13. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)**

FCC ID: ZNFQ730AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 68 of 85

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	146	311	-72.20	9.91	-62.29	-49.3
5197.80	H	112	55	-71.57	10.79	-60.79	-47.8
6930.40	H	263	6	-64.01	11.77	-52.23	-39.2
8663.00	H	-	-	-70.94	11.05	-59.90	-46.9
10395.60	H	151	351	-68.10	12.51	-55.59	-42.6
12128.20	H	-	-	-71.02	13.00	-58.01	-45.0
13860.80	H	-	-	-67.06	12.04	-55.02	-42.0

**Table 7-14. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)**


OPERATING FREQUENCY: 1752.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	144	315	-69.69	9.95	-59.74	-46.7
5257.80	H	400	312	-70.27	10.74	-59.53	-46.5
7010.40	H	113	12	-61.30	11.89	-49.41	-36.4
8763.00	H	-	-	-71.42	11.01	-60.42	-47.4
10515.60	H	176	349	-69.24	12.64	-56.60	-43.6
12268.20	H	-	-	-70.63	13.22	-57.41	-44.4
14020.80	H	-	-	-66.75	11.75	-55.01	-42.0

**Table 7-15. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)**

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 69 of 85

## PCS GPRS Mode

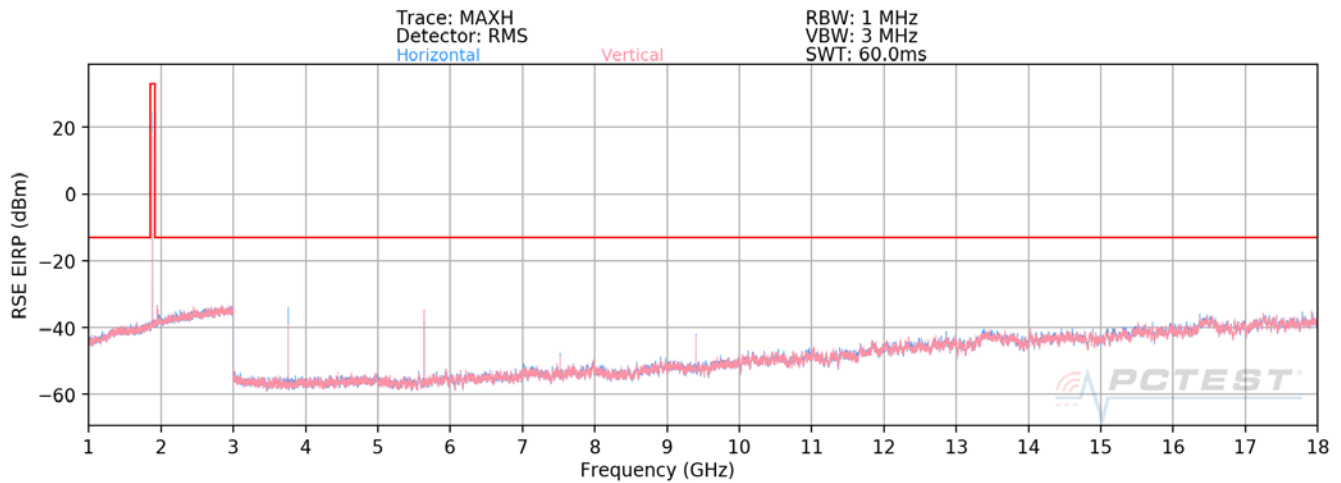

**Plot 7-79. Radiated Spurious Plot above 1GHz (PCS GPRS Mode)**

OPERATING FREQUENCY: 1850.20 MHz  
MODULATION SIGNAL: GPRS (GMSK)  
DISTANCE: 3 meters  
LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	H	276	314	-47.47	9.61	-37.86	-24.9
5550.60	H	139	20	-47.64	10.97	-36.67	-23.7
7400.80	H	112	329	-58.06	10.99	-47.07	-34.1
9251.00	H	265	7	-51.87	11.66	-40.21	-27.2
11101.20	H	194	359	-65.95	12.77	-53.18	-40.2
12951.40	H	275	356	-63.36	13.35	-50.01	-37.0
14801.60	H	204	21	-53.80	12.48	-41.32	-28.3
16651.80	H	221	10	-68.38	15.49	-52.89	-39.9

**Table 7-16. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)**

FCC ID: ZNFQ730AM	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 70 of 85

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	392	324	-39.21	9.40	-29.82	-16.8
5640.00	H	184	12	-47.44	11.20	-36.24	-23.2
7520.00	H	23	317	-56.53	11.14	-45.39	-32.4
9400.00	H	280	52	-53.18	11.60	-41.58	-28.6
11280.00	H	202	29	-67.33	12.78	-54.55	-41.6
13160.00	H	164	348	-63.47	13.20	-50.28	-37.3
15040.00	H	246	17	-54.37	13.56	-40.81	-27.8
16920.00	H	208	10	-66.42	14.40	-52.02	-39.0

Table 7-17. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)


OPERATING FREQUENCY: 1909.80 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	H	286	310	-38.13	9.33	-28.80	-15.8
5729.40	H	261	306	-47.50	11.42	-36.09	-23.1
7639.20	H	279	319	-60.50	11.36	-49.13	-36.1
9549.00	H	188	79	-56.05	11.82	-44.23	-31.2
11458.80	H	153	100	-67.47	12.87	-54.60	-41.6
13368.60	H	253	293	-57.12	12.83	-44.29	-31.3
15278.40	H	273	292	-59.92	14.95	-44.97	-32.0
17188.20	H	-	-	-65.27	13.37	-51.90	-38.9

Table 7-18. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 71 of 85

## PCS WCDMA Mode

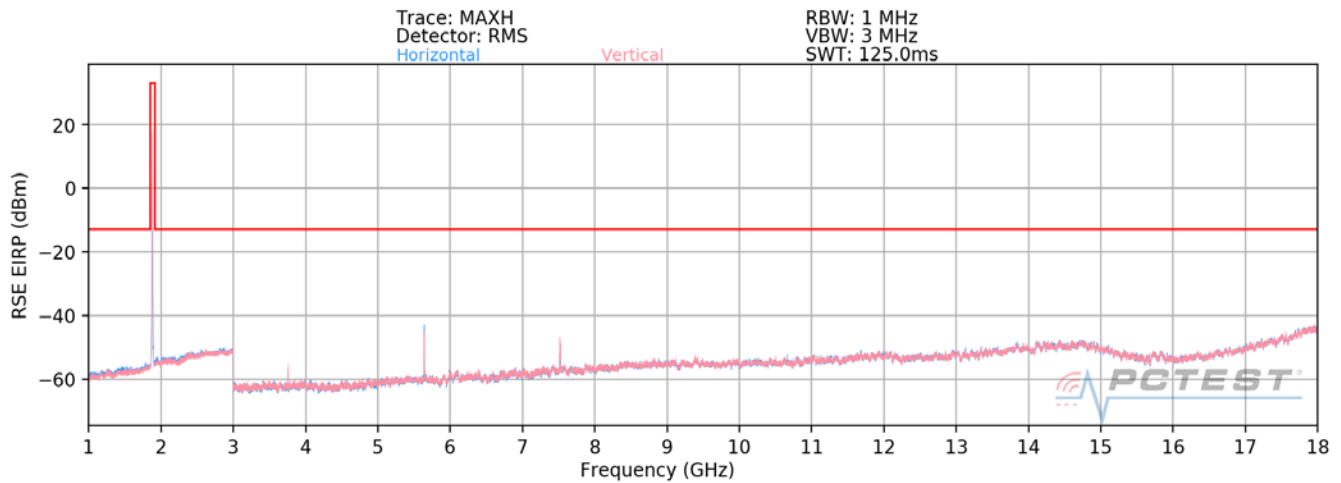

**Plot 7-80. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)**

OPERATING FREQUENCY: 1852.40 MHz

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	400	302	-72.67	9.60	-63.08	-50.1
5557.20	H	211	299	-70.84	10.98	-59.85	-46.9
7409.60	H	346	352	-57.73	10.99	-46.74	-33.7
9262.00	H	-	-	-71.47	11.66	-59.81	-46.8
11114.40	H	278	356	-69.28	12.77	-56.51	-43.5
12966.80	H	-	-	-70.42	13.34	-57.08	-44.1
14819.20	H	-	-	-68.25	12.52	-55.73	-42.7

**Table 7-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)**

FCC ID: ZNFQ730AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 72 of 85



OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	168	24	-72.96	9.40	-63.57	-50.6
5640.00	H	144	244	-68.13	11.20	-56.93	-43.9
7520.00	H	354	348	-59.23	11.14	-48.09	-35.1
9400.00	H	-	-	-70.34	11.60	-58.74	-45.7
11280.00	H	332	358	-70.05	12.78	-57.27	-44.3
13160.00	H	-	-	-70.19	13.20	-57.00	-44.0
15040.00	H	-	-	-69.53	13.56	-55.97	-43.0

Table 7-20. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	161	16	-70.60	9.33	-61.27	-48.3
5722.80	H	154	17	-65.49	11.40	-54.09	-41.1
7630.40	H	362	31	-62.17	11.34	-50.83	-37.8
9538.00	H	-	-	-71.53	11.79	-59.74	-46.7
11445.60	H	286	358	-70.92	12.87	-58.05	-45.0
13353.20	H	-	-	-69.61	12.84	-56.77	-43.8
15260.80	H	-	-	-73.02	14.89	-58.12	-45.1

Table 7-21. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 73 of 85

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 74 of 85

## Frequency Stability / Temperature Variation


OPERATING FREQUENCY:	836,600,000	Hz
CHANNEL:	190	
REFERENCE VOLTAGE:	4.27	VDC
DEVIATION LIMIT:	± 0.00025 % or 2.5 ppm	

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	836,600,040	40	0.0000048
100 %		- 20	836,599,901	-99	-0.0000118
100 %		- 10	836,599,907	-93	-0.0000111
100 %		0	836,600,170	170	0.0000203
100 %		+ 10	836,600,173	173	0.0000207
100 %		+ 20	836,599,707	-293	-0.0000350
100 %		+ 30	836,599,674	-326	-0.0000390
100 %		+ 40	836,599,968	-32	-0.0000038
100 %		+ 50	836,599,986	-14	-0.0000017
BATT. ENDPOINT	2.86	+ 20	836,600,402	402	0.0000481

**Table 7-22. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)**

FCC ID: ZNFQ730AM	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset	Page 75 of 85

## Frequency Stability / Temperature Variation

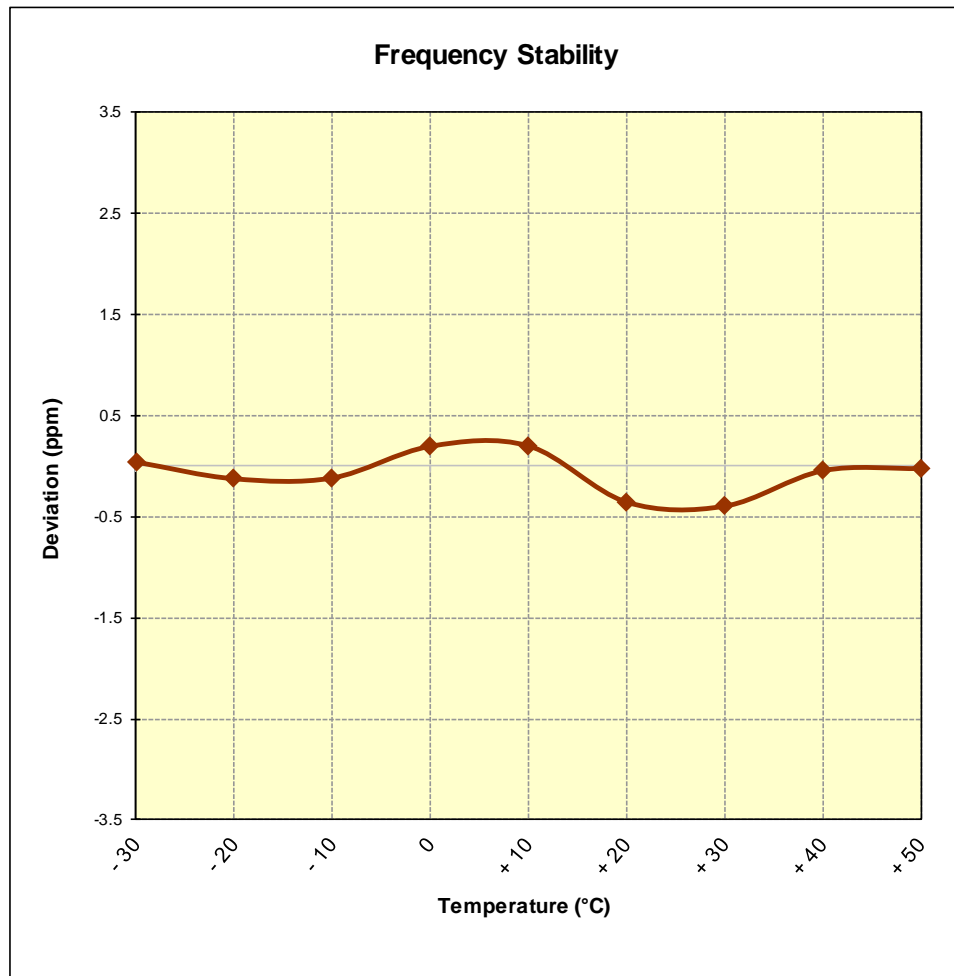

**Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)**

<b>FCC ID:</b> ZNFQ730AM		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 76 of 85

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 4.27 VDC


DEVIATION LIMIT:  $\pm 0.00025$  % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	836,600,231	231	0.0000276
100 %		- 20	836,600,206	206	0.0000246
100 %		- 10	836,600,288	288	0.0000344
100 %		0	836,600,284	284	0.0000339
100 %		+ 10	836,600,134	134	0.0000160
100 %		+ 20	836,599,642	-358	-0.0000428
100 %		+ 30	836,600,097	97	0.0000116
100 %		+ 40	836,600,419	419	0.0000501
100 %		+ 50	836,599,762	-238	-0.0000284
BATT. ENDPOINT	2.86	+ 20	836,600,173	173	0.0000207

**Table 7-23. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: ZNFQ730AM	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset	Page 77 of 85

## Frequency Stability / Temperature Variation

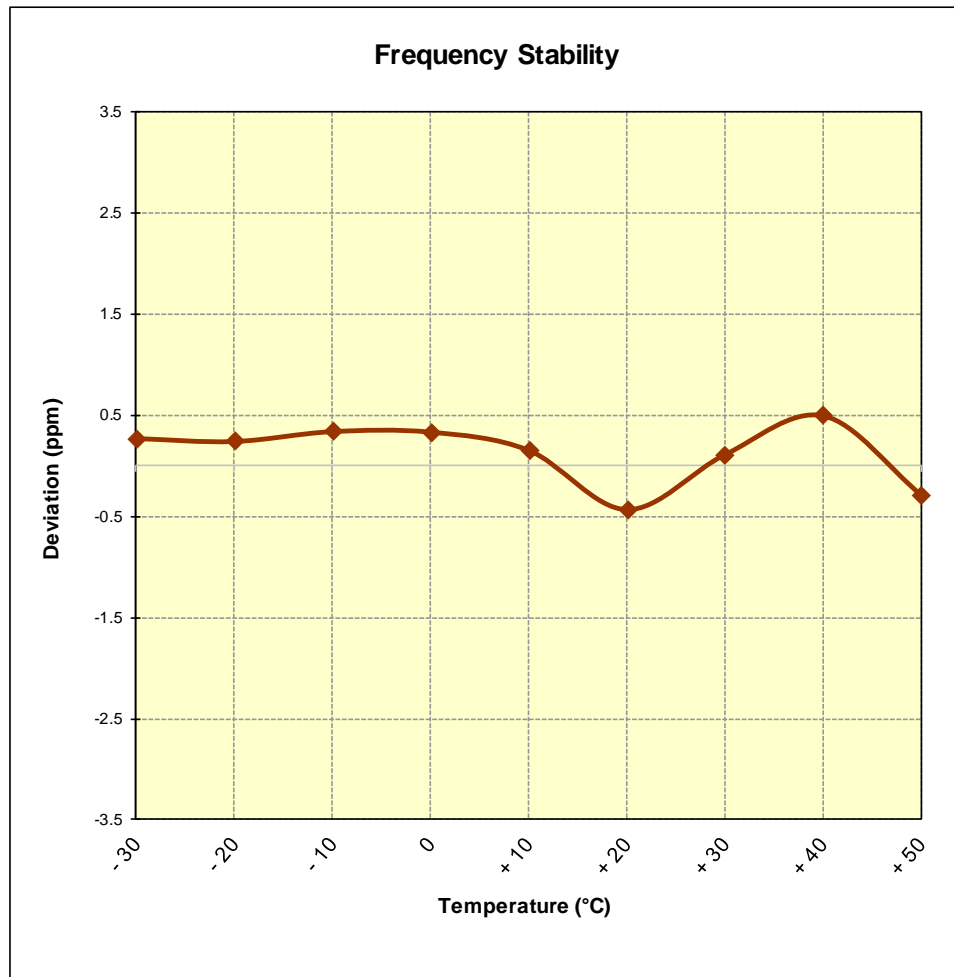

**Figure 7-10. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)**

<b>FCC ID:</b> ZNFQ730AM		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 78 of 85

## Frequency Stability / Temperature Variation


OPERATING FREQUENCY: 1,732,600,000 Hz  
CHANNEL: 1413  
REFERENCE VOLTAGE: 4.27 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	1,732,600,387	387	0.0000223
100 %		- 20	1,732,599,890	-110	-0.0000063
100 %		- 10	1,732,599,952	-48	-0.0000028
100 %		0	1,732,599,642	-358	-0.0000207
100 %		+ 10	1,732,599,791	-209	-0.0000121
100 %		+ 20	1,732,600,078	78	0.0000045
100 %		+ 30	1,732,600,005	5	0.0000003
100 %		+ 40	1,732,600,113	113	0.0000065
100 %		+ 50	1,732,599,689	-311	-0.0000179
BATT. ENDPOINT	2.86	+ 20	1,732,600,317	317	0.0000183

**Table 7-24. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)**

FCC ID: ZNFQ730AM	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset	Page 79 of 85

## Frequency Stability / Temperature Variation

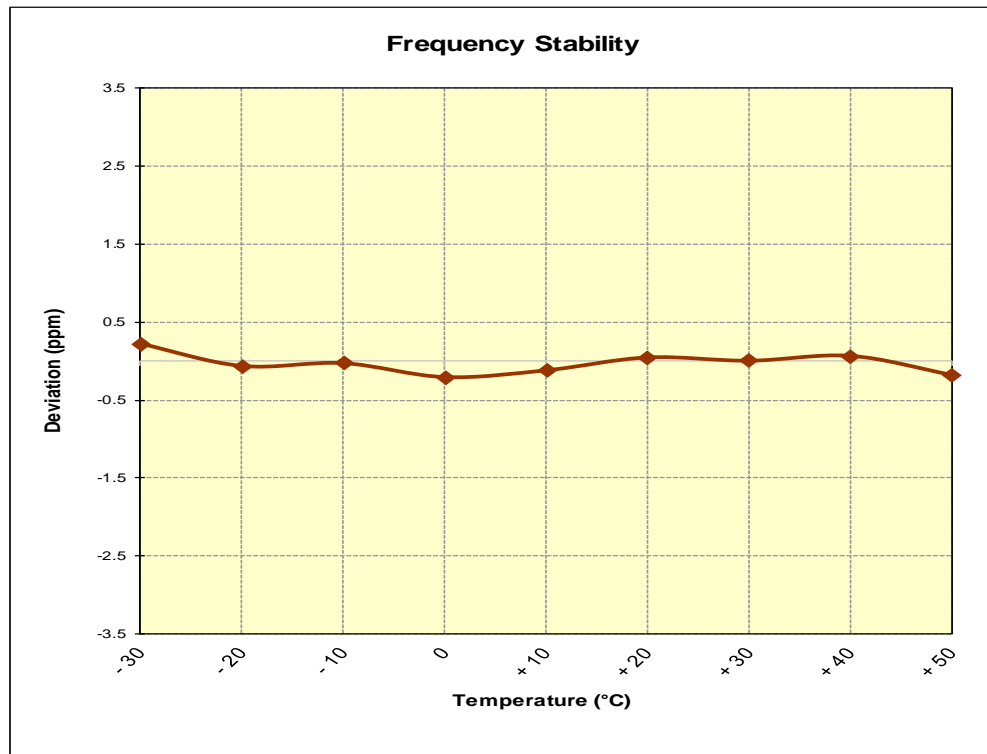

**Figure 7-11. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)**

<b>FCC ID:</b> ZNFQ730AM		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2002240025-02-R1.ZNF	<b>Test Dates:</b> 2/25 – 4/6/2020	<b>EUT Type:</b> Portable Handset		Page 80 of 85



## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz  
CHANNEL: 661  
REFERENCE VOLTAGE: 4.27 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	1,880,000,049	49	0.0000026
100 %		- 20	1,879,999,992	-8	-0.0000004
100 %		- 10	1,879,999,887	-113	-0.0000060
100 %		0	1,879,999,907	-93	-0.0000049
100 %		+ 10	1,879,999,805	-195	-0.0000104
100 %		+ 20	1,880,000,217	217	0.0000115
100 %		+ 30	1,879,999,986	-14	-0.0000007
100 %		+ 40	1,879,999,684	-316	-0.0000168
100 %		+ 50	1,880,000,087	87	0.0000046
BATT. ENDPOINT	2.86	+ 20	1,880,000,052	52	0.0000028

**Table 7-25. Frequency Stability Data (PCS GPRS Mode – Ch. 661)**

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 81 of 85

## Frequency Stability / Temperature Variation

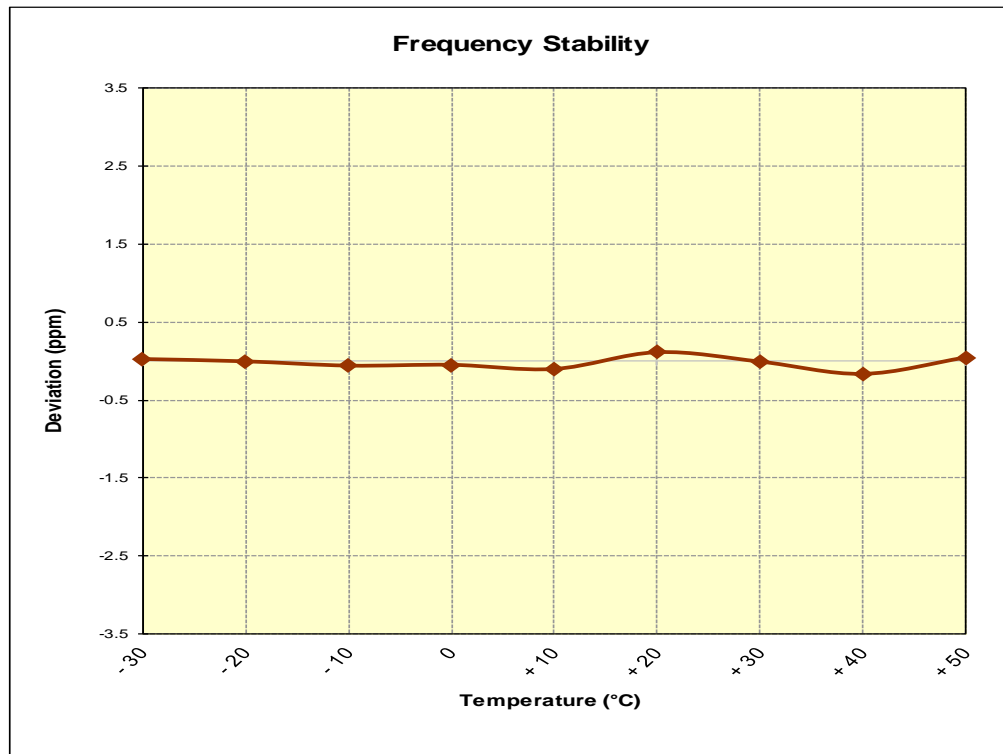


Figure 7-12. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 82 of 85

## Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 9400  
 REFERENCE VOLTAGE: 4.27 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.27	- 30	1,879,999,816	-184	-0.0000098
100 %		- 20	1,880,000,382	382	0.0000203
100 %		- 10	1,879,999,922	-78	-0.0000041
100 %		0	1,880,000,350	350	0.0000186
100 %		+ 10	1,880,000,249	249	0.0000132
100 %		+ 20	1,879,999,956	-44	-0.0000023
100 %		+ 30	1,879,999,889	-111	-0.0000059
100 %		+ 40	1,880,000,183	183	0.0000097
100 %		+ 50	1,880,000,082	82	0.0000044
BATT. ENDPOINT	2.86	+ 20	1,880,000,361	361	0.0000192

**Table 7-26. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 83 of 85

## Frequency Stability / Temperature Variation

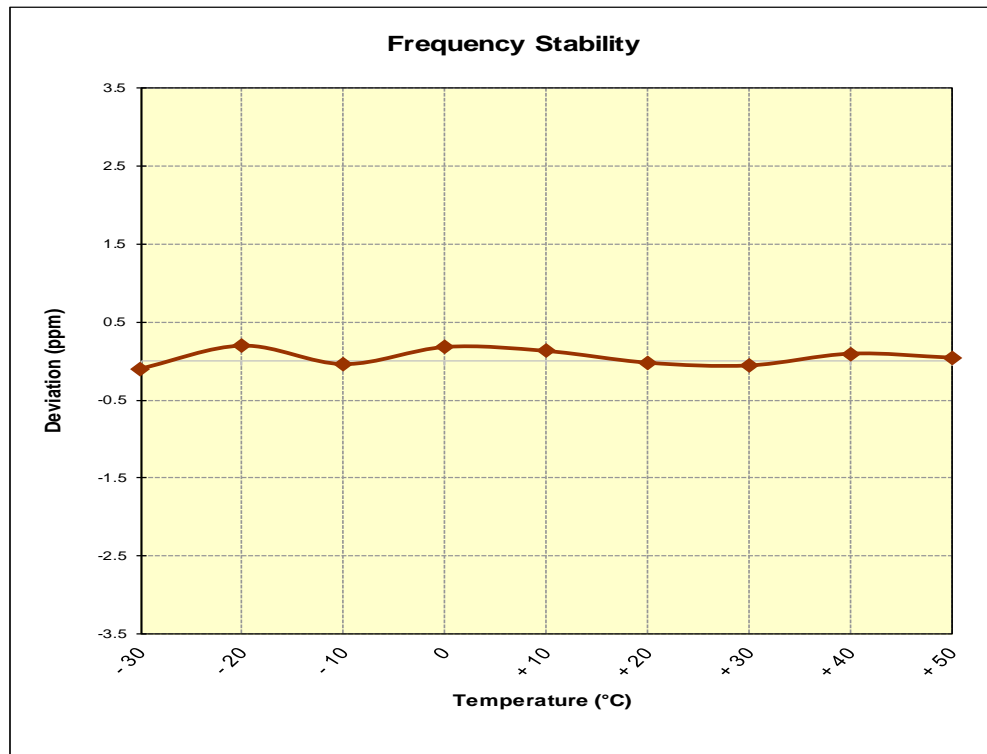


Figure 7-13. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 84 of 85

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFQ730AM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules.

FCC ID: ZNFQ730AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2002240025-02-R1.ZNF	Test Dates: 2/25 – 4/6/2020	EUT Type: Portable Handset		Page 85 of 85