


# FCC Co-Location Test Report

**FCC ID** : I88WAC6503D-S  
**Equipment** : 802.11 ac Unified Pro Access Point  
**Model No.** : WAC6503D-S  
**Brand Name** : ZyXEL  
**Applicant** : ZyXEL Communications Corporation  
**Address** : No. 2, Gongye E. 9th Road, Hsinchu Science  
Park, Hsinchu, Taiwan.  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Oct. 07, 2014  
**Tested Date** : Oct. 23, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

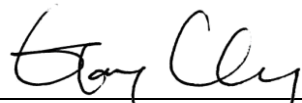

Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	7
1.3	Test Standards .....	8
1.4	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>9</b>
2.1	Testing Condition .....	9
2.2	The Worst Test Modes and Channel Details .....	9
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>10</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	10
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>18</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR4O0702	Rev. 01	Initial issue	Dec. 11, 2014

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 51.28MHz 36.49 (Margin -3.51dB) – QP	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	3	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	3	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	3	MCS 0-23
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	3	MCS 0-23

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.  
Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	3	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	3	MCS 0-23
5150-5250	n (HT40)	5190-5230	38-46 [2]	3	MCS 0-23
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	3	MCS 0-9
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	3	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	3	MCS 0-9
5725-5850	a	5745-5825	149-165 [5]	3	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	3	MCS 0-23
5725-5850	n (HT40)	5755-5795	151-159 [2]	3	MCS 0-23
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	3	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	3	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	3	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Antenna Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
				2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	WAC6503D-S	Dipole	IPEX	4	6	6	6	6

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	<p>1. AC Adapter (support unit only.) Brand: DVE Model: DSA-24CA-12 120120 Rating: I/P: 100-240Vac, 50/60Hz, 0.8A O/P: 12Vdc, 2A</p>
	<p>2. POE Injector (support unit for radiated emission test only.) Brand: ZyXEL Model: PoE12-HP Rating: I/P: 100-240Vac, 50/60Hz, 1.5A max. O/P: 48Vdc, 42.1W</p>
	<p>3. POE Injector (support unit for conducted emission only.) Brand: PowerDsine 3001GC Model: E018205D G Rating: I/P: 100-250Vac, 50/60Hz, 0.5A O/P: 48Vdc, 0.35A</p>

### 1.1.4 Accessories

N/A

## 1.2 The Equipment List

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 2 / (03CH02-WS)				
<b>Test Date</b>	Oct. 23, 2014				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Amplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014
control	EM Electronics	EM1000	060608	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2015
Note: Calibration Interval of instruments listed above is two year.					

### 1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172 D01 Determining ERP and EIRP v01

FCC KDB 7789033 D01 General UNII Test Procedures Old Rules v01r04

FCC KDB 644545 D01 Guidance for IEEE 802 11ac v01r02 Old Rules

FCC KDB 644545 D02 Alternative Guidance for 802 11ac Old Rules v01

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

### 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Radiated emission $\leq$ 1GHz	$\pm 3.26$ dB
Radiated emission $>$ 1GHz	$\pm 4.94$ dB



## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH03-WS	22°C / 63%	Aska Huang

➤ FCC site registration No.: 390588

➤ IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Channel	Data rate (Mbps) / MCS	Test Configuration
Radiated Emissions ≤1GHz	2.4G 11g + 5G 11a	CH6 + CH157	6Mbps + 6Mbps	1, 2
Radiated Emissions >1GHz	2.4G 11g + 5G 11a	CH6 + CH157	6Mbps + 6Mbps	1

**NOTE:**

1. This device can be powered by AC adapter or POE. Each power supply was selected for final testing as below configuration.
2. Test configurations are listed as below:
  - (1) Configuration 1: AC Adapter mode
  - (2) Configuration 2: POE mode
3. The selected channel is the maximum power channel of 2.4GHz and 5GHz.

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup

#### Radiated Emissions below 1 GHz

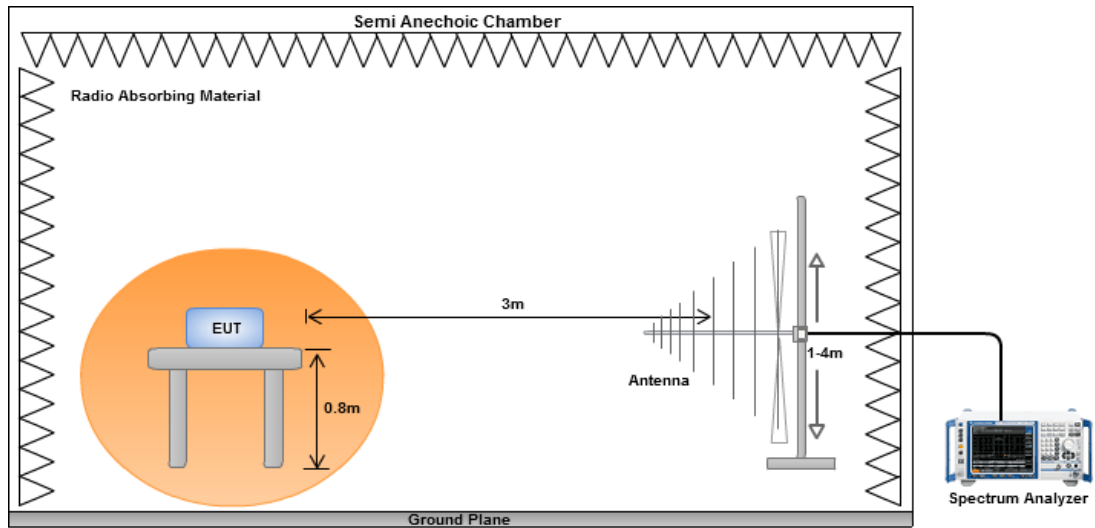


#### Radiated Emissions above 1 GHz

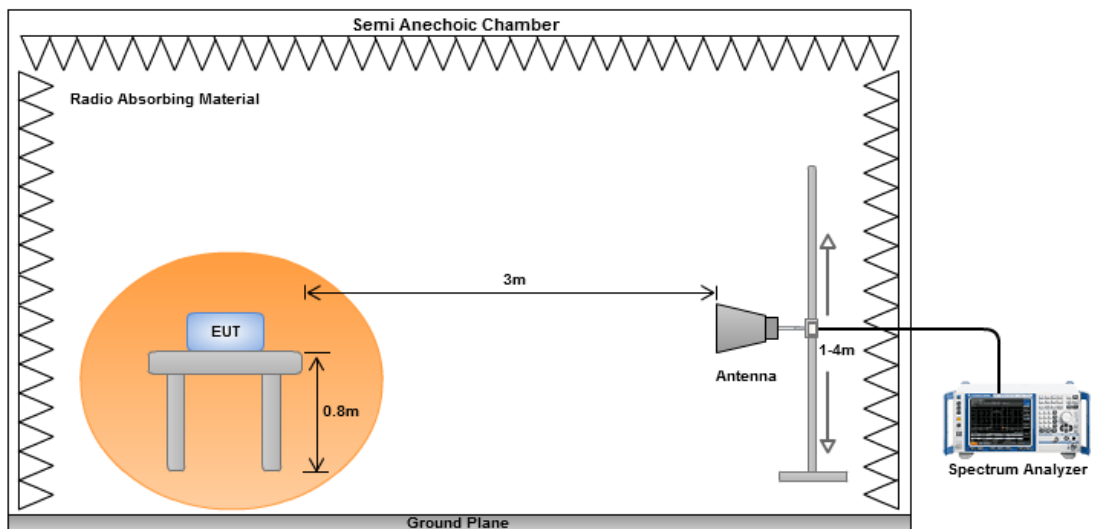

### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	2.4G 11g + 5G 11a	Test Channel	CH6 + CH157
Polarization	Horizontal	Test Configuration	1

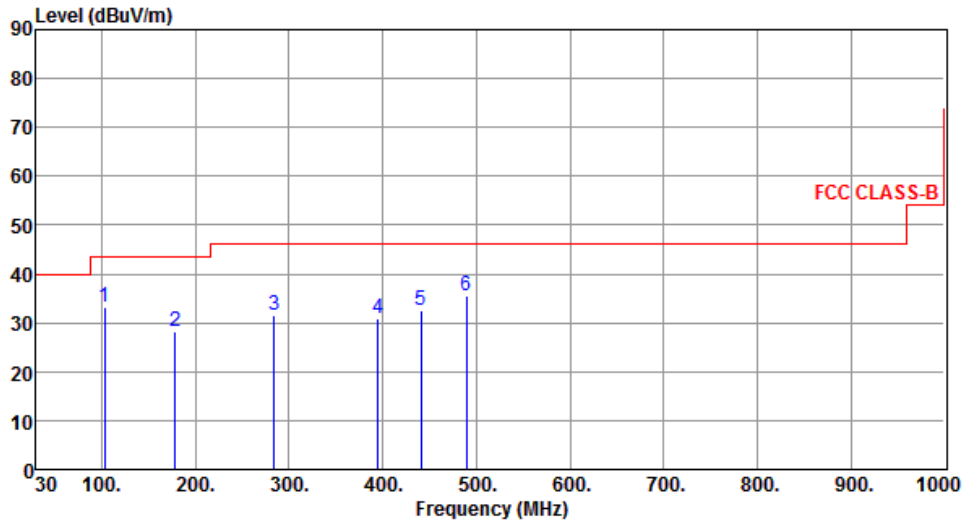
  


The graph displays the radiated unwanted emissions level in dBuV/m against frequency in MHz from 30 to 1000 MHz. A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 1000 MHz, and 55 dBuV/m above 1000 MHz. Six blue vertical lines indicate measured peaks at 102.75, 178.41, 284.14, 394.72, 441.28, and 489.78 MHz. The peak levels are 33.30, 28.28, 31.46, 30.73, 32.63, and 35.40 dBuV/m respectively. The margin between the measured peaks and the limit is -10.20, -15.22, -14.54, -15.27, -13.37, and -10.60 dB respectively.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	102.75	33.30	43.50	-10.20	51.03	-17.73	Peak	---	---
2	178.41	28.28	43.50	-15.22	43.26	-14.98	Peak	---	---
3	284.14	31.46	46.00	-14.54	44.45	-12.99	Peak	---	---
4	394.72	30.73	46.00	-15.27	41.03	-10.30	Peak	---	---
5	441.28	32.63	46.00	-13.37	41.51	-8.88	Peak	---	---
6	489.78	35.40	46.00	-10.60	43.53	-8.13	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11g + 5G 11a	<b>Test Channel</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

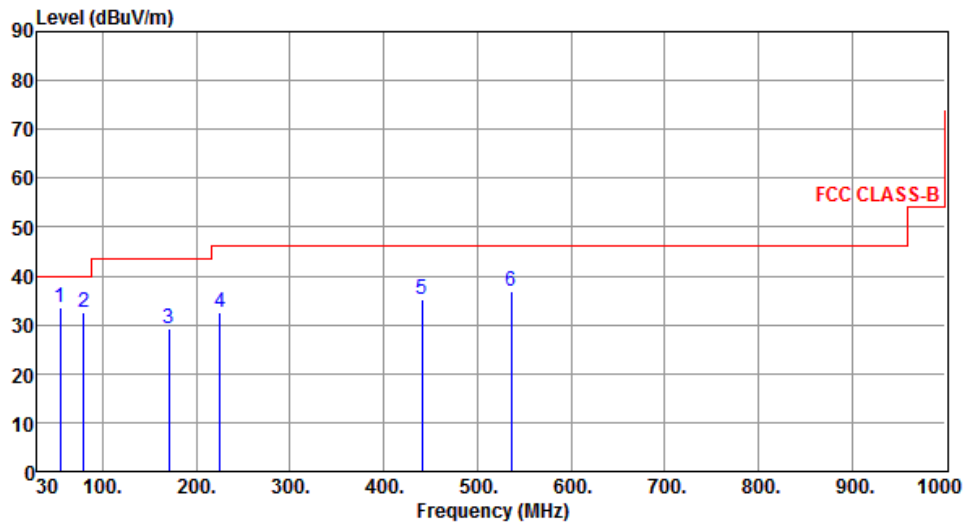


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.16	33.62	40.00	-6.38	46.82	-13.20	QP	---	---
2	79.47	32.47	40.00	-7.53	50.04	-17.57	Peak	---	---
3	170.65	29.22	43.50	-14.28	43.20	-13.98	Peak	---	---
4	224.97	32.59	46.00	-13.41	48.24	-15.65	Peak	---	---
5	441.28	35.29	46.00	-10.71	44.17	-8.88	Peak	---	---
6	536.34	36.84	46.00	-9.16	44.24	-7.40	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11g + 5G 11a	<b>Test Channel</b>	CH6 + CH157
<b>Polarization</b>	Horizontal	<b>Test Configuration</b>	2

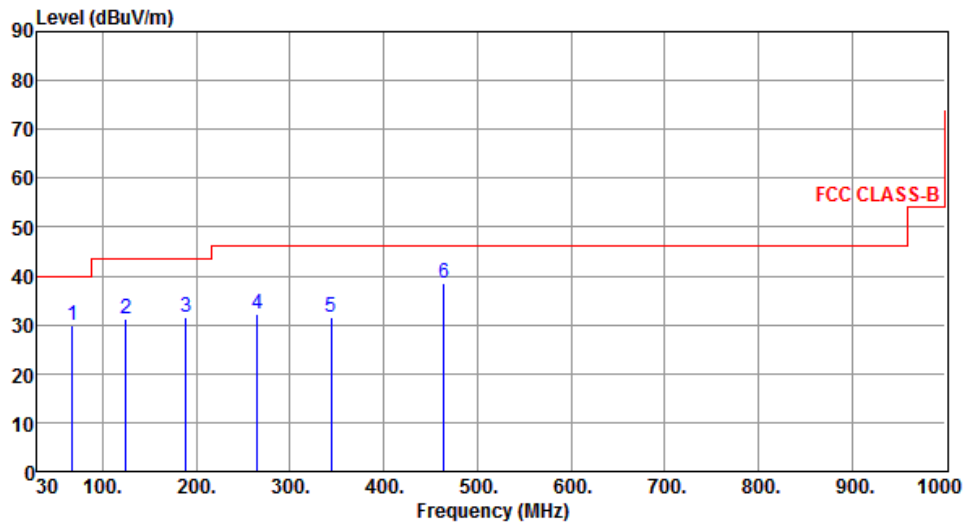


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	67.83	29.81	40.00	-10.19	44.79	-14.98	Peak	---	---
2	125.06	31.22	43.50	-12.28	46.37	-15.15	Peak	---	---
3	189.08	31.62	43.50	-11.88	47.59	-15.97	Peak	---	---
4	264.74	32.18	46.00	-13.82	46.02	-13.84	Peak	---	---
5	344.28	31.41	46.00	-14.59	42.91	-11.50	Peak	---	---
6	464.56	38.45	46.00	-7.55	46.87	-8.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	2.4G 11g + 5G 11a	<b>Test Channel</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	2

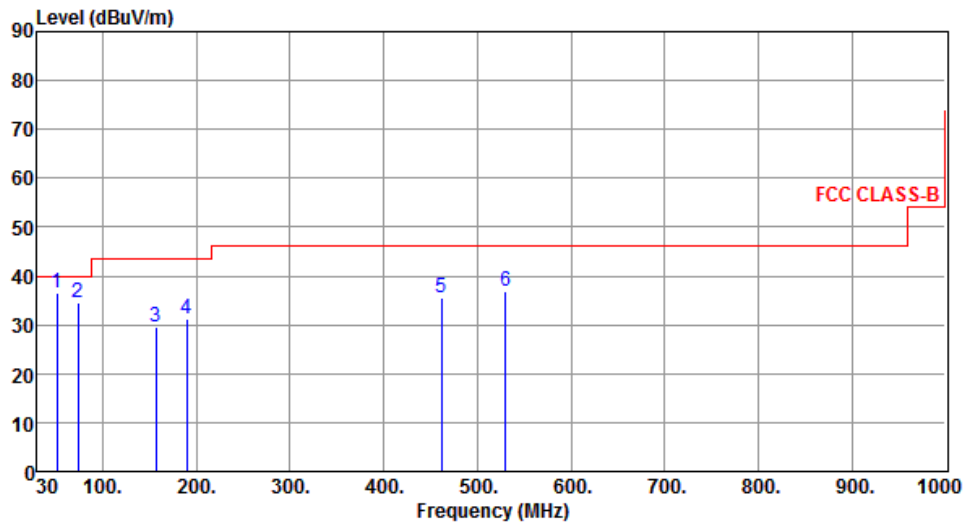

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.28	36.49	40.00	-3.51	49.53	-13.04	QP	---	---
2	73.65	34.57	40.00	-5.43	50.78	-16.21	Peak	---	---
3	157.07	29.62	43.50	-13.88	43.02	-13.40	Peak	---	---
4	190.05	31.18	43.50	-12.32	47.22	-16.04	Peak	---	---
5	461.65	35.59	46.00	-10.41	44.05	-8.46	Peak	---	---
6	530.52	36.91	46.00	-9.09	44.40	-7.49	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation	2.4G 11g + 5G 11a	Test Channel	CH6 + CH157
Polarization	Horizontal	Test Configuration	1

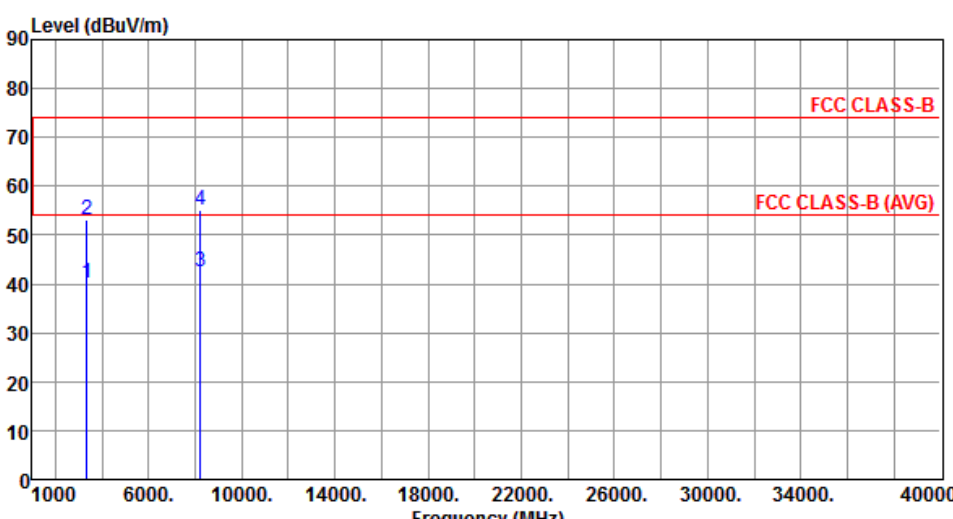
  


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	40.15	54.00	-13.85	39.05	1.10	Average	---	---
2	3348.00	53.05	74.00	-20.95	51.95	1.10	Peak	---	---
3	8222.00	42.64	54.00	-11.36	31.05	11.59	Average	---	---
4	8222.00	55.06	74.00	-18.94	43.47	11.59	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



<b>Modulation</b>	2.4G 11g + 5G 11a	<b>Test Channel</b>	CH6 + CH157
<b>Polarization</b>	Vertical	<b>Test Configuration</b>	1

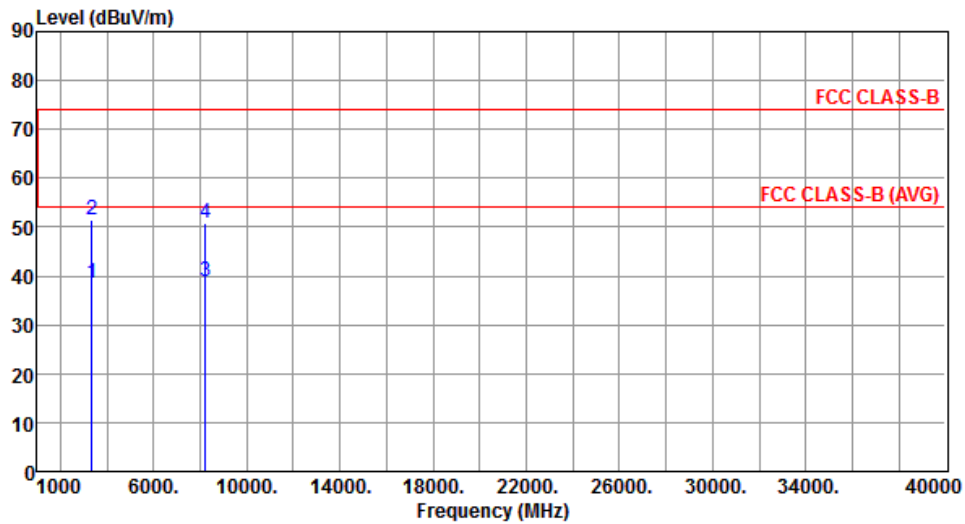

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3348.00	38.68	54.00	-15.32	37.58	1.10	Average	---	---
2	3348.00	51.60	74.00	-22.40	50.50	1.10	Peak	---	---
3	8222.00	38.79	54.00	-15.21	27.20	11.59	Average	---	---
4	8222.00	50.74	74.00	-23.26	39.15	11.59	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==