



EMC TEST REPORT

No. I15Z40385-EMC02

for

Sony Mobile Communications Inc.

GSM/WCDMA/LTE Mobile Phone

FCC ID: PY7-PM0817

with

Hardware Version: A

Software Version: KK-MR1-SHINANO2-DSDS-150114-0317

Issued Date: 2015-04-10

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

FCC 2.948 Listed: No. 525429

IC O.A.T.S listed: No. 12389A-1

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15Z40385-EMC02	Rev.0	1st edition	2015-03-09
I15Z40385-EMC02	Rev.1	2st edition	2015-04-10

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	7
3.5. EUT SET-UPS	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. STATEMENTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
A.1 OUTPUT POWER	12
A.2 EMISSION LIMIT	16
A.3 CONDUCTED EMISSION	20
A.4 FREQUENCY STABILITY	23
A.5 OCCUPIED BANDWIDTH.....	25
A.6 EMISSION BANDWIDTH	29
A.7 BAND EDGE COMPLIANCE.....	33
A.8 CONDUCTED SPURIOUS EMISSION	36

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Receipt of Sample Jul. 08th, 2014
Testing Start Date: Jul. 16th, 2014
Testing End Date: Jul. 26th, 2014

1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Song Chongwen
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact Person: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications Inc.
Address /Post: 1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan
City: Tokyo
Postal Code: 108-0075
Country: Japan

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA, LTE Bluetooth (EDR and BLE), ANT+, WLAN (802.11 a/ac/b/g/n), NFC, FM, GPS mobile phone
FCC ID	PY7-PM0817
Antenna	Internal
Power supply	Battery (charged by travel adapter or vehicle charger)
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	IMEI	HW Version	SW Version
EUT7	CB5A1ZTFL3	004402452521127	A	23.0.F.0.56
EUT13	CB5A1ZTFJ7	004402452421556	A	23.0.F.0.56
EUT11	CB5A1ZTFRY	004402452521432	A	23.0.F.0.56
#25139	CB5A1ZTFL3	004402452521127	A	23.0.F.0.56

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE1	Travel Charger	/	/
AE3	USB Cable	134912A21208328	AP1.0
#23086	Travel Charger	8512W32101941	RTL
#24925	USB Cable	134912AC120616	RTL

AE1, #23086

Commercial name	EP880
Type	AC-0400-EU
Manufacturer	SALCOMP
Length of cable	100 cm (length of USB cable)



AE3, #24925

Commercial name	EC803
Type	AI-0404
Manufacturer	Sony Mobile
Length of cable	100 cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of GSM/WCDMA/LTE Mobile Phone with integrated antenna and embedded battery.

The EUT supports GSM, WCDMA and LTE. It supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33. The HSDPA (Cat 24) and HSUPA (Cat 6) features are also supported.

It has MP3, camera, USB memory, FM radio, GPS receiver, NFC, Bluetooth (EDR, BLE), ANT+, WLAN (802.11 a/ac/b/g/n) and Wi-Fi hotspot functions.

It consists of normal options: USB cable and travel charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. EUT set-ups

EUT Set-up No.	Combination of EUT and AE	Remarks
Set.8	EUT7 + AE1 + AE3	Band II, Tests with travel charger
Set.9	EUT7	Band II, ERP/EIRP/RSE tests
Set.10	AE13	Band II, Conducted RF tests
Set.11	#25139+#23086+#24925	Band V, Tests with travel charger
Set.12	#25139	Band V, ERP/EIRP/RSE tests
Set.13	AE11	Band V, Conducted RF tests

Note: The GSM/WCDMA/LTE Mobile Phone with FCC ID is PY7-PM0817 manufactured by Sony Mobile Communications Inc. is a variant model based on GSM/WCDMA/LTE Mobile Phone with FCC ID is PY7-PM0808 for conformance test. According to the declaration of changes, the results are inherited from the initial model. The report number of initial model is I14Z47255-EMC02.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	Radio frequency devices	10-1-13 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-13 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r01

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

WCDMA Band II

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	24.232(c)	5.4	A.1	2
2	Emission Limit	24.238(a), 2.1051	5.5	A.2	2
3	Conducted Emission	15.107/207	7.2.2	A.3	1
4	Frequency Stability	24.235, 2.1055	5.3	A.4	2
5	Occupied Bandwidth	2.1049(h)(i)	5.5	A.5	2
6	Emission Bandwidth	24.238(a)	5.5	A.6	2
7	Band Edge Compliance	24.238(a)	5.5	A.7	2
8	Conducted Spurious Emission	24.238(a), 2.1057	5.5	A.8	2

WCDMA Band V

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	22.913(a)	5.4	A.1	2
2	Emission Limit	22.917, 2.1051	5.5	A.2	2
3	Conducted Emission	15.107/207	7.2.2	A.3	1
4	Frequency Stability	22.355, 2.1055	5.3	A.4	2
5	Occupied Bandwidth	2.1049(h)(i)	5.5	A.5	2
6	Emission Bandwidth	22.917(b)	5.5	A.6	2
7	Band Edge Compliance	22.917(b)	5.5	A.7	2
8	Conducted Spurious Emission	22.917, 2.1057	5.5	A.8	2

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the WCDMA functions among the features described in section 3.



7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL. DUE DATE	CAL. INTERVAL
1.	EMI Antenna	VULB 9163	9163-235	Schwarzbeck	2014-09-28	3 Years
2.	Test Receiver	ESCI	100344	R&S	2015-03-03	1 Year
3.	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 Years
4.	EMI Antenna	9117	167	Schwarzbeck	2015-07-06	
5.	EMI Antenna	3117	00058889	ETS-Lindgren	2014-12-20	3 Years
6.	Signal Generator	N5183A	MY49060052	Agilent	2015-03-02	1 Year
7.	Power Amplifier	5S1G4	0341863	AR	/	1 Year
8.	Universal Radio Communication Tester	CMW500	143008	R&S	2014-12-09	1 Year
9.	Universal Radio Communication Tester	CMW500	116588	R&S	2014-10-27	1 Year
10.	Universal Radio Communication Tester	E5515C	MY48363198	Agilent	2015-07-06	1 Year
11.	Spectrum Analyzer	E4440A	MY48250642	Agilent	2015-02-27	1 Year
12.	LISN	ESH2-Z5	829991/012	R&S	2015-04-14	1 Year
13.	Climatic chamber	SH-641	92014694	ESPEC	2015-11-27	1 Year

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 22.913(a), 24.232(b).

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with spectrum analyzer's peak detector.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each band: 1852.4 MHz, 1880.0 MHz and 1907.6 MHz for WCDMA Band II; 826.4 MHz, 836.6 MHz and 846.6 MHz for WCDMA Band V.

A.1.2.2 Measurement result

WCDMA Band II

	Channel number	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	24.55
	9400	1880.0	24.78
	9538	1907.6	24.70

WCDMA Band V

	Channel number	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	24.37
	4183	836.6	24.30
	4233	846.6	24.35

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

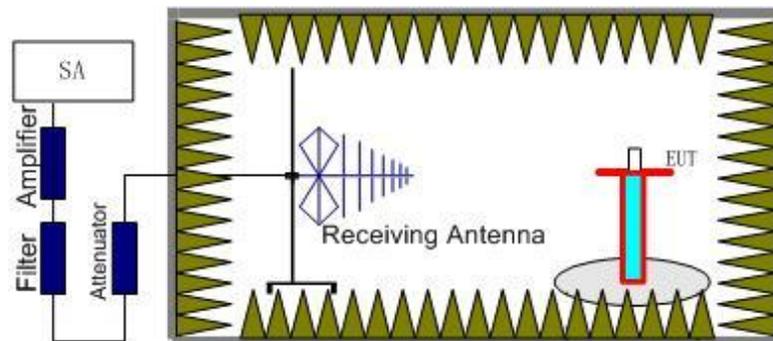

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

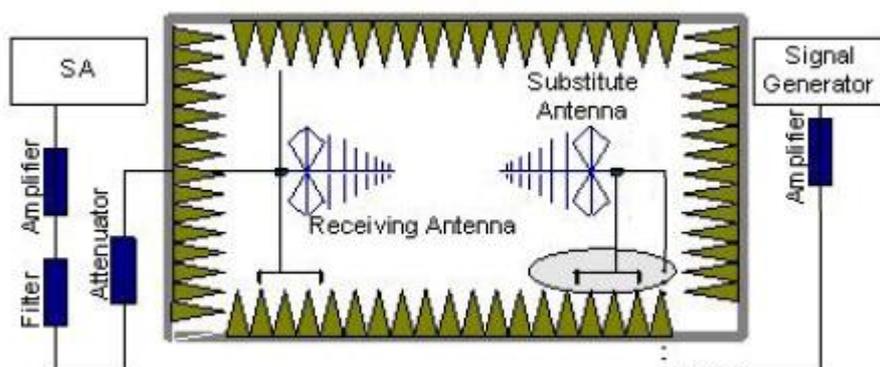

In the chamber, a substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power (EIRP) = $P_{Mea} - P_{Ag} - P_{cl} - G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (Unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15.

For test layout photo, please refer to Pic.1 in Annex B.

WCDMA Band II- EIRP

Limits

Band	Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

Measurement result

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Peak EIRP(dBm)	Polarization
1852.40	-27.59	3.18	-50.00	-4.55	23.78	Horizontal
1880.00	-26.81	3.11	-50.00	-4.43	24.51	Horizontal
1907.60	-26.41	3.18	-50.00	-4.31	24.72	Horizontal

Sample calculation: 1907.60MHz

$$\begin{aligned} \text{Peak EIRP (dBm)} &= P_{Mea}(-26.41\text{dBm}) - G_a(-4.31\text{dBi}) - P_{Ag}(-50.00\text{ dB}) - P_{cl}(3.18\text{dB}) \\ &= 24.72\text{ dBm} \end{aligned}$$

ANALYZER SETTINGS: RBW = VBW = 5MHz

Note: Expanded measurement uncertainty for WCDMA Band II is $U = 1.07\text{dB}$, $k = 2$.



WCDMA Band V- ERP

Limits

Band	Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

Measurement result

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	Peak ERP(dBm)	Polarization
826.40	-24.44	2.07	-53.00	0.85	2.15	23.49	Horizontal
836.60	-24.55	2.08	-53.00	0.90	2.15	23.32	Horizontal
846.60	-22.85	2.09	-53.00	0.94	2.15	24.97	Horizontal

Sample calculation: 846.6MHz

$$\begin{aligned} \text{Peak ERP (dBm)} &= P_{\text{Mea}}(-22.85\text{dBm}) - G_a (0.94\text{dBi}) - P_{\text{Ag}} (-53.00\text{dB}) - P_{\text{cl}} (2.09\text{dB}) - 2.15 \\ &= 24.97 \text{ dBm} \end{aligned}$$

ANALYZER SETTINGS: RBW = VBW = 5MHz

Note: Expanded measurement uncertainty for WCDMA Band V is $U = 0.96 \text{ dB}$, $k=2$.

A.2 EMISSION LIMIT

Reference

FCC: CFR 2.1051, Part 22.917(a), 24.238(a).


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in fully-anechoic chamber 3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 22.917 and Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II and WCDMA Band V.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

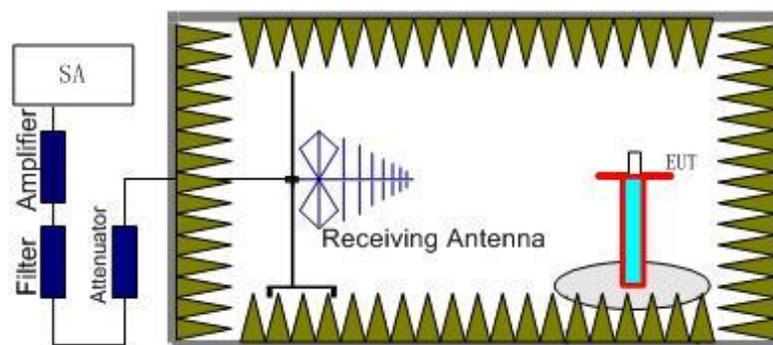

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

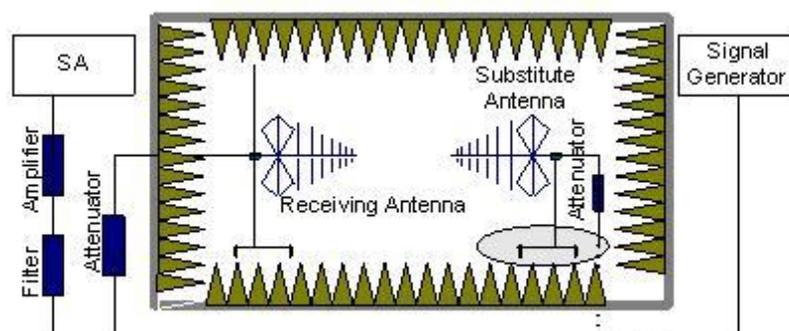

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917(a) and 24.238(a) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz) and WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II or WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

WCDMA BAND II, Channel 9262/1852.4MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3702.64	-59.69	4.43	-8.14	-55.98	-13.00	Horizontal
5559.90	-59.49	5.44	-10.02	-54.91	-13.00	Horizontal
7452.67	-58.09	6.49	-11.37	-53.21	-13.00	Horizontal
9328.47	-59.00	7.68	-12.60	-54.08	-13.00	Vertical
11352.45	-56.27	8.62	-12.40	-52.49	-13.00	Horizontal
13244.88	-52.87	9.12	-13.54	-48.45	-13.00	Vertical

WCDMA BAND II, Channel 9400/1880MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3758.64	-55.63	4.53	-8.21	-51.95	-13.00	Horizontal
5645.09	-60.64	5.45	-10.06	-56.03	-13.00	Vertical
7559.53	-58.23	6.79	-11.46	-53.56	-13.00	Horizontal
9472.27	-57.46	7.40	-12.60	-52.26	-13.00	Horizontal
11396.14	-56.42	8.67	-12.40	-52.69	-13.00	Vertical
13206.58	-52.98	9.14	-13.51	-48.61	-13.00	Horizontal

WCDMA BAND II, Channel 9538/1907.6MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3813.72	-58.08	4.49	-8.28	-54.29	-13.00	Horizontal
5702.85	-62.19	5.52	-10.08	-57.63	-13.00	Vertical
7559.98	-58.63	6.80	-11.46	-53.97	-13.00	Horizontal
9585.63	-59.49	7.93	-12.57	-54.85	-13.00	Horizontal
11464.69	-58.00	8.63	-12.40	-54.23	-13.00	Vertical
13305.13	-54.81	9.09	-13.61	-50.29	-13.00	Horizontal

WCDMA BAND V, Channel 4132/826.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1669.59	-56.25	2.98	-5.35	2.15	-56.03	-13.00	Horizontal
2842.44	-55.67	3.84	-6.29	2.15	-55.37	-13.00	Horizontal
3307.59	-53.81	4.17	-7.44	2.15	-52.69	-13.00	Vertical
4120.26	-52.81	4.68	-8.57	2.15	-51.07	-13.00	Vertical
4970.83	-50.68	5.11	-9.65	2.15	-48.29	-13.00	Horizontal
5787.98	-48.79	5.66	-10.12	2.15	-46.48	-13.00	Horizontal

WCDMA BAND V, Channel 4183/836.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1675.01	-55.50	2.97	-5.33	2.15	-55.29	-13.00	Horizontal
2505.53	-55.67	3.59	-5.41	2.15	-56.00	-13.00	Horizontal
3349.63	-54.45	4.24	-7.54	2.15	-53.30	-13.00	Vertical
4189.25	-52.28	4.66	-8.61	2.15	-50.48	-13.00	Vertical
5004.73	-50.46	5.17	-9.70	2.15	-48.08	-13.00	Vertical
5859.24	-49.30	5.66	-10.14	2.15	-46.97	-13.00	Horizontal

WCDMA BAND V, Channel 4233/846.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1695.50	-51.56	2.95	-5.24	2.15	-51.42	-13.00	Horizontal
2542.19	-55.91	3.62	-5.51	2.15	-56.17	-13.00	Horizontal
3382.16	-54.48	4.23	-7.62	2.15	-53.24	-13.00	Vertical
4243.55	-52.22	4.76	-8.65	2.15	-50.48	-13.00	Horizontal
5071.19	-51.12	5.21	-9.74	2.15	-48.74	-13.00	Horizontal
5926.51	-50.65	5.54	-10.17	2.15	-48.17	-13.00	Vertical

Note: Expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

A.3 CONDUCTED EMISSION

Reference

FCC: CFR Part 15.107/207

The measurement procedure in ANSI C63.4-2009 is used. Conducted Emission is measured with travel charger. The EUT is working under WCDMA 850/1900MHz traffic mode which is the worst case of conducted emission measurement.


For test layout photo, please refer to Pic.2 in Annex B.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result
WCDMA Band II

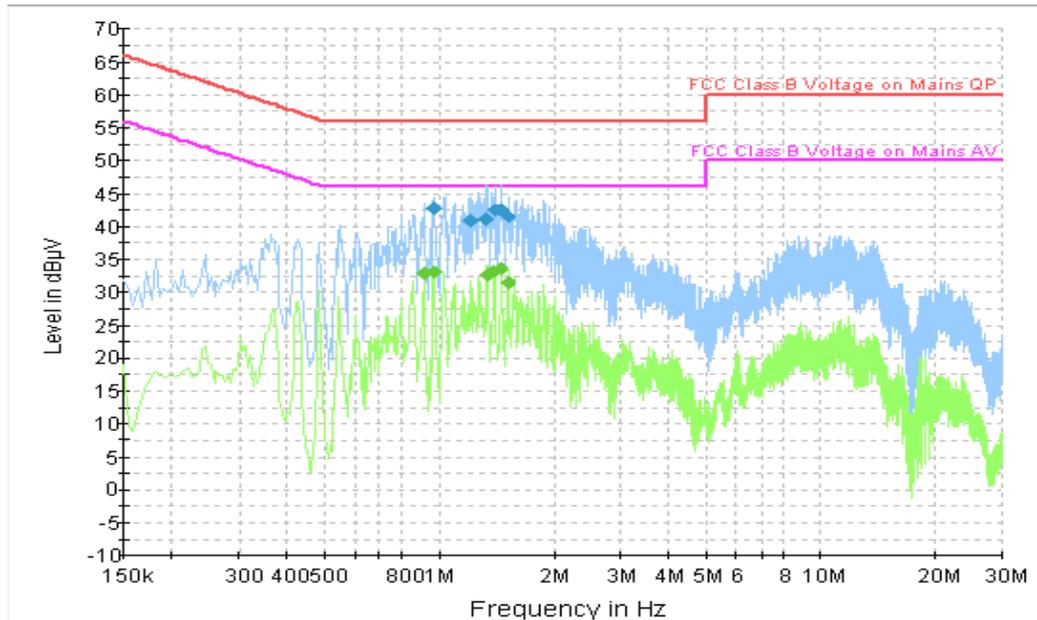

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.


Final Result 1

Frequency (MHz)	QuasiPeak (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.973500	42.8	GND	L1	9.7	13.2	56.0
1.216500	40.9	GND	L1	9.7	15.1	56.0
1.333500	41.1	GND	L1	9.7	14.9	56.0
1.405500	42.4	GND	L1	9.7	13.6	56.0
1.464000	42.6	GND	L1	9.7	13.4	56.0
1.513500	41.5	GND	L1	9.7	14.5	56.0

Final Result 2

Frequency (MHz)	Average (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.910500	32.8	GND	L1	9.7	13.2	46.0
0.973500	33.0	GND	L1	9.7	13.0	46.0
1.342500	32.7	GND	L1	9.7	13.3	46.0
1.392000	33.2	GND	L1	9.7	12.8	46.0
1.455000	33.6	GND	L1	9.7	12.4	46.0
1.513500	31.4	GND	L1	9.7	14.6	46.0

WCDMA Band V

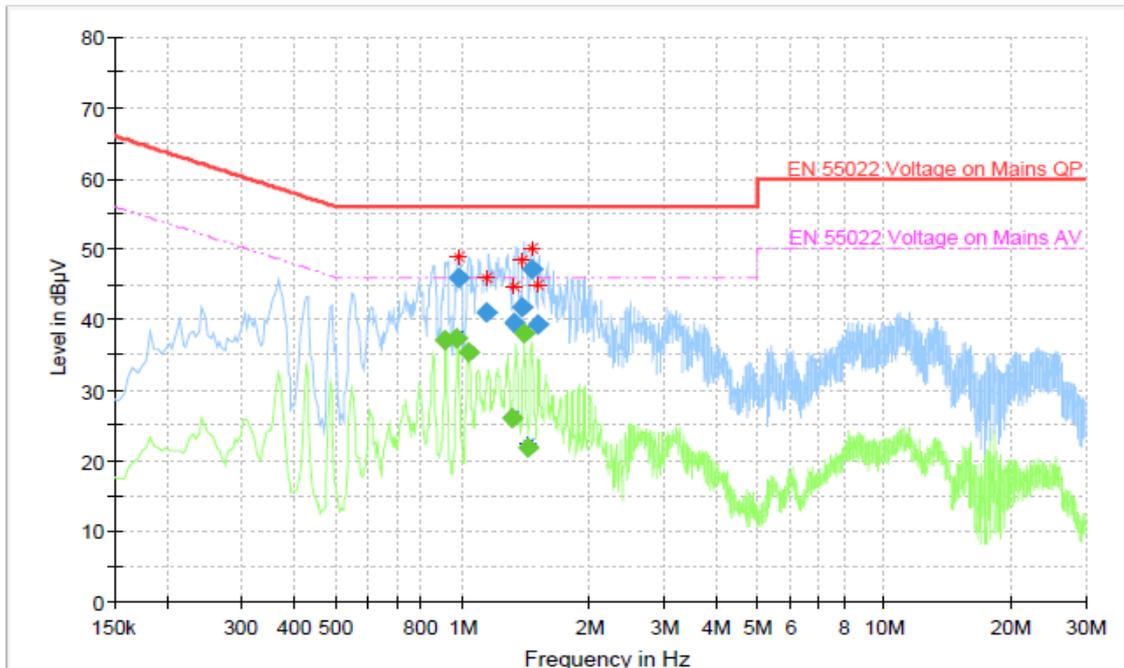

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

 =PK value in pre-measurement

Final Result 1

Frequency (MHz)	QuasiPeak (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.979587	46.0	GND	L1	10.1	10.0	56.0
1.140837	40.9	GND	L1	10.1	15.1	56.0
1.326712	39.5	GND	L1	10.1	16.5	56.0
1.391798	41.7	GND	L1	10.1	14.3	56.0
1.457096	47.2	GND	L1	10.1	8.8	56.0
1.507288	39.2	GND	L1	10.1	16.8	56.0

Final Result 2

Frequency (MHz)	Average (dB µV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.912990	37.2	GND	L1	10.1	8.8	46.0
0.972558	37.3	GND	L1	10.1	8.7	46.0
1.031587	35.3	GND	L1	10.1	10.7	46.0
1.315788	25.9	GND	L1	10.1	20.1	46.0
1.403048	38.1	GND	L1	10.1	7.9	46.0
1.428288	21.9	GND	L1	10.1	24.1	46.0

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.9$ dB, $k=2$.

A.4 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235.

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

WCDMA Band II

Room Temperature: 24 °C

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)	Frequency error (ppm)
3.6	7	0.003
4.2	4	0.002
3.8	6	0.003

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)	Frequency error (ppm)
50°	6	0.003
40°	6	0.003
30°	-90	0.048
20°	8	0.004
10°	7	0.004
0°	8	0.004
- 10°	6	0.003
- 20°	7	0.003
- 30°	7	0.004

WCDMA Band V

Room Temperature: 24°C

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)	Frequency error (ppm)
3.6	-2	-0.002
4.2	-2	-0.002
3.8	-1	-0.001

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)	Frequency error (ppm)
50°	-5	-0.006
40°	-3	-0.004
30°	-3	-0.004
20°	-1	-0.001
10°	0	0.000
0°	1	0.001
- 10°	-2	-0.002
- 20°	-3	-0.004
- 30°	-3	-0.004

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.5 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.5.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA Band V. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

Measurement Parameters:

RBW = 50 kHz, VBW = 100 kHz


WCDMA Band II (99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.183
1880.0	4.167
1907.6	4.183

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


WCDMA Band II

Channel 9262-Occupied Bandwidth (99% BW)

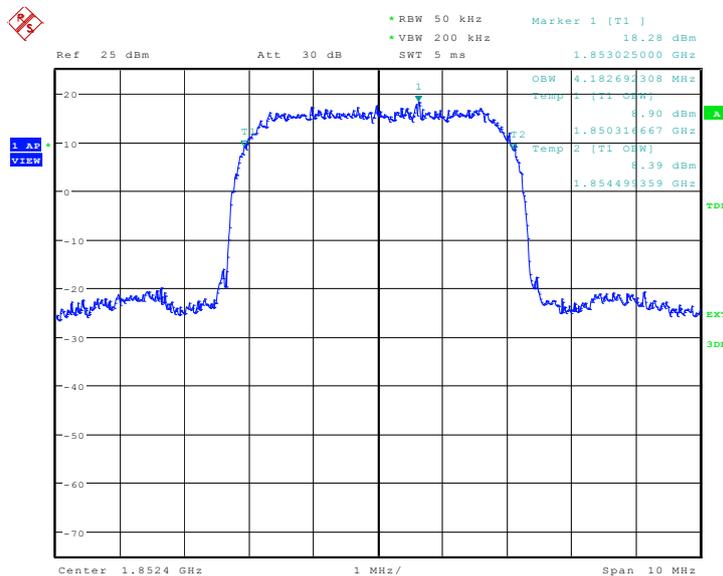


Date: 21.JUL.2014 09:48:24

Channel 9400-Occupied Bandwidth (99% BW)

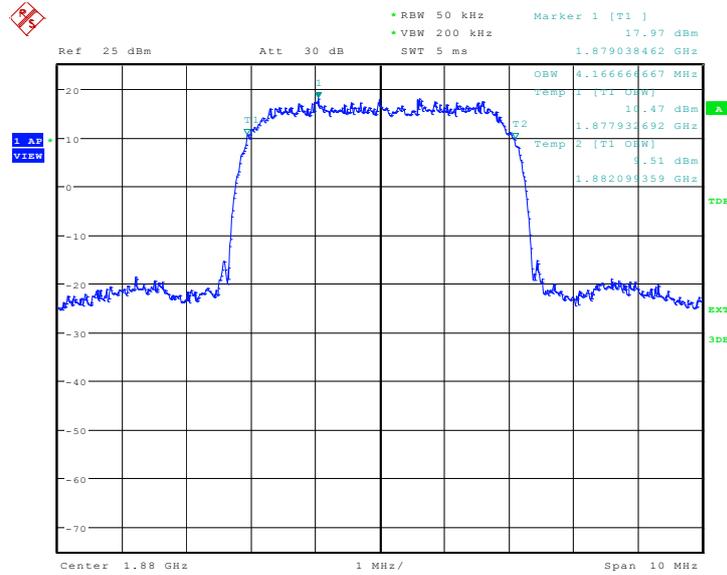


Date: 21.JUL.2014 09:48:58

Channel 9538-Occupied Bandwidth (99% BW)

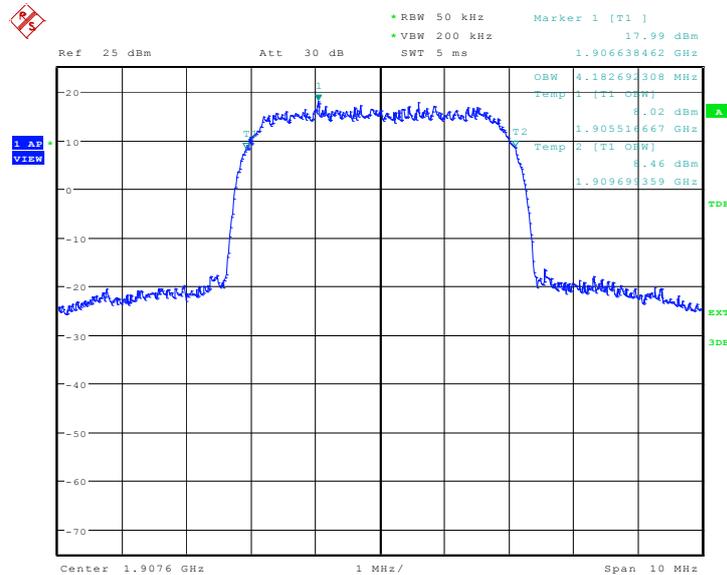


Date: 21.JUL.2014 09:49:33

Channel 4183-Occupied Bandwidth (99% BW)

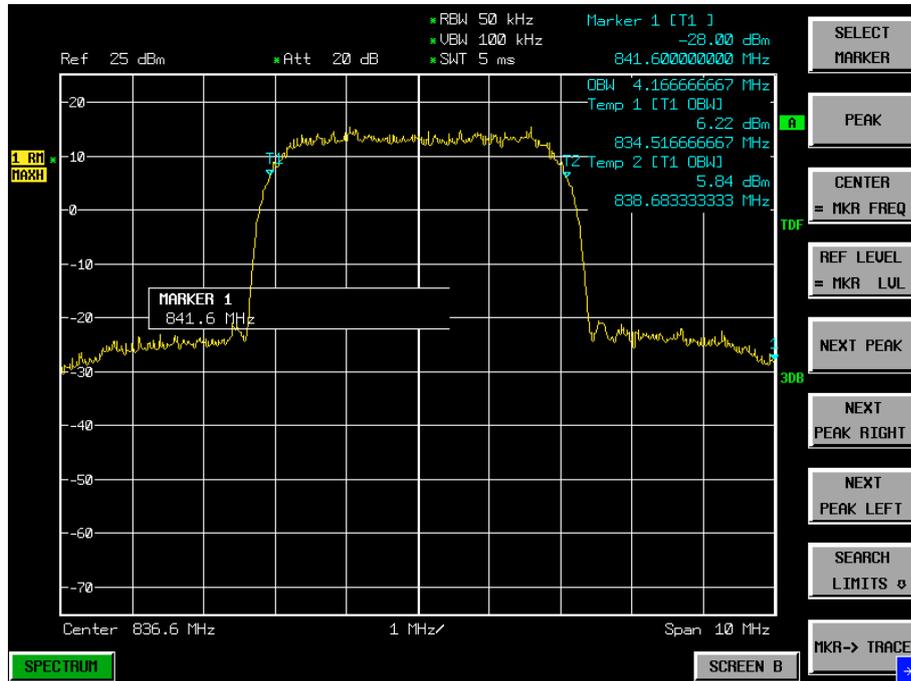

Channel 4233-Occupied Bandwidth (99% BW)

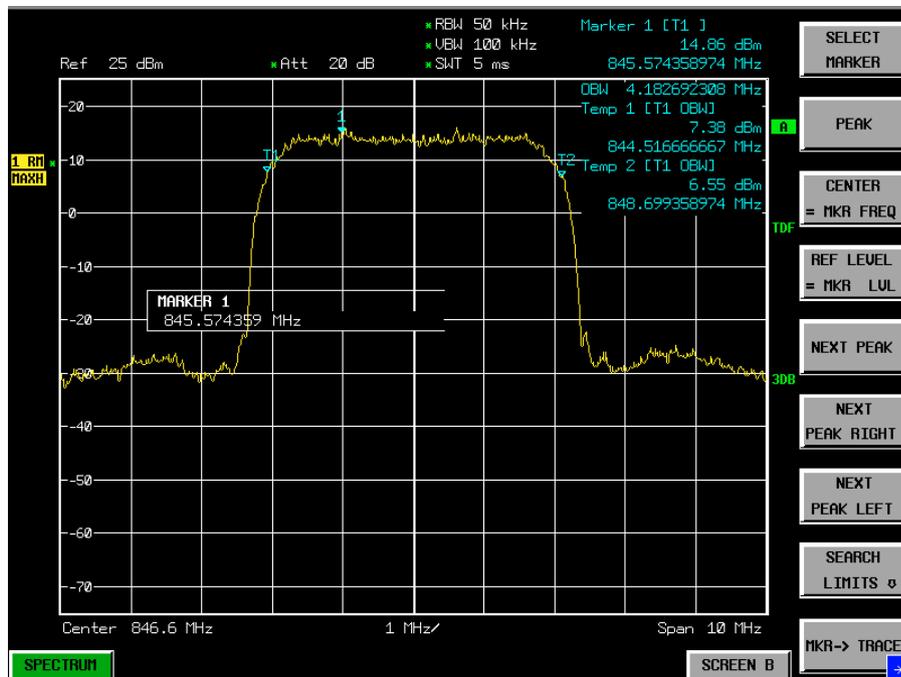

A.6 EMISSION BANDWIDTH

Reference

FCC: CFR Part 22.917(b), 24.238(a).

A.6.1 Emission Bandwidth Results

Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band II and WCDMA Band V. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

Measurement Parameters:

RBW = 50 kHz, VBW = 100 kHz


WCDMA Band II (100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(MHz)
1852.4	4.487
1880.0	4.487
1907.6	4.519

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2.


WCDMA Band II

Channel 9262-Occupied Bandwidth (100% BW)

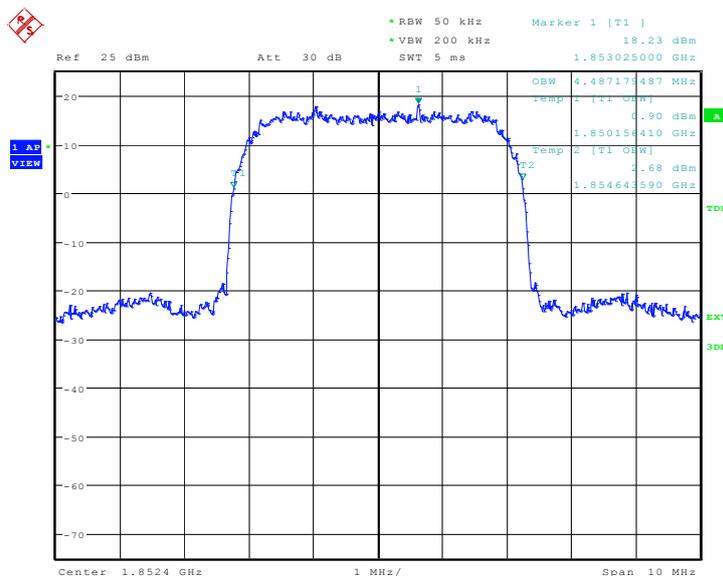


Date: 21.JUL.2014 09:50:09

Channel 9400-Occupied Bandwidth (100% BW)

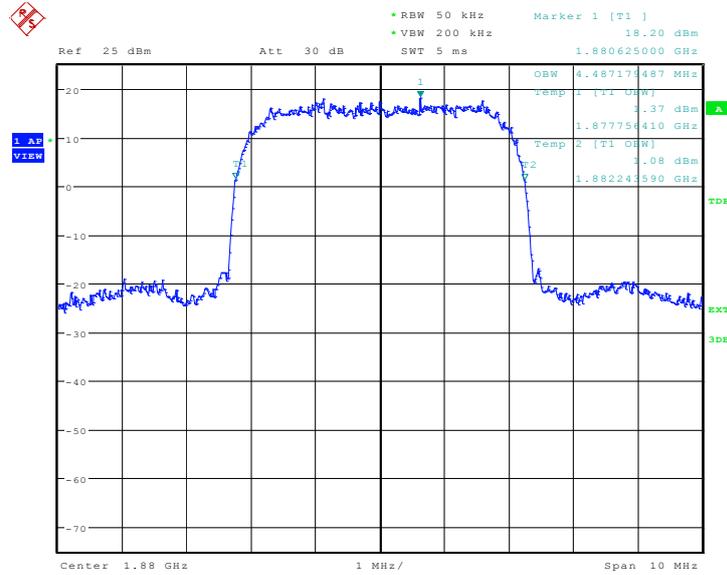

Date: 21.JUL.2014 09:50:43

Channel 9538-Occupied Bandwidth (100% BW)

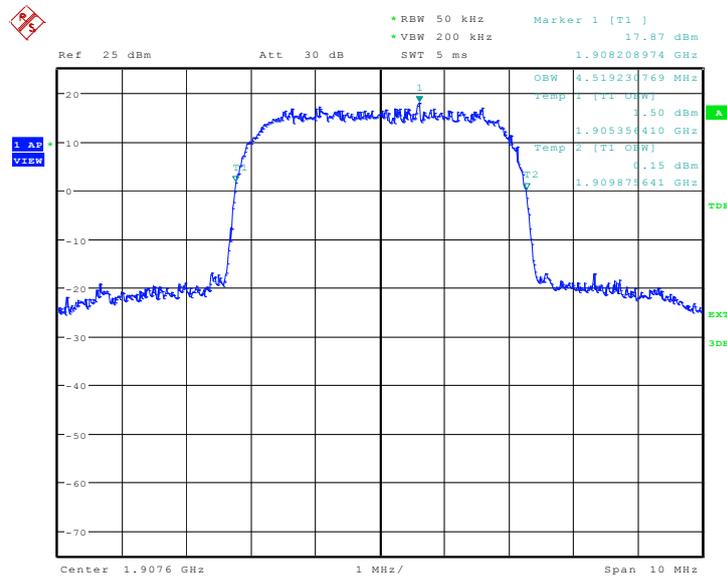

Date: 21.JUL.2014 09:51:18


WCDMA Band V (100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(MHz)
826.40	4.471
836.60	4.503
846.60	4.455


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2.

WCDMA Band V


Channel 4132-Occupied Bandwidth (100% BW)

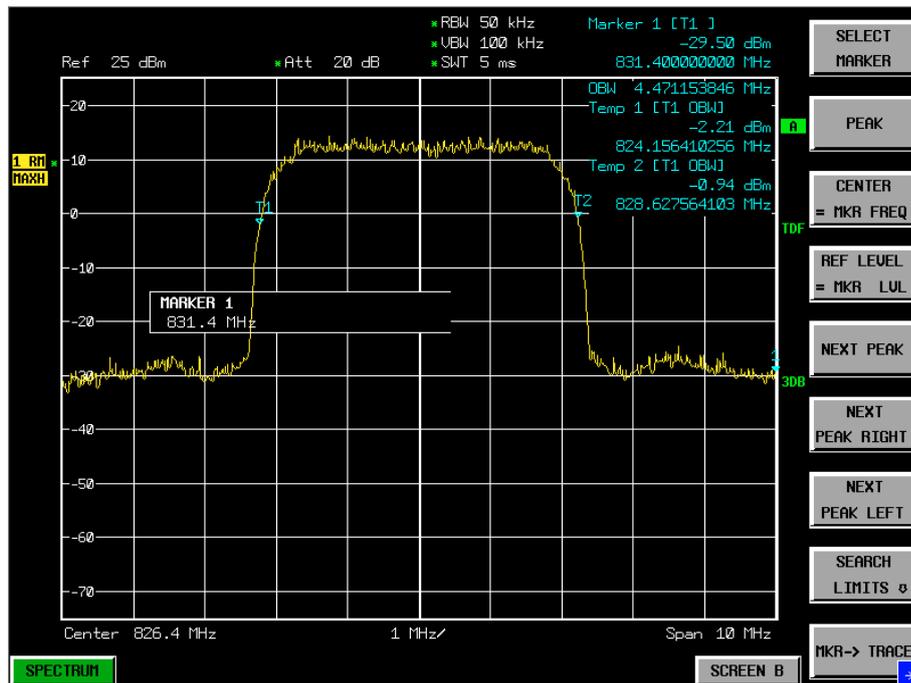

Channel 4183-Occupied Bandwidth (100% BW)

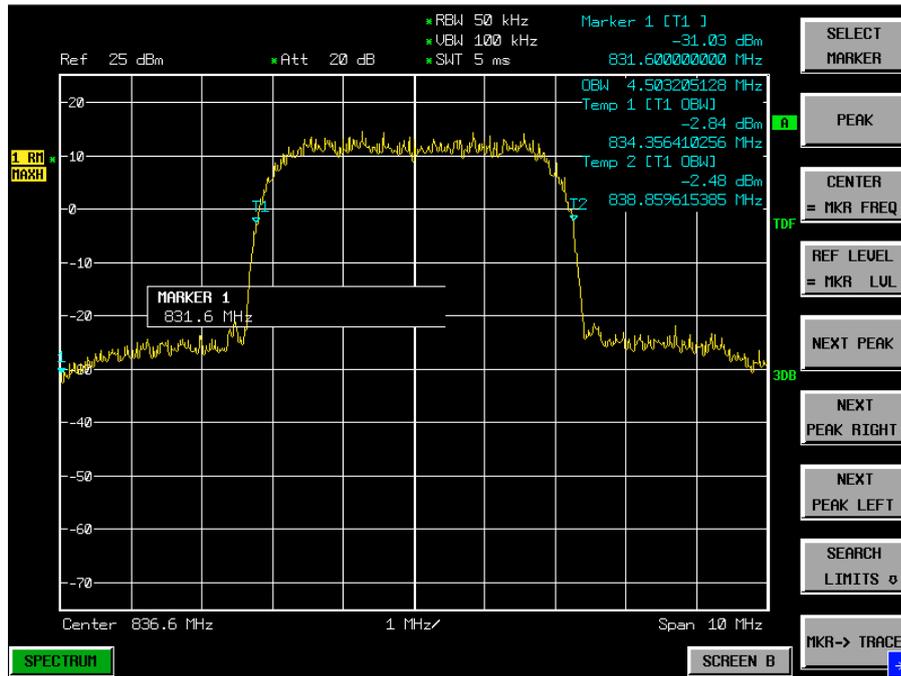

Channel 4233-Occupied Bandwidth (100% BW)

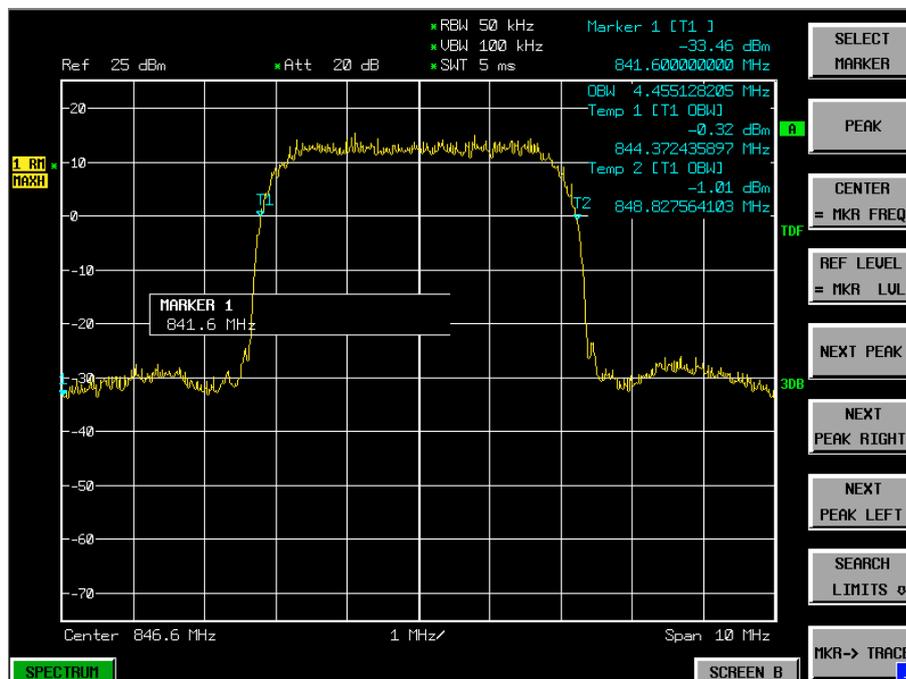

A.7 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b), 24.238(a).


A.7.1 Measurement limit

On any frequency outside frequency band of the US Cellular spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

A.7.2 Measurement result


WCDMA Band II

LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

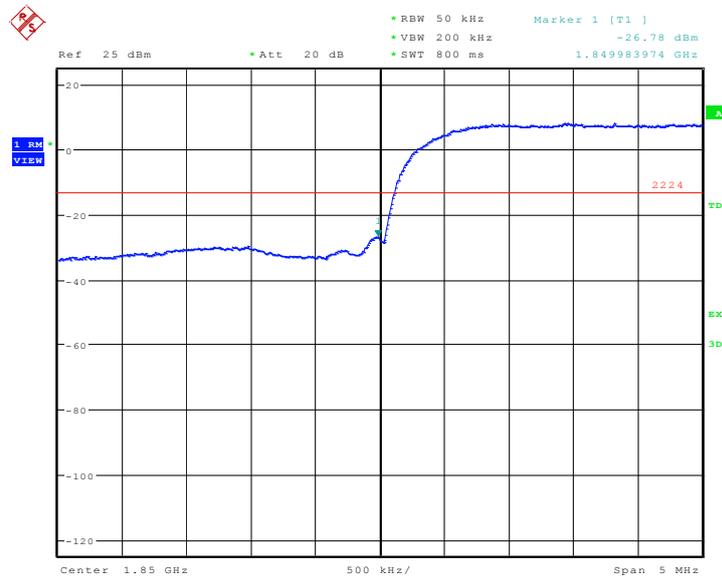

Date: 21.JUL.2014 09:51:34


HIGH BAND EDGE BLOCK-C (WCDMA Band II) –Channel 9538

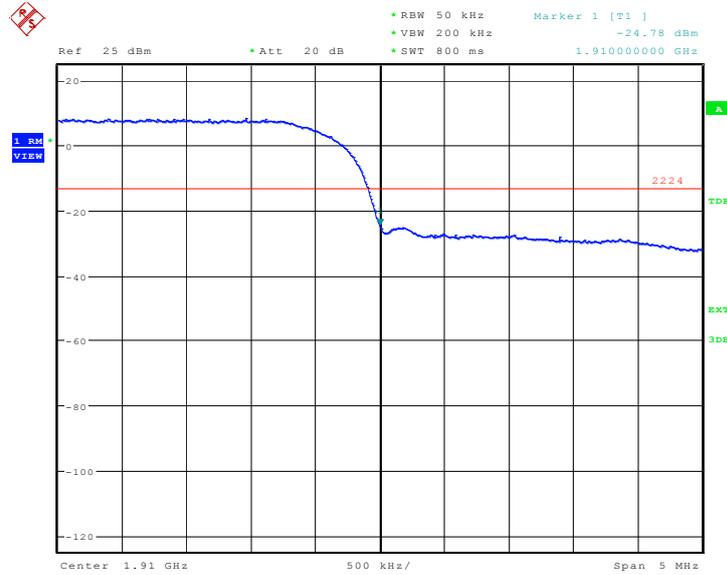


Date: 21.JUL.2014 09:51:50

WCDMA Band V

LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

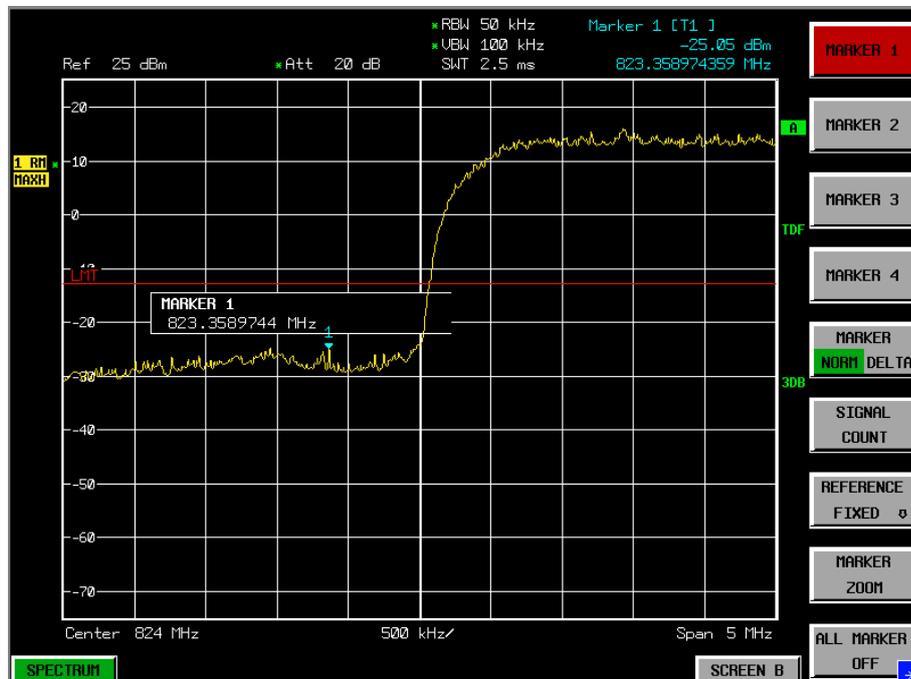

HIGH BAND EDGE BLOCK-C (WCDMA Band V) –Channel 4233

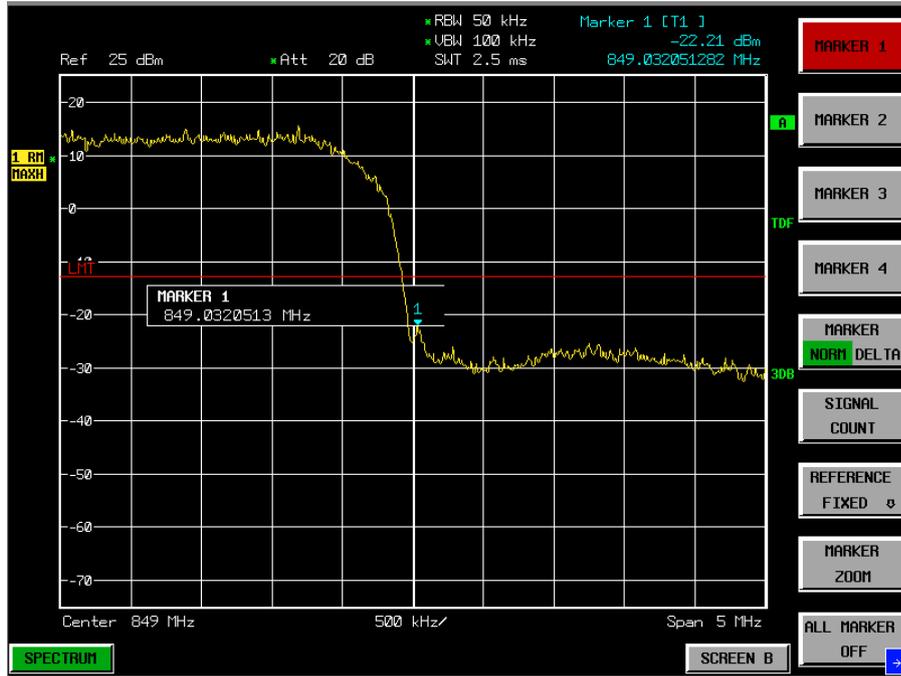

A.8 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 22.917, 24.238(a).

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II, this equates to a frequency range of 30 MHz to 19.1 GHz, data are taken from 30 MHz to 20 GHz. For WCDMA Band V, data are taken from 30 MHz to 10 GHz. For WCDMA Band IV, data are taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 8.2 Measurement Limit

Part 22.917 and Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


A. 8.3 Measurement result

Measurement Uncertainty: 0.3dB

WCDMA Band II

A.8.3.1 Channel 9262: 30MHz –1GHz

Spurious emission limit –13dBm.

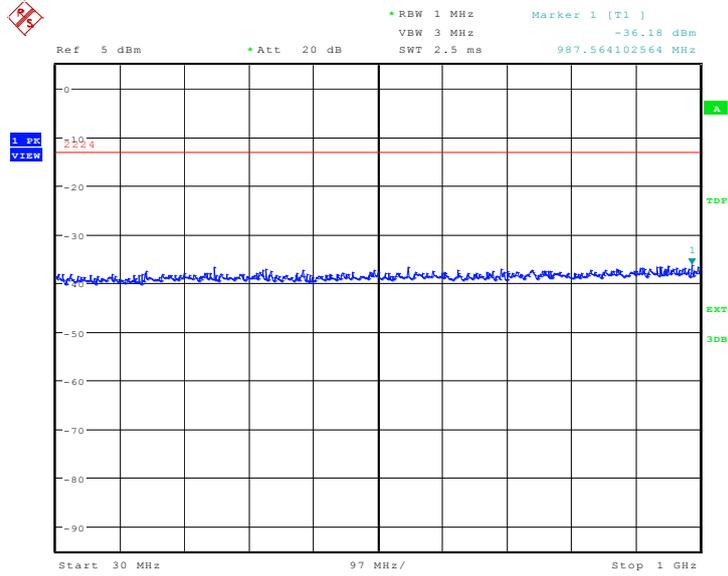


Date: 21.JUL.2014 09:54:32

A.8.3.2 Channel 9262: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

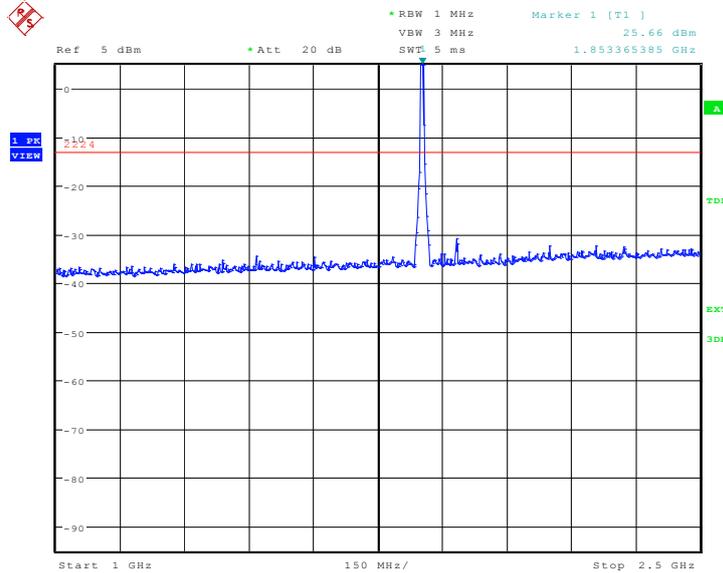

Date: 21.JUL.2014 09:55:00


A.8.3.3 Channel 9262: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

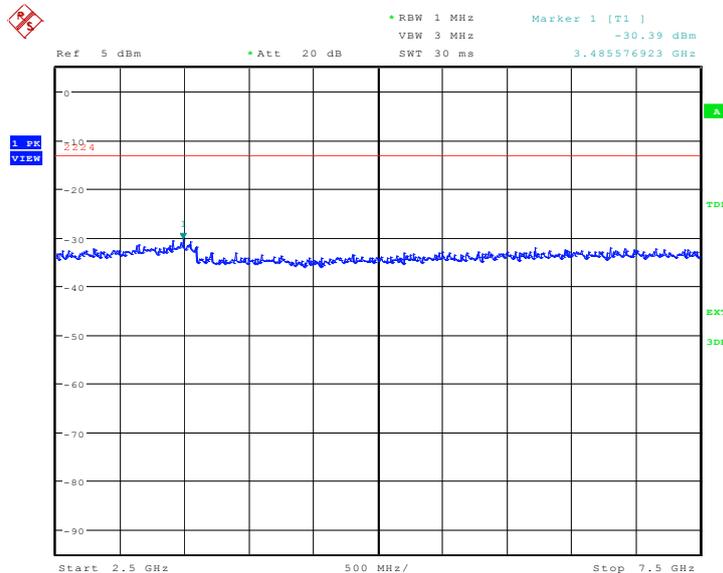


Date: 21.JUL.2014 09:55:29

A.8.3.4 Channel 9262: 7.5GHz –10GHz
Spurious emission limit –13dBm.

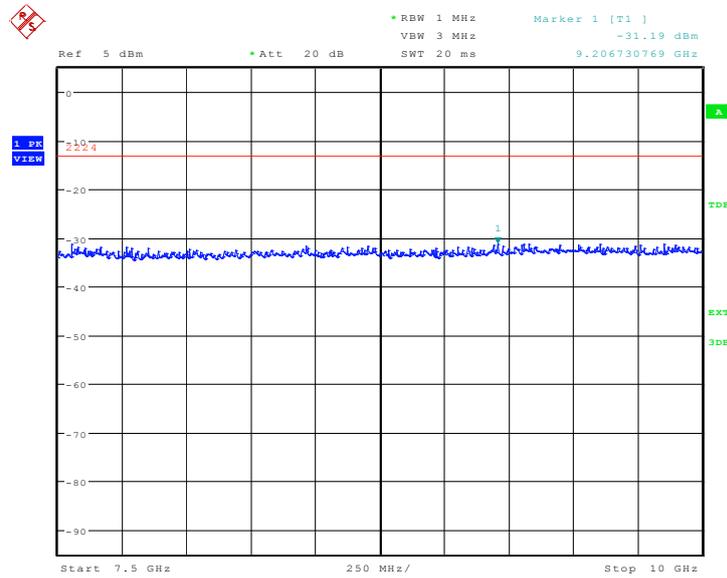


Date: 21.JUL.2014 09:55:57

A.8.3.5 Channel 9262: 10GHz –15GHz
Spurious emission limit –13dBm.

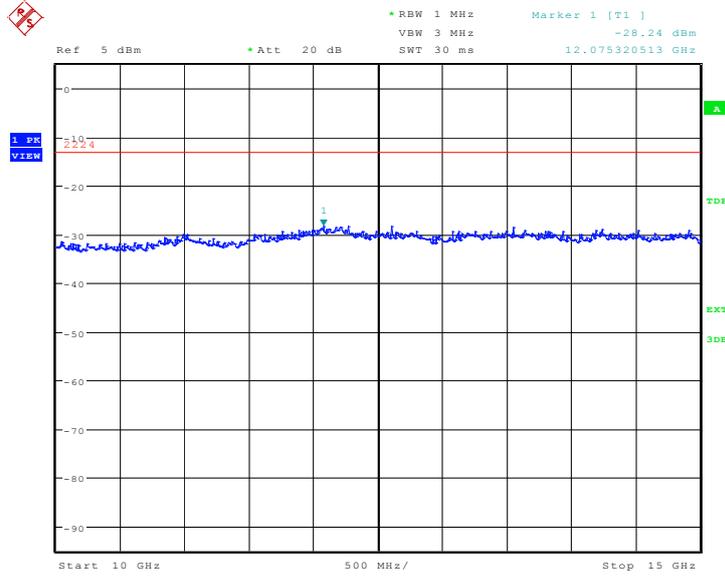


Date: 21.JUL.2014 09:56:25

A.8.3.6 Channel 9262: 15GHz –20GHz
Spurious emission limit –13dBm.

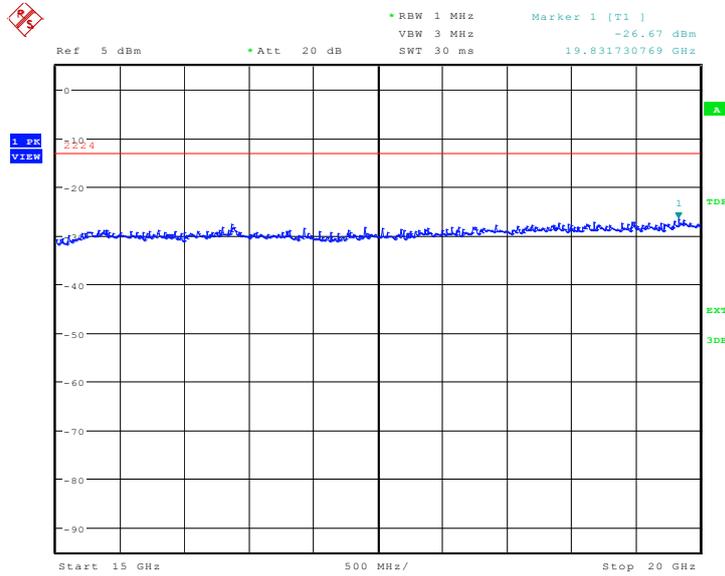

Date: 21.JUL.2014 09:56:53


A.8.3.7 Channel 9400: 30MHz –1GHz
Spurious emission limit –13dBm.

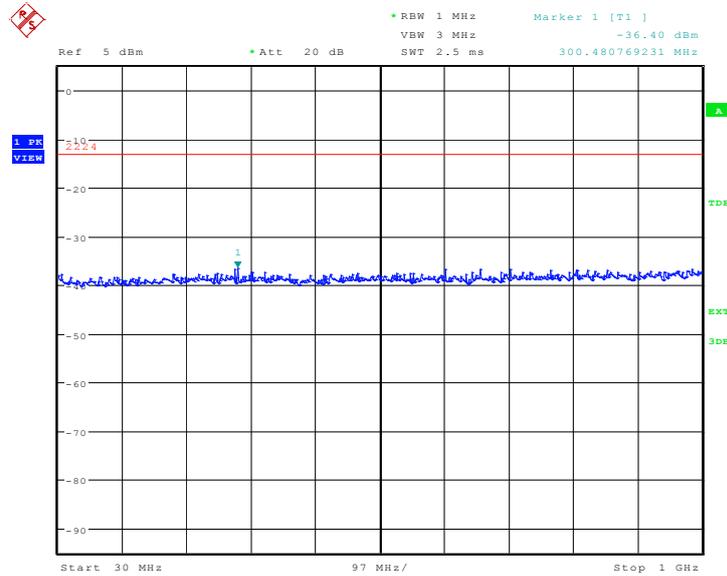

Date: 21.JUL.2014 09:57:24


A.8.3.8 Channel 9400: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

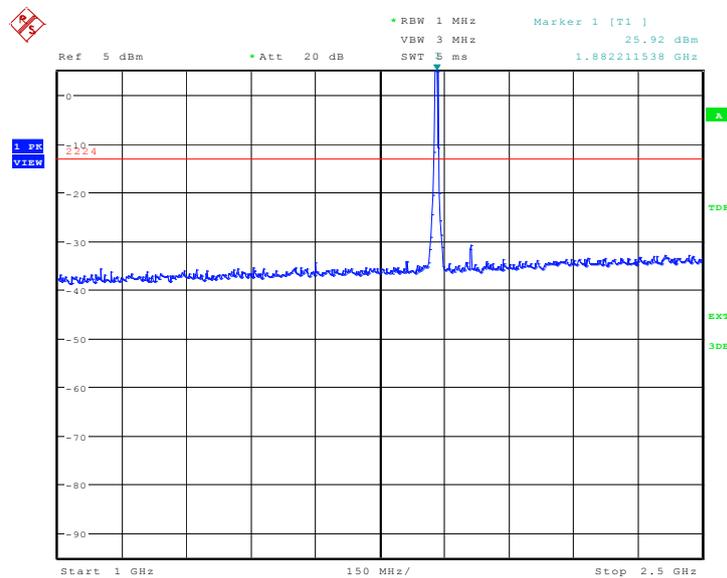


Date: 21.JUL.2014 09:57:52

A.8.3.9 Channel 9400: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

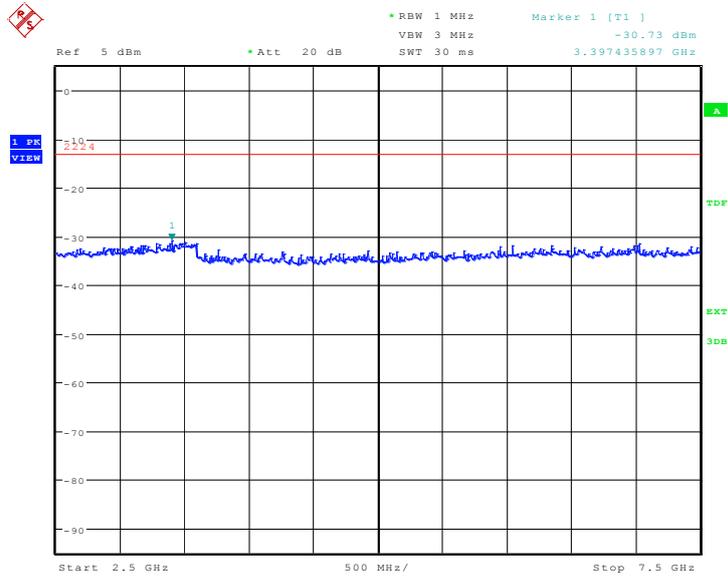


Date: 21.JUL.2014 09:58:20

A.8.3.10 Channel 9400: 7.5GHz –10GHz
Spurious emission limit –13dBm.

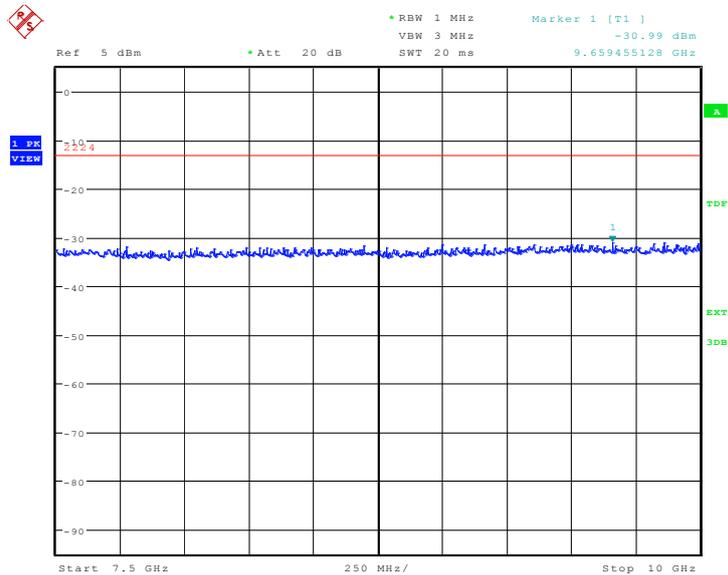


Date: 21.JUL.2014 09:58:48

A.8.3.11 Channel 9400: 10GHz –15GHz
Spurious emission limit –13dBm.

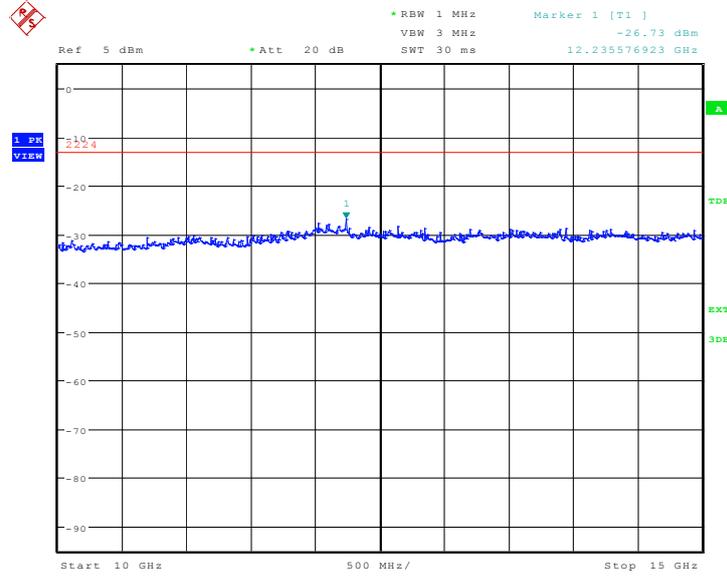


Date: 21.JUL.2014 09:59:17

A.8.3.12 Channel 9400: 15GHz –20GHz
Spurious emission limit –13dBm.

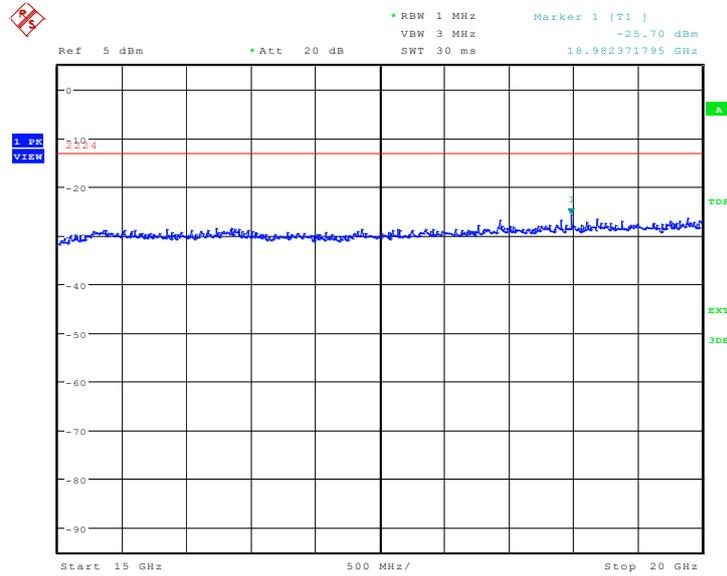

Date: 21.JUL.2014 09:59:45


A.8.3.13 Channel 9538: 30MHz –1GHz
Spurious emission limit –13dBm.

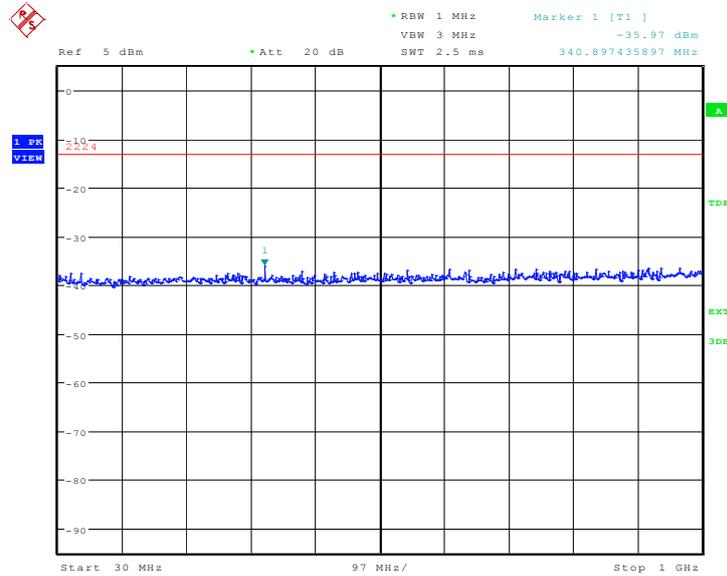

Date: 21.JUL.2014 10:00:16


A.8.3.14 Channel 9538: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

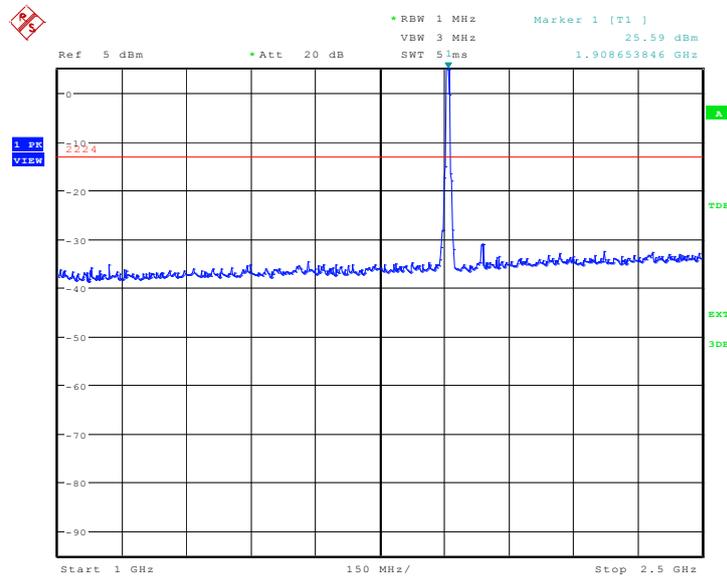


Date: 21.JUL.2014 10:00:44

A.8.3.15 Channel 9538: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

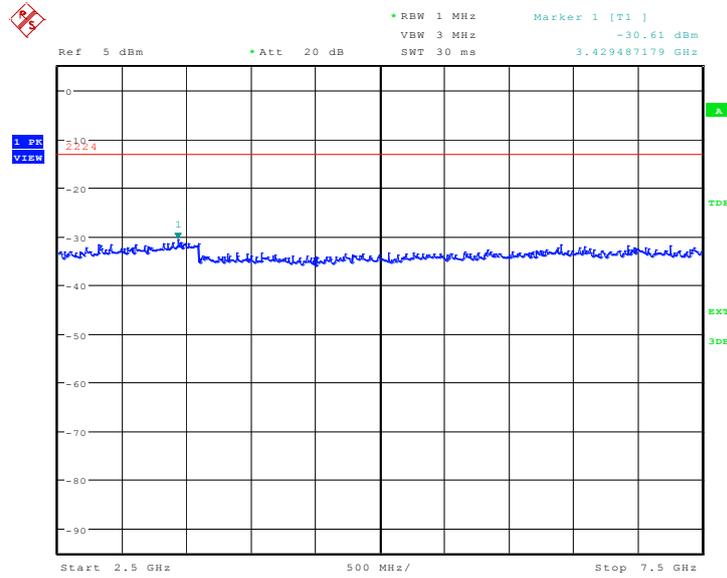


Date: 21.JUL.2014 10:01:12

A.8.3.16 Channel 9538: 7.5GHz –10GHz
Spurious emission limit –13dBm.

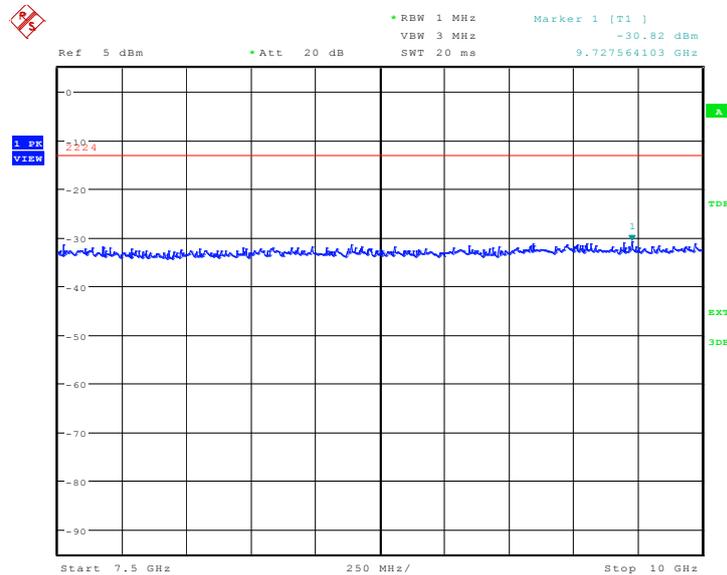


Date: 21.JUL.2014 10:01:40

A.8.3.17 Channel 9538: 10GHz –15GHz
Spurious emission limit –13dBm.

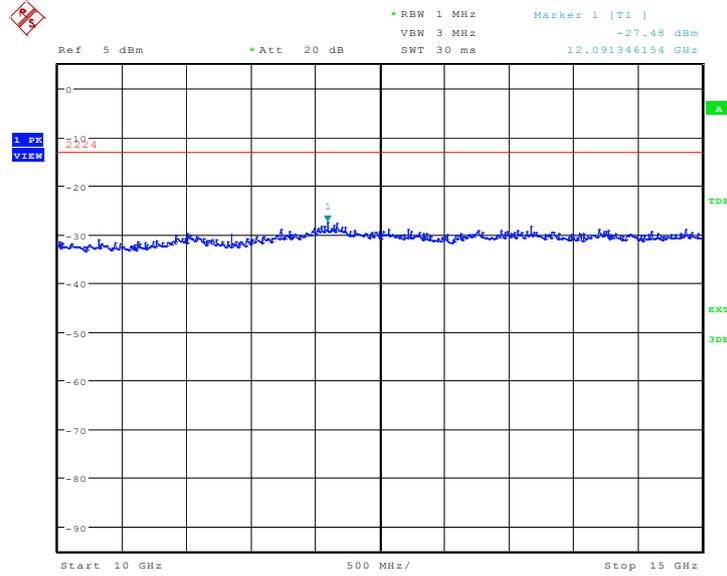

Date: 21.JUL.2014 10:02:08

A.8.3.18 Channel 9538: 15GHz –20GHz
Spurious emission limit –13dBm.

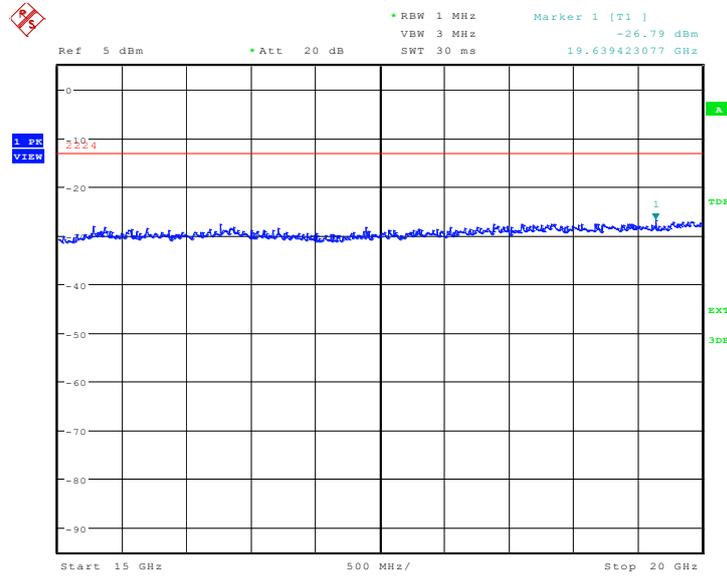


Date: 21.JUL.2014 10:02:37

WCDMA Band V

A.8.3.37 Channel 4132: 30MHz –1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

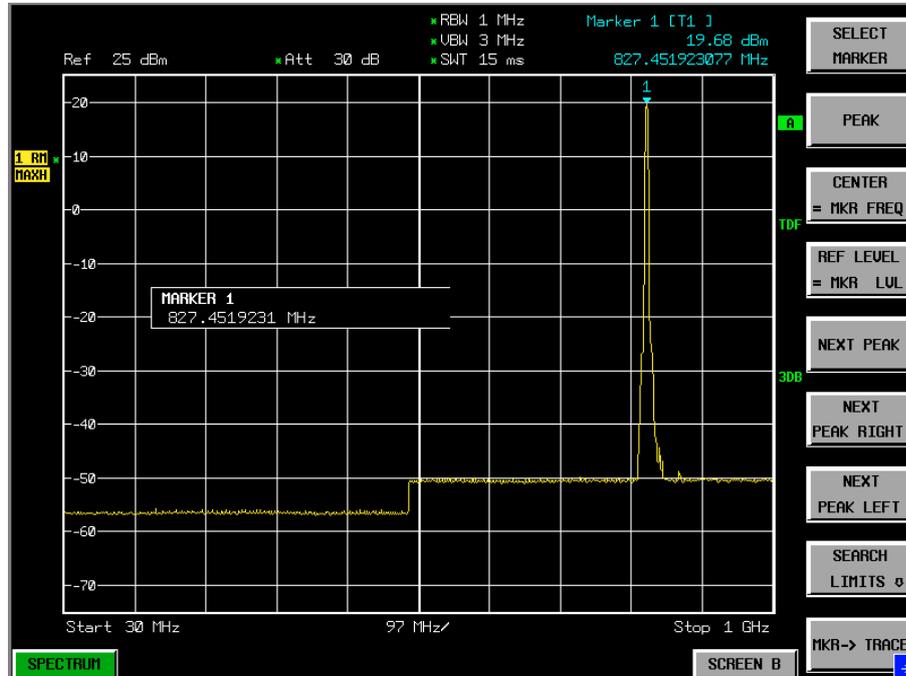


A.8.3.38 Channel 4132: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

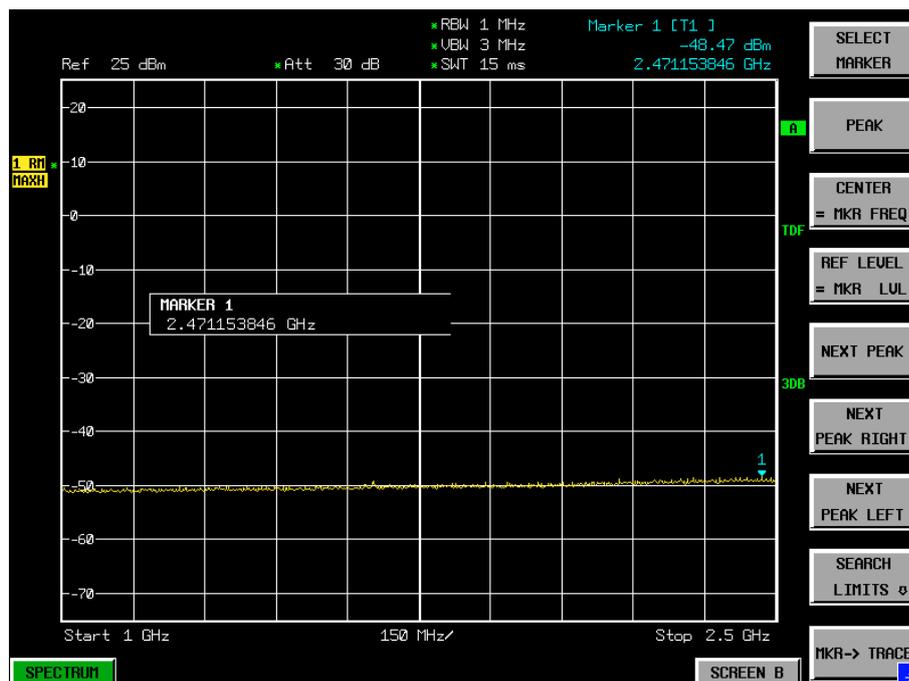


A.8.3.39 Channel 4132: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

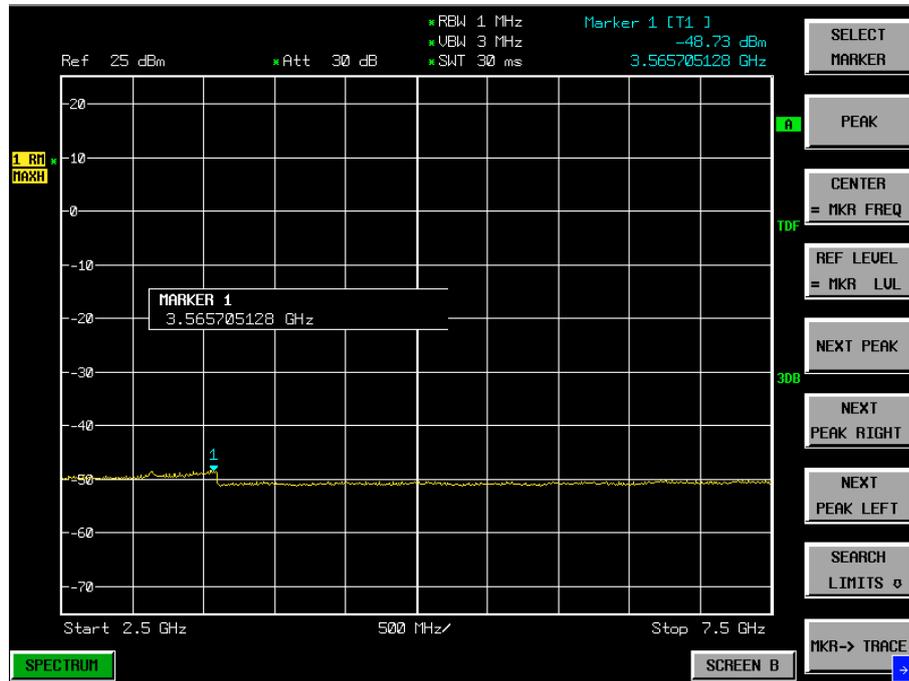

A.8.3.40 Channel 4132: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

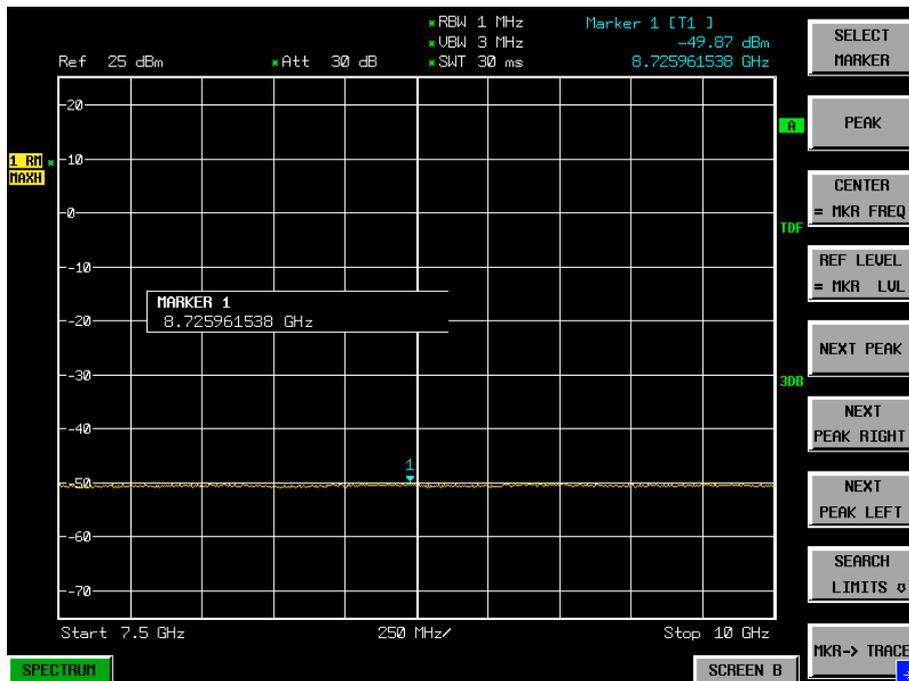

A.8.3.41 Channel 4183: 30MHz –1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

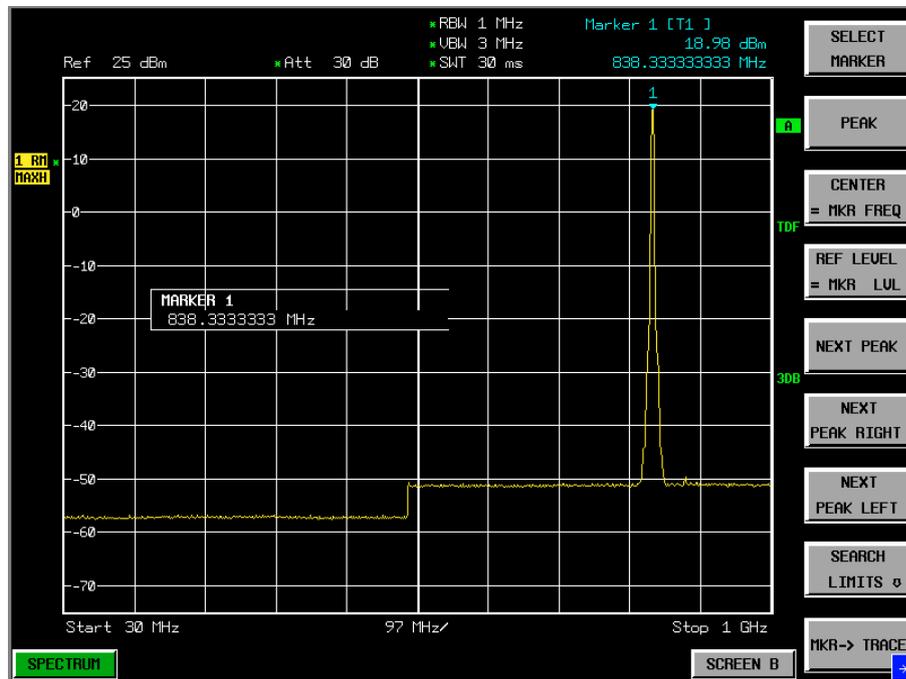


A.8.3.42 Channel 4183: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

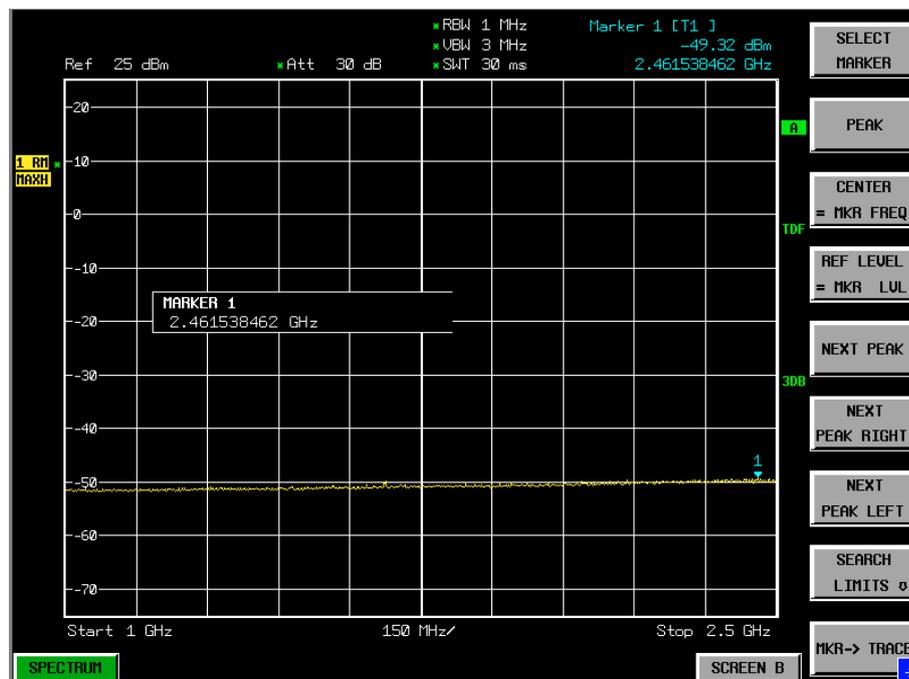

A.8.3.43 Channel 4183: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

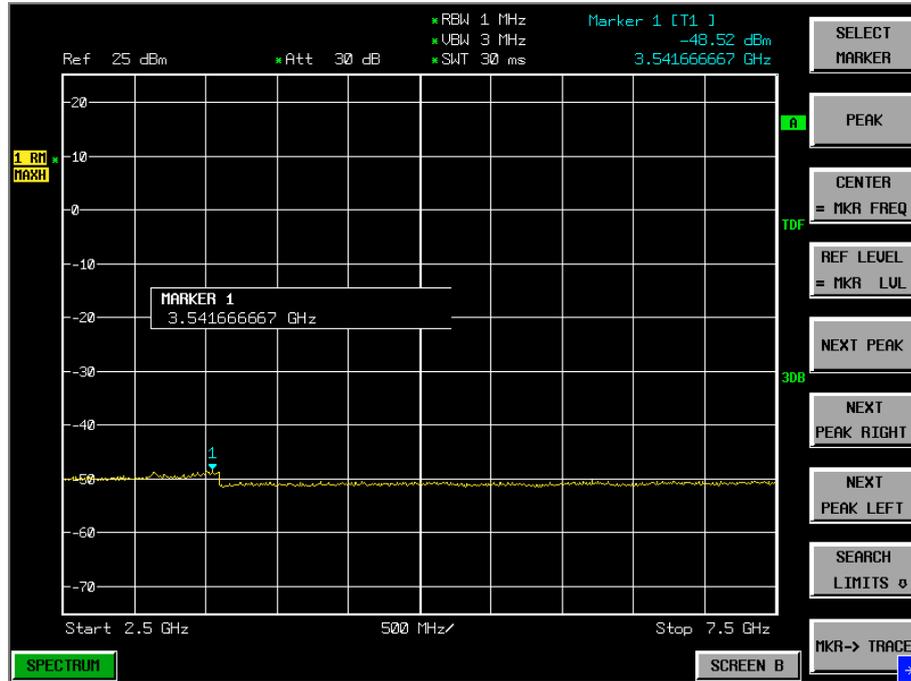


A.8.3.44 Channel 4183: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

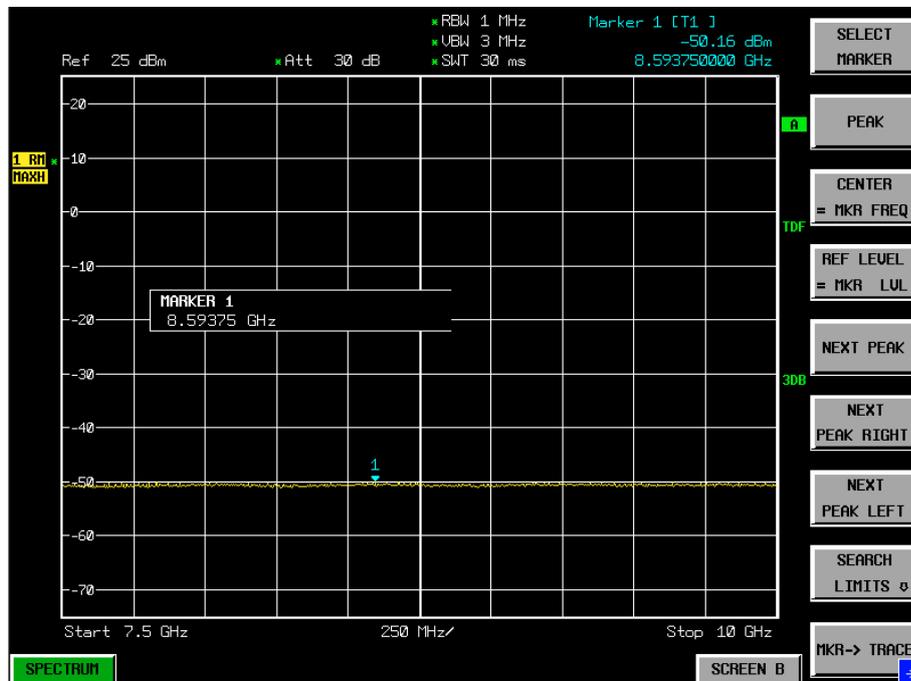

A.8.3.45 Channel 4233: 30MHz –1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

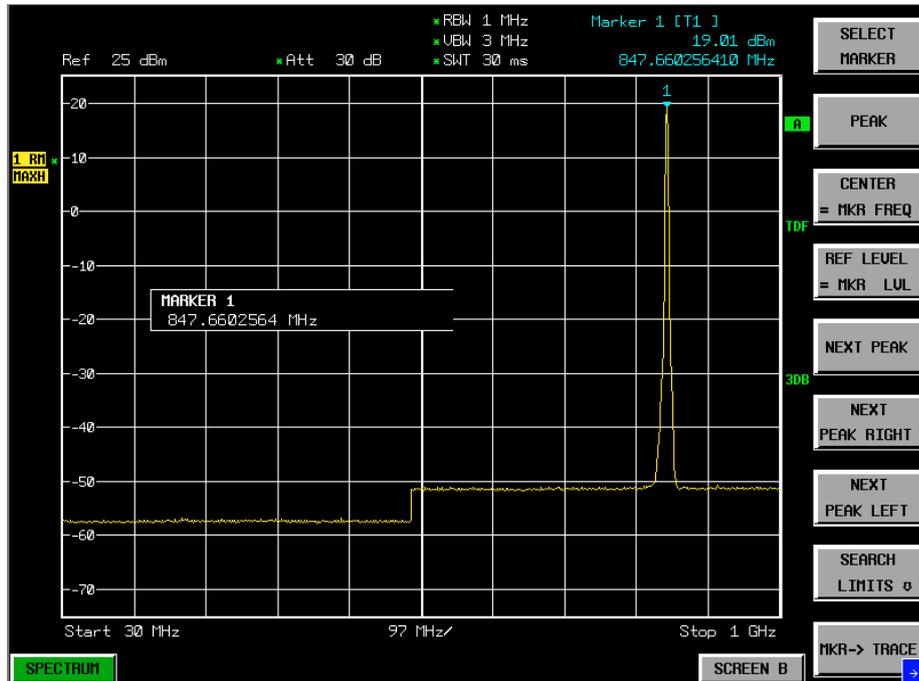


A.8.3.46 Channel 4233: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

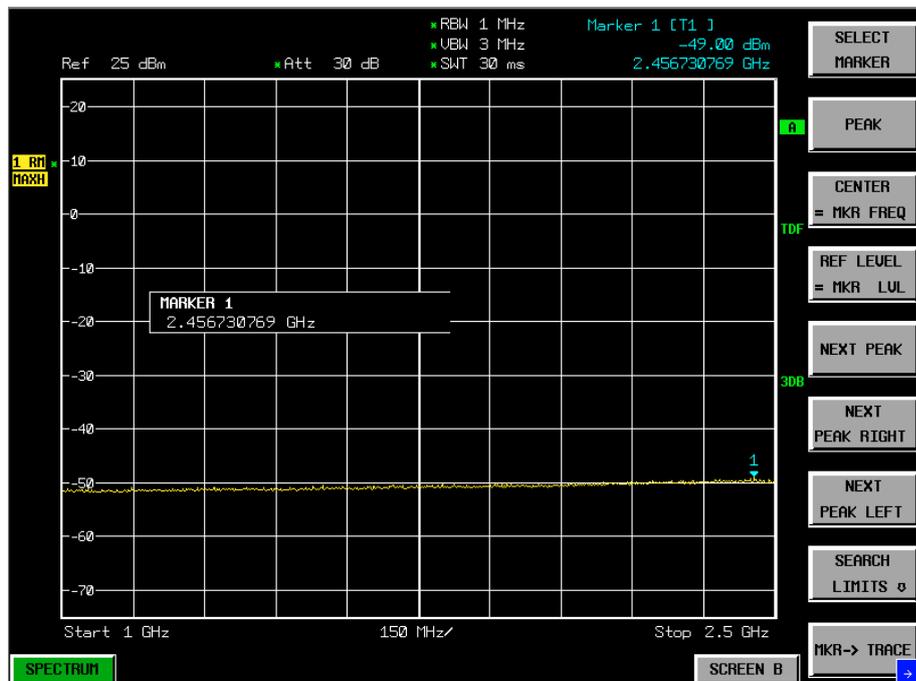

A.8.3.47 Channel 4233: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

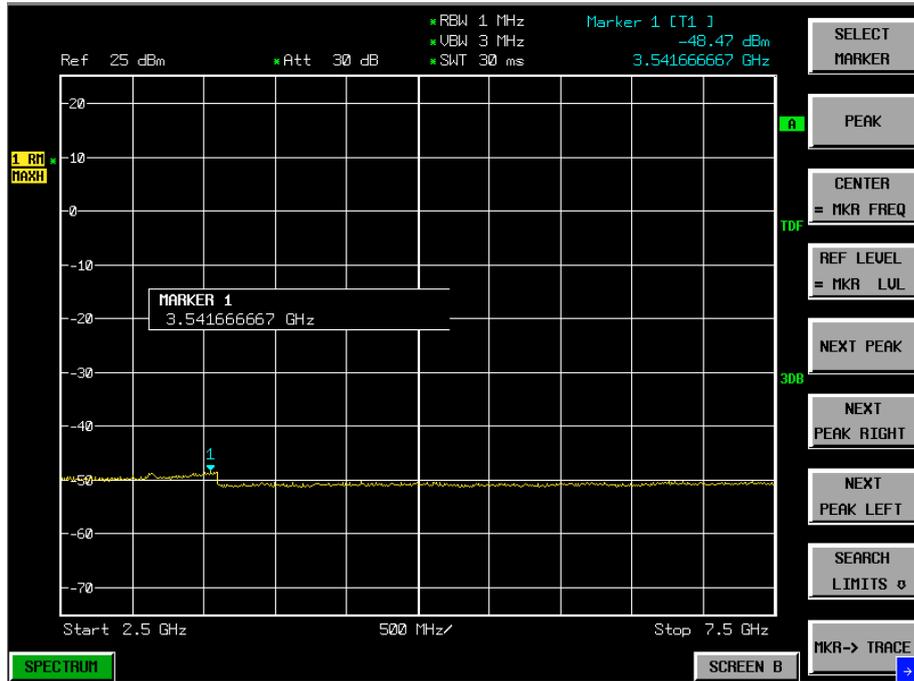

A.8.3.48 Channel 4233: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

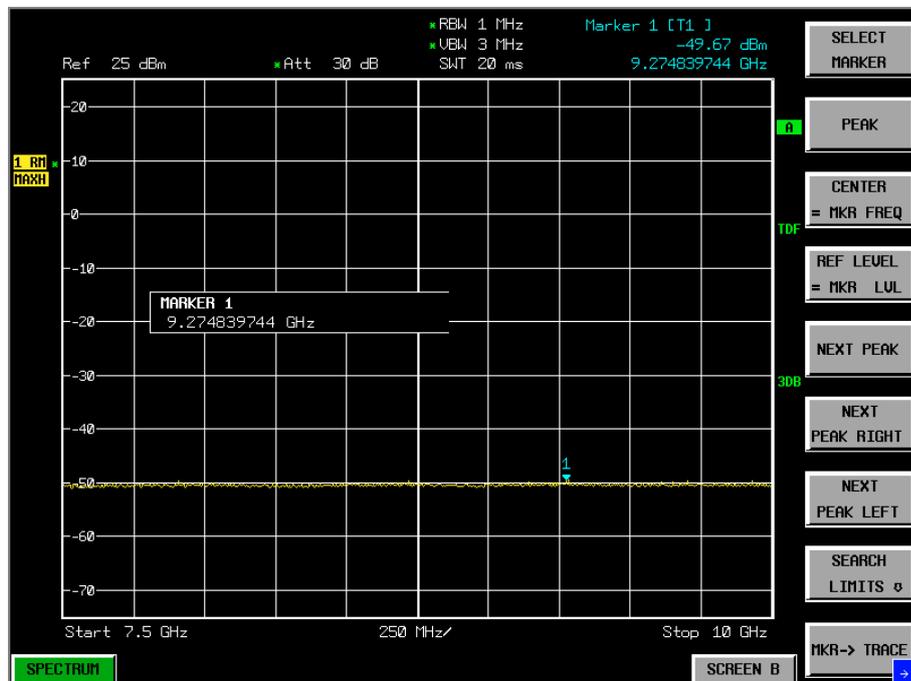

END OF REPORT