



湖南炬神电子有限公司

HUNAN GIANTSUN POWER ELECTRONICS CO., LTD

湖南郴州有色金属产业园区台湾工业园第 16、17 幢

电话(TEL): 0735-2668666

传真(FAX): 0735-2668000

共 5 页

规格承认书

Specification For Approval

收旧（作废）承认书

GSP 料号

版本

日期

版本 REV: _____

专案编码 (Case No.): _____

炬神料号 (GSP Parts No.): _____ 10801-0044

制造商名称/型号(Name/Model): 单层发射线圈模组 single laryer Launch Coil

Module _____

元件规格(Components Spec.): 单层发射线圈模组 single layer Launch Coil

Module _____

制造商(简称)(Manufacturer): 聚源

供应商(简称)(Supplier): 聚源

承认书编号(No. of Approved): _____

承认日期(Date of Approved): _____

发行部门 Issue Departm ent (文管中心)Docum ent Control Center	承认部门 Accreditation Department					
	主管批准 Supervisor approval	审核 Check				拟制 Prepared
		环 保 environ ment pr otection ☐	安 规 Safety regulati ons ☐	电 子 Electro nic ☐	机 构 instituti on ☐	

	条件接收 Conditional acceptance ☐				
	接收 acceptance ☐				
1. 如有任何变更，须于事前联系，取得承认后方可变更； 2. 相关单位需建档保存，条件接收前提见检验报告； 3. 如无特殊说明，收旧前一版本时，须将内部及供应商的承认书料号全部收旧。 1. If there are any changes, prior contact must be made and approval obtained before making any changes; 2. Relevant units need to establish archives for preservation, and the conditions for acceptance can be found in the inspection report; 3. Unless otherwise specified, when replacing the previous version, all internal and supplier recognized part numbers must be replaced.					

管理 NO.: GSP-3GC-163-001 A/2



Change

Change The Detail

Version1.0.1

part 1 of 5


更改目录 Change Directory

更改事项 Change items	修改前 Before change	修改后 After change	修改日期 Change date	修改人员 Modifying operators

[illegible]

产品型号： Model Number	发射线圈模组	客户料号： Customer P / N	10801-0046	
		供应商料号： Supplier P / N	18.00541	

一，外观与尺寸（Appearance Size）：（单位/mm）

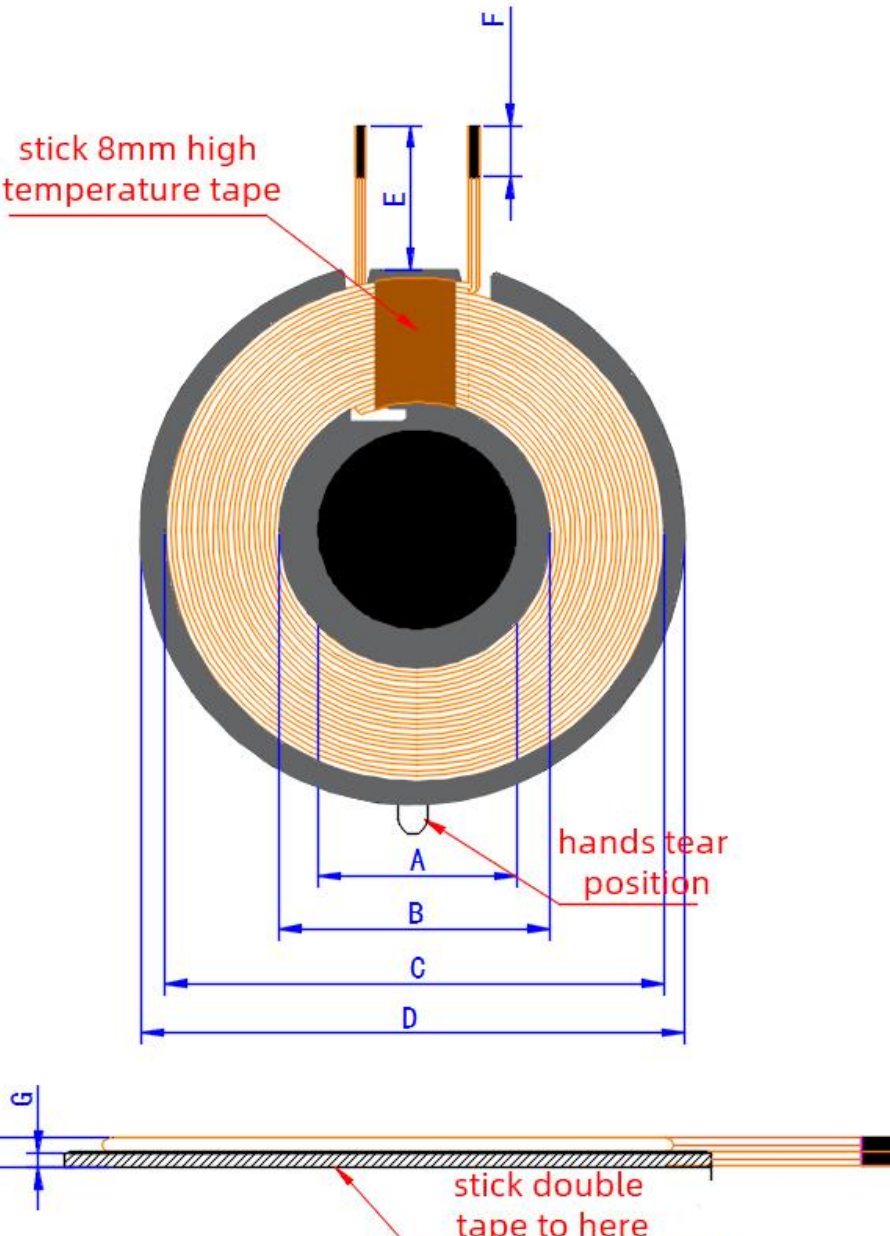

A	15±0.5
B	22±0.5
C	40.5±1
D	44±1
E	10±2
F	3.5±1.5
G	0.8±0.2
H	2.2MAX Fix tape position
I	
J	
K	
L	
M	
N	
O	
P	
Q	
R	
S	
T	
U	
V	
W	
X	
Y	
Z	

二，原理图（Schematic Diagram）：





三，绕线参数（Winding Parameters）：

绕组 Winding	开始 Start	结束 Finish	圈数 Turns	线径 Line Diameter	绕线方式 Winding Way	绕线方向 Winding Direction	层数&圈数 Layer&Circle
	S	F	11TS	0.08*80P	单层密绕 Single layer close-packed wound	逆时针 anticlockwise	1 层 layer/11TS

四，电气特性（Electrical Characteristics）：

项目 Item	端子 Terminal	测试条件 Test Conditions	测试仪器 Test Instrument	参数 Parameter	单位 Unit	数值 Numerical Value
电感 induc tance	S-F	100KHz/1.00V/100Ω	1062 电桥 Electronic bridge	Inductance @100KHz/1V	μH	7.7μH±10%
电阻 resist ance	S-F	100KHz/1.00V/100Ω	1062 电桥 Electronic bridge	RS@100KHz/1V	mΩ	90MAX
Q 值 Q vaule	S-F	100KHz/1.00V/100Ω	1062 电桥 Electronic bridge	@100KHz/1V		70MIN

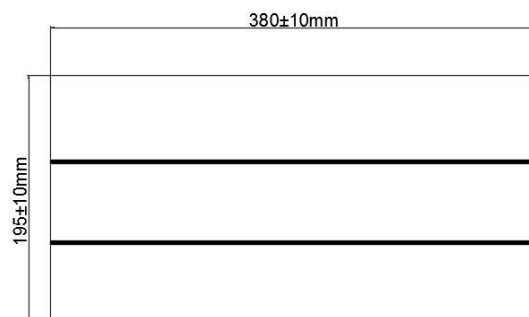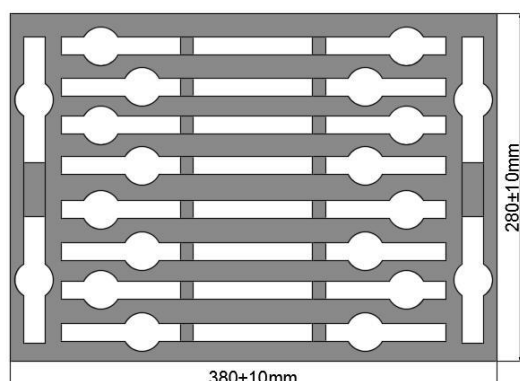

1. EPE size:38*28*6cm
2. Each EPE has 45 cells,6pcs per cell,total 270pcs

Each box is packed with 3 layers of EPE,The EPE is Separated by cardboard



1. Each layer of pearl cotton can hold 270 pcs of products;
2. Each box can contain 3 layers of pearl cotton, which can contain 280 products

产品 Product	单层数量 Single layer quantity	层数/箱 Layer/Box	总数/箱 Total/Box	重量 Weigh
	270pcs	4 层 layer	1080pcs	

材料清单

Material List

客户料号: Customer P / N		10801-0046	制造商料号: Supplier P / N	18.00541	
序号 No.	材料名称 Material Name	材料规格 Material Specification	材料代号 Material Code	制作商 Manufacturer	
1	漆包线 enamelled wire	0.08*75P	01.00003		
2	无铅锡条 lead-free tin	高温 High temperature	05.00058		
3	胶水 Glue	白胶 White glue	05.00001		
4	高温胶带 High temperature	8mm	05.00023		
5	圆形双槽带孔硬磁片 Hard magents with Circlec double trough with hole	G44*5*0.65mm	02.00003		
6	双面胶 Double tape	43*5*0.08mm	05.00020		
7	圆形硬磁片 Circle hard magnets	15*0.8mm	02.00254		
8	纸板 cardboard	378*270mm	04.00020		
9	包装盒 packing	390*280*47mm	04.00029		
10	纸箱 carton	400*300*210mm	04.00024		
11					
12					
13					
14					

