

# FCC RADIO TEST REPORT

**FCC ID:X5B-878004RWS****IC:8814A-878004RWS**

Report Reference No..... : 16FAB12002 11

Date of issue ..... : 2016-12-15

FCC 2.948 No ..... : 923232

IC Registration Number ..... : 110033A-1

Testing Laboratory ..... : ATT Product Service Co., Ltd.

Address ..... : No. 3, ChangLianShan Industrial Park, ChangAn Town,  
DongGuan City, Guangdong, China.

Applicant's name..... : Performance Designed Products, LLC.

Address..... : 14144 Ventura Blvd, Suite 200 Sherman  
Oaks,CA 91423 U.S.A.

Manufacturer..... : Performance Designed Products, LLC.

Address..... : 2300 West Empire Avenue Suite 600 Burbank CA 91504.

Test specification:

Test item description..... : MASS EFFECT ANDROMEDA CE: NOMAD REMOTE  
CONTROL

Trade Mark..... : N/A

Model/Type reference ..... : 878-004


Ratings..... : I/P: 7.4Vdc battery for 5Vdc 1A adapter supply

Responsible Engineer :



Lake Hu

Authorized Signatory:



King Wang

## TABLE OF CONTENTS

|                                                        |    |
|--------------------------------------------------------|----|
| TEST REPORT DECLARE .....                              | 3  |
| 1. Summary of test Standards and results.....          | 4  |
| 2.1. Accretations .....                                | 5  |
| 2.2. Description of EUT .....                          | 5  |
| 2.3. Accessories of EUT .....                          | 5  |
| 2.4. Assistant equipment used for test .....           | 5  |
| 2.5. Block diagram of EUT configuration for test ..... | 6  |
| 2.6. Test environment conditions .....                 | 6  |
| 2.7. Measurement uncertainty .....                     | 7  |
| 3. 6dB Bandwidth and 99% Occupied Bandwidth .....      | 7  |
| 3.1. Test equipment.....                               | 7  |
| 3.2. Block diagram of test setup .....                 | 7  |
| 3.3. Limits.....                                       | 7  |
| 3.4. Test Procedure .....                              | 7  |
| 3.5. Test Result .....                                 | 8  |
| 3.6. Original test data .....                          | 8  |
| 4. Maximum Peak Output Power.....                      | 9  |
| 4.1. Test equipment.....                               | 9  |
| 4.2. Block diagram of test setup .....                 | 9  |
| 4.3. Limits.....                                       | 9  |
| 4.4. Test Procedure .....                              | 9  |
| 5. Power Spectral Density .....                        | 10 |
| 5.1. Test equipment.....                               | 10 |
| 5.2. Block diagram of test setup .....                 | 10 |
| 5.3. Limits.....                                       | 10 |
| 5.5. Test Result.....                                  | 11 |
| 5.6. Original test data .....                          | 12 |
| 6. Spurious Emissions.....                             | 13 |
| 6.1. Test equipment.....                               | 13 |
| 6.2. Block diagram of test setup .....                 | 13 |
| 6.3. Limit.....                                        | 14 |
| 7. 100 kHz Bandwidth of Frequency Band Edge .....      | 22 |
| 7.1. Test equipment.....                               | 22 |
| 7.2. Block diagram of test setup .....                 | 22 |
| 7.3. Limit.....                                        | 22 |

|                                       |    |
|---------------------------------------|----|
| 7.4. Test Procedure .....             | 23 |
| 7.5. Test result.....                 | 23 |
| 8. Conducted Spurious Emissions ..... | 24 |
| 8.1. Test Equipment .....             | 24 |
| 8.2. Limit.....                       | 24 |
| 8.3. Test Procedure .....             | 24 |
| 8.4. Test result.....                 | 25 |
| 9. Antenna Requirements.....          | 26 |
| 9.1. Limit.....                       | 26 |
| 9.2. Result.....                      | 26 |

**TEST REPORT DECLARE**

|                             |   |                                                             |
|-----------------------------|---|-------------------------------------------------------------|
| <b>Applicant</b>            | : | Performance Designed Products, LLC.                         |
| <b>Address</b>              | : | 14144 Ventura Blvd, Suite 200 Sherman Oaks, CA 91423 U.S.A. |
| <b>Equipment under Test</b> | : | MASS EFFECT ANDROMEDA CE: NOMAD REMOTE CONTROL              |
| <b>Model No</b>             | : | 878-004                                                     |
| <b>Trade Mark</b>           | : | N/A                                                         |
| <b>Manufacturer</b>         | : | Performance Designed Products, LLC.                         |
| <b>Address</b>              | : | 2300 West Empire Avenue Suite 600 Burbank CA 91504.         |

**Test Standard Used:** FCC Rules and Regulations Part 15 Subpart C : 2015.

RSS-247 ISSUE 1 May ,2015; RSS-GEN ISSUE 4 NOV 2014

**Test procedure used:** ANSI C63.10:2013, ANSI C63.4:2014, 558074 V03R05.

**We Declare:**

The equipment described above is tested by ATT Product Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and ATT Product Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

|                      |                        |                        |            |
|----------------------|------------------------|------------------------|------------|
| <b>Report No:</b>    | 16FAB12002 11          |                        |            |
| <b>Date of Test:</b> | 2016-12-05--2016-12-14 | <b>Date of Report:</b> | 2016-12-15 |

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of ATT Product Service Co., Ltd.

## 1. Summary of test Standards and results

The EUT have been tested according to the applicable standards as referenced below.

| Description of Test Item                    | Standard                                                      | Results |
|---------------------------------------------|---------------------------------------------------------------|---------|
| 6dB Bandwidth And<br>99% Occupied Bandwidth | FCC Part 15.247 (a)(2)<br>RSS 247:5.2.1                       | PASS    |
| Peak Output Power                           | FCC Part 15.247(b)(3)<br>RSS 247:5.4.4                        | PASS    |
| Power Spectral Density                      | FCC Part 15.247(e)<br>RSS 247:5.2.2                           | PASS    |
| Spurious Emissions at Antenna Port          | FCC Part 15.247(d)<br>RSS 247:5.5                             | PASS    |
| Spurious Emissions                          | FCC Part 15.205, 15.209,<br>FCC Part 15.247(d)<br>RSS 247:5.5 | PASS    |
| 100 kHz Bandwidth of Frequency Band<br>Edge | FCC Part 15.247(d)<br>RSS 247:5.5                             | PASS    |
| AC Line Conducted Emissions                 | FCC Part 15.207<br>RSS 247:8.8                                | N/A     |
| Antenna requirement                         | FCC Part 15: 15.203<br>RSS-Gen:8.3                            | PASS    |

## 2. GENERAL TEST INFORMATION

### 2.1. Accreditations

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

**USA****FCC****Registration Number :923232**

### 2.2. Description of EUT

|                          |   |                                                |
|--------------------------|---|------------------------------------------------|
| EUT* Name                | : | MASS EFFECT ANDROMEDA CE: NOMAD REMOTE CONTROL |
| Model Number             | : | 878-004                                        |
| Trade Mark               | : | N/A                                            |
| EUT function description | : | Please reference user manual of this device    |
| Power supply             | : | 7.4Vdc battery for 5Vdc 1A adapter supply      |
| Radio Specification      | : | IEEE802.11g                                    |
| Operation frequency      | : | IEEE 802.11g Mode: 2452MHz                     |
| Modulation               | : | IEEE 802.11g Mode: OFDM                        |
| Antenna Type             | : | PCB antenna,maximum PK gain: 2.81dBi           |
| FVIN                     | : | MakoCar(v0.7.0)                                |
| Date of Receipt          | : | 2016-12-05                                     |
| Sample Type              | : | Series production                              |

Note: EUT is the ab. of equipment under test.

### 2.3. Accessories of EUT

| Description of Accessories | Manufacturer | Model number or Type | Other   |
|----------------------------|--------------|----------------------|---------|
| AC/DC Adapter              | Lingdiantong | LDT-24B              | FCC DoC |

### 2.4. Assistant equipment used for test

| Description of Assistant equipment | Manufacturer | Model number or Type | Other |
|------------------------------------|--------------|----------------------|-------|
|                                    |              |                      |       |

## 2.5. Block diagram of EUT configuration for test



EUT was connected to control to a special test jig provided by manufacturer which has a standard RSS-232 connector to connect to Notebook, and the Notebook will run a special test software "MP\_v1.1.1" provided by manufacturer to control EUT work in test mode as blow table.

| Tested mode, channel, and data rate information                                                                                     |                                |              |                    |
|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------|--------------------|
| Mode                                                                                                                                | data rate (Mbps)<br>(see Note) | Channel      | Frequency<br>(MHz) |
| IEEE 802.11g                                                                                                                        | 6                              | Middle: CH 9 | 2452               |
| Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test. |                                |              |                    |

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |           |
|--------------------|-----------|
| Temperature range: | 21-25℃    |
| Humidity range:    | 40-75%    |
| Pressure range:    | 86-106kPa |

## 2.7. Measurement uncertainty

| Test Item                                               | Uncertainty           |
|---------------------------------------------------------|-----------------------|
| Uncertainty for Conduction emission test                | 2.44dB                |
| Uncertainty for Radiation Emission test (150KHz-30MHz)  | 3.21dB                |
| Uncertainty for Radiation Emission test (30MHz-1GHz)    | 3.14 dB (Polarize: V) |
|                                                         | 3.16 dB (Polarize: H) |
| Uncertainty for Radiation Emission test (1GHz to 25GHz) | 2.08dB(Polarize: V)   |
|                                                         | 2.56dB (Polarize: H)  |
| Uncertainty for radio frequency                         | $1 \times 10^{-9}$    |
| Uncertainty for conducted RF Power                      | 0.65dB                |


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 3. 6dB Bandwidth and 99% Occupied Bandwidth

### 3.1. Test equipment

| Item | Equipment         | Manufacturer  | Model No.   | Serial No. | Calibrated until | Calibrated Date |
|------|-------------------|---------------|-------------|------------|------------------|-----------------|
| 1    | Spectrum analyzer | KEYSIGHT      | N9010A      | MY55150427 | 2017/05/05       | 2016/05/06      |
| 2    | Attenuator        | Mini-Circuits | BW-S10W2    | 101109     | 2016/12/19       | 2015/12/20      |
| 3    | RF Cable          | Micable       | C10-01-01-1 | 100309     | 2016/12/19       | 2015/12/20      |

### 3.2. Block diagram of test setup



### 3.3. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 KHz

### 3.4. Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.




- (3) Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

### 3.5. Test Result

| EUT Set Mode | CH or Frequency | 6 dB bandwidth | 99% dB bandwidth | Limt    | Conclusion |
|--------------|-----------------|----------------|------------------|---------|------------|
|              |                 | Result (MHz)   | Result (MHz)     | >500KHz | PASS       |
| IEEE 802.11g | CH 9            | 16.34          | 16.458           | >500KHz | PASS       |

### 3.6. Original test data

802.11 g Mode 2452MHz

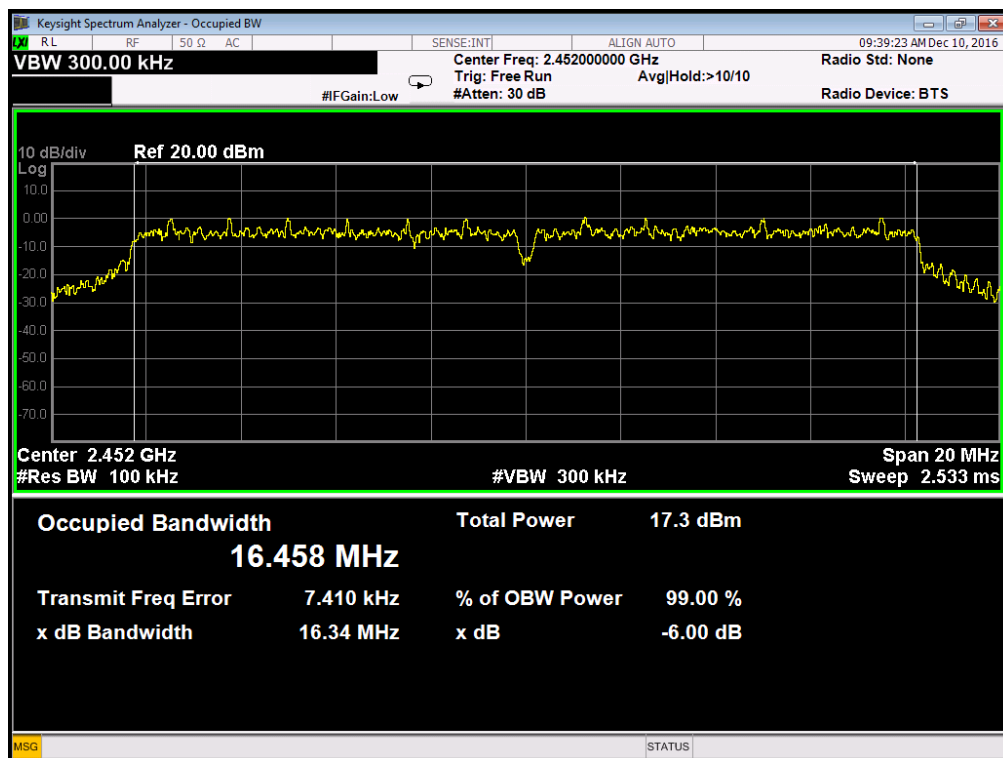


## 4. Maximum Peak Output Power

### 4.1. Test equipment

| Item | Equipment             | Manufacturer | Model No.   | Serial No. | Calibrated until | Calibrated Date |
|------|-----------------------|--------------|-------------|------------|------------------|-----------------|
| 1    | Power meter           | Agilent      | E4417A      | MY45100473 | 2016/12/19       | 2015/12/20      |
| 2    | Wireband Power sensor | Agilent      | E4427A      | MY5100041  | 2016/12/19       | 2015/12/20      |
| 3    | RF Cable              | Micable      | C10-01-01-1 | 100309     | 2016/12/19       | 2015/12/20      |

### 4.2. Block diagram of test setup



### 4.3. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 4.4. Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. A wide band power meter with a matched thermocouple detector was used to directly measure the output power from the RF output port of the EUT in continuously transmitting mode.
3. The measurement shall be repeated at the lowest, the middle, and the highest channel of the stated frequency range.

### 4.5. TEST RESULT


| EUT Set Mode | Limit | Conclusion | CH   | Result(dBm) |
|--------------|-------|------------|------|-------------|
|              |       |            |      | Peak        |
| IEEE 802.11g | 30dBm | PASS       | CH 9 | 15.73       |

## 5. Power Spectral Density

### 5.1. Test equipment

| Item | Equipment         | Manufacturer  | Model No.   | Serial No. | Calibrated until | Calibrated Date |
|------|-------------------|---------------|-------------|------------|------------------|-----------------|
| 1    | Spectrum analyzer | KEYSIGHT      | N9010A      | MY55150427 | 2017/05/05       | 2016/05/06      |
| 2    | Attenuator        | Mini-Circuits | BW-S10W2    | 101109     | 2016/12/19       | 2015/12/20      |
| 3    | RF Cable          | Micable       | C10-01-01-1 | 100309     | 2016/12/19       | 2015/12/20      |

### 5.2. Block diagram of test setup



### 5.3. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 5.4. TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generatorl.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range
3. According to KDB 558074 D01 DTS Meas Guidance v03, set the RBW = 3 kHz, VBW = 30 kHz, Set the span to 1.5 times the DTS channel bandwidth.
4. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW

#### 5.5. Test Result

| EUT Set Mode | CH or Frequency | Result | Limit:<br><dBm/3KHz | Conclusion |
|--------------|-----------------|--------|---------------------|------------|
| IEEE 802.11g | CH 9            | -14.93 | 8                   | PASS       |

5.6. Original test data

802.11 g Mode 2452MHz

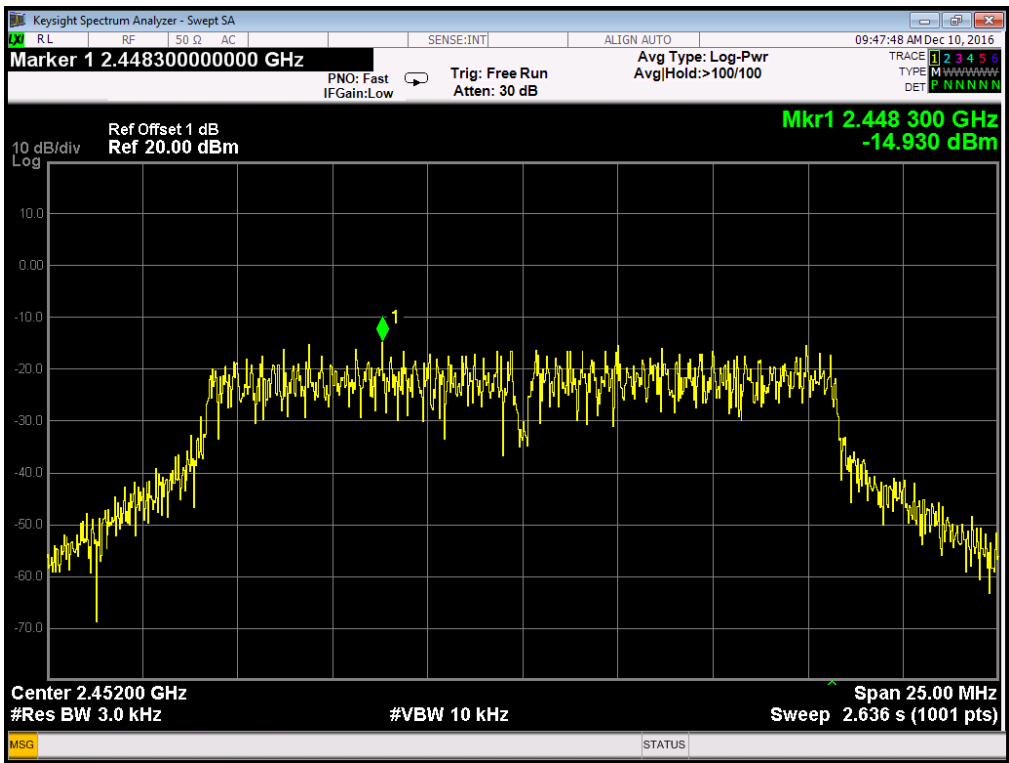


## 6. Spurious Emissions

### 6.1. Test equipment


| Item | Equipment                  | Manufacturer | Model No. | Serial No. | Calibrated until | Calibrated Date |
|------|----------------------------|--------------|-----------|------------|------------------|-----------------|
| 1    | EMI Test Receiver          | R&S          | ESCI      | 101307     | 2016/12/19       | 2015/12/20      |
| 2    | Spectrum analyzer          | Agilent      | E4407B    | US40240708 | 2016/12/19       | 2015/12/20      |
| 3    | Loop antenna               | Chase        | HLA6120   | 20129      | 2017/07/08       | 2016/07/09      |
| 4    | Trilog Broadband Antenna   | Schwarzbeck  | VULB9163  | 9163-462   | 2016/12/19       | 2015/12/20      |
| 5    | Double Ridged Horn Antenna | Schwarzbeck  | BBHA9120D | 9120D 1065 | 2016/12/19       | 2015/12/20      |
| 6    | Pre-Amplifier              | R&S          | SCU-01    | 10049      | 2016/12/19       | 2015/12/20      |
| 7    | Pre-Amplifier              | A.H.         | PAM0-0118 | 360        | 2016/12/19       | 2015/12/20      |
| 8    | Pre-Amplifier              | HP           | 8449B     | 3274A06298 | 2016/12/19       | 2015/12/20      |
| 9    | RF Cable                   | R&S          | R01       | 10403      | 2016/12/19       | 2015/12/20      |
| 10   | RF Cable                   | R&S          | R02       | 10512      | 2016/12/19       | 2015/12/20      |
| 11   | Horn Antenna               | Schwarzbeck  | BBHA 9170 | 9170 1248  | 2016/12/19       | 2015/12/20      |

### 6.2. Block diagram of test setup

In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

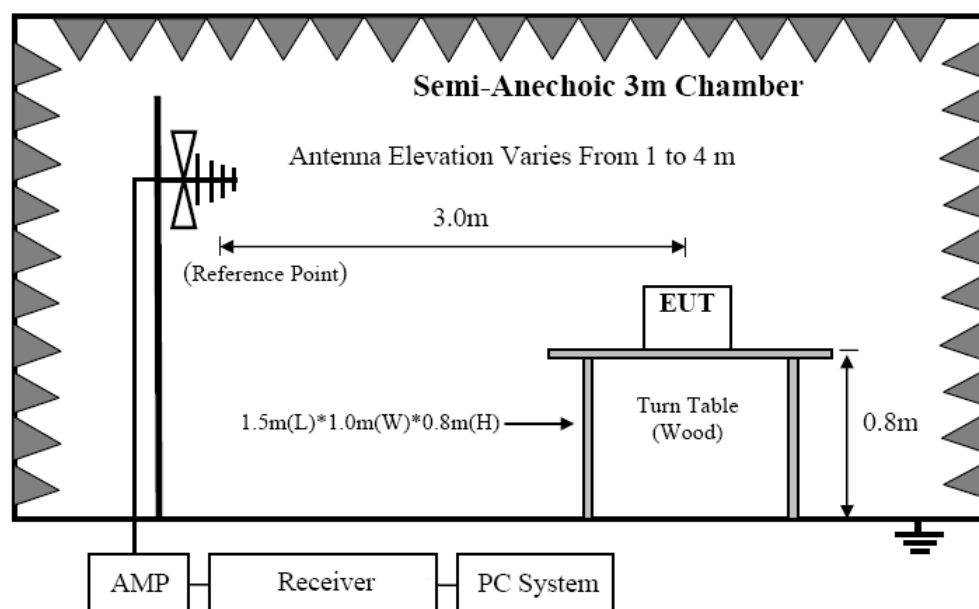

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

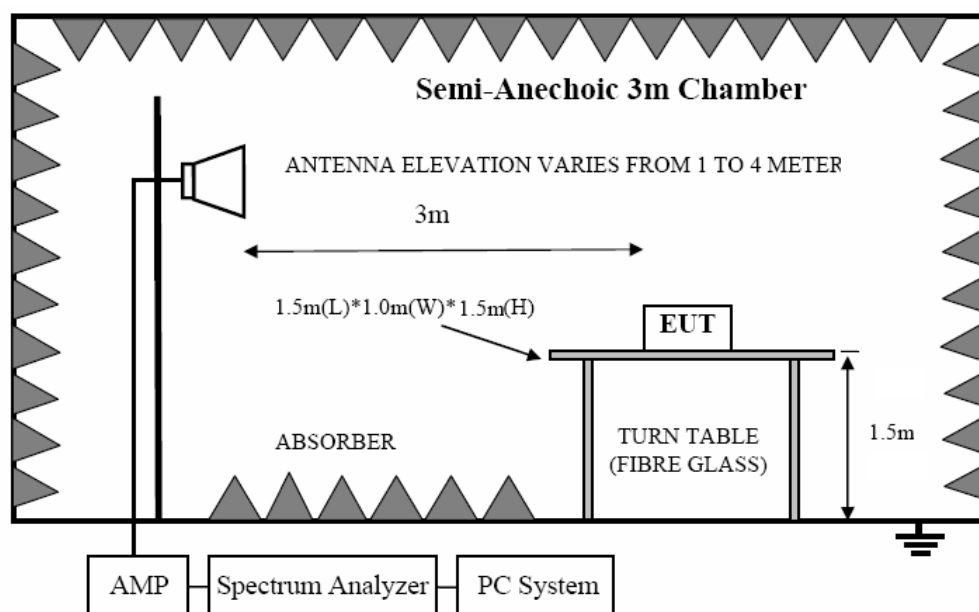

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

## 6.3. Limit

### 6.3.1 FCC 15.205 Restricted frequency band

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

## 6.3.2 FCC 15.209 Limit

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                                             |                                   |
|------------------|--------------------|---------------------------------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V}/\text{m}$                                                                            | $\text{dB}(\mu\text{V})/\text{m}$ |
| 30 ~ 88          | 3                  | 100                                                                                               | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                                               | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                                               | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                                               | 54.0                              |
| Above 1000       | 3                  | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |

## 6.3.3 Limit for this EUT

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10:2013. The specification used was the FCC 15.209, and FCC 15.247 limits.



#### **6.4. TEST PROCEDURE**

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.4 and 8.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Change power supply range from 85% to 115% of the rated supply voltage
  - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9MHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 25GHz, so below final test was performed with frequency range from 30MHz to 18GHz.
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (6) For emissions from 30MHz to 1GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 KHz.
- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure, Detector is at PK; RBW is set at 1MHz, VBW is set at 3MHz for Average measure, Detector is at RMS..

**6.5. TEST RESULT****Below 30M**

|                      |                                                      |                           |         |
|----------------------|------------------------------------------------------|---------------------------|---------|
| <b>EUT:</b>          | MASS EFFECT ANDROMEDA<br>CE: NOMAD REMOTE<br>CONTROL | <b>Model No.:</b>         | 878-004 |
| <b>Temperature:</b>  | 24°C                                                 | <b>Relative Humidity:</b> | 55%     |
| <b>Distance:</b>     | 3m                                                   | <b>Test Power:</b>        | 7.4 Vdc |
| <b>Polarization:</b> | --                                                   | <b>Test Result:</b>       | Pass    |
| <b>Test Mode:</b>    | TX IEEE 802.11g Mdoe:<br>2452MHz                     | <b>Test By:</b>           | Lake    |

| Freq.<br>(MHz) | Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | State<br>P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| --             | --                  | --                | --             | P            |
| --             | --                  | --                | --             | P            |

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor


### Between 30M – 1000 MHz

|               |                                                      |                    |         |
|---------------|------------------------------------------------------|--------------------|---------|
| EUT:          | MASS EFFECT ANDROMEDA<br>CE: NOMAD REMOTE<br>CONTROL | Model No.:         | 878-004 |
| Temperature:  | 24                                                   | Relative Humidity: | 55%     |
| Distance:     | 3m                                                   | Test Power:        | 7.4 Vdc |
| Polarization: | Vertical                                             | Test Result:       | Pass    |
| Standard:     | (RE)FCC PART 15 class B 3m                           | Test By:           | Lake    |
| Test Mode:    | TX IEEE 802.11g Mdoe: 2452MHz                        |                    |         |

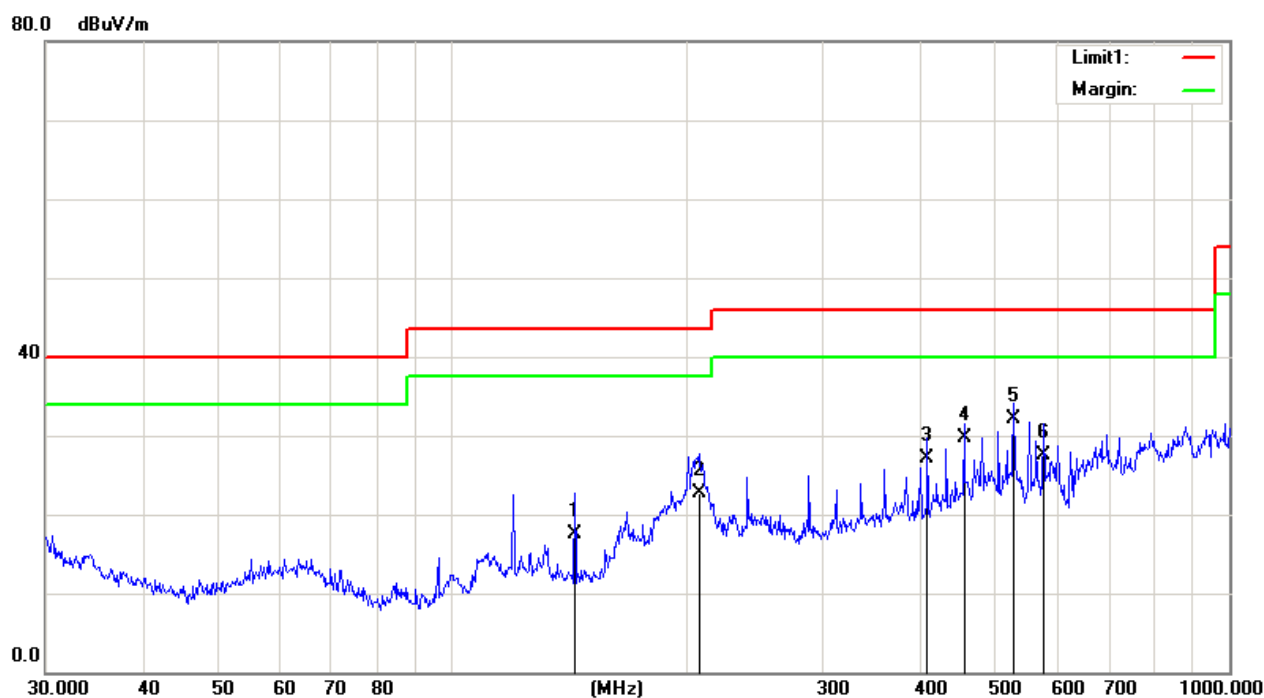

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|---------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 143.8294           | 31.36               | -13.91                  | 17.45              | 43.50             | -26.05         | QP     |
| 2   | 207.8501           | 31.22               | -8.53                   | 22.69              | 43.50             | -20.81         | QP     |
| 3   | 408.9460           | 32.59               | -5.45                   | 27.14              | 46.00             | -18.86         | QP     |
| 4   | 455.9058           | 31.97               | -2.34                   | 29.63              | 46.00             | -16.37         | QP     |
| 5   | 528.2458           | 32.81               | -0.70                   | 32.11              | 46.00             | -13.89         | QP     |
| 6   | 576.6443           | 29.92               | -2.36                   | 27.56              | 46.00             | -18.44         | QP     |

|               |                                                      |                    |         |
|---------------|------------------------------------------------------|--------------------|---------|
| EUT:          | MASS EFFECT ANDROMEDA<br>CE: NOMAD REMOTE<br>CONTROL | Model No.:         | 878-004 |
| Temperature:  | 24                                                   | Relative Humidity: | 55%     |
| Distance:     | 3m                                                   | Test Power:        | 7.4 Vdc |
| Polarization: | Horizontal                                           | Test Result:       | Pass    |
| Standard:     | (RE)FCC PART 15 class B 3m                           | Test By:           | Lake    |
| Test Mode:    | TX IEEE 802.11g Mdoe: 2452MHz                        |                    |         |

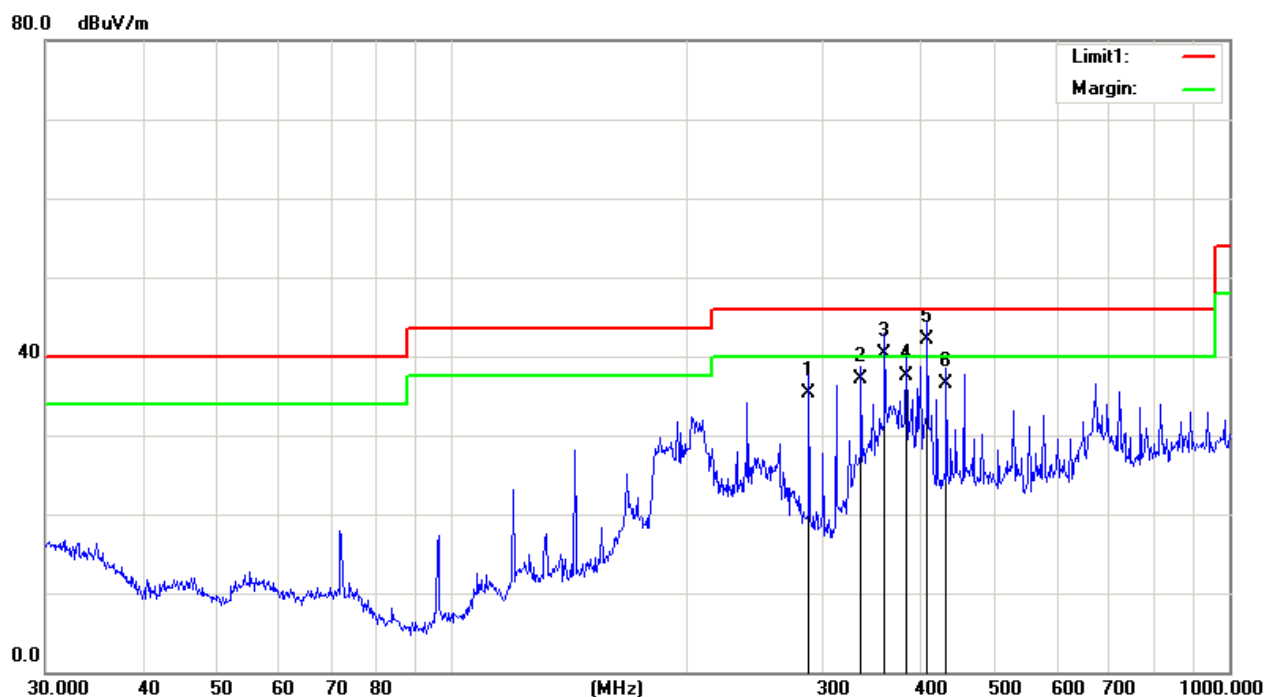

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|---------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 287.9904           | 42.95               | -7.69                   | 35.26              | 46.00             | -10.74         | QP     |
| 2   | 336.0351           | 42.83               | -5.82                   | 37.01              | 46.00             | -8.99          | QP     |
| 3   | 360.4476           | 46.54               | -6.25                   | 40.29              | 46.00             | -5.71          | QP     |
| 4   | 383.9318           | 43.42               | -5.90                   | 37.52              | 46.00             | -8.48          | QP     |
| 5   | 408.9460           | 46.72               | -4.66                   | 42.06              | 46.00             | -3.94          | QP     |
| 6   | 432.5457           | 39.47               | -2.89                   | 36.58              | 46.00             | -9.42          | QP     |

### Between 1000M – 25000 MHz

|                     |                                                   |                         |                 |
|---------------------|---------------------------------------------------|-------------------------|-----------------|
| <b>Test Site</b>    | : 3m Chamber                                      |                         |                 |
| <b>EUT</b>          | MASS EFFECT ANDROMEDA<br>CE: NOMAD REMOTE CONTROL | <b>Tested By</b>        | : Lake          |
| <b>Power Supply</b> | : 7.4 Vdc                                         | <b>Model Number</b>     | : 878-004       |
| <b>Condition</b>    | Temp:24.5'C,Humi:55%,<br>Press:100.1kPa           | <b>Test Mode</b>        | : Tx mode       |
| <b>Memo</b>         | TX IEEE 802.11g Mdoe:<br>2452MHz                  | <b>Antenna/Distance</b> | : VULB 9163 /3m |

| Frequency | Receiver       |                     | Rx Antenna  |             | Cable loss | Amplifier Gain | Corrected Amplitude | FCC 15.247     |             |
|-----------|----------------|---------------------|-------------|-------------|------------|----------------|---------------------|----------------|-------------|
| (MHz)     | Reading (dBμV) | Detector (PK/QP/AV) | Polar (H/V) | Factor (dB) | (dB)       | (dB)           | (dBμV/m)            | Limit (dBμV/m) | Margin (dB) |
| 2452MHz   |                |                     |             |             |            |                |                     |                |             |
| 4904      | 59.67          | PK                  | H           | 31.6        | 1.13       | 31.66          | 60.74               | 74             | -13.26      |
| 4904      | 41.62          | AV                  | H           | 31.6        | 1.13       | 31.66          | 42.69               | 54             | -11.31      |
| 4904      | 54.21          | PK                  | V           | 31.6        | 1.13       | 31.66          | 55.28               | 74             | -18.72      |
| 4904      | 34.22          | AV                  | V           | 31.6        | 1.13       | 31.66          | 35.29               | 54             | -18.71      |
| 7356      | 48.43          | PK                  | H           | 36.8        | 1.38       | 31.65          | 54.96               | 74             | -19.04      |
| 7356      | 30.49          | AV                  | H           | 36.8        | 1.38       | 31.65          | 37.02               | 54             | -16.98      |
| 7356      | 39.03          | PK                  | V           | 36.8        | 1.38       | 31.65          | 45.56               | 74             | -28.44      |
| 7356      | 26.76          | AV                  | V           | 36.8        | 1.38       | 31.65          | 33.29               | 54             | -20.71      |
| 9808      | 39.3           | PK                  | H           | 40.3        | 1.62       | 31.64          | 49.58               | 74             | -24.42      |
| 9808      | 23.56          | AV                  | H           | 40.3        | 1.62       | 31.64          | 33.84               | 54             | -20.16      |
| 9808      | 32.84          | PK                  | V           | 40.3        | 1.62       | 31.64          | 43.12               | 74             | -30.88      |
| 9808      | 21.14          | AV                  | V           | 40.3        | 1.62       | 31.64          | 31.42               | 54             | -22.58      |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss

**Radiated band edge:**

| Frequency            | Receiver       |          | Rx Antenna  |             | Cable loss | Amplifier Gain | Corrected Amplitude | FCC 15.247     |             |
|----------------------|----------------|----------|-------------|-------------|------------|----------------|---------------------|----------------|-------------|
| (MHz)                | Reading (dBμV) | PK/QP/AV | Polar (H/V) | Factor (dB) | (dB)       | (dB)           | (dBμV/m)            | Limit (dBμV/m) | Margin (dB) |
| 802.11g Mode 2452MHz |                |          |             |             |            |                |                     |                |             |
| 2390                 | 26.26          | PK       | H           | 27.6        | 0.85       | 0              | 54.71               | 74             | -19.29      |
| 2390                 | 13.32          | AV       | H           | 27.6        | 0.85       | 0              | 41.77               | 54             | -12.23      |
| 2390                 | 25.39          | PK       | V           | 27.6        | 0.85       | 0              | 53.84               | 74             | -20.16      |
| 2390                 | 13.33          | AV       | V           | 27.6        | 0.85       | 0              | 41.78               | 54             | -12.22      |
| 2400                 | 25.81          | PK       | H           | 27.7        | 0.86       | 0              | 54.37               | 74             | -19.63      |
| 2400                 | 13.26          | AV       | H           | 27.7        | 0.86       | 0              | 41.82               | 54             | -12.18      |
| 2400                 | 24.77          | PK       | V           | 27.7        | 0.86       | 0              | 53.33               | 74             | -20.67      |
| 2400                 | 13.24          | AV       | V           | 27.7        | 0.86       | 0              | 41.8                | 54             | -12.20      |
| 2483.5               | 26.09          | PK       | H           | 27.9        | 0.87       | 0              | 54.86               | 74             | -19.14      |
| 2483.5               | 13.09          | AV       | H           | 27.9        | 0.87       | 0              | 41.86               | 54             | -12.14      |
| 2483.5               | 24.87          | PK       | V           | 27.9        | 0.87       | 0              | 53.64               | 74             | -20.36      |
| 2483.5               | 13.09          | AV       | V           | 27.9        | 0.87       | 0              | 41.86               | 54             | -12.14      |


Note: 1. Result Level = Read Level + Antenna Factor + Cable Loss- Amplifier Gain

## 7. 100 kHz Bandwidth of Frequency Band Edge

### 7.1. Test equipment

| Item | Equipment         | Manufacturer  | Model No.   | Serial No. | Calibrated until | Calibrated Date |
|------|-------------------|---------------|-------------|------------|------------------|-----------------|
| 1    | Spectrum analyzer | KEYSIGHT      | N9010A      | MY55150427 | 2017/05/05       | 2016/05/06      |
| 2    | Attenuator        | Mini-Circuits | BW-S10W2    | 101109     | 2016/12/19       | 2015/12/20      |
| 3    | RF Cable          | Micable       | C10-01-01-1 | 100309     | 2016/12/19       | 2015/12/20      |

### 7.2. Block diagram of test setup



### 7.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


7.4. Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

7.5. Test result

| Frequency Band             | Delta Peak to band emission (dBc) | >Limit (dBc) | Result |
|----------------------------|-----------------------------------|--------------|--------|
| IEEE 802.11g Mdoe: 2452MHz |                                   |              |        |
| 2400                       | 55.57                             | 20           | Pass   |
| 2483.5                     | 55.77                             | 20           | Pass   |

802.11 g Mode

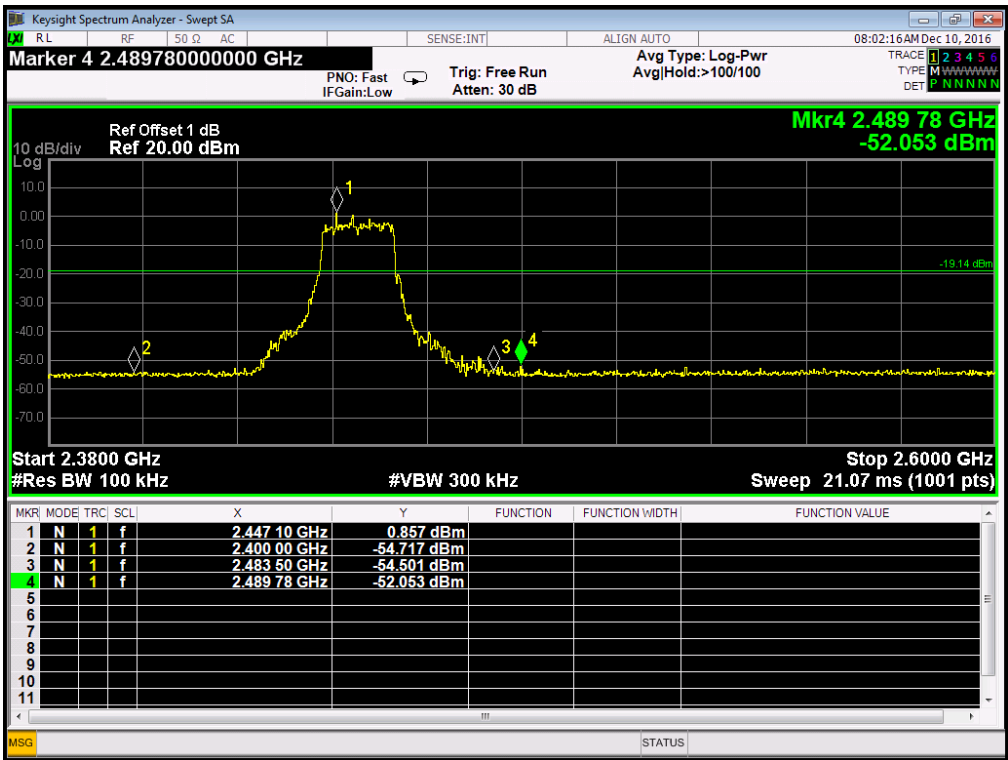



## 8. Conducted Spurious Emissions

### 8.1. Test Equipment

| Item | Equipment         | Manufacturer  | Model No.   | Serial No. | Calibrated until | Calibrated Date |
|------|-------------------|---------------|-------------|------------|------------------|-----------------|
| 1    | Spectrum analyzer | KEYSIGHT      | N9010A      | MY55150427 | 2017/05/05       | 2016/05/06      |
| 2    | Attenuator        | Mini-Circuits | BW-S10W2    | 101109     | 2016/12/19       | 2015/12/20      |
| 3    | RF Cable          | Micable       | C10-01-01-1 | 100309     | 2016/12/19       | 2015/12/20      |

### 8.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.


### 8.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.

## 8.4. Test result

PASS (See below detailed test result.)

802.11 g Mode 2452MHz

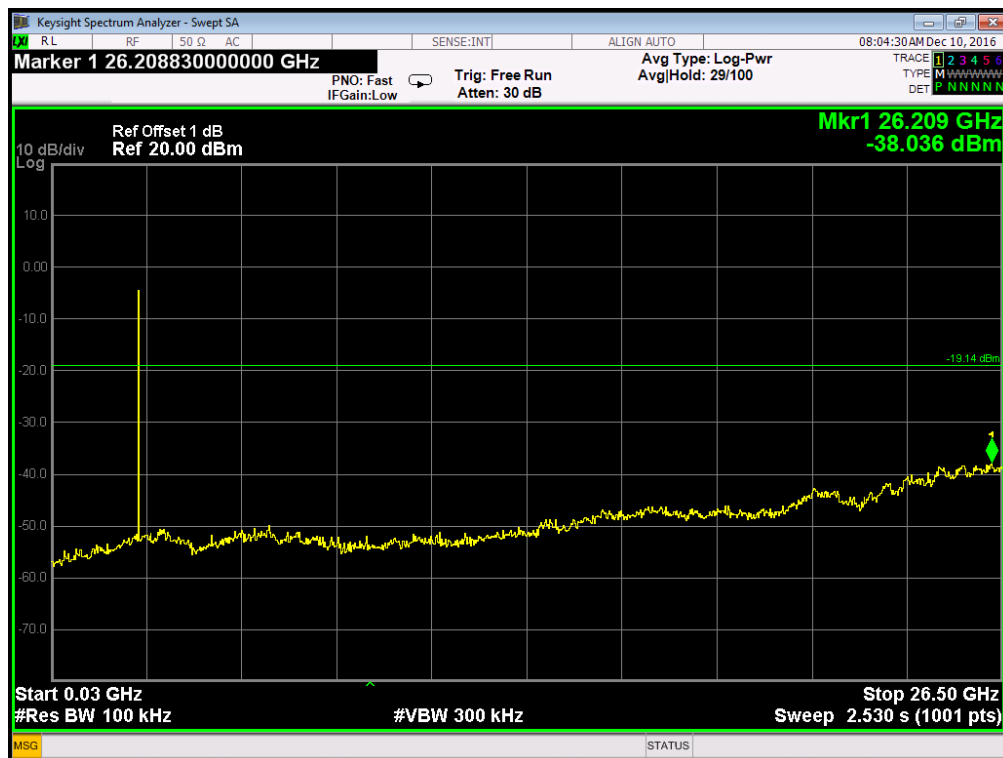

## **9. Antenna Requirements**

### **9.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **9.2. Result**

The antennas used for this product are built-in undetachable dipole antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.81dBi. The EUT has an internal antenna, the directional gain of antenna is 2.81 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

**END OF REPORT**