


Center: 1940.0 MHz Span: 25 MHz RBW/VBW: 100 kHz

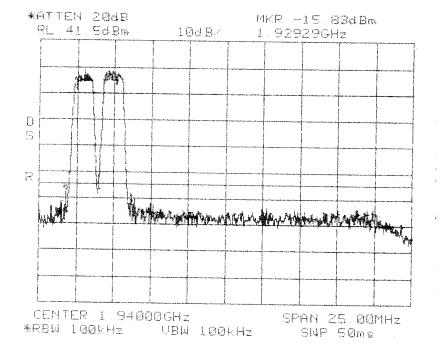

Intermodulation Close Lower CDMA PCS 1900 MHz AD Band

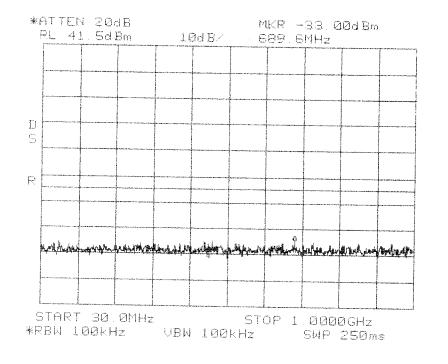


Intermodulation Close Lower CDMA PCS 1900 MHz AD Band

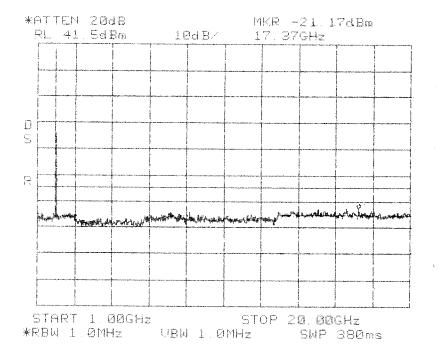


Intermodulation Close Lower CDMA PCS 1900 MHz AD Band

Center: 1940.0 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Close Upper CDMA PCS 1900 MHz AD Band

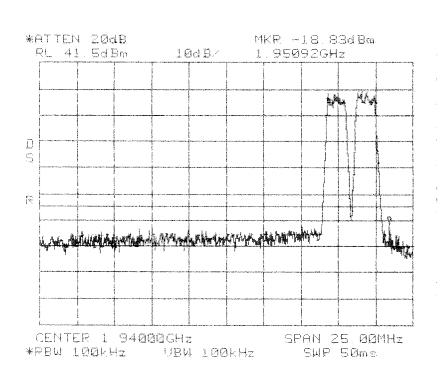

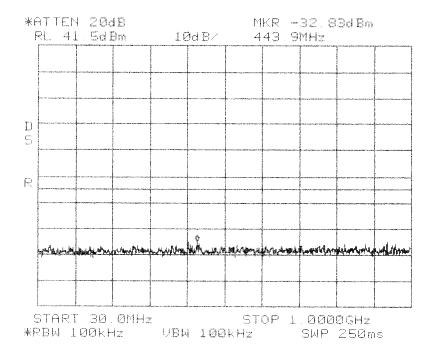

Intermodulation Close Upper CDMA PCS 1900 MHz AD Band


Intermodulation

PCS 1900 MHz

Close Upper


CDMA


AD Band

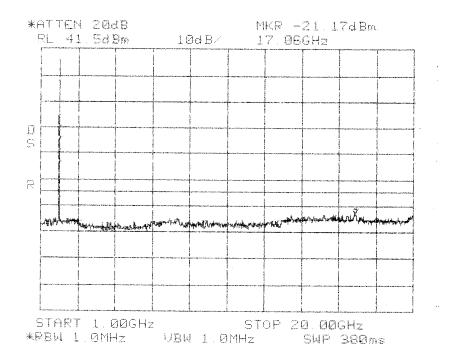


Center: 1940.0 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Apart CDMA PCS 1900 MHz AD Band

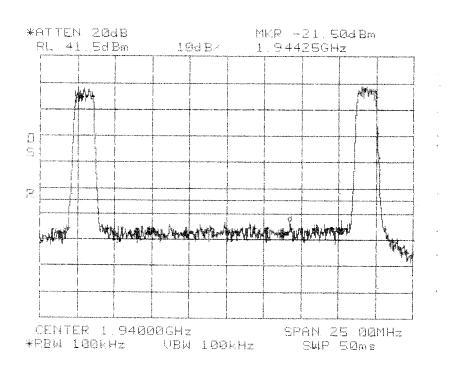

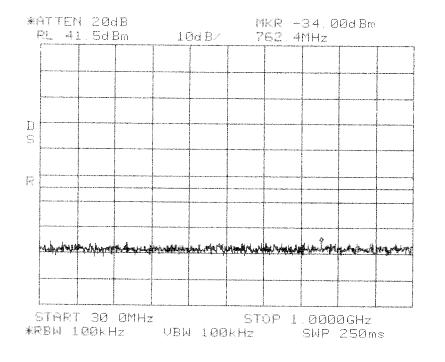



Intermodulation Apart CDMA PCS 1900 MHz AD Band

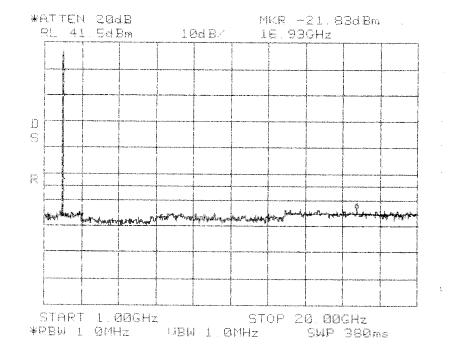


Intermodulation Apart CDMA PCS 1900 MHz AD Band

Intermodulation Close Lower TDMA PCS 1900 MHz DBE Band

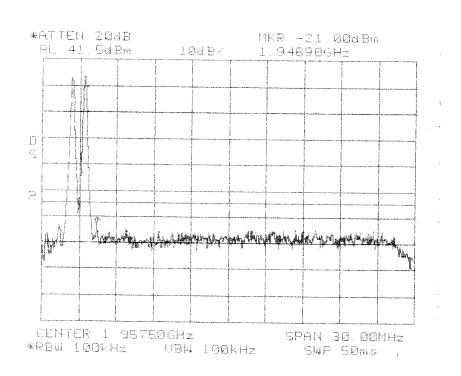


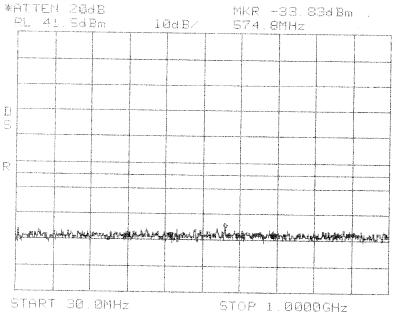


STHRT BULUMHZ STOP 1.0000GHz *RBW 100kHz - VBW 100kHz - SWP 250ms Intermodulation Close Lower TDMA PCS 1900 MHz DBE Band

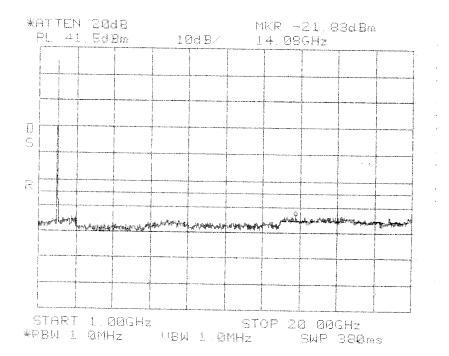


Intermodulation Close Lower TDMA PCS 1900 MHz DBE Band






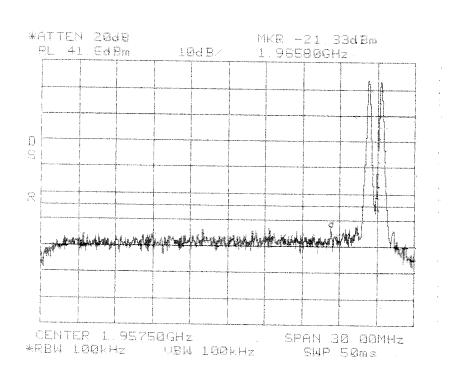

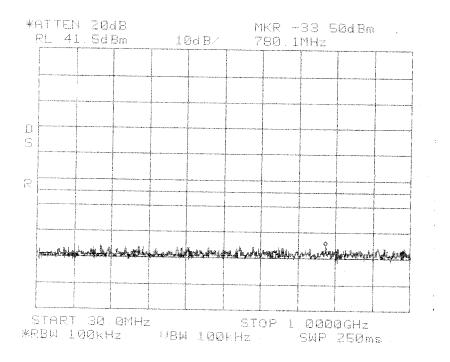


Intermodulation Close Upper TDMA PCS 1900 MHz DBE Band

Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

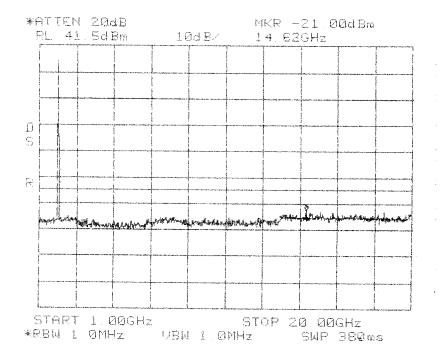

Intermodulation Close Upper TDMA PCS 1900 MHz DBE Band

Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

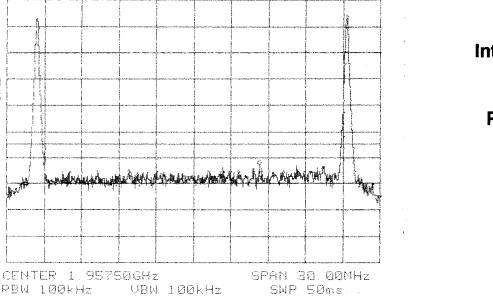

MKR -21.50dBm 1.96280GHz

*ATTEN 2048

D

R


1 Aug

*RBM 100kHz UBM 100kHz


RL 41.5dBm

10dB/



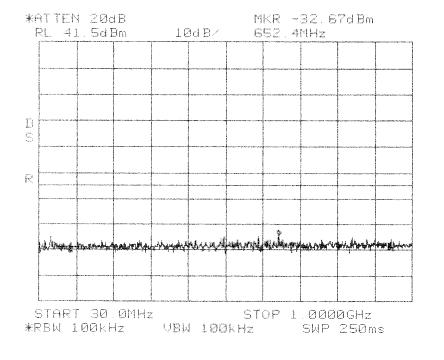


Intermodulation Apart **TDMA PCS 1900 MHz DBE Band**

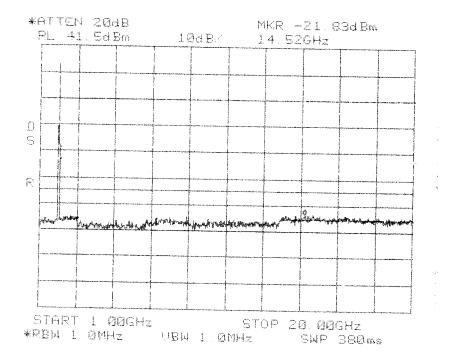


Intermodulation Apart TDMA PCS 1900 MHz DBE Band


Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

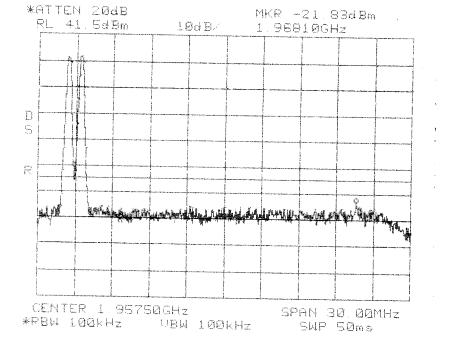

Intermodulation Close Lower GSM PCS 1900 MHz DBE Band

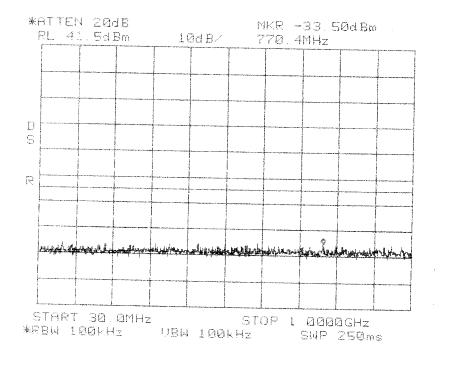


Intermodulation Close Lower GSM PCS 1900 MHz DBE Band

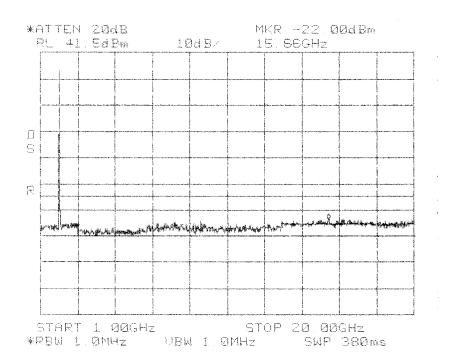


Intermodulation Close Lower GSM PCS 1900 MHz DBE Band

Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

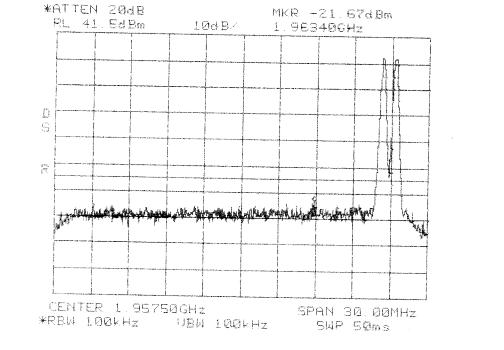


Intermodulation Close Upper GSM PCS 1900 MHz DBE Band

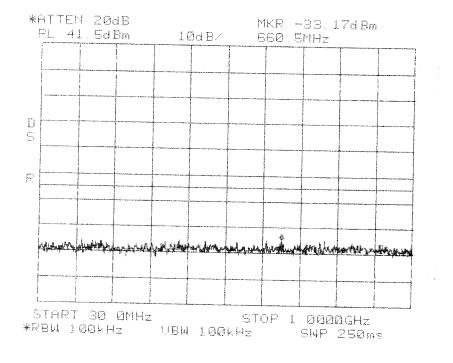

Intermodulation Close Upper GSM PCS 1900 MHz DBE Band

Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz


I

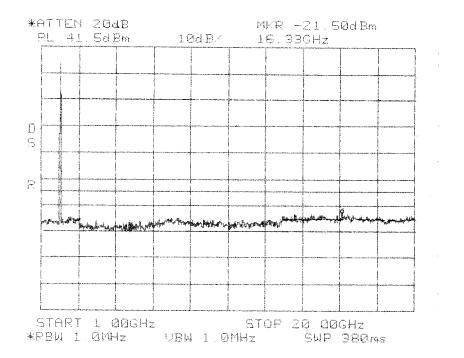


Intermodulation Close Upper GSM PCS 1900 MHz DBE Band

Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Apart GSM PCS 1900 MHz DBE Band

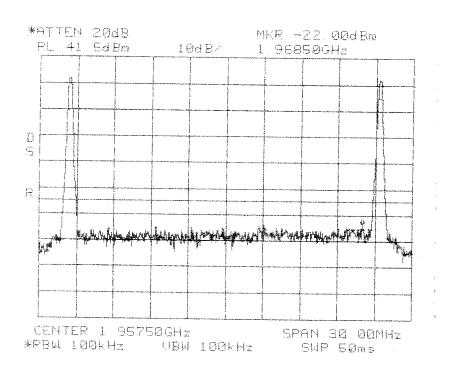

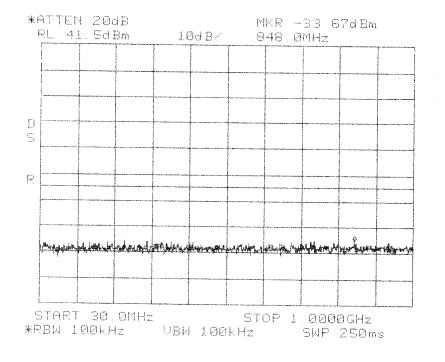




Intermodulation


PCS 1900 MHz

DBE Band


Apart GSM

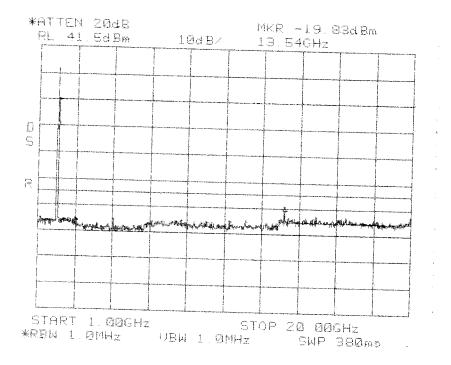

Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

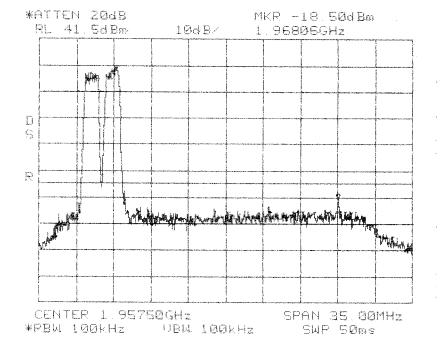

Intermodulation Close Lower CDMA PCS 1900 MHz DBE Band

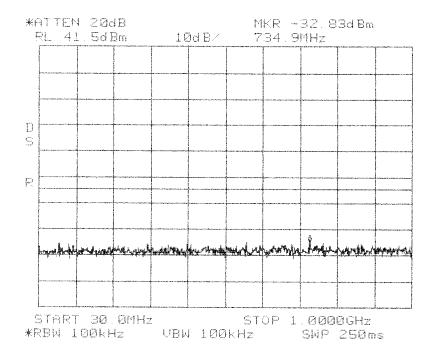

Intermodulation Close Lower CDMA PCS 1900 MHz DBE Band

Intermodulation


PCS 1900 MHz

DBE Band

Close Lower

CDMA


٢

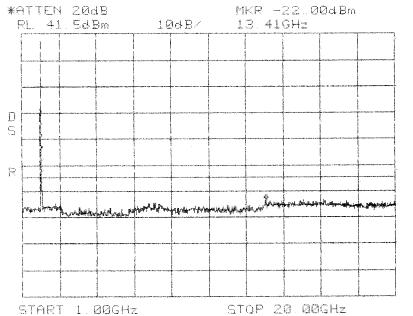


^{*}PBM 1 ØMHZ UBM 1 ØMHZ - SMP 380ms

Center: 1957.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Close Upper CDMA PCS 1900 MHz DBE Band

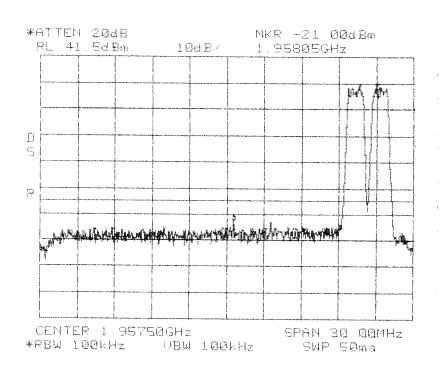

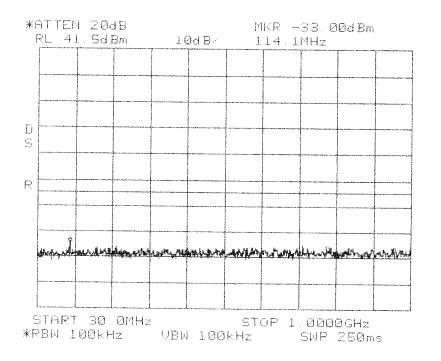


Intermodulation Close Upper CDMA PCS 1900 MHz DBE Band


Intermodulation

PCS 1900 MHz


DBE Band


Close Upper CDMA

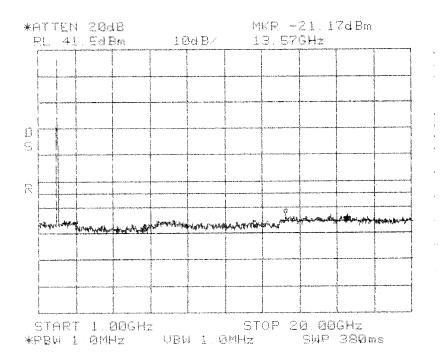





Intermodulation Apart CDMA PCS 1900 MHz DBE Band

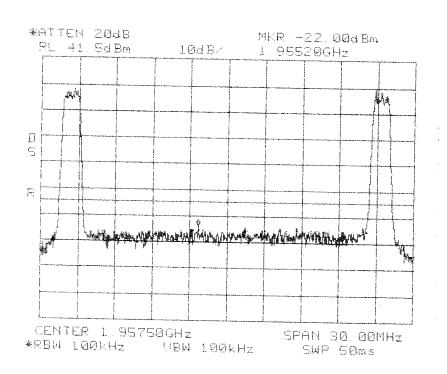


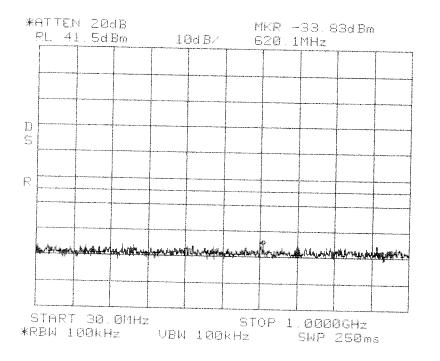




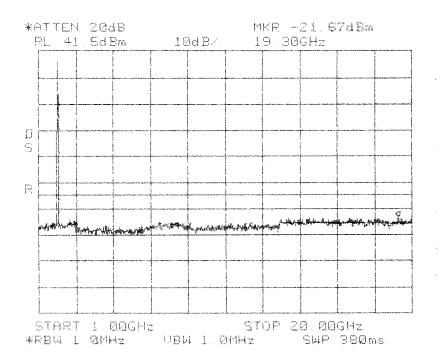


Intermodulation Apart CDMA PCS 1900 MHz DBE Band




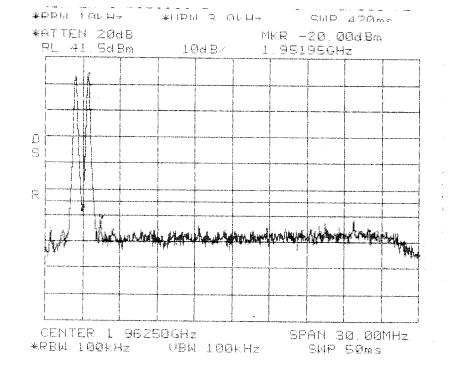

Intermodulation Close Lower TDMA PCS 1900 MHz BEF Band

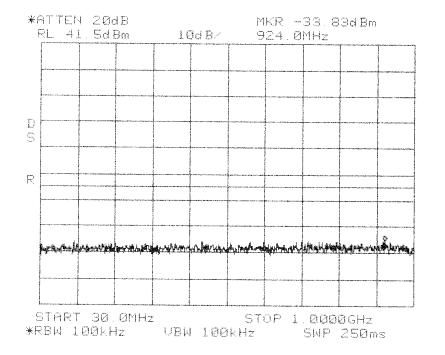


Intermodulation Close Lower TDMA PCS 1900 MHz BEF Band

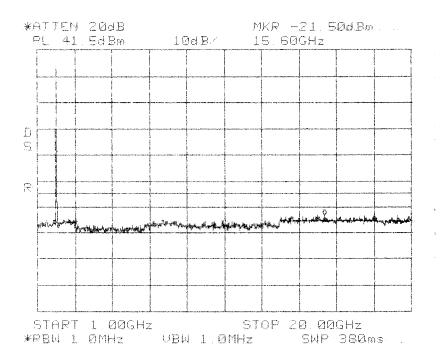



Intermodulation Close Lower TDMA PCS 1900 MHz BEF Band


Center: 1962.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Close Upper TDMA PCS 1900 MHz BEF Band

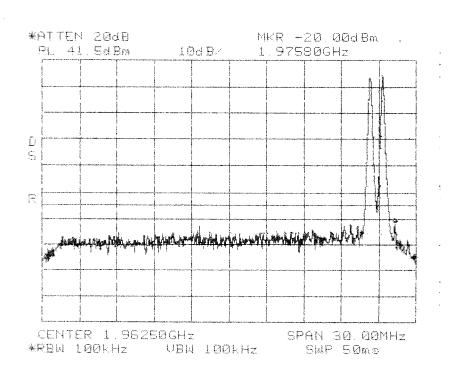

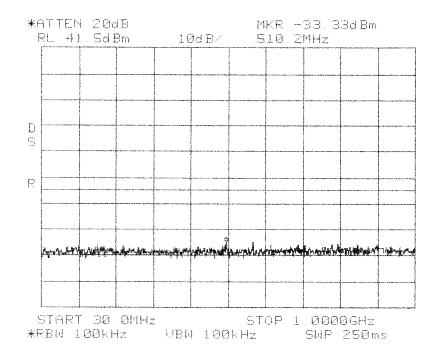




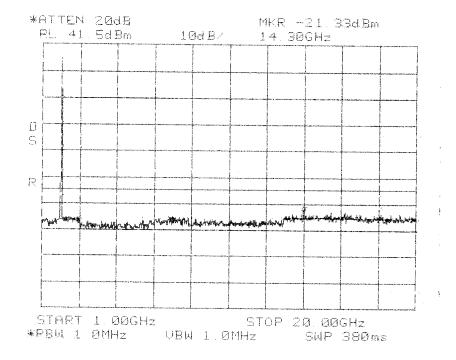


Intermodulation Close Upper TDMA PCS 1900 MHz BEF Band

Center: 1962.5 MHz Span: 25 MHz RBW/VBW: 100 kHz


Intermodulation Apart TDMA PCS 1900 MHz BEF Band

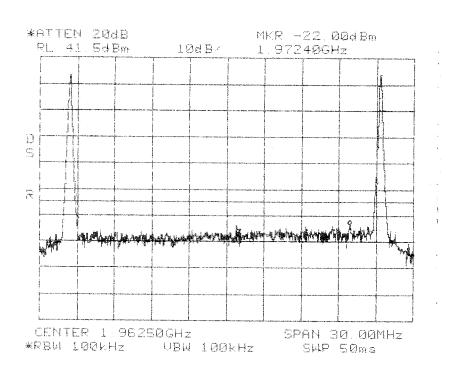

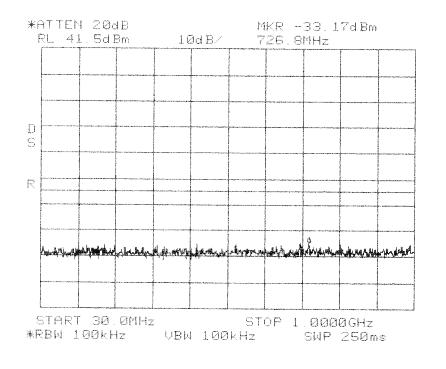

Intermodulation Apart TDMA PCS 1900 MHz BEF Band


Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

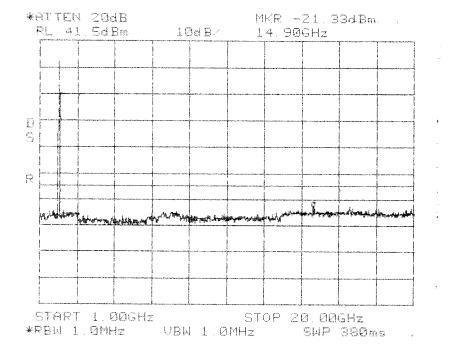


Intermodulation Apart TDMA PCS 1900 MHz BEF Band


Center: 1962.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Close Lower GSM PCS 1900 MHz BEF Band

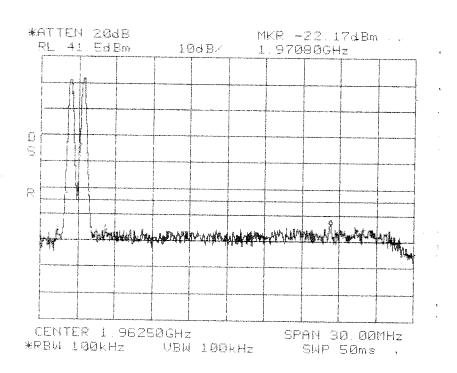

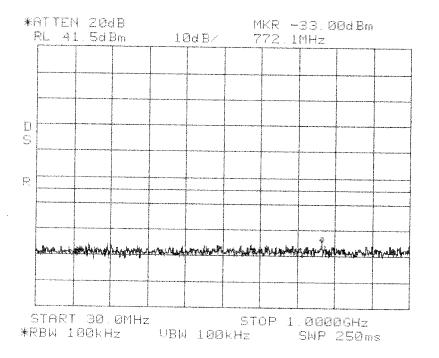


Intermodulation Close Lower GSM PCS 1900 MHz BEF Band

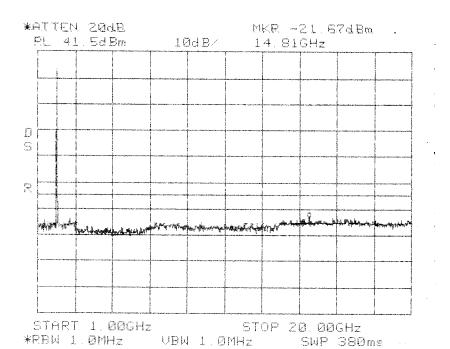


Intermodulation Close Lower GSM PCS 1900 MHz BEF Band

Center: 1962.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

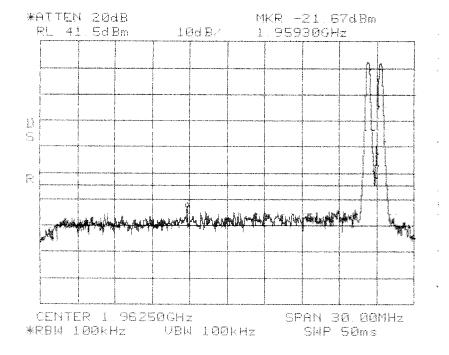


Intermodulation Close Upper GSM PCS 1900 MHz BEF Band

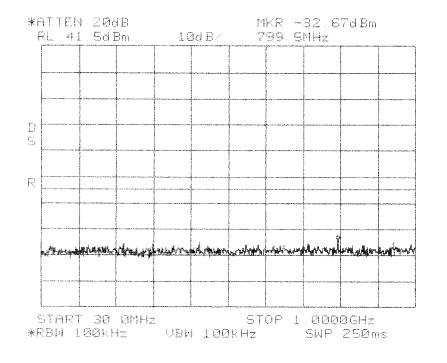

Intermodulation Close Upper GSM PCS 1900 MHz BEF Band


Span: 30 MHz to 1 GHz RBW/VBW: 100 kHz

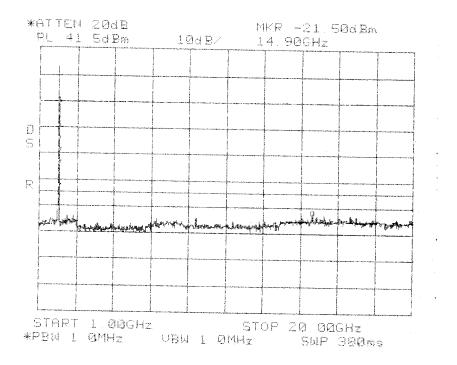


Intermodulation Close Upper GSM PCS 1900 MHz BEF Band

Center: 1962.5 MHz Span: 25 MHz RBW/VBW: 100 kHz

Intermodulation Apart GSM PCS 1900 MHz BEF Band

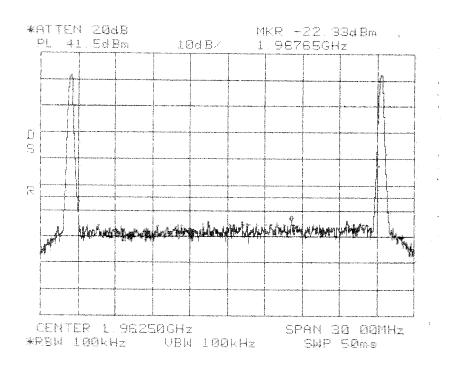

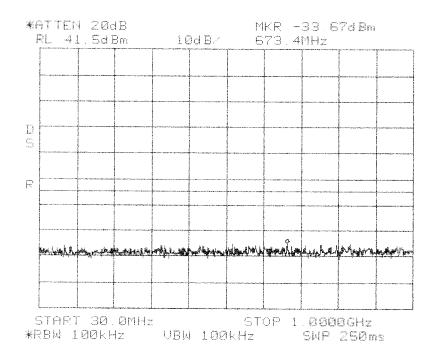

Intermodulation Apart GSM PCS 1900 MHz BEF Band


Intermodulation

PCS 1900 MHz


BEF Band


Apart

GSM

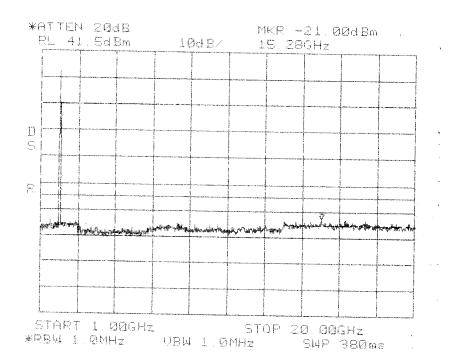


Intermodulation Close Lower CDMA PCS 1900 MHz BEF Band

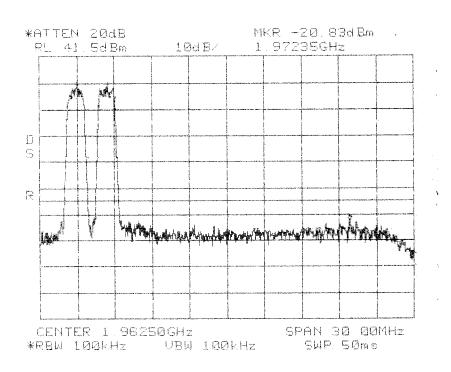

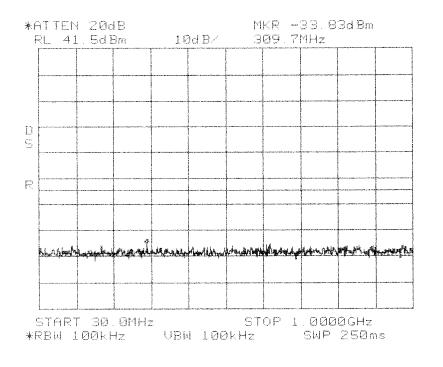


Intermodulation Close Lower CDMA PCS 1900 MHz BEF Band


Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

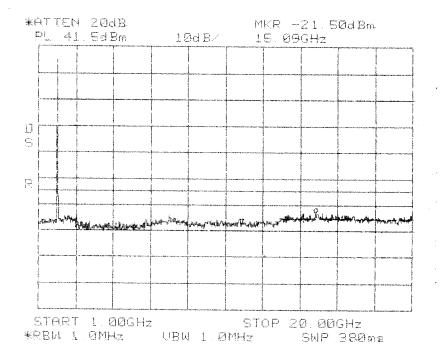

Intermodulation Close Lower CDMA PCS 1900 MHz BEF Band

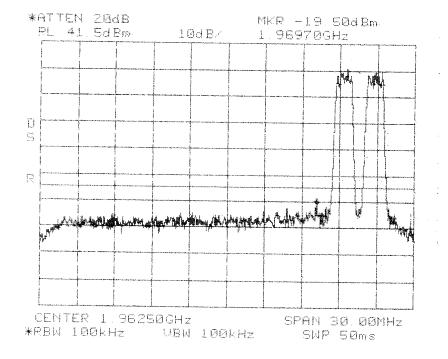


Intermodulation Close Upper CDMA PCS 1900 MHz BEF Band

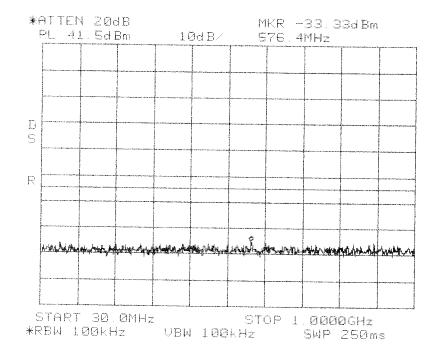



Intermodulation Close Upper CDMA PCS 1900 MHz BEF Band


Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

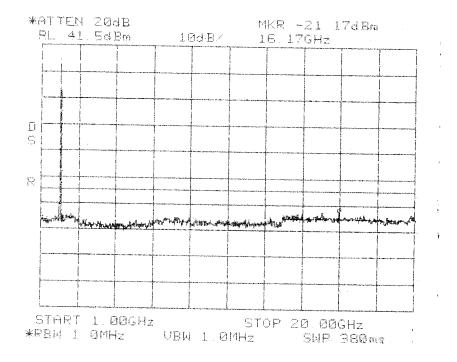



Intermodulation Close Upper CDMA PCS 1900 MHz BEF Band






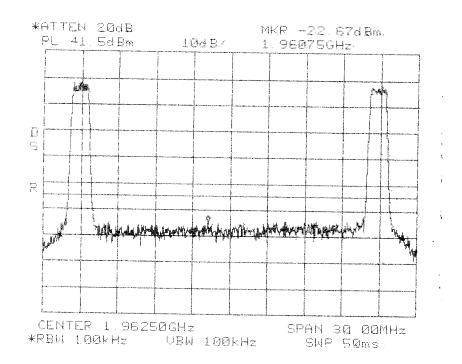

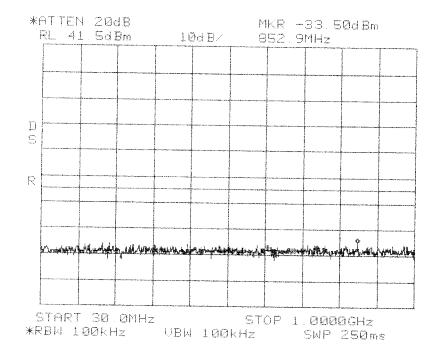





Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

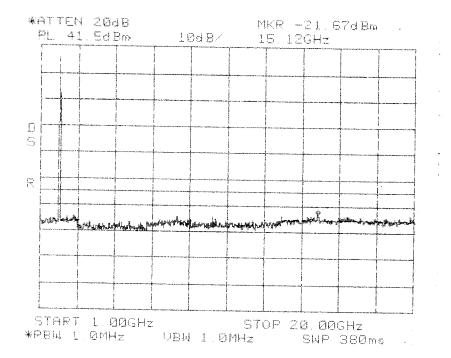


Intermodulation Apart CDMA PCS 1900 MHz BEF Band



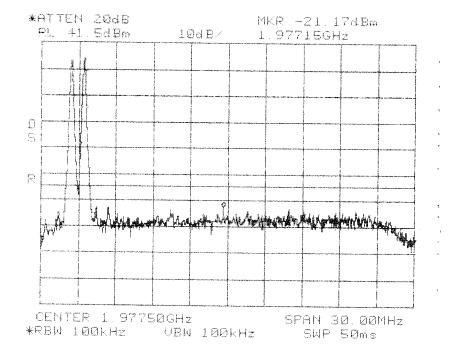


Intermodulation Close Lower TDMA PCS 1900 MHz EFC Band

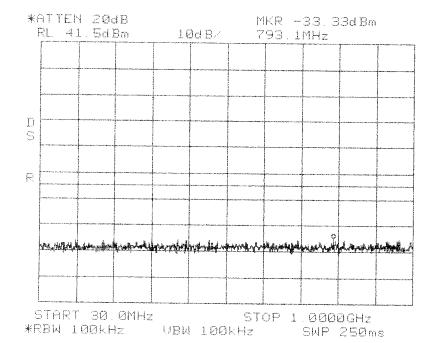


Intermodulation Close Lower TDMA PCS 1900 MHz EFC Band


Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

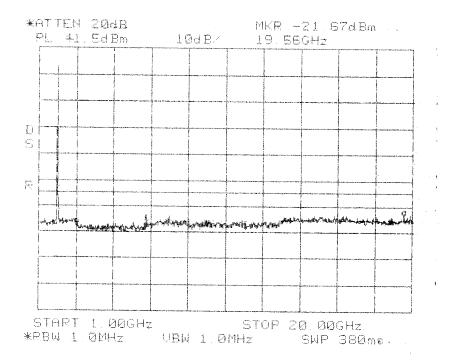

Intermodulation Close Lower TDMA PCS 1900 MHz EFC Band

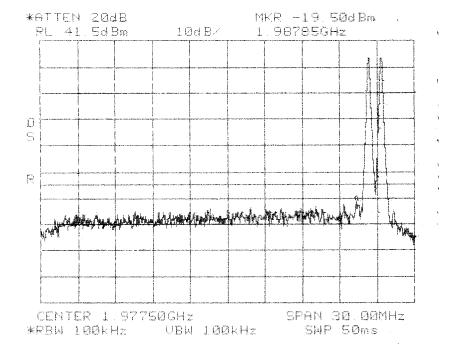


Intermodulation Close Upper TDMA PCS 1900 MHz EFC Band

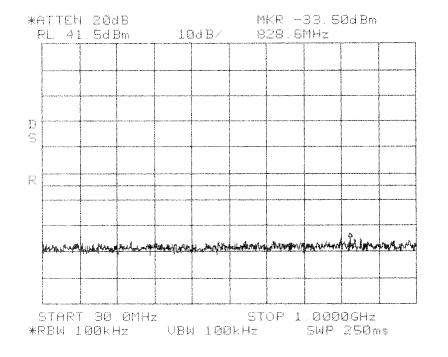


Intermodulation Close Upper TDMA PCS 1900 MHz EFC Band


Span: 1 GHz to 20 GHz RBW/VBW: 1 MHz

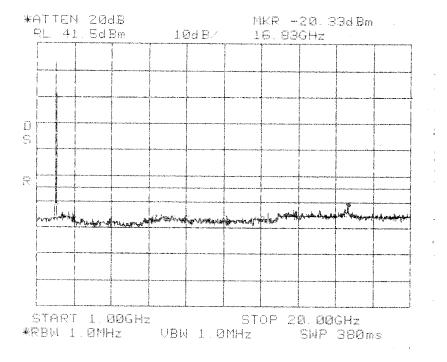


Intermodulation Close Upper TDMA PCS 1900 MHz EFC Band

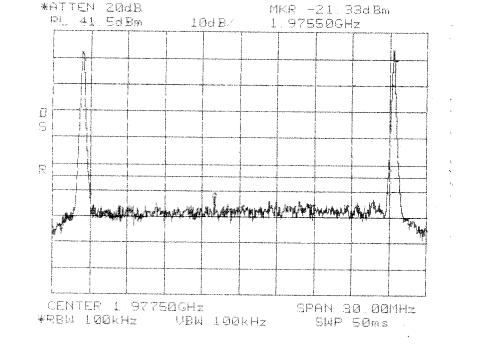


Intermodulation Apart TDMA PCS 1900 MHz EFC Band

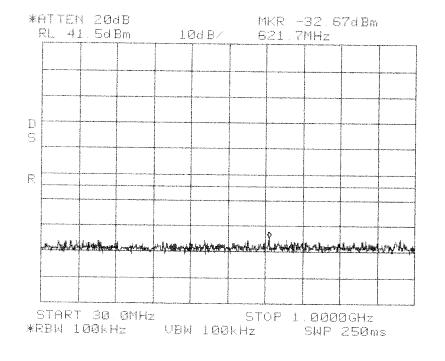


Intermodulation Apart TDMA PCS 1900 MHz EFC Band

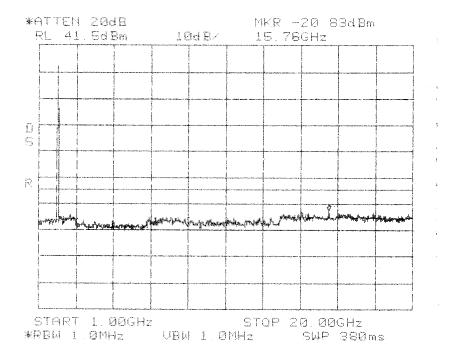


Intermodulation Apart TDMA PCS 1900 MHz EFC Band

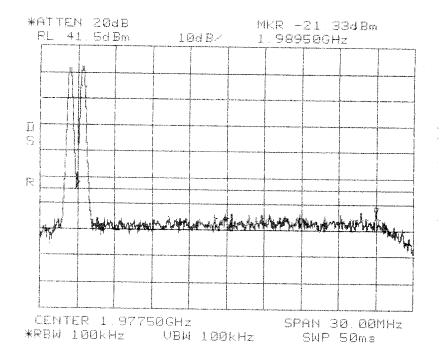

Intermodulation Close Lower GSM PCS 1900 MHz EFC Band

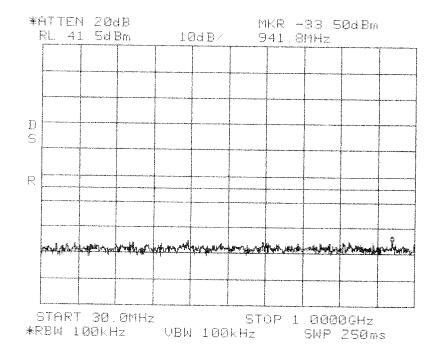



Intermodulation Close Lower GSM PCS 1900 MHz EFC Band

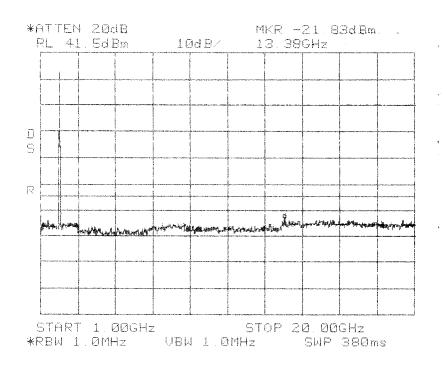

Intermodulation Close Lower GSM PCS 1900 MHz EFC Band

Intermodulation Close Upper GSM PCS 1900 MHz EFC Band

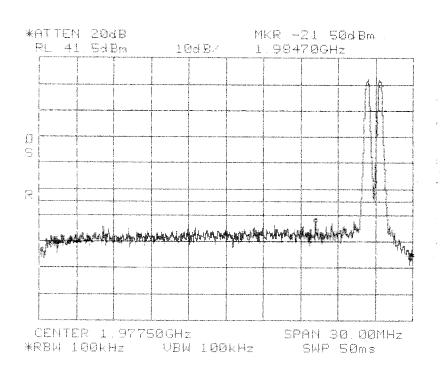

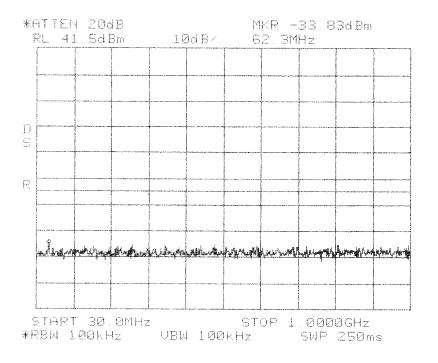

Intermodulation Close Upper GSM PCS 1900 MHz EFC Band


Intermodulation


PCS 1900 MHz


EFC Band


Close Upper

GSM

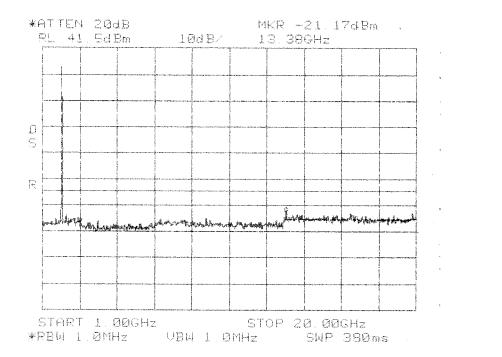




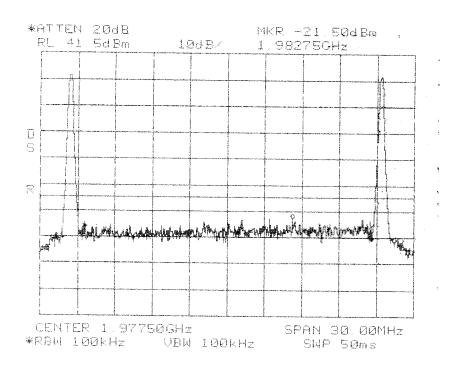

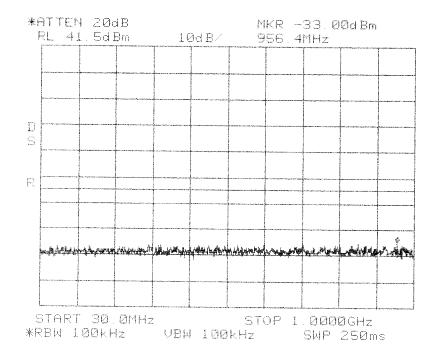

Intermodulation Apart GSM PCS 1900 MHz EFC Band

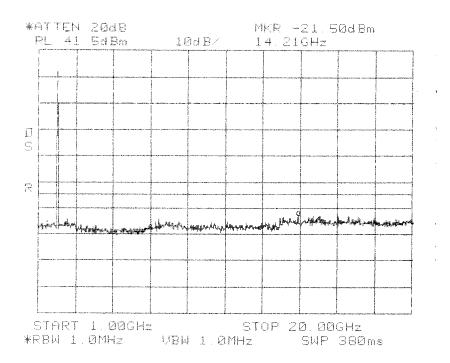



Intermodulation Apart GSM PCS 1900 MHz EFC Band

> Close Lower


CDMA

۲ Intermodulation ÷ **PCS 1900 MHz EFC Band** ŧ. ÷

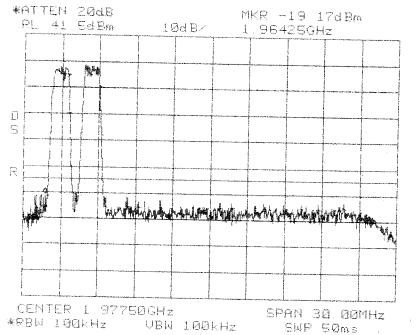

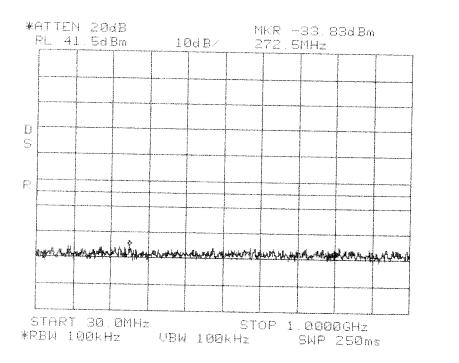



Intermodulation Close Lower **CDMA PCS 1900 MHz EFC Band**

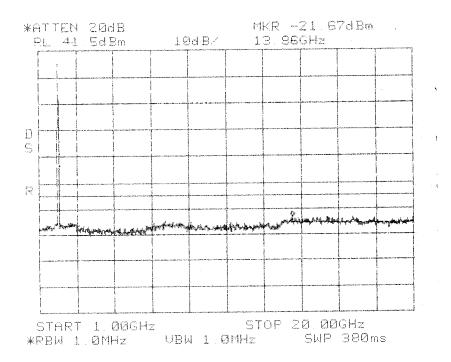


Intermodulation Close Lower CDMA PCS 1900 MHz EFC Band

Intermodulation Close Upper CDMA PCS 1900 MHz EFC Band

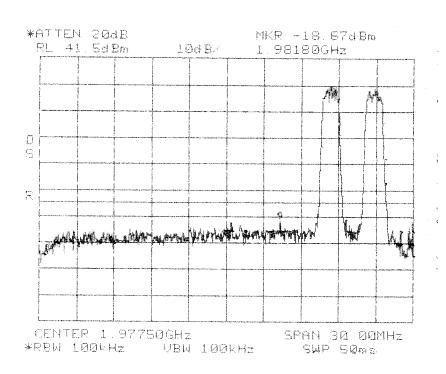

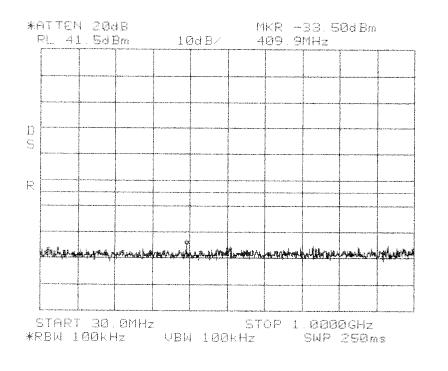



Intermodulation Close Upper CDMA PCS 1900 MHz EFC Band

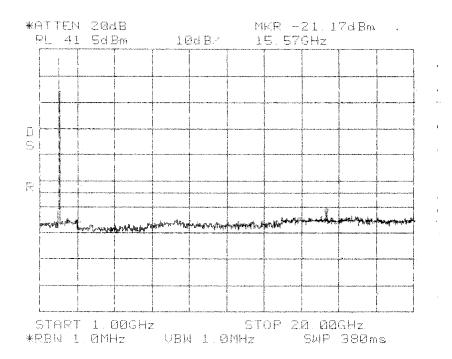


Intermodulation Close Upper CDMA PCS 1900 MHz EFC Band

Intermodulation Apart CDMA PCS 1900 MHz EFC Band

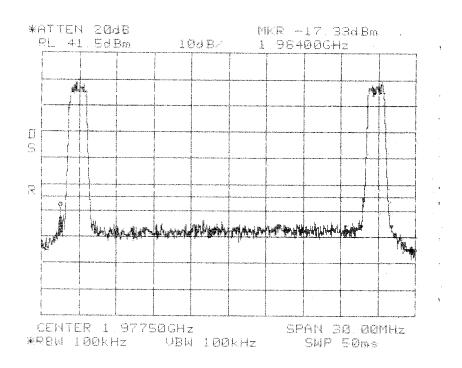

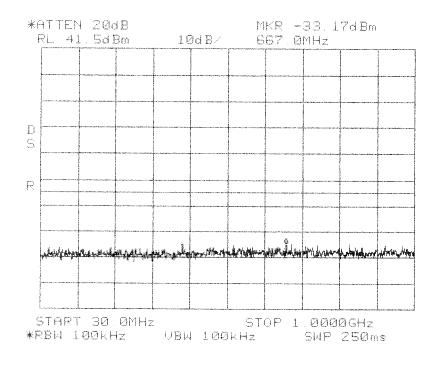

Intermodulation Apart CDMA PCS 1900 MHz EFC Band

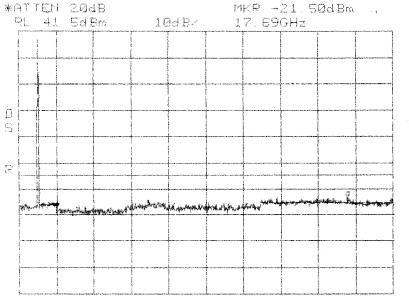

Intermodulation Apart CDMA PCS 1900 MHz EFC Band

٠,

START 1.00GHz STOP 20.00GHz *RBW 1.0MHz SWP 380ms



Appendix B

Constructional Data Form

Test Report WC505743 Rev B

Appendix B

TÜV America Inc

19333 Wild Mountain Road

Taylors Falls MN 55084-1758

Tel: 651 638 0297

297 Fax: 651 638 0298

112205



PLEASE COMPLETE THIS	DOCUMENT IN FULL, ENTER	ING N/A IF	THE FIELD	IS NOT	APPLICABLE.	
	s information will be input into ne to get HELP for the current :			own bel	low.	
Company:	ADC Inc.					
Address:	P.O. Box 1101					
	Minneapolis, MN 55440-11	101				
Contact:	Mark F. Miska		Position:	Co	ompliance Eng	jineer
Phone:	952-403-8340		Fax:	95	52-403-8858	
E-mail Address:	mark.miska@adc.com					
General Equipment D	escription NOTE: This in	formation	will be inpu	t into yo	our test report as	shown below.
	Transports RF between a					
EUT Name	Digivance® Street Covera	ge Solutio	on			
Model No.:	DGVC-1X1X4X1X200SYS	6	Serial No	5.: No	one	
Product Options:	None					
Configurations to be tes	sted: SMR 800 MHz	Cellular a	and 1900 N	MHz Po	CS Systems	
Test Objective						
EMC Directive 89/3	36/EEC (EMC)	☐ FC	C: (Class	□ A □ B	Part
Std:			CI: (Class	🗆 А 🗌 В	
Machinery Directive	89/392/EEC (EMC	ВС	CIQ: (Class	□ A □ B	
Std:		🗌 Ca	inada: (Class	□ A □ B	
Medical Device Dire	ective 93/42/EEC (EMC)	Au	stralia: (Class	□ A □ B	
Std: Vehicle Directive 72	2/245/EEC (EMC)	Ot Ot	her: <u>FC</u>	CC Par	t 22 and Part 2	24
Std: FDA Reviewers Gui Notification Submi	idance for Premarket issions (EMC)					
TÜV Product Service	Certification Requested					
Attestation of Confo	• • •				Mark (IEM)	
Certificate of Confor	,		ompliance	e Docur		
Protection Class (N	N/A for vehicles)	⊔с	lass I		Class II	Class III

FILE: EMCU_F09.02E, REVISION 0, Effective: October 26, 1999



(Press F1 when field is selected to show additional information on Protection Class.)	
---	--

Attendance
Test will be: Attended by the customer Unattended by the customer
Failure - Complete this section if testing will not be attended by the customer.
If a failure occurs, TUV Product Service should: Call contact listed above, if not available then stop testing. Continue testing to complete test series. Continue testing to define corrective action. Stop testing.
EUT Specifications and Requirements
Length: 36" Width: 10" Height: 8" Weight: 83 LBS
Power Requirements
Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)
Voltage: <u>115 VAC</u> (If battery powered, make sure battery life is sufficient to complete testing.)
of Phases: _1
CurrentCurrent(Amps/phase(max)):9.0(Amps/phase(nominal)):4.2
Other
Other Special Requirements
none
Typical Installation and/or Operating Environment
(ie. Hospital, Small Business, Industrial/Factory, etc.)
Host indoor only with Remote Unit indoor or outdoor. System is typically employed as a Microcell.
EUT Power Cable
Permanent OR Removable Length (in meters): 1
 Shielded OR I Unshielded Not Applicable

FILE: EMCU_F09.02E, REVISION 0, Effective: October 26, 1999



EUT Interfac	-			Shi	eldiı	าต					
Туре	Analog	Digital	Qty	Yes	^o Z	Туре	Termination	Connector Type	Port Termination	Length (in meters)	Removable
EXAMPLE: RS232		×	2	×		Foil over braid	Coaxial	Metallized 9- pin D-Sub	Characteristic Impedance	6	
RF "N" type			3			Braid	Coaxial	N	50 Ohms	>3	
Alarm			1			Not Specified	Coaxial	6 Pin Standoff		>3	
Fiber			2			N/A	N/A	S/C	N/A	>3	
Fiber			2			N/A	N/A	Opti-Tap	N/A	>3	
9 Pin Din			4			Not Specified	AC Coupled	Din		3	
AC Power			1			N/A				>3	
			1							1	
DC Power			1			Varied		Terminal		1	
Net In			1			Not Specified	CAT 5	RJ-45		3	
Net Out			1			Not Specified	CAT 5	RJ-45		3	

FILE: EMCU_F09.02E, REVISION 0, Effective: October 26, 1999



EUT Software.	
Revision Level:	Version 3.01.04
Description:	Digivance Element Management System (DEMS). System Management and Interface Matching Software.

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

- 1. Max composite in and out
- 2.
- 3.

Description	Model #	Serial #	FCC ID #
Host Unit	DGVL-101000HU	None	
Host Unit	DGVL-401000HU	None	
Digivance SCS System consist of the HU, STM PCB, and LPA.			

FILE: EMCU_F09.02E, REVISION 0, Effective: October 26, 1999



Support Equipment List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)							
Description	Model #	Serial #	FCC ID #				
Signal Generator	Agilent E4436B	963739					
Power Supply	Xantrex HPD 60-5	MC 27764					

Oscillator Frequencies						
Frequency	Derived Frequency	Component # / Location	Description of Use			

Power Supply			
Manufacturer	Model #	Serial #	Туре
			Switched-mode: (Frequency) Linear Other:
			Switched-mode: (Frequency)
	•		· · ·

Power Line Filters							
Manufacturer	Model #	Location in EUT					
None							



Critical EMI Components (Capacitors, ferrites, etc.)						
Manufacturer	Part # or Value	Qty	Component # / Location			

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.


None


(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE) Authorization Signatures

Customer authorization to perform tests according to this test plan.	Date
Test Plan/CDF Prepared By (please print)	Date
Reviewed by TÜV Product Service Associate	Date

Digivance 800 MHz SCS


Host Unit

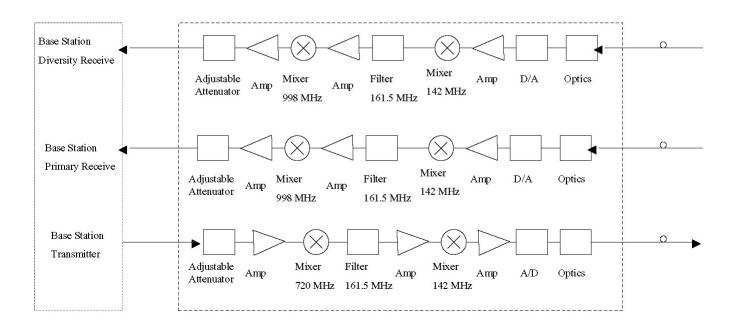


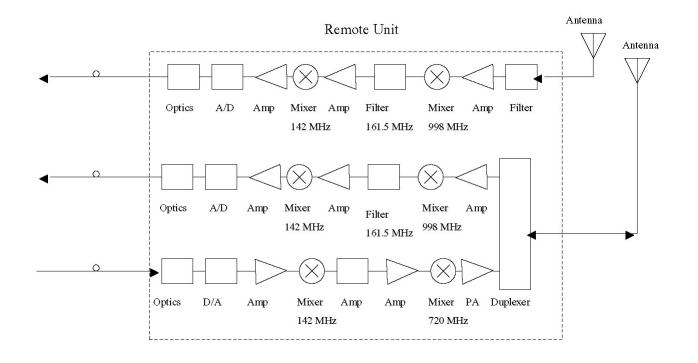

Digivance 1900 MHz SCS

Host Unit

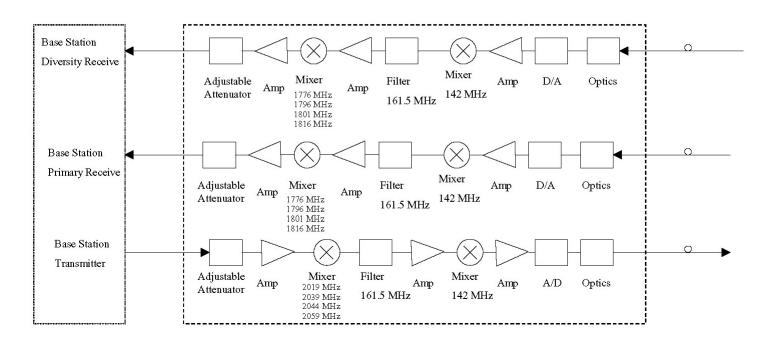

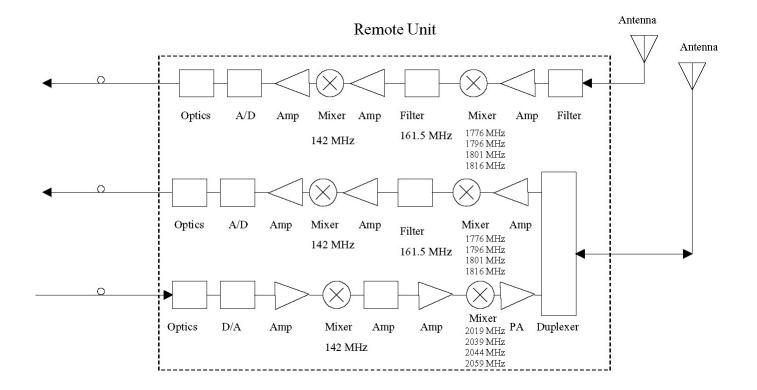



Appendix C Measurement Protocol Test Report WC505743 Rev B Appendix C 268 of 269 TÜV America Inc 112205 19333 Wild Mountain Road Taylors Falls MN 55084-1758 Tel: 651 638 0297 Fax: 651 638 0298



MEASUREMENT PROTOCOL

Environmental conditions in the lab, (TUV)

Temperature: 22 - 26° C Relative Humidity: 20 - 22 % Atmospheric pressure: 98.0 – 99.0 kPa

Test Methodology

Emissions testing is performed according to the procedures in ANSI C63.4-2003.

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system has a measurement uncertainty of ± 1.8 dB. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. The test system has a measurement uncertainty of ± 4.8 dB. The equipment comprising the test systems is calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

Radiated Emissions

The final level, in $dB_{\mu}V/m$, equals the reading from the spectrum analyzer (Level $dB_{\mu}V$), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ	LEVEL	CABLE/ANT/PREAMP	FINAL	POL/HG	T/AZ	DELTA1
(MHz)	(dBuV)	(dB) (dB/m) (dB)	(dBuV/m)	(m)	(deg)	
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0	0.0	-10.9

Substitution Method

A radiated emission scan was also made, at TUV America's Wild River Lab Large Test Site, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the –13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 10000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1 GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

Test Equipment

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.

Test Report WC505743 Rev B		Appendix C			269 of 269
TÜV America Inc	19333 Wild Mountain Road	Taylors Falls MN 55084-1758	Tel: 651 638 0297	Fax: 651 638 0298	112205