

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 1(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

APPENDIX C1: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 2(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 17

Date: 5/12/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D3C

Configuration: Body Worn MSL - LTE Band 17

Communication System: LTE band 17 (0); Communication System Band: LTE 17; Frequency: 709 MHz

Medium Parameters used: $f=709$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 54.760$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE Band 17/15mm Device Back - LTE band


17_chan23780_10MHz_BW_RB1_Offset_High_amb_temp_24.0C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 4.631 V/m; **Power Drift = -0.013 dB**

Fast SAR: SAR(1g) = 0.0755 W/kg; SAR(10g) = 0.0509 W/kg

Maximum value of SAR (interpolated) = 0.0808 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 3(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

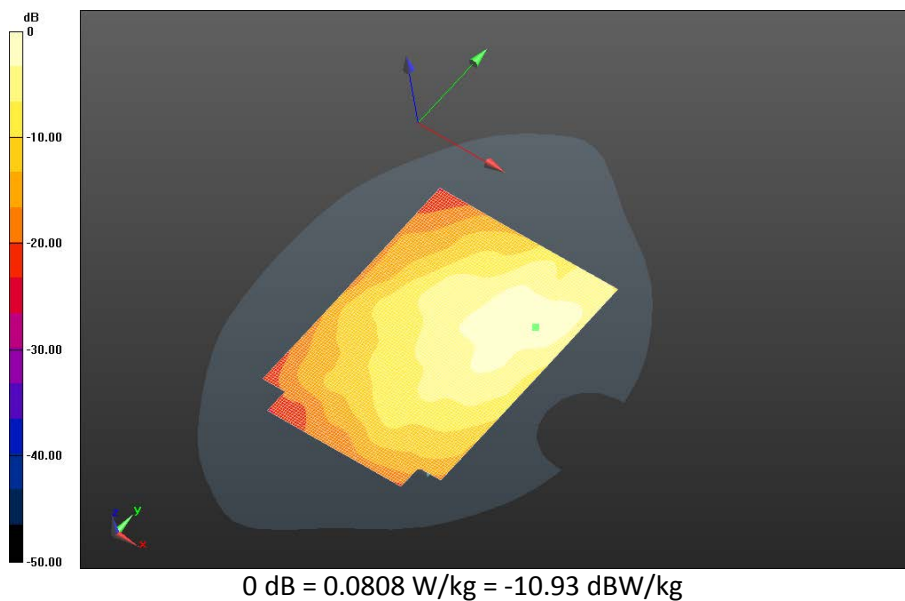

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 4(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 17/15mm Device Back - LTE band
17_chan23790_10MHz_BW_RB1_Offset_High_amb_temp_23.7C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 6.484 V/m; **Power Drift = 0.00155 dB**

Fast SAR: SAR(1g) = 0.0938 W/kg; SAR(10g) = 0.0647 W/kg
Maximum value of SAR (interpolated) = 0.0973 W/kg

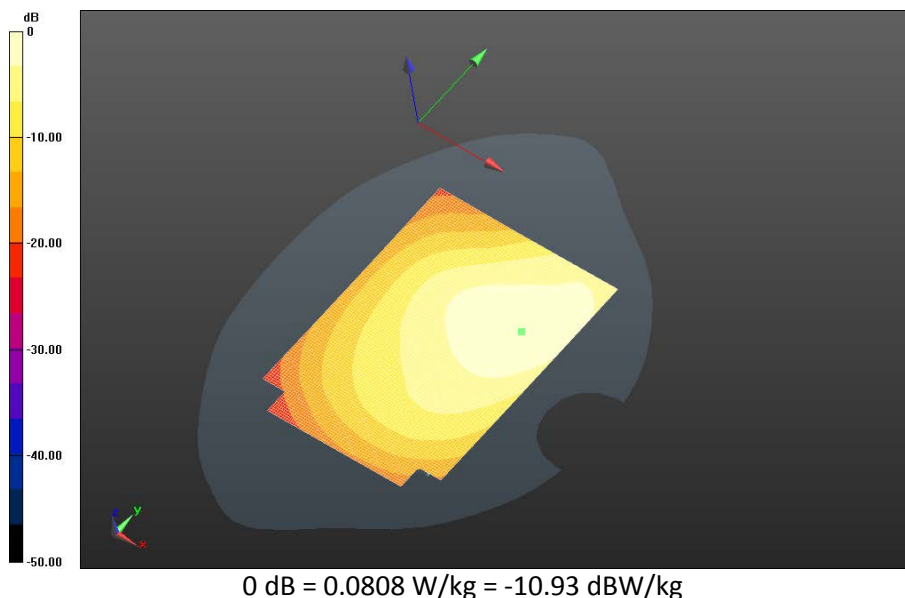


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 5(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 17/15mm Device Back - LTE band 17_chan23800_10MHz_BW_RB1_Offset_High_amb_temp_24.2C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 6.679 V/m; **Power Drift = -0.036 dB**

Fast SAR: SAR(1g) = 0.0980 W/kg; SAR(10g) = 0.0676 W/kg
Maximum value of SAR (interpolated) = 0.102 W/kg

Body Worn MSL - LTE Band 17/15mm Device Back - LTE band 17_chan23800_10MHz_BW_RB1_Offset_High_amb_temp_24.2C_liq_temp_22.2C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 6.679 V/m; **Power Drift = -0.036 dB**


Averaged SAR: SAR(1g) = 0.0985 W/kg; SAR(10g) = 0.0684 W/kg
Maximum value of SAR (interpolated) = 0.133 W/kg

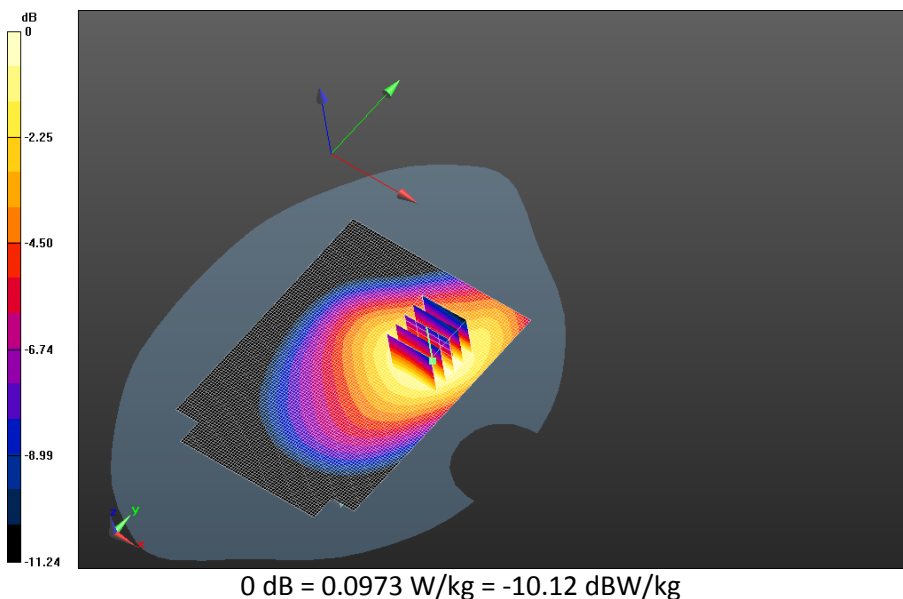

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 6(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 17/15mm Device Back - LTE band
17_chan23780_10MHz_BW_RB25_Offset_High_amb_temp_24.0C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.757 V/m; **Power Drift = -0.036 dB**


Fast SAR: SAR(1g) = 0.0724 W/kg; SAR(10g) = 0.0500 W/kg
Maximum value of SAR (interpolated) = 0.0751 W/kg

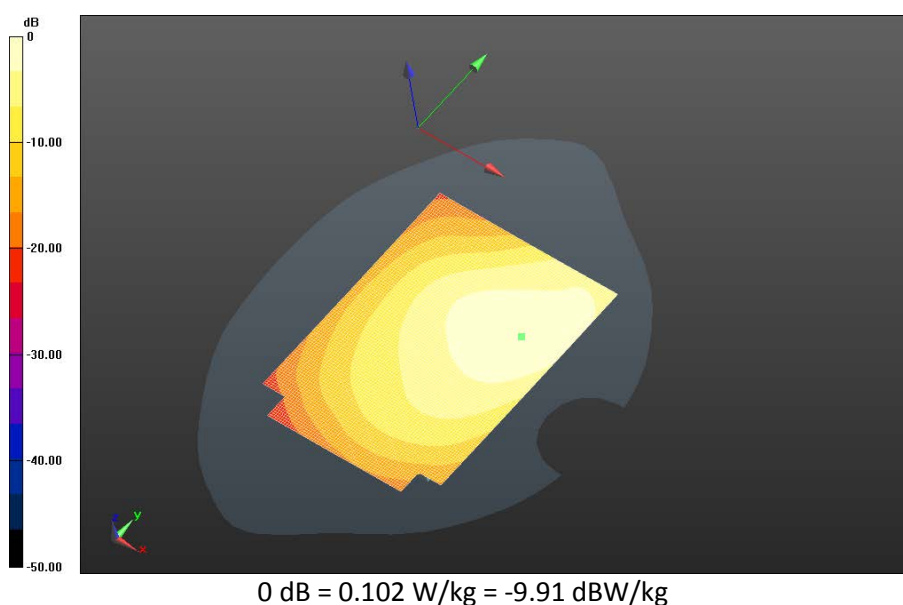

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 7(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 17/15mm Device Front - LTE band
17_chan23800_10MHz_BW_RB1_Offset_High_amb_temp_24.0C_liq_temp_22.1C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.881 V/m; **Power Drift = 0.025 dB**

Fast SAR: SAR(1g) = 0.0899 W/kg; SAR(10g) = 0.0618 W/kg
Maximum value of SAR (interpolated) = 0.0945 W/kg

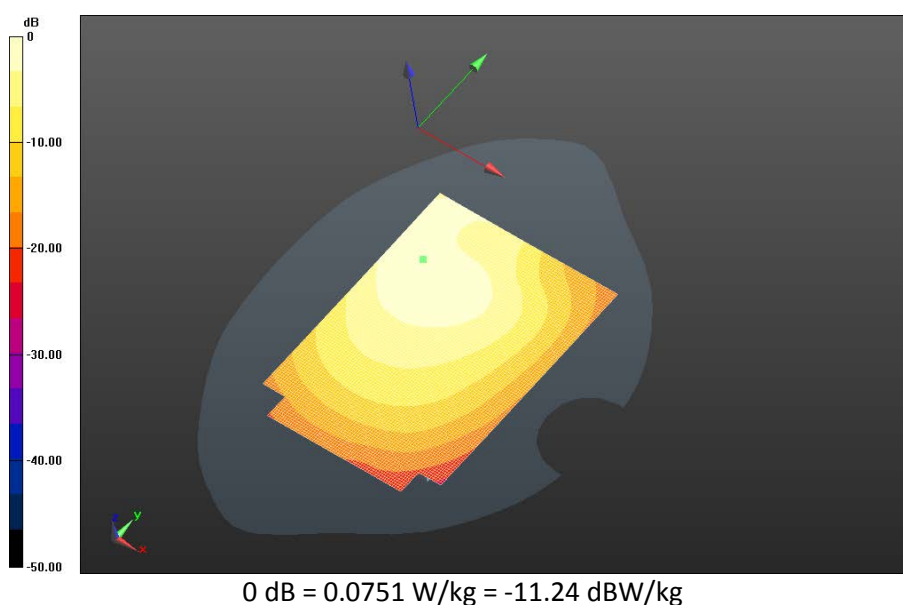

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 8(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 13

Date: 5/9/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D3C

Configuration: Body Worn MSL - LTE Band 13

Communication System: LTE band 13 (0); Communication System Band: LTE band 13; Frequency: 782 MHz

Medium Parameters used: $f=782$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.018$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE Band 13/15mm Device Back - LTE band

13_chan23230_10MHz_BW_RB1_Offset_High_amb_temp_23.8C_liq_temp_22.0C/Area Scan

(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 14.833 V/m; **Power Drift = -0.012 dB**

Fast SAR: SAR(1g) = 0.352 W/kg; SAR(10g) = 0.244 W/kg

Maximum value of SAR (interpolated) = 0.375 W/kg

Body Worn MSL - LTE Band 13/15mm Device Back - LTE band

13_chan23230_10MHz_BW_RB1_Offset_High_amb_temp_23.8C_liq_temp_22.0C/Zoom Scan


(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 14.833 V/m; **Power Drift = -0.012 dB**

Averaged SAR: SAR(1g) = 0.382 W/kg; SAR(10g) = 0.259 W/kg

Maximum value of SAR (interpolated) = 0.602 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report			Page 9(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW		

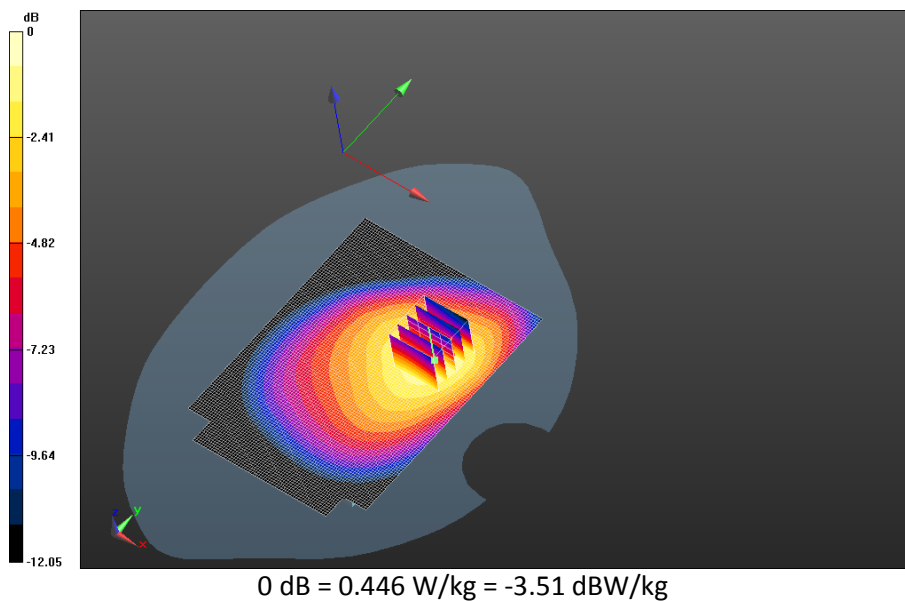

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 10(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 13/15mm Device Back - LTE band
13_chan23230_10MHz_BW_RB25_Offset_High_amb_temp_23.4C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 13.013 V/m; **Power Drift = -0.011 dB**


Fast SAR: SAR(1g) = 0.283 W/kg; SAR(10g) = 0.196 W/kg
Maximum value of SAR (interpolated) = 0.301 W/kg

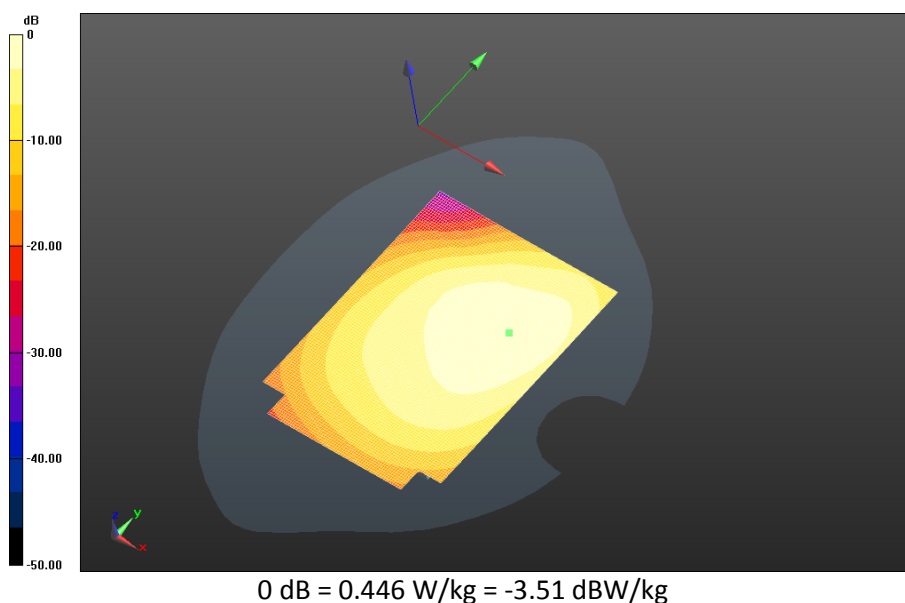

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 11(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 13/15mm Device Front - LTE band
13_chan23230_10MHz_BW_RB1_Offset_High_amb_temp_23.2C_liq_temp_21.8C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 13.911 V/m; **Power Drift = 0.042 dB**

Fast SAR: SAR(1g) = 0.328 W/kg; SAR(10g) = 0.228 W/kg
Maximum value of SAR (interpolated) = 0.350 W/kg

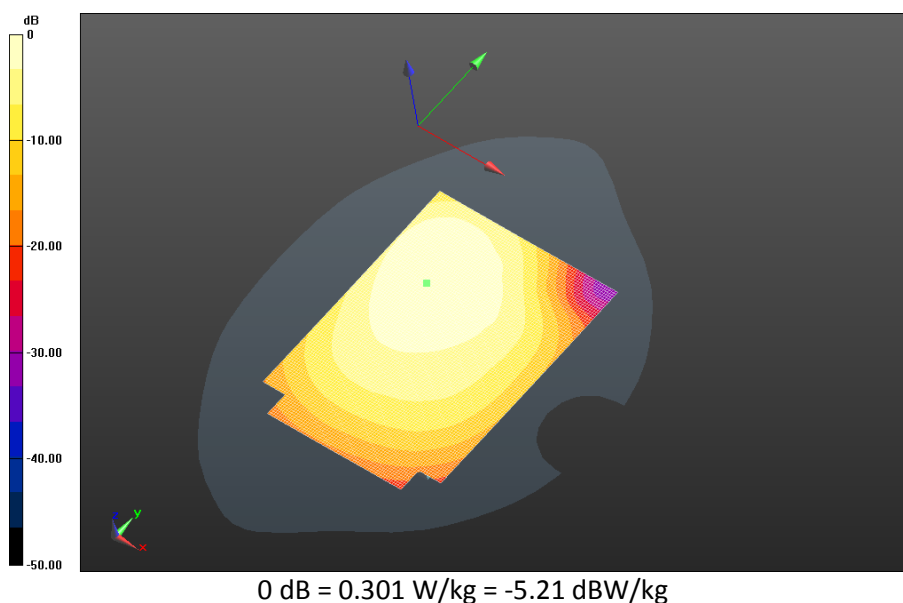

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 12(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 5

Date: 5/2/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FF3D3C

Configuration: Body Worn MSL - LTE Band 5

Communication System: LTE 5 (0); Communication System Band: LTE 5; Frequency: 829 MHz

Medium Parameters used: $f=829$ MHz; $\sigma = 0.975$ S/m; $\epsilon_r = 53.524$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE Band 5/15mm Device Back - LTE band

5_chan20450_10MHz_BW_RB1_Offset_Mid_amb_temp_24.6C_liq_temp_22.1C/Area Scan


(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 15.918 V/m; **Power Drift = -0.00942 dB**

Fast SAR: SAR(1g) = 0.359 W/kg; SAR(10g) = 0.250 W/kg

Maximum value of SAR (interpolated) = 0.380 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 13(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

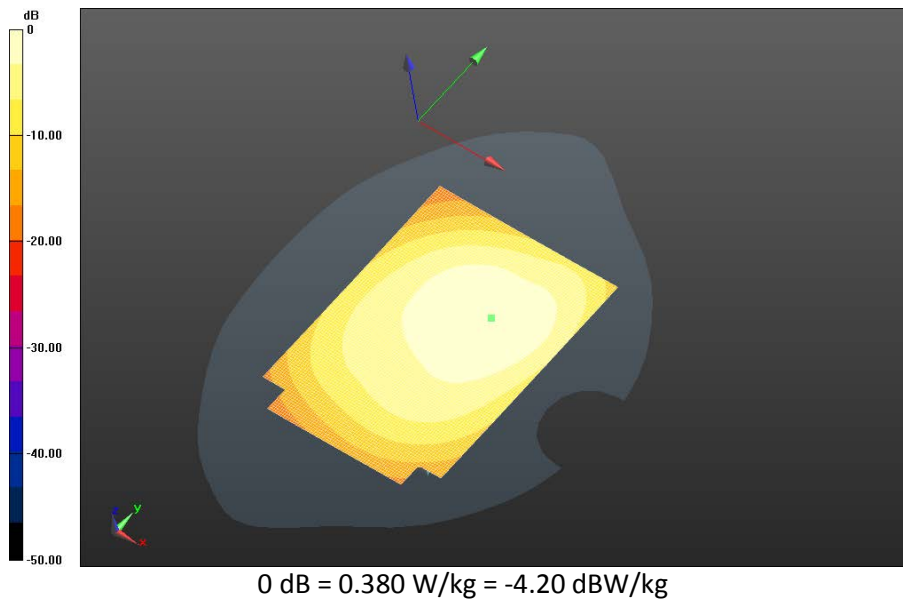

Body Worn MSL - LTE Band 5/15mm Device Back - LTE band
5_chan20525_10MHz_BW_RB1_Offset_Low_amb_temp_24.5C_liq_temp_22.2C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 15.811 V/m; **Power Drift = -0.00528 dB**

Fast SAR: SAR(1g) = 0.358 W/kg; SAR(10g) = 0.249 W/kg
Maximum value of SAR (interpolated) = 0.380 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 14(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

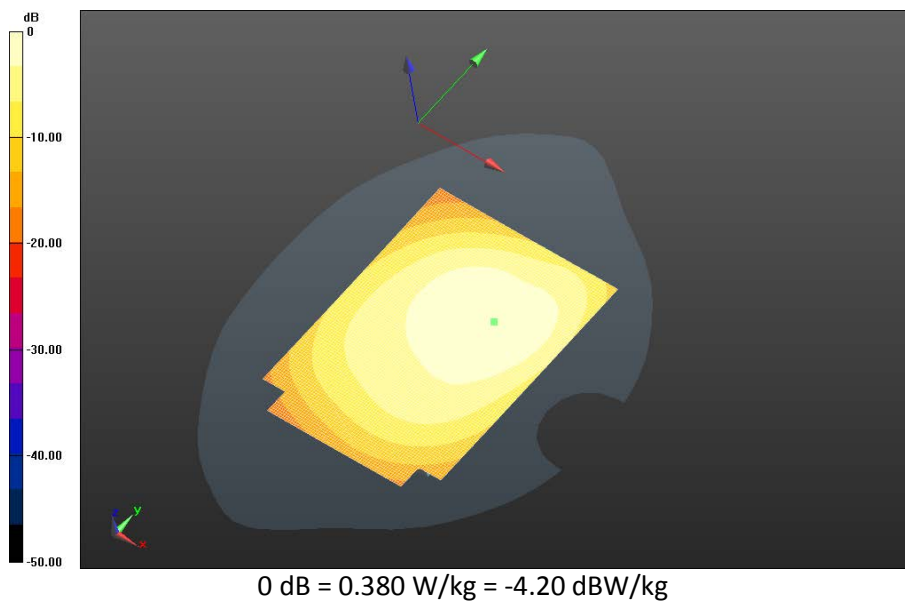


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 15(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 5/15mm Device Back - LTE band
5_chan20600_10MHz_BW_RB1_Offset_Low_amb_temp_24.2C_liq_temp_22.2C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 15.970 V/m; **Power Drift = -0.016 dB**

Fast SAR: SAR(1g) = 0.361 W/kg; SAR(10g) = 0.252 W/kg
Maximum value of SAR (interpolated) = 0.383 W/kg

Body Worn MSL - LTE Band 5/15mm Device Back - LTE band
5_chan20600_10MHz_BW_RB1_Offset_Low_amb_temp_24.2C_liq_temp_22.2C/Zoom Scan
(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 15.970 V/m; **Power Drift = -0.016 dB**


Averaged SAR: SAR(1g) = 0.364 W/kg; SAR(10g) = 0.262 W/kg
Maximum value of SAR (interpolated) = 0.493 W/kg

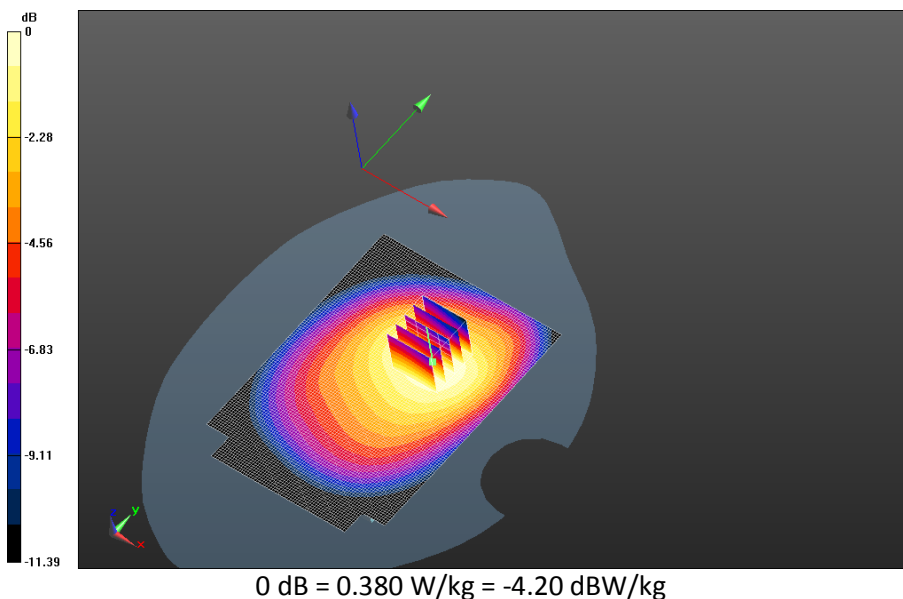

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 16(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 5/15mm Device Back - LTE band
5_chan20450_10MHz_BW_RB25_Offset_High_amb_temp_24.0C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 14.275 V/m; **Power Drift = -0.00306 dB**


Fast SAR: SAR(1g) = 0.293 W/kg; SAR(10g) = 0.204 W/kg
Maximum value of SAR (interpolated) = 0.310 W/kg

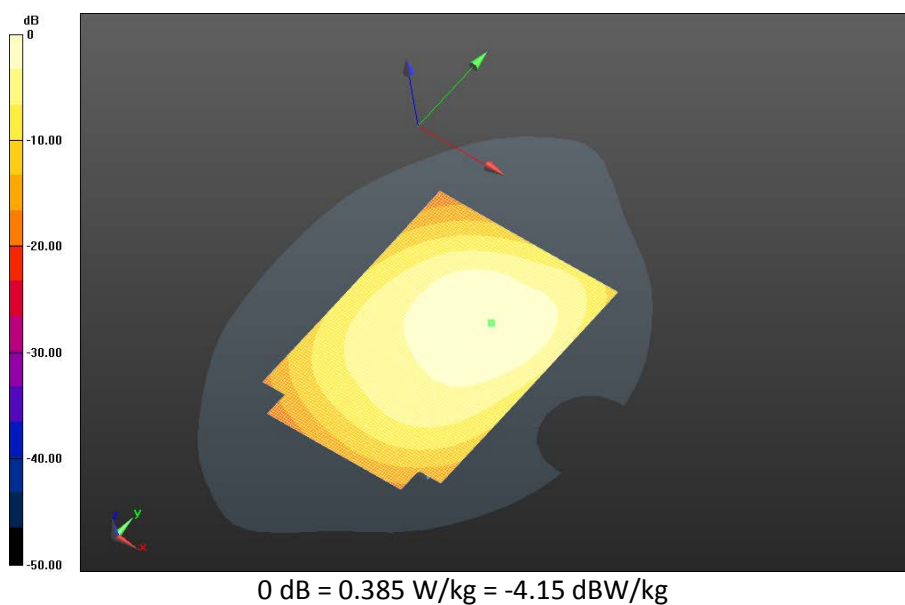

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 17(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE Band 5/15mm Device Front - LTE band
5_chan20450_10MHz_BW_RB1_Offset_Mid_amb_temp_24.0C_liq_temp_22.1C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 14.260 V/m; **Power Drift = 0.019 dB**

Fast SAR: SAR(1g) = 0.302 W/kg; SAR(10g) = 0.209 W/kg
Maximum value of SAR (interpolated) = 0.322 W/kg

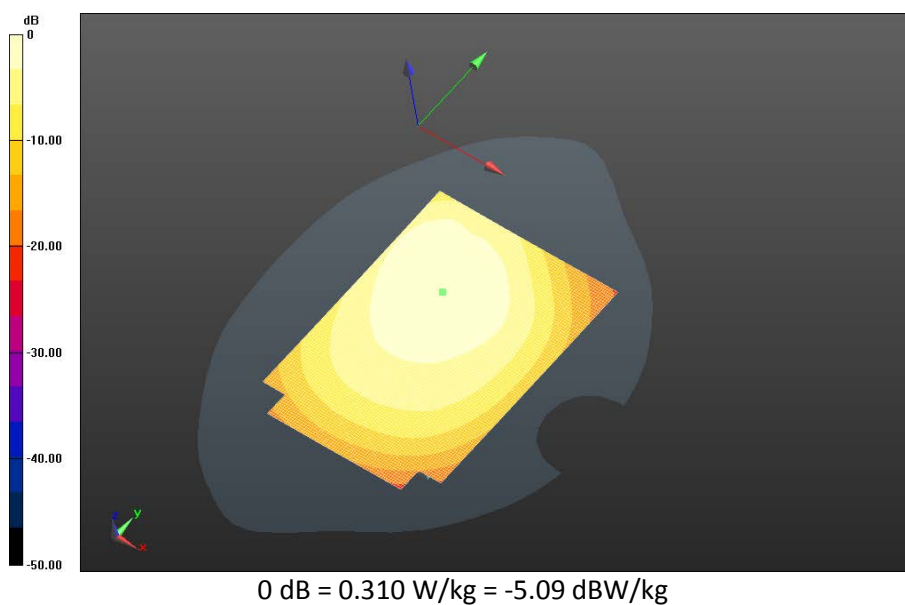

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 18(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

EDGE/GPRS 850

Date: 5/5/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FF3D40

Configuration: Body Worn MSL - GPRS 850

Communication System: GSM 850 (0); Communication System Band: GSM 850; Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 53.843$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - GPRS 850/15mm Device Back - GSM 850_1-

Slot_chan190_amb_temp_23.6C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:


dx=1.500 mm, dy=1.500 mm

Reference Value = 15.856 V/m; **Power Drift = -0.00101 dB**

Fast SAR: SAR(1g) = 0.363 W/kg; SAR(10g) = 0.252 W/kg

Maximum value of SAR (interpolated) = 0.385 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 19(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

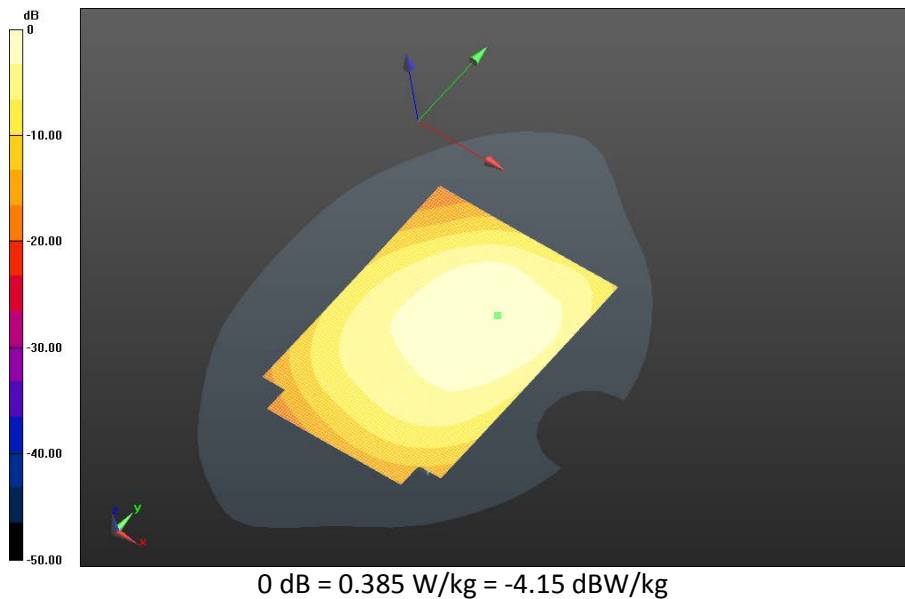

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 20(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_2-
Slot_chan190_amb_temp_23.7C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 15.646 V/m; **Power Drift = -0.016 dB**

Fast SAR: SAR(1g) = 0.349 W/kg; SAR(10g) = 0.242 W/kg
Maximum value of SAR (interpolated) = 0.370 W/kg

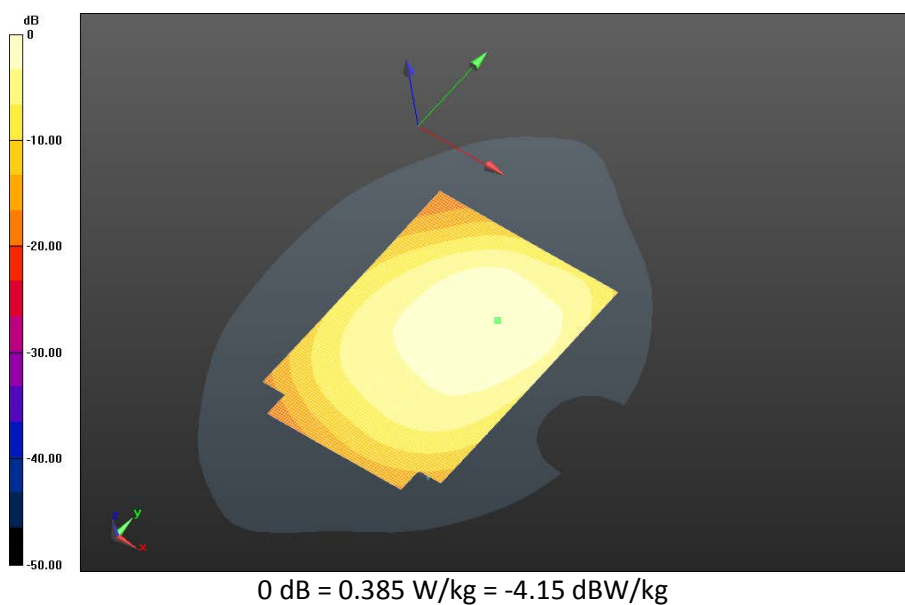


	Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report			Page 21(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_3-Slot_chan128_amb_temp_24.0C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 17.890 V/m; **Power Drift = 0.00188 dB**

Fast SAR: SAR(1g) = 0.458 W/kg; SAR(10g) = 0.317 W/kg
Maximum value of SAR (interpolated) = 0.490 W/kg

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_3-Slot_chan128_amb_temp_24.0C_liq_temp_22.1C/Zoom Scan (26x26x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 17.890 V/m; **Power Drift = 0.00188 dB**


Averaged SAR: SAR(1g) = 0.453 W/kg; SAR(10g) = 0.329 W/kg
Maximum value of SAR (interpolated) = 0.618 W/kg

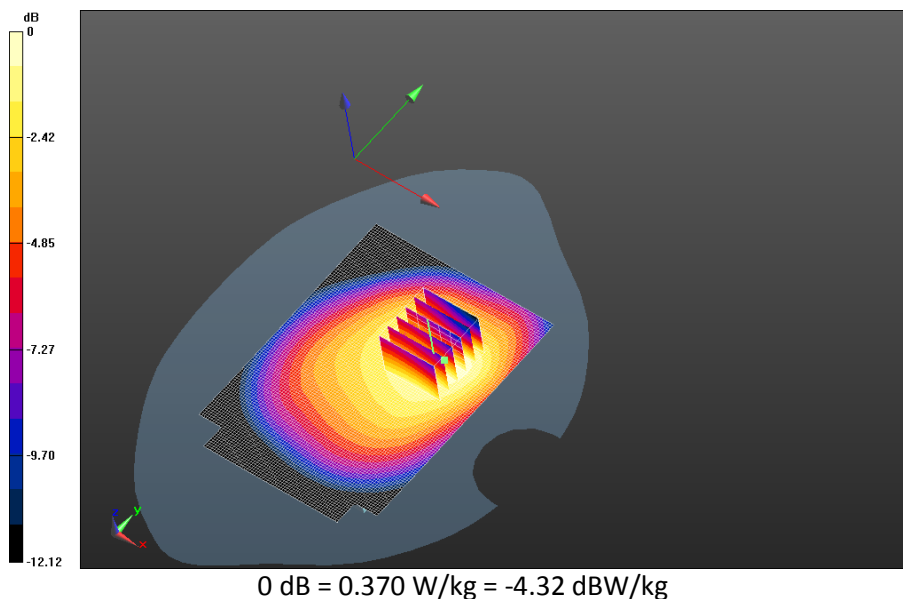

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 22(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_3-
Slot_chan190_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 16.366 V/m; **Power Drift = 0.080 dB**


Fast SAR: SAR(1g) = 0.382 W/kg; SAR(10g) = 0.265 W/kg
Maximum value of SAR (interpolated) = 0.406 W/kg

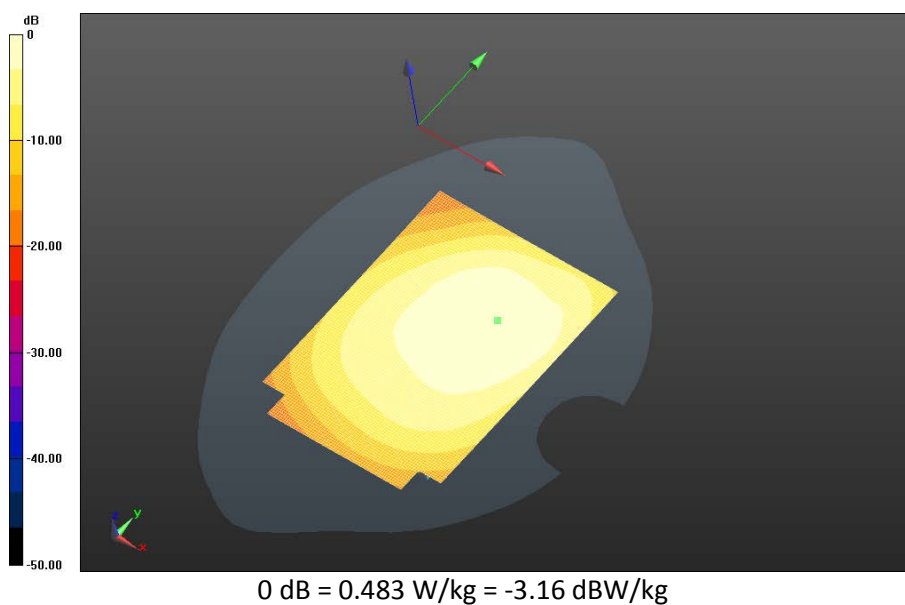

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 23(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_3-
Slot_chan251_amb_temp_23.8C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 14.739 V/m; **Power Drift = -0.00572 dB**


Fast SAR: SAR(1g) = 0.328 W/kg; SAR(10g) = 0.227 W/kg
Maximum value of SAR (interpolated) = 0.348 W/kg

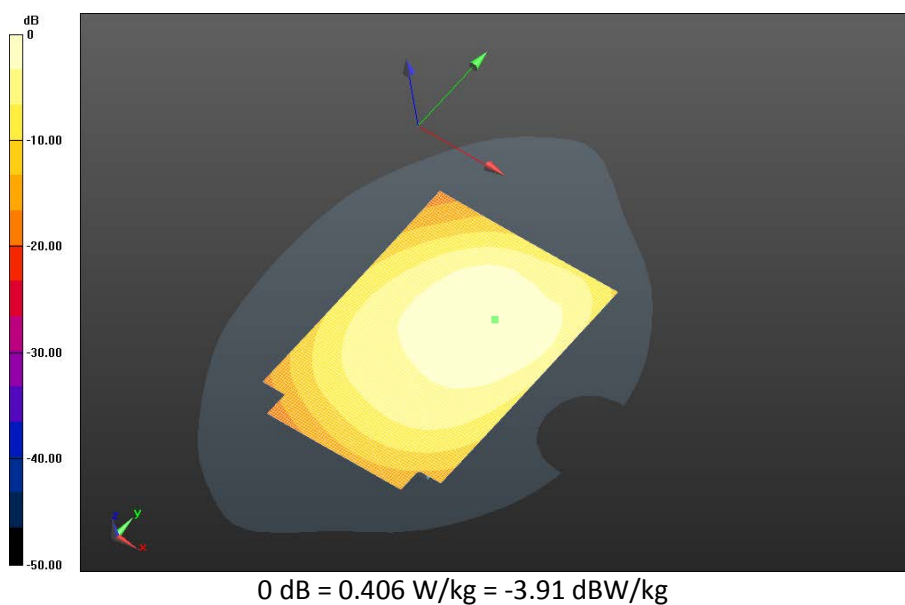

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 24(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Back - GPRS 850_4-
Slot_chan190_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 14.849 V/m; **Power Drift = 0.036 dB**


Fast SAR: SAR(1g) = 0.314 W/kg; SAR(10g) = 0.218 W/kg
Maximum value of SAR (interpolated) = 0.333 W/kg

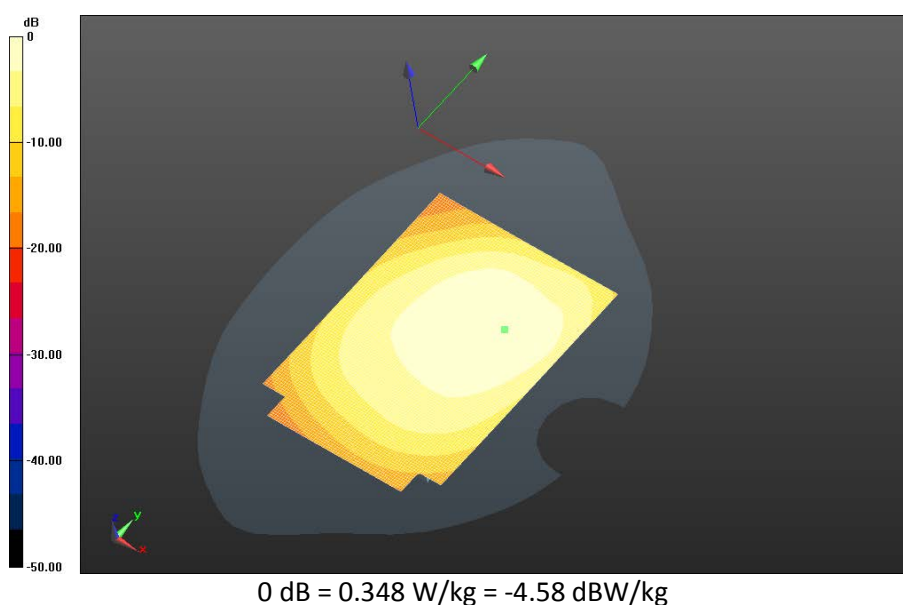

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 25(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850/15mm Device Front - GPRS 850_3-
Slot_chan190_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 15.606 V/m; **Power Drift = 0.019 dB**

Fast SAR: SAR(1g) = 0.352 W/kg; SAR(10g) = 0.242 W/kg
Maximum value of SAR (interpolated) = 0.377 W/kg

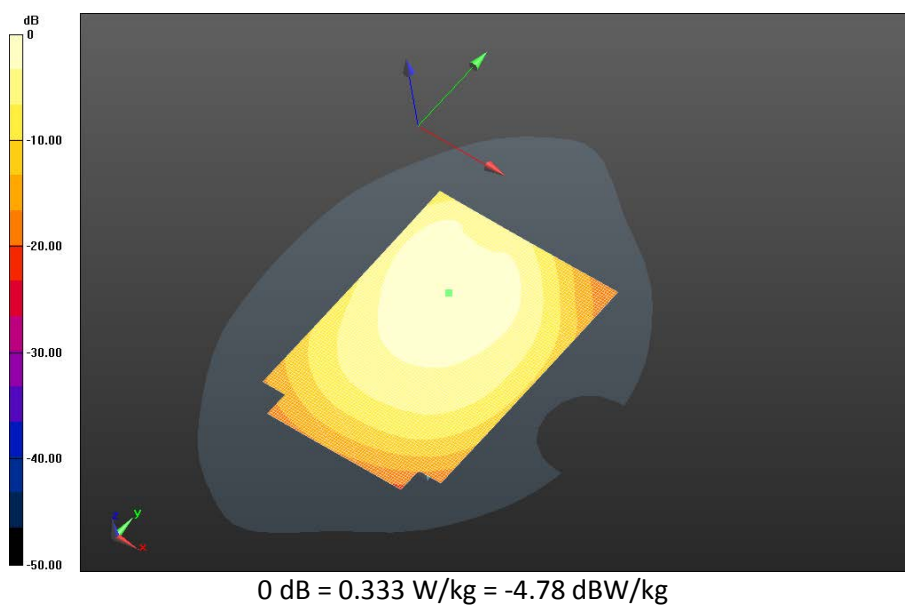

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 26(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

EDGE/GPRS 850 Rev 2

Date: 6/9/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF46F9

Configuration: Body Worn MSL - GPRS 850 Rev 2

Communication System: GSM 850 (0); Communication System Band: GSM 850; Frequency: 836.8 MHz

Medium Parameters used: $f=836.8$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 53.598$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GSM 850_1-

Slot_chan190_amb_temp_23.6C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:


$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 15.472 V/m; **Power Drift = 0.028 dB**

Fast SAR: SAR(1g) = 0.394 W/kg; SAR(10g) = 0.273 W/kg

Maximum value of SAR (interpolated) = 0.420 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 27(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

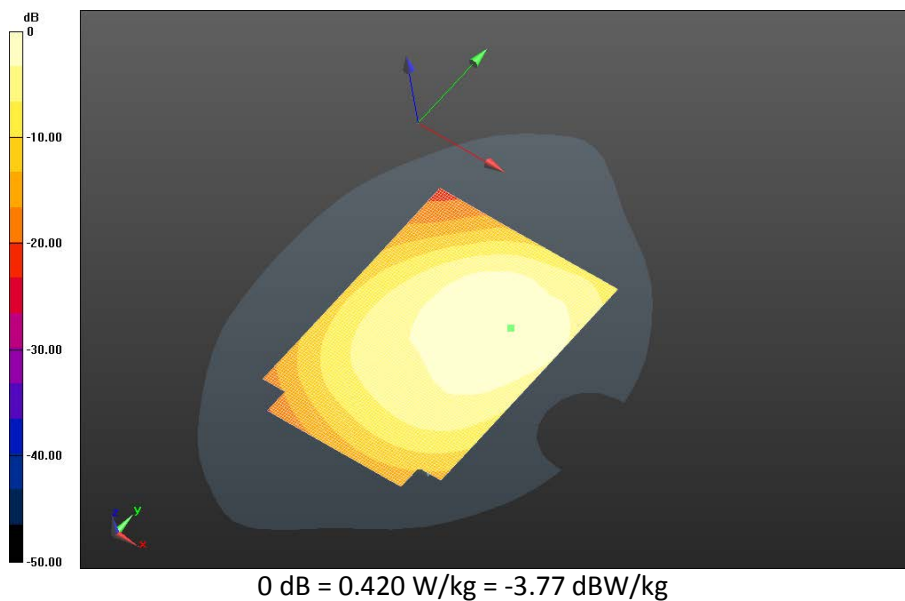

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 28(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_2-
Slot_chan128_amb_temp_23.7C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 17.068 V/m; **Power Drift = -0.0042 dB**

Fast SAR: SAR(1g) = 0.456 W/kg; SAR(10g) = 0.318 W/kg
Maximum value of SAR (interpolated) = 0.486 W/kg

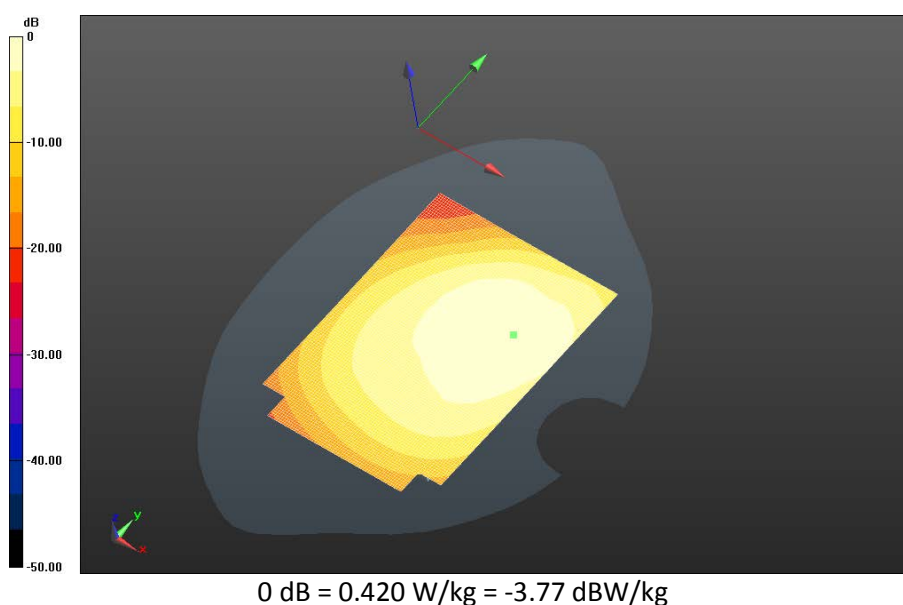


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 29(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_3-Slot_chan128_amb_temp_24.0C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 16.736 V/m; **Power Drift = 0.039 dB**

Fast SAR: SAR(1g) = 0.504 W/kg; SAR(10g) = 0.350 W/kg
Maximum value of SAR (interpolated) = 0.536 W/kg

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_3-Slot_chan128_amb_temp_24.0C_liq_temp_22.1C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 16.736 V/m; **Power Drift = 0.039 dB**


Averaged SAR: SAR(1g) = 0.516 W/kg; SAR(10g) = 0.365 W/kg
Maximum value of SAR (interpolated) = 0.718 W/kg

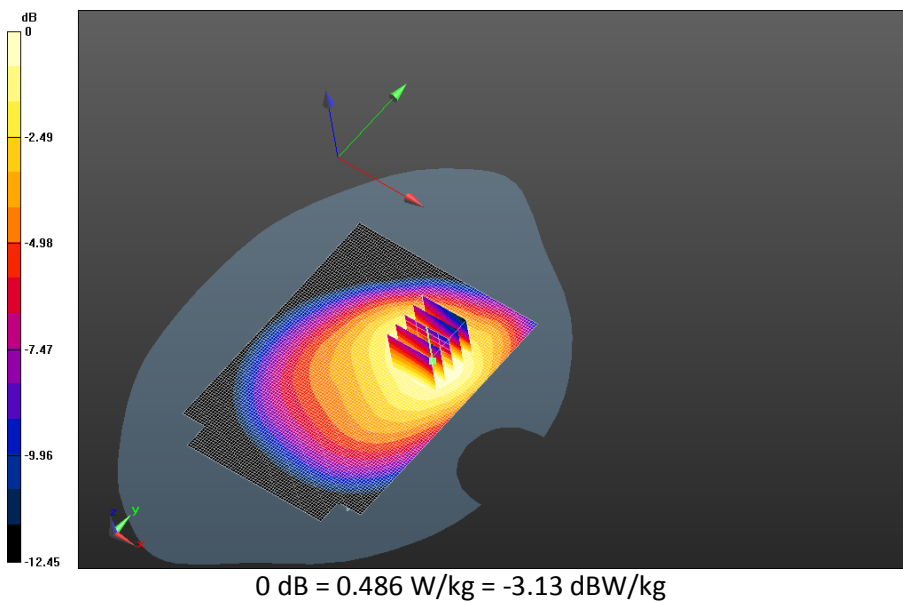

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 30(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_3-
Slot_chan190_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 15.297 V/m; **Power Drift = -0.011 dB**


Fast SAR: SAR(1g) = 0.431 W/kg; SAR(10g) = 0.297 W/kg
Maximum value of SAR (interpolated) = 0.459 W/kg

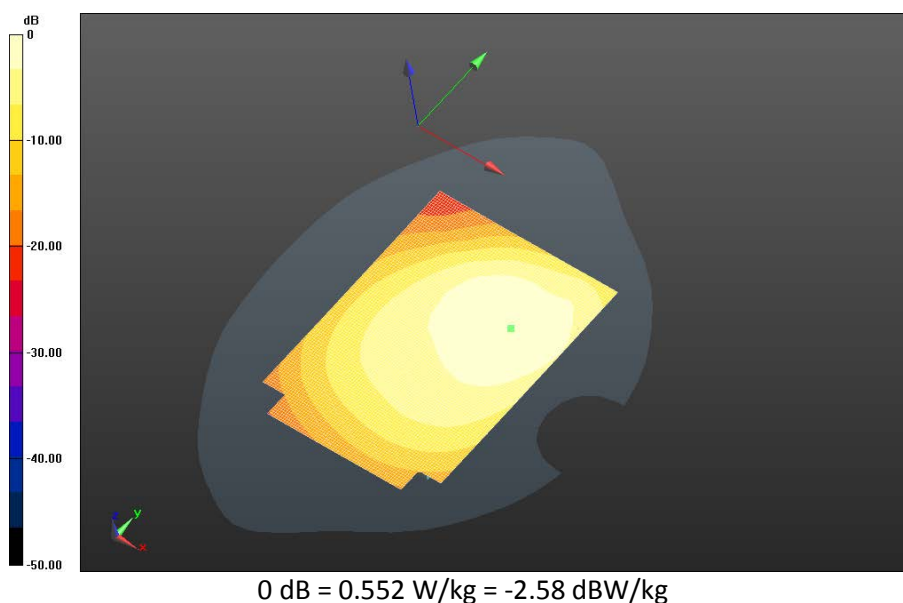

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 31(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_3-
Slot_chan251_amb_temp_23.8C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 14.686 V/m; **Power Drift = -0.039 dB**


Fast SAR: SAR(1g) = 0.402 W/kg; SAR(10g) = 0.276 W/kg
Maximum value of SAR (interpolated) = 0.428 W/kg

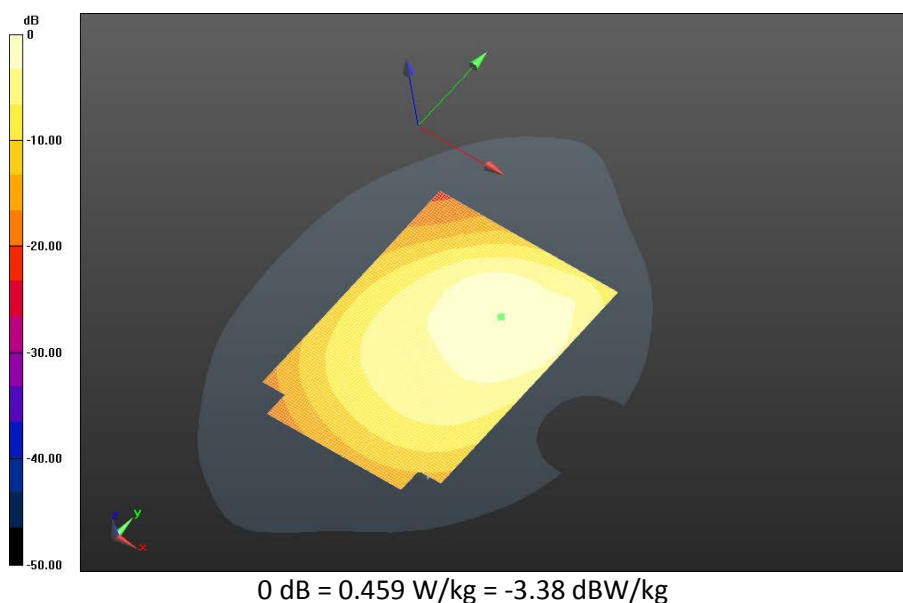

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 32(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 850 Rev 2/15mm Device Back - GPRS 850_4-
Slot_chan128_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 15.224 V/m; **Power Drift = -0.011 dB**

Fast SAR: SAR(1g) = 0.417 W/kg; SAR(10g) = 0.289 W/kg
Maximum value of SAR (interpolated) = 0.444 W/kg

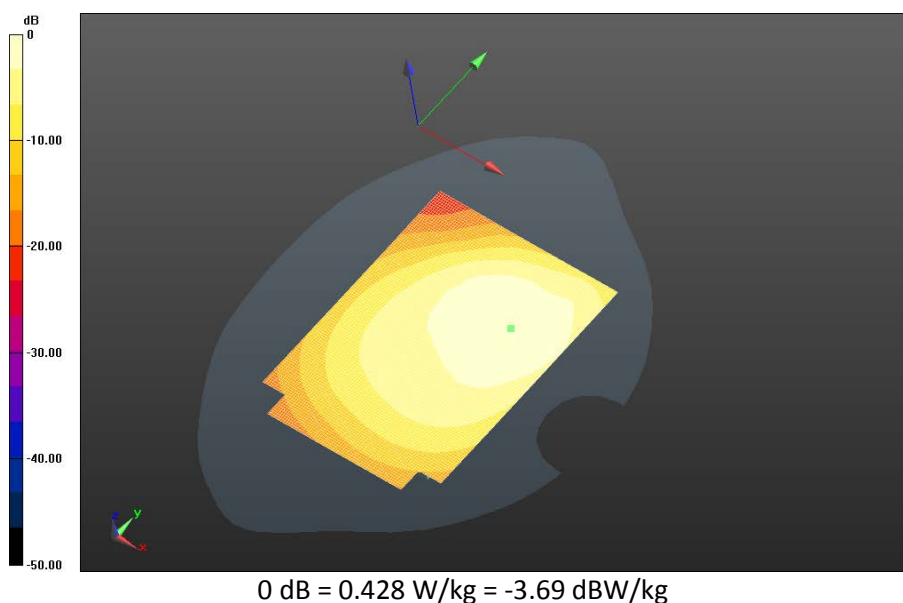

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 33(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

UMTS Band V

Date: 5/2/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - UMTS V

Communication System: WCDMA FDD V (0); Communication System Band: UMTS band V;

Frequency: 826.4 MHz

Medium Parameters used: $f=826.4$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 53.561$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (6.24,6.24,6.24); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - UMTS V/15mm Device Back - UMTS

V_chan4132_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 19.477 V/m; **Power Drift = -0.023 dB**

Fast SAR: SAR(1g) = 0.519 W/kg; SAR(10g) = 0.362 W/kg

Maximum value of SAR (interpolated) = 0.551 W/kg

Body Worn MSL - UMTS V/15mm Device Back - UMTS

V_chan4132_amb_temp_23.8C_liq_temp_22.2C/Zoom Scan (26x26x36)/Cube 0: Interpolated


grid: $dx=1.500$ mm, $dy=1.500$ mm, $dz=1.000$ mm

Reference Value = 19.477 V/m; **Power Drift = -0.023 dB**

Averaged SAR: SAR(1g) = 0.523 W/kg; SAR(10g) = 0.375 W/kg

Maximum value of SAR (interpolated) = 0.721 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 34(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

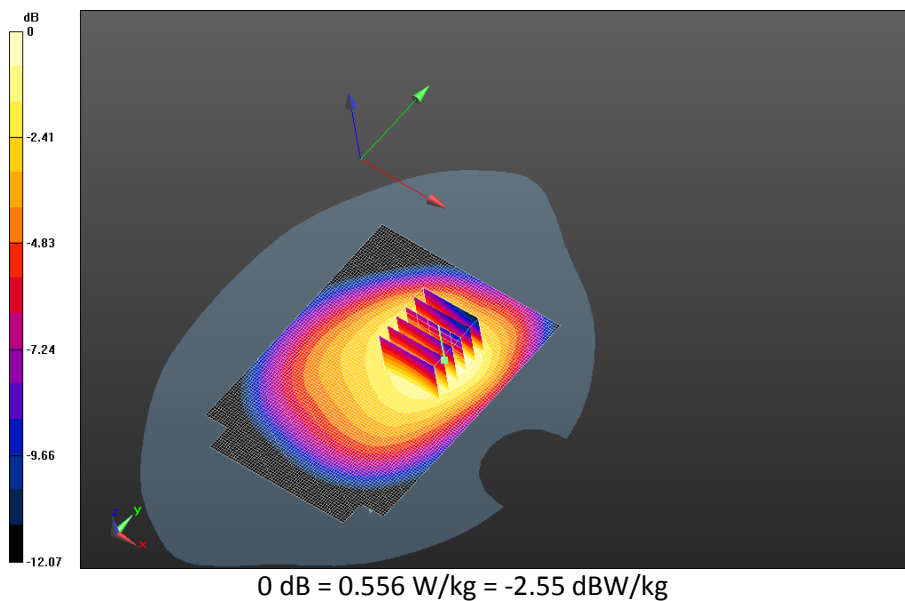

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 35(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS V/15mm Device Back - UMTS


V_chan4182_amb_temp_23.7C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 19.942 V/m; **Power Drift = -0.068 dB**

Fast SAR: SAR(1g) = 0.513 W/kg; SAR(10g) = 0.357 W/kg

Maximum value of SAR (interpolated) = 0.545 W/kg

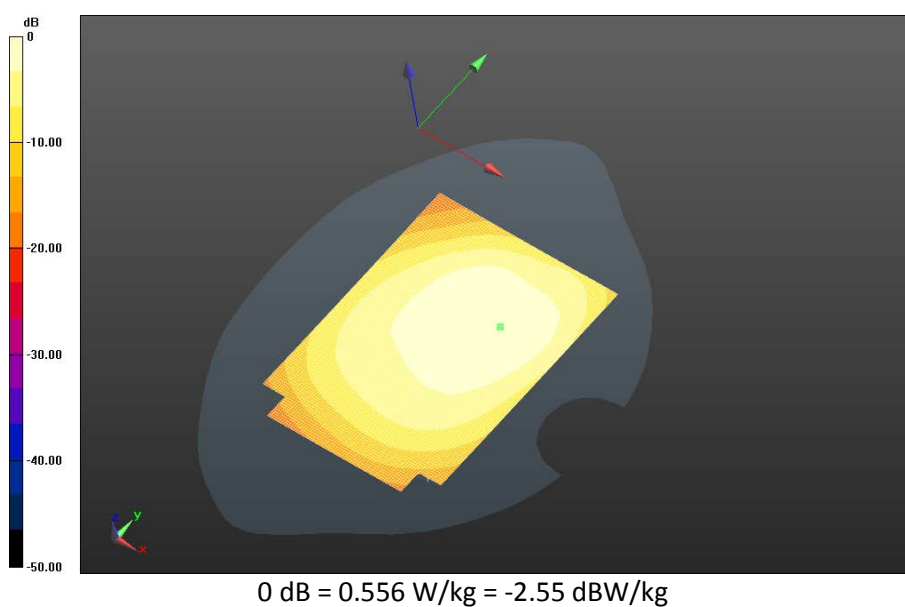

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 36(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS V/15mm Device Back - UMTS


V_chan4233_amb_temp_23.8C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 18.000 V/m; **Power Drift = 0.00997 dB**

Fast SAR: SAR(1g) = 0.466 W/kg; SAR(10g) = 0.323 W/kg

Maximum value of SAR (interpolated) = 0.496 W/kg

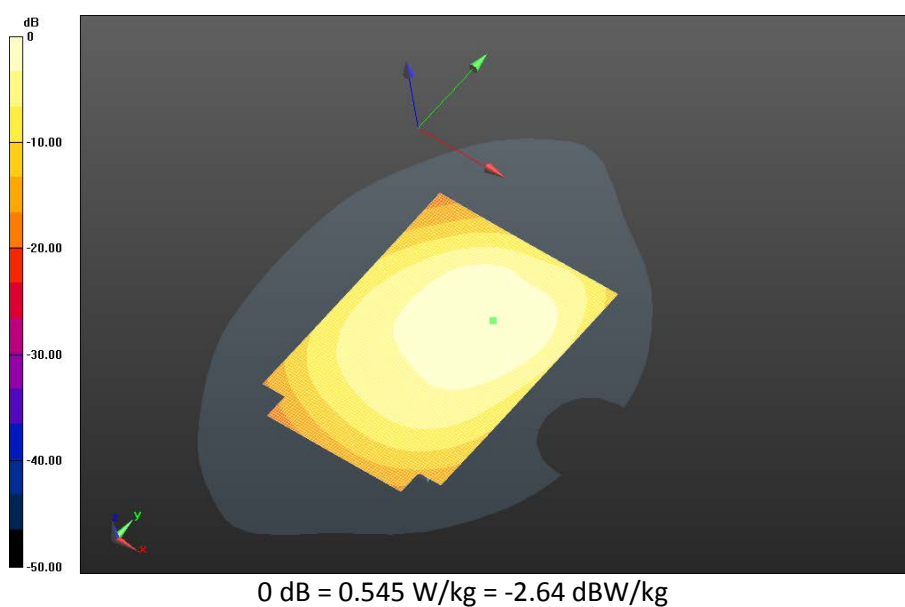

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 37(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS V/15mm Device Front - UMTS


V_chan4182_amb_temp_24.0C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 17.805 V/m; **Power Drift = -0.00679 dB**

Fast SAR: SAR(1g) = 0.465 W/kg; SAR(10g) = 0.322 W/kg

Maximum value of SAR (interpolated) = 0.496 W/kg

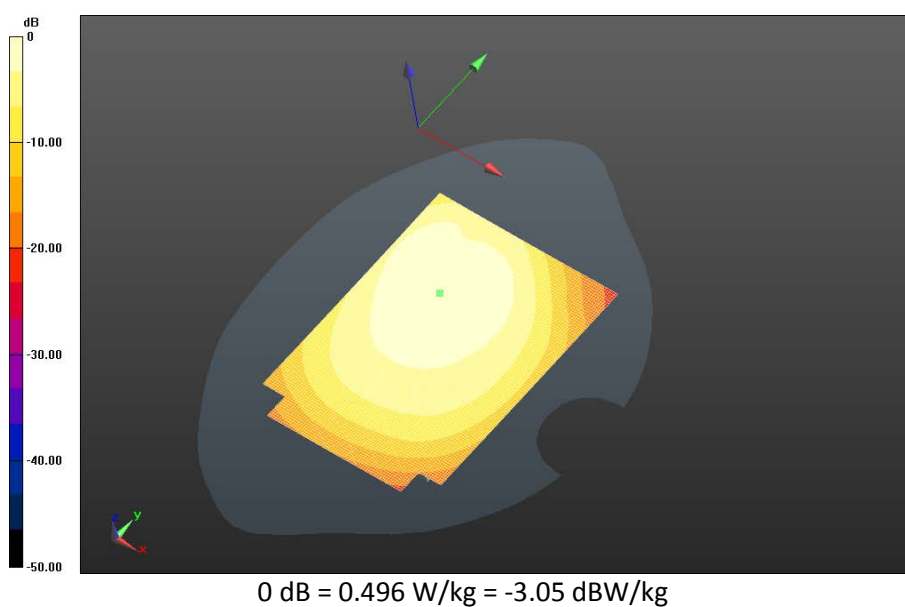

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 38(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 4

Date: 5/13/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FF3D40

Configuration: Body Worn MSL - LTE band 4

Communication System: LTE 4 (0); Communication System Band: LTE 4; Frequency: 1720 MHz

Medium Parameters used: $f=1720$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 51.474$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (4.59,4.59,4.59); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE band 4/15mm Device Back - LTE band

4_chan20050_20MHz_BW_RB1_Offset_Mid_amb_temp_23.8C_liq_temp_22.1C/Area Scan


(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.153 V/m; **Power Drift = -0.017 dB**

Fast SAR: SAR(1g) = 0.365 W/kg; SAR(10g) = 0.208 W/kg

Maximum value of SAR (interpolated) = 0.425 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 39(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

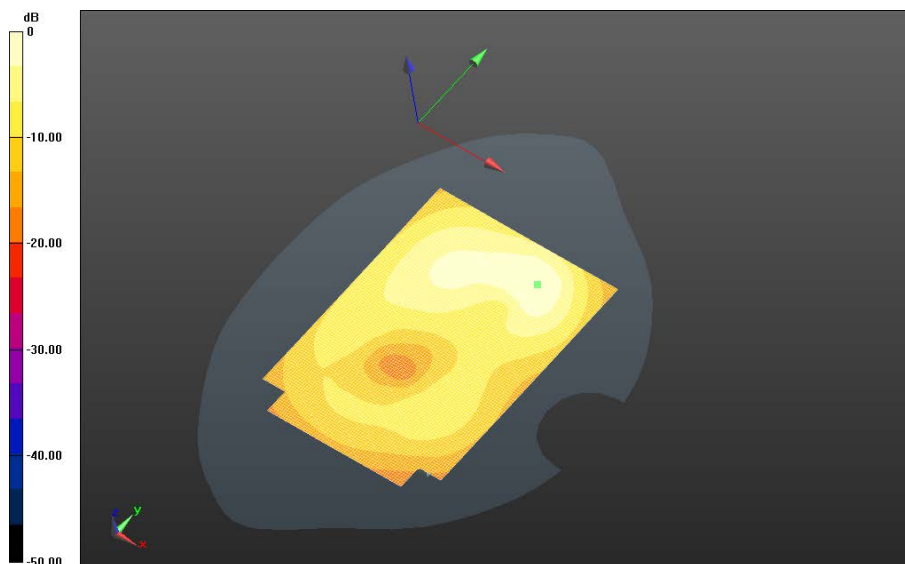

0 dB = 0.425 W/kg = -3.72 dBW/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 40(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 4/15mm Device Back - LTE band 4_chan20175_20MHz_BW_RB1_Offset_Low_amb_temp_23.8C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.291 V/m; **Power Drift = -0.116 dB**

Fast SAR: SAR(1g) = 0.387 W/kg; SAR(10g) = 0.220 W/kg
Maximum value of SAR (interpolated) = 0.451 W/kg

Body Worn MSL - LTE band 4/15mm Device Back - LTE band 4_chan20175_20MHz_BW_RB1_Offset_Low_amb_temp_23.8C_liq_temp_22.1C/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 5.291 V/m; **Power Drift = -0.116 dB**

Averaged SAR: SAR(1g) = 0.415 W/kg; SAR(10g) = 0.230 W/kg
Maximum value of SAR (interpolated) = 0.647 W/kg

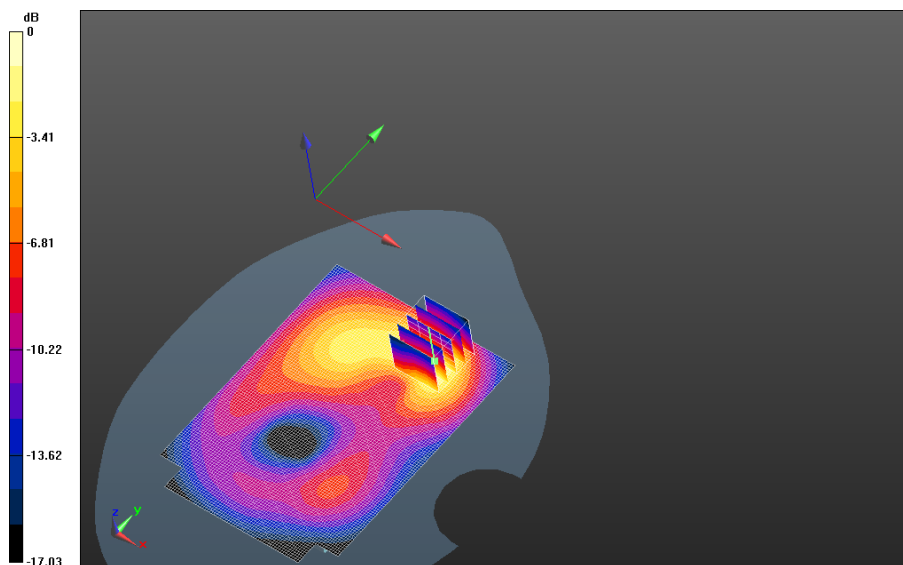


0 dB = 0.425 W/kg = -3.72 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 41(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 4/15mm Device Back - LTE band
4_chan20300_20MHz_BW_RB1_Offset_Low_amb_temp_23.8C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.132 V/m; **Power Drift = -0.059 dB**


Fast SAR: SAR(1g) = 0.373 W/kg; SAR(10g) = 0.211 W/kg
Maximum value of SAR (interpolated) = 0.439 W/kg

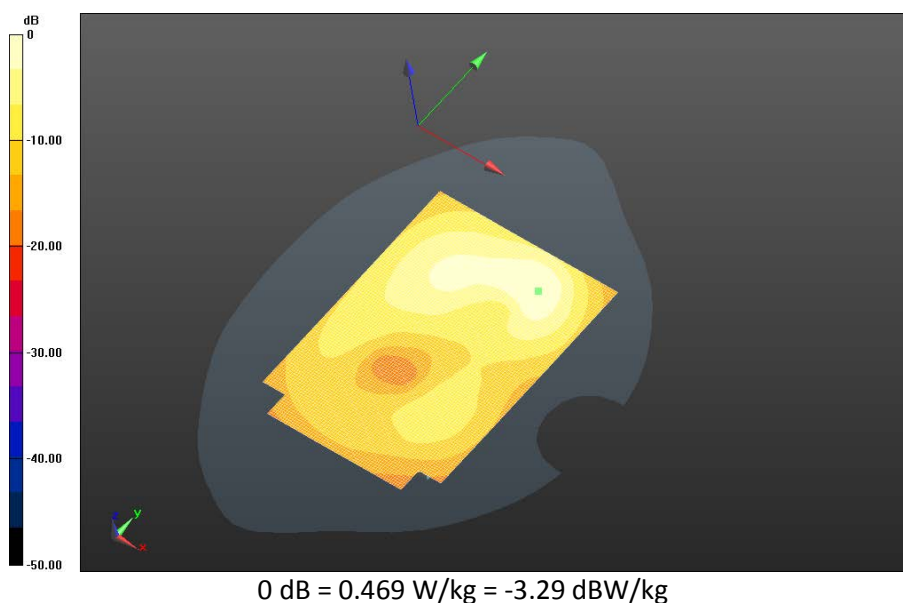

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 42(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 4/15mm Device Back - LTE band
4_chan20175_20MHz_BW_RB50_Offset_Low_amb_temp_23.8C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 4.701 V/m; **Power Drift = -0.050 dB**


Fast SAR: SAR(1g) = 0.313 W/kg; SAR(10g) = 0.177 W/kg
Maximum value of SAR (interpolated) = 0.367 W/kg

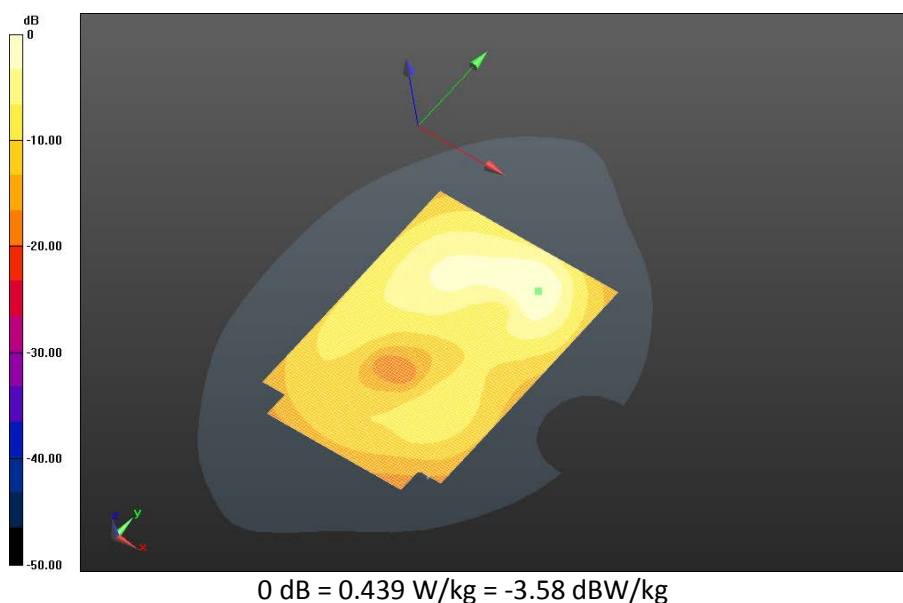

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 43(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 4/15mm Device Front - LTE band
4_chan20175_20MHz_BW_RB1_Offset_Low_amb_temp_23.6C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.151 V/m; **Power Drift = -0.037 dB**

Fast SAR: SAR(1g) = 0.156 W/kg; SAR(10g) = 0.0980 W/kg
Maximum value of SAR (interpolated) = 0.171 W/kg

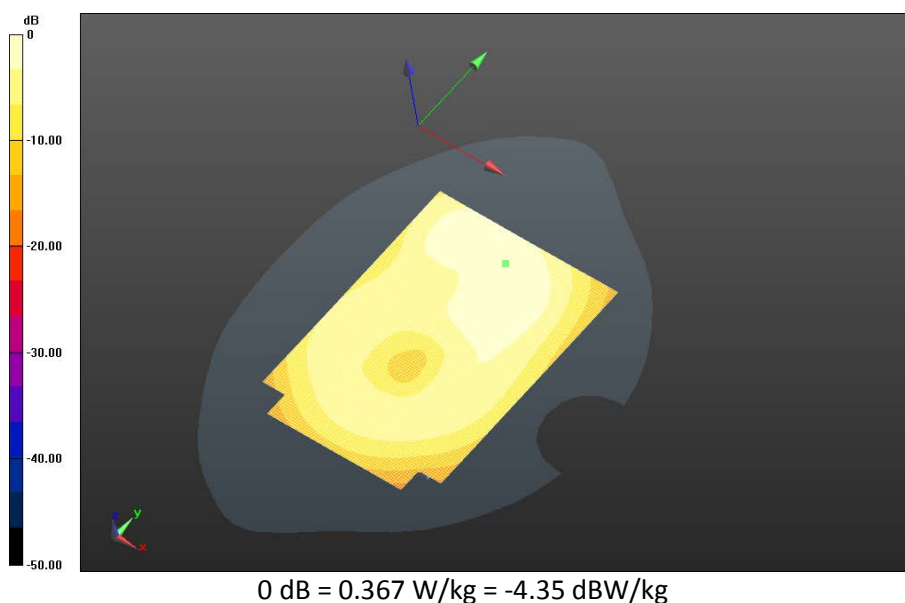

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 44(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

UMTS Band IV

Date: 5/14/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - UMTS band IV

Communication System: WCDMA FDD IV (0); Communication System Band: UMTS band IV;

Frequency: 1712.4 MHz

Medium Parameters used: $f=1712.4$ MHz; $\sigma = 1.493$ S/m; $\epsilon_r = 51.476$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (4.59,4.59,4.59); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - UMTS band IV/15mm Device Back - UMTS

IV_chan1312_amb_temp_23.4C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:


$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 7.424 V/m; **Power Drift = 0.057 dB**

Fast SAR: SAR(1g) = 0.544 W/kg; SAR(10g) = 0.296 W/kg

Maximum value of SAR (interpolated) = 0.625 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 45(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

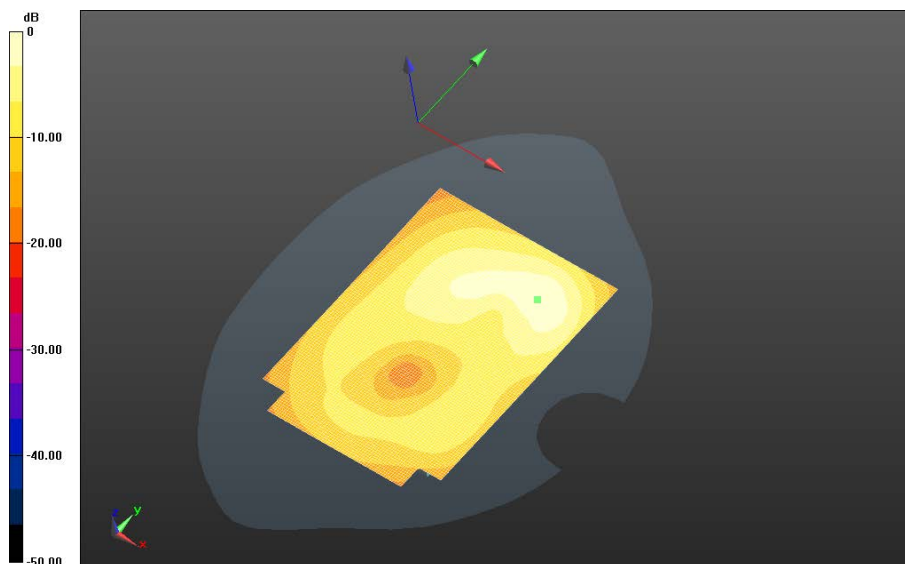

0 dB = 0.625 W/kg = -2.04 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 46(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS band IV/15m Device Back - UMTS

IV_chan1413_amb_temp_23.5C_liq_temp_22.3C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 7.771 V/m; **Power Drift = -0.087 dB**

Fast SAR: SAR(1g) = 0.553 W/kg; SAR(10g) = 0.300 W/kg

Maximum value of SAR (interpolated) = 0.634 W/kg

Body Worn MSL - UMTS band IV/15m Device Back - UMTS


IV_chan1413_amb_temp_23.5C_liq_temp_22.3C/Zoom Scan (21x21x36)/Cube 0: Interpolated

grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 7.771 V/m; **Power Drift = -0.087 dB**

Averaged SAR: SAR(1g) = 0.571 W/kg; SAR(10g) = 0.317 W/kg

Maximum value of SAR (interpolated) = 0.884 W/kg

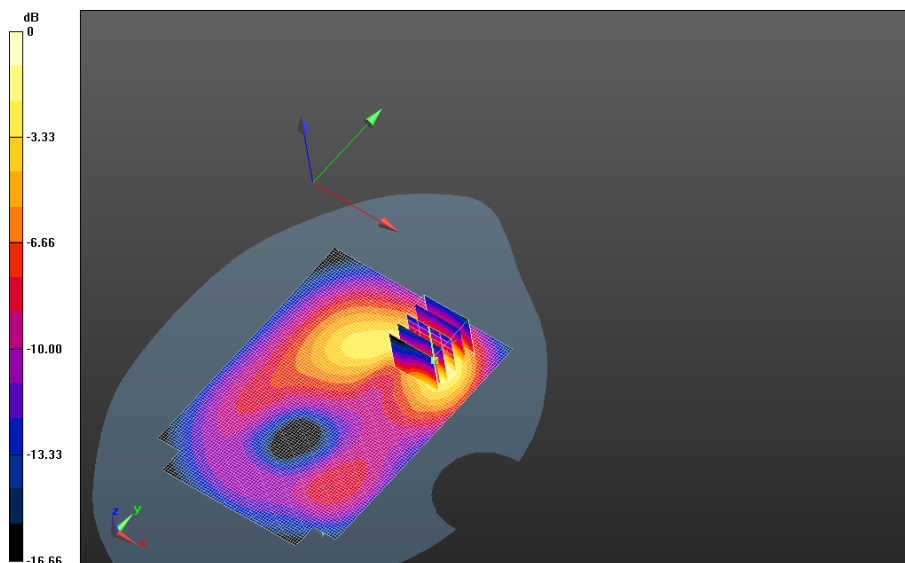

0 dB = 0.625 W/kg = -2.04 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 47(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS band IV/15mm Device Back - UMTS


IV_chan1513_amb_temp_23.7C_liq_temp_22.3C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 6.975 V/m; **Power Drift = 0.052 dB**

Fast SAR: SAR(1g) = 0.462 W/kg; SAR(10g) = 0.247 W/kg

Maximum value of SAR (interpolated) = 0.533 W/kg

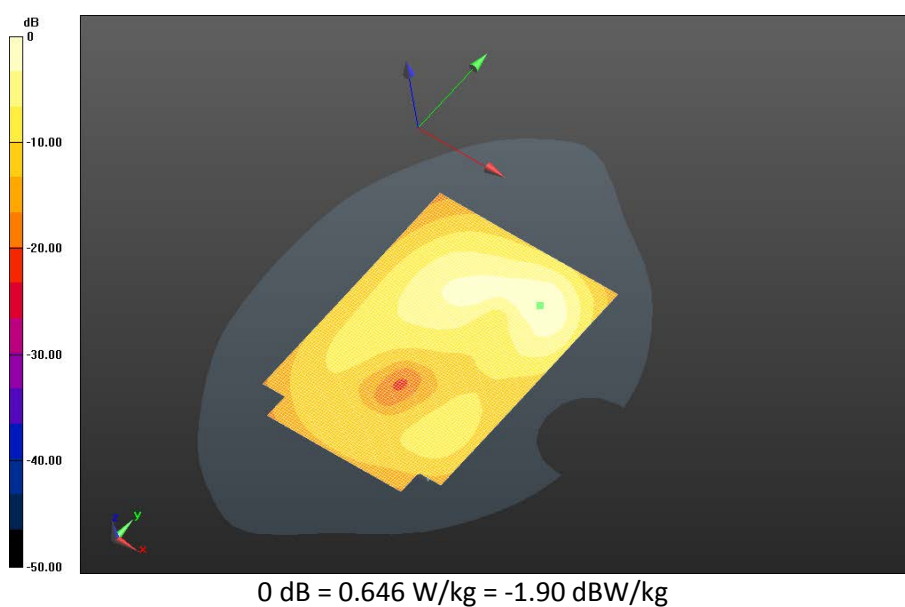

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 48(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS band IV/15m Device Front - UMTS


IV_chan1413_amb_temp_23.8C_liq_temp_22.3C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 7.298 V/m; **Power Drift = 0.011 dB**

Fast SAR: SAR(1g) = 0.240 W/kg; SAR(10g) = 0.148 W/kg

Maximum value of SAR (interpolated) = 0.266 W/kg

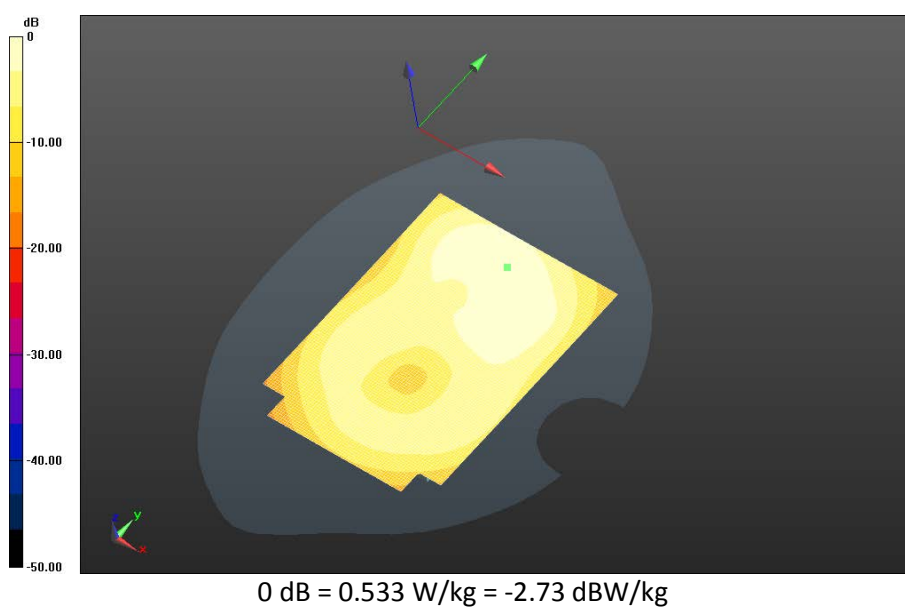

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 49(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 2

Date: 4/28/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - LTE band 2

Communication System: LTE 2 (0); Communication System Band: LTE Band 2; Frequency: 1860 MHz

Medium Parameters used: $f=1860$ MHz; $\sigma = 1.481$ S/m; $\epsilon_r = 51.563$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (4.59,4.59,4.59); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE band 2/15mm Device Back - LTE band

2_chan18700_20MHz_BW_RB1_Offset_Mid_amb_temp_23.8C_liq_temp_22.1C/Area Scan

(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.162 V/m; **Power Drift = 0.031 dB**

Fast SAR: SAR(1g) = 0.517 W/kg; SAR(10g) = 0.277 W/kg

Maximum value of SAR (interpolated) = 0.615 W/kg

Body Worn MSL - LTE band 2/15mm Device Back - LTE band

2_chan18700_20MHz_BW_RB1_Offset_Mid_amb_temp_23.8C_liq_temp_22.1C/Zoom Scan


(21x21x36)/Cube 0: Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 5.162 V/m; **Power Drift = 0.031 dB**

Averaged SAR: SAR(1g) = 0.572 W/kg; SAR(10g) = 0.313 W/kg

Maximum value of SAR (interpolated) = 0.898 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 50(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

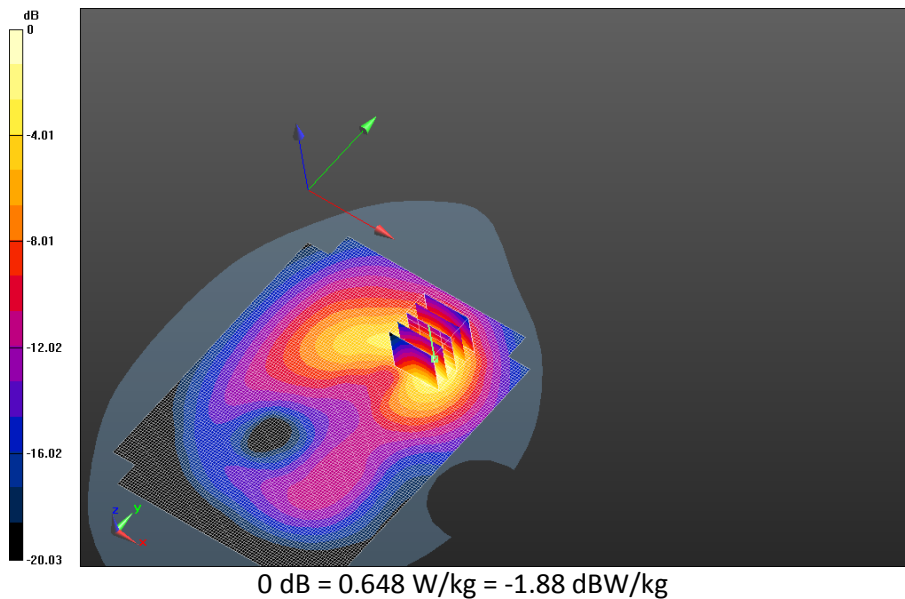

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 51(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 2/15mm Device Back - LTE band
2_chan18900_20MHz_BW_RB1_Offset_Mid_amb_temp_23.8C_liq_temp_22.1C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 5.195 V/m; **Power Drift = -0.00965 dB**


Fast SAR: SAR(1g) = 0.505 W/kg; SAR(10g) = 0.271 W/kg
Maximum value of SAR (interpolated) = 0.607 W/kg

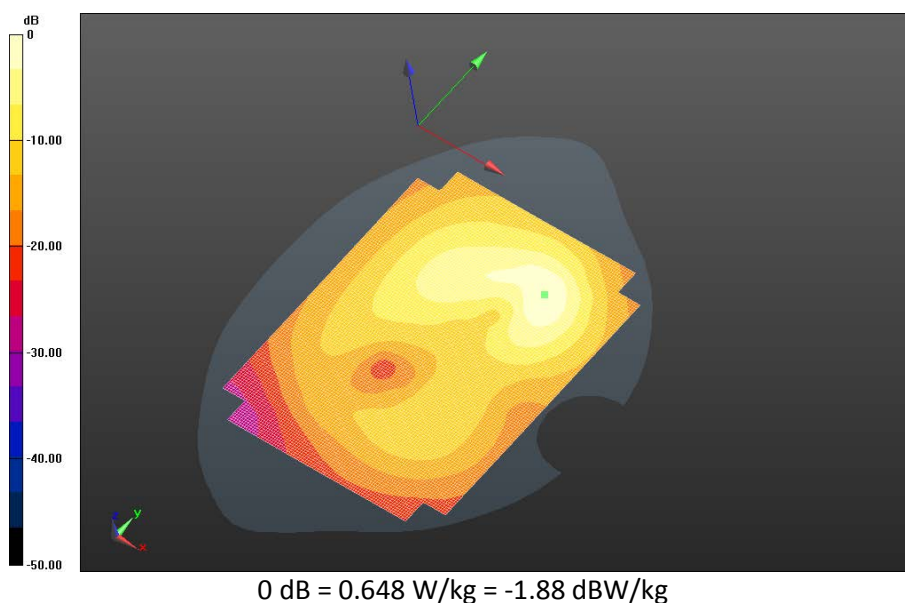

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 52(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 2/15mm Device Back - LTE band
2_chan19100_20MHz_BW_RB1_Offset_Low_amb_temp_23.8C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 4.889 V/m; **Power Drift = -0.021 dB**


Fast SAR: SAR(1g) = 0.439 W/kg; SAR(10g) = 0.234 W/kg
Maximum value of SAR (interpolated) = 0.530 W/kg

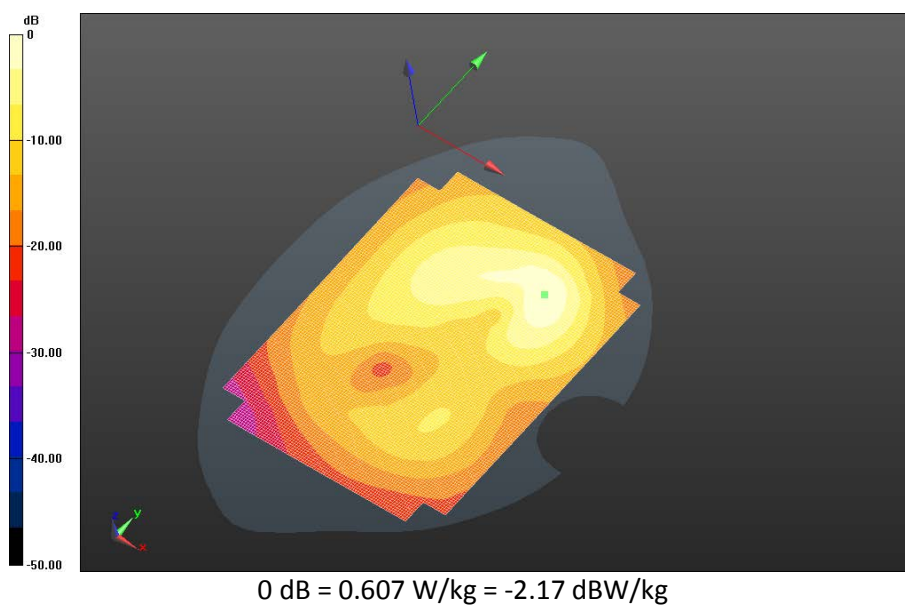

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 53(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE band 2/15mm Device Front - LTE band
2_chan18900_20MHz_BW_RB1_Offset_Mid_amb_temp_23.6C_liq_temp_22.0C/Area Scan
(121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Reference Value = 4.793 V/m; **Power Drift = -0.042 dB**

Fast SAR: SAR(1g) = 0.128 W/kg; SAR(10g) = 0.0778 W/kg
Maximum value of SAR (interpolated) = 0.143 W/kg

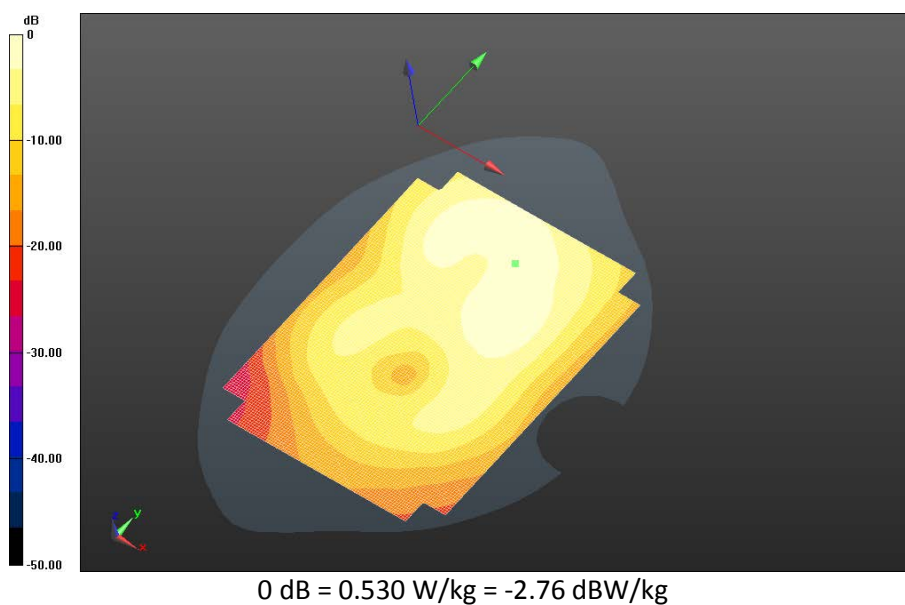

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 54(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

GPRS 1900

Date: 5/30/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF46F9

Configuration: Body Worn MSL - GPRS 1900

Communication System: GSM 1900 (0); Communication System Band: GSM 1900; Frequency: 1880 MHz

Medium Parameters used: $f=1880$ MHz; $\sigma = 1.552$ S/m; $\epsilon_r = 52.740$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (4.59,4.59,4.59); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - GPRS 1900/15mm Device Back -GSM 1900_1-

slot_chan661_amb_temp_23.7C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:


dx=1.500 mm, dy=1.500 mm

Reference Value = 3.457 V/m; **Power Drift = -0.066 dB**

Fast SAR: SAR(1g) = 0.244 W/kg; SAR(10g) = 0.135 W/kg

Maximum value of SAR (interpolated) = 0.278 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 55(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

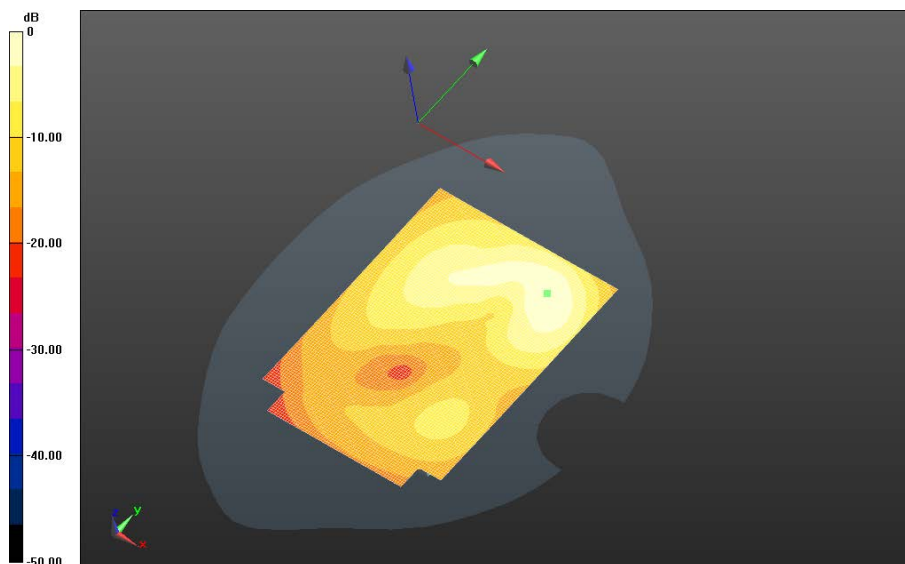


0 dB = 0.278 W/kg = -5.56 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 56(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_2-
slot_chan512_amb_temp_23.9C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 4.119 V/m; **Power Drift = -0.025 dB**


Fast SAR: SAR(1g) = 0.313 W/kg; SAR(10g) = 0.174 W/kg
Maximum value of SAR (interpolated) = 0.354 W/kg

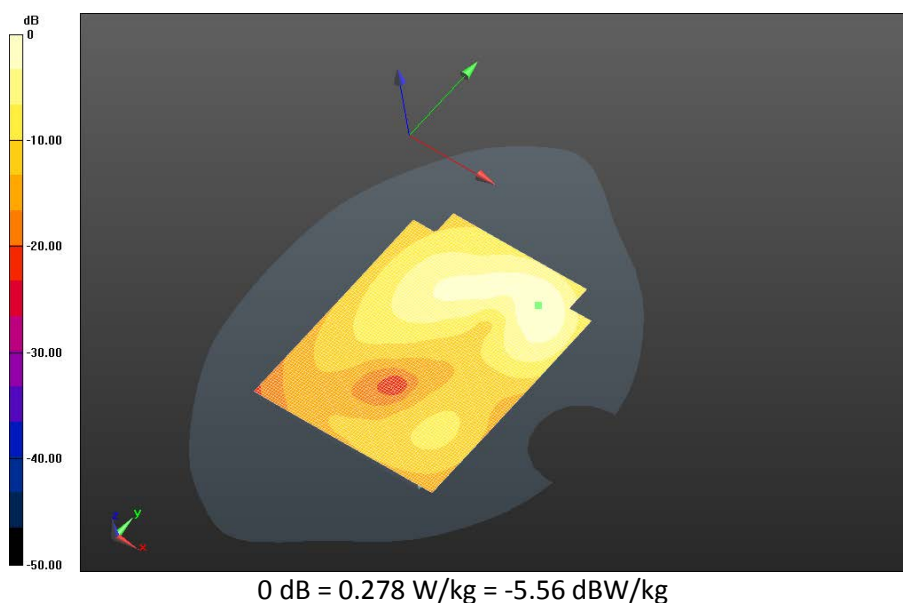

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 57(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_2-
slot_chan661_amb_temp_24.0C_liq_temp_22.2C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 4.075 V/m; **Power Drift = -0.160 dB**

Fast SAR: SAR(1g) = 0.338 W/kg; SAR(10g) = 0.188 W/kg
Maximum value of SAR (interpolated) = 0.382 W/kg

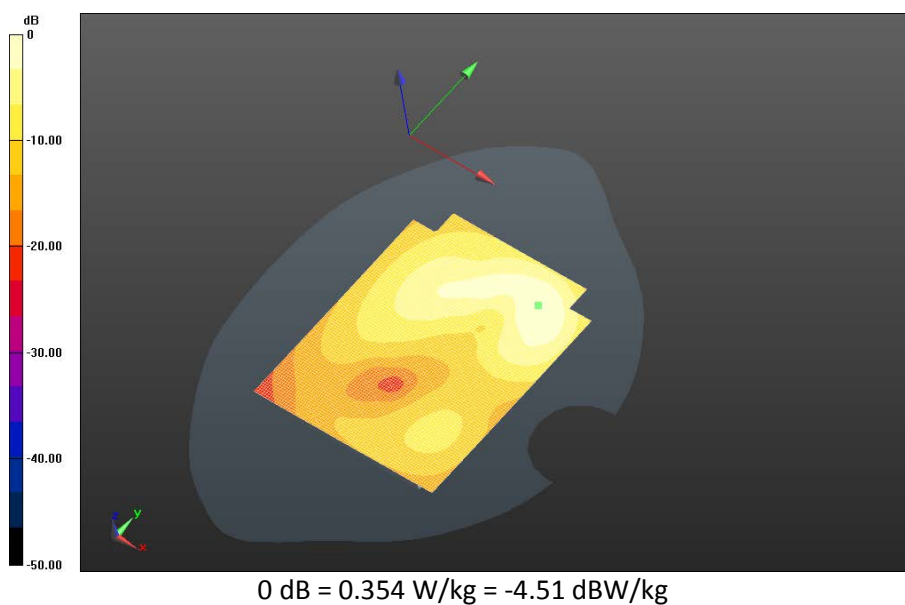


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 58(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_2-slots_chan810_amb_temp_23.5C_liq_temp_22.0C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 3.798 V/m; **Power Drift = 0.193 dB**

Fast SAR: SAR(1g) = 0.358 W/kg; SAR(10g) = 0.199 W/kg
Maximum value of SAR (interpolated) = 0.404 W/kg

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_2-slots_chan810_amb_temp_23.5C_liq_temp_22.0C/Zoom Scan (26x26x36)/Cube 0:
Interpolated grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm
Reference Value = 3.798 V/m; **Power Drift = 0.193 dB**


Averaged SAR: SAR(1g) = 0.394 W/kg; SAR(10g) = 0.218 W/kg
Maximum value of SAR (interpolated) = 0.630 W/kg

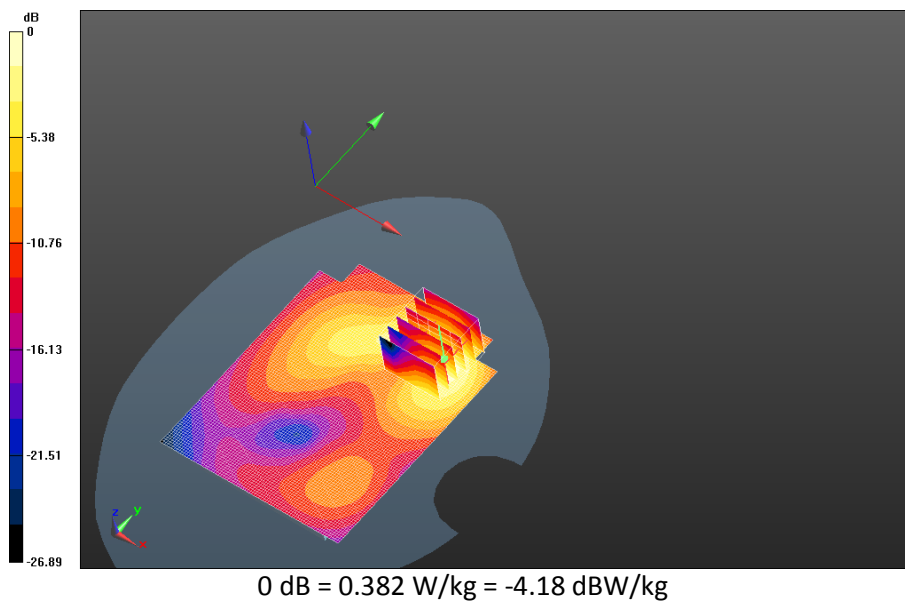

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 59(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_3-
slot_chan661_amb_temp_23.7C_liq_temp_22.1C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 3.544 V/m; **Power Drift = -0.068 dB**


Fast SAR: SAR(1g) = 0.255 W/kg; SAR(10g) = 0.141 W/kg
Maximum value of SAR (interpolated) = 0.291 W/kg

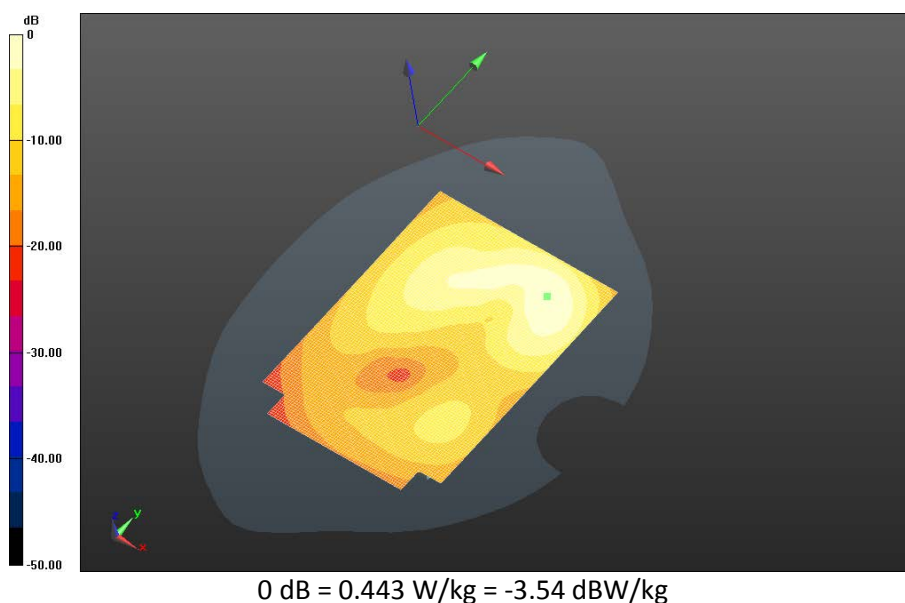

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 60(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - GPRS 1900/15mm Device Back -GPRS 1900_4-
slot_chan661_amb_temp_23.9C_liq_temp_22.3C/Area Scan (121x171x1): Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 3.762 V/m; **Power Drift = 0.138 dB**


Fast SAR: SAR(1g) = 0.288 W/kg; SAR(10g) = 0.160 W/kg
Maximum value of SAR (interpolated) = 0.325 W/kg

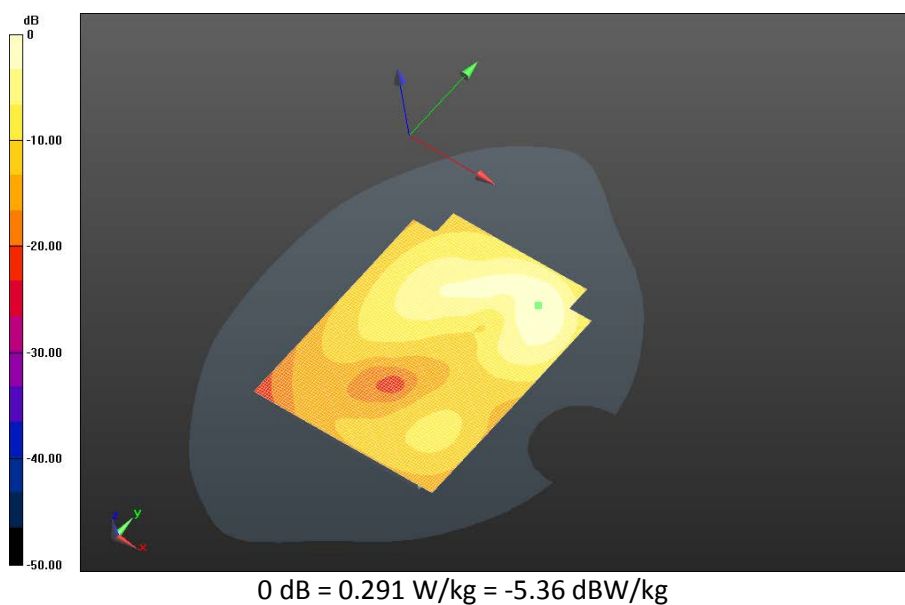

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 61(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

**Body Worn MSL - GPRS 1900/15mm Device Front -GPRS 1900_2-
slot_chan661_amb_temp_23.5C_liq_temp_22.0C/Area Scan (121x171x1):** Interpolated grid:
dx=1.500 mm, dy=1.500 mm
Reference Value = 3.989 V/m; **Power Drift = -0.096 dB**

Fast SAR: SAR(1g) = 0.121 W/kg; SAR(10g) = 0.0713 W/kg
Maximum value of SAR (interpolated) = 0.135 W/kg

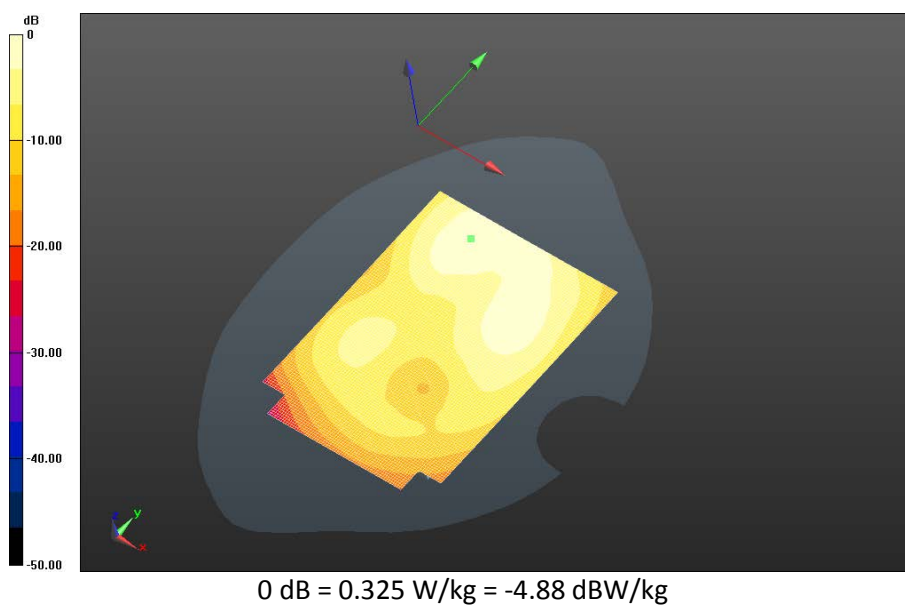

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 62(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

UMTS Band II

Date: 4/25/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - UMTS II

Communication System: WCDMA FDD II (0); Communication System Band: UMTS FDD II;

Frequency: 1852.4 MHz

Medium Parameters used: $f=1852.4$ MHz; $\sigma = 1.473$ S/m; $\epsilon_r = 51.590$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ET3DV6 - SN1643; ConvF: (4.59,4.59,4.59); Calibrated: 3/10/2014;
- Sensor-Surface: 4 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - UMTS II/15mm Device Back - UMTS

II_chan9262_amb_temp_24.1C_liq_temp_21.1C/Area Scan (121x171x1): Interpolated grid:


$dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 3.915 V/m; **Power Drift = -0.034 dB**

Fast SAR: SAR(1g) = 0.403 W/kg; SAR(10g) = 0.214 W/kg

Maximum value of SAR (interpolated) = 0.468 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 63(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

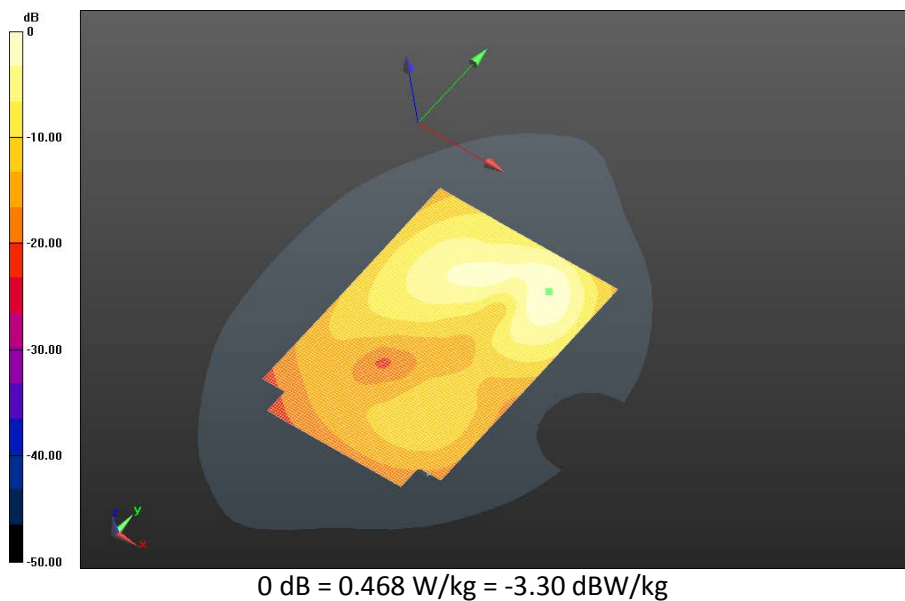

	Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report			Page 64(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS II/15mm Device Back - UMTS

II_chan9400_amb_temp_24.0C_liq_temp_21.1C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 4.342 V/m; **Power Drift = -0.027 dB**

Fast SAR: SAR(1g) = 0.589 W/kg; SAR(10g) = 0.304 W/kg

Maximum value of SAR (interpolated) = 0.728 W/kg

Body Worn MSL - UMTS II/15mm Device Back - UMTS


II_chan9400_amb_temp_24.0C_liq_temp_21.1C/Zoom Scan (21x21x36)/Cube 0: Interpolated

grid: dx=1.500 mm, dy=1.500 mm, dz=1.000 mm

Reference Value = 4.342 V/m; **Power Drift = -0.027 dB**

Averaged SAR: SAR(1g) = 0.652 W/kg; SAR(10g) = 0.348 W/kg

Maximum value of SAR (interpolated) = 1.05 W/kg

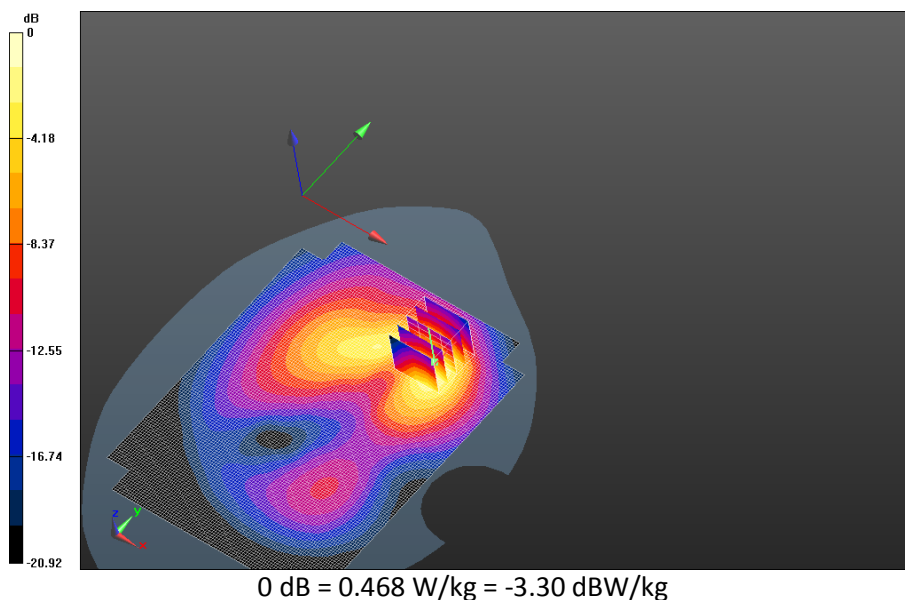

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 65(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS II/15mm Device Back - UMTS


II_chan9538_amb_temp_24.1C_liq_temp_21.1C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 3.383 V/m; **Power Drift = -0.025 dB**

Fast SAR: SAR(1g) = 0.365 W/kg; SAR(10g) = 0.198 W/kg

Maximum value of SAR (interpolated) = 0.428 W/kg

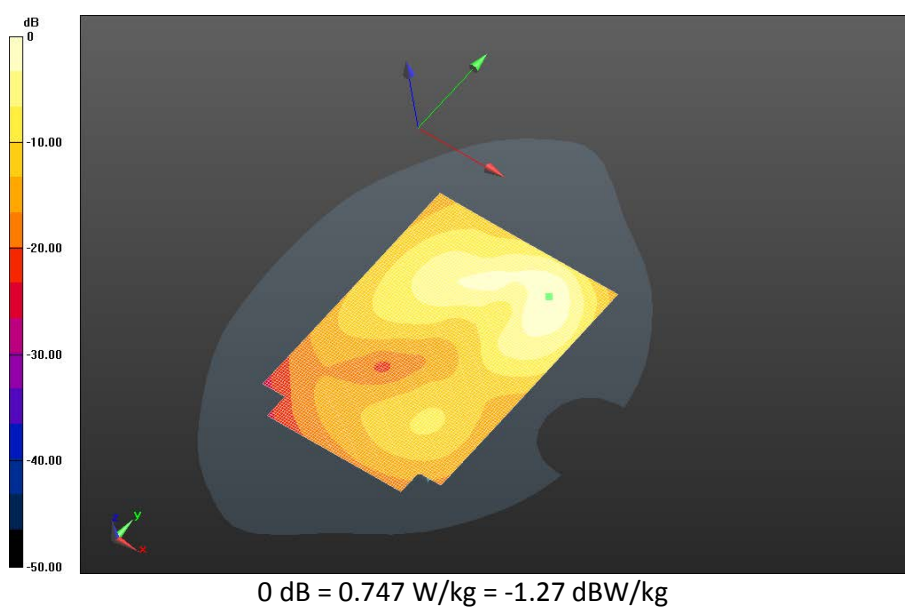

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 66(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - UMTS II/15mm Device Front - UMTS


II_chan9400_amb_temp_24.0C_liq_temp_21.1C/Area Scan (121x171x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Reference Value = 4.879 V/m; **Power Drift = -0.026 dB**

Fast SAR: SAR(1g) = 0.164 W/kg; SAR(10g) = 0.0944 W/kg

Maximum value of SAR (interpolated) = 0.187 W/kg

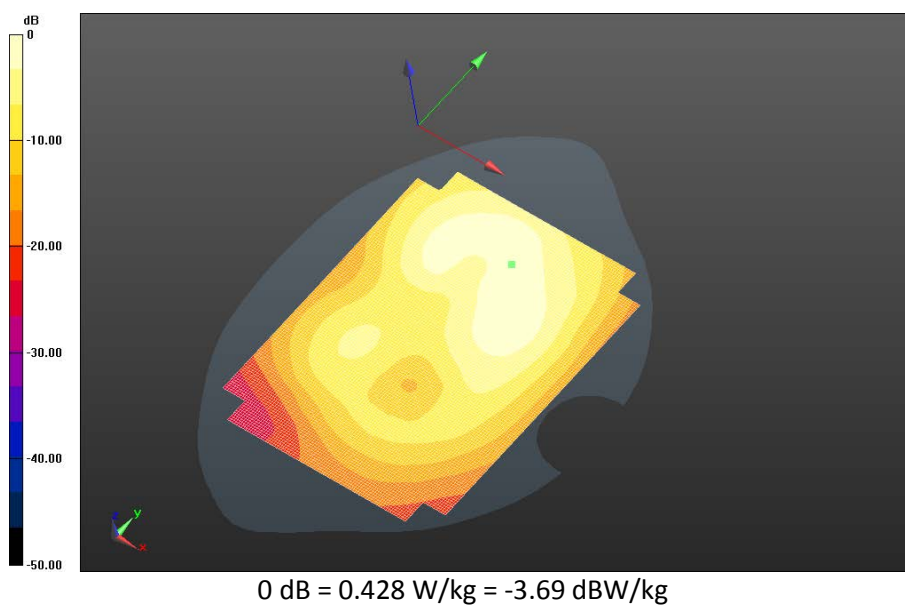

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 67(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

802.11b

Date: 5/20/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FF3D40

Configuration: Body Worn MSL - 802.11b

Communication System: 802.11 b (2450); Communication System Band: 802.11 b; Frequency: 2437 MHz

Medium Parameters used: $f=2437$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 50.931$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.28,4.28,4.28); Calibrated: 1/22/2014;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.9C_liq_temp_22.0C/Area Scan (151x201x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Body Worn MSL - 802.11b/15mm Device Back -

802.11b_chan6_amb_temp_23.9C_liq_temp_22.0C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 4.473 V/m; **Power Drift = 0.075 dB**

Averaged SAR: SAR(1g) = 0.113 W/kg; SAR(10g) = 0.0602 W/kg

Maximum value of SAR (interpolated) = 0.212 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 68(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

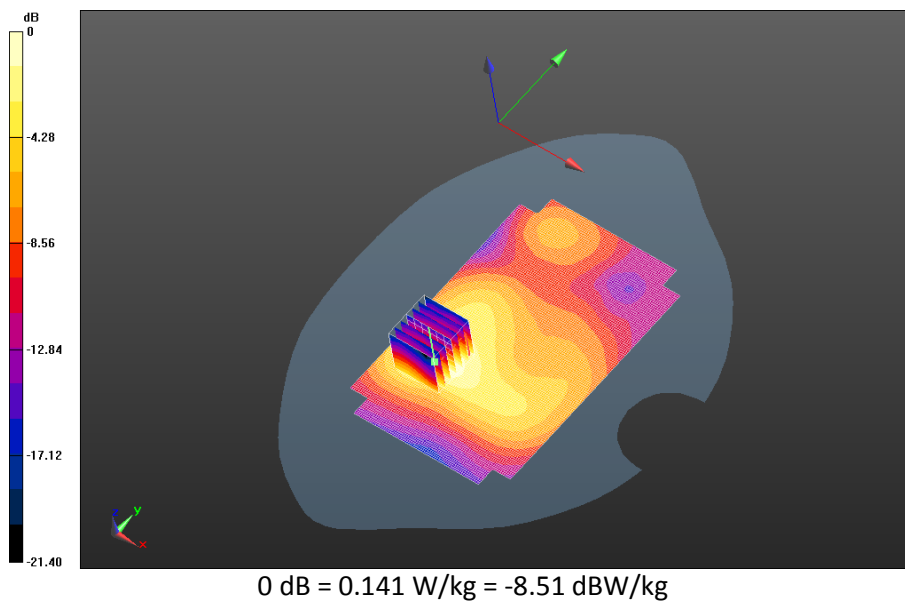

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 69(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11b/15mm Device Back -

802.11g_chan6_amb_temp_23.3C_liq_temp_22.0C/Area Scan (151x201x1): Interpolated grid:
dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.200 W/kg

Body Worn MSL - 802.11b/15mm Device Back -


802.11g_chan6_amb_temp_23.3C_liq_temp_22.0C/Zoom Scan (31x31x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 4.514 V/m; **Power Drift = -0.042 dB**

Averaged SAR: SAR(1g) = 0.153 W/kg; SAR(10g) = 0.0807 W/kg

Maximum value of SAR (interpolated) = 0.292 W/kg

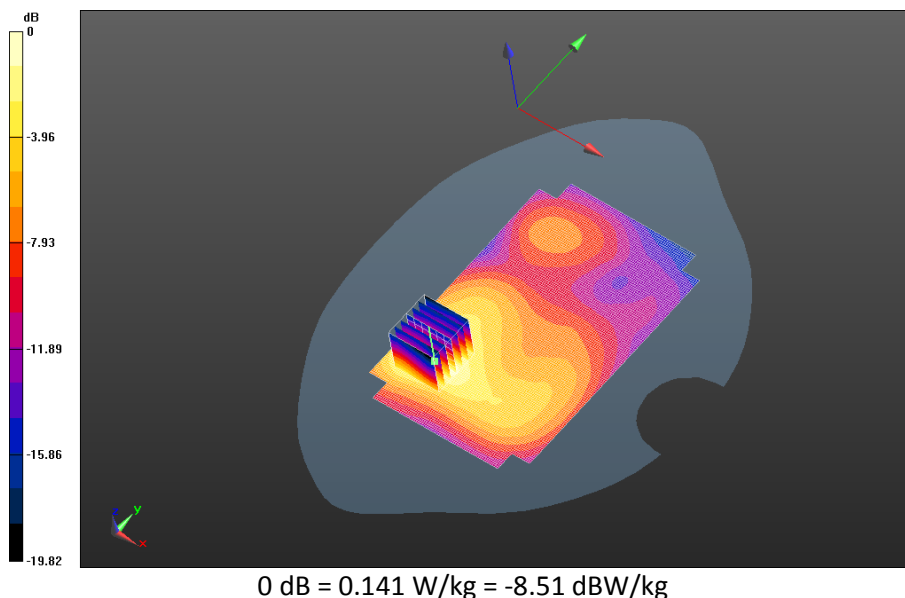

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 70(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11b/15mm Device Front -

802.11b_chan6_amb_temp_23.9C_liq_temp_21.9C/Area Scan (151x201x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0254 W/kg

Body Worn MSL - 802.11b/15mm Device Front -


802.11b_chan6_amb_temp_23.9C_liq_temp_21.9C/Zoom Scan (31x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 2.338 V/m; **Power Drift = -0.121 dB**

Averaged SAR: SAR(1g) = 0.0203 W/kg; SAR(10g) = 0.0115 W/kg

Maximum value of SAR (interpolated) = 0.0393 W/kg

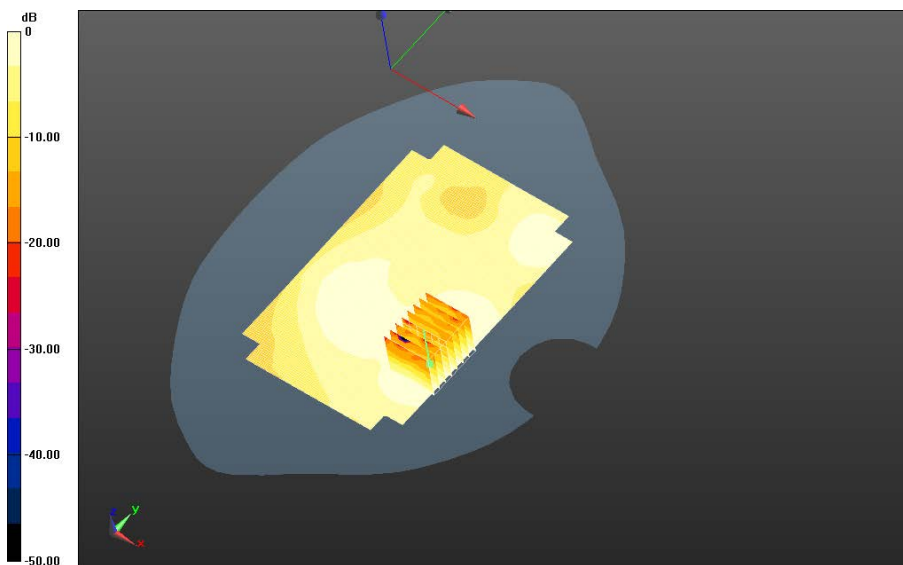

0 dB = 0.193 W/kg = -7.14 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 71(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Bluetooth

Date: 5/20/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - BT

Communication System: Bluetooth (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 2441 MHz

Medium Parameters used: $f=2441$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 50.918$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.28,4.28,4.28); Calibrated: 1/22/2014;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - BT/15mm Device Back -

Bluetooth_chan39_amb_temp_24.3C_liq_temp_22.2C/Area Scan (151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0173 W/kg

Body Worn MSL - BT/15mm Device Back -

Bluetooth_chan39_amb_temp_24.3C_liq_temp_22.2C/Zoom Scan (31x31x36)/Cube 0:


Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.286 V/m; **Power Drift = 0.013 dB**

Averaged SAR: SAR(1g) = 0.0140 W/kg; SAR(10g) = 0.00739 W/kg

Maximum value of SAR (interpolated) = 0.0268 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 72(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

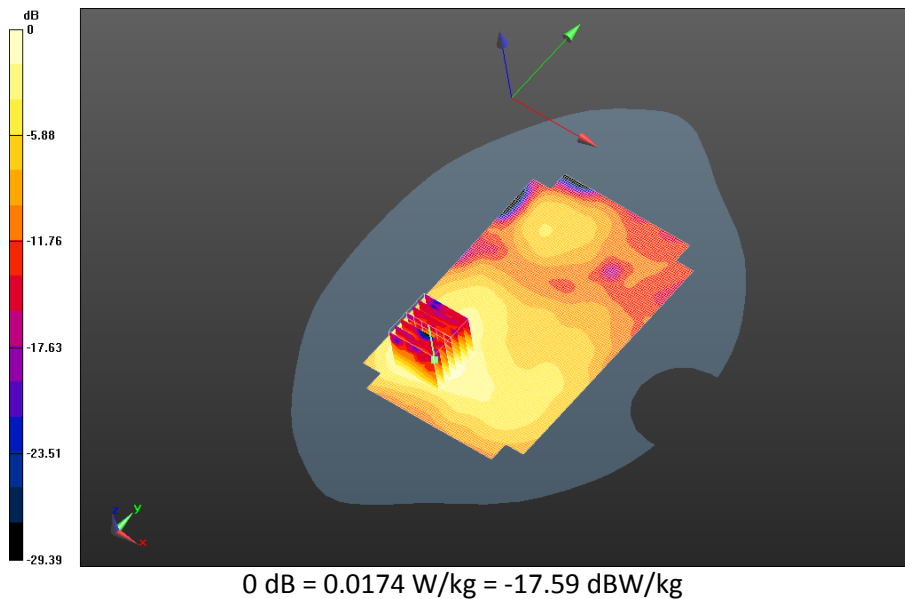

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 73(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - BT/15mm Device Front -

Bluetooth_chan39_amb_temp_24.2C_liq_temp_22.2C/Area Scan (151x201x1): Interpolated
grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.00364 W/kg

Body Worn MSL - BT/15mm Device Front -


Bluetooth_chan39_amb_temp_24.2C_liq_temp_22.2C/Zoom Scan (36x36x36)/Cube 0:

Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 0.861 V/m; **Power Drift = -0.109 dB**

Averaged SAR: SAR(1g) = 0.00152 W/kg; SAR(10g) = 0.000661 W/kg

Maximum value of SAR (interpolated) = 0.00814 W/kg

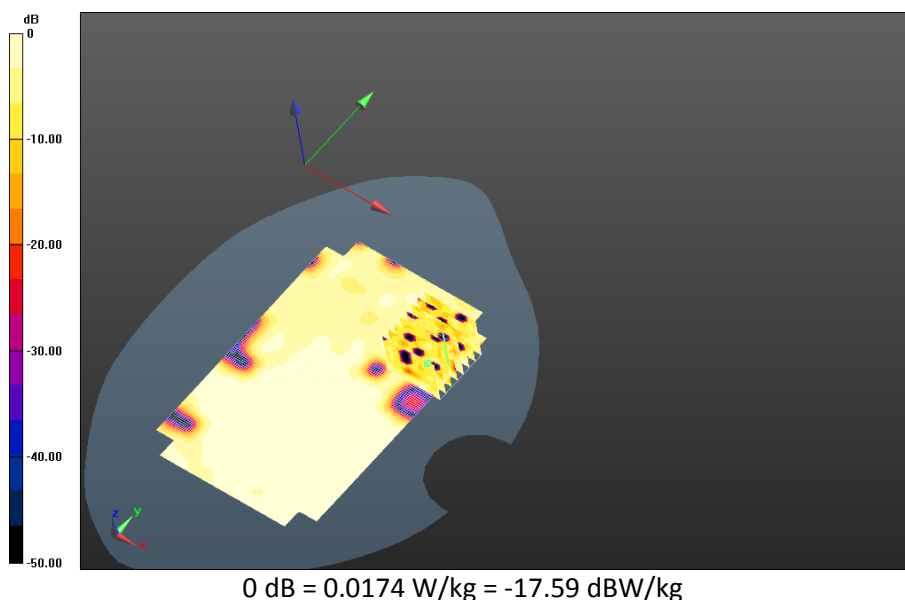

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 74(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 7

Date: 5/22/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - LTE 7 FCC

Communication System: LTE 7 (0); Communication System Band: LTE band 7; Frequency: 2510 MHz

Medium Parameters used: $f=2510$ MHz; $\sigma = 2.092$ S/m; $\epsilon_r = 50.621$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.03,4.03,4.03); Calibrated: 1/22/2014;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE 7 FCC/15mm Device Back - LTE band

7_chan20850_20MHz_BW_RB1_Offset_Mid_amb_temp_23.9C_liq_temp_22.0C/Area Scan

(151x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 1.397 V/m; **Power Drift = -0.117 dB**

Fast SAR: SAR(1g) = 0.481 W/kg; SAR(10g) = 0.238 W/kg

Maximum value of SAR (interpolated) = 0.645 W/kg

Body Worn MSL - LTE 7 FCC/15mm Device Back - LTE band

7_chan20850_20MHz_BW_RB1_Offset_Mid_amb_temp_23.9C_liq_temp_22.0C/Zoom Scan


(36x41x36)/Cube 0: Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm, $dz=1.000$ mm

Reference Value = 1.397 V/m; **Power Drift = -0.117 dB**

Averaged SAR: SAR(1g) = 0.480 W/kg; SAR(10g) = 0.236 W/kg

Maximum value of SAR (interpolated) = 0.980 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 75(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

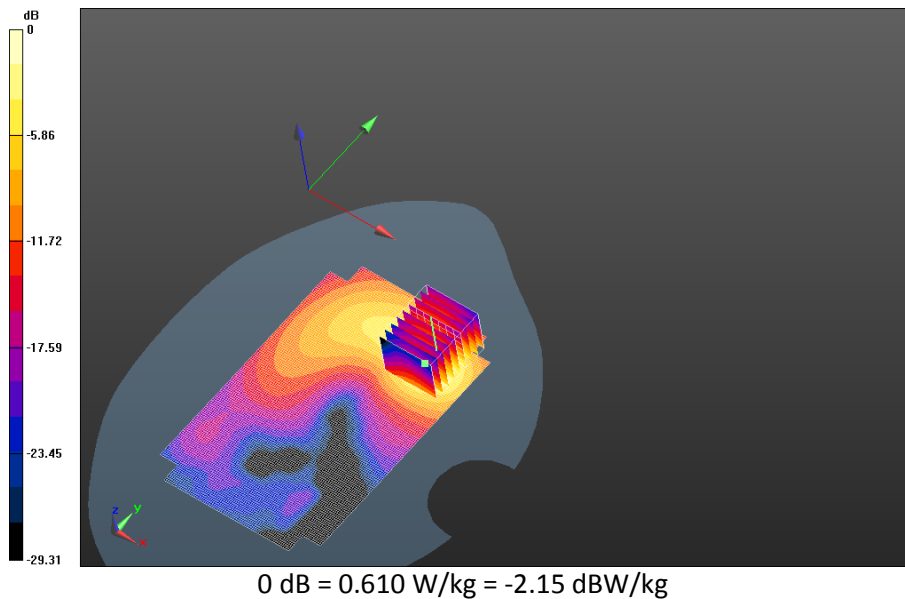

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 76(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC/15mm Device Back - LTE band


7_chan21100_20MHz_BW_RB1_Offset_Mid_amb_temp_24.0C_liq_temp_22.0C/Area Scan

(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.256 V/m; **Power Drift = 0.163 dB**

Fast SAR: SAR(1g) = 0.453 W/kg; SAR(10g) = 0.223 W/kg

Maximum value of SAR (interpolated) = 0.606 W/kg

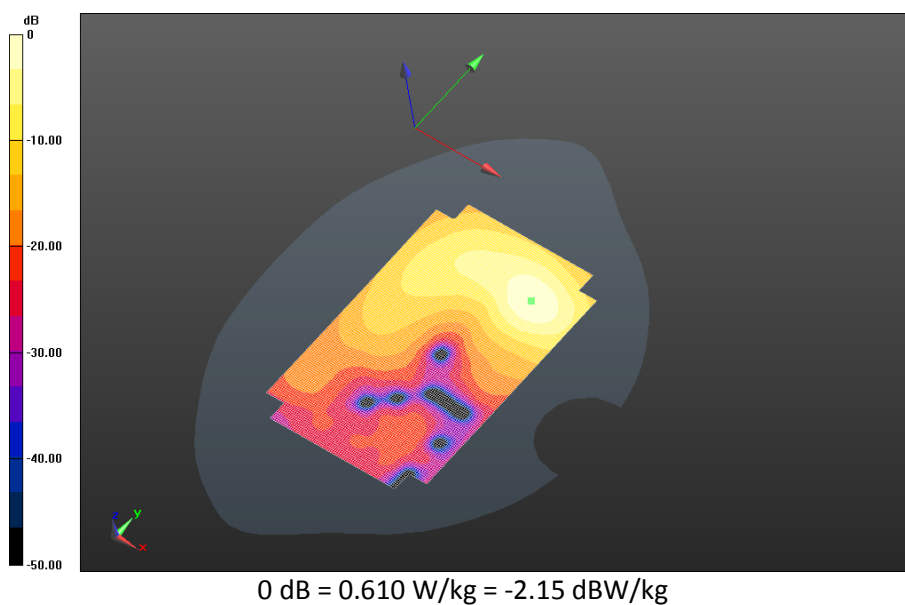

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 77(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC/15mm Device Back - LTE band


7_chan21350_20MHz_BW_RB1_Offset_Mid_amb_temp_23.9C_liq_temp_21.9C/Area Scan

(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.276 V/m; **Power Drift = -0.174 dB**

Fast SAR: SAR(1g) = 0.422 W/kg; SAR(10g) = 0.205 W/kg

Maximum value of SAR (interpolated) = 0.555 W/kg

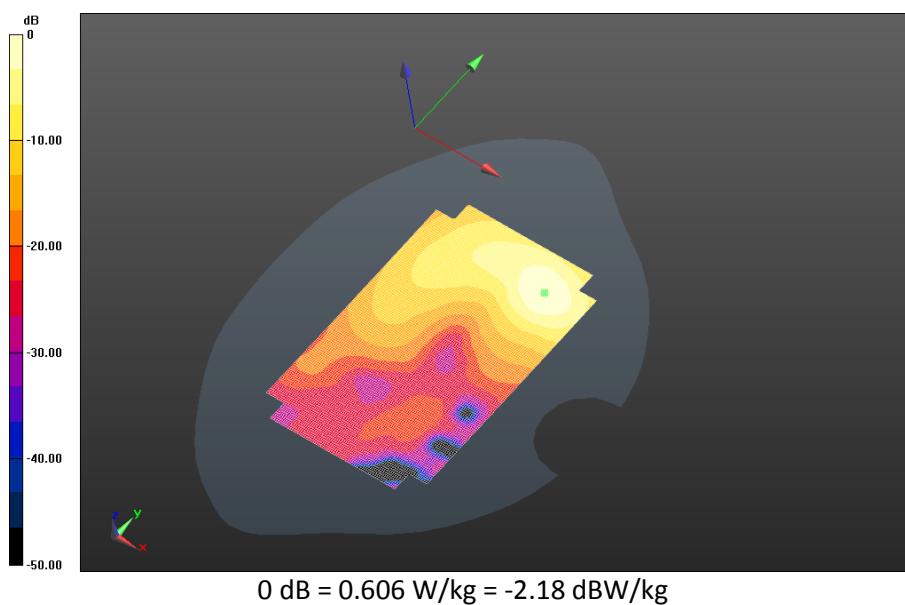

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 78(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC/15mm Device Back - LTE band


7_chan20850_20MHz_BW_RB50_Offset_High_amb_temp_24.0C_liq_temp_22.0C/Area Scan

(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.105 V/m; **Power Drift = 0.179 dB**

Fast SAR: SAR(1g) = 0.228 W/kg; SAR(10g) = 0.112 W/kg

Maximum value of SAR (interpolated) = 0.298 W/kg

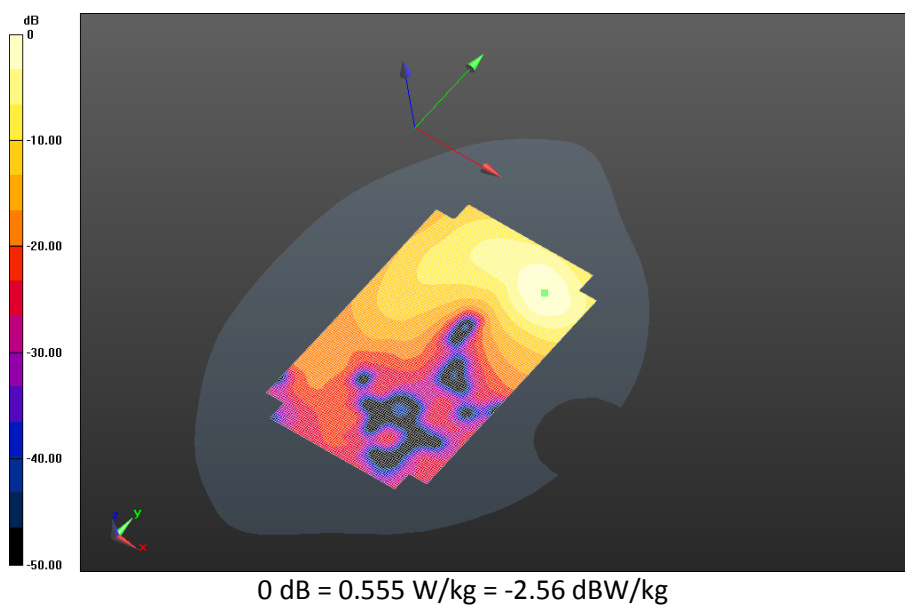

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 79(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC/15mm Device Front - LTE band

7_chan20850_20MHz_BW_RB1_Offset_Mid_amb_temp_23.9C_liq_temp_22.0C/Area Scan

(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 1.896 V/m; **Power Drift = 0.055 dB**

Fast SAR: SAR(1g) = 0.0873 W/kg; SAR(10g) = 0.0483 W/kg

Maximum value of SAR (interpolated) = 0.109 W/kg

[10g avg. SAR maximum on border.](#)

Body Worn MSL - LTE 7 FCC/15mm Device Front - LTE band


7_chan20850_20MHz_BW_RB1_Offset_Mid_amb_temp_23.9C_liq_temp_22.0C/Zoom Scan

(36x41x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 1.896 V/m; **Power Drift = 0.055 dB**

Averaged SAR: SAR(1g) = 0.0915 W/kg; SAR(10g) = 0.0506 W/kg

Maximum value of SAR (interpolated) = 0.174 W/kg

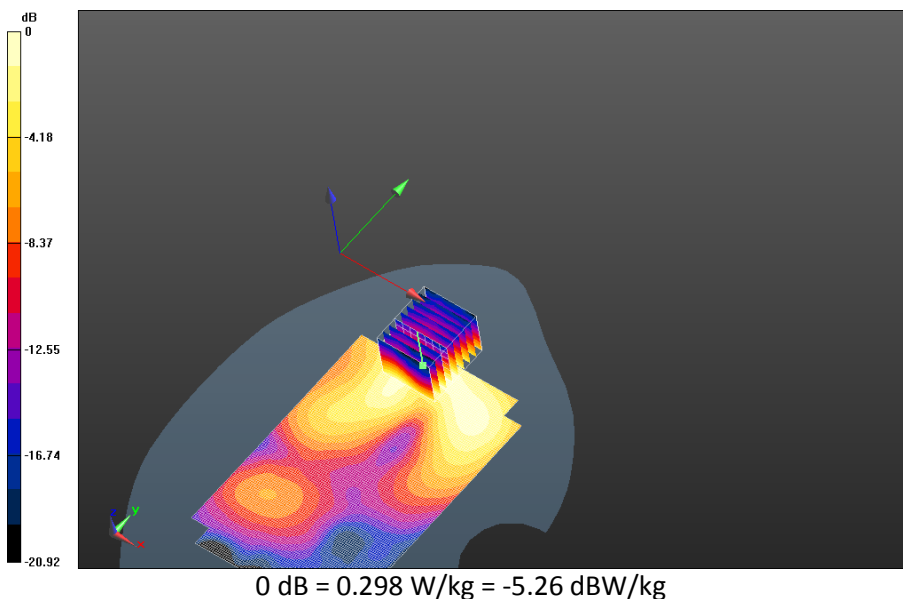

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 80(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

LTE Band 7 Rev 2

Date: 6/5/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF4703

Configuration: Body Worn MSL - LTE 7 FCC Rev2

Communication System: LTE 7 (0); Communication System Band: LTE band 7; Frequency: 2510 MHz

Medium Parameters used: $f=2510$ MHz; $\sigma = 2.089$ S/m; $\epsilon_r = 50.993$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3225; ConvF: (4.03,4.03,4.03); Calibrated: 1/22/2014;
- Sensor-Surface: 3 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - LTE 7 FCC Rev2/15mm Device Back - LTE band


7_chan20850_20MHz_BW_RB1_Offset_High_amb_temp_22.6C_liq_temp_22.3C/Area Scan (151x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 2.375 V/m; **Power Drift = 0.238 dB**

Fast SAR: SAR(1g) = 0.587 W/kg; SAR(10g) = 0.292 W/kg

Maximum value of SAR (interpolated) = 0.760 W/kg


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 81(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

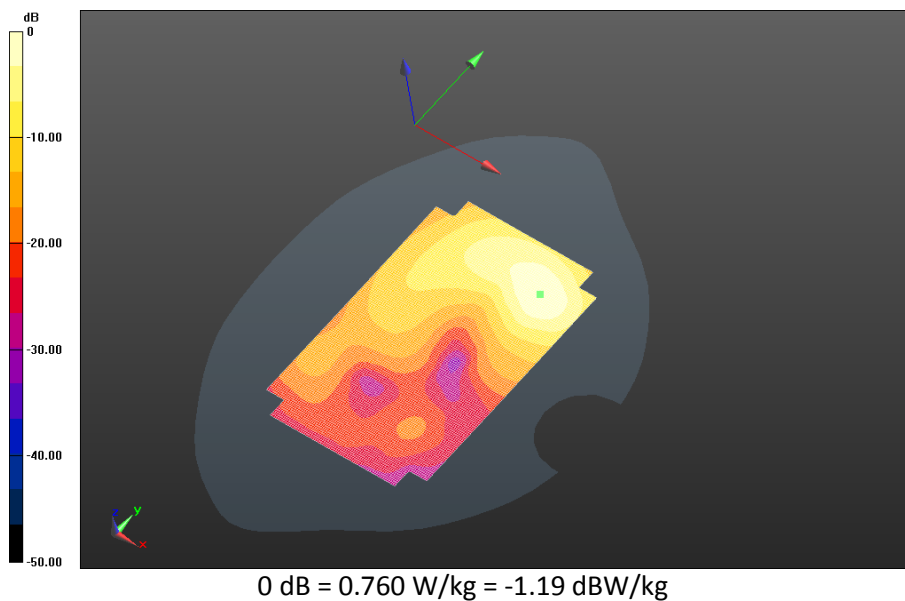

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 82(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC Rev2/15mm Device Back - LTE band
7_chan21100_20MHz_BW_RB1_Offset_High_amb_temp_22.6C_liq_temp_22.3C/Area Scan
(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Reference Value = 2.152 V/m; **Power Drift = 0.178 dB**

Fast SAR: SAR(1g) = 0.585 W/kg; SAR(10g) = 0.289 W/kg
Maximum value of SAR (interpolated) = 0.764 W/kg

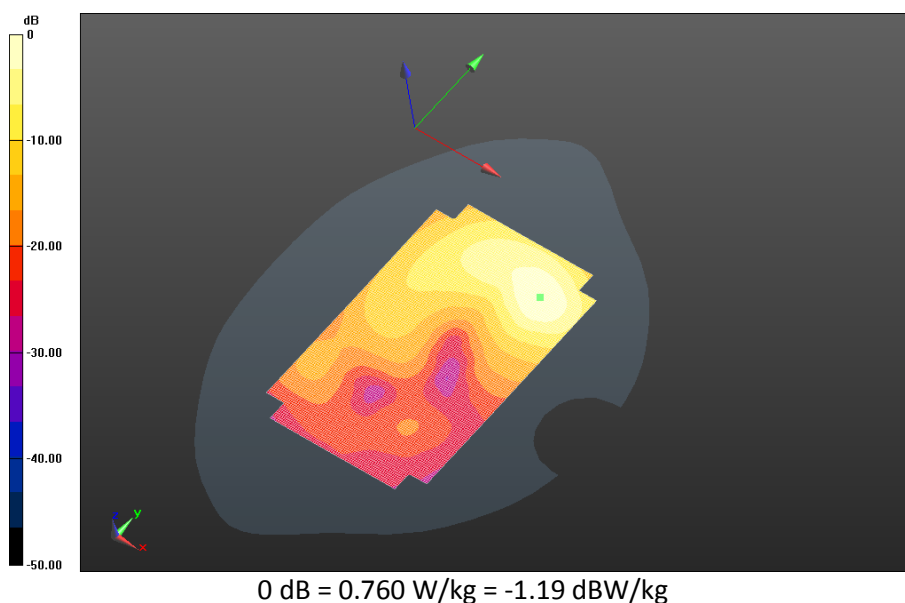

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 83(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - LTE 7 FCC Rev2/15mm Device Back - LTE band

7_chan21350_20MHz_BW_RB1_Offset_Low_amb_temp_22.6C_liq_temp_22.3C/Area Scan

(151x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Reference Value = 2.136 V/m; **Power Drift = 0.075 dB**

Fast SAR: SAR(1g) = 0.603 W/kg; SAR(10g) = 0.297 W/kg

Maximum value of SAR (interpolated) = 0.785 W/kg

Body Worn MSL - LTE 7 FCC Rev2/15mm Device Back - LTE band


7_chan21350_20MHz_BW_RB1_Offset_Low_amb_temp_22.6C_liq_temp_22.3C/Zoom Scan

(31x31x36)/Cube 0: Interpolated grid: dx=1.000 mm, dy=1.000 mm, dz=1.000 mm

Reference Value = 2.136 V/m; **Power Drift = 0.075 dB**

Averaged SAR: SAR(1g) = 0.616 W/kg; SAR(10g) = 0.303 W/kg

Maximum value of SAR (interpolated) = 1.28 W/kg

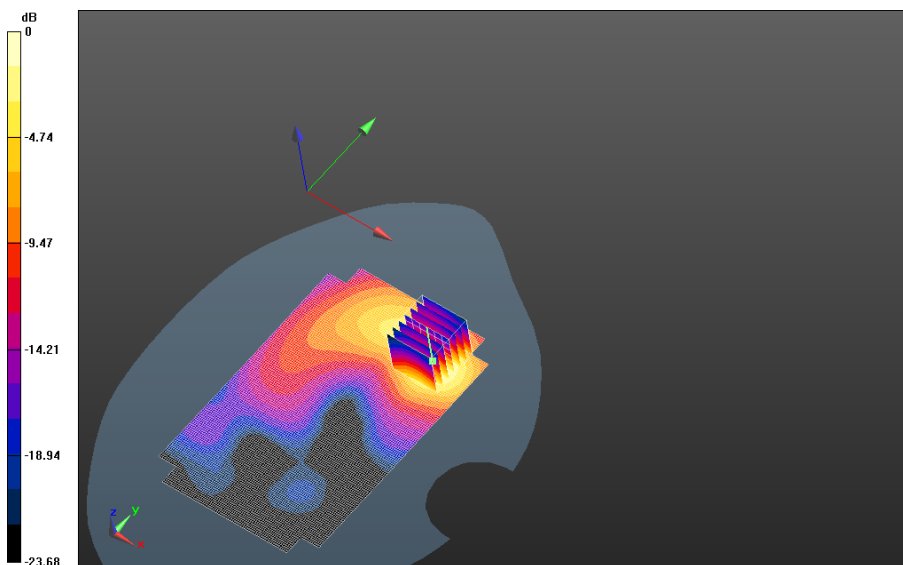

0 dB = 0.764 W/kg = -1.17 dBW/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 84(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

802.11a

Date: 5/27/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - 802.11a 5200 MHz

Communication System: 802.11a (0); Communication System Band: Low and Mid Bands; Frequency: 5180 MHz

Medium Parameters used: $f=5180$ MHz; $\sigma = 5.472$ S/m; $\epsilon_r = 47.069$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.83,4.83,4.83); Calibrated: 1/17/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -

802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_21.7C/Area Scan

(181x241x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 2.124 V/m; **Power Drift = -0.319 dB**

Fast SAR: SAR(1g) = 0.463 W/kg; SAR(10g) = 0.174 W/kg

Maximum value of SAR (interpolated) = 0.890 W/kg

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -

802.11a_chan36_low_band_Amb_Temp_23.4C_Liquid_Temp_21.7C/Zoom Scan


(41x41x61)/Cube 0: Interpolated grid: $dx=0.800$ mm, $dy=0.800$ mm, $dz=0.400$ mm

Reference Value = 2.124 V/m; **Power Drift = -0.319 dB**

Averaged SAR: SAR(1g) = 0.497 W/kg; SAR(10g) = 0.184 W/kg

Maximum value of SAR (interpolated) = 1.84 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 85(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

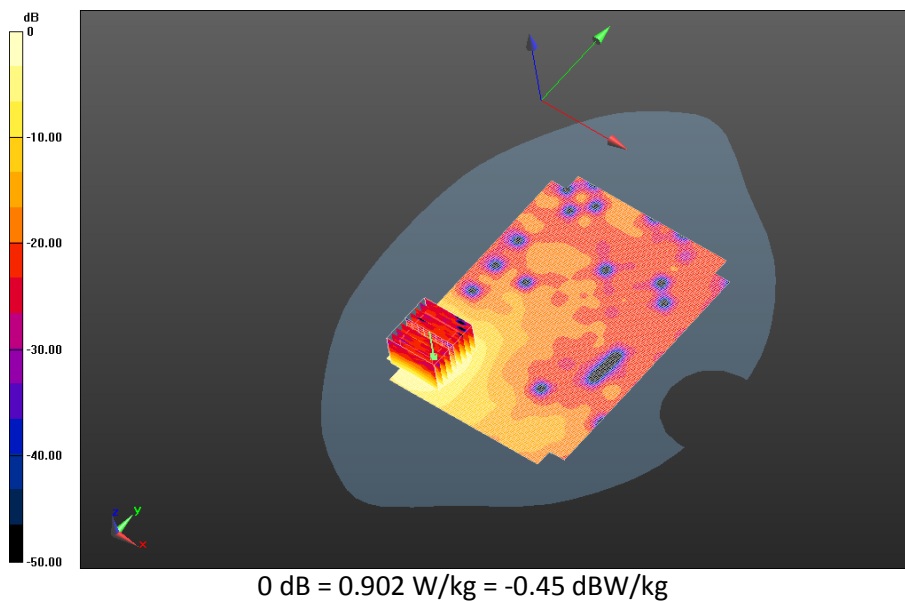


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 86(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan48_low_band_Amb_Temp_22.8C_Liquid_Temp_21.4C/Area Scan
(181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.048 V/m; **Power Drift = -0.447 dB**

Fast SAR: SAR(1g) = 0.585 W/kg; SAR(10g) = 0.221 W/kg
Maximum value of SAR (interpolated) = 1.13 W/kg

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan48_low_band_Amb_Temp_22.8C_Liquid_Temp_21.4C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.048 V/m; **Power Drift = -0.447 dB**

Averaged SAR: SAR(1g) = 0.616 W/kg; SAR(10g) = 0.231 W/kg
Maximum value of SAR (interpolated) = 2.35 W/kg

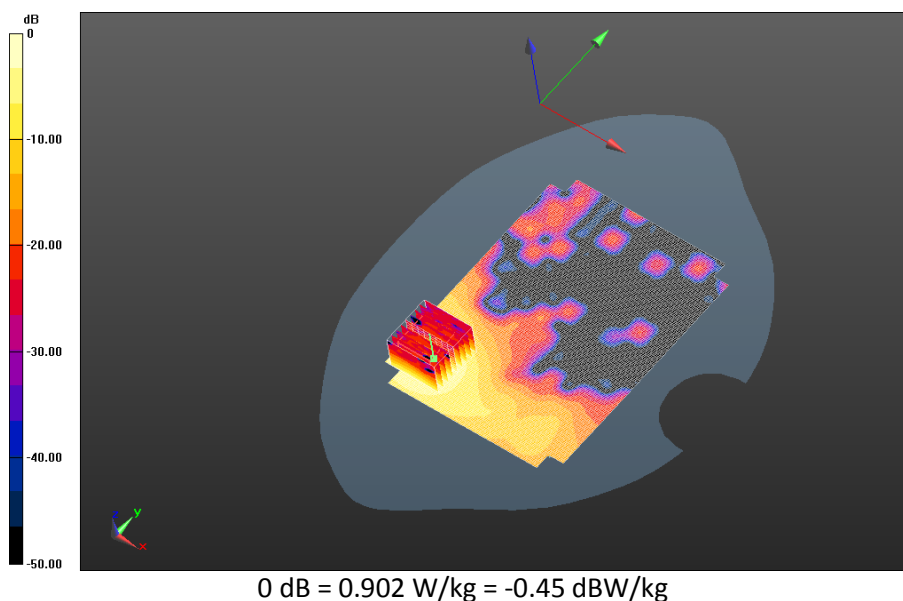


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 87(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan52_low_band_Amb_Temp_23.3C_Liquid_Temp_21.7C/Area Scan
(181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.806 V/m; **Power Drift = 0.088 dB**

Fast SAR: SAR(1g) = 0.818 W/kg; SAR(10g) = 0.298 W/kg
Maximum value of SAR (interpolated) = 1.61 W/kg

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan52_low_band_Amb_Temp_23.3C_Liquid_Temp_21.7C/Zoom Scan
(36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.806 V/m; **Power Drift = 0.088 dB**

Averaged SAR: SAR(1g) = 0.854 W/kg; SAR(10g) = 0.313 W/kg
Maximum value of SAR (interpolated) = 3.14 W/kg

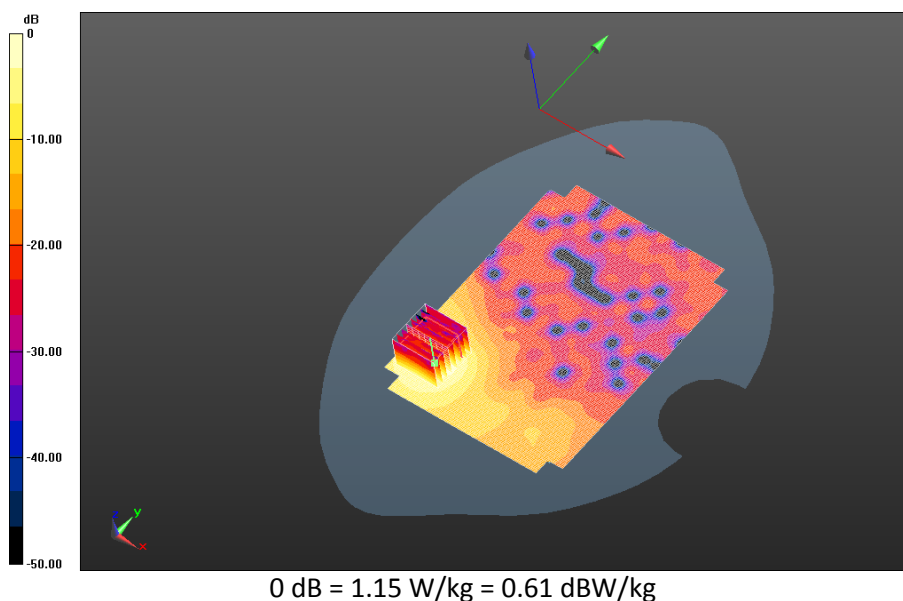


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 88(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan64_low_band_Amb_Temp_23.3C_Liquid_Temp_21.5C/Area Scan
(181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.746 V/m; **Power Drift = 0.125 dB**

Fast SAR: SAR(1g) = 0.818 W/kg; SAR(10g) = 0.302 W/kg
Maximum value of SAR (interpolated) = 1.61 W/kg

Body Worn MSL - 802.11a 5200 MHz/15mm Device Back -
802.11a_chan64_low_band_Amb_Temp_23.3C_Liquid_Temp_21.5C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.746 V/m; **Power Drift = 0.125 dB**

Averaged SAR: SAR(1g) = 0.874 W/kg; SAR(10g) = 0.321 W/kg
Maximum value of SAR (interpolated) = 3.27 W/kg

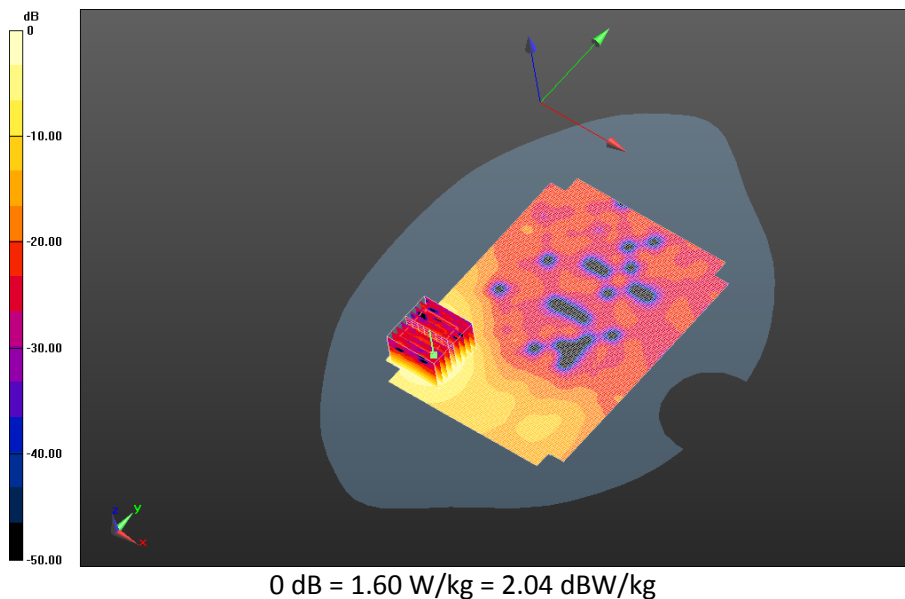

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 89(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Date: 5/28/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - 802.11a 5500 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands;

Frequency: 5520 MHz

Medium Parameters used: $f=5520$ MHz; $\sigma = 5.940$ S/m; $\epsilon_r = 46.367$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.33,4.33,4.33); Calibrated: 1/17/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -

802.11a_chan104_upper_bandI_Amb_Temp_23.0C_Liquid_Temp_21.4C/Area

Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 2.394 V/m; **Power Drift = -0.436 dB**

Fast SAR: SAR(1g) = 0.796 W/kg; SAR(10g) = 0.302 W/kg

Maximum value of SAR (interpolated) = 1.56 W/kg

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -

802.11a_chan104_upper_bandI_Amb_Temp_23.0C_Liquid_Temp_21.4C/Zoom Scan


(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 2.394 V/m; **Power Drift = -0.436 dB**

Averaged SAR: SAR(1g) = 0.828 W/kg; SAR(10g) = 0.315 W/kg

Maximum value of SAR (interpolated) = 3.01 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 90(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

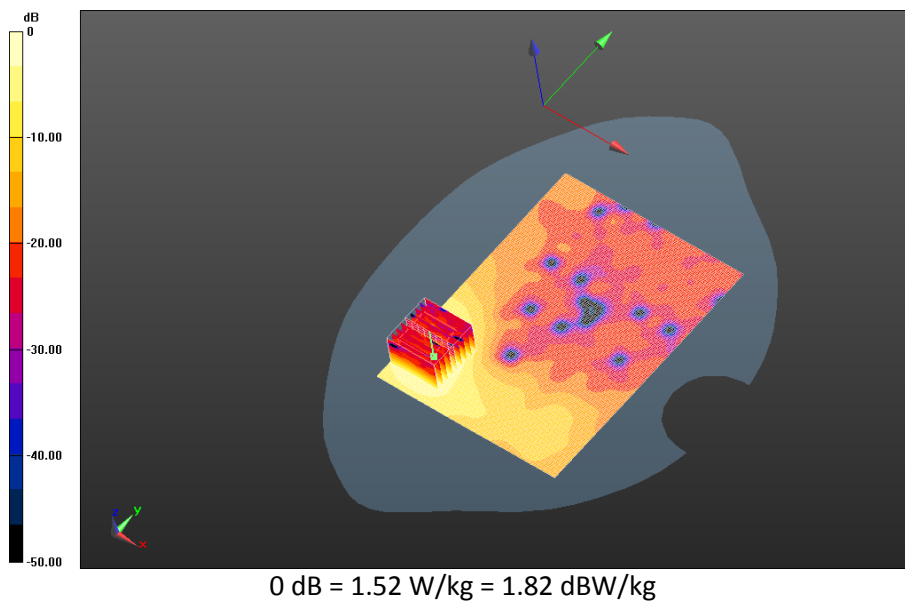


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 91(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan116_upper_bandI_Amb_Temp_23.3C_Liquid_Temp_21.6C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.043 V/m; **Power Drift = 0.092 dB**

Fast SAR: SAR(1g) = 0.942 W/kg; SAR(10g) = 0.355 W/kg
Maximum value of SAR (interpolated) = 1.86 W/kg

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan116_upper_bandI_Amb_Temp_23.3C_Liquid_Temp_21.6C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.043 V/m; **Power Drift = 0.092 dB**

Averaged SAR: SAR(1g) = 0.981 W/kg; SAR(10g) = 0.372 W/kg
Maximum value of SAR (interpolated) = 3.66 W/kg

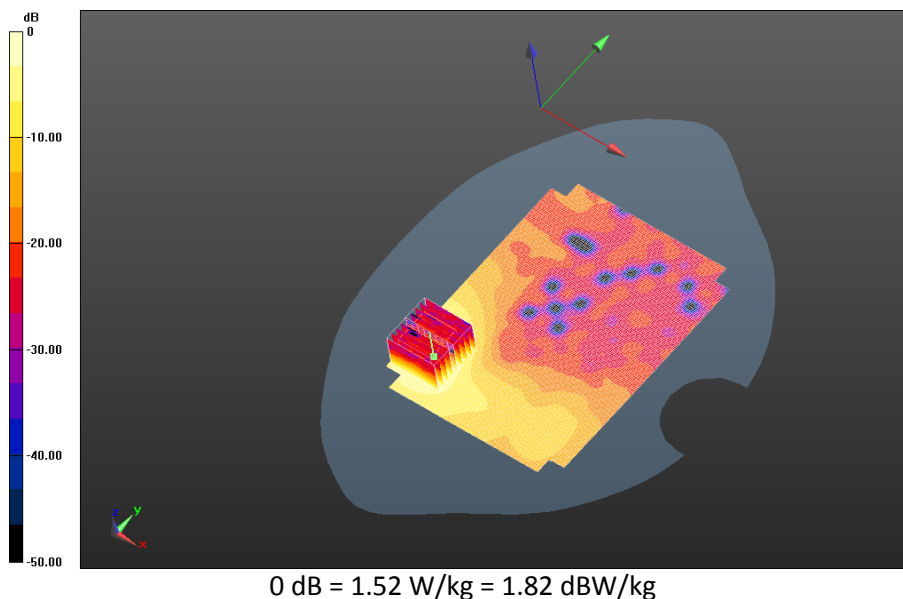


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 92(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan124_upper_bandI_Amb_Temp_22.9C_Liquid_Temp_21.3C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.185 V/m; **Power Drift = -0.020 dB**

Fast SAR: SAR(1g) = 1.05 W/kg; SAR(10g) = 0.394 W/kg
Maximum value of SAR (interpolated) = 2.10 W/kg

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan124_upper_bandI_Amb_Temp_22.9C_Liquid_Temp_21.3C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.185 V/m; **Power Drift = -0.020 dB**

Averaged SAR: SAR(1g) = 1.11 W/kg; SAR(10g) = 0.421 W/kg
Maximum value of SAR (interpolated) = 4.17 W/kg

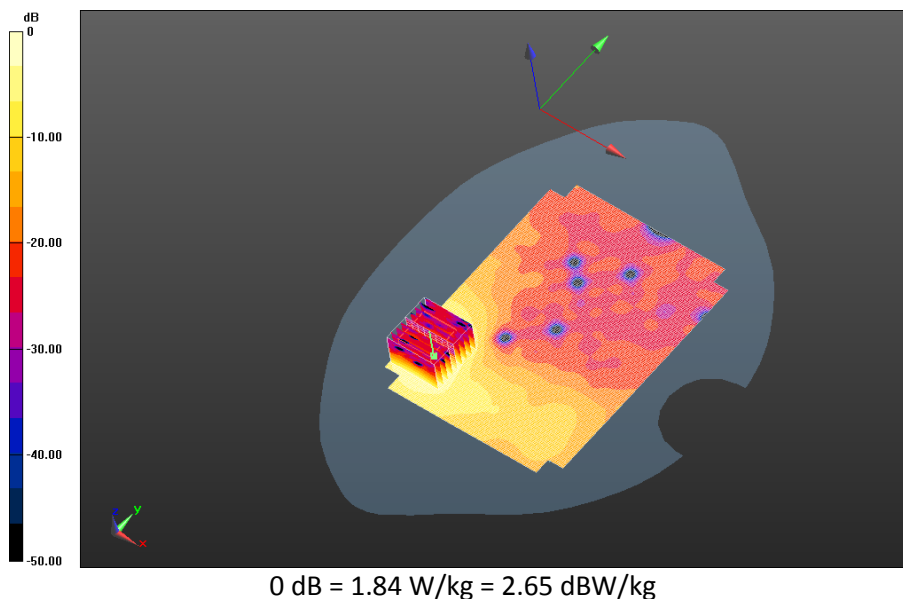


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 93(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan136_upper_bandI_Amb_Temp_23.2C_Liquid_Temp_22.0C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.685 V/m; **Power Drift = 0.457 dB**

Fast SAR: SAR(1g) = 1.04 W/kg; SAR(10g) = 0.396 W/kg
Maximum value of SAR (interpolated) = 2.03 W/kg

Body Worn MSL - 802.11a 5500 MHz/15mm Device Back -
802.11a_chan136_upper_bandI_Amb_Temp_23.2C_Liquid_Temp_22.0C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.685 V/m; **Power Drift = 0.457 dB**

Averaged SAR: SAR(1g) = 1.10 W/kg; SAR(10g) = 0.416 W/kg
Maximum value of SAR (interpolated) = 4.14 W/kg

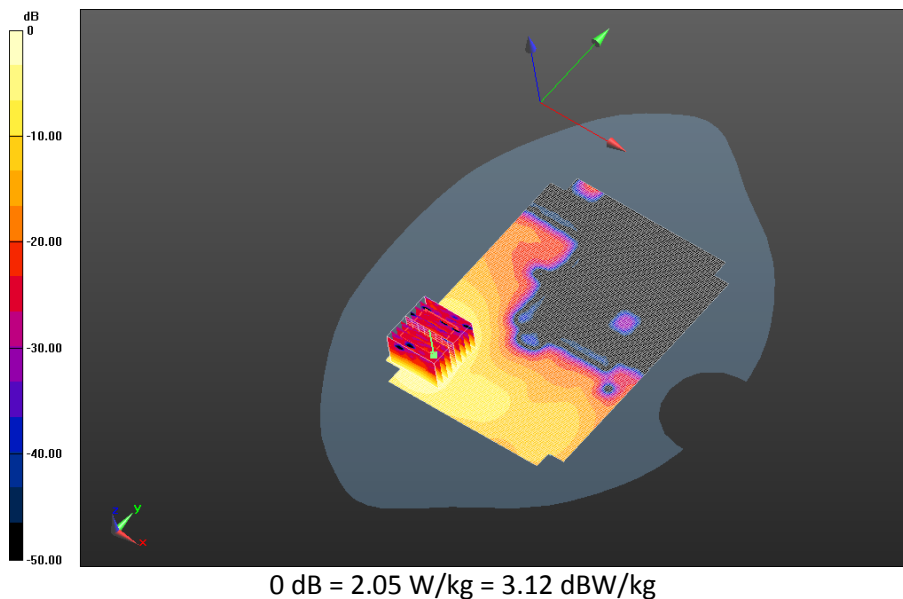

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 94(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Date: 5/28/2014

Test Lab: BlackBerry RTS

DUT Name: BlackBerry Smartphone, Type: Sample, Serial: 2FFF3D40

Configuration: Body Worn MSL - 802.11a 5800 MHz

Communication System: 802.11a; Communication System Band: Low and Mid Bands;

Frequency: 5745 MHz

Medium Parameters used: $f=5745$ MHz; $\sigma = 6.271$ S/m; $\epsilon_r = 45.931$; $\rho = 1.000$ g/cm³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3548; ConvF: (4.36,4.36,4.36); Calibrated: 1/17/2014;
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -

802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Area

Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 1.771 V/m; **Power Drift = 0.220 dB**

Fast SAR: SAR(1g) = 1.12 W/kg; SAR(10g) = 0.417 W/kg

Maximum value of SAR (interpolated) = 2.21 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -

802.11a_chan149_upper_bandII_Amb_Temp_23.1C_Liquid_Temp_22.0C/Zoom Scan


(31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm

Reference Value = 1.771 V/m; **Power Drift = 0.220 dB**

Averaged SAR: SAR(1g) = 1.18 W/kg; SAR(10g) = 0.441 W/kg

Maximum value of SAR (interpolated) = 4.58 W/kg

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 95(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

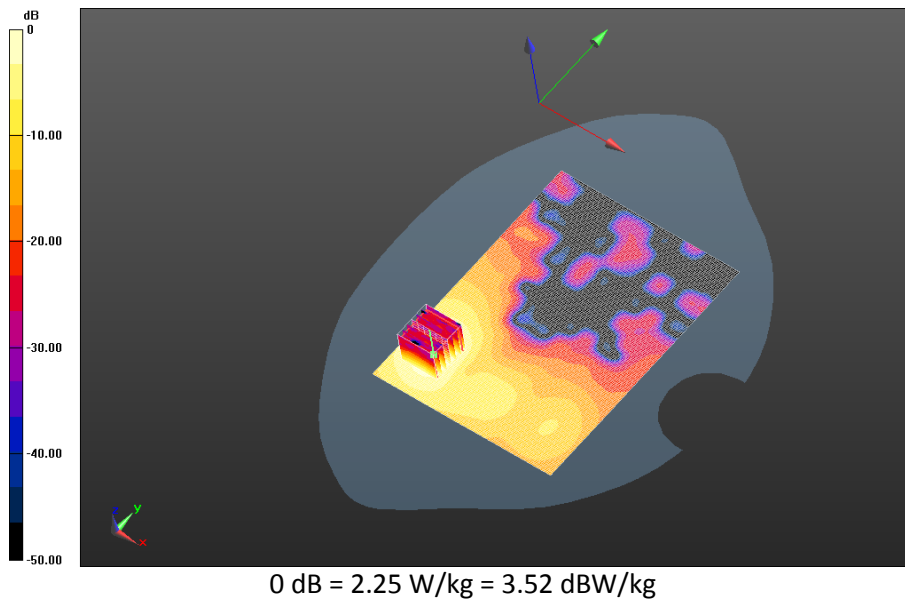


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 96(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11a_chan157_upper_bandII_Amb_Temp_23.0C_Liquid_Temp_22.0C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.855 V/m; **Power Drift = 0.274 dB**

Fast SAR: SAR(1g) = 1.03 W/kg; SAR(10g) = 0.382 W/kg
Maximum value of SAR (interpolated) = 2.03 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11a_chan157_upper_bandII_Amb_Temp_23.0C_Liquid_Temp_22.0C/Zoom Scan
(31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.855 V/m; **Power Drift = 0.274 dB**

Averaged SAR: SAR(1g) = 1.06 W/kg; SAR(10g) = 0.397 W/kg
Maximum value of SAR (interpolated) = 4.16 W/kg

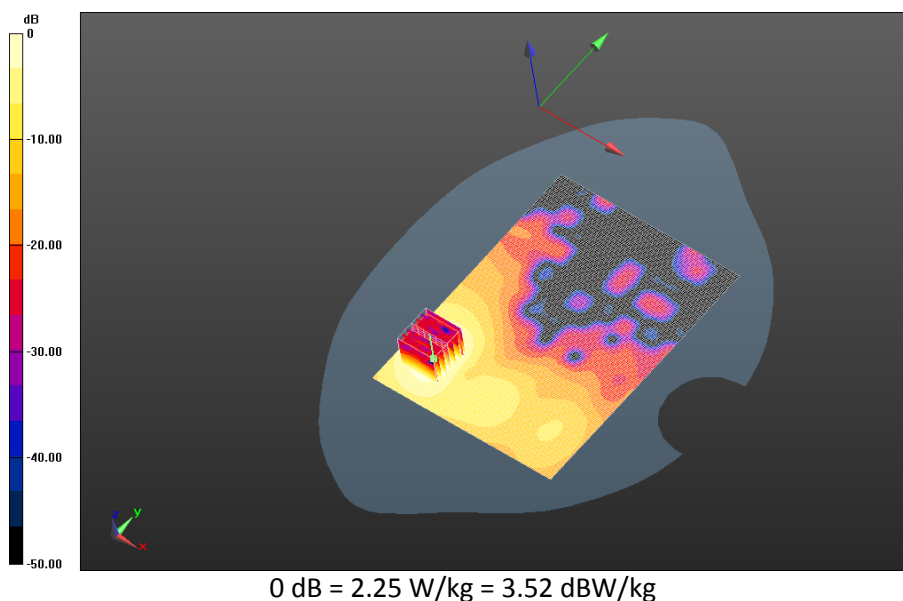


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 97(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11a_chan165_upper_bandII_Amb_Temp_22.8C_Liquid_Temp_21.9C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.176 V/m; **Power Drift = 0.064 dB**

Fast SAR: SAR(1g) = 0.955 W/kg; SAR(10g) = 0.352 W/kg
Maximum value of SAR (interpolated) = 1.89 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11a_chan165_upper_bandII_Amb_Temp_22.8C_Liquid_Temp_21.9C/Zoom Scan
(36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.176 V/m; **Power Drift = 0.064 dB**

Averaged SAR: SAR(1g) = 1.02 W/kg; SAR(10g) = 0.378 W/kg
Maximum value of SAR (interpolated) = 4.14 W/kg

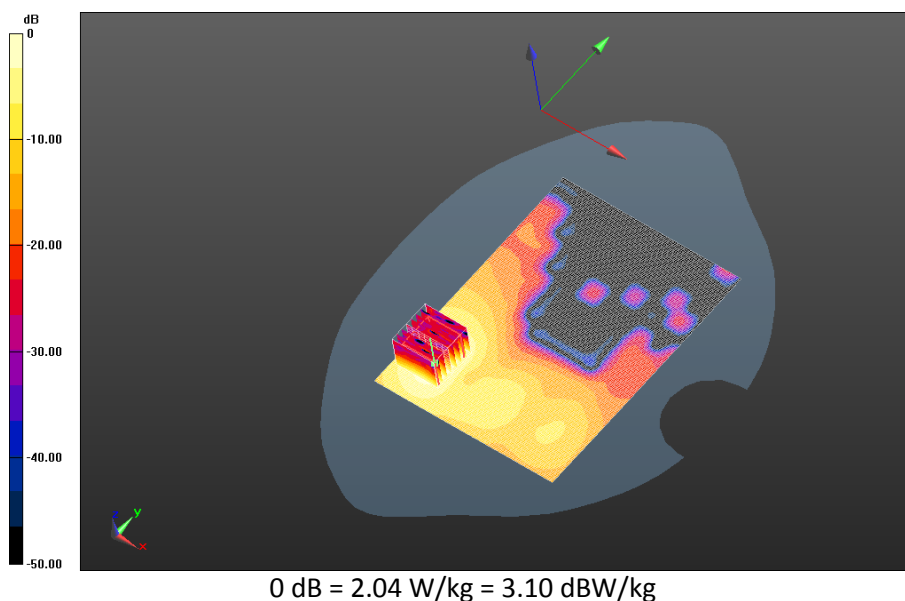


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 98(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/Headset 15mm Device Back - 802.11a_chan149_upper_bandII_Amb_Temp_23.4C_Liquid_Temp_21.7C/Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.042 V/m; **Power Drift = -0.093 dB**

Fast SAR: SAR(1g) = 0.547 W/kg; SAR(10g) = 0.206 W/kg
Maximum value of SAR (interpolated) = 1.09 W/kg

Body Worn MSL - 802.11a 5800 MHz/Headset 15mm Device Back - 802.11a_chan149_upper_bandII_Amb_Temp_23.4C_Liquid_Temp_21.7C/Zoom Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.042 V/m; **Power Drift = -0.093 dB**

Averaged SAR: SAR(1g) = 0.574 W/kg; SAR(10g) = 0.216 W/kg
Maximum value of SAR (interpolated) = 2.23 W/kg

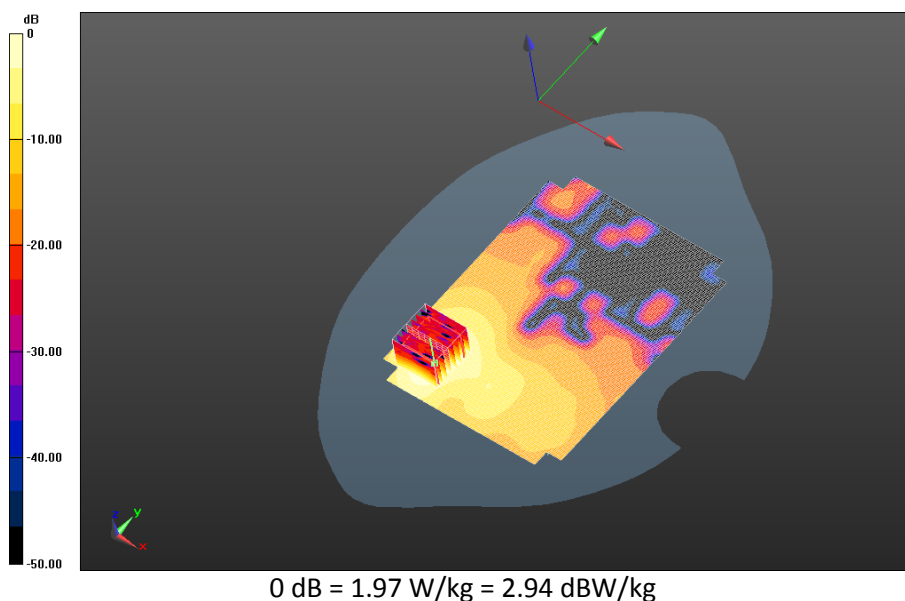


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 99(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back 2nd Scan - 802.11a_chan149_upper_bandII_Amb_Temp_22.9C_Liquid_Temp_21.9C/Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.693 V/m; **Power Drift = -0.087 dB**

Fast SAR: SAR(1g) = 1.10 W/kg; SAR(10g) = 0.413 W/kg
Maximum value of SAR (interpolated) = 2.17 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back 2nd Scan - 802.11a_chan149_upper_bandII_Amb_Temp_22.9C_Liquid_Temp_21.9C/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.693 V/m; **Power Drift = -0.087 dB**

Averaged SAR: SAR(1g) = 1.18 W/kg; SAR(10g) = 0.441 W/kg
Maximum value of SAR (interpolated) = 4.63 W/kg

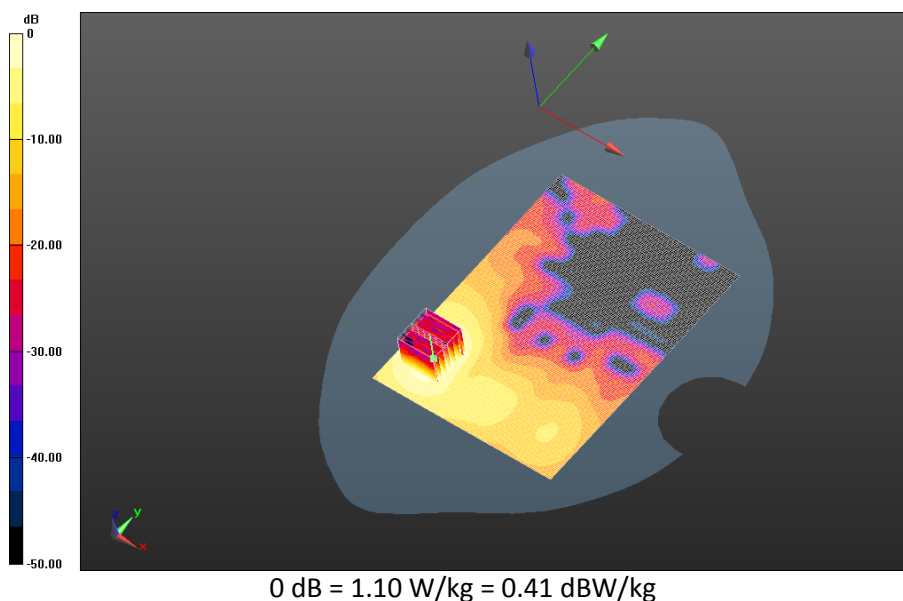


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 100(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW20_upper_bandII_Amb_Temp_23.0C_Liquid_Temp_21.4C/
Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.119 V/m; **Power Drift = -0.411 dB**

Fast SAR: SAR(1g) = 0.890 W/kg; SAR(10g) = 0.329 W/kg
Maximum value of SAR (interpolated) = 1.76 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW20_upper_bandII_Amb_Temp_23.0C_Liquid_Temp_21.4C/Zoo
m Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400
mm
Reference Value = 2.119 V/m; **Power Drift = -0.411 dB**

Averaged SAR: SAR(1g) = 0.917 W/kg; SAR(10g) = 0.341 W/kg
Maximum value of SAR (interpolated) = 3.66 W/kg

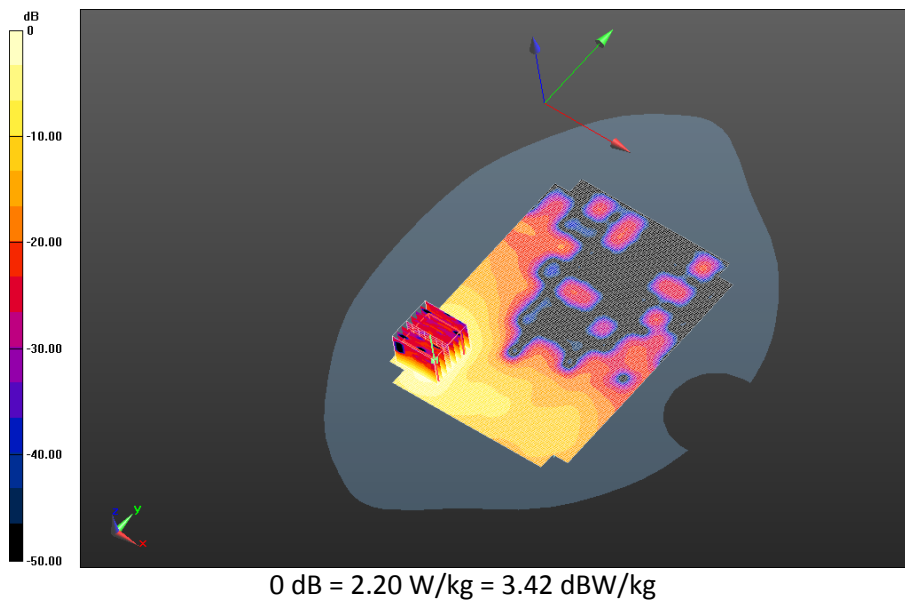


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 101(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW40_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_21.8C/
Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.811 V/m; **Power Drift = 0.147 dB**

Fast SAR: SAR(1g) = 0.561 W/kg; SAR(10g) = 0.208 W/kg
Maximum value of SAR (interpolated) = 1.11 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW40_upper_bandII_Amb_Temp_23.2C_Liquid_Temp_21.8C/Zoo
m Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400
mm
Reference Value = 1.811 V/m; **Power Drift = 0.147 dB**

Averaged SAR: SAR(1g) = 0.587 W/kg; SAR(10g) = 0.218 W/kg
Maximum value of SAR (interpolated) = 2.35 W/kg

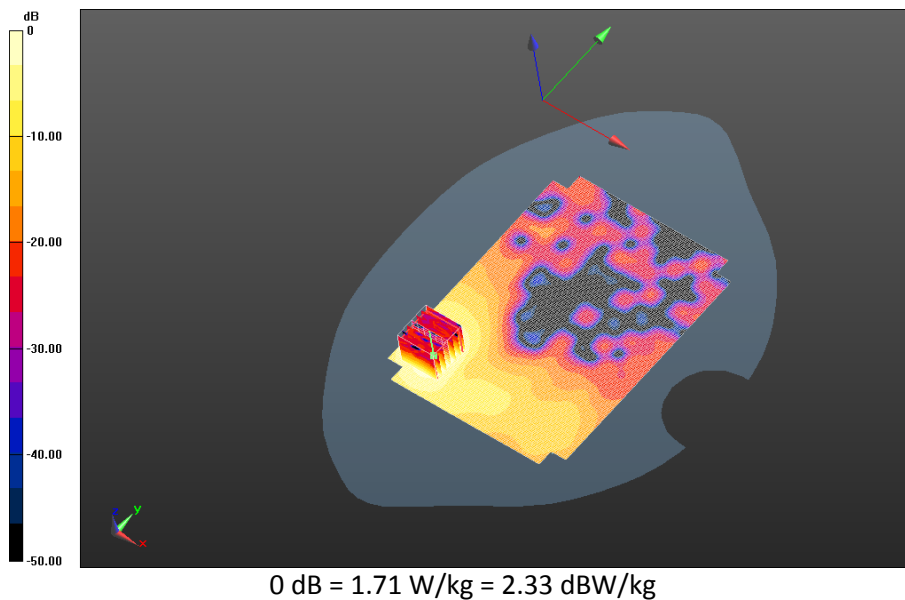


		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 102(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW80_upper_bandII_Amb_Temp_23.7C_Liquid_Temp_21.9C/
Area Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 2.073 V/m; **Power Drift = 0.228 dB**

Fast SAR: SAR(1g) = 0.372 W/kg; SAR(10g) = 0.136 W/kg
Maximum value of SAR (interpolated) = 0.740 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Back -
802.11ac_chan149_BW80_upper_bandII_Amb_Temp_23.7C_Liquid_Temp_21.9C/Zoo
m Scan (36x36x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 2.073 V/m; **Power Drift = 0.228 dB**

Averaged SAR: SAR(1g) = 0.392 W/kg; SAR(10g) = 0.145 W/kg
Maximum value of SAR (interpolated) = 1.57 W/kg

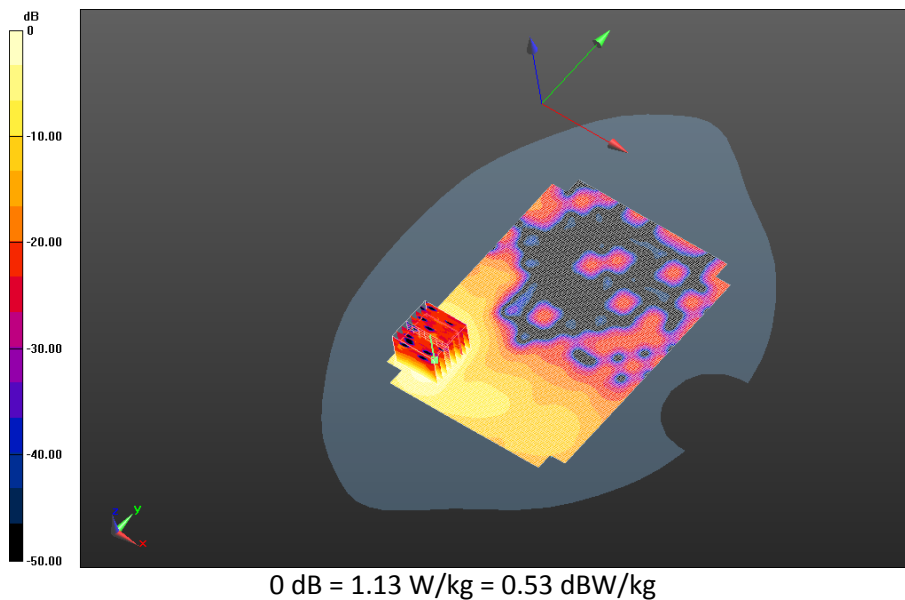

		Document Appendix C1 for the BlackBerry® Smartphone Model RGY181LW SAR Report		Page 103(103)
Author Data Andrew Becker	Dates of Test April 15 – June 13, 2014	Test Report No RTS-6057-1405-01	FCC ID: L6ARGY180LW	

Body Worn MSL - 802.11a 5800 MHz/15mm Device Front -
802.11a_chan149_upper_bandII_Amb_Temp_23.9C_Liquid_Temp_22.0C/Area
Scan (181x241x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Reference Value = 1.939 V/m; **Power Drift = 0.187 dB**

Fast SAR: SAR(1g) = 0.0584 W/kg; SAR(10g) = 0.0182 W/kg
Maximum value of SAR (interpolated) = 0.156 W/kg

Body Worn MSL - 802.11a 5800 MHz/15mm Device Front -
802.11a_chan149_upper_bandII_Amb_Temp_23.9C_Liquid_Temp_22.0C/Zoom Scan
(41x41x61)/Cube 0: Interpolated grid: dx=0.800 mm, dy=0.800 mm, dz=0.400 mm
Reference Value = 1.939 V/m; **Power Drift = 0.187 dB**

Averaged SAR: SAR(1g) = 0.0485 W/kg; SAR(10g) = 0.0171 W/kg
Maximum value of SAR (interpolated) = 0.183 W/kg

