



FCC RADIO TEST REPORT

FCC ID : UDX-60067020
Equipment : 802.11a/b/g/n/ac Wireless Access Point
Brand Name : CISCO
Model Name : GR60-HW, GR60-HW-US, GR60-HW-INTL
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Aug. 22, 2017, and testing was started from Aug. 31, 2017 and completed on Sep. 05, 2017. We, SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

SPORTON INTERTIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT.....	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	15
2.3 EUT Operation during Test	16
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	19
3 Transmitter Test Result	23
3.1 AC Power-line Conducted Emissions	23
3.2 Emission Bandwidth	26
3.3 Maximum Conducted Output Power	46
3.4 Peak Power Spectral Density.....	53
3.5 Unwanted Emissions	75
3.6 Frequency Stability.....	202
4 Test Equipment and Calibration Data	209
Appendix A. Test Results of Radiated Emission Co-location	
Appendix B. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0

Page Number : 3 of 210
Issued Date : Mar. 29, 2018
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(g)	Frequency Stability	PASS	-

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40)	5190-5230	38-46 [2]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80)	5210	42 [1]
5725-5850		5775	155 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.15-5.25GHz	802.11n HT20	20	2TX
5.15-5.25GHz	802.11n HT20-BF	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	2TX
5.15-5.25GHz	802.11ac VHT20-BF	20	2TX
5.15-5.25GHz	802.11n HT40	40	2TX
5.15-5.25GHz	802.11n HT40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	2TX
5.15-5.25GHz	802.11ac VHT40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	2TX
5.15-5.25GHz	802.11ac VHT80-BF	80	2TX
5.725-5.85GHz	802.11a	20	2TX
5.725-5.85GHz	802.11n HT20	20	2TX
5.725-5.85GHz	802.11n HT20-BF	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	2TX
5.725-5.85GHz	802.11ac VHT20-BF	20	2TX
5.725-5.85GHz	802.11n HT40	40	2TX
5.725-5.85GHz	802.11n HT40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	2TX
5.725-5.85GHz	802.11ac VHT40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	2TX
5.725-5.85GHz	802.11ac VHT80-BF	80	2TX

**Note:**

- ◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ◆ BWch is the nominal channel bandwidth.
- ◆ Nss-Min is the minimum number of spatial streams.
- ◆ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	1	WNC	48XKAA1Z.SGA.X02	Dipole Antenna	I-PEX	4.84	4.87
2	2	WNC	48XKAA1Z.SGA.X02	Dipole Antenna	I-PEX	4.37	4.86
2TX Correlated Composite Gain(dBi)						4.96	5.15

Note: The EUT has two antennas.

2.4GHz Functions**For IEEE 802.11b/g/n/ac mode (2TX, 2RX):**

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

5GHz Functions**For IEEE 802.11a/n/ac mode (2TX, 2RX):**

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**


Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11a	0.964	0.159	2.033m	1k
802.11ac VHT20	0.984	0.07	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11ac VHT20-BF	0.911	0.405	1.823m	1k
802.11ac VHT40	0.961	0.173	2.403m	1k
802.11ac VHT40-BF	0.913	0.395	1.753m	1k
802.11ac VHT80	0.926	0.334	1.125m	1k
802.11ac VHT80-BF	0.885	0.531	2.015m	1k


Note:


The test procedure refers to ANSI C63.10:2013 clause 11.6 b). The ON and OFF times of the transmitted signal is measured by spectrum analyzer and the setting as follows:


- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.
- 3) Set VBW $\geq$ RBW. Set detector = peak or average.

The measured result and plots are recorded in 1.1.3.

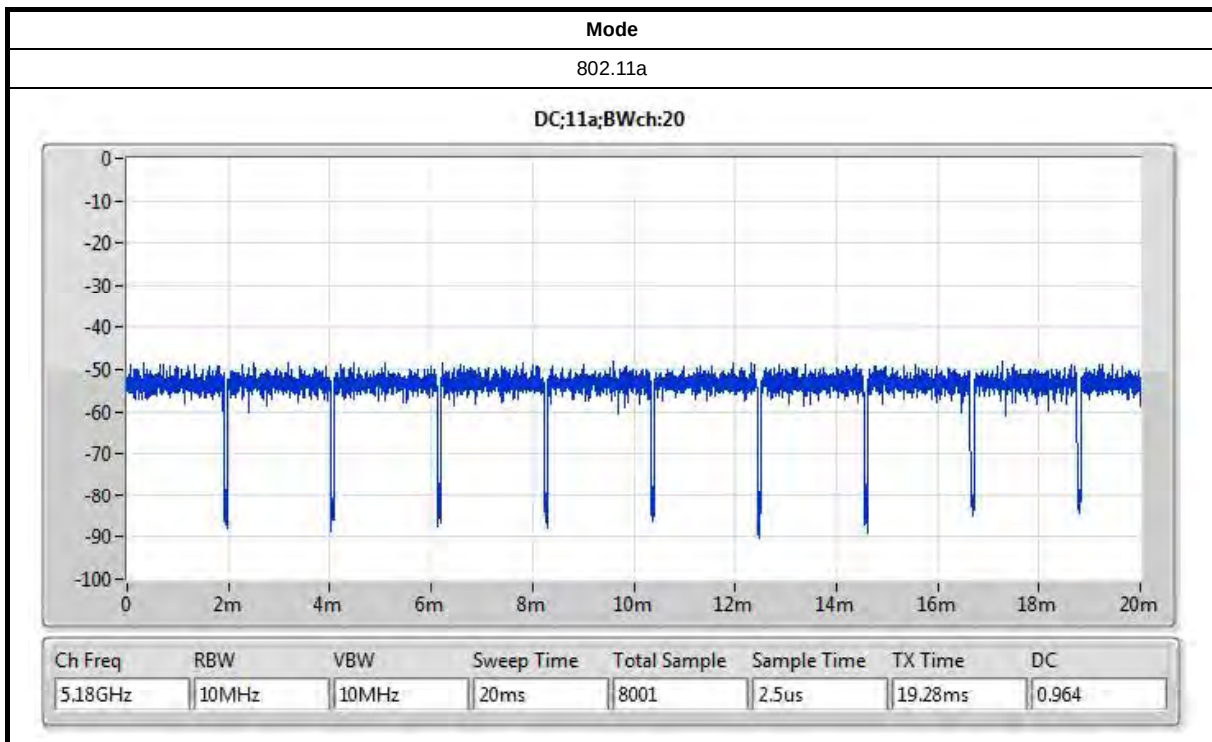

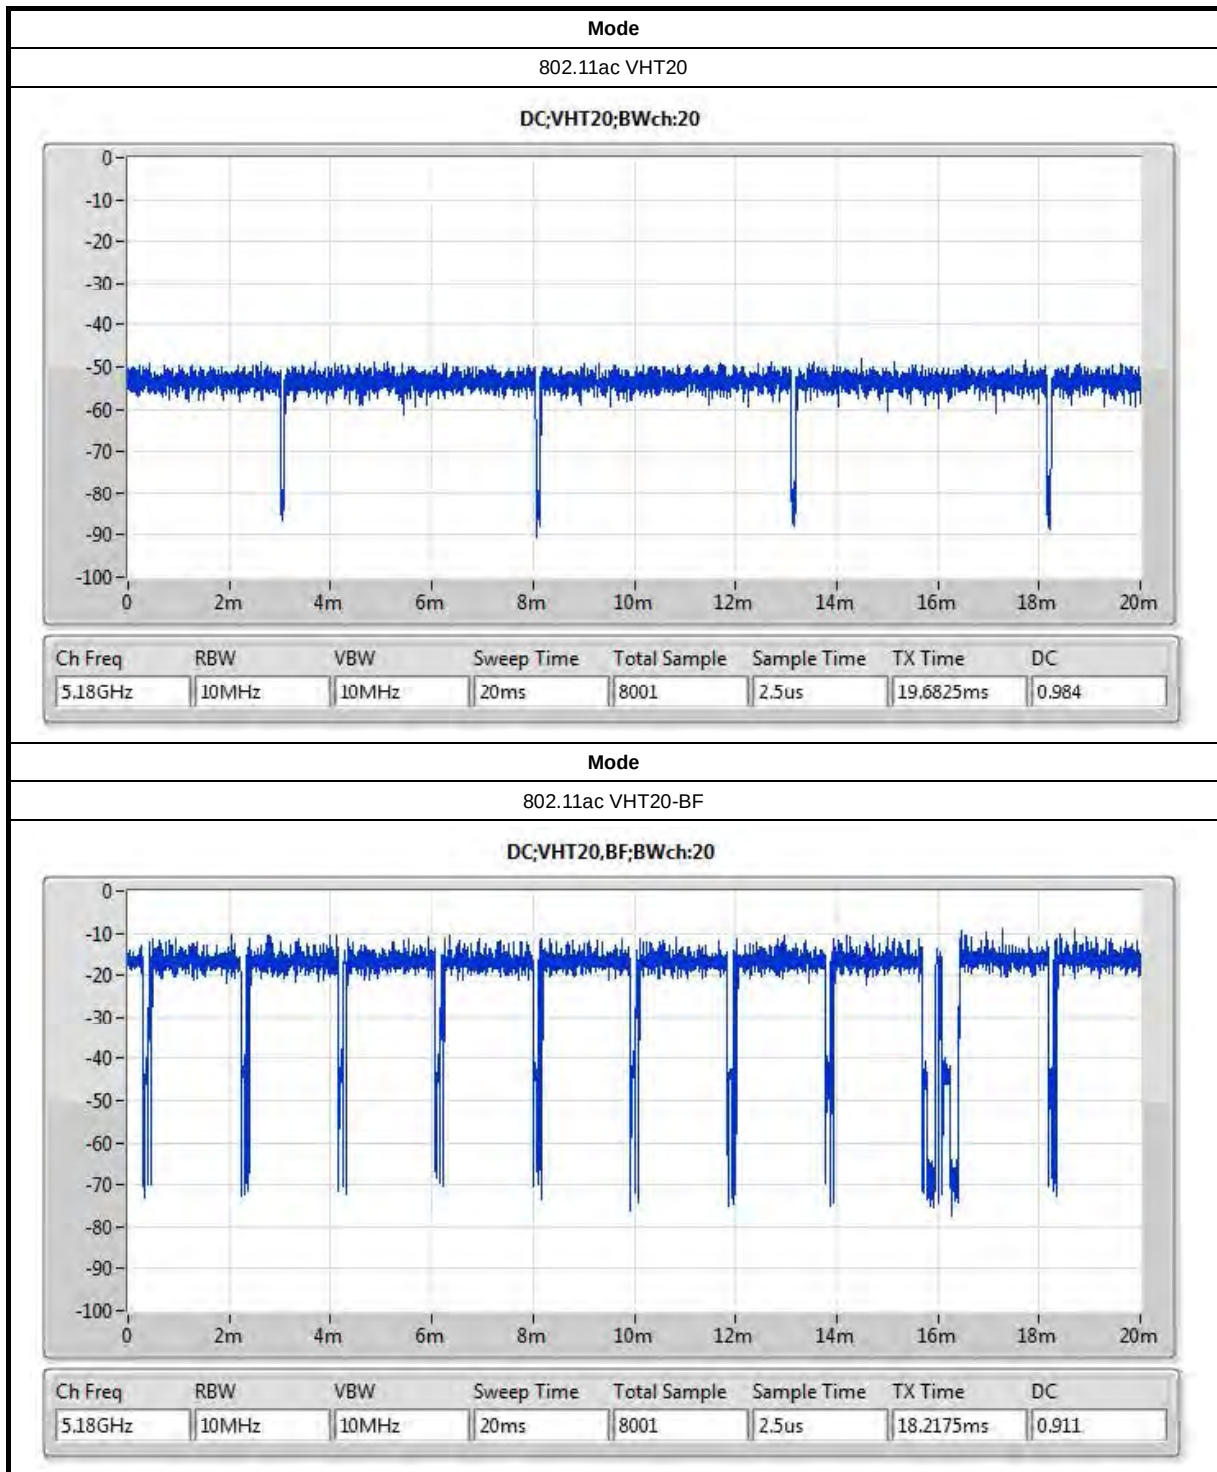

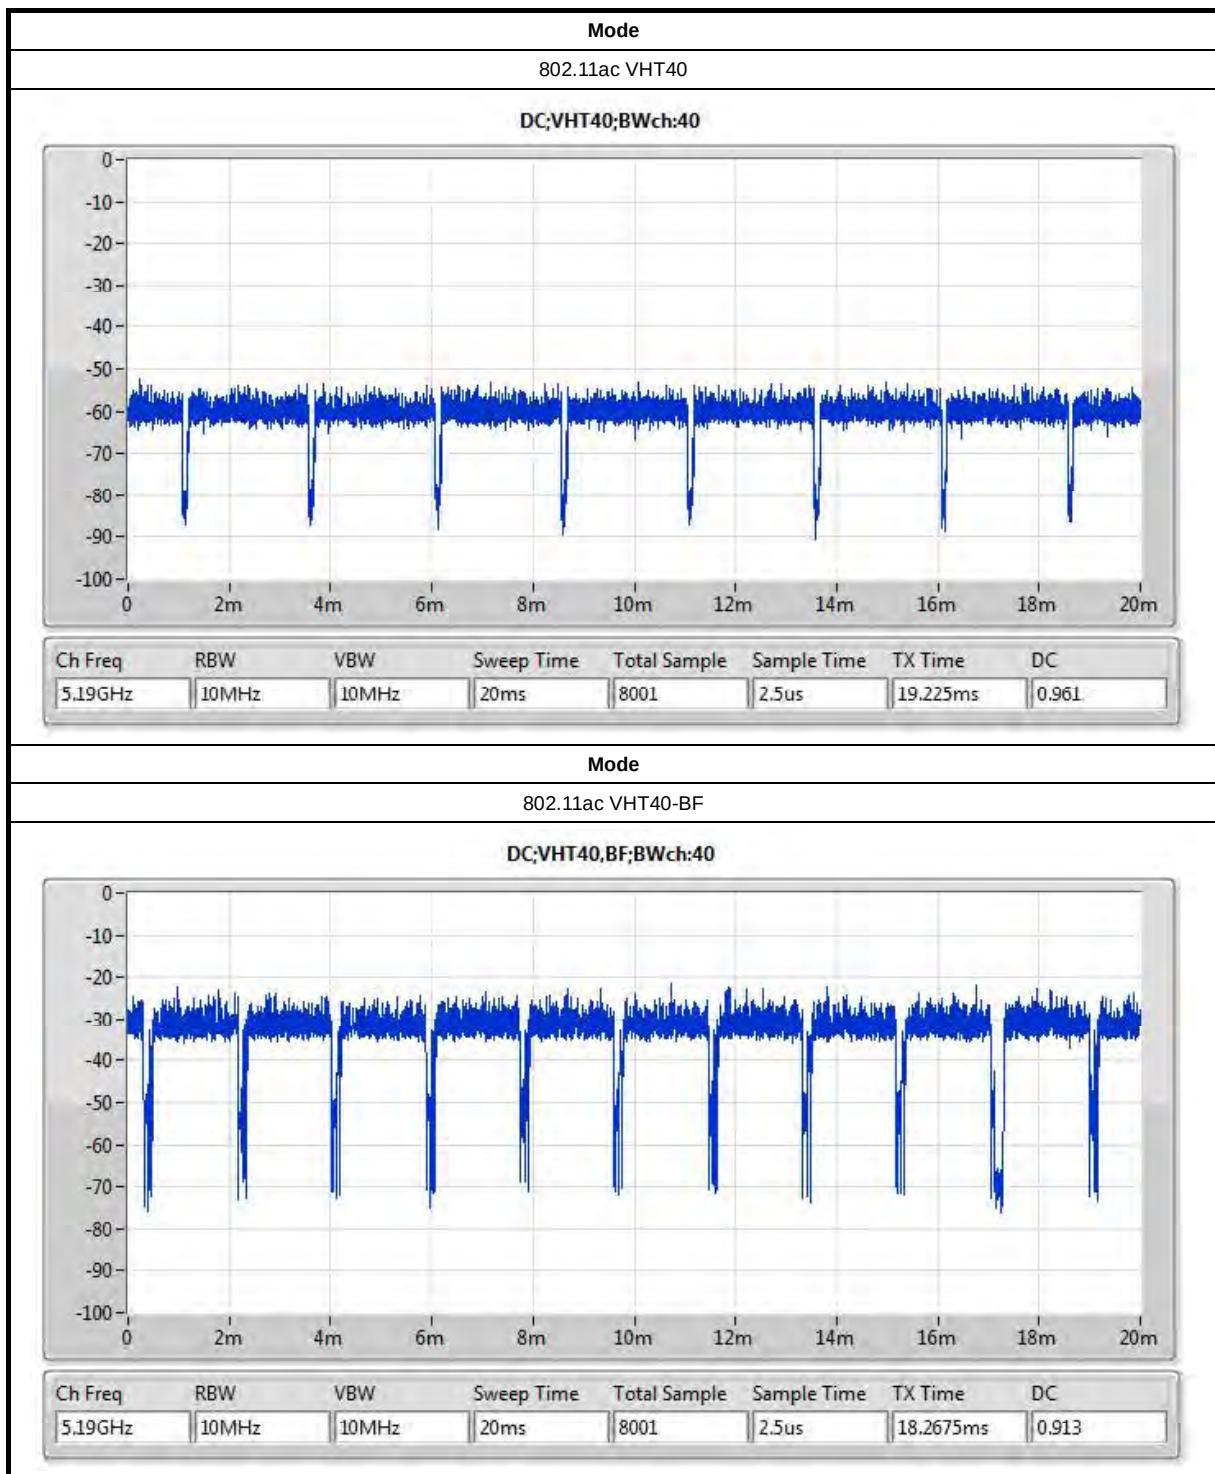

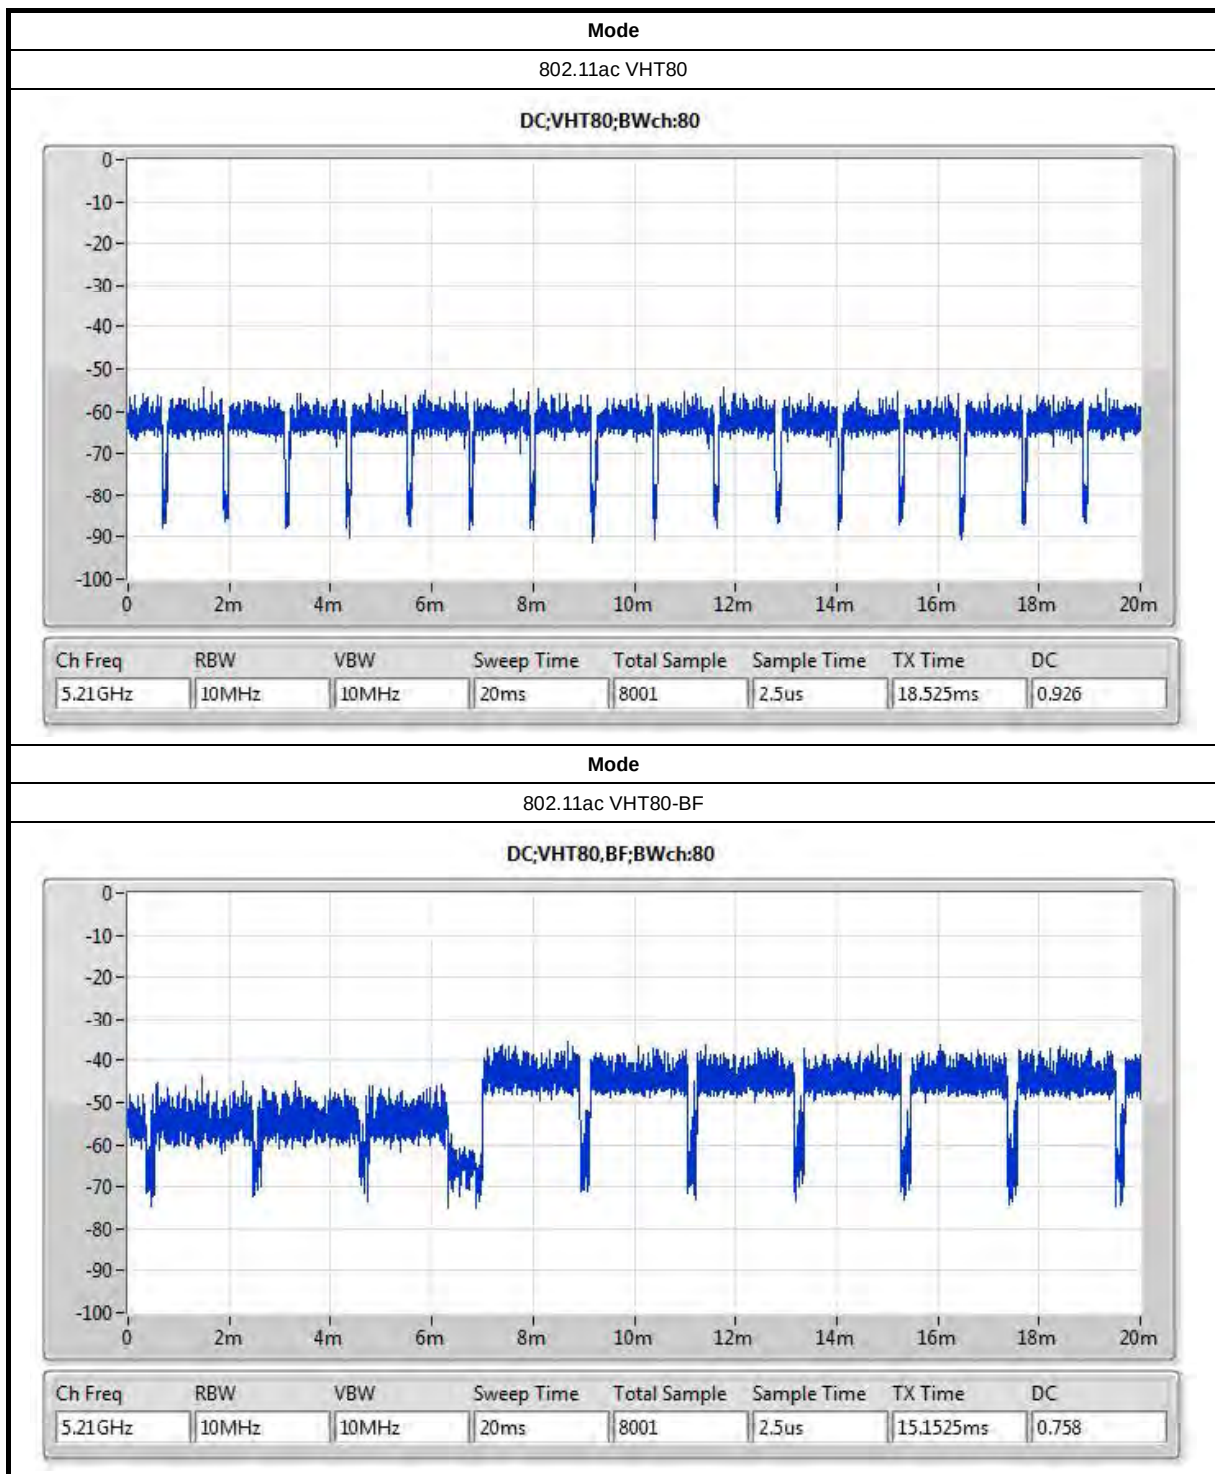

**1.1.4 EUT Operational Condition**

EUT Power Type	From Power Adapter or PoE			
Beamforming Function	☒	With beamforming for 802.11n/ac in 2.4GHz/5GHz.	☐	Without beamforming
Function	☒	Outdoor P2M	☒	Indoor P2M
	☐	Fixed P2P	☐	Client

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
GR60-HW	All the models are identical, the different model names served as marketing strategy.
GR60-HW-US	
GR60-HW-INTL	

From the above models, model: GR60-HW was selected as representative model for the test and its data was recorded in this report.



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01
- ◆ FCC KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-318-0055	
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.		
		TEL : 886-3-656-9065	FAX : 886-3-656-9085	

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Gary Chu & Ron Huang	26.9°C / 62%	Sep. 04, 2017
Radiated	03CH01-CB	Justin Lin & Paul Chen	22°C / 54%	Aug. 31, 2017 ~ Sep. 05, 2017
AC Conduction	CO01-CB	Deven Huang	23°C / 60%	Sep. 05, 2017

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74×10^{-8}	Confidence levels of 95%
Frequency Stability	6.06×10^{-8}	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For indoor use Band 1 and indoor / outdoor use Band 4

Mode	Power Setting
802.11a_(6Mbps)_2TX	-
5180MHz	21
5200MHz	21
5240MHz	21
5745MHz	20
5785MHz	20
5825MHz	23
802.11ac VHT20_Nss1,(MCS0)_2TX	-
5180MHz	19
5200MHz	23
5240MHz	21
5745MHz	23
5785MHz	23
5825MHz	23
802.11ac VHT40_Nss1,(MCS0)_2TX	-
5190MHz	15.5
5230MHz	20.5
5755MHz	23
5795MHz	23
802.11ac VHT80_Nss1,(MCS0)_2TX	-
5210MHz	13.5
5775MHz	19.5
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	21
5200MHz	21
5240MHz	21
5745MHz	21
5785MHz	21
5825MHz	21
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	20
5230MHz	21
5755MHz	21
5795MHz	21
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-



Mode	Power Setting
5210MHz	19
5775MHz	21

For outdoor use Band 1

Mode	Power Setting
802.11a_(6Mbps)_2TX	-
5180MHz	13
5200MHz	13
5240MHz	12.5
802.11ac VHT20_Nss1,(MCS0)_2TX	-
5180MHz	13
5200MHz	13
5240MHz	12.5
802.11ac VHT40_Nss1,(MCS0)_2TX	-
5190MHz	13
5230MHz	12.5
802.11ac VHT80_Nss1,(MCS0)_2TX	-
5210MHz	13.5
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	16
5200MHz	15.5
5240MHz	15.5
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	15.5
5230MHz	15.5
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-
5210MHz	15.5

Note:

- ♦ VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- ♦ There are two modes of EUT for 802.11ac in 2.4GHz/5GHz. One is beamforming mode, and the other is non-beamforming mode. Both modes have been tested and recorded in this test report.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT + Adapter
2	EUT + PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in Y axis + Adapter
2	EUT in Z axis + Adapter
Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT in Z axis + PoE
For operating mode 2 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	The EUT was performed at Y axis and Z axis position for radiated emission below 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix A for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz
Refer to Sporton Test Report No.: FA782229-04AB for Co-location RF Exposure Evaluation.	

Note1: The PoE was for measurement only, would not be marketed.

The PoE information as below:

Support Unit	Brand	Model Number
PoE	CISCO	MA-INJ-4

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by RX Device and transmit duty cycle no less than 98%.

For Normal Link:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	CISCO	KSAS0361200250HU	INPUT: 100-240V ~ 50/60Hz 1.0A OUTPUT: 12V, 2.5A
Other			
Wall-mounted rack*1			

2.5 Support Equipment

For Test Site No: C001-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E6430	DoC
2	NB	DELL	E6430	DoC
3	NB	DELL	E6430	DoC
4	PoE	CISCO	MA-INJ-4	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	NB	Apple	Mac Book	DoC
3	NB	Apple	Mac Book	DoC

For Test Site No: 03CH01-CB (above 1GHz)

<For Non-Beamforming Mode>

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC


<For Beamforming Mode>


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	NB	DELL	E4300	DoC
3	RX Device	CISCO	GR60-HW	UDX-60067010


**For Test Site No: TH01-CB**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC

2.6 Test Setup Diagram

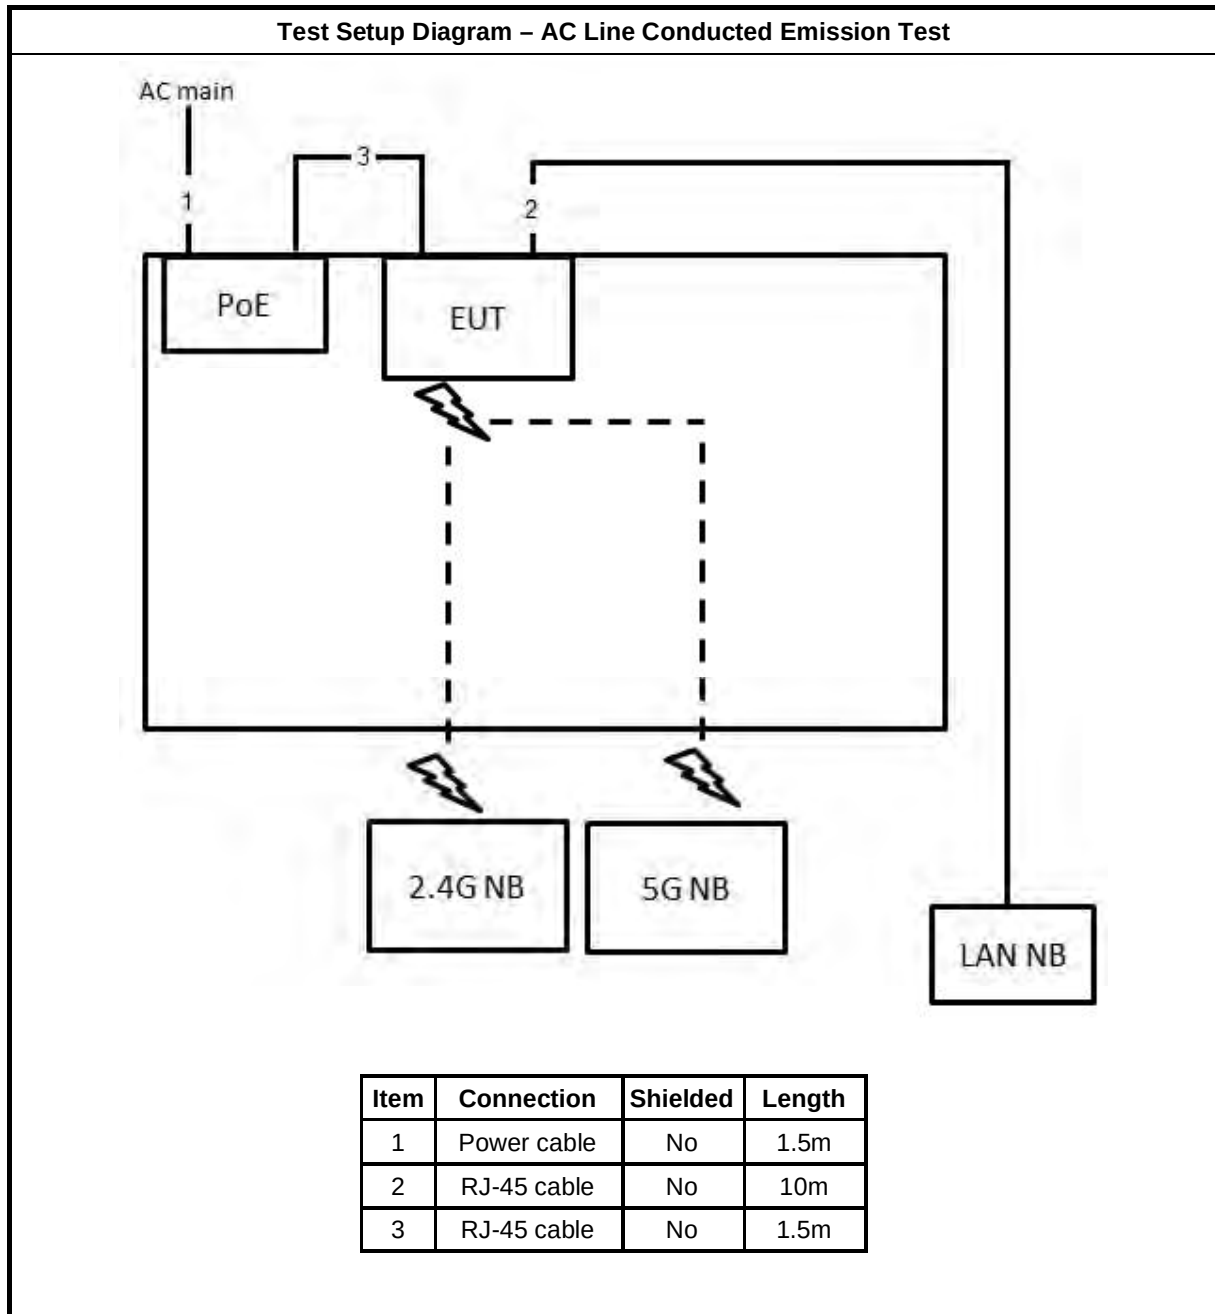

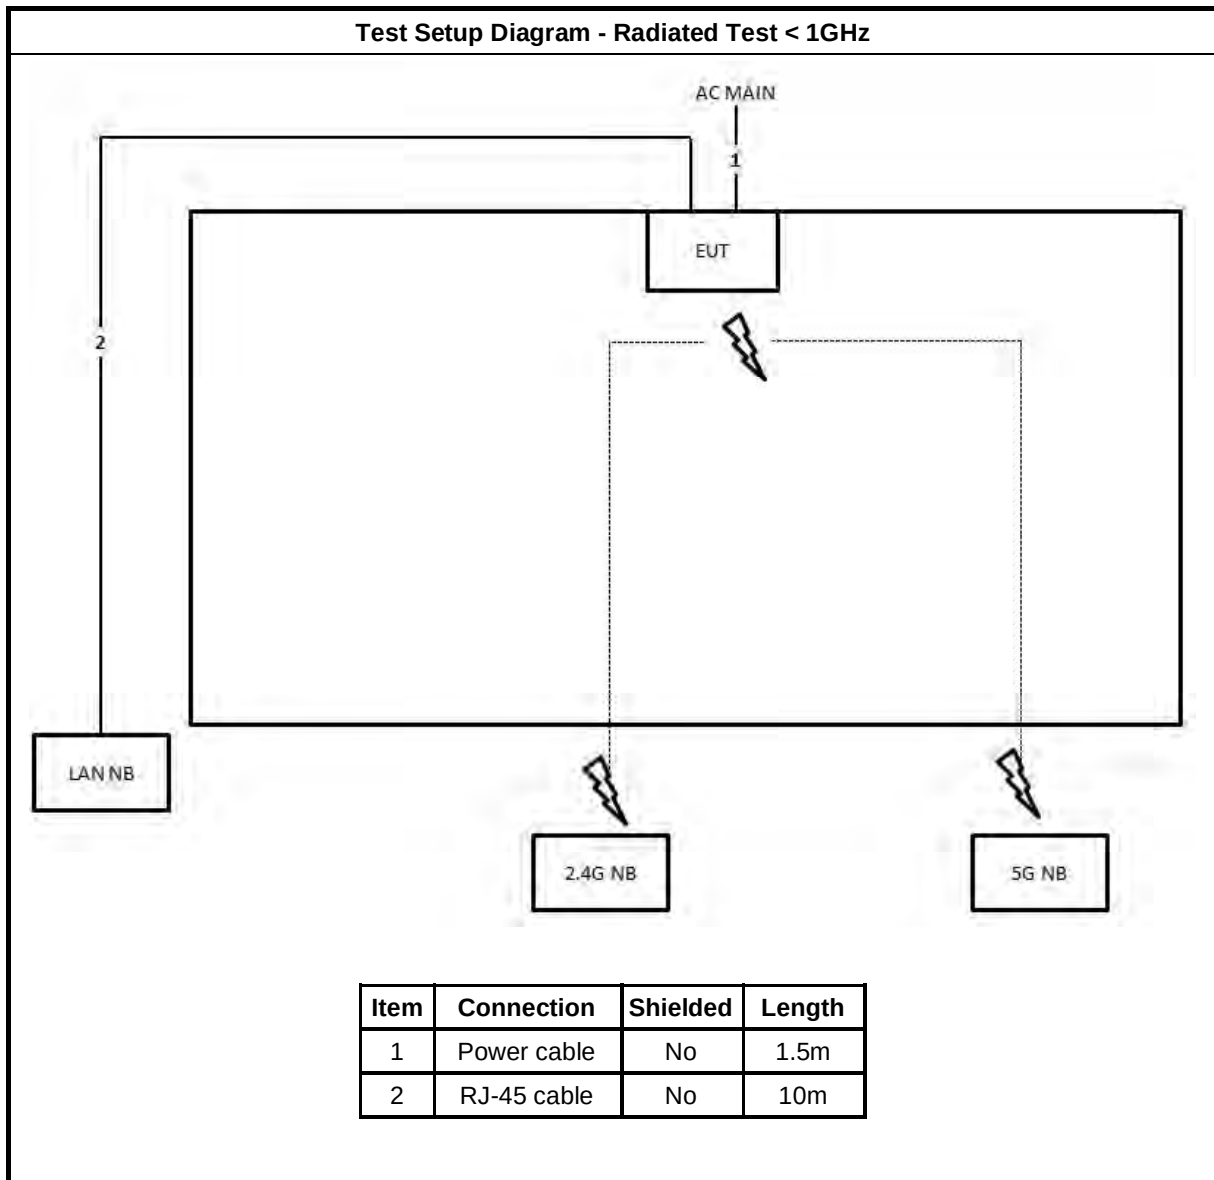
Test Setup Diagram - Radiated Test < 1GHz

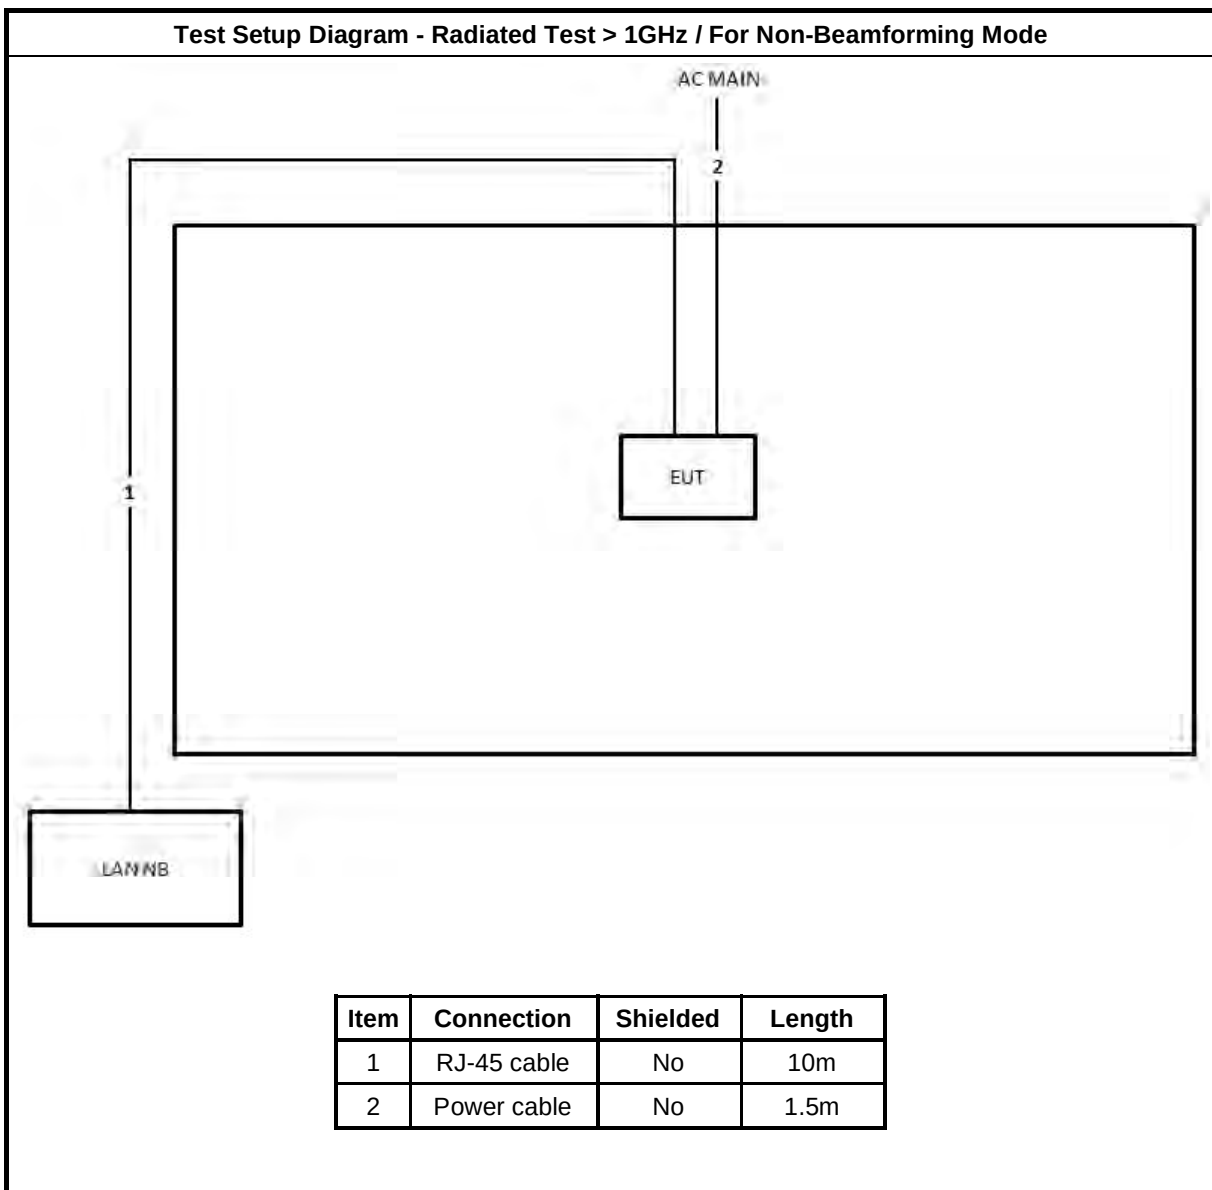
Test Setup Diagram - Radiated Test > 1GHz / For Non-Beamforming Mode

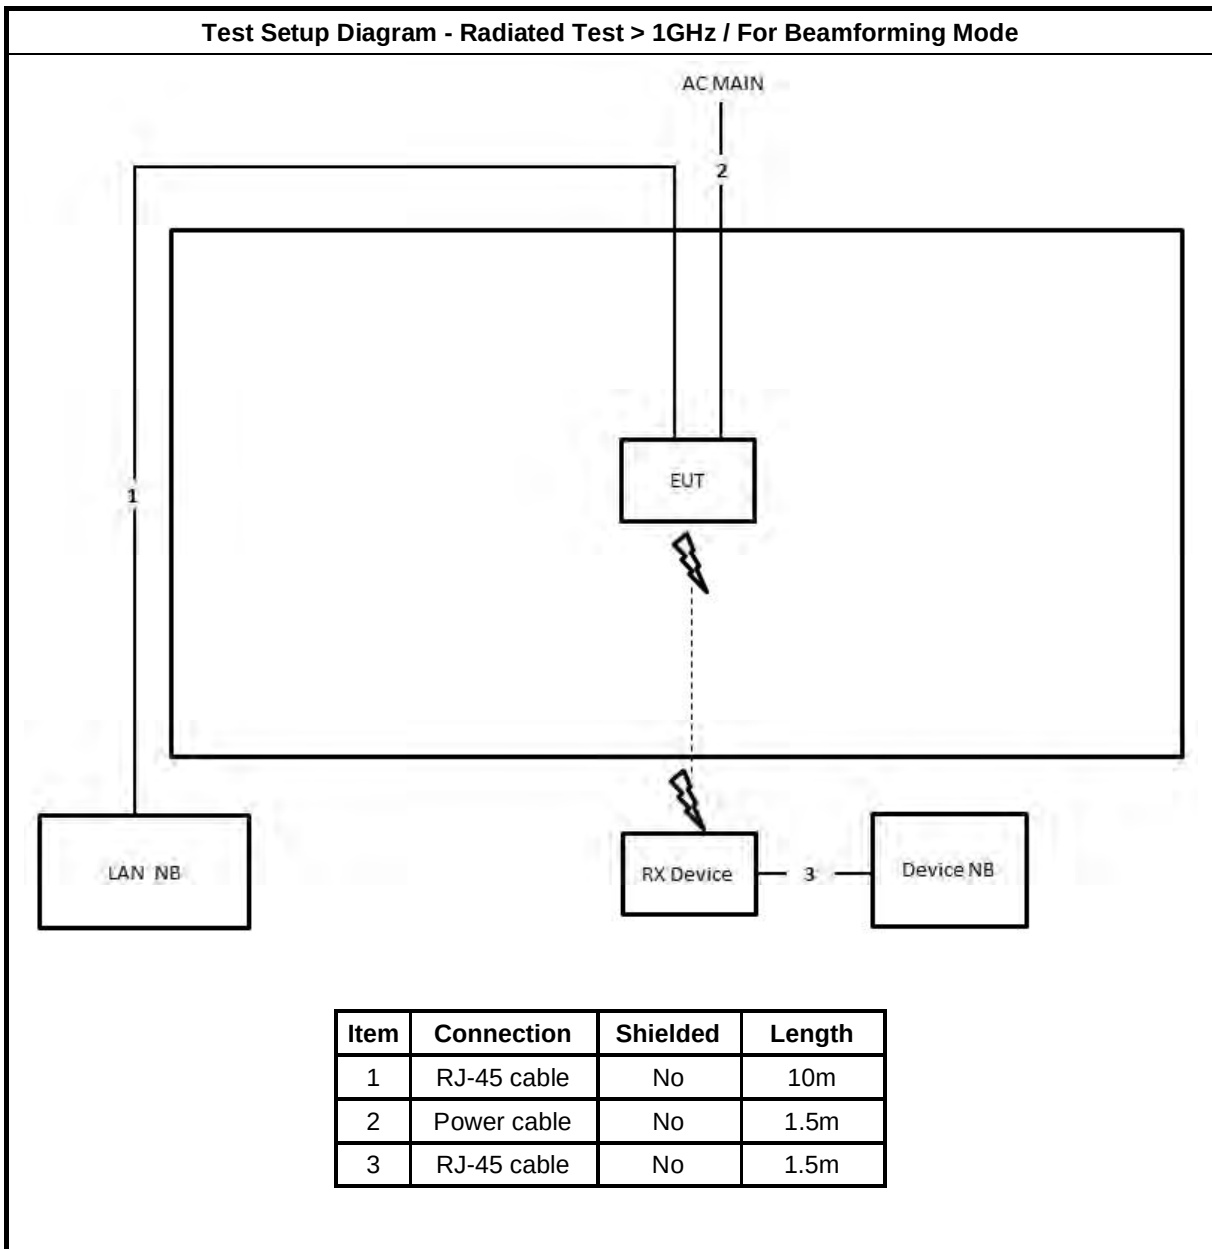
Test Setup Diagram - Radiated Test > 1GHz / For Beamforming Mode


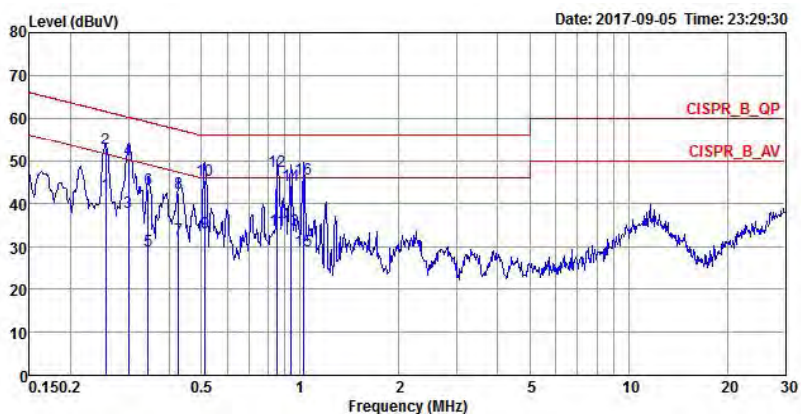


3.1.5 Test Result of AC Power-line Conducted Emissions

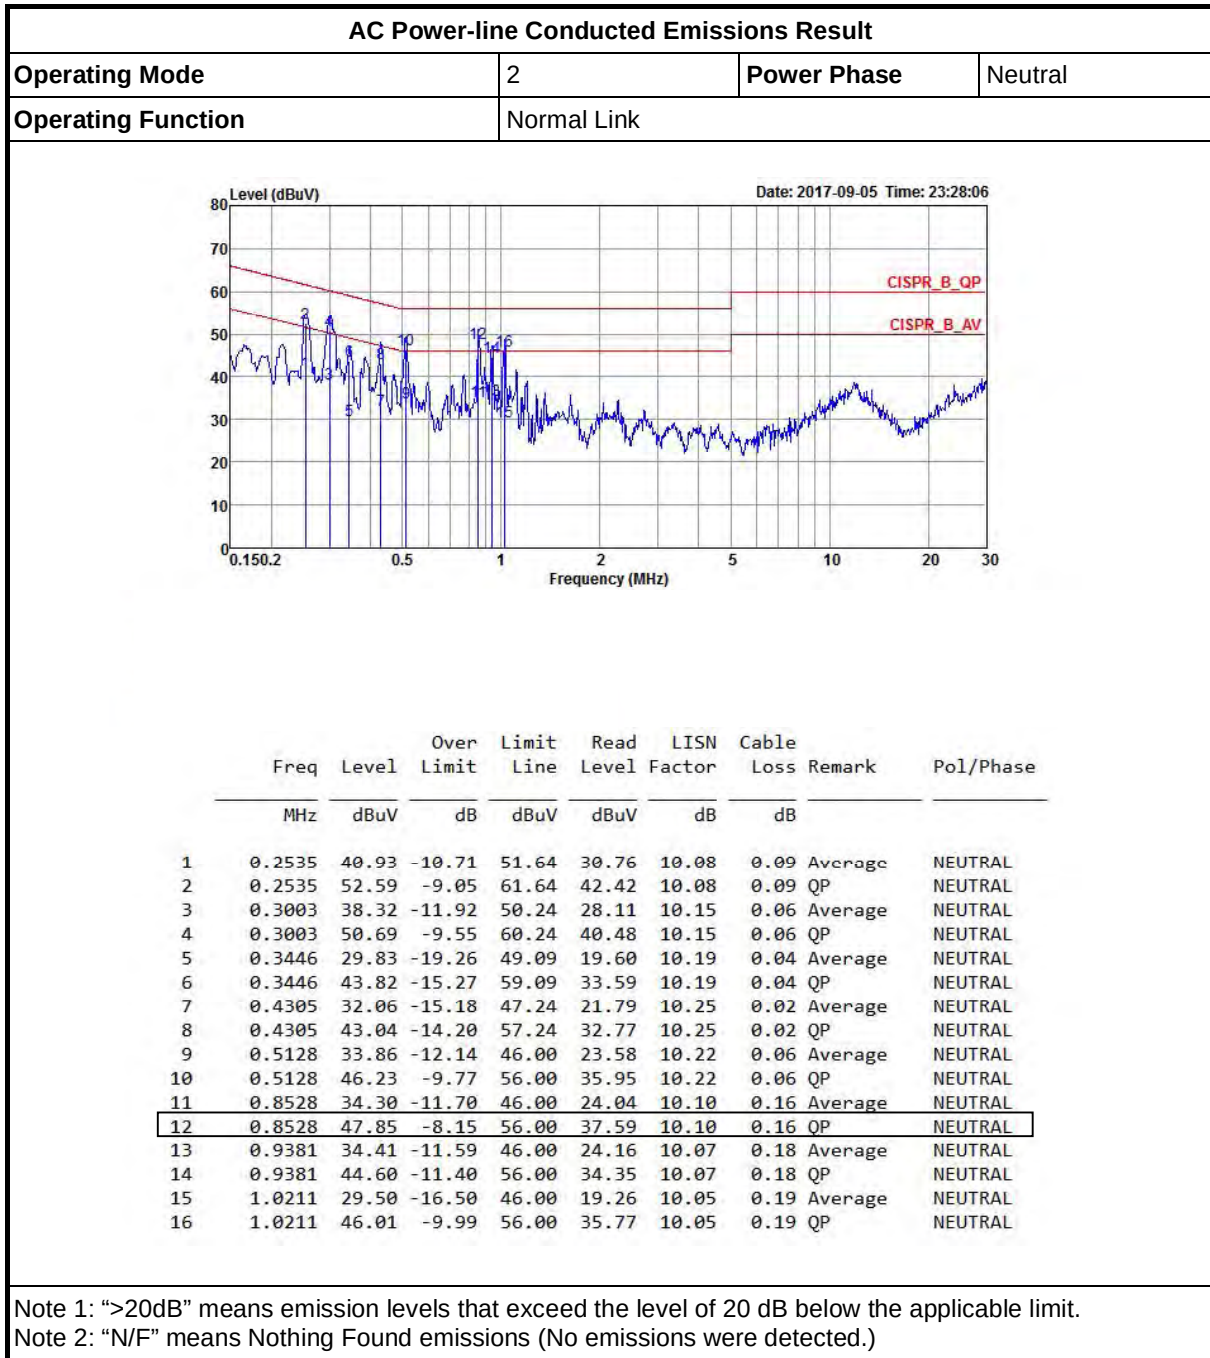

**AC Power-line Conducted Emissions Result**

Operating Mode	2	Power Phase	Line
Operating Function	Normal Link		



	Freq	Level	Over	Limit	Read	LISN	Cable	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.2562	42.23	-9.33	51.56	32.22	9.92	0.09	Average	LINE
2	0.2562	52.73	-8.83	61.56	42.72	9.92	0.09	QP	LINE
3	0.3003	38.18	-12.06	50.24	28.19	9.93	0.06	Average	LINE
4	0.3003	50.26	-9.98	60.24	40.27	9.93	0.06	QP	LINE
5	0.3446	29.34	-19.75	49.09	19.36	9.94	0.04	Average	LINE
6	0.3446	43.34	-15.75	59.09	33.36	9.94	0.04	QP	LINE
7	0.4260	31.91	-15.42	47.33	21.94	9.95	0.02	Average	LINE
8	0.4260	42.46	-14.87	57.33	32.49	9.95	0.02	QP	LINE
9	0.5128	33.28	-12.72	46.00	23.27	9.95	0.06	Average	LINE
10	0.5128	45.59	-10.41	56.00	35.58	9.95	0.06	QP	LINE
11	0.8528	33.87	-12.13	46.00	23.75	9.96	0.16	Average	LINE
12	0.8528	47.44	-8.56	56.00	37.32	9.96	0.16	QP	LINE
13	0.9381	33.86	-12.14	46.00	23.72	9.96	0.18	Average	LINE
14	0.9381	44.33	-11.67	56.00	34.19	9.96	0.18	QP	LINE
15	1.0211	29.22	-16.78	46.00	19.07	9.96	0.19	Average	LINE
16	1.0211	45.75	-10.25	56.00	35.60	9.96	0.19	QP	LINE

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☐	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

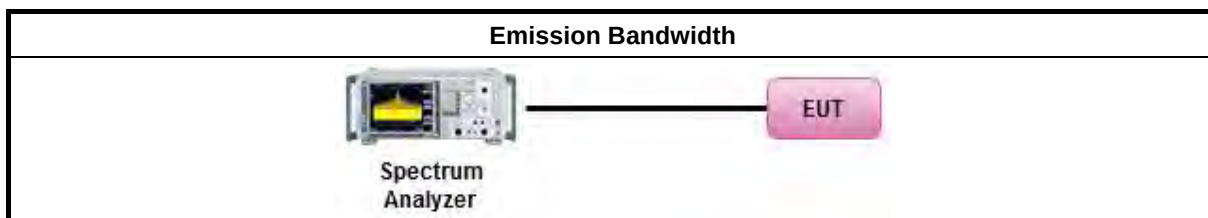

3.2.5 Test Result of Emission Bandwidth

For indoor use Band 1 and indoor / outdoor use Band 4

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
802.11a_(6Mbps)_2TX	-	-	-	-	-
5.15-5.25GHz	41.925M	18.116M	18M1D1D	37.425M	16.867M
5.725-5.85GHz	16.3M	33.683M	33M7D1D	16.05M	16.492M
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	48.425M	28.461M	28M5D1D	26.45M	17.666M
5.725-5.85GHz	17.575M	35.932M	35M9D1D	3.74M	9.535M
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	89.05M	38.181M	38M2D1D	39.6M	35.932M
5.725-5.85GHz	35M	70.015M	70M0D1D	30.05M	59.17M
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	83.6M	75.762M	75M8D1D	83.2M	75.662M
5.725-5.85GHz	75.1M	76.462M	76M5D1D	72.5M	75.862M
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	21.95M	17.666M	17M7D1D	20.775M	17.616M
5.725-5.85GHz	17.575M	17.691M	17M7D1D	17.25M	17.591M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	46.35M	36.082M	36M1D1D	39.45M	35.982M
5.725-5.85GHz	35.6M	36.082M	36M1D1D	35M	35.982M
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	83.2M	75.662M	75M7D1D	82.4M	75.562M
5.725-5.85GHz	75.3M	75.862M	75M9D1D	71.9M	75.662M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	41.925M	17.741M	38.125M	16.867M
5200MHz	Pass	Inf	39.725M	16.942M	37.425M	16.942M
5240MHz	Pass	Inf	38.75M	17.091M	41.35M	18.116M
5745MHz	Pass	500k	16.3M	16.942M	16.3M	16.492M
5785MHz	Pass	500k	16.275M	16.842M	16.275M	16.517M
5825MHz	Pass	500k	16.05M	33.683M	16.275M	26.837M
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	27.65M	17.716M	26.45M	17.666M
5200MHz	Pass	Inf	48.3M	28.461M	48.425M	28.436M
5240MHz	Pass	Inf	41.2M	18.066M	41.875M	18.541M
5745MHz	Pass	500k	17.525M	35.932M	17.175M	27.086M
5785MHz	Pass	500k	17.575M	35.357M	16.75M	27.236M
5825MHz	Pass	500k	17.575M	35.357M	17.3M	28.886M
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.6M	35.932M	39.8M	35.982M
5230MHz	Pass	Inf	85.65M	36.732M	89.05M	38.181M
5755MHz	Pass	500k	33.2M	70.015M	35M	59.17M
5795MHz	Pass	500k	34.45M	67.666M	30.05M	63.468M
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	83.2M	75.762M	83.6M	75.662M
5775MHz	Pass	500k	75.1M	76.462M	72.5M	75.862M
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.95M	17.641M	21.15M	17.641M
5200MHz	Pass	Inf	20.9M	17.666M	20.775M	17.616M
5240MHz	Pass	Inf	21.675M	17.641M	21.225M	17.666M
5745MHz	Pass	500k	17.55M	17.691M	17.575M	17.591M
5785MHz	Pass	500k	17.55M	17.691M	17.55M	17.616M
5825MHz	Pass	500k	17.25M	17.691M	17.55M	17.591M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.45M	35.982M	39.75M	35.982M
5230MHz	Pass	Inf	41.45M	36.082M	46.35M	36.082M
5755MHz	Pass	500k	35M	36.082M	35.6M	35.982M
5795MHz	Pass	500k	35.05M	36.082M	35.05M	36.032M
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	83.2M	75.662M	82.4M	75.562M
5775MHz	Pass	500k	75.3M	75.862M	71.9M	75.662M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth;



802.11a_(6Mbps)_2TX

EBW


5180MHz

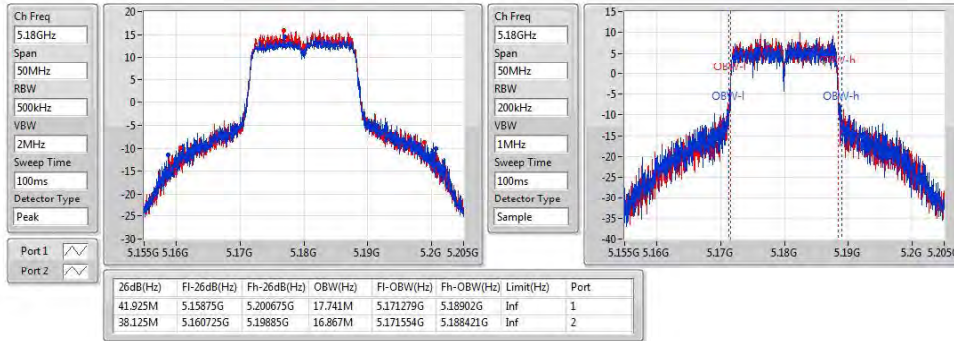

802.11a_(6Mbps)_2TX

EBW


5200MHz

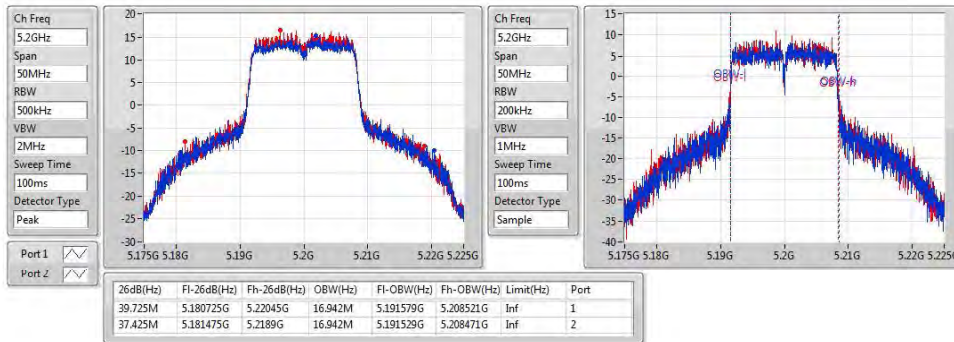

802.11a_(6Mbps)_2TX

EBW


5240MHz

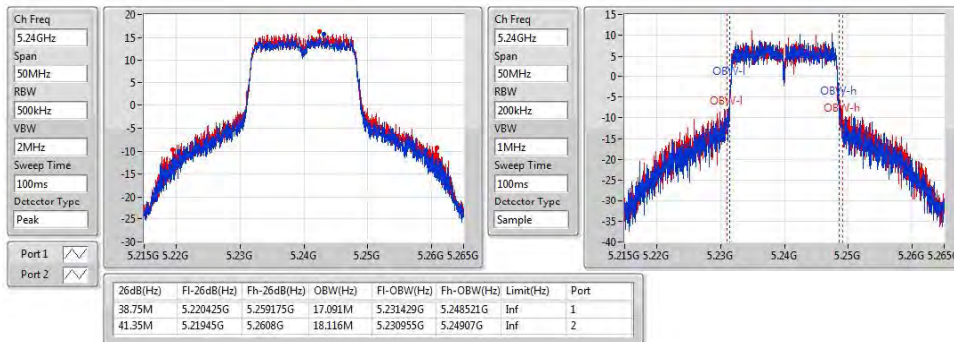

802.11a_(6Mbps)_2TX

EBW


5745MHz

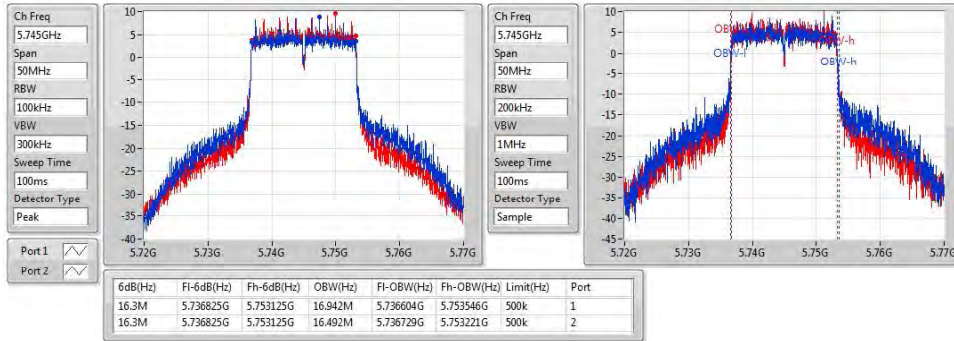

802.11a_(6Mbps)_2TX

EBW


5785MHz

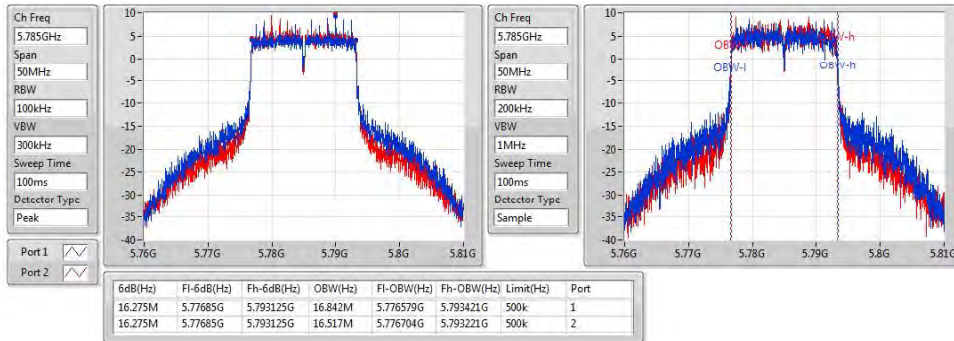

802.11a_(6Mbps)_2TX

EBW

5825MHz

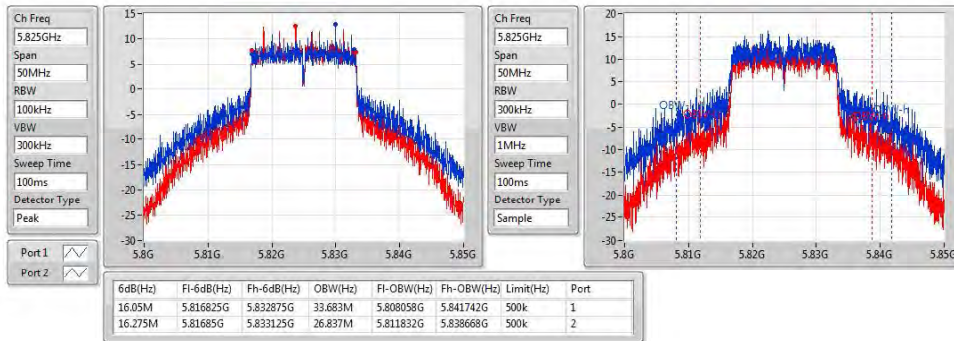




802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


5180MHz

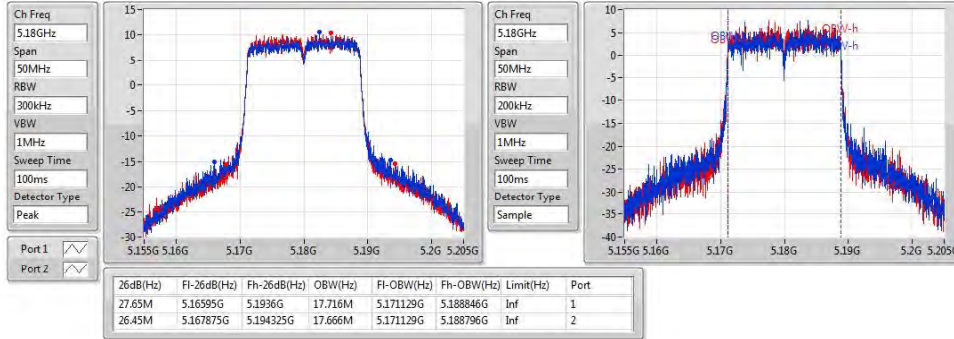

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


5200MHz

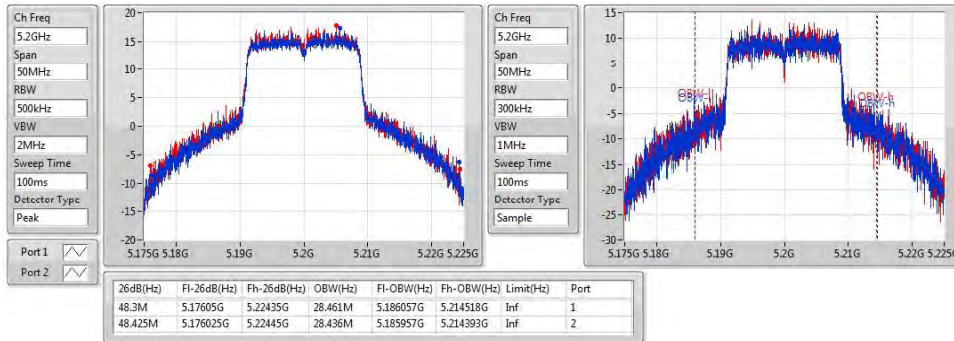

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW

5240MHz

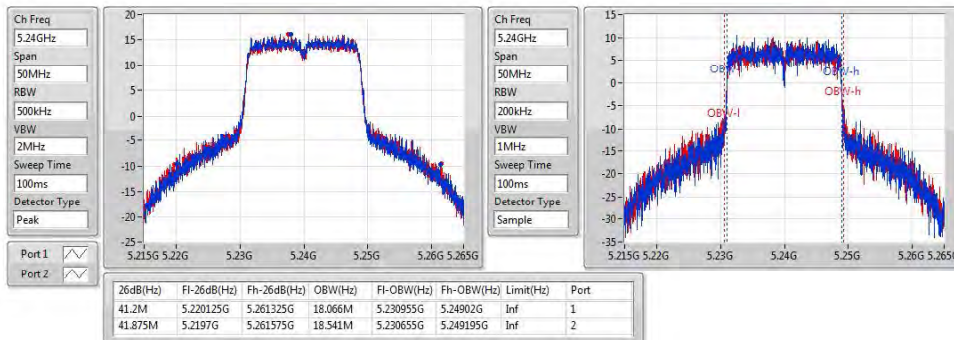




802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


5745MHz

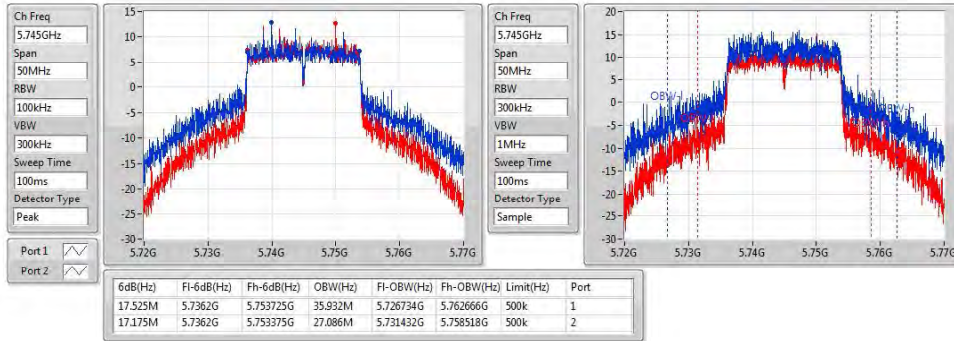

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW


5785MHz

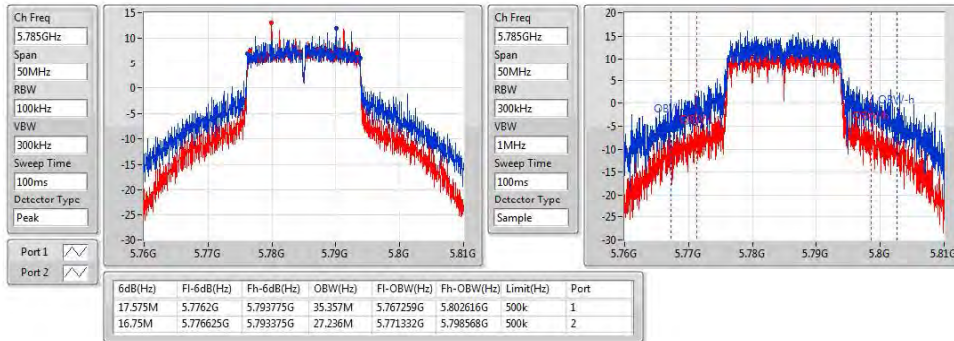

802.11ac VHT20_Nss1,(MCS0)_2TX

EBW

5825MHz

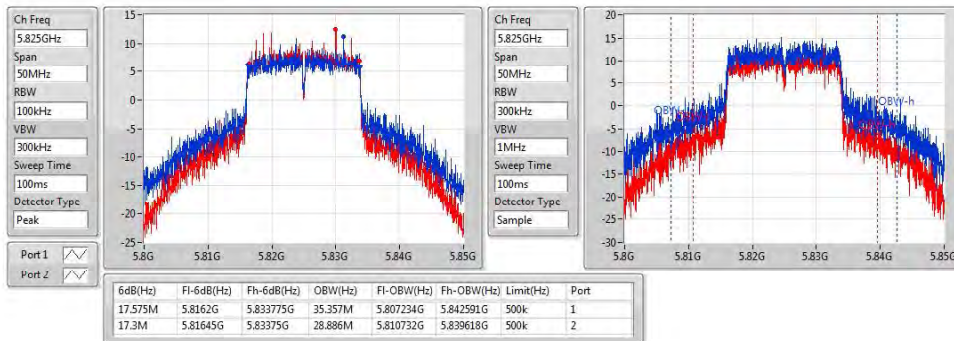




802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


5190MHz

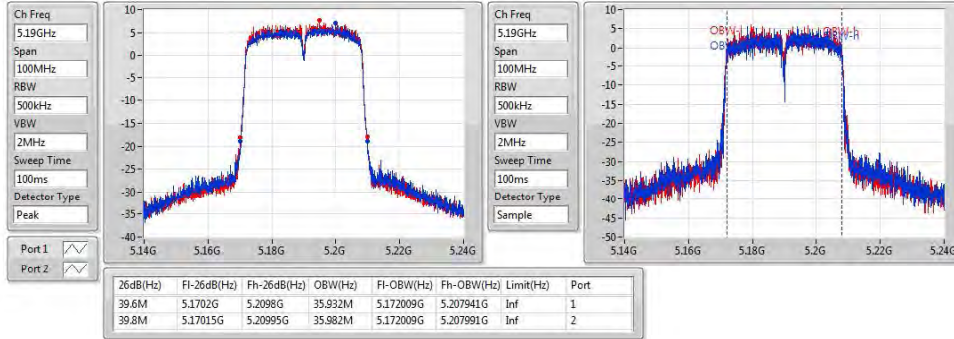

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


5230MHz

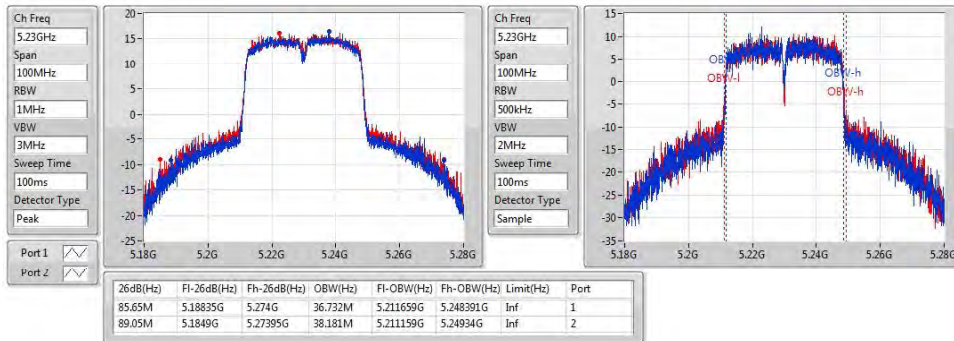

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


5755MHz

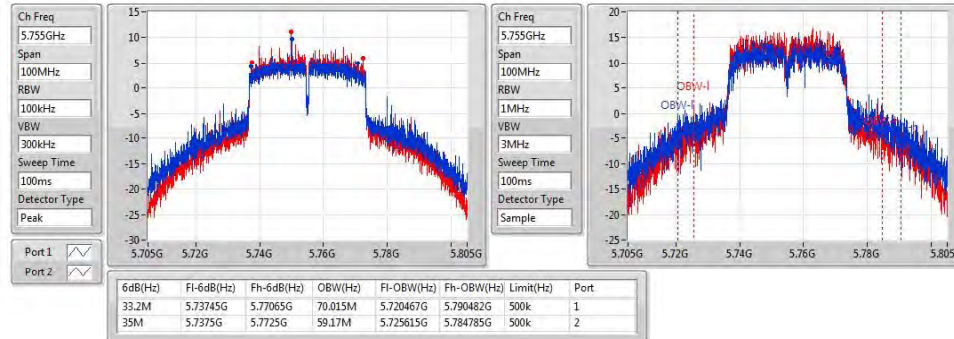

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW


5795MHz

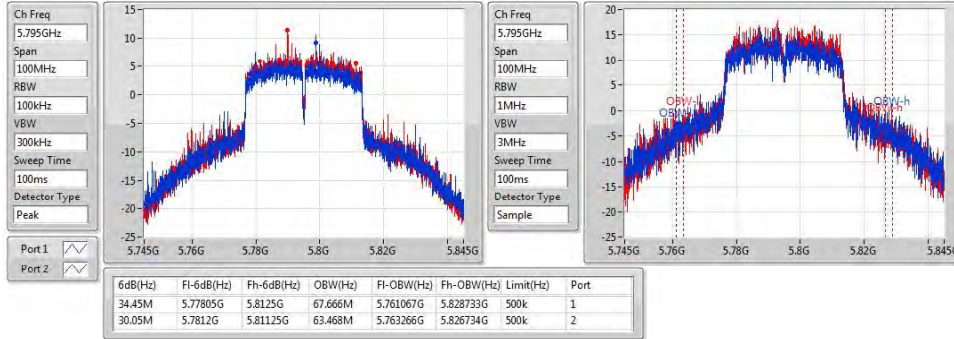

802.11ac VHT80_Nss1,(MCS0)_2TX

EBW


5210MHz



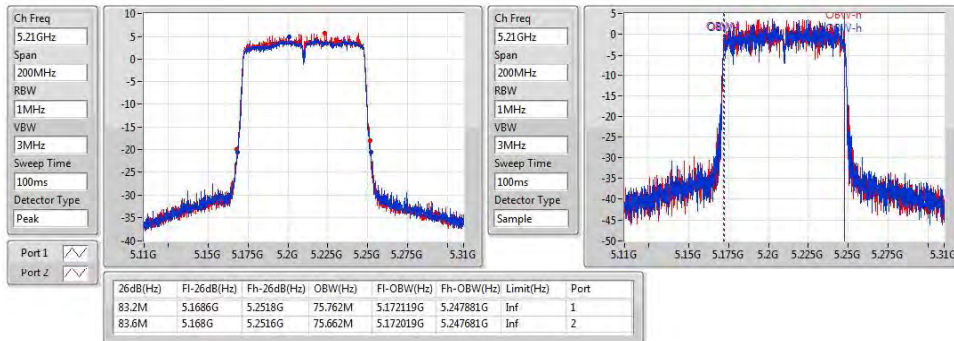


802.11ac VHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

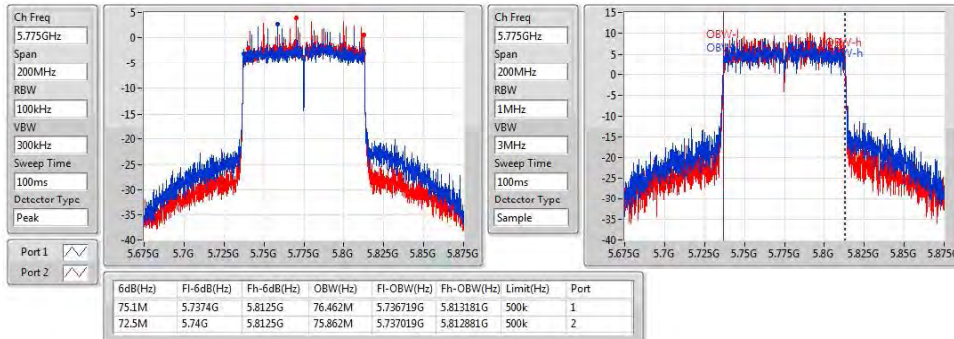

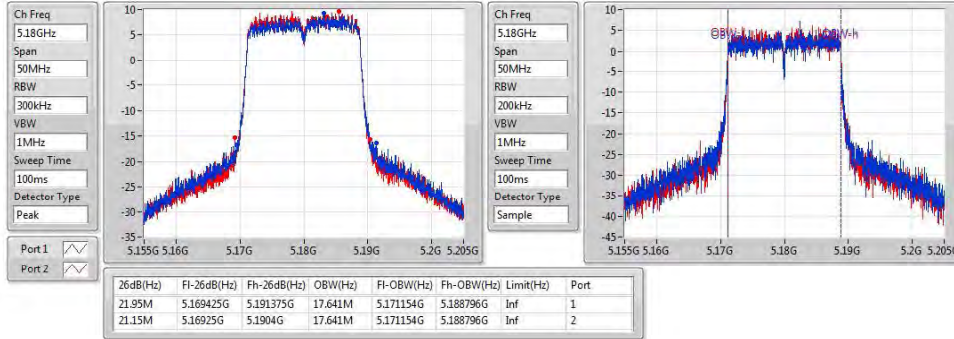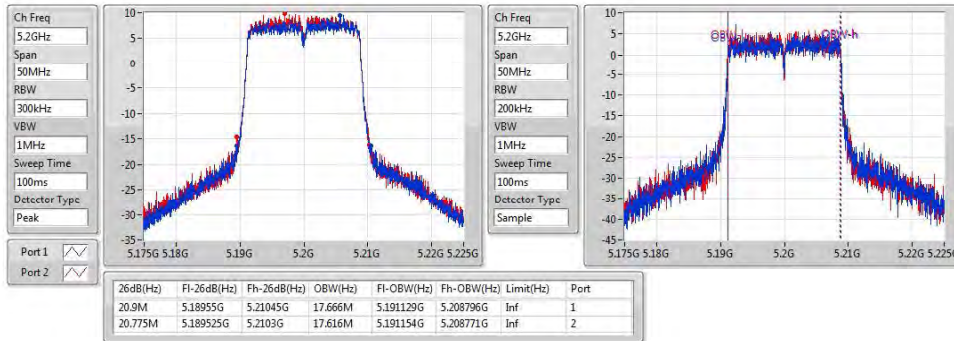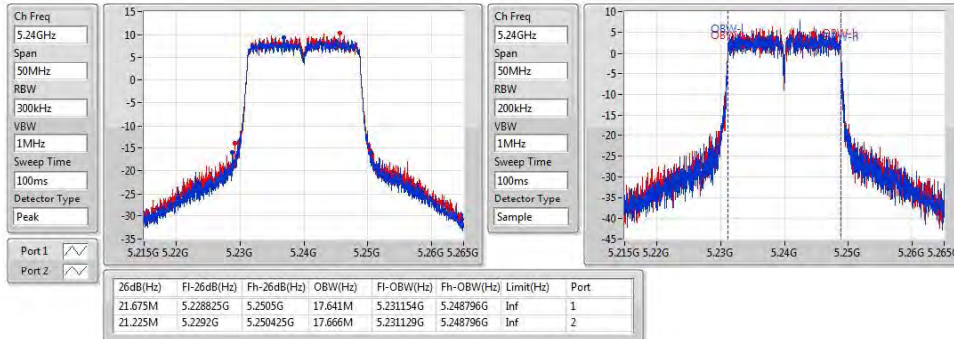
802.11ac VHT20-BF_Nss1,(MCS0)_2TX
EBW
5180MHz

802.11ac VHT20-BF_Nss1,(MCS0)_2TX
EBW
5200MHz

802.11ac VHT20-BF_Nss1,(MCS0)_2TX
EBW
5240MHz




802.11ac VHT20-BF_Nss1,(MCS0)_2TX

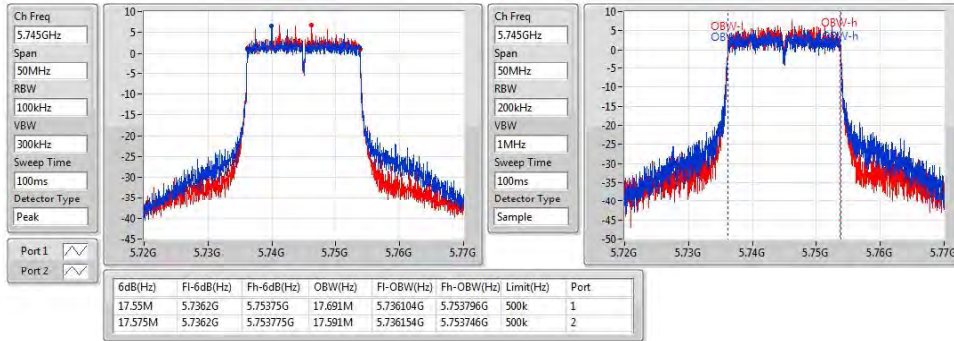EBW


5745MHz



802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW


5785MHz

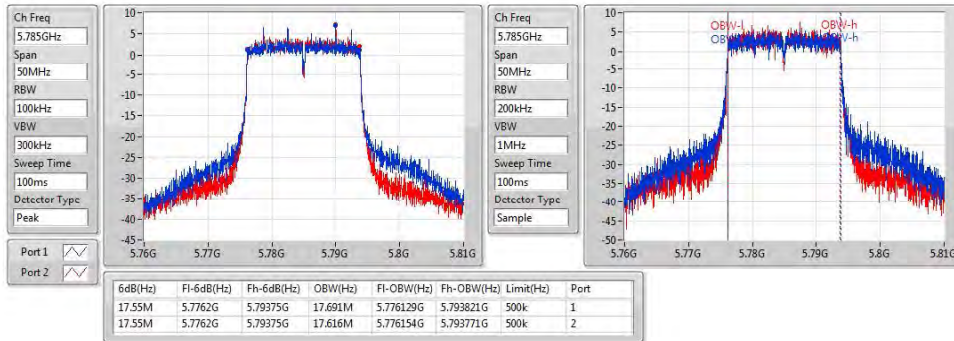

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

5825MHz

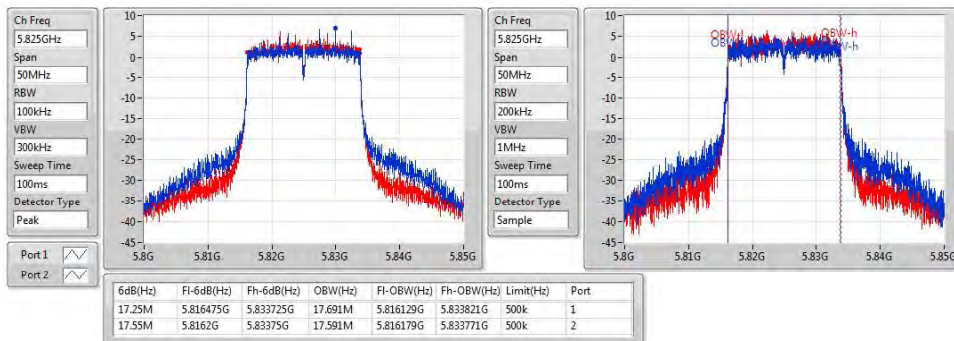




802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW


5190MHz

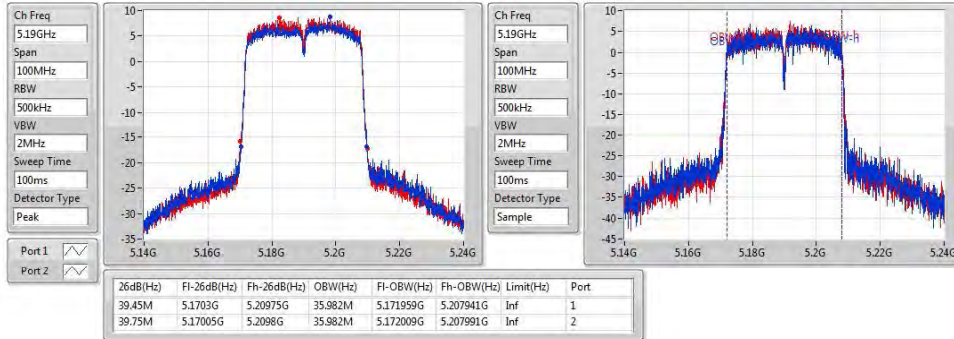

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW


5230MHz

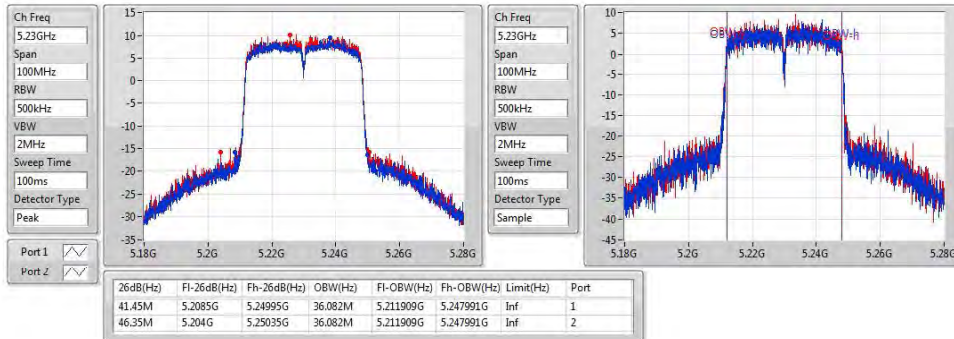

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW

5755MHz

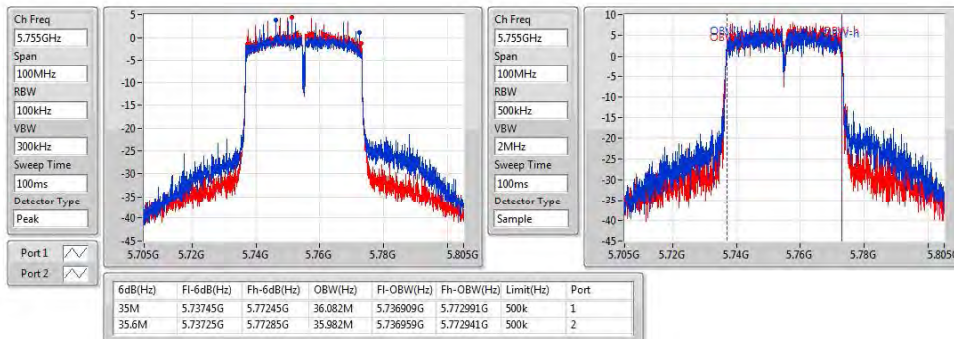




802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW


5795MHz

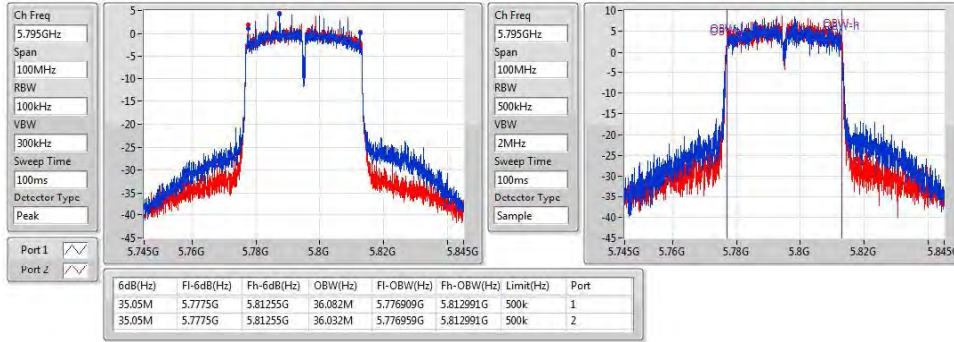

802.11ac VHT80-BF_Nss1,(MCS0)_2TX

EBW


5210MHz

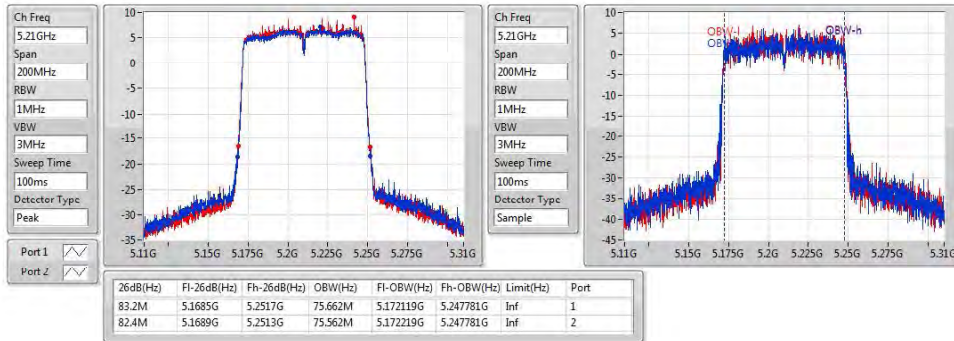

802.11ac VHT80-BF_Nss1,(MCS0)_2TX

EBW

5775MHz

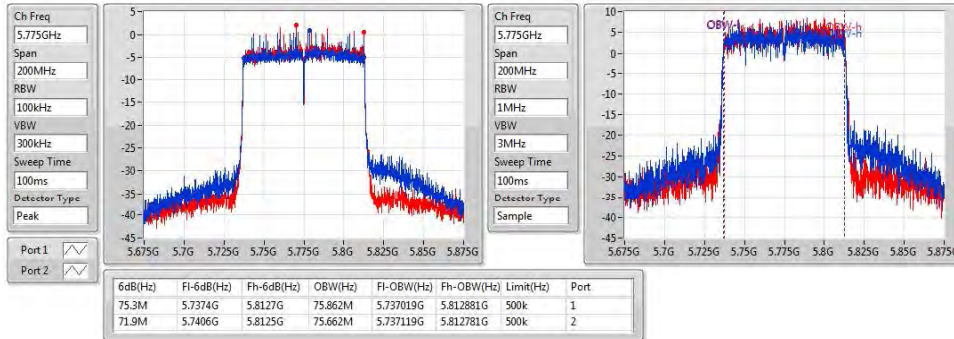

**For outdoor use Band 1****Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
802.11a_(6Mbps)_2TX	-	-	-	-	-
5.15-5.25GHz	19.3M	16.442M	16M4D1D	18.825M	16.392M
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	20.45M	17.641M	17M6D1D	19.925M	17.616M
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	39.75M	35.982M	36M0D1D	39.1M	35.882M
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	83.6M	75.762M	75M8D1D	83.1M	75.562M
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	20.475M	17.641M	17M6D1D	19.95M	17.591M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	39.65M	36.032M	36M0D1D	39.45M	35.932M
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-
5.15-5.25GHz	83.4M	75.862M	75M9D1D	83.3M	75.562M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.3M	16.417M	18.9M	16.392M
5200MHz	Pass	Inf	19.225M	16.442M	18.9M	16.417M
5240MHz	Pass	Inf	18.9M	16.392M	18.825M	16.392M
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.45M	17.616M	19.925M	17.616M
5200MHz	Pass	Inf	20.25M	17.641M	19.925M	17.616M
5240MHz	Pass	Inf	20.375M	17.616M	20.2M	17.616M
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.75M	35.932M	39.4M	35.982M
5230MHz	Pass	Inf	39.4M	35.882M	39.1M	35.982M
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	83.6M	75.562M	83.1M	75.762M
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.425M	17.616M	20.4M	17.591M
5200MHz	Pass	Inf	20.475M	17.641M	19.95M	17.591M
5240MHz	Pass	Inf	19.975M	17.641M	19.95M	17.616M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.65M	35.932M	39.6M	35.982M
5230MHz	Pass	Inf	39.45M	35.982M	39.55M	36.032M
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	83.3M	75.562M	83.4M	75.862M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band**Port X-OBW** = Port X 99% occupied bandwidth;



802.11a_(6Mbps)_2TX

EBW

5180MHz

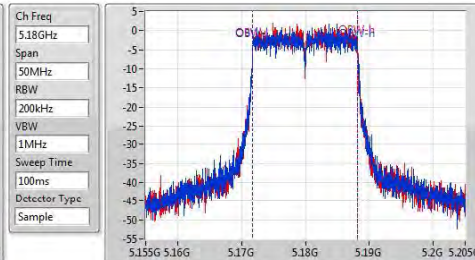
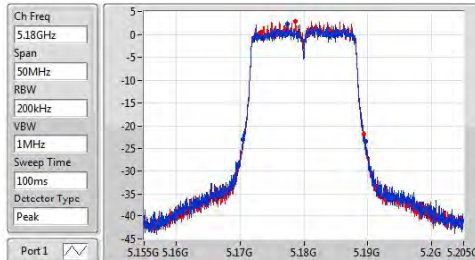


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.3M	5.170425G	5.189725G	16.417M	5.171754G	5.188171G	Inf	1
18.9M	5.1705G	5.1894G	16.392M	5.171779G	5.188171G	Inf	2

802.11a_(6Mbps)_2TX

EBW

5200MHz

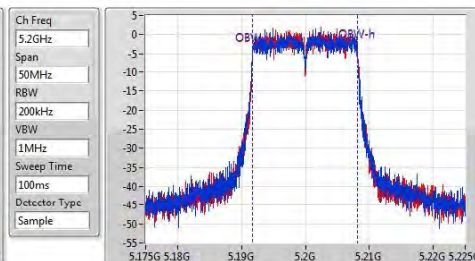
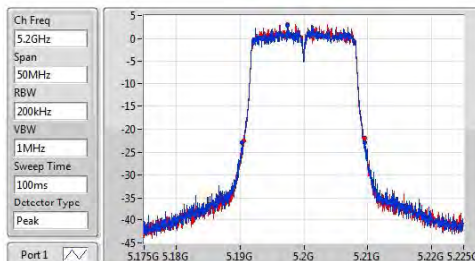


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.225M	5.190375G	5.2096G	16.442M	5.191729G	5.208171G	Inf	1
18.9M	5.1906G	5.2095G	16.417M	5.191754G	5.208171G	Inf	2



802.11a_(6Mbps)_2TX

EBW



5240MHz

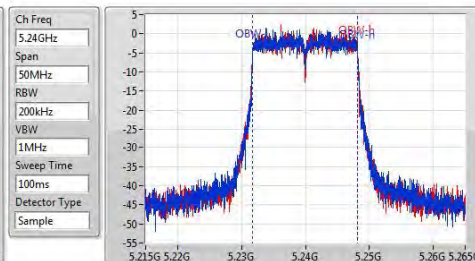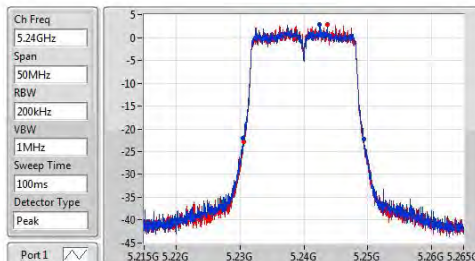



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.9M	5.230525G	5.249425G	16.392M	5.231779G	5.248171G	Inf	1
18.825M	5.23055G	5.249375G	16.392M	5.231754G	5.248146G	Inf	2

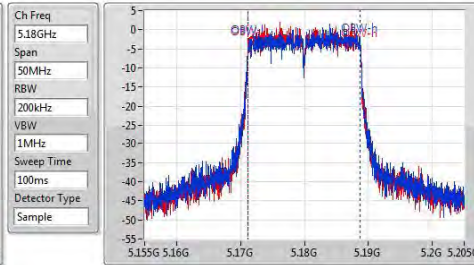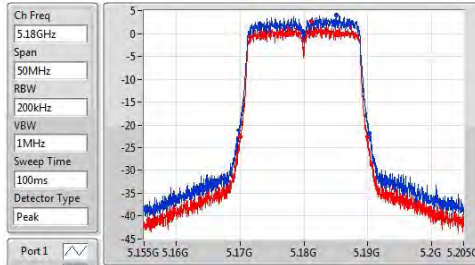802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5180MHz


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.45M	5.16975G	5.1902G	17.616M	5.171154G	5.188771G	Inf	1
19.925M	5.169975G	5.1899G	17.616M	5.171154G	5.188771G	Inf	2

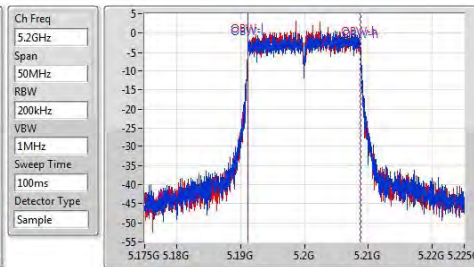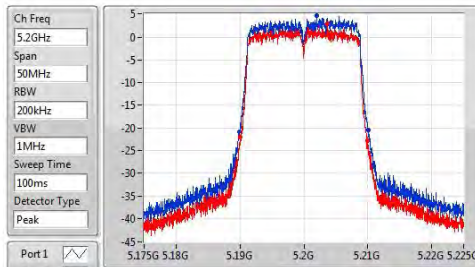802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5200MHz


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.25M	5.18985G	5.2101G	17.641M	5.191154G	5.208796G	Inf	1
19.925M	5.190075G	5.21G	17.616M	5.191154G	5.208771G	Inf	2

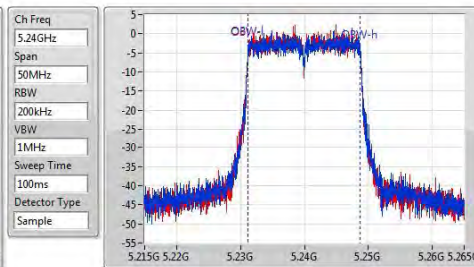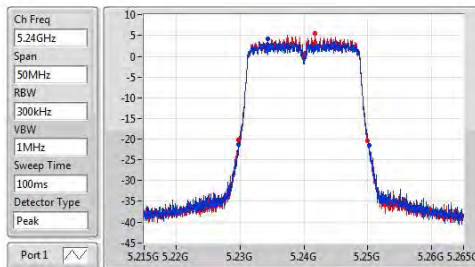802.11ac VHT20_Nss1,(MCS0)_2TX
EBW
5240MHz


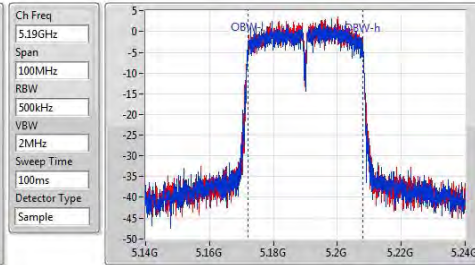
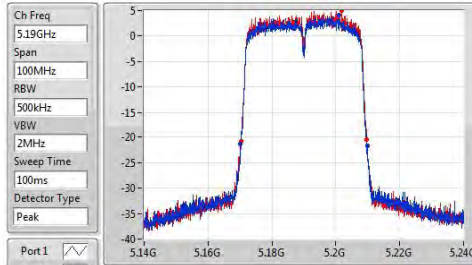
26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.375M	5.229825G	5.2502G	17.616M	5.231154G	5.248771G	Inf	1
20.2M	5.229825G	5.250025G	17.616M	5.231154G	5.248771G	Inf	2



802.11ac VHT40_Nss1,(MCS0)_2TX

EBW

5190MHz





26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.75M	5.17015G	5.2099G	35.832M	5.172009G	5.207941G	Inf	1
39.4M	5.17035G	5.20975G	35.982M	5.171959G	5.207941G	Inf	2

802.11ac VHT40_Nss1,(MCS0)_2TX

EBW

5230MHz

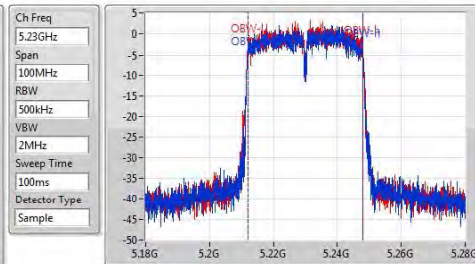
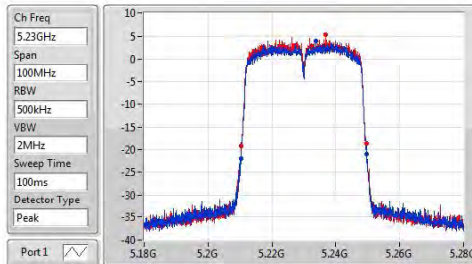


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.4M	5.21025G	5.24965G	35.882M	5.212059G	5.247941G	Inf	1
39.1M	5.2104G	5.2495G	35.982M	5.211959G	5.247941G	Inf	2

802.11ac VHT80_Nss1,(MCS0)_2TX

EBW

5210MHz

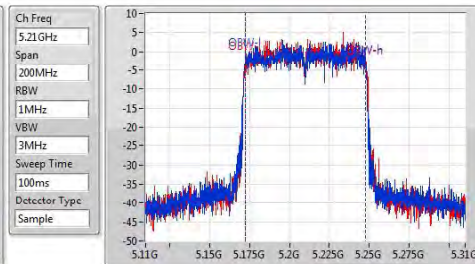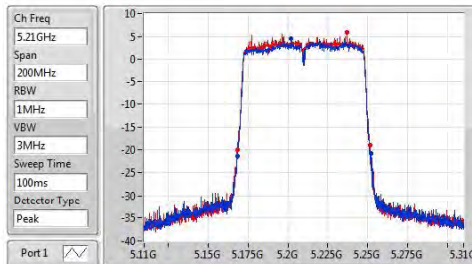



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
83.6M	5.1683G	5.2519G	75.562M	5.172219G	5.247781G	Inf	1
83.1M	5.1683G	5.2514G	75.762M	5.172119G	5.247881G	Inf	2



802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

5180MHz

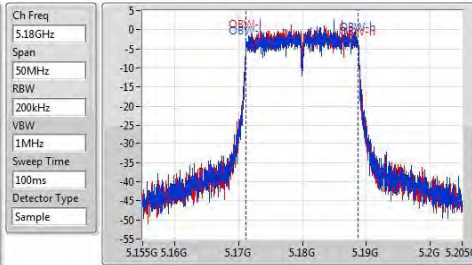
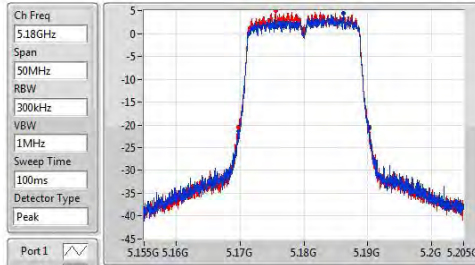


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.425M	5.169775G	5.1902G	17.616M	5.171154G	5.188771G	Inf	1
20.4M	5.169775G	5.190175G	17.591M	5.171179G	5.188771G	Inf	2

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

5200MHz

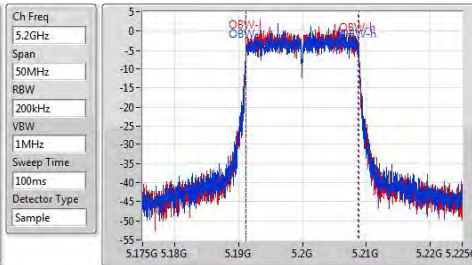
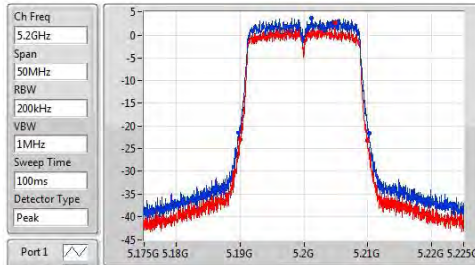


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.475M	5.1897G	5.210175G	17.641M	5.191154G	5.208796G	Inf	1
19.95M	5.189775G	5.209925G	17.591M	5.191179G	5.208771G	Inf	2

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

5240MHz

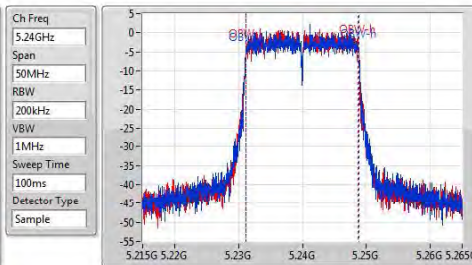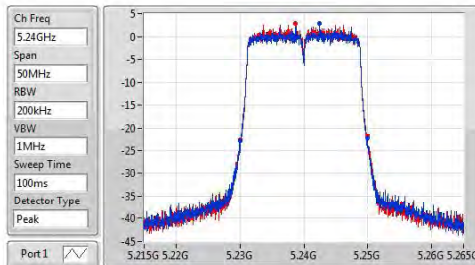


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.975M	5.23G	5.249975G	17.641M	5.231154G	5.248796G	Inf	1
19.95M	5.23005G	5.25G	17.616M	5.231154G	5.248771G	Inf	2



802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW


5190MHz

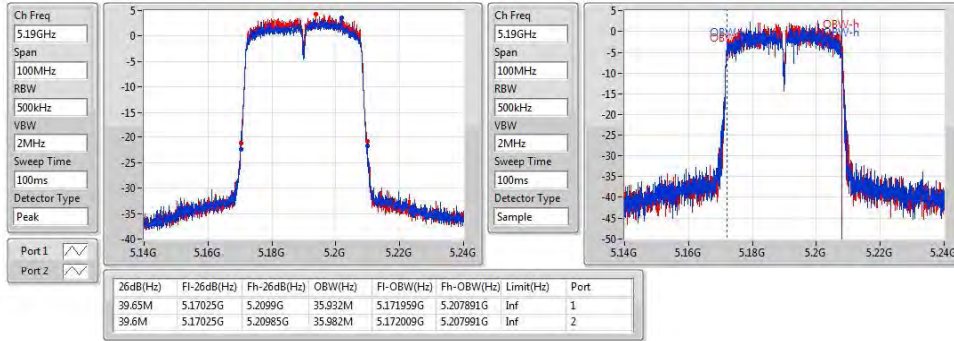

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW


5230MHz

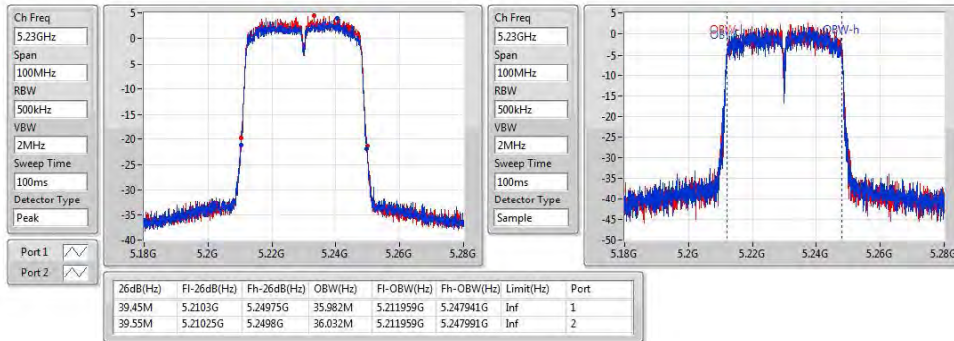

802.11ac VHT80-BF_Nss1,(MCS0)_2TX

EBW

5210MHz

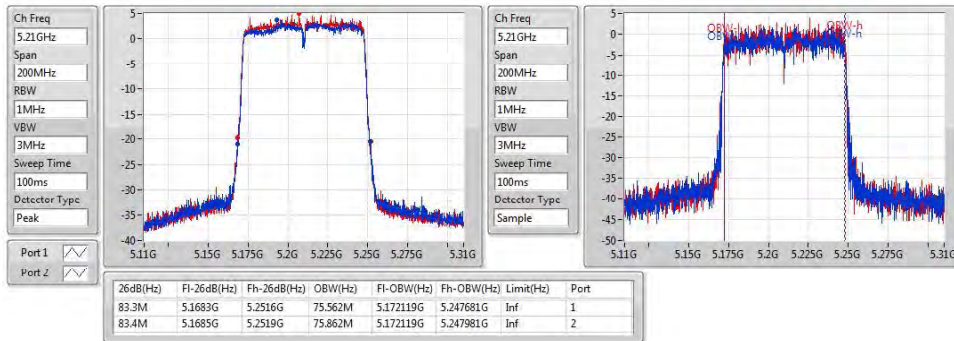



3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Conducted Output Power	
Average over on/off periods with duty factor	
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

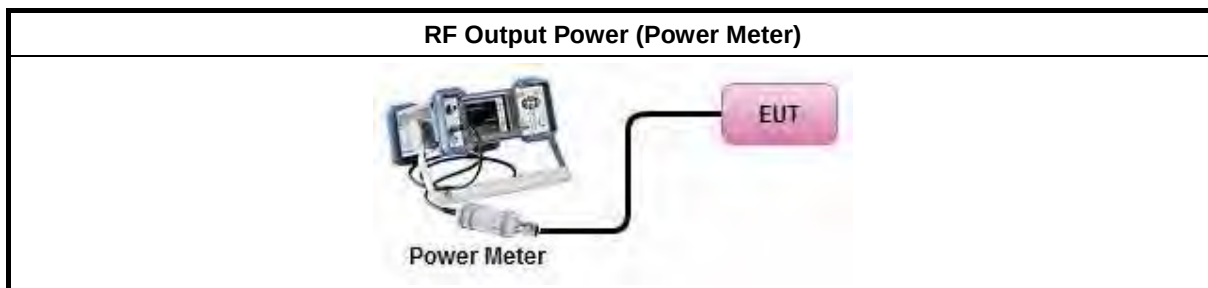

**3.3.5 Test Result of Maximum Conducted Output Power****For indoor use Band 1 and indoor / outdoor use Band 4****Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
802.11a_(6Mbps)_2TX	-	-	-	-
5.15-5.25GHz	23.87	0.24378	28.74	0.74817
5.725-5.85GHz	25.69	0.37068	30.56	1.13763
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	25.58	0.36141	30.45	1.10917
5.725-5.85GHz	25.84	0.38371	30.71	1.17761
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	23.96	0.24889	28.83	0.76384
5.725-5.85GHz	26.15	0.41210	31.02	1.26474
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	16.63	0.04603	21.50	0.14125
5.725-5.85GHz	22.27	0.16866	27.14	0.51761
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	21.04	0.12706	26.19	0.41591
5.725-5.85GHz	21.00	0.12589	26.15	0.41210
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	21.09	0.12853	26.24	0.42073
5.725-5.85GHz	21.22	0.13243	26.37	0.43351
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	18.95	0.07852	24.10	0.25704
5.725-5.85GHz	21.06	0.12764	26.21	0.41783

**Result**

Mode	Result	DG	Port 1	Port 2	Total Power	Power Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.87	20.16	20.65	23.42	30.00
5200MHz	Pass	4.87	20.39	20.81	23.62	30.00
5240MHz	Pass	4.87	20.78	20.93	23.87	30.00
5745MHz	Pass	4.87	19.37	19.90	22.65	30.00
5785MHz	Pass	4.87	19.68	20.00	22.85	30.00
5825MHz	Pass	4.87	22.46	22.88	25.69	30.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.87	18.51	18.85	21.69	30.00
5200MHz	Pass	4.87	22.40	22.73	25.58	30.00
5240MHz	Pass	4.87	20.73	20.91	23.83	30.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.87	14.58	14.70	17.65	30.00
5745MHz	Pass	4.87	22.52	22.82	25.68	30.00
5785MHz	Pass	4.87	22.86	22.79	25.84	30.00
5825MHz	Pass	4.87	22.41	22.91	25.68	30.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	4.87	15.40	15.84	18.64	30.00
5230MHz	Pass	4.87	20.89	21.01	23.96	30.00
5755MHz	Pass	4.87	22.21	23.20	25.74	30.00
5795MHz	Pass	4.87	22.55	23.66	26.15	30.00
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	4.87	13.47	13.77	16.63	30.00
5775MHz	Pass	4.87	18.93	19.56	22.27	30.00
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	17.22	17.71	20.48	30.00
5200MHz	Pass	5.15	17.66	18.05	20.87	30.00
5240MHz	Pass	5.15	17.89	18.17	21.04	30.00
5745MHz	Pass	5.15	17.45	18.04	20.77	30.00
5785MHz	Pass	5.15	17.83	18.14	21.00	30.00
5825MHz	Pass	5.15	17.53	18.24	20.91	30.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	16.68	17.30	20.01	30.00
5230MHz	Pass	5.15	17.95	18.21	21.09	30.00
5755MHz	Pass	5.15	17.70	18.43	21.09	30.00
5795MHz	Pass	5.15	17.98	18.42	21.22	30.00
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	15.81	16.06	18.95	30.00
5775MHz	Pass	5.15	17.92	18.18	21.06	30.00

DG = Directional Gain; Port X = Port X output power

**For outdoor use Band 1
Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
802.11a_(6Mbps)_2TX	-	-	-	-
5.15-5.25GHz	16.05	0.04027	20.92	0.12359
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	16.07	0.04046	20.94	0.12417
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	16.10	0.04074	20.97	0.12503
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	16.08	0.04055	20.95	0.12445
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	15.83	0.03828	20.98	0.12531
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	15.73	0.03741	20.88	0.12246
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-
5.15-5.25GHz	15.51	0.03556	20.66	0.11641

**Result**

Mode	Result	DG	Port 1	Port 2	Total Power	Power Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.87	12.62	13.16	15.91	30.00
5200MHz	Pass	4.87	12.77	13.30	16.05	30.00
5240MHz	Pass	4.87	12.58	12.87	15.74	30.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.87	12.60	12.94	15.79	30.00
5200MHz	Pass	4.87	12.81	13.29	16.07	30.00
5240MHz	Pass	4.87	12.43	12.97	15.72	30.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	4.87	12.80	13.37	16.10	30.00
5230MHz	Pass	4.87	12.51	12.94	15.74	30.00
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	4.87	12.84	13.29	16.08	30.00
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	12.46	13.15	15.83	30.00
5200MHz	Pass	5.15	12.28	12.66	15.48	30.00
5240MHz	Pass	5.15	12.38	12.97	15.69	30.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	12.28	12.78	15.55	30.00
5230MHz	Pass	5.15	12.53	12.90	15.73	30.00
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	12.28	12.71	15.51	30.00

DG = Directional Gain; **Port X** = Port X output power

**Elevation Angle Above 30 Degree Power Table**

Mode	Conducted Setting	Elevation angle above 30 Gain (dBi)	Directional Gain (power) (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	Elevation angle above 30 EIRP (dBm)	Elevation angle above 30 EIRP Limit (dBm)
802.11a_(6Mbps)_2TX	-		-	-	-	-	-		
5180MHz	13	4.87	4.87	12.62	13.16	15.91	30.00	20.78	21.00
5200MHz	13	4.87	4.87	12.77	13.30	16.05	30.00	20.92	21.00
5240MHz	12.5	4.87	4.87	12.58	12.87	15.74	30.00	20.61	21.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5180MHz	13	4.87	4.87	12.60	12.94	15.79	30.00	20.66	21.00
5200MHz	13	4.87	4.87	12.81	13.29	16.07	30.00	20.94	21.00
5240MHz	12.5	4.87	4.87	12.43	12.97	15.72	30.00	20.59	21.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5190MHz	13	4.87	4.87	12.80	13.37	16.10	30.00	20.97	21.00
5230MHz	12.5	4.87	4.87	12.51	12.94	15.74	30.00	20.61	21.00
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5210MHz	13.5	4.87	4.87	12.84	13.29	16.08	30.00	20.95	21.00
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5180MHz	16	5.15	5.15	12.46	13.15	15.83	30.00	20.98	21.00
5200MHz	15.5	5.15	5.15	12.28	12.66	15.48	30.00	20.63	21.00
5240MHz	15.5	5.15	5.15	12.38	12.97	15.69	30.00	20.84	21.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5190MHz	15.5	5.15	5.15	12.28	12.78	15.55	30.00	20.70	21.00
5230MHz	15.5	5.15	5.15	12.53	12.90	15.73	30.00	20.88	21.00
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-
5210MHz	15.5	5.15	5.15	12.28	12.71	15.51	30.00	20.66	21.00

Note:

1. For CDD mode power measurements; array Gain=0 dB (i.e., no array gain) for $N_{ant} \leq 4$.
2. EIRP = Total Power + Directional Gain.



3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the peak power spectral density (PPSD) ≤ 4 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☐	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 ($\theta - 8$) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 ($\theta - 40$) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz and the e.i.r.p. peak power spectral density (PPSD) ≤ 17 dBm/MHz.
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.4.4 Test Setup

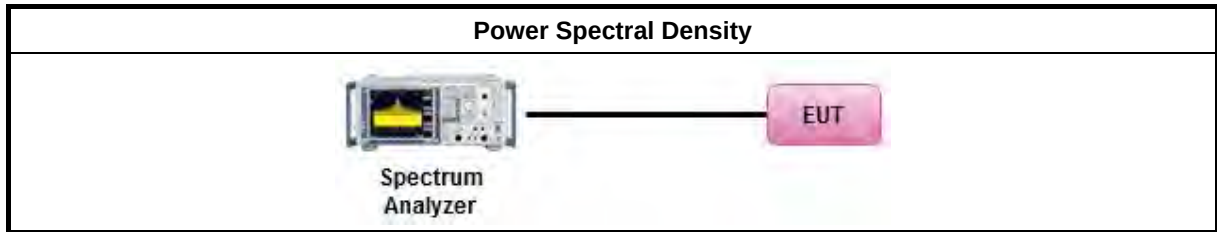

**3.4.5 Test Result of Peak Power Spectral Density****For indoor use Band 1 and indoor / outdoor use Band 4****Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
802.11a_(6Mbps)_2TX	-	-
5.15-5.25GHz	11.24	16.39
5.725-5.85GHz	11.39	16.54
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	12.40	17.55
5.725-5.85GHz	11.30	16.45
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	8.35	13.50
5.725-5.85GHz	8.97	14.12
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	-2.46	2.69
5.725-5.85GHz	2.06	7.21
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	8.35	13.50
5.725-5.85GHz	7.01	12.16
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	5.87	11.02
5.725-5.85GHz	4.49	9.64
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	0.29	5.44
5.725-5.85GHz	0.87	6.02

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	7.43	7.78	10.58	17.00
5200MHz	Pass	5.15	7.89	8.09	10.88	17.00
5240MHz	Pass	5.15	8.29	8.28	11.24	17.00
5745MHz	Pass	5.15	5.53	6.15	8.75	30.00
5785MHz	Pass	5.15	5.75	6.09	8.76	30.00
5825MHz	Pass	5.15	8.10	8.84	11.39	30.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	5.44	5.82	8.62	17.00
5200MHz	Pass	5.15	9.24	9.60	12.40	17.00
5240MHz	Pass	5.15	7.64	7.96	10.73	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.15	5.90	6.49	9.19	30.00
5745MHz	Pass	5.15	8.01	8.57	11.26	30.00
5785MHz	Pass	5.15	8.31	8.44	11.30	30.00
5825MHz	Pass	5.15	7.76	8.60	11.13	30.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	0.06	0.22	3.11	17.00
5230MHz	Pass	5.15	5.37	5.39	8.35	17.00
5755MHz	Pass	5.15	4.95	6.29	8.63	30.00
5795MHz	Pass	5.15	5.38	6.59	8.97	30.00
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	-5.34	-5.29	-2.46	17.00
5775MHz	Pass	5.15	-1.13	-0.51	2.06	30.00
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	4.72	5.21	7.94	17.00
5200MHz	Pass	5.15	4.96	5.52	8.16	17.00
5240MHz	Pass	5.15	5.15	5.63	8.35	17.00
5745MHz	Pass	5.15	3.54	4.41	6.92	30.00
5785MHz	Pass	5.15	3.74	4.39	7.01	30.00
5825MHz	Pass	5.15	3.36	4.37	6.83	30.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	1.64	1.88	4.76	17.00
5230MHz	Pass	5.15	2.89	3.02	5.87	17.00
5755MHz	Pass	5.15	1.04	1.76	4.32	30.00
5795MHz	Pass	5.15	1.42	1.73	4.49	30.00
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	-2.70	-2.63	0.29	17.00
5775MHz	Pass	5.15	-2.27	-1.79	0.87	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;



802.11a_(6Mbps)_2TX

PSD


5180MHz

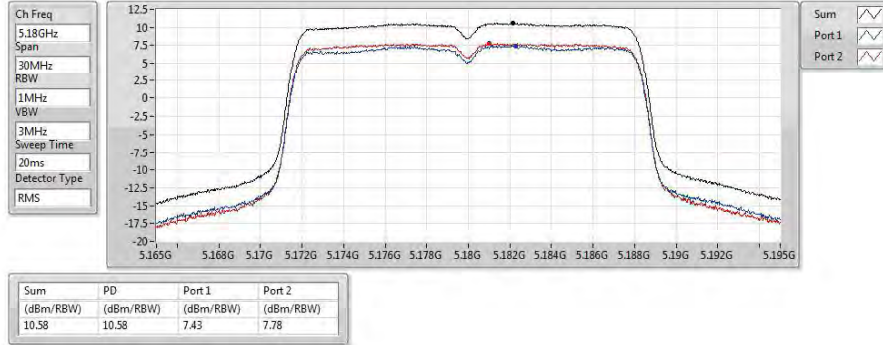

802.11a_(6Mbps)_2TX

PSD


5200MHz

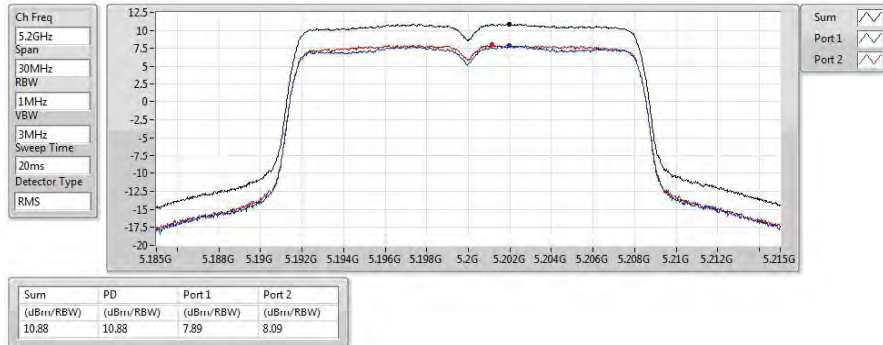

802.11a_(6Mbps)_2TX

PSD

5240MHz

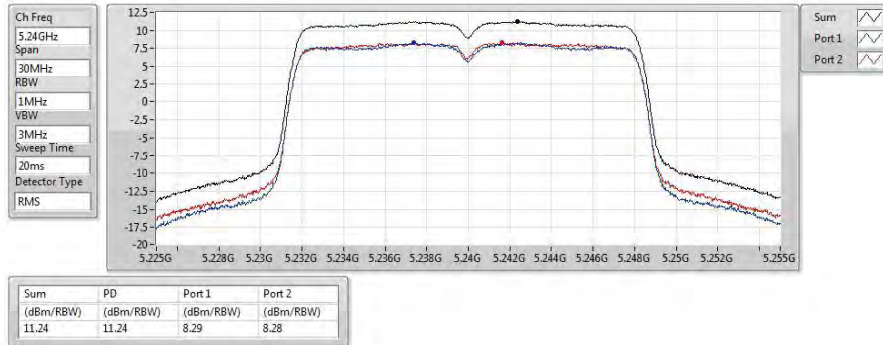




802.11a_(6Mbps)_2TX

PSD


5745MHz

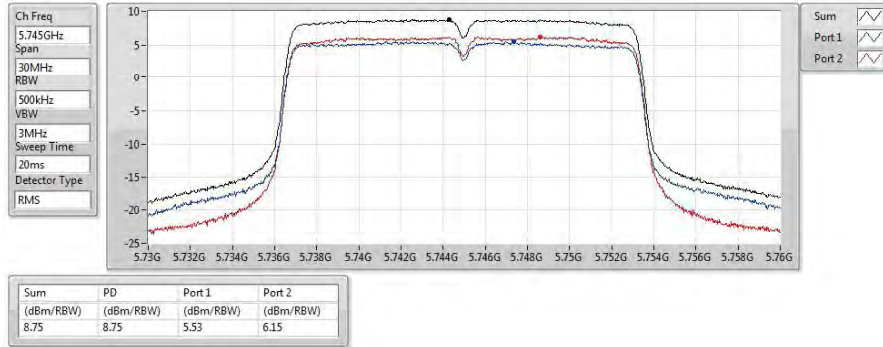

802.11a_(6Mbps)_2TX

PSD


5785MHz

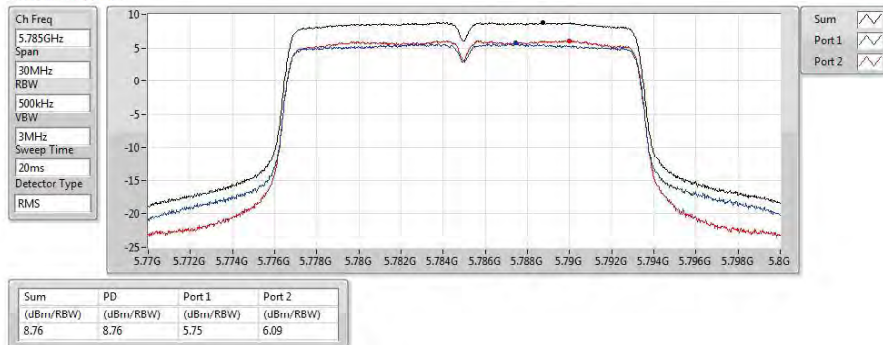

802.11a_(6Mbps)_2TX

PSD

5825MHz

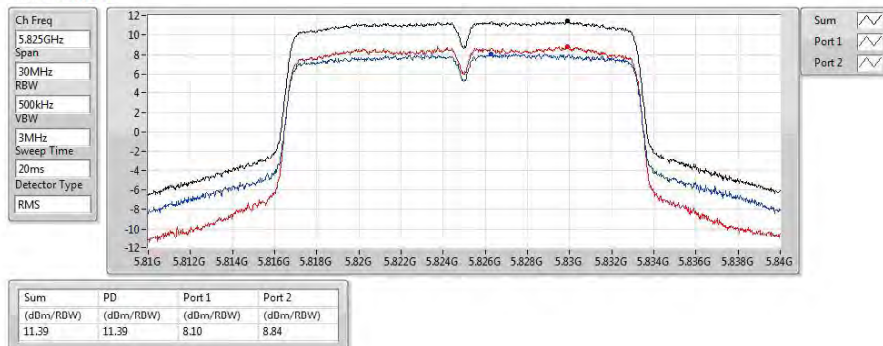




802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5180MHz

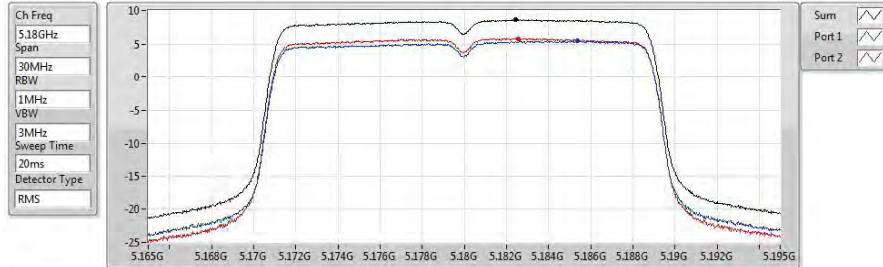


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
8.62	8.62	5.44	5.82

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5200MHz

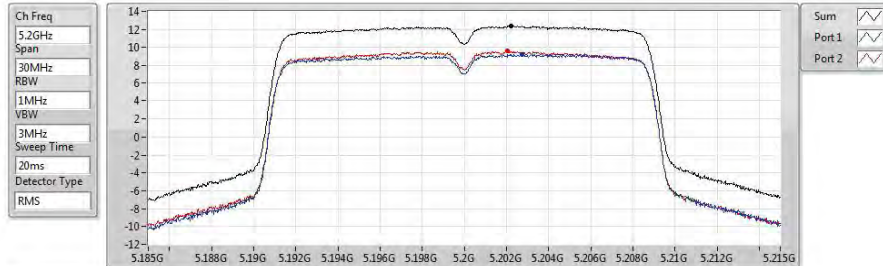


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
12.40	12.40	9.24	9.60

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

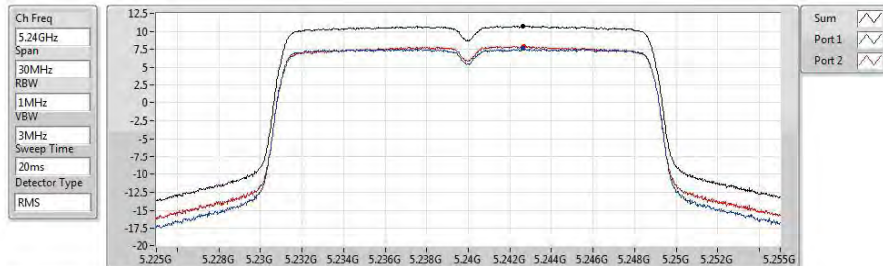


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
10.73	10.73	7.64	7.96



802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


5745MHz

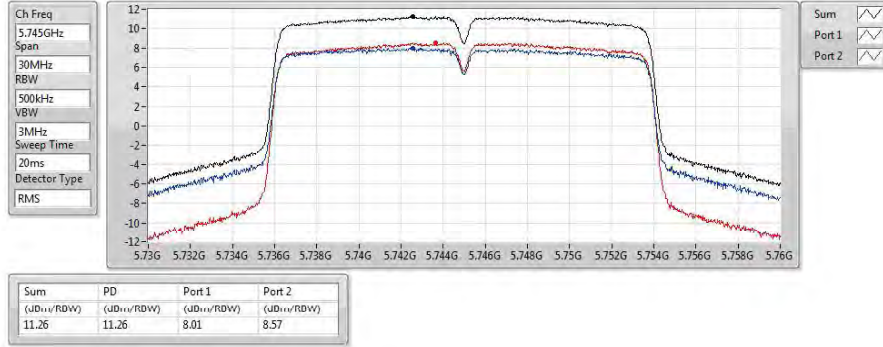

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


5785MHz

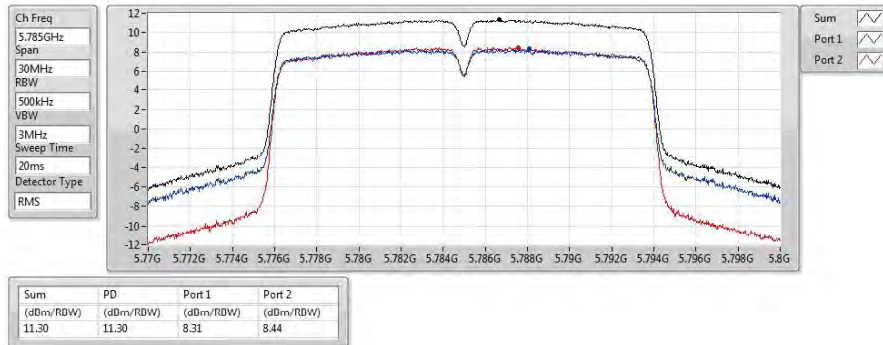

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5825MHz

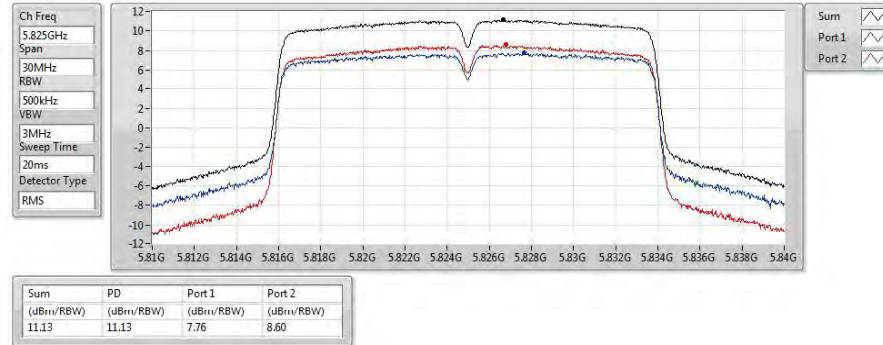




802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


5190MHz

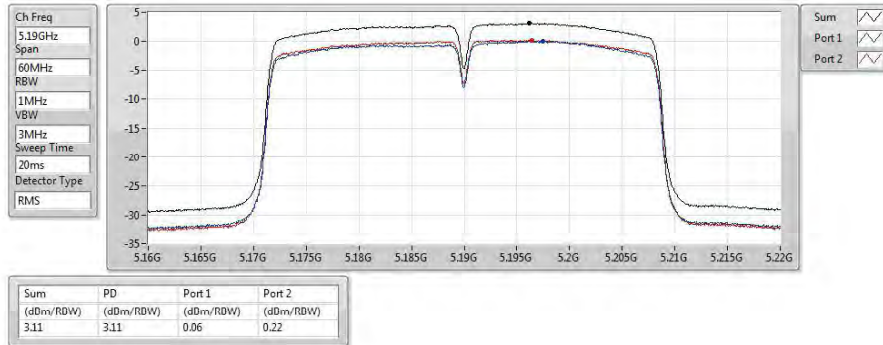

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


5230MHz



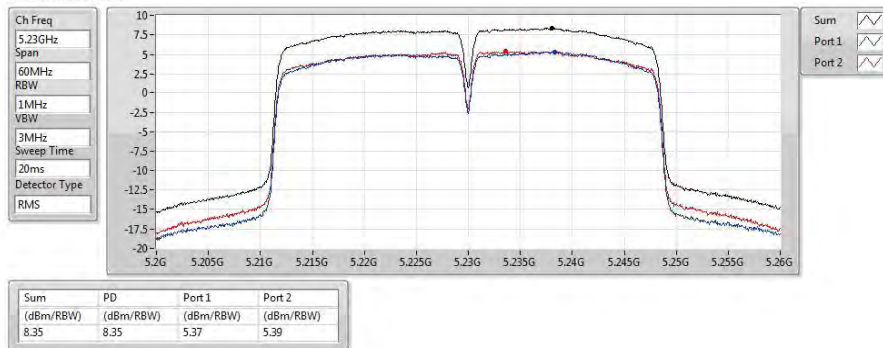


802.11ac VHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

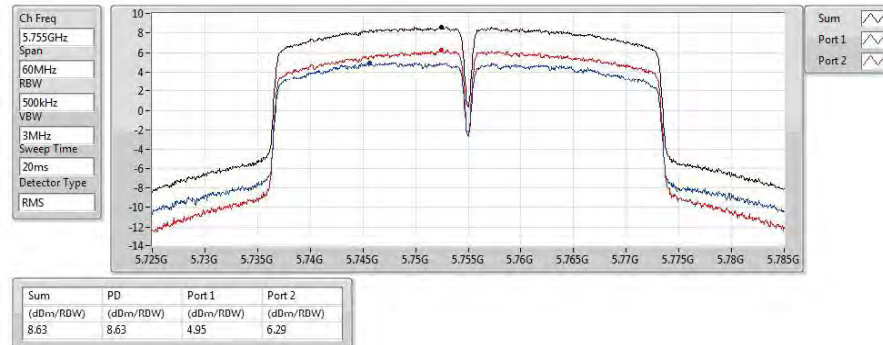

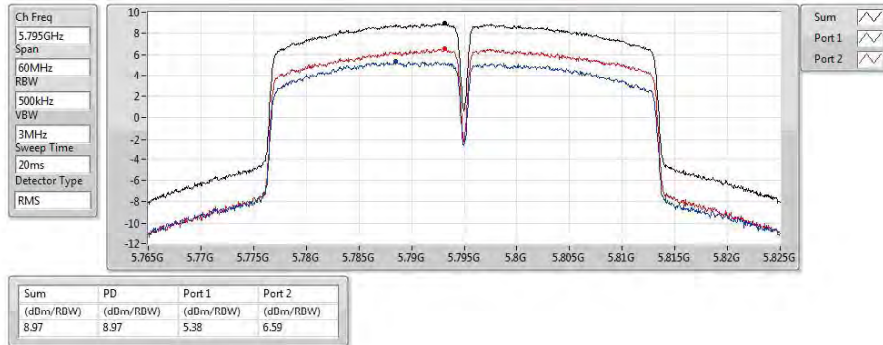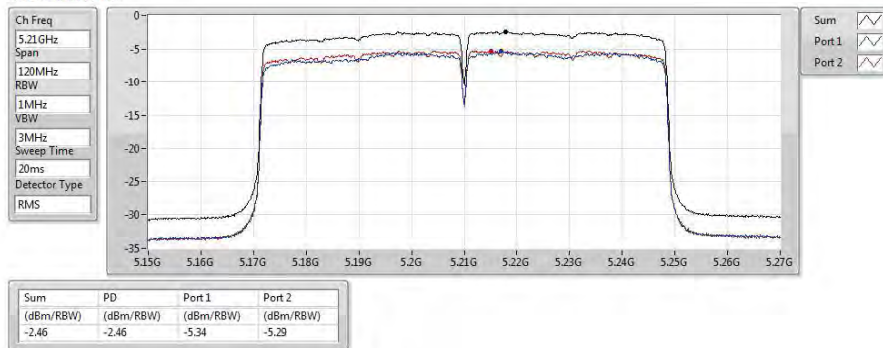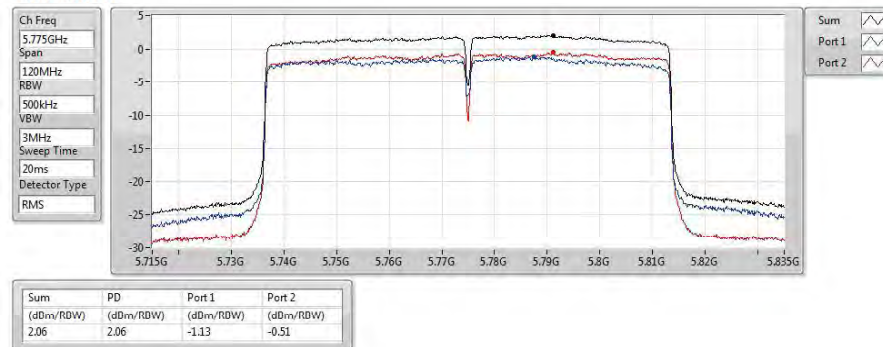
802.11ac VHT40_Nss1,(MCS0)_2TX
PSD
5795MHz

802.11ac VHT80_Nss1,(MCS0)_2TX
PSD
5210MHz

802.11ac VHT80_Nss1,(MCS0)_2TX
PSD
5775MHz




802.11ac VHT20-BF_Nss1,(MCS0)_2TX

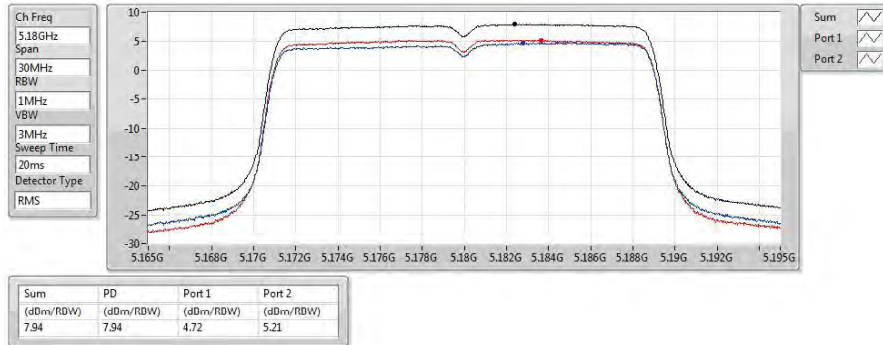PSD


5180MHz



802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD


5200MHz

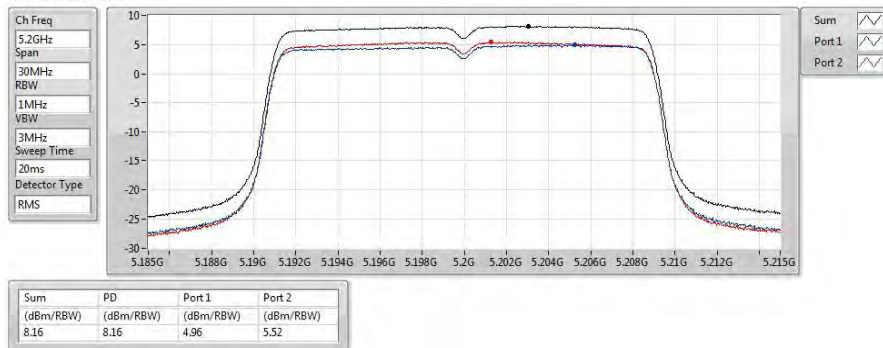

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

5240MHz

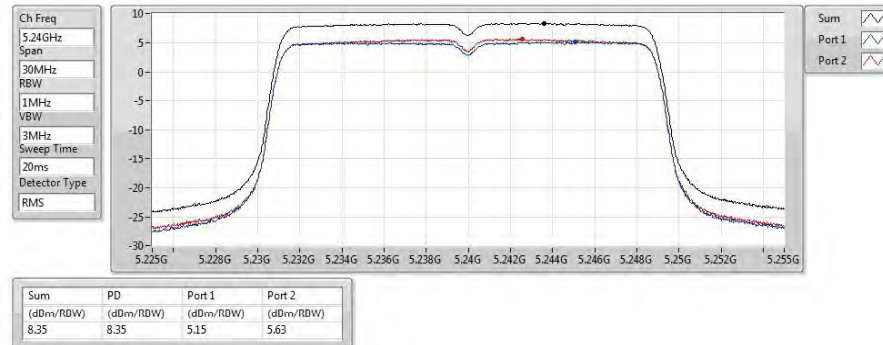




802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD


5745MHz

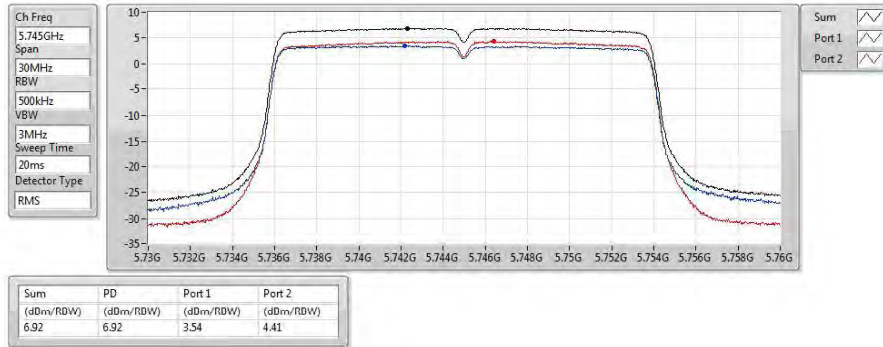

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD


5785MHz

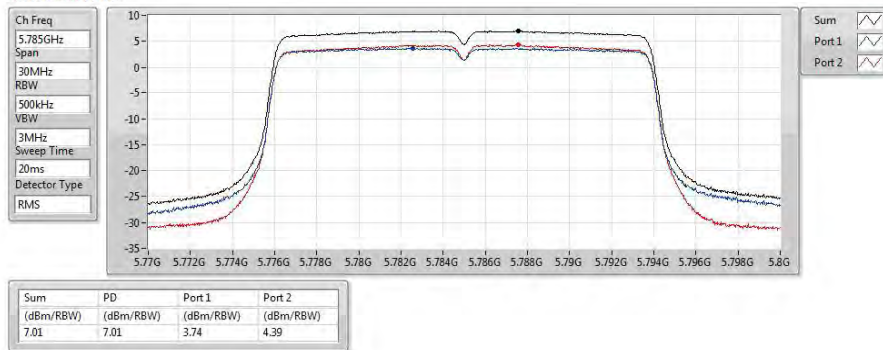

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

5825MHz

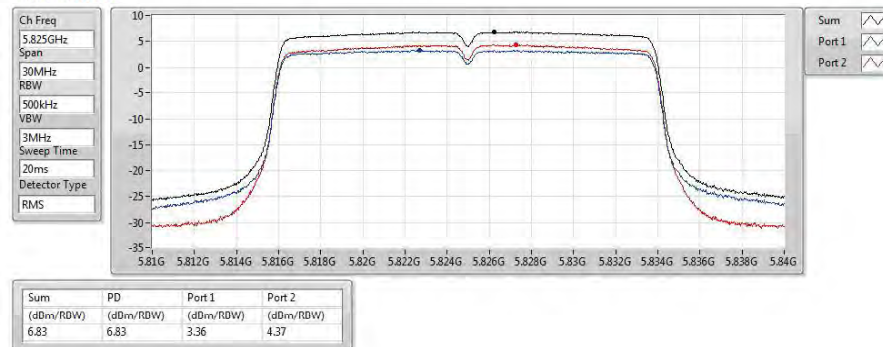




802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD


5190MHz

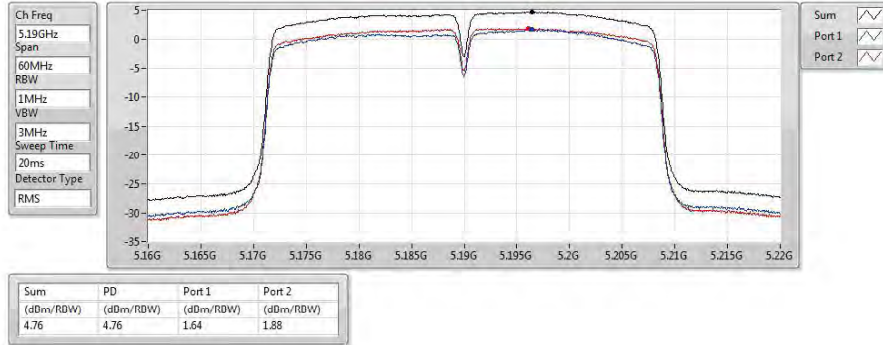

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD


5230MHz



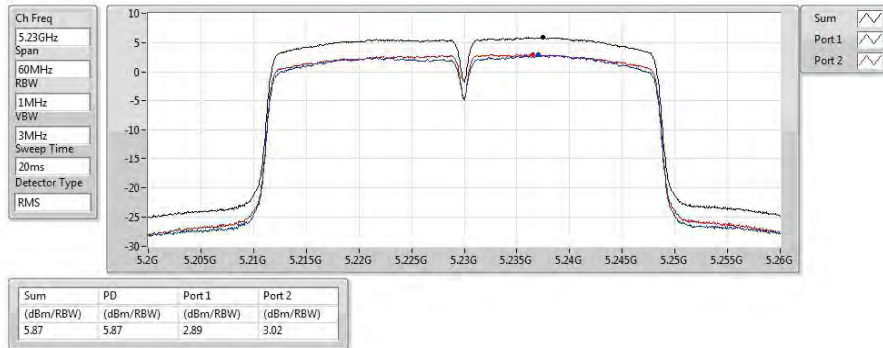


802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD

5755MHz

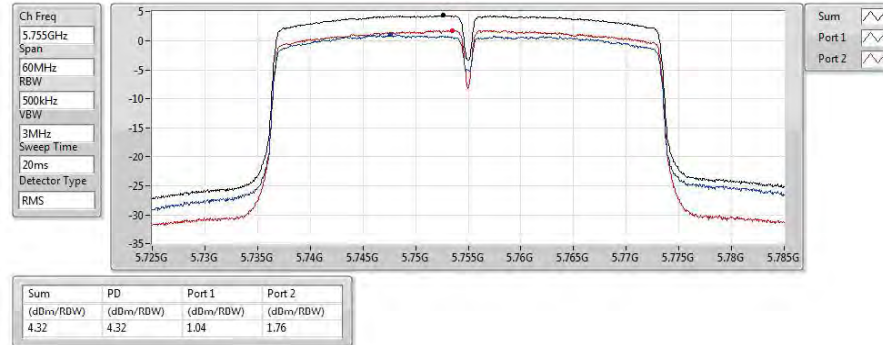

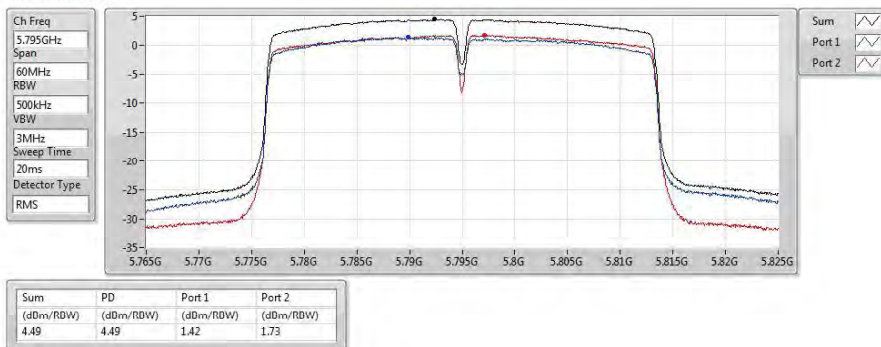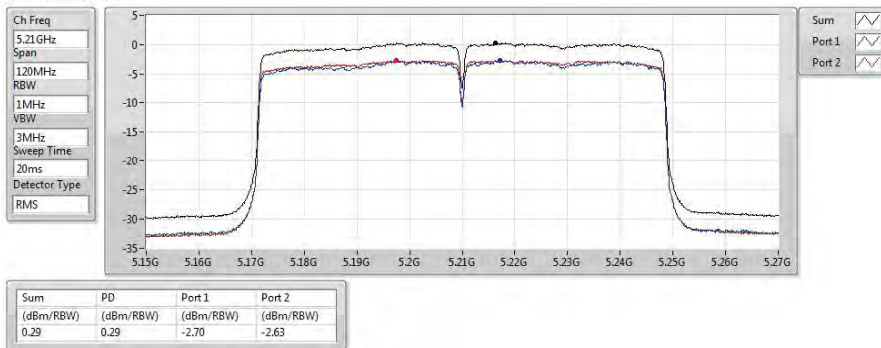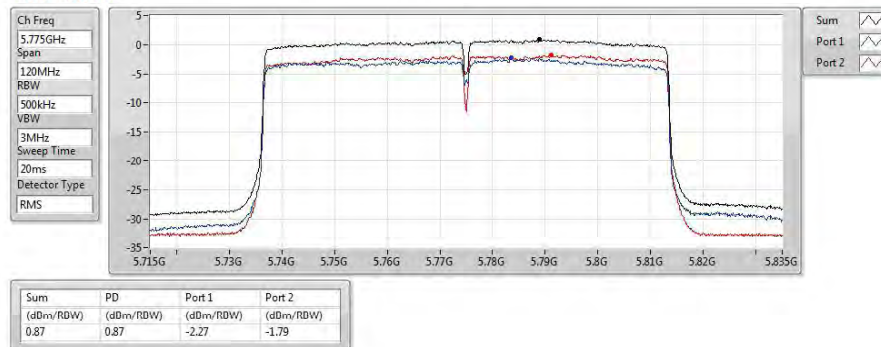802.11ac VHT40-BF_Nss1,(MCS0)_2TX
PSD
5795MHz

802.11ac VHT80-BF_Nss1,(MCS0)_2TX
PSD
5210MHz

802.11ac VHT80-BF_Nss1,(MCS0)_2TX
PSD
5775MHz


**For outdoor use Band 1
Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
802.11a_(6Mbps)_2TX	-	-
5.15-5.25GHz	3.54	8.69
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	3.02	8.17
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	0.56	5.71
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	-2.95	2.20
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	3.16	8.31
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	0.50	5.65
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-
5.15-5.25GHz	-3.26	1.89

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	0.16	0.40	3.19	17.00
5200MHz	Pass	5.15	0.46	0.63	3.54	17.00
5240MHz	Pass	5.15	0.28	0.29	3.24	17.00
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	-0.49	-0.21	2.59	17.00
5200MHz	Pass	5.15	-0.17	0.28	3.02	17.00
5240MHz	Pass	5.15	-0.58	0.04	2.71	17.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	-2.42	-2.27	0.56	17.00
5230MHz	Pass	5.15	-2.78	-2.62	0.23	17.00
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	-5.91	-5.67	-2.95	17.00
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	5.15	-0.04	0.44	3.16	17.00
5200MHz	Pass	5.15	-0.38	0.09	2.81	17.00
5240MHz	Pass	5.15	-0.22	0.43	3.10	17.00
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	5.15	-2.78	-2.56	0.32	17.00
5230MHz	Pass	5.15	-2.50	-2.43	0.50	17.00
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	5.15	-6.25	-6.15	-3.26	17.00

DG = Directional Gain; **RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;



802.11a_(6Mbps)_2TX

PSD


5180MHz

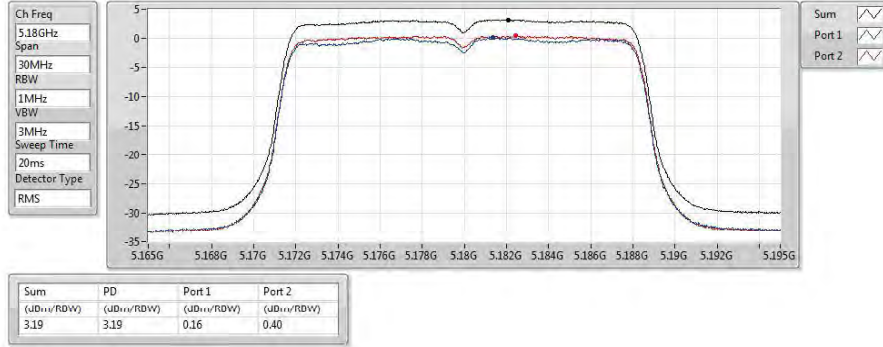

802.11a_(6Mbps)_2TX

PSD


5200MHz

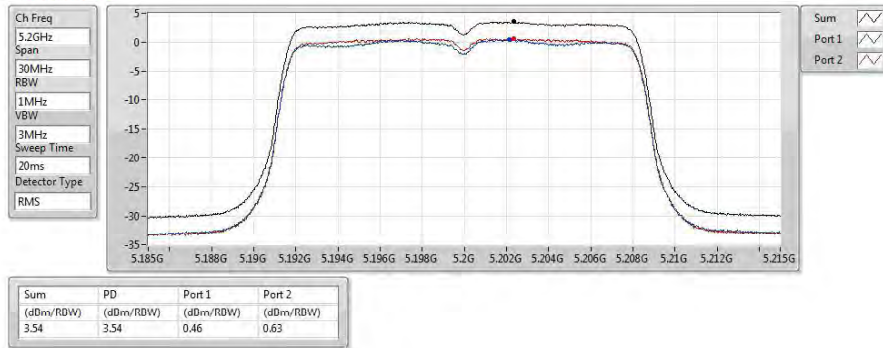

802.11a_(6Mbps)_2TX

PSD

5240MHz

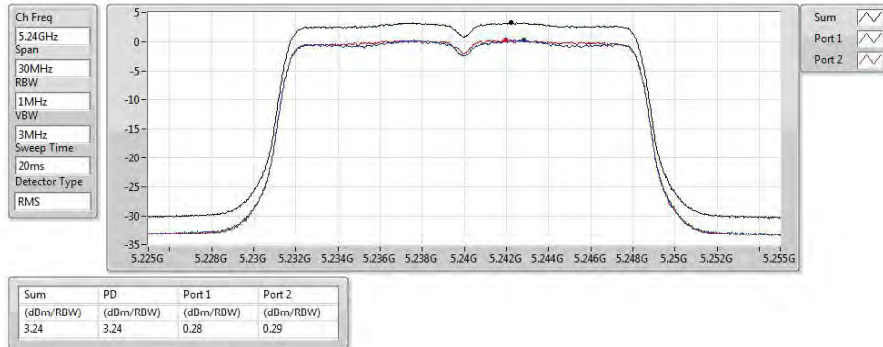




802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


5180MHz

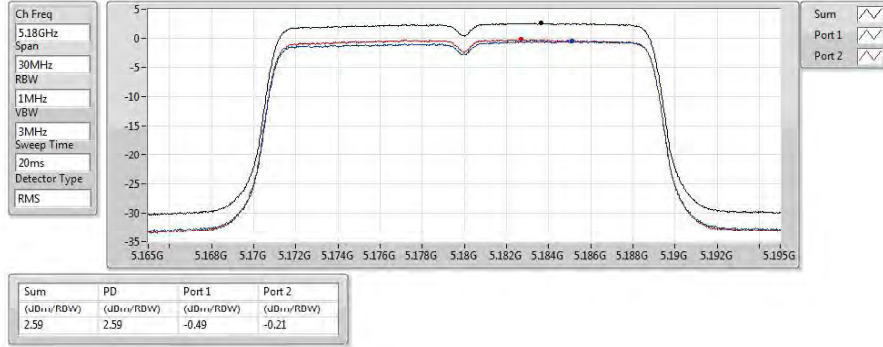

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD


5200MHz

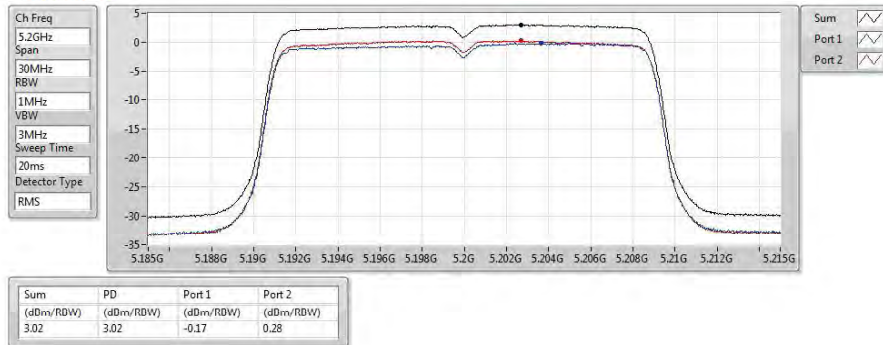

802.11ac VHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

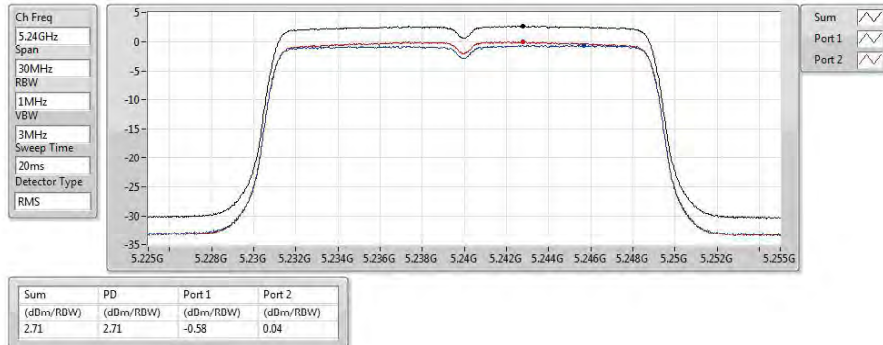




802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


5190MHz

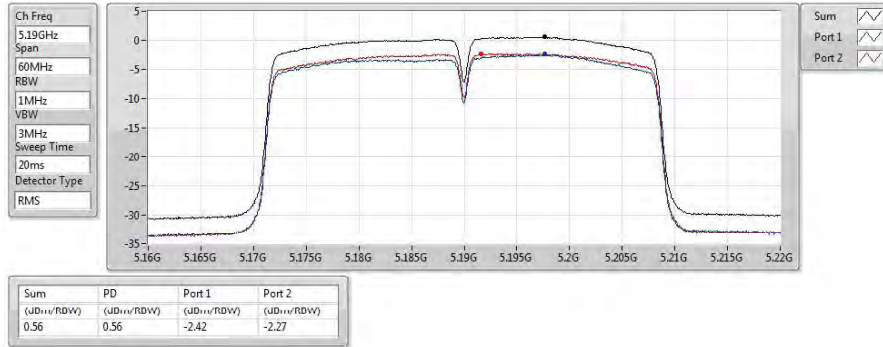

802.11ac VHT40_Nss1,(MCS0)_2TX

PSD


5230MHz

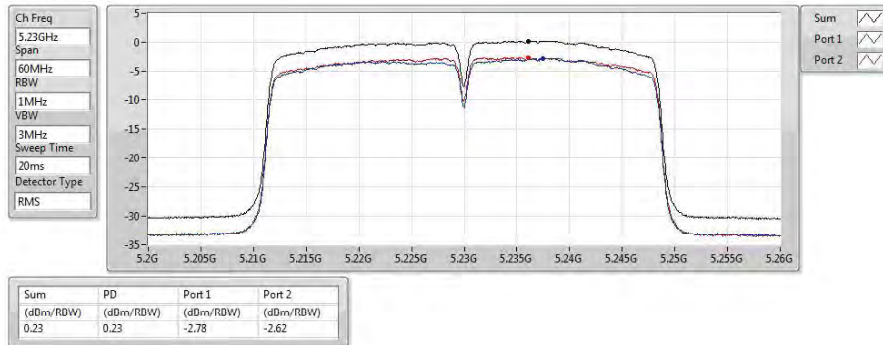

802.11ac VHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

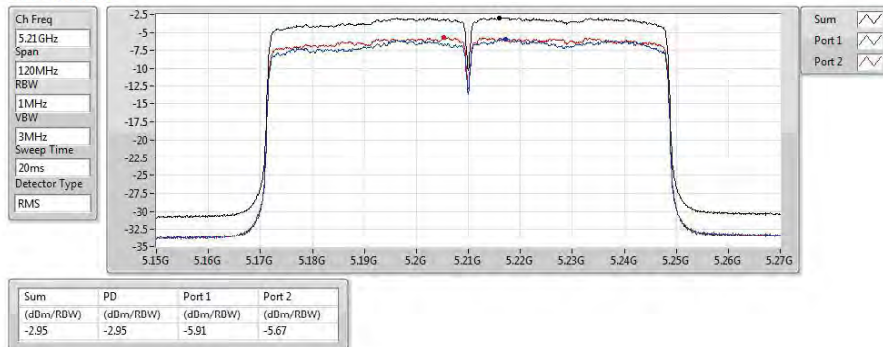




802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD


5180MHz

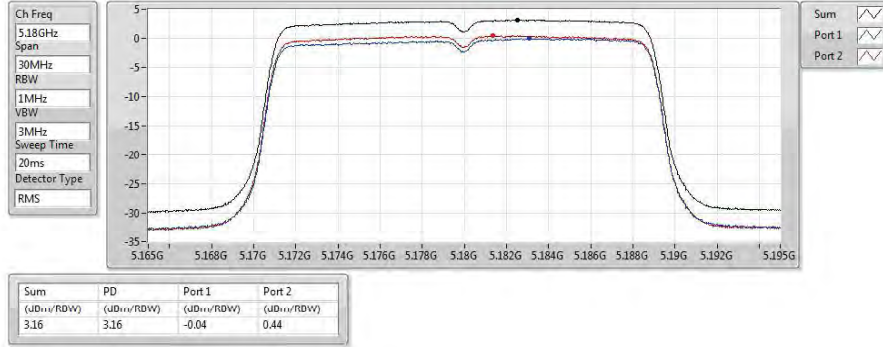

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD


5200MHz

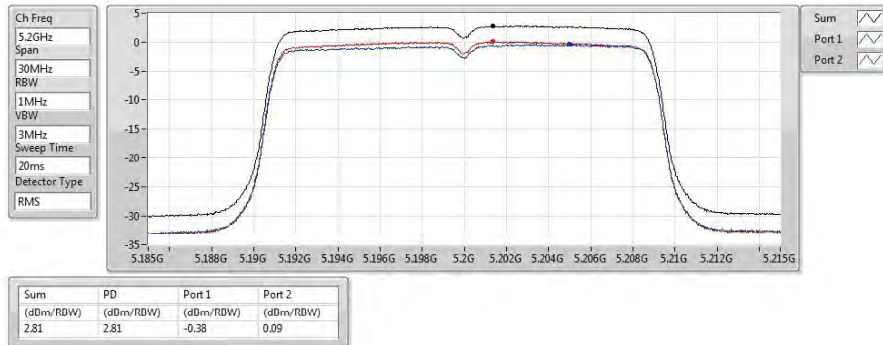

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

5240MHz

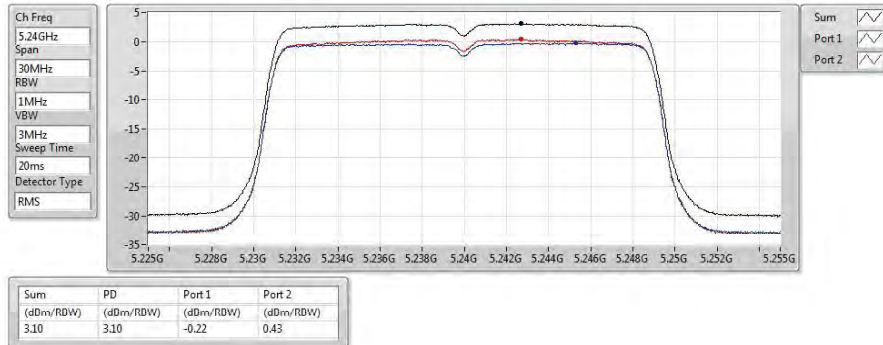




802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD


5190MHz

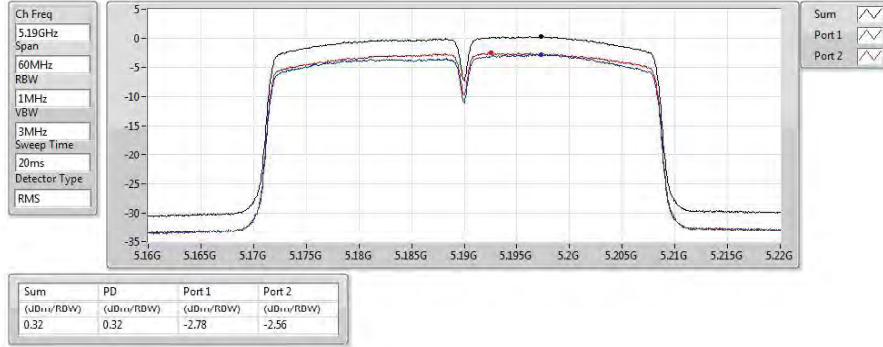

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD


5230MHz

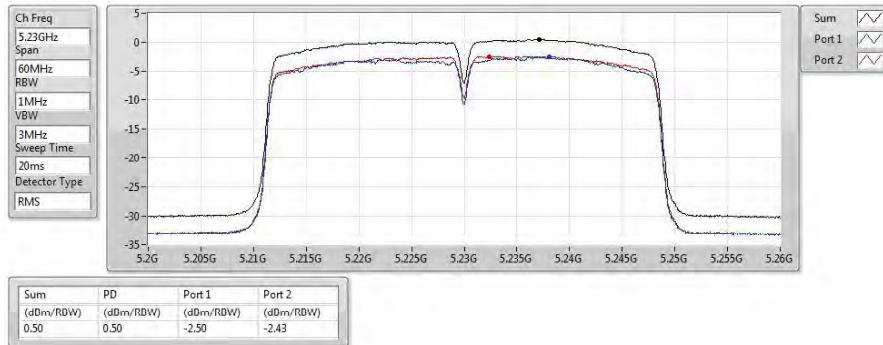

802.11ac VHT80-BF_Nss1,(MCS0)_2TX

PSD

5210MHz

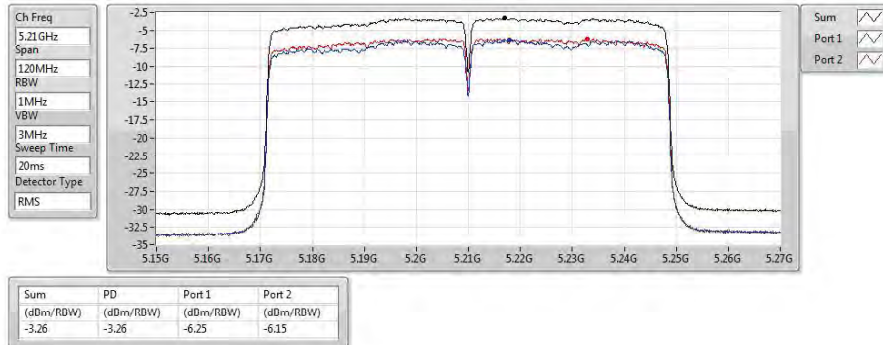

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause H)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause H)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033, H)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033, H)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause H)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

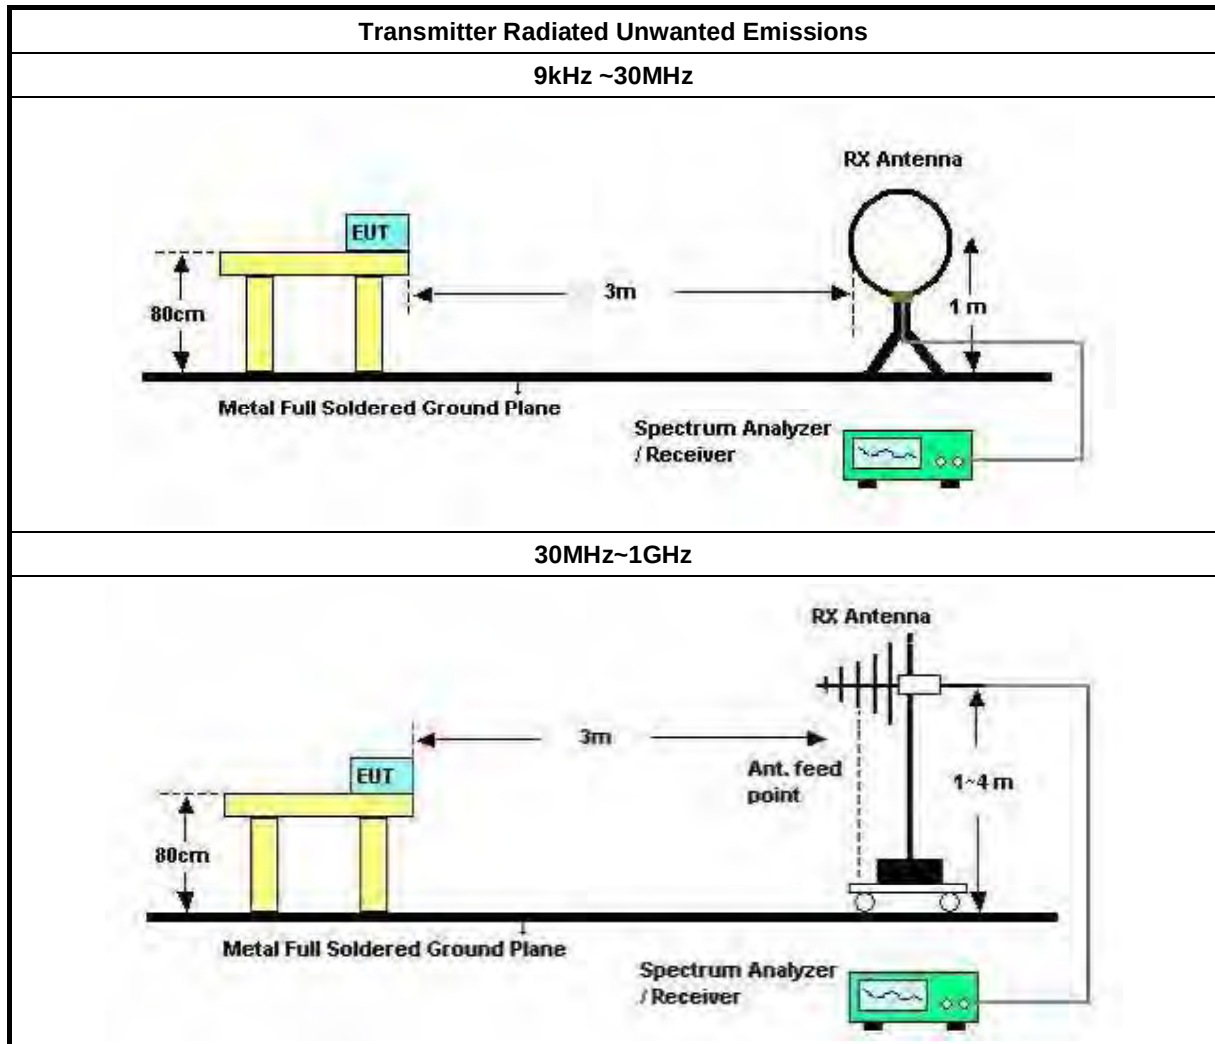

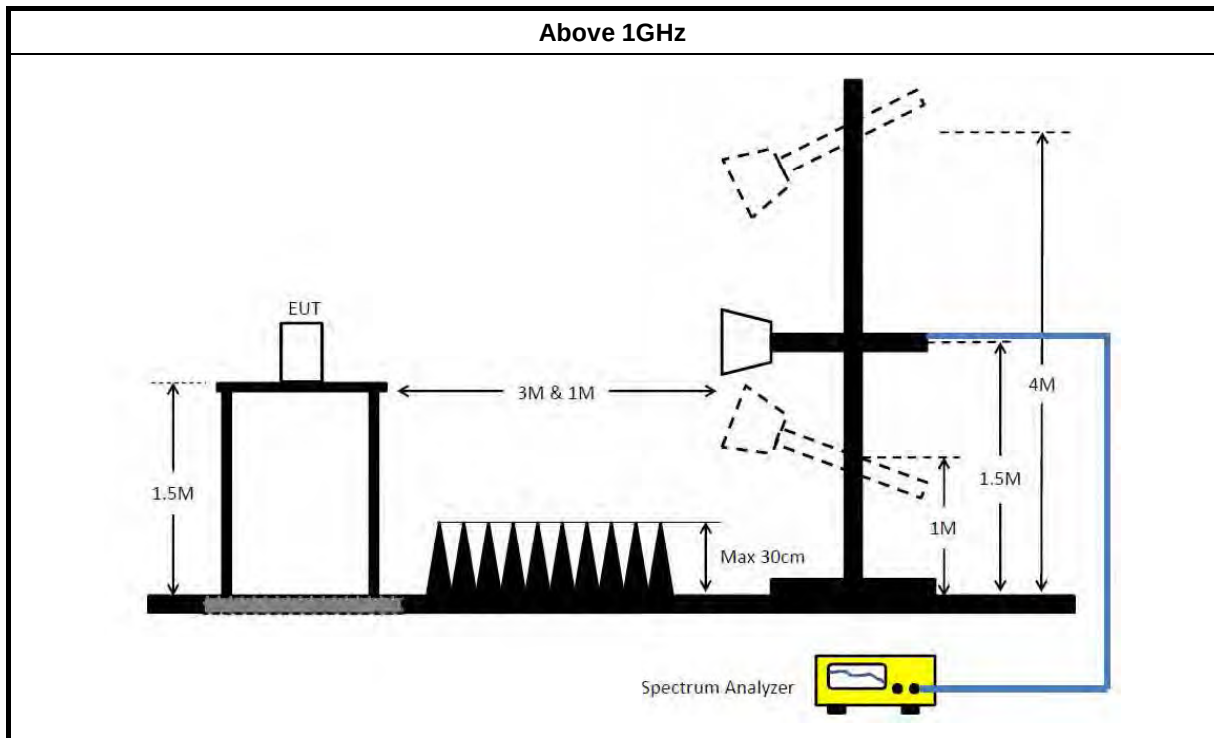


3.5.5 Transmitter Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.5.6 Test Result of Transmitter Unwanted Emissions

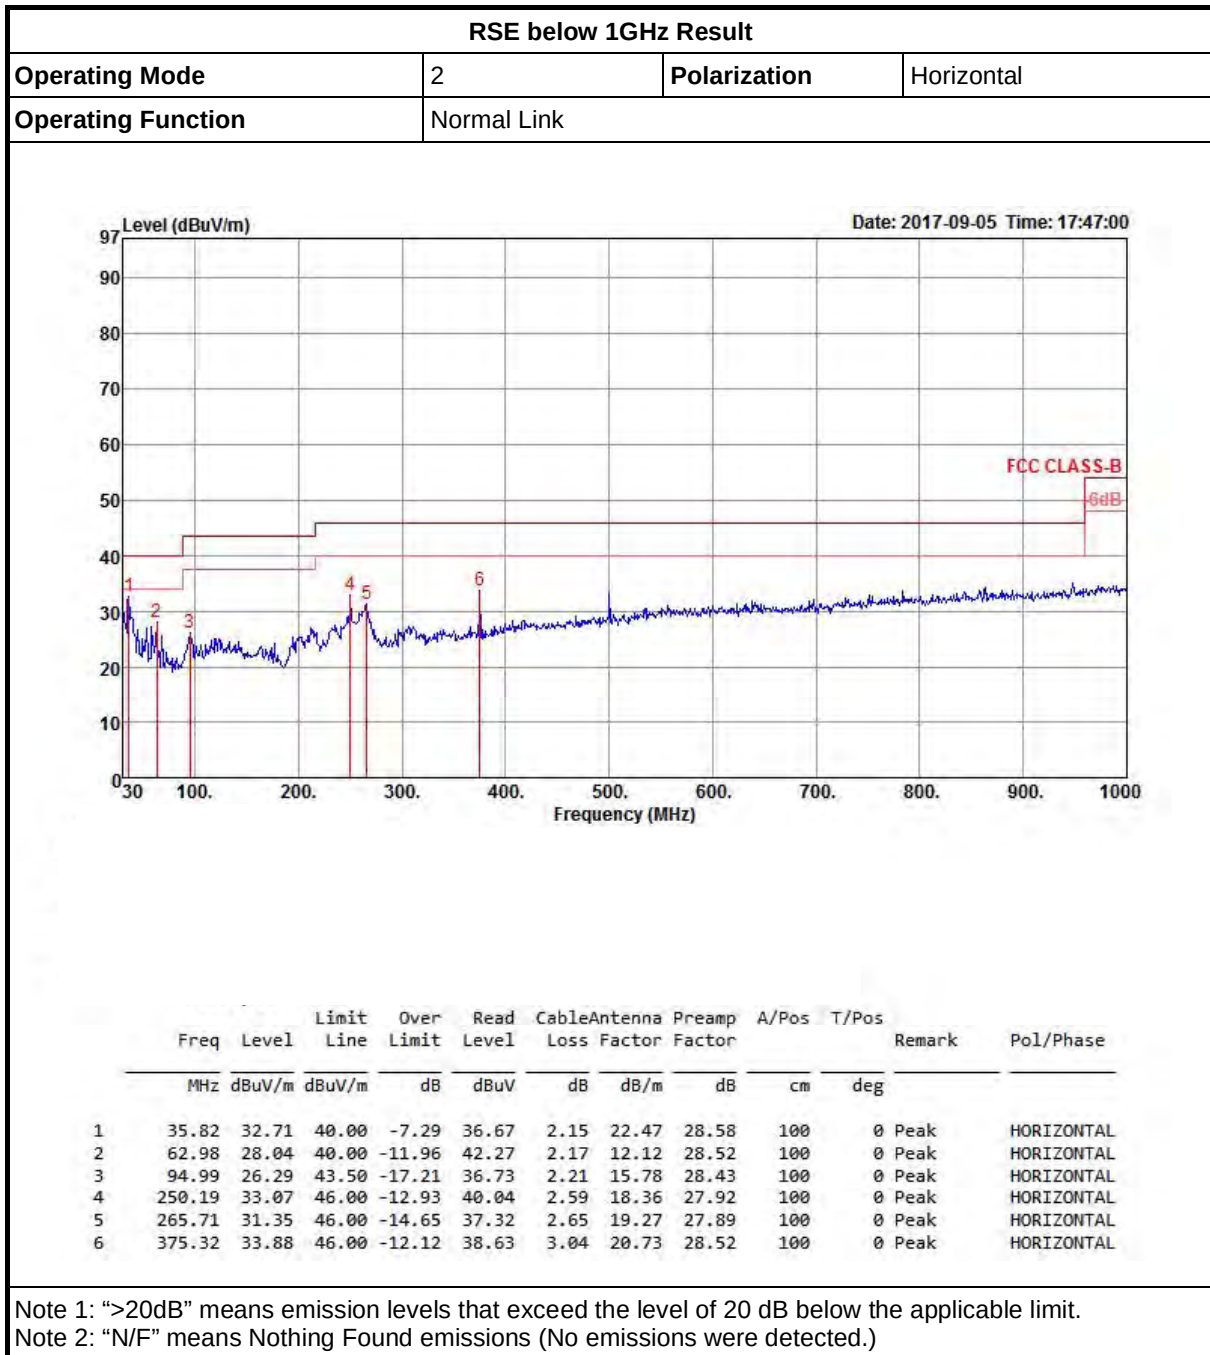

**RSE below 1GHz Result**

Operating Mode	2	Polarization	Vertical
Operating Function	Normal Link		

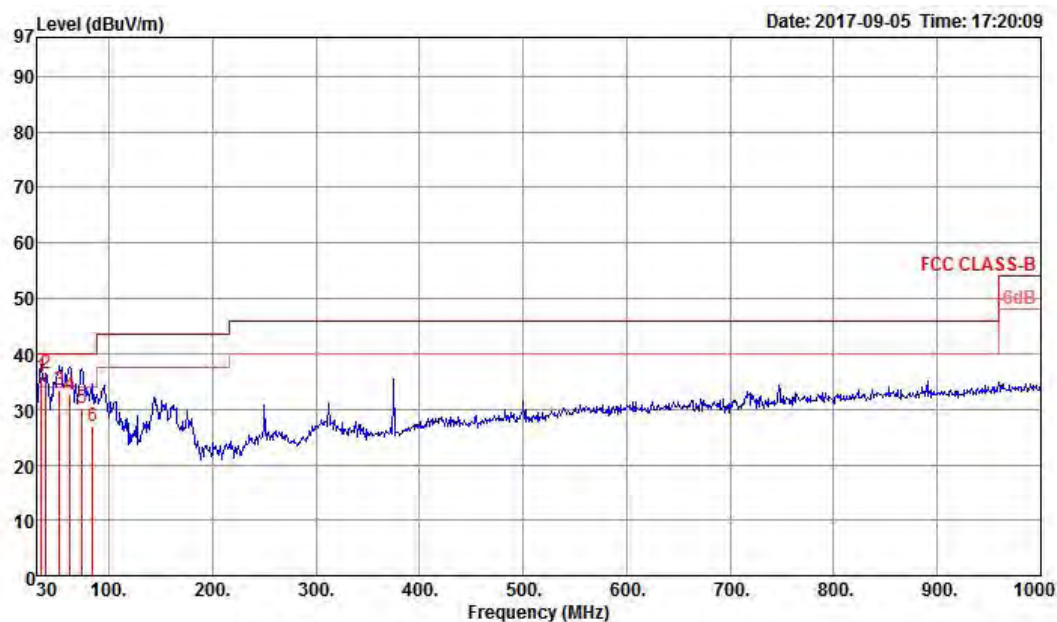

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	34.85	35.89	40.00	-4.11	39.20	2.16	23.11	28.58	227	141 QP	VERTICAL
2	38.73	36.53	40.00	-3.47	42.44	2.12	20.55	28.58	100	221 Peak	VERTICAL
3	52.31	33.48	40.00	-6.52	46.40	2.17	13.47	28.56	100	74 QP	VERTICAL
4	62.01	32.76	40.00	-7.24	47.00	2.17	12.11	28.52	145	8 QP	VERTICAL
5	73.65	30.22	40.00	-9.78	44.10	2.19	12.42	28.49	100	8 QP	VERTICAL
6	84.32	26.95	40.00	-13.05	39.40	2.20	13.81	28.46	100	196 QP	VERTICAL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)


**RSE Above 1GHz Result
Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Pol. (H/V)	Azimuth (°)	Height (m)	Comments
802.11a_(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-
5.15-5.25GHz	Pass	AV	15.71736G	53.97	54.00	-0.03	17.64	3	V	325	2.19	-



802.11a_(6Mbps)_2TX

5180MHz_TX

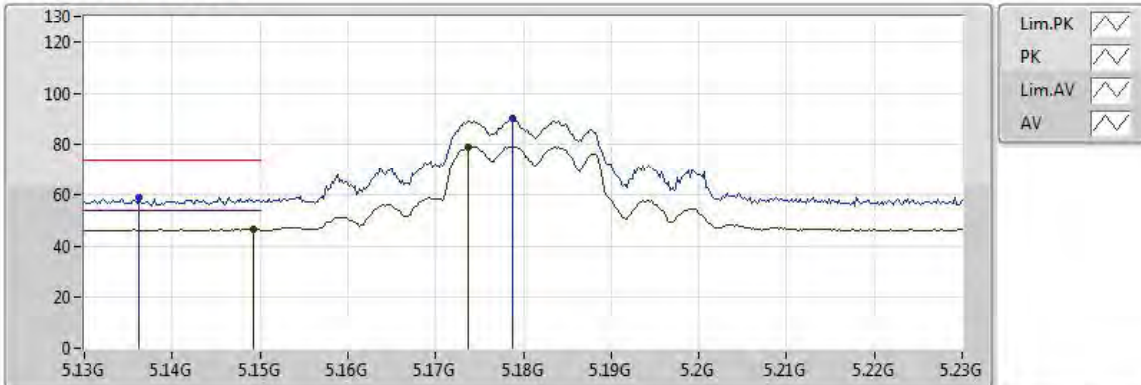


20170831
EUT_Z_2TX
Setting 21
02-Z-1-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1492G	46.40	54.00	-7.60	9.03	3	V	139	2.47	-
AV	5.1738G	79.17	Inf	-Inf	9.09	3	V	139	2.47	-
PK	5.1362G	58.89	74.00	-15.11	9.00	3	V	139	2.47	-
PK	5.1788G	89.96	Inf	-Inf	9.11	3	V	139	2.47	-



802.11a_(6Mbps)_2TX

5180MHz_TX

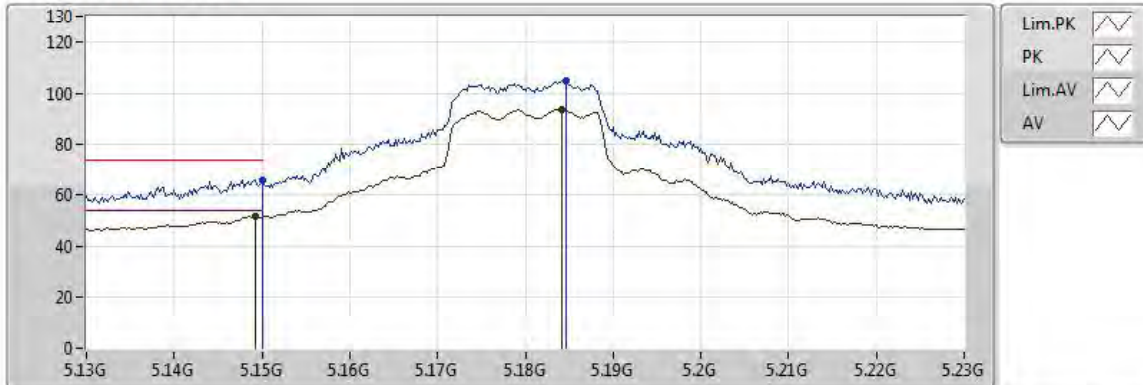


20170831
EUT_Z_2TX
Setting 21
02-Z-1-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1492G	51.69	54.00	-2.31	9.03	3	H	85	1.02	-
AV	5.1842G	93.79	Inf	-Inf	9.12	3	H	85	1.02	-
PK	5.149995G	65.60	74.00	-8.40	9.03	3	H	85	1.02	-
PK	5.1846G	104.87	Inf	-Inf	9.12	3	H	85	1.02	-



802.11a_(6Mbps)_2TX

5180MHz_TX

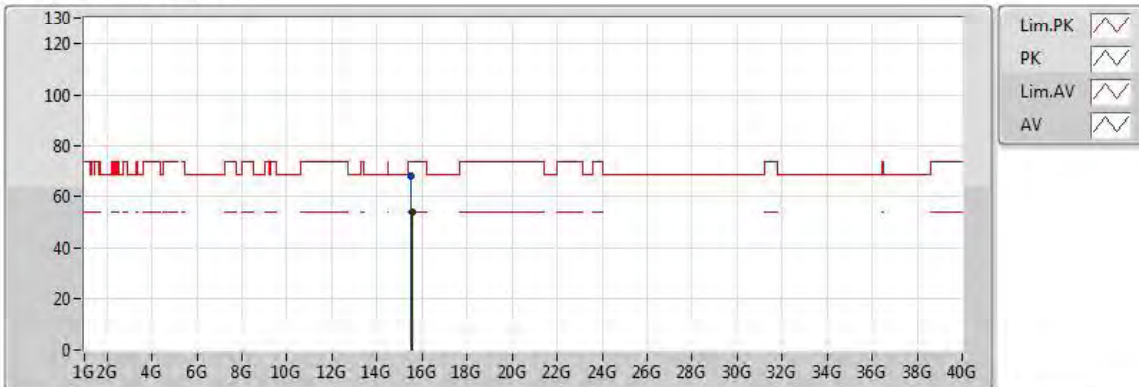


20170831
EUT_Z_2TX
Setting 21
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.54236G	53.57	54.00	-0.43	18.02	3	V	301	2.11	-
PK	15.5368G	67.73	74.00	-6.27	18.04	3	V	301	2.11	-



802.11a_(6Mbps)_2TX

5180MHz_TX

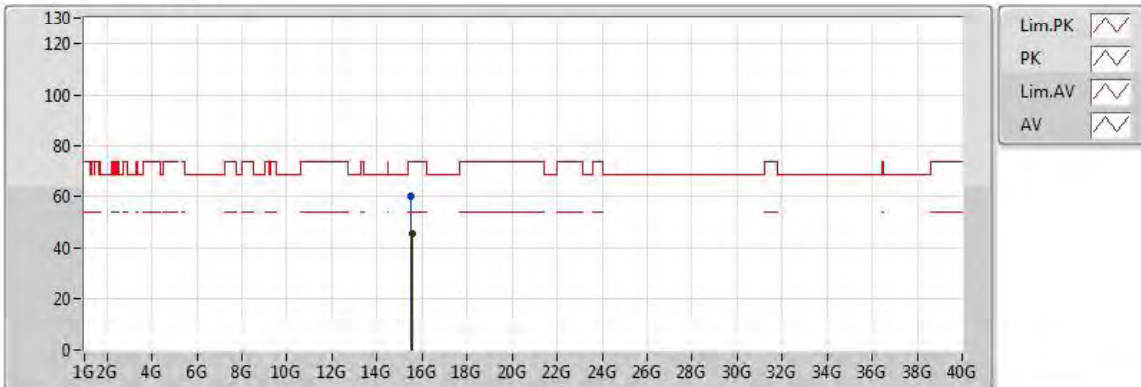


20170831
EUT_Z_2TX
Setting 21
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.5422G	45.45	54.00	-8.55	18.02	3	H	175	1.05	-
PK	15.53624G	59.95	74.00	-14.05	18.04	3	H	175	1.05	-

802.11a_(6Mbps)_2TX

5200MHz_TX

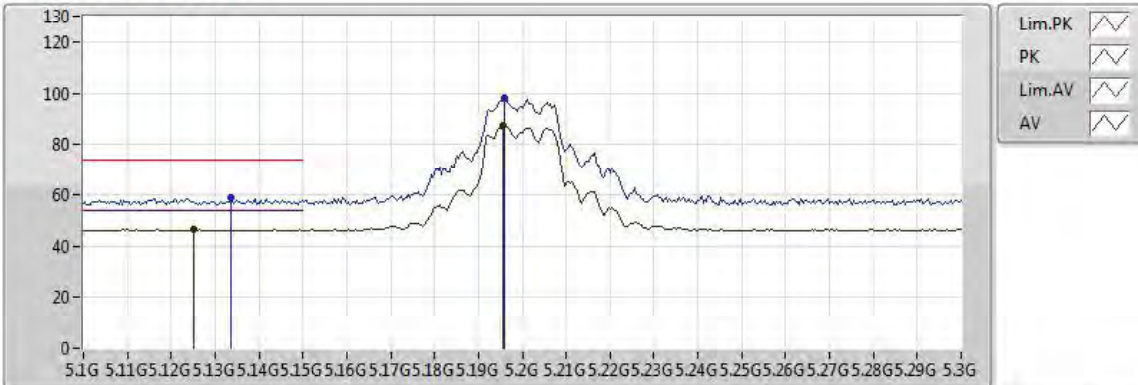


20170831
EUT_Z_2TX
Setting 21
02-Z-1-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1252G	46.51	54.00	-7.49	8.97	3	V	6	2.74	-
AV	5.1956G	87.20	Inf	-Inf	9.15	3	V	6	2.74	-
PK	5.1336G	58.97	74.00	-15.03	8.99	3	V	6	2.74	-
PK	5.196G	97.87	Inf	-Inf	9.15	3	V	6	2.74	-



802.11a_(6Mbps)_2TX

5200MHz_TX

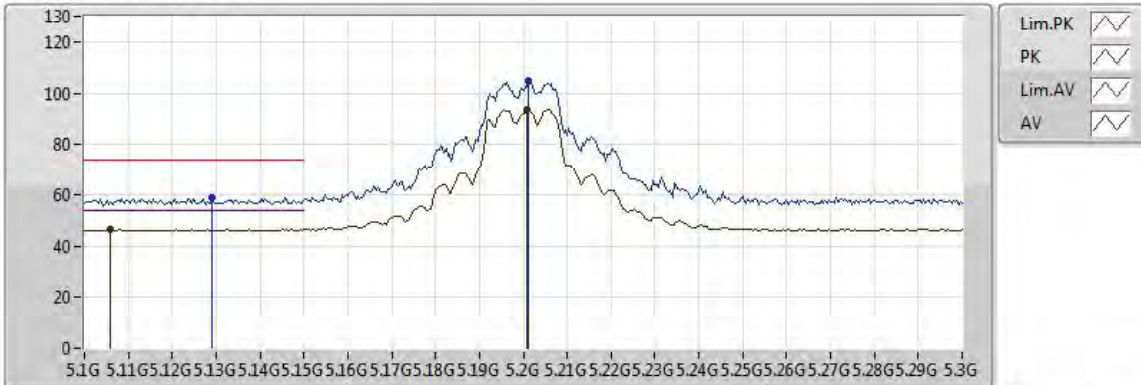


20170831
EUT_Z_2TX
Setting 21
02-Z-1-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.106G	46.51	54.00	-7.49	8.93	3	H	87	1.02	-
AV	5.2008G	93.60	Inf	-Inf	9.16	3	H	87	1.02	-
PK	5.1292G	59.11	74.00	-14.89	8.98	3	H	87	1.02	-
PK	5.2012G	104.95	Inf	-Inf	9.16	3	H	87	1.02	-



802.11a_(6Mbps)_2TX

5200MHz_TX

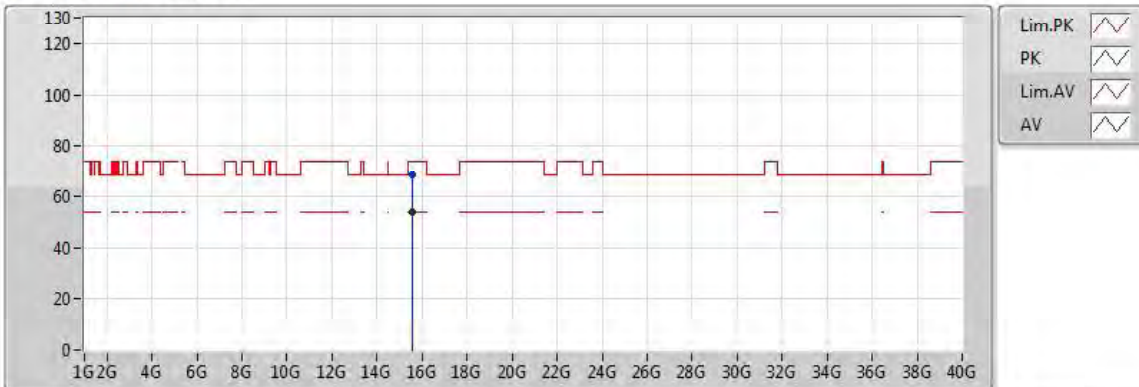


20170831
EUT_Z_2TX
Setting 21
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.59752G	53.68	54.00	-0.32	17.90	3	V	300	1.03	-
PK	15.598G	68.37	74.00	-5.63	17.90	3	V	300	1.03	-




802.11a_(6Mbps)_2TX

5200MHz_TX

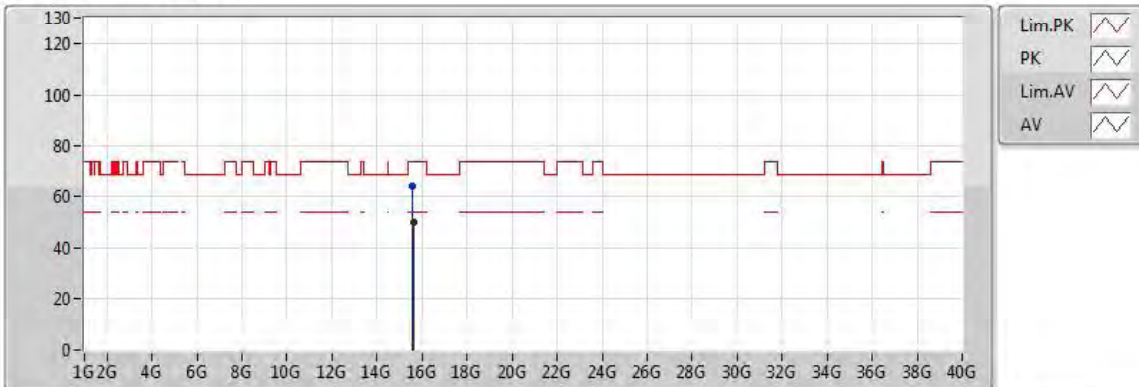


20170831
EUT_Z_2TX
Setting 21
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.60232G	49.61	54.00	-4.39	17.89	3	H	177	2.11	-
PK	15.5968G	64.02	74.00	-9.98	17.90	3	H	177	2.11	-

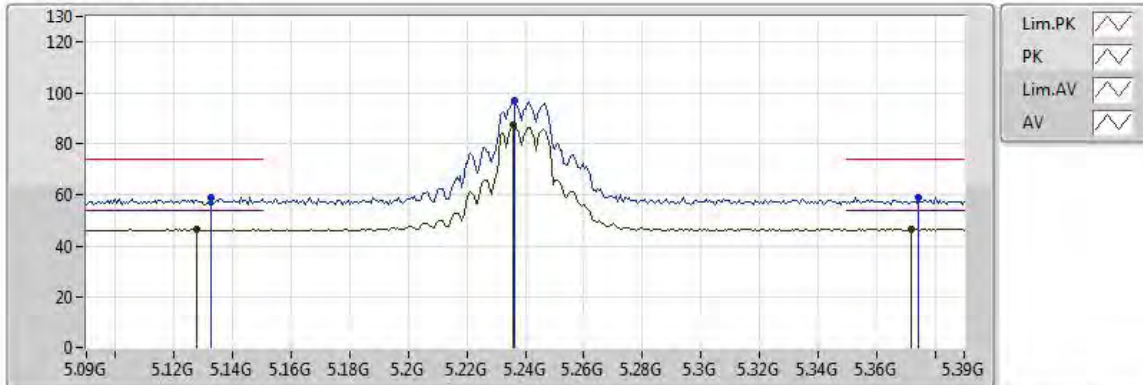**802.11a_(6Mbps)_2TX****5240MHz_TX**

20170831
EUT_Z_2TX
Setting 21.5
02-Z-1-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1278G	46.43	54.00	-7.57	8.98	3	V	148	2.42	-
AV	5.2358G	87.19	Inf	-Inf	9.23	3	V	148	2.42	-
AV	5.372G	46.55	54.00	-7.45	9.47	3	V	148	2.42	-
PK	5.1326G	58.91	74.00	-15.09	8.99	3	V	148	2.42	-
PK	5.2364G	97.19	Inf	-Inf	9.23	3	V	148	2.42	-
PK	5.3744G	58.77	74.00	-15.23	9.48	3	V	148	2.42	-

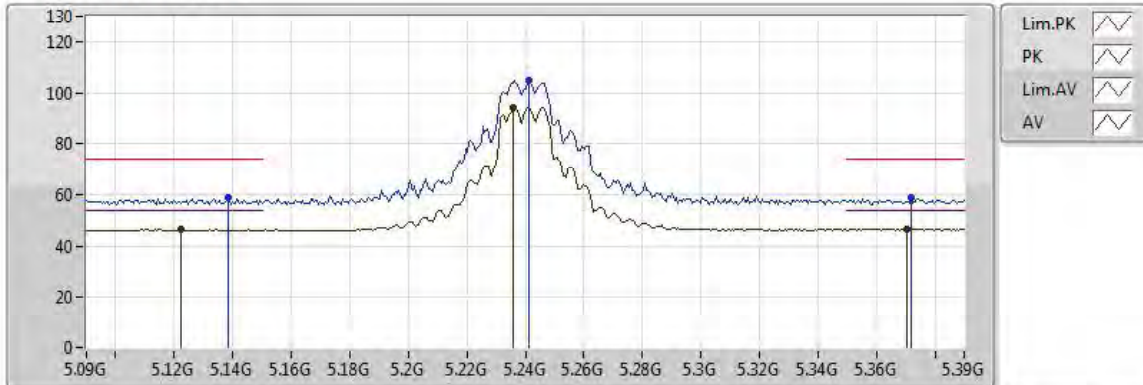
**802.11a_(6Mbps)_2TX****5240MHz_TX**

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1224G	46.51	54.00	-7.49	8.97	3	H	80	1.11	-
AV	5.2358G	94.30	Inf	-Inf	9.23	3	H	80	1.11	-
AV	5.3702G	46.57	54.00	-7.43	9.47	3	H	80	1.11	-
PK	5.1386G	58.88	74.00	-15.12	9.01	3	H	80	1.11	-
PK	5.2412G	104.94	Inf	-Inf	9.24	3	H	80	1.11	-
PK	5.372G	59.04	74.00	-14.96	9.47	3	H	80	1.11	-



802.11a_(6Mbps)_2TX

5240MHz_TX

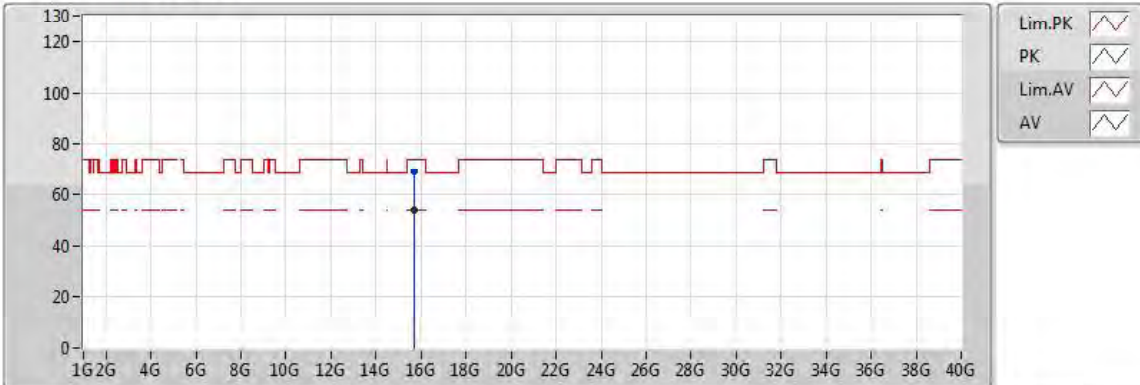


20170831
EUT_Z_2TX
Setting 21.5
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71736G	53.97	54.00	-0.03	17.64	3	V	325	2.19	-
PK	15.71784G	68.75	74.00	-5.25	17.64	3	V	325	2.19	-



802.11a_(6Mbps)_2TX

5240MHz_TX

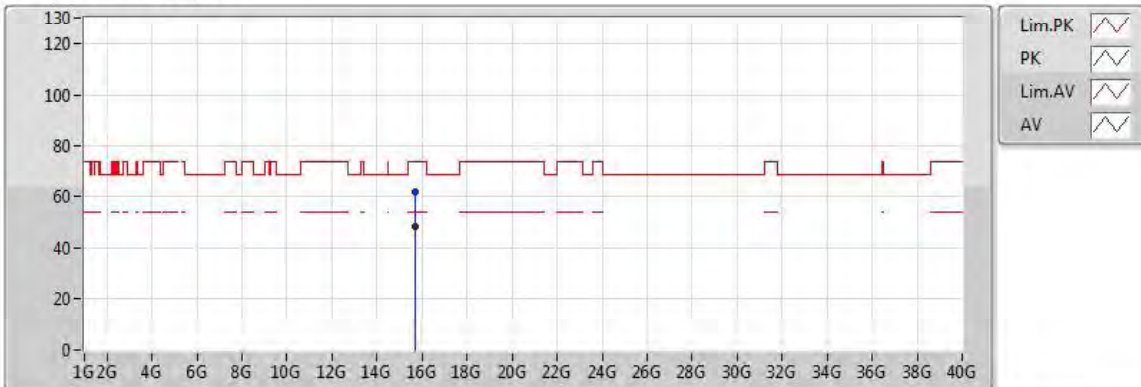


20170831
EUT_Z_2TX
Setting 21.5
02-Z-1
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71708G	48.35	54.00	-5.65	17.64	3	H	214	1.05	-
PK	15.71664G	61.80	74.00	-12.20	17.64	3	H	214	1.05	-



802.11a_(6Mbps)_2TX

5745MHz_TX

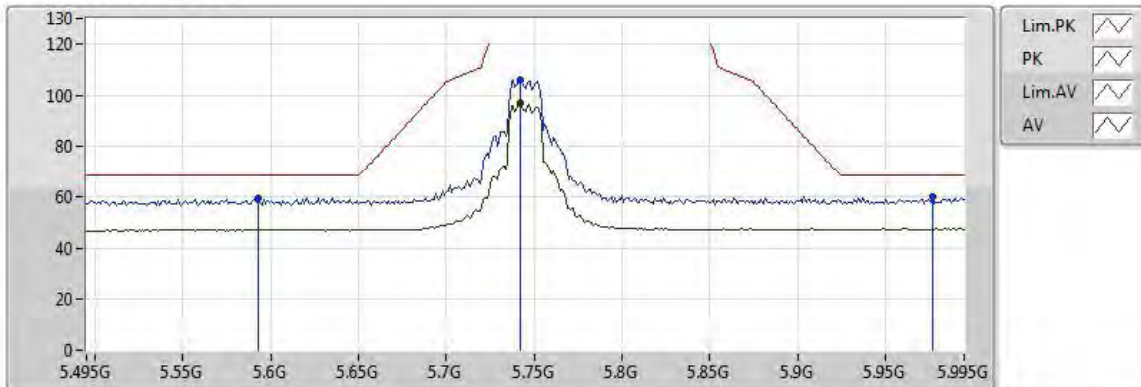


20170831
EUT_Z_2TX
Setting 20
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.742G	96.66	Inf	-Inf	9.91	3	V	229	2.59	-
PK	5.593G	59.35	68.20	-8.85	9.87	3	V	229	2.59	-
PK	5.742G	106.00	Inf	-Inf	9.91	3	V	229	2.59	-
PK	5.977G	59.97	68.20	-8.23	10.17	3	V	229	2.59	-



802.11a_(6Mbps)_2TX


5745MHz_TX

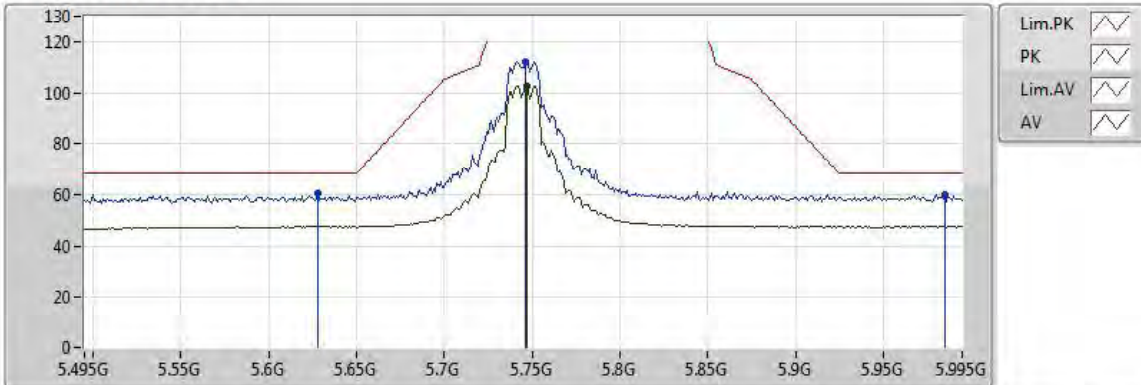



802.11a_(6Mbps)_2TX

5745MHz_TX

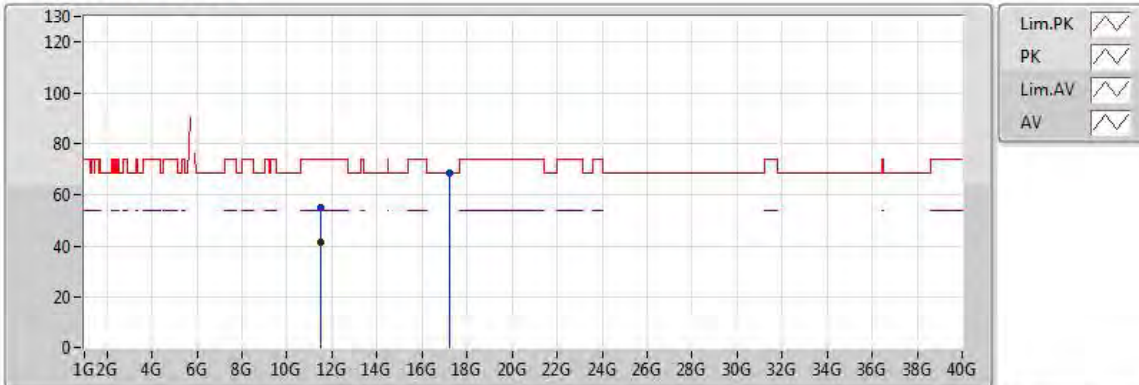


20170831
EUT_Z_2TX
Setting 20
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.48564G	41.64	54.00	-12.36	16.36	3	V	1	2.28	-
PK	11.48192G	54.73	74.00	-19.27	16.36	3	V	1	2.28	-
PK	17.23688G	68.10	68.20	-0.10	22.28	3	V	342	2.54	-



802.11a_(6Mbps)_2TX

5745MHz_TX

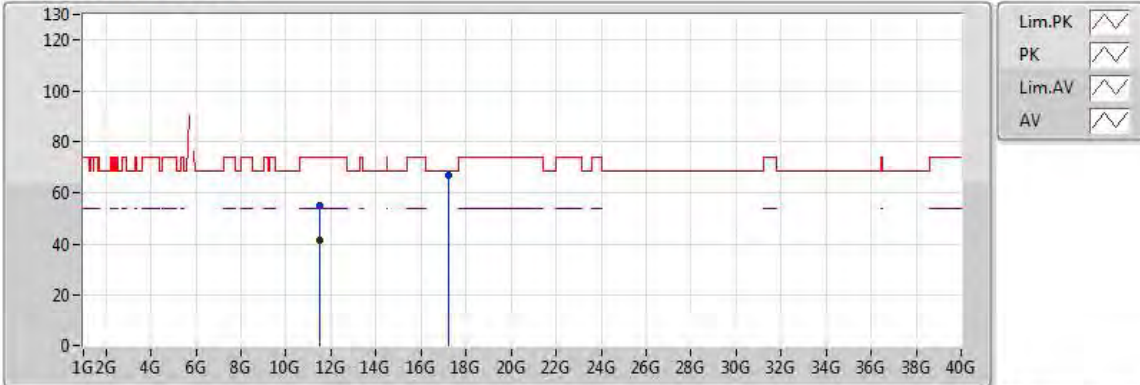


20170831
EUT_Z_2TX
Setting 20
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.49468G	41.49	54.00	-12.51	16.37	3	H	181	1.56	-
PK	11.49552G	54.74	74.00	-19.26	16.37	3	H	181	1.56	-
PK	17.22712G	66.43	68.20	-1.77	22.23	3	H	305	2.66	-



802.11a_(6Mbps)_2TX

5785MHz_TX

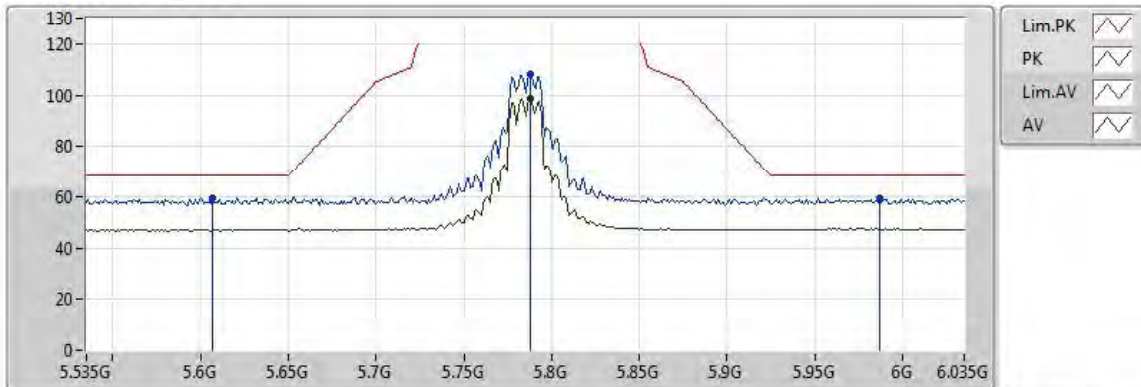


20170831
EUT_Z_2TX
Setting 20
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.788G	98.77	Inf	-Inf	9.92	3	V	248	1.05	-
PK	5.607G	59.39	68.20	-8.81	9.88	3	V	248	1.05	-
PK	5.788G	108.38	Inf	-Inf	9.92	3	V	248	1.05	-
PK	5.987G	59.44	68.20	-8.76	10.18	3	V	248	1.05	-

802.11a_(6Mbps)_2TX

5785MHz_TX

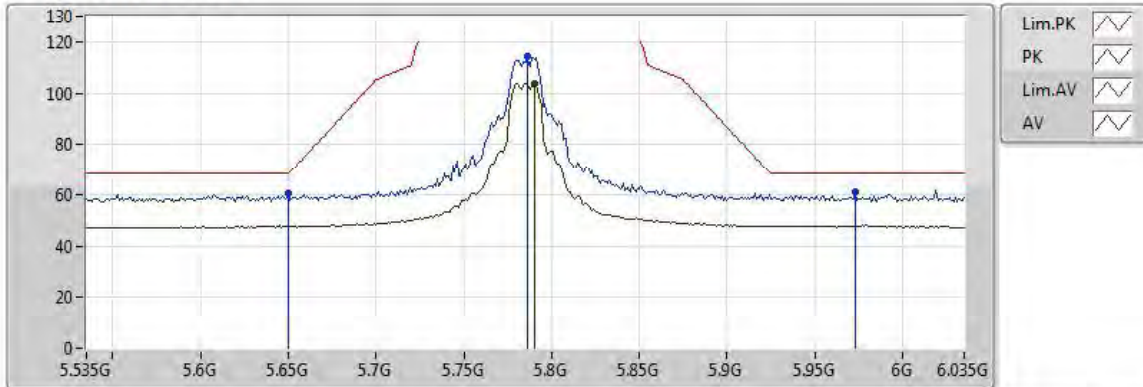


20170831
EUT_Z_2TX
Setting 20
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.79G	103.88	Inf	-Inf	9.92	3	H	272	1.05	-
PK	5.65G	60.27	68.20	-7.93	9.89	3	H	272	1.05	-
PK	5.786G	114.08	Inf	-Inf	9.92	3	H	272	1.05	-
PK	5.973G	61.10	68.20	-7.10	10.16	3	H	272	1.05	-



802.11a_(6Mbps)_2TX

5785MHz_TX

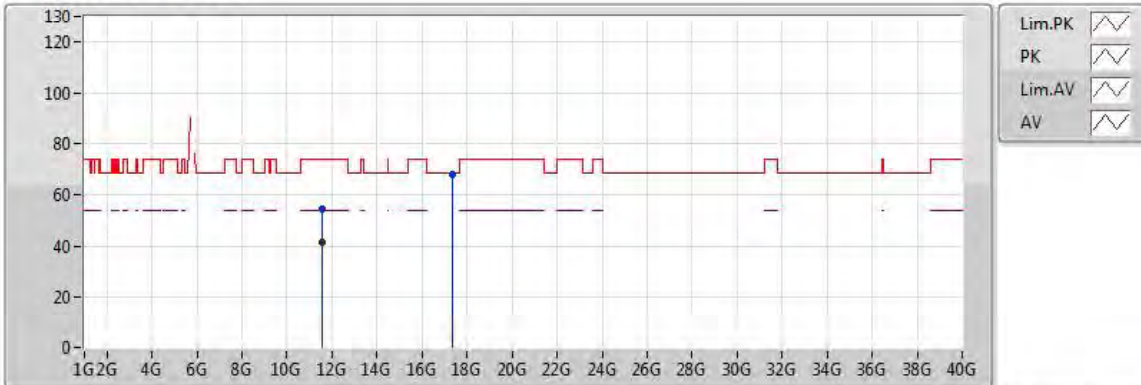


20170831
EUT_Z_2TX
Setting 20
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.57648G	41.47	54.00	-12.53	16.46	3	V	346	1.89	-
PK	11.56452G	54.56	74.00	-19.44	16.45	3	V	346	1.89	-
PK	17.35712G	67.83	68.20	-0.37	22.98	3	V	285	2.06	-



802.11a_(6Mbps)_2TX

5785MHz_TX

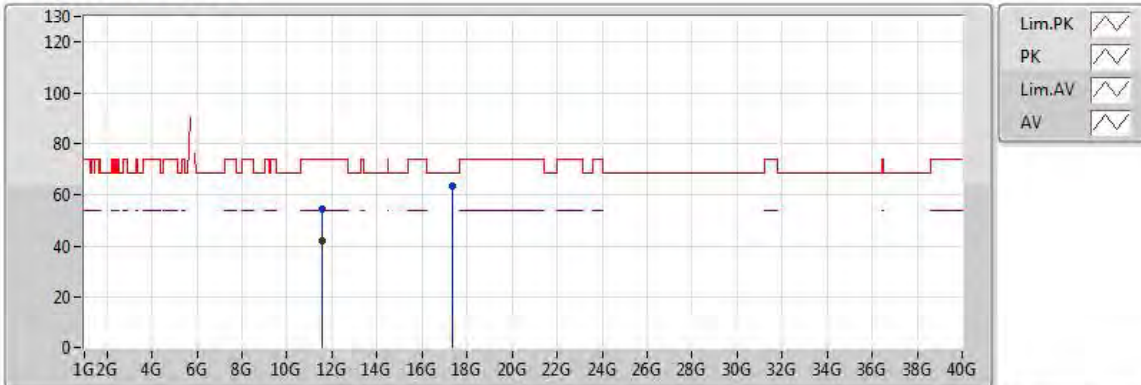


20170831
EUT_Z_2TX
Setting 20
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.5758G	41.94	54.00	-12.06	16.46	3	H	69	1.96	-
PK	11.56048G	54.59	74.00	-19.41	16.44	3	H	69	1.96	-
PK	17.36208G	63.51	68.20	-4.69	23.01	3	H	318	2.06	-



802.11a_(6Mbps)_2TX

5825MHz_TX

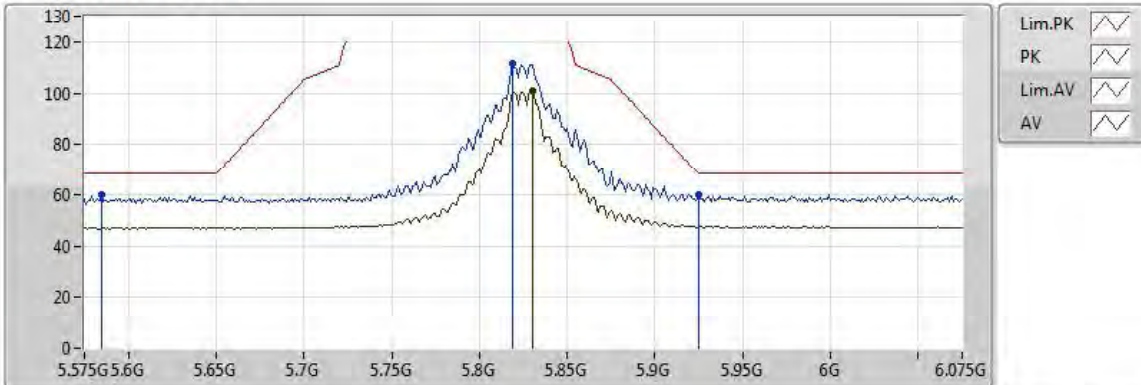


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.83G	100.80	Inf	-Inf	9.96	3	V	293	1.05	-
PK	5.585G	59.78	68.20	-8.42	9.87	3	V	293	1.05	-
PK	5.819G	111.54	Inf	-Inf	9.95	3	V	293	1.05	-
PK	5.925G	59.99	68.20	-8.21	10.09	3	V	293	1.05	-



802.11a_(6Mbps)_2TX

5825MHz_TX

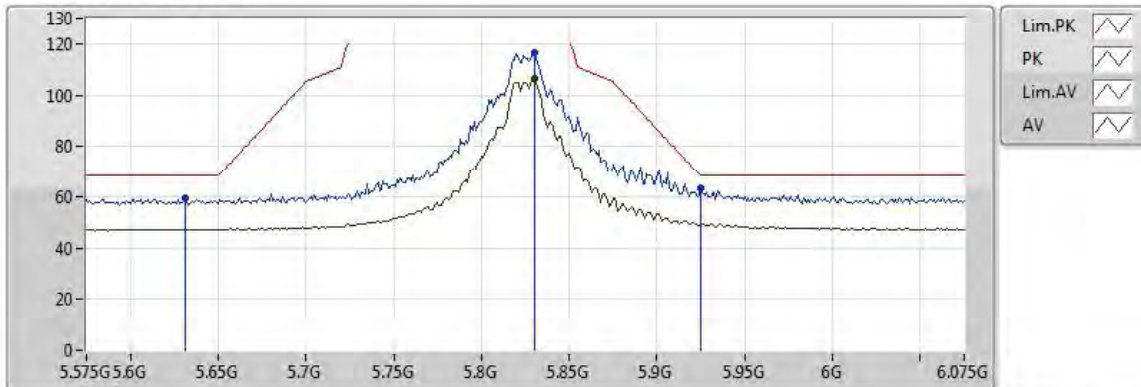


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.83G	106.26	Inf	-Inf	9.96	3	H	285	1.01	-
PK	5.631G	59.45	68.20	-8.75	9.89	3	H	285	1.01	-
PK	5.83G	116.30	Inf	-Inf	9.96	3	H	285	1.01	-
PK	5.925G	63.16	68.20	-5.04	10.09	3	H	285	1.01	-



802.11a_(6Mbps)_2TX

5825MHz_TX

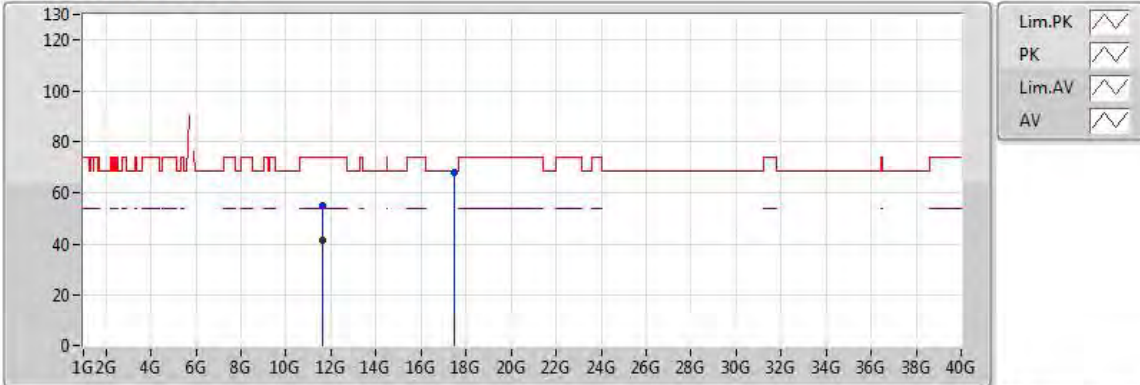


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.64728G	41.55	54.00	-12.45	16.54	3	V	327	2.00	-
PK	11.65164G	54.74	74.00	-19.26	16.54	3	V	327	2.00	-
PK	17.48922G	67.55	68.20	-0.65	23.75	3	V	295	1.62	-



802.11a_(6Mbps)_2TX

5825MHz_TX

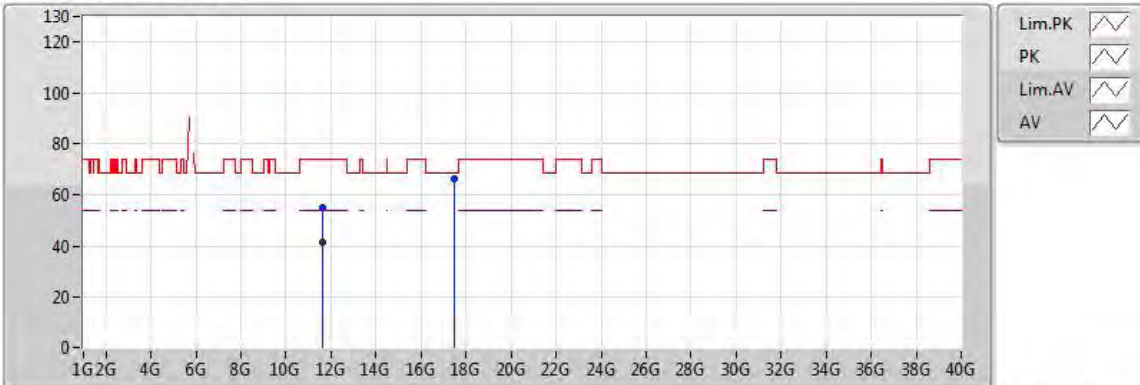


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.6508G	41.69	54.00	-12.31	16.54	3	H	280	2.45	-
PK	11.64776G	54.85	74.00	-19.15	16.54	3	H	280	2.45	-
PK	17.475G	66.22	68.20	-1.98	23.66	3	H	235	1.30	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5180MHz_TX

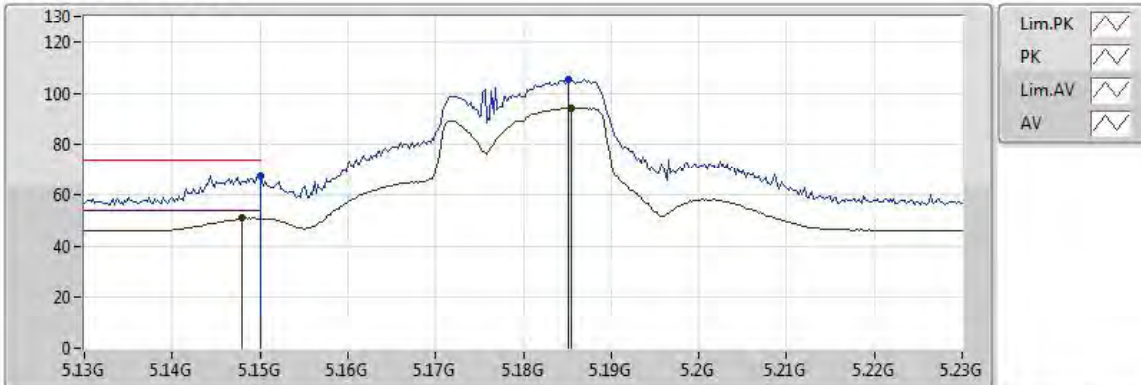


20170831
EUT_Z_TX
Setting 19
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.148G	50.99	54.00	-3.01	9.03	3	V	187	2.47	-
AV	5.1854G	94.31	Inf	-Inf	9.12	3	V	187	2.47	-
PK	5.149995G	67.24	74.00	-6.76	9.03	3	V	187	2.47	-
PK	5.1852G	105.31	Inf	-Inf	9.12	3	V	187	2.47	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5180MHz_TX

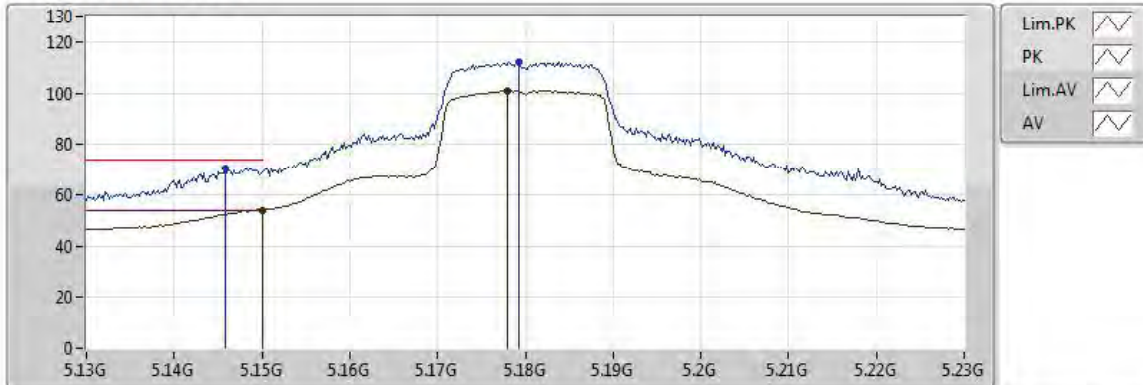


20170831
EUT_Z_TX
Setting 19
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.149995G	53.94	54.00	-0.06	9.03	3	H	97	1.00	-
AV	5.178G	100.85	Inf	-Inf	9.11	3	H	97	1.00	-
PK	5.1458G	70.72	74.00	-3.28	9.02	3	H	97	1.00	-
PK	5.1792G	111.97	Inf	-Inf	9.11	3	H	97	1.00	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5180MHz_TX

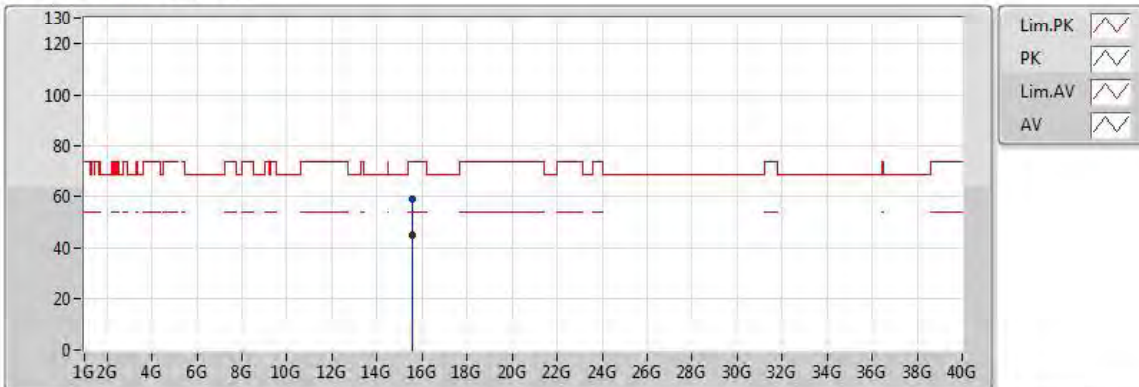


20170831
EUT_Z_2TX
Setting 19
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.54366G	44.81	54.00	-9.19	18.02	3	V	318	2.70	-
PK	15.5447G	59.04	74.00	-14.96	18.02	3	V	318	2.70	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5180MHz_TX

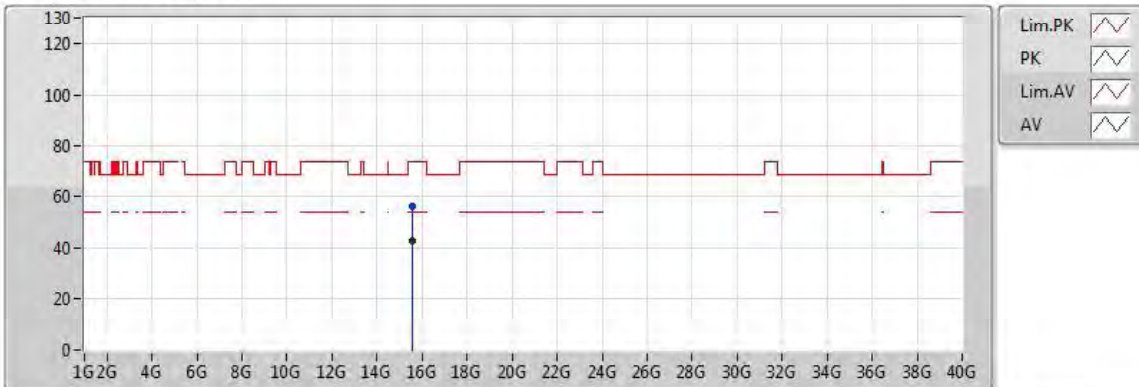


20170831
EUT_Z_2TX
Setting 19
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.54416G	42.40	54.00	-11.60	18.02	3	H	11	1.67	-
PK	15.5399G	56.07	74.00	-17.93	18.03	3	H	11	1.67	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

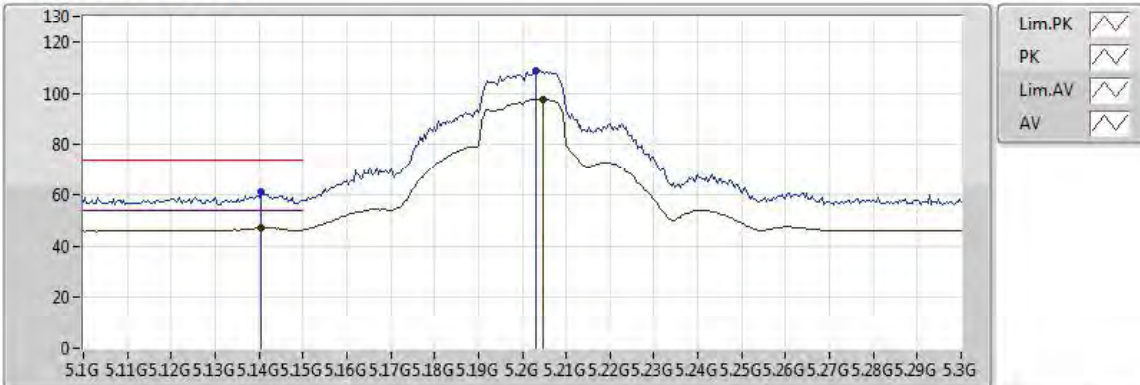


20170831
EUT_Z_2TX
Setting 23
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1404G	47.00	54.00	-7.00	9.01	3	V	22	2.74	-
AV	5.2048G	97.60	Inf	-Inf	9.17	3	V	22	2.74	-
PK	5.1404G	61.06	74.00	-12.94	9.01	3	V	22	2.74	-
PK	5.2032G	108.82	Inf	-Inf	9.17	3	V	22	2.74	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

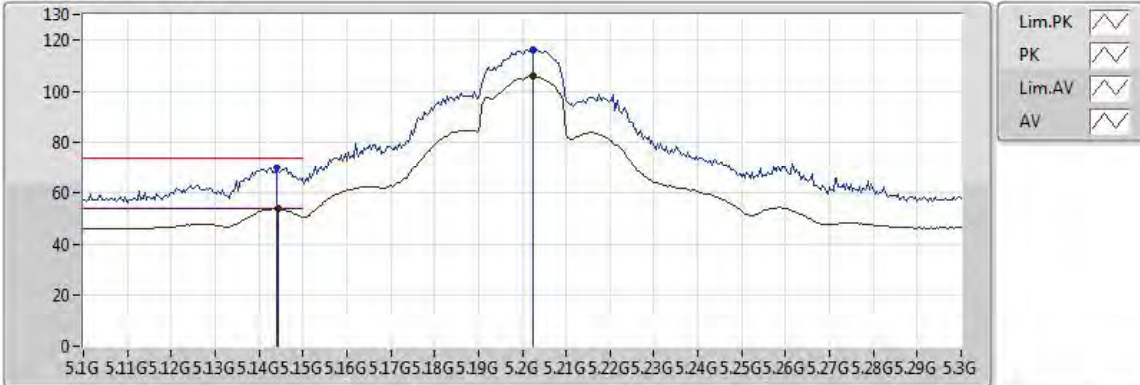


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1444G	53.63	54.00	-0.37	9.02	3	H	83	1.05	-
AV	5.2024G	105.75	Inf	-Inf	9.16	3	H	83	1.05	-
PK	5.144G	70.03	74.00	-3.97	9.02	3	H	83	1.05	-
PK	5.2024G	116.21	Inf	-Inf	9.16	3	H	83	1.05	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

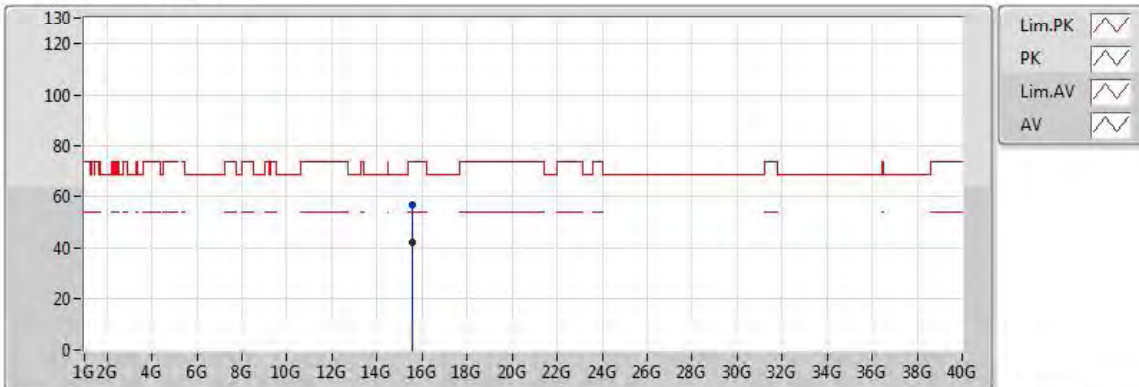


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.59052G	42.23	54.00	-11.77	17.92	3	V	55	2.28	-
PK	15.59812G	56.78	74.00	-17.22	17.90	3	V	55	2.28	-




802.11ac VHT20_Nss1,(MCS0)_2TX

5200MHz_TX

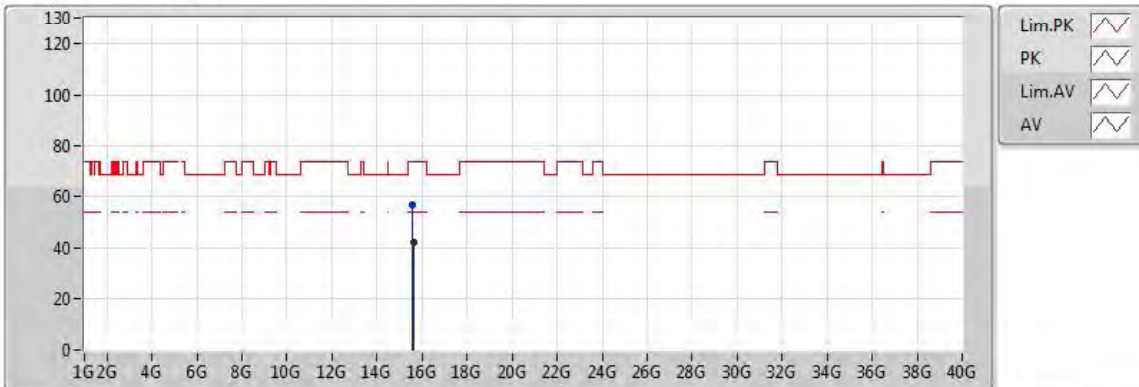

20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.6016G	42.12	54.00	-11.88	17.89	3	H	203	1.07	-
PK	15.59536G	56.37	74.00	-17.63	17.91	3	H	203	1.07	-

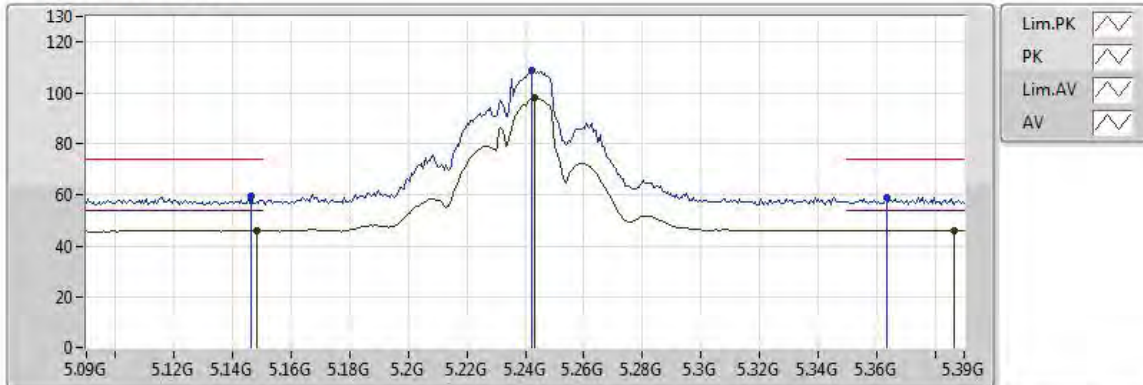**802.11ac VHT20_Nss1,(MCS0)_2TX****5240MHz_TX**


20170831
EUT_Z_2TX
Setting 23
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1482G	45.84	54.00	-8.16	9.03	3	V	178	2.54	-
AV	5.243G	97.83	Inf	-Inf	9.24	3	V	178	2.54	-
AV	5.3864G	46.10	54.00	-7.90	9.50	3	V	178	2.54	-
PK	5.1464G	59.16	74.00	-14.84	9.03	3	V	178	2.54	-
PK	5.2424G	108.85	Inf	-Inf	9.24	3	V	178	2.54	-
PK	5.3636G	58.75	74.00	-15.25	9.46	3	V	178	2.54	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

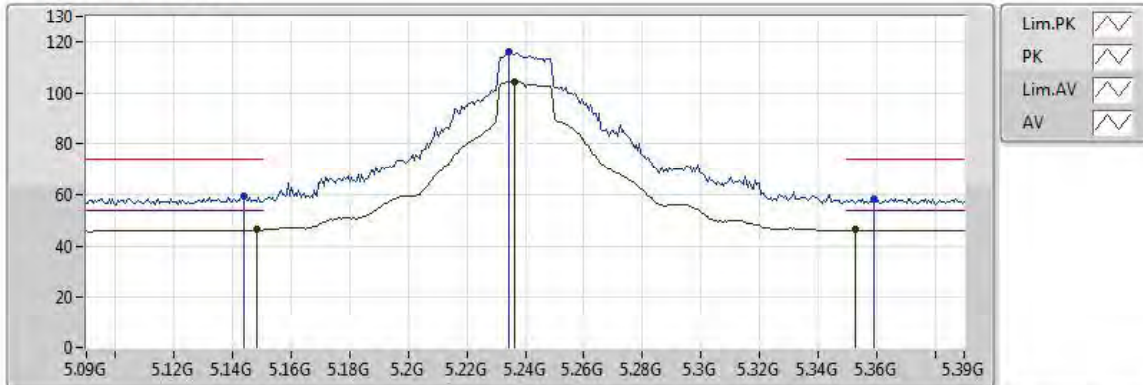


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.1482G	46.24	54.00	-7.76	9.03	3	H	108	2.59	-
AV	5.2364G	104.47	Inf	-Inf	9.23	3	H	108	2.59	-
AV	5.3528G	46.23	54.00	-7.77	9.44	3	H	108	2.59	-
PK	5.144G	59.12	74.00	-14.88	9.02	3	H	108	2.59	-
PK	5.2346G	115.83	Inf	-Inf	9.23	3	H	108	2.59	-
PK	5.3594G	58.47	74.00	-15.53	9.45	3	H	108	2.59	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

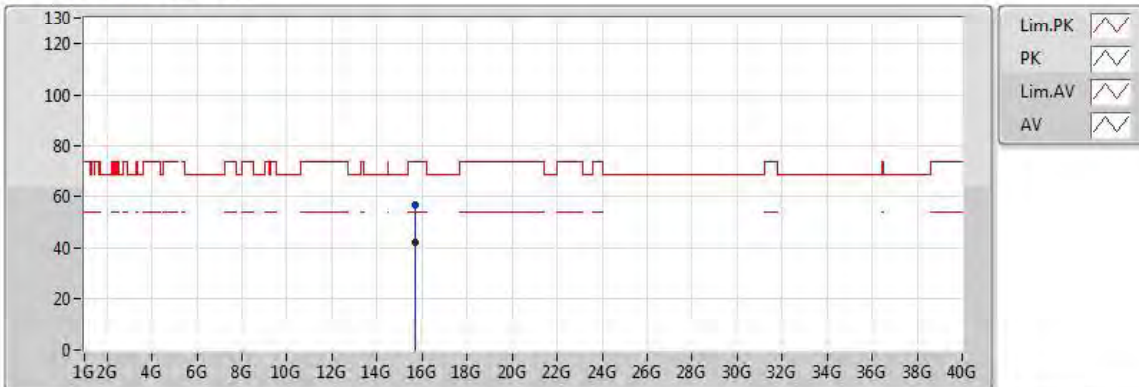


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71252G	42.03	54.00	-11.97	17.65	3	V	75	1.99	-
PK	15.71344G	56.87	74.00	-17.13	17.65	3	V	75	1.99	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5240MHz_TX

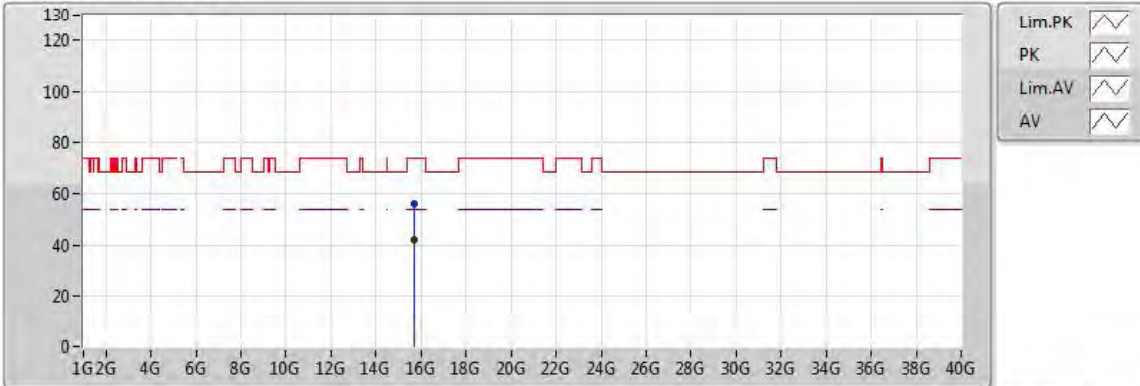


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	15.71524G	42.01	54.00	-11.99	17.65	3	H	258	2.43	-
PK	15.71512G	55.97	74.00	-18.03	17.65	3	H	258	2.43	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5745MHz_TX

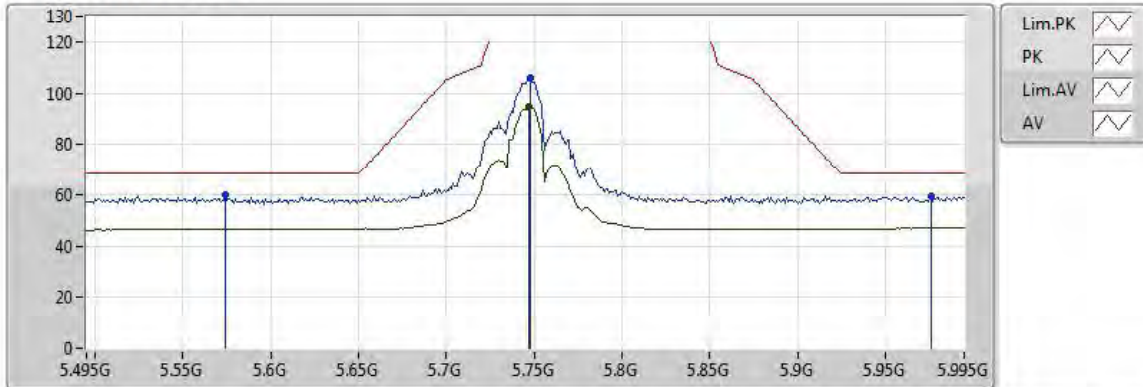


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.747G	94.95	Inf	-Inf	9.91	3	V	175	1.13	-
PK	5.74G	59.69	68.20	-8.51	9.86	3	V	175	1.13	-
PK	5.748G	106.10	Inf	-Inf	9.91	3	V	175	1.13	-
PK	5.976G	59.64	68.20	-8.56	10.17	3	V	175	1.13	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5745MHz_TX

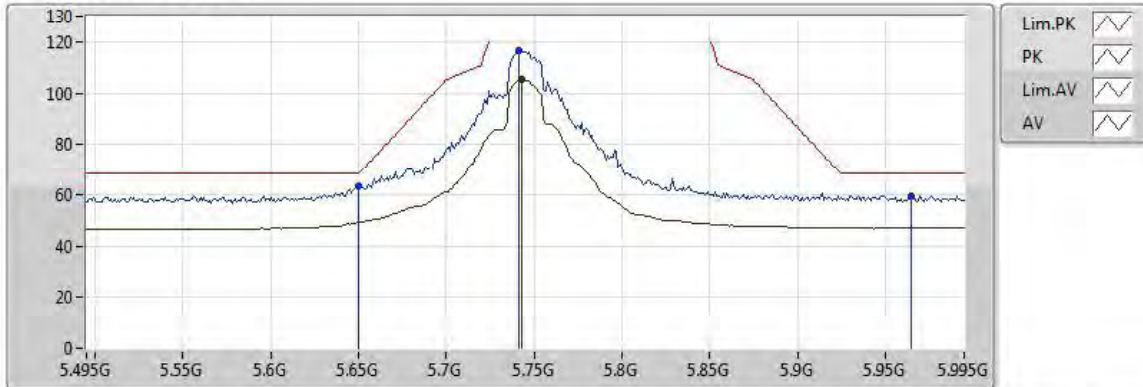


20170831
EUT_Z_2TX
Setting 23
02-J-6-10
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.743G	105.51	Inf	-Inf	9.91	3	H	284	1.05	-
PK	5.65G	63.04	68.20	-5.16	9.89	3	H	284	1.05	-
PK	5.741G	116.56	Inf	-Inf	9.91	3	H	284	1.05	-
PK	5.965G	59.55	68.20	-8.65	10.15	3	H	284	1.05	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5745MHz_TX

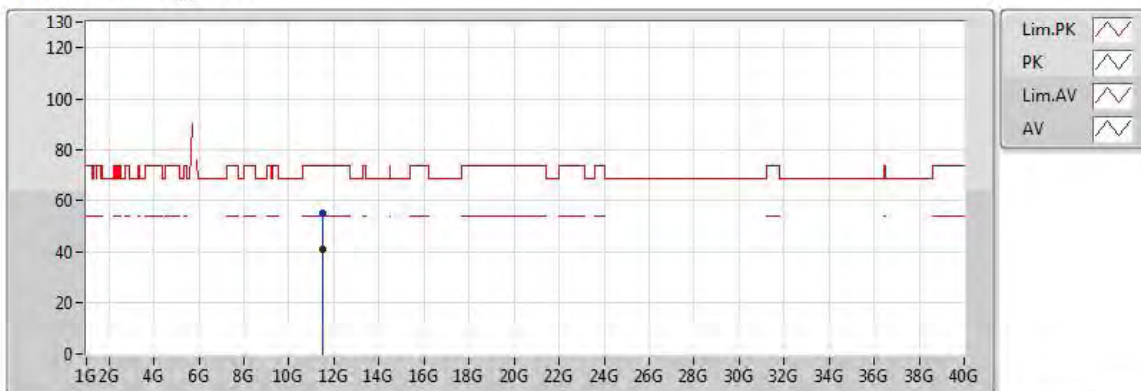


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.48552G	40.97	54.00	-13.03	16.36	3	V	323	2.12	-
PK	11.49824G	54.96	74.00	-19.04	16.37	3	V	323	2.12	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5745MHz_TX

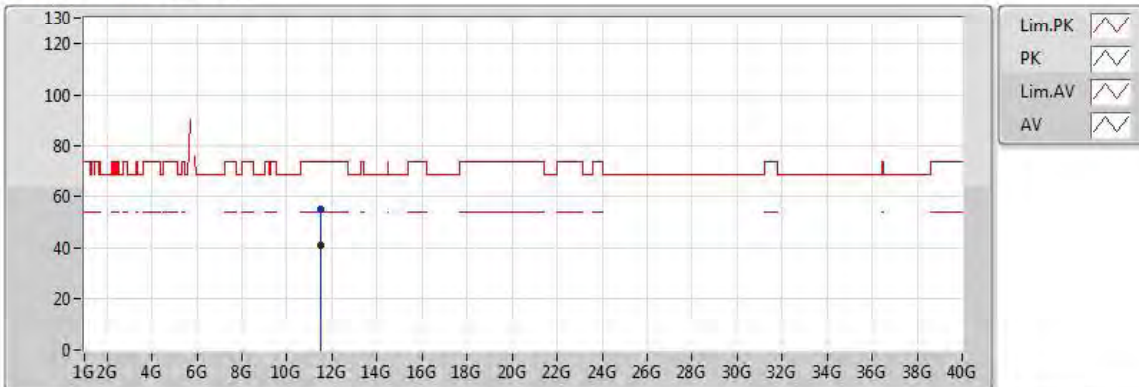


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.48504G	40.89	54.00	-13.11	16.36	3	H	146	2.40	-
PK	11.48512G	54.98	74.00	-19.02	16.36	3	H	146	2.40	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

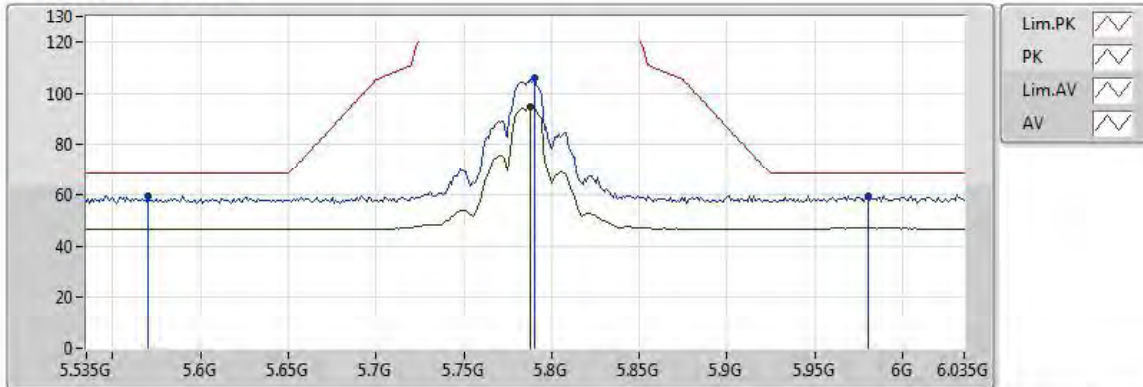


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.788G	94.43	Inf	-Inf	9.92	3	V	173	1.12	-
PK	5.57G	59.61	68.20	-8.59	9.85	3	V	173	1.12	-
PK	5.79G	105.94	Inf	-Inf	9.92	3	V	173	1.12	-
PK	5.98G	59.54	68.20	-8.66	10.17	3	V	173	1.12	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

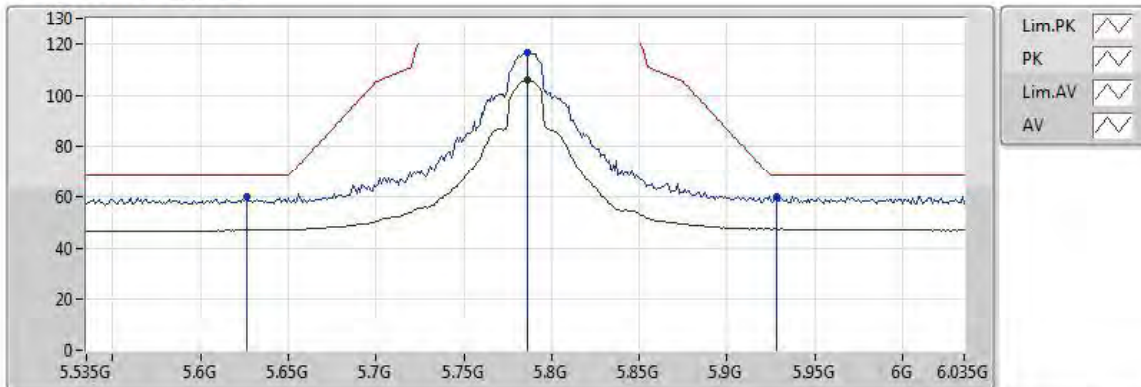


Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	5.786G	105.92	Inf	-Inf	9.92	3	H	276	1.19	-
PK	5.626G	59.89	68.20	-8.31	9.89	3	H	276	1.19	-
PK	5.786G	116.57	Inf	-Inf	9.92	3	H	276	1.19	-
PK	5.928G	60.05	68.20	-8.15	10.10	3	H	276	1.19	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

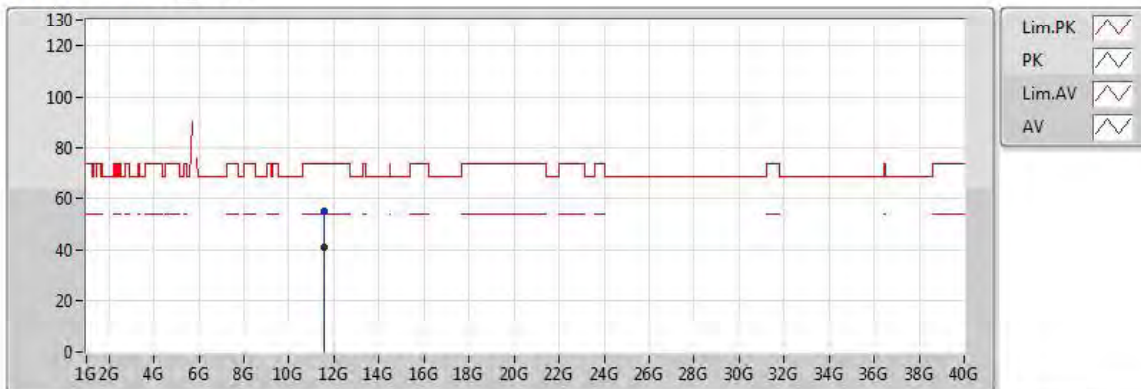


20170831
EUT_Z_2TX
Setting 23
02-J-6
FSU

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.5784G	40.78	54.00	-13.22	16.46	3	V	356	1.47	-
PK	11.5726G	54.95	74.00	-19.05	16.45	3	V	356	1.47	-



802.11ac VHT20_Nss1,(MCS0)_2TX

5785MHz_TX

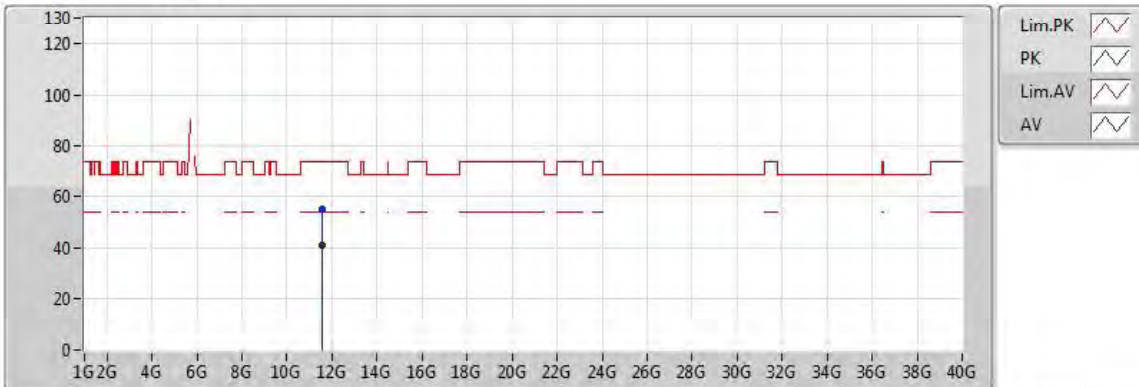

Type	Freq(Hz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Factor(dB)	Dist(m)	Pol.(H/V)	Azimuth(°)	Height(m)	Comments
AV	11.56104G	40.83	54.00	-13.17	16.44	3	H	33	2.45	-
PK	11.56604G	54.69	74.00	-19.31	16.45	3	H	33	2.45	-