


## **Product specification**

### **Quick Reference Data**

	Antenna module on the system board	
Antenna type	PCB	
Frequency	2.45GHz <sup>*1</sup>	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr ?loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.7 (Peak Gain X Z-plane)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	

All the technical data and information contained herein are subject to change without prior notice

### **Antenna Layout & module on the system board**

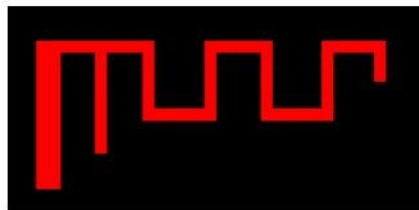


### **Antenna Gain**



**Gain Table**

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.3	-0.5	1.7	-3.8	1.1	-3.0	58.5%


## Return Loss

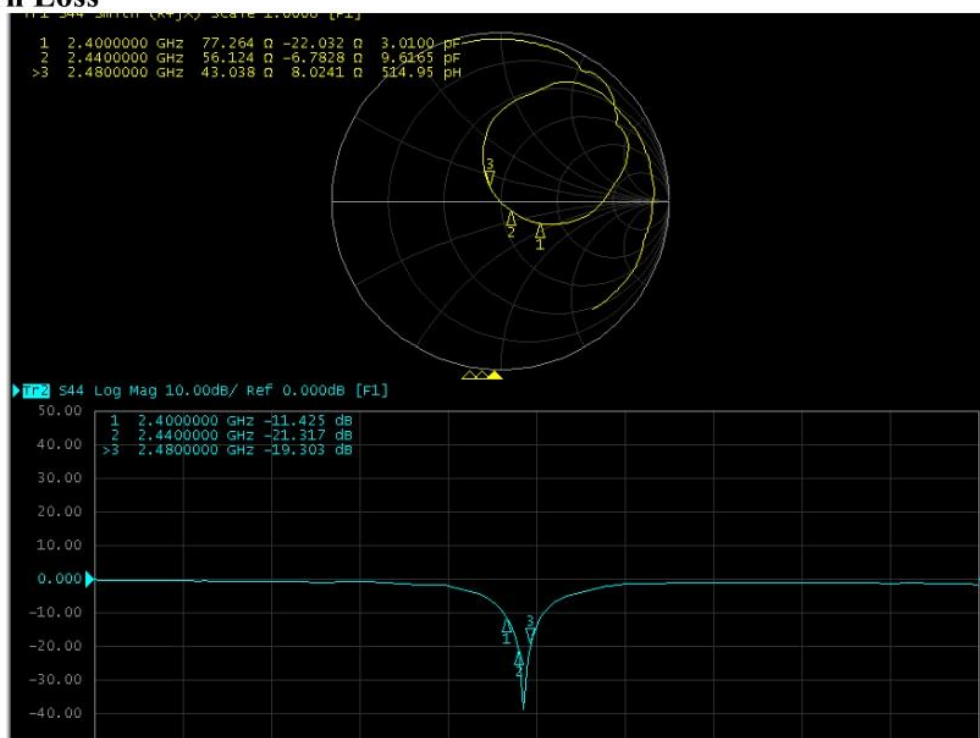


## The Environment of Antenna Radiation Pattern

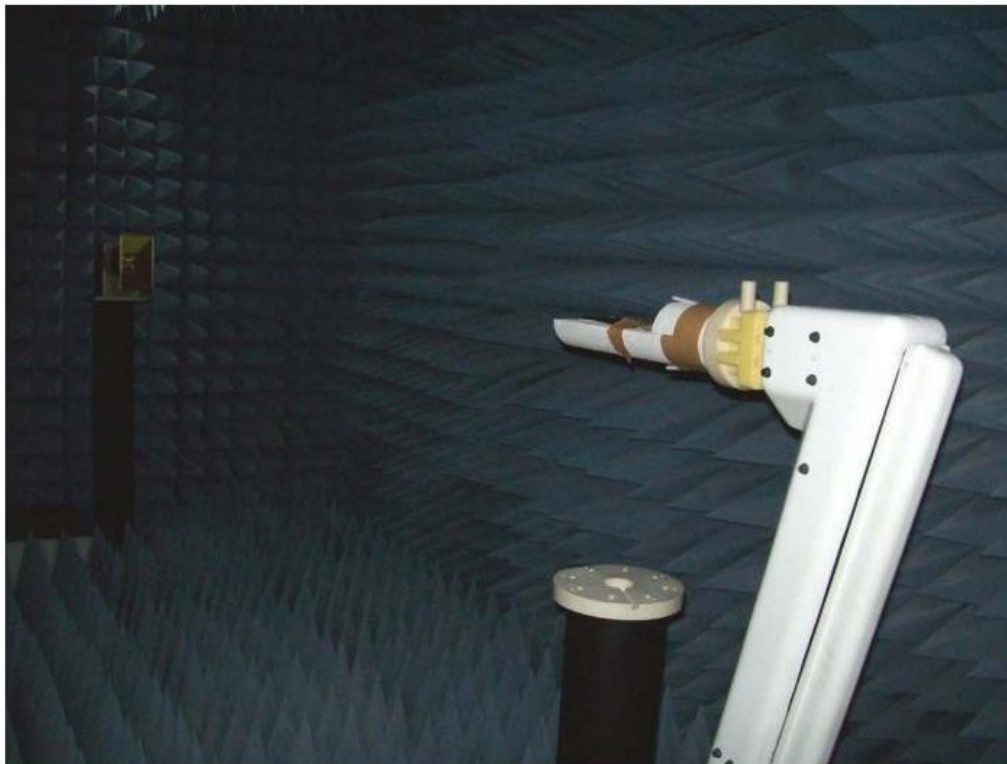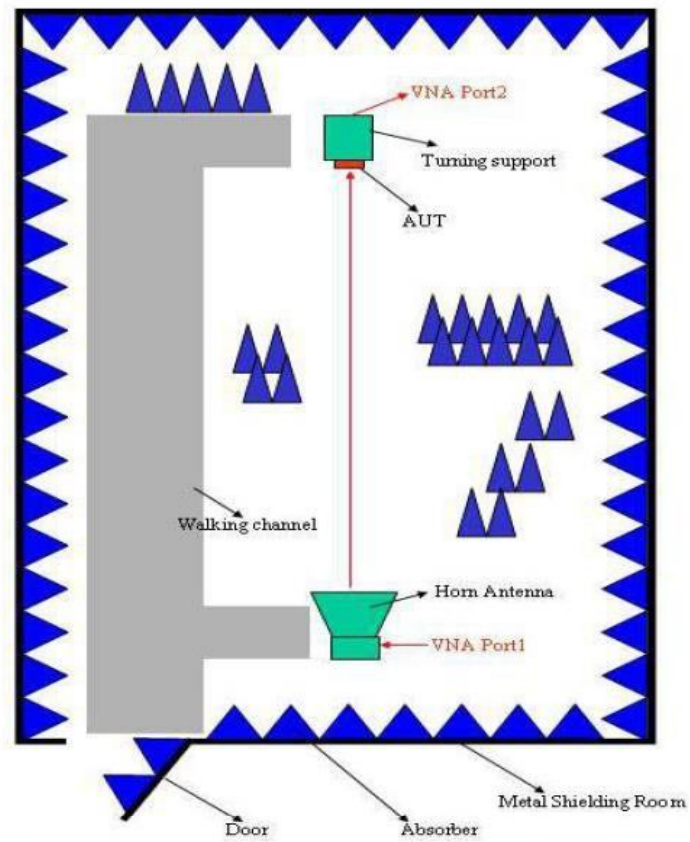


## 3D radiation pattern diagram

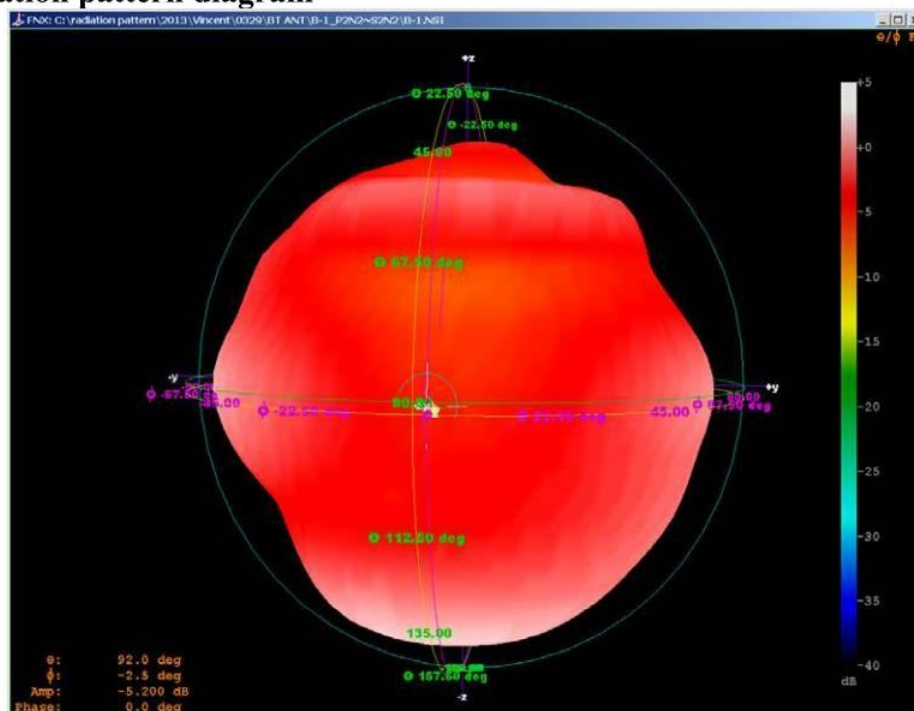


### XY-plane

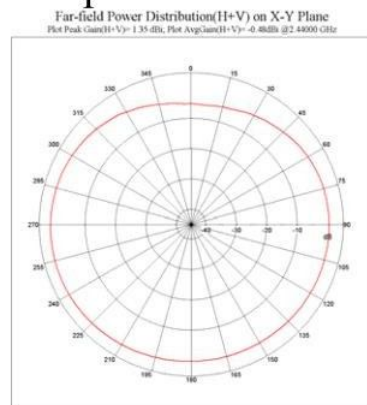

### XZ-plane

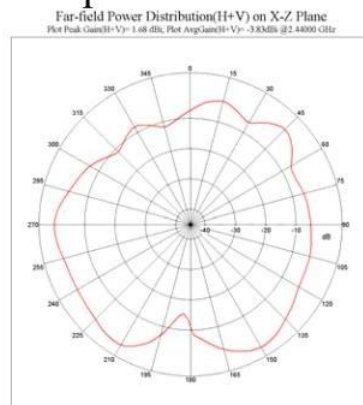

### YZ-plane

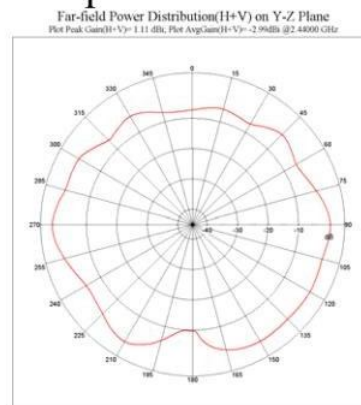

Manufacturer: FORM ELECTRONICS CO.,Ltd

Address:2F, Bldg G, Hongzhu Yongqi Technology Park, Lezhujiao, Hangcheng Street, Bao'an Dist, Shenzhen Guangdong, China, 518103