

## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

Applicant:	Sharp Corporation, Mobile Communication B.U. 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan
Manufacturer:	Sharp Corporation 1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Product Name:	Smart phone
Report Number:	ER/2019/C0075
FCC ID:	APYHRO00281
FCC Rule Part:	§15.247, Cat: DTS
Issue Date:	Jan. 20, 2020
Date of Test:	Dec. 09, 2019 ~ Jan. 15, 2020
Date of EUT Received:	Dec. 09, 2019

#### We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Approved By:

Vito Pei/ Sr. Engineer



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Revision History					
Report Number	Revision	Description	Issue Date	Remark	
EB/2010/C0075	5 Pov 00	R/2019/C0075 Rev.00	Original.	Jan. 20, 2020	Revised By:
ER/2019/C0075	Nev.00	Onginal.	Jan. 20, 2020	Karen Huang	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



## **Contents**

1. GENERAL INFORMATION	4
2. SYSTEM TEST CONFIGURATION	6
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES	9
5. MEASUREMENT UNCERTAINTY	11
6. CONDUCTED EMISSION TEST	12
7. PEAK OUTPUT POWER MEASUREMENT	16
8. 6dB BANDWIDTH MEASUREMENT	20
9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	23
10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	29
11. PEAK POWER SPECTRAL DENSITY	58
12. ANTENNA REQUIREMENT	61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



## **1. GENERAL INFORMATION**

## **1.1 Product Description**

Product Name:	Smart phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.85V from Rechargeable Li-ion Battery
Radio Technology:	Bluetooth LE dual mode
Frequency Range:	2.402GHz – 2.480GHz
Channel Number:	40 channels
Modulation Type:	GFSK
Transmit Power:	7.82dBm (BLE 1Mbps) 8.12dBm (BLE 2Mbps)
Antenna Designation:	Inverted-F Antenna, Gain: -4.2dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未检公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCC Taware 14 Not</u> 124 Wuty unpbred Now Tainpilotett Wukuplicitet Now Tainpilot Tainar04090/86 th at T RET 86 th at RET T 124 BP



## 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05r02 DTS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

## **1.3 Test Facility**

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Designation number: TW0001

#### **1.4 Special Accessories**

There are no special accessories used while test was conducted.

#### **1.5 Equipment Modifications**

There was no modification incorporated into the EUT.

#### 1.6 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m\*9m\*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 2. SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

## 2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

## 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2019/C0075 Page 7 of 61


## 2.5 Configuration of Tested System Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted Emission

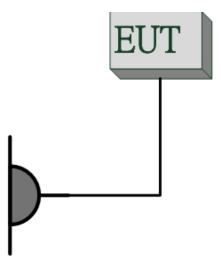

## Fig. 2-3 Conducted (Antenna Port) Emission



Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY52410006	N/A	N/A
3.	Notebook	Lenovo	L430	R9-X11BG	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## **3. SUMMARY OF TEST RESULTS**

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



## **4. DESCRIPTION OF TEST MODES**

## 4.1 Operated in 2400 ~ 2483.5MHz Band

#### 40 channels are provided for Bluetooth LE

FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
2402 MHz	15	2430 MHz	29	2458 MHz
2404 MHz	16	2432 MHz	30	2460 MHz
2406 MHz	17	2434 MHz	31	2462 MHz
2408 MHz	18	2436 MHz	32	2464 MHz
2410 MHz	19	2438 MHz	33	2466 MHz
2412 MHz	20	2440 MHz	34	2468 MHz
2414 MHz	21	2442 MHz	35	2470 MHz
2416MHz	22	2444 MHz	36	2472 MHz
2418 MHz	23	2446 MHz	37	2474 MHz
2420 MHz	24	2448 MHz	38	2476 MHz
2422 MHz	25	2450 MHz	39	2478 MHz
2424 MHz	26	2452 MHz	40	2480 MHz
2426 MHz	27	2454 MHz		
2428 MHz	28	2456 MHz		
	2402 MHz 2404 MHz 2406 MHz 2408 MHz 2410 MHz 2410 MHz 2412 MHz 2414 MHz 2416MHz 2418 MHz 2420 MHz 2422 MHz 2424 MHz 2426 MHz	2402 MHz 15   2404 MHz 16   2406 MHz 17   2408 MHz 18   2410 MHz 19   2412 MHz 20   2414 MHz 21   2416 MHz 22   2418 MHz 23   2420 MHz 24   2420 MHz 25   2424 MHz 26   2426 MHz 27	2402 MHz 15 2430 MHz   2404 MHz 16 2432 MHz   2406 MHz 17 2434 MHz   2408 MHz 18 2436 MHz   2410 MHz 19 2438 MHz   2410 MHz 19 2438 MHz   2412 MHz 20 2440 MHz   2414 MHz 21 2442 MHz   2416 MHz 23 2446 MHz   2420 MHz 24 2448 MHz   2420 MHz 25 2450 MHz   2422 MHz 26 2452 MHz   2426 MHz 27 2454 MHz	2402 MHz 15 2430 MHz 29   2404 MHz 16 2432 MHz 30   2406 MHz 17 2434 MHz 31   2408 MHz 18 2436 MHz 32   2410 MHz 19 2438 MHz 33   2410 MHz 19 2438 MHz 33   2412 MHz 20 2440 MHz 34   2414 MHz 21 2442 MHz 35   2416 MHz 23 2444 MHz 36   2418 MHz 23 2446 MHz 37   2420 MHz 24 2448 MHz 38   2422 MHz 25 2450 MHz 39   2424 MHz 26 2452 MHz 40   2426 MHz 27 2454 MHz 40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
	RADIATED EMISSION TEST (BELOW 1 GHz)					
Bluetooth LE	2402 to 2480	2440	GFSK	1		
Bluetooth LE	2402 to 2480	2440	GFSK	2		
RADIATED EMISSION TEST (ABOVE 1 GHz)						
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	2		

**Note:** The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:				
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	1
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## **5. MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission Measurement Uncertainty			
	9kHz~30MHz: +-2.3dB		
	30MHz - 180MHz: +/- 3.37dB		
Delevizetien, Vertical	180MHz -417MHz: +/- 3.19dB		
Polarization: Vertical	0.417GHz-1GHz: +/- 3.19dB		
	1GHz - 18GHz: +/- 4.04dB		
	18GHz - 40GHz: +/- 4.04dB		
	9kHz~30MHz: +-2.3dB		
	30MHz - 167MHz: +/- 4.22dB		
	167MHz -500MHz: +/- 3.44dB		
Polarization: Horizontal	0.5GHz-1GHz: +/- 3.39dB		
	1GHz - 18GHz: +/- 4.08dB		
	18GHz - 40GHz: +/- 4.08dB		

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 6. CONDUCTED EMISSION TEST

## 6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(µV)						
MHz	Quasi-peak Average						
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56 46						
5 to 30	60	50					
Note							
1.The lower limit shall apply at th	e transition frequencies						
2. The limit decreases linearly wit	h the logarithm of the frequency ir	the range 0.15 MHz to 0.50 MHz.					

## 6.2 Measurement Equipment Used:

	Conducted Emission Test Site									
EQUIPMENT	EQUIPMENT MFR MODEL SERIAL LAST CAL									
TYPE		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI 7	1166.5950.07	07/04/2019	07/03/2020					
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2019	11/25/2020					
LISN	SCHWARZBECK	NSLK 8127	8127-649	04/02/2019	04/01/2020					
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R	N.C.R					

NOTE: N.C.R refers to Not Calibrated Required.

## 6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 6.4 Test SET-UP (Block Diagram of Configuration)

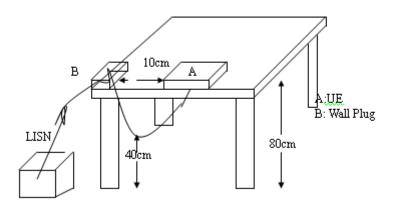

#### 6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The \* reveals the worst-case results that closet to the limit


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## AC POWER LINE CONDUCTED EMISSION TEST DATA

Description:	Operation	Date:	2020/01/11
Line:	L1	Temp.(°C)/Hum.(%):	23.6 (°C)/62%
Test Voltage:	AC 120V/60Hz	Test By:	Kane
Report:	ER-2019-C0075		

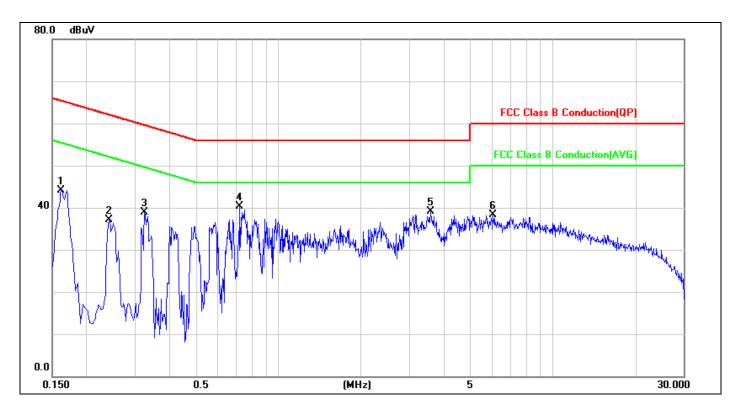


		Freq.	Reading	Factor	Measurement	Limit	Over	_	
No.	Mk.	(MHz)	(dBuV)	( dB )	(dBuV)	(dBuV)	( dB )	Detector	Comment
1		0.1624	44.18	0.00	44.18	65.34	-21.16	peak	
2		0.2420	37.17	0.01	37.18	62.03	-24.85	peak	
3		0.3260	38.83	0.01	38.84	59.55	-20.71	peak	
4	*	0.7260	40.22	0.02	40.24	56.00	-15.76	peak	
5		3.5940	38.93	0.11	39.04	56.00	-16.96	peak	
6		6.0740	38.14	0.21	38.35	60.00	-21.65	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Description:	Operation	Date:	2020/01/11
Line:	Ν	Temp.(°C)/Hum.(%):	23.6 (°C)/62%
Test Voltage:	AC 120V/60Hz	Test By:	Kane
Report:	ER-2019-C0075		

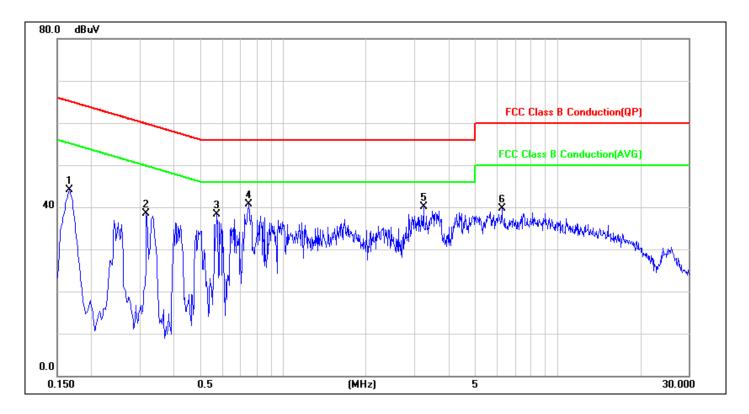

		Freq.	Reading	Factor	Measurement	Limit	Over		
No.	Mk.	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	Detector	Comment
1		0.1660	44.07	0.03	44.10	65.16	-21.06	peak	
2		0.3180	38.55	0.03	38.58	59.76	-21.18	peak	
3		0.5740	38.19	0.03	38.22	56.00	-17.78	peak	
4	*	0.7500	40.65	0.04	40.69	56.00	-15.31	peak	
5		3.2500	39.97	0.11	40.08	56.00	-15.92	peak	
6		6.2740	39.41	0.22	39.63	60.00	-20.37	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 7. PEAK OUTPUT POWER MEASUREMENT

## 7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

## 7.2 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Power Meter	Anritsu	ML2496A	1804001	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726104	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726107	02/13/2019	02/12/2020
DC Power Supply	Agilent	E3640A	MY52410006	12/10/2019	12/09/2020

## 7.3 Test Set-up:



## 7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.



#### Formula:

Duty Cycle = Ton / (Ton+Toff)

## **Duty Factor**

#### DATA RATE 1 Mbps:

		Duty Factor (dB) =10*log ( 1/Duty Cycle )	7/	VBW setting (kHz)
BLE	62.00	2.08	2.56	3.00

Duty Cycle\_BLE\_1M\_LowCH00-2402

<b>U</b> R		RF	slyzer - Swep 50 Ω 2.402000	AC 1000 GHz PNO: 1	Fast ↔	SENS Trig: Free I #Atten: 30	Run	Avg Type:	LIGN AUTO Log-Pwr	TRAC	4 Dec 11, 2019 E 1 2 3 4 5 6 E WWWWWWW	Frequency
10 dB/div			Offset 1.5 d		LOW	#Atten: 30	40		2	Mkr3 6	25.0 µs 0.03 dB	Auto Tun
- <b>og</b> 10.00	Xz			4								<b>Center Fre</b> 2.402000000 GH
-20.0 -30.0 -40.0	₩		- Mahrina	wite-H.		atter ka	type			Hore	aho	<b>Start Fr</b> 2.402000000 G
-50.0 -60.0 -70.0												<b>Stop Fr</b> 2.402000000 G
Res BW	181	VIHz	00000 GH		#VBW	8.0 MHz				000 ms (	pan 0 Hz 1001 pts)	CF Ste 8.000000 M Auto M
MKR MODE 1 Δ2 2 F 3 Δ4 4 F 5 6 7	1 1 1	t	(Δ) (Δ)	240.0	μs (Δ)	Y 0.60 d 4.17 dB 0.03 d 4.17 dB	B n B	CTION FUNC	TION WIDTH	FUNCTIO		Freq Offs 01
8 9 10 11											v	

Duty Cycle Factor:10\*log(1/(62/100))=2.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方有就明,此報告為未僅對測紙之樣必具頁,问时此稅添進保留別大。今報で不認今な回音回时可,小可可加模和。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or aptransaction documents. This document cannot be reproduced exception for, minor proceeding on the sector of the sec m71007/於北方工肌匠於北支世周回工 т.政 134 號

SGS Taiwan Ltd.	No. 134, WUKUNGROad, New	alpelindustrialPark, wukuDistrict, New LaipelCity,	IalWan24803/新北市五股區新北產業園區	鱼五工路 134 號
台灣檢驗科技股份有限公司	t (886-2) 2299-3279	f (886-2) 2298-0488	www.tw.sgs.com	



#### DATA RATE 2 Mbps:

		Duty Factor (dB) =10*log ( 1/Duty Cycle )		VBW setting (kHz)
BLE	58.00	2.37	0.93	1.00

Duty Cycle\_BLE\_2M\_LowCH00-2402

	trum Analyzer - Swep							
Center F	RF 50 Ω Freq 2.402000		SENSE	Avg Ty	ALIGNAUTO pe: Log-Pwr	10:02:16 AM Dec TRACE 1 2 TYPE WW	3456	Frequency
10 dB/div	Ref Offset 1.5 Ref 20.00 dl		#Atten: 30 dl		Δ	Mkr3 1.87	INNNN	Auto Tune
Log 10.0 0.00	×2		142	3∆4				Center Fred 2.402000000 GHz
-20.0			hand wet the second second	<u>я</u>		adrowed with the		Start Free 2.402000000 GH
-50.0 -60.0 -70.0								<b>Stop Free</b> 2.402000000 GH
Res BW		#VE	SW 8.0 MHz	FUNCTION F	Sweep 5	Span .000 ms (100 EUNCTION VA	<u> </u>	CF Stej 8.000000 MH Auto Ma
2 F	1 t (Δ) 1 t 1 t 1 t (Δ) 1 t	× 1.080 ms ( 780.0 μs 1.875 ms ( 780.0 μs	-2.49 dBm			FORCHON VAL		Freq Offse 0 H:
8 9 10 11						)	~	

Duty Cycle Factor:10\*log(1/(58/100))=2.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 7.5 Measurement Result:

#### DATA RATE 1 Mbps:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	7.76	1 Watt = 30 dBm
Mid	2440	7.82	1 Watt = 30 dBm
High	2480	7.49	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	7.55	1 Watt = 30 dBm
Mid	2440	7.57	1 Watt = 30 dBm
High	2480	7.29	1 Watt = 30 dBm

\*Note: Measured by power meter, cable loss as 1.5 dB that offsets on the power meter in Peak \*Note: Measured by power meter, **as cable loss+ Duty cycle factor that offsets on the power meter** \*Note: Max. Output include tune up tolerance Power is average power

#### DATA RATE 2 Mbps:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	7.92	1 Watt = 30 dBm
Mid	2440	8.12	1 Watt = 30 dBm
High	2480	7.68	1 Watt = 30 dBm
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	7.91	1 Watt = 30 dBm
Mid	2440	8.04	1 Watt = 30 dBm
High	2480	7.62	1 Watt = 30 dBm

\*Note: Measured by power meter, cable loss as 1.5 dB that offsets on the power meter in Peak

\*Note: Measured by power meter, **as cable loss+ Duty cycle factor that offsets on the power meter** \*Note: Max. Output include tune up tolerance Power is average power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 8. 6DB BANDWIDTH MEASUREMENT

## 8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

## 8.2 Measurement Equipment Used

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
DC Power Supply	Agilent	E3640A	MY52410006	12/10/2019	12/09/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2020	01/01/2021

## 8.3 Test Set-up:



## 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3\*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 8.5 Measurement Result:

#### DATA RATE 1 Mbps:

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
2402	0.689	> 0.5	PASS
2440	0.6872	> 0.5	PASS
2480	0.6923	> 0.5	PASS

#### DATA RATE 2 Mbps:

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
2402	1.168	> 0.5	PASS
2440	1.158	> 0.5	PASS
2480	1.174	> 0.5	PASS

Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipei/Index/Taipei/Index/Taipei/City, Taiwan24803/新北市五股區新北產業園區五工路 134 號




#### OBW 6dB\_BLE\_1M\_LowCH00-2402




## OBW 6dB\_BLE\_1M\_MidCH19-2440

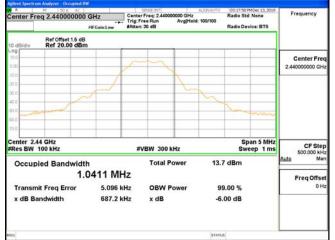


#### OBW 6dB\_BLE\_1M\_HighCH39-2480

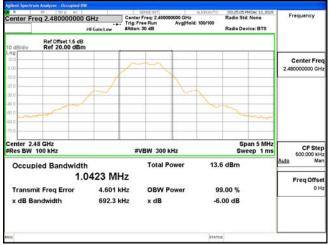


#### OBW 6dB\_BLE\_2M\_LowCH00-2402

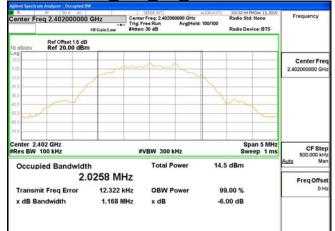

#### OBW 6dB\_BLE\_2M\_MidCH19-2440

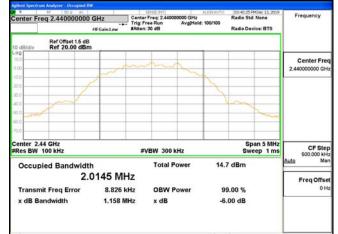

#### OBW 6dB\_BLE\_2M\_HighCH39-2480

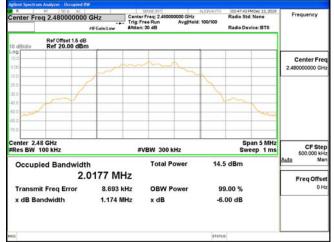

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## 9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

## 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

#### 9.2 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
DC Power Supply	Agilent	E3640A	MY52410006	12/10/2019	12/09/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2020	01/01/2021

#### 9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 9.4 Measurement Procedure

#### 9.4.1 Reference Level of Emission Limit:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

#### 9.4.2 Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5MHz) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 9.4.3 Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

## 9.5 Measurement Result:

#### DATA RATE 1 Mbps:

11010101100		
Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	6.60	-13.40
2440	6.76	-13.24
2480	6.55	-13.45

#### **Reference Level of Limit**

*NOTE: cable loss as 1.5dB that offsets in the spectrum NOTE: Refer to next page for plots.* 

#### DATA RATE 2 Mbps:

#### **Reference Level of Limit**

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	6.53	-13.47
2440	6.81	-13.19
2480	6.63	-13.37

*NOTE: cable loss as 1.5dB that offsets in the spectrum NOTE: Refer to next page for plots.* 

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### nter Freq 2.402000000 GHz PN0: Wide ---- Frig: Free Run Atten: 30 dB Frequ Auto Tur Ref Offset 1.5 dB Ref 20.00 dBm Center Fre 2 4020 Start Fre 2.4012500 Stop Fre 2.402750000 G CF Ste 150.00 Freq Offs OH enter 2.4020000 GHz es BW 100 kHz Span 1.500 MHz Sweep 1.000 ms (1001 pts) #VBW 300 kHz

Reference Level BLE 1M LowCH00-2402


#### Reference Level\_BLE\_1M\_MidCH19-2440



#### Reference Level\_BLE\_1M\_HighCH39-2480



## Reference Level\_BLE\_2M\_LowCH00-2402

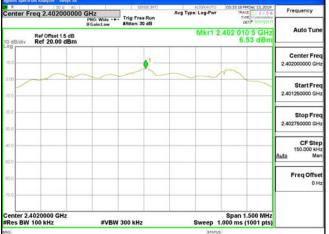

#### Reference Level\_BLE\_2M\_MidCH19-2440



#### Reference Level\_BLE\_2M\_HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




#### Band Edge\_BLE\_1M\_LowCH00-2402

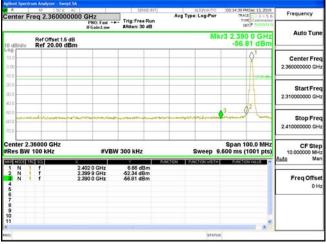


## Band Edge\_BLE\_1M\_HighCH39-2480

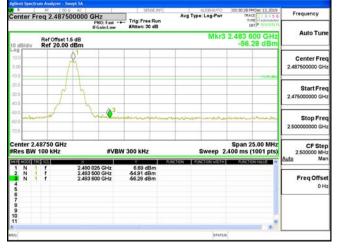

#### Band Edge\_BLE\_2M\_LowCH00-2402

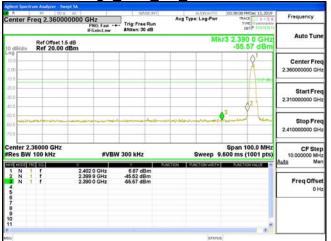

#### Band Edge\_BLE\_2M\_HighCH39-2480

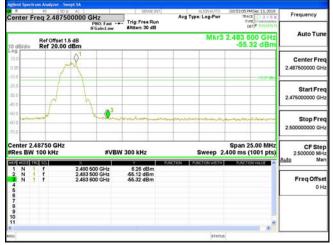

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### Spurious Emission\_BLE\_1M\_LowCH00-2402




#### Spurious Emission\_BLE\_1M\_MidCH19-2440

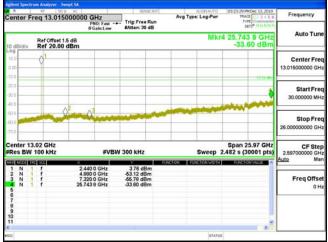

#### Spurious Emission\_BLE\_1M\_HighCH39-2480




#### Spurious Emission\_BLE\_2M\_LowCH00-2402

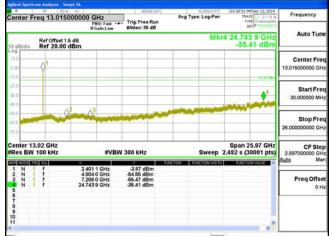

#### Spurious Emission\_BLE\_2M\_MidCH19-2440



#### Spurious Emission\_BLE\_2M\_HighCH39-2480

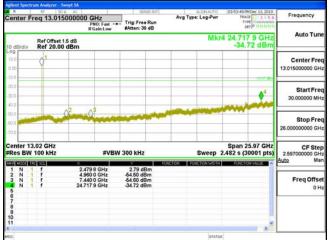

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



## **10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT**

#### **10.1 Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **10.2 Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUM- BER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Horn Antenna	Schwarzbeck	BBHA9170	184	12/25/2019	12/24/2020
Horn Antenna	Schwarzbeck	BBHA9120D	D803	12/20/2019	12/19/2020
Bi-log Antenna	TESEO	CBL 6112D	35242 & AT-N0555	01/13/2020	01/12/2021
Loop Antenna	ETS.LINDGREN	6502	148045	10/15/2019	10/14/2020
Spectrum Analyzer	Agilent	E4446A	MY51100003	10/23/2019	10/22/2020
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	01/02/2020	01/01/2021
Pre-Amplifier	EMC Instru- ments	EMC051825	980152	01/02/2020	01/01/2021
Pre-Amplifier	HP	8447D	2944A09469	01/02/2020	01/01/2021
Attenuator	Mini-Circuit	BW-S10W2+	4	01/02/2020	01/01/2021
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2020	01/01/2021
High Pass Filter	WI	WHKX4.0/18G-10 SS	22	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	EMC 104-SM-SM-2000	160123	01/02/2020	01/01/2021


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號




## 10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

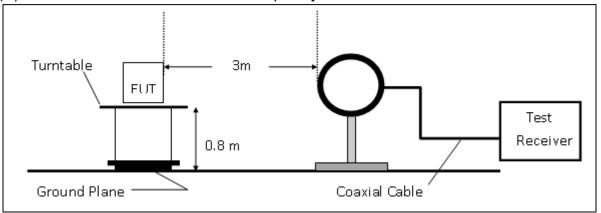

## (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

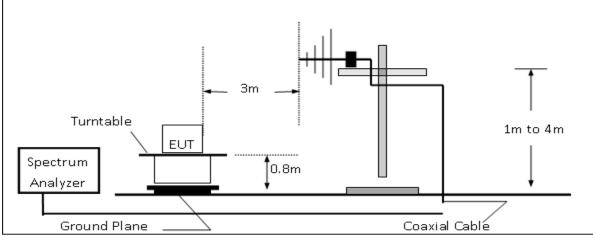

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

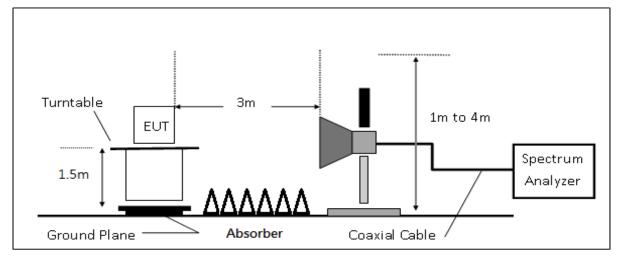

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. [No.134, WuKungRoad, NewTaipelindustrialPark, WukuDistrict, NewTaipelCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	U U	f (886-2) 2298-0488	perCity, Laiwan24803/新北市五股區新北產業員 www.tw.sgs.com	到巨五上路 134 號
			Member of SGS Group	



#### **10.4 Measurement Procedure**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.</li>
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### **10.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

## FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss) AG = Amplifier Gain

AF = Antenna Factor

*RA* = *Reading Amplitude* 

The limit of the emission level is expressed in dBuV/m, which converts 20\*log(uV/m)

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB) Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre\_Amplifier Gain(dB)

#### 10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### **10.7 Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Report No.: ER/2019/C0075 Page 34 of 61



# Radiated Band Edge Measurement Result (BLE mode) DATA RATE 1 Mbps:

Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(1M)	Temp./Humi.	:21.8/63
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

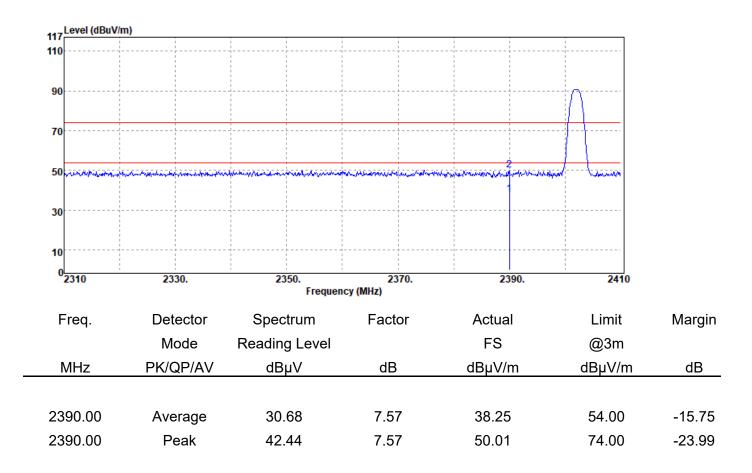

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



50

30

10

Marriananth

Report Number	:ER/2019/C0075	Test Date	:2020-01-14	
Operation Mode	:BLE(1M)	Temp./Humi.	:21.8/63	
Test Channel	:2402 MHz	Antenna Pol.	:HORIZONTAL	
Test Mode	:Bandedge CH Low	Engineer	:Thomas	
EUT Pol	:E2 Plane			
117				
110				
90			A	
70				

real or a faith of a faith of a straight of the second of

	<sup>0</sup> 2310	2330.	2350. Frequenc	2370.	2390.	2410	
Frequency (MHz)							
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2390.00	Average	30.74	7.57	38.31	54.00	-15.69
	2390.00	Peak	42.81	7.57	50.38	74.00	-23.62


and a second

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(1M)	Temp./Humi.	:21.8/63
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

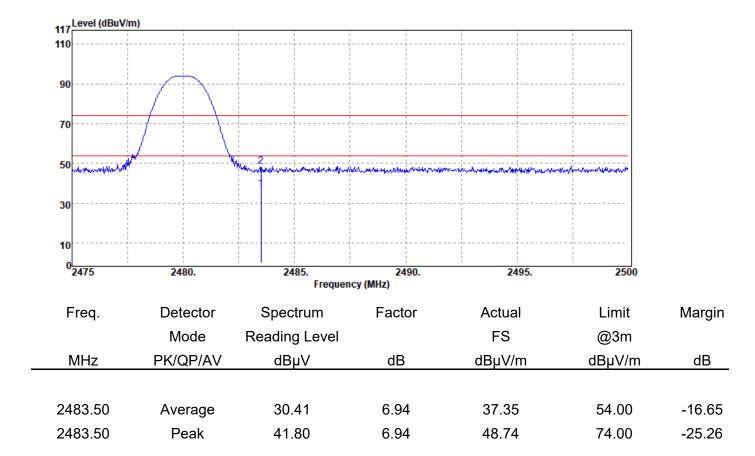


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and obligations the fullest extent of the law.



Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(1M)	Temp./Humi.	:21.8/63
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

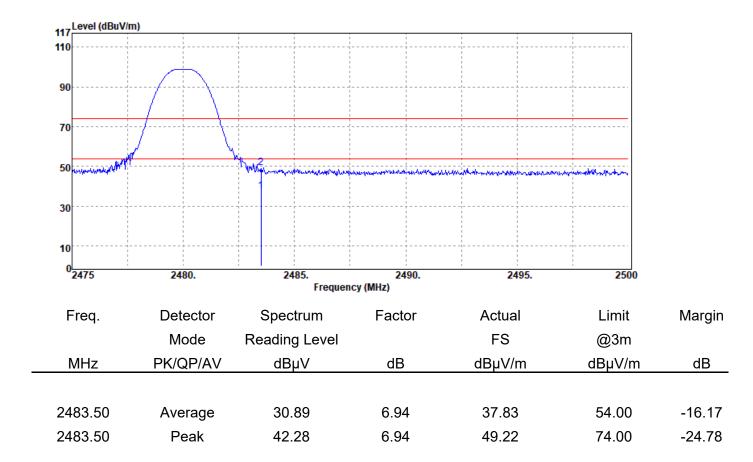

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and obligations the fullest extent of the law.



# DATA RATE 2 Mbps:

Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(2M)	Temp./Humi.	:21.8/63
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

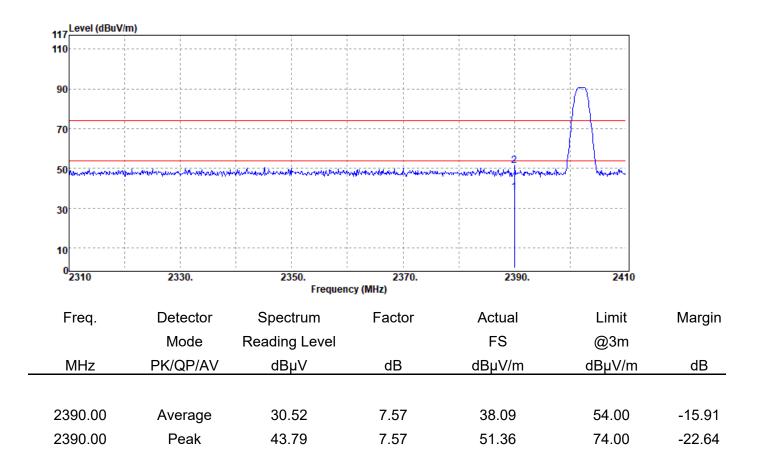

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Test Date

ت التح



·FR/2019/C0075

**Report Number** 

50 Jun Mar Sug

30

		.ER/2019	100015							
Opera	tion Mode	:BLE(2M)					Temp./	'Humi.	:21	.8/63
Test C	hannel	:2402 MH	z				Antenr	na Pol.	:HC	ORIZONTAI
Test M	lode	:Bandedg	e CH Low				Engine	er	:Th	nomas
EUT P	Pol	:E2 Plane	;							
447	Level (dBuV/m)									
110		·						! ! !		
				1		1		1 1 1	_	
90				   	   	· · · · · · · · · · · · · · · · · · · ·	 	   	44	
								- 	1	
70					- - - - - -			     		
						1		ļ j		
				•	•			e ,		


10						
<sup>0</sup> 2310	2330.	2350. Frequenc	2370. sy (MHz)	2390.	2410	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	30.96	7.57	38.53	54.00	-15.47
2390.00	Peak	43.11	7.57	50.68	74.00	-23.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未检公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCC Taware 14 Not</u> 124 Wuty unpbred Now Tainpilotett Wukuplicitet Now Tainpilot Tainag(2490)(約 + 支 T No T A St TA St T



Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(2M)	Temp./Humi.	:21.8/63
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

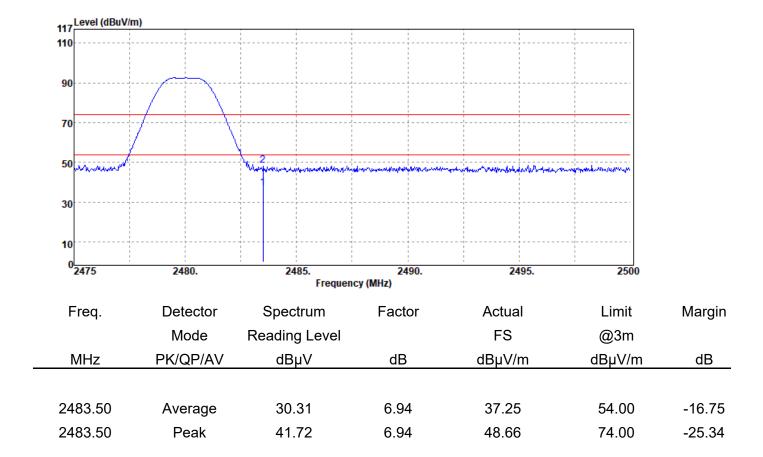


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's ole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and obligations the fullest extent of the law.




Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(2M)	Temp./Humi.	:21.8/63
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

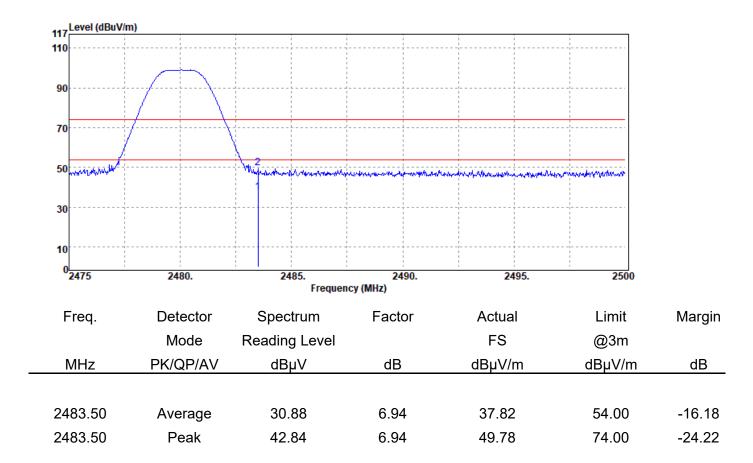

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.





#### **Radiated Spurious Emission Measurement Result: (BLE mode)** For Frequency from 30MHz to 1000MHz DATA RATE 1 Mbps:

Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(1M)	Temp./Humi.	:21.8/63
Test Channel	:2440 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Thomas
EUT Pol	:E2 Plane		

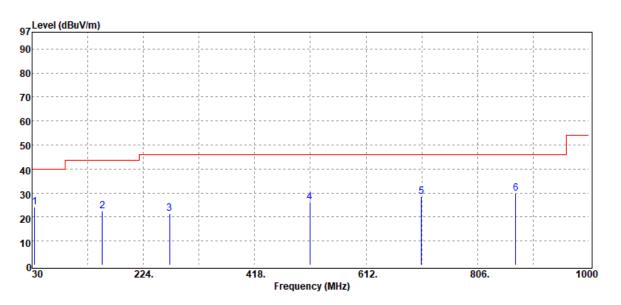

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	34.85	Peak	30.82	-6.63	24.19	40.00	-15.81
	152.22	Peak	34.43	-12.06	22.37	43.50	-21.13
	269.59	Peak	30.19	-8.86	21.33	46.00	-24.67
	514.03	Peak	30.41	-4.25	26.16	46.00	-19.84
	708.03	Peak	31.05	-2.62	28.43	46.00	-17.57
	872.93	Peak	29.54	0.50	30.04	46.00	-15.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方有就明,此報告為未僅對測紙之樣必貝頁,问时此稅添進保留別大。今報で未起今公司音叫片了,小可可力核表。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



> 0<mark>. 30</mark>

Freq.

MHz

35.82

123.12

318.09

509.18

725.49

896.21

224.

Detector

Mode

PK/QP/AV

Peak

Peak

Peak

Peak

Peak

Peak

Report Number	:ER/2019/C0075		Test Dat	e :2020-01	-14
Operation Mode	:BLE(1M)		Temp./H	lumi. :21.8/63	
Test Channel	:2440 MHz		Antenna	Pol. :HORIZC	NTAL
Test Mode	:Tx CH Mid		Enginee	r :Thomas	
EUT Pol	:E2 Plane				
97 Level (dBuV/m)					
90					
80		· · · · · · · · · · · · · · · · · · ·		   	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

418.

Spectrum

**Reading Level** 

dBµV

29.69

34.31

29.50

30.34

29.76

29.62

612.

Factor

dB

-7.27

-11.19

-7.95

-4.13

-2.15

1.15

Frequency (MHz)

806.

Actual

FS

dBµV/m

22.42

23.12

21.55

26.21

27.61

30.77

1000

Margin

dB

-17.58

-20.38

-24.45 -19.79

-18.39

-15.23

Limit

@3m

dBµV/m

40.00

43.50

46.00

46.00

46.00

46.00

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Margin

dB

### DATA RATE 2 Mbps:

Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(2M)	Temp./Humi.	:21.8/63
Test Channel	:2440 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Thomas
EUT Pol	:E2 Plane		

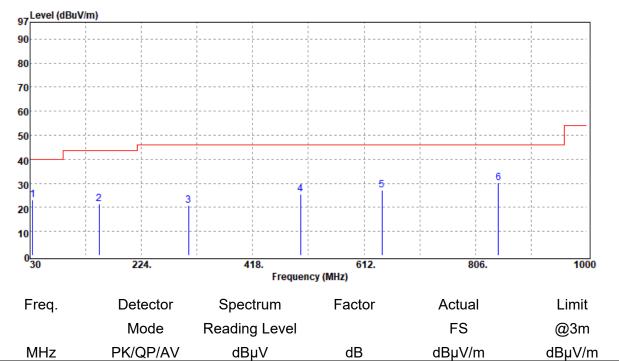

		•				
34.85	Peak	29.62	-6.63	22.99	40.00	-17.01
150.28	Peak	33.64	-12.00	21.64	43.50	-21.86
306.45	Peak	28.79	-7.91	20.88	46.00	-25.12
501.42	Peak	29.67	-4.29	25.38	46.00	-20.62
643.04	Peak	30.42	-3.22	27.20	46.00	-18.80
845.77	Peak	30.10	0.09	30.19	46.00	-15.81


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方有就明,此報告為未僅對測紙之樣必貝頁,问时此稅添進保留別大。今報で未起今公司音叫片了,小可可力核表。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Report Number	:ER/2019/C0075		Test Date	:2020-01-14
Operation Mode	:BLE(2M)		Temp./Humi.	:21.8/63
Test Channel	:2440 MHz		Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid		Engineer	:Thomas
EUT Pol	:E2 Plane			
97 Level (dBuV/m)				
90		 	 	

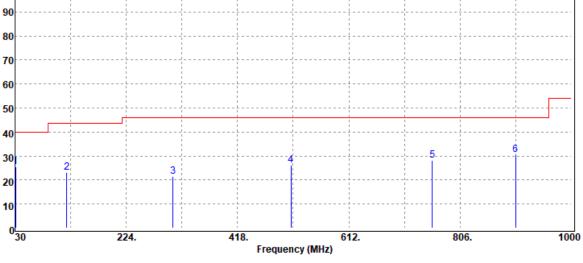

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.97	Peak	30.20	-4.53	25.67	40.00	-14.33
120.21	Peak	34.29	-11.19	23.10	43.50	-20.40
305.48	Peak	29.38	-7.81	21.57	46.00	-24.43
511.12	Peak	30.32	-4.15	26.17	46.00	-19.83
757.50	Peak	29.50	-1.42	28.08	46.00	-17.92
903.00	Peak	29.24	1.17	30.41	46.00	-15.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






#### Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency above 1 GHz DATA RATE 1 Mbps:

:ER/2019/C0075
:BLE(1M)
:2402 MHz
:Tx CH Low
:E2 Plane

Test Date	:2020-01-14
Temp./Humi.	:21.8/63
Antenna Pol.	:VERTICAL
Engineer	:Thomas

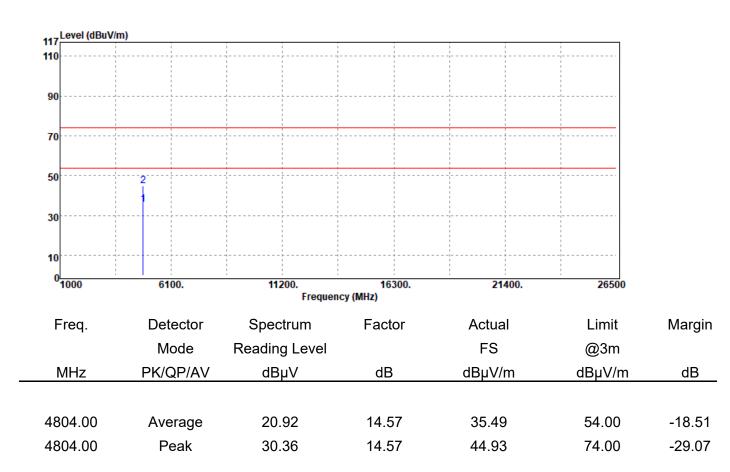

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

74.00

-28.71

Test Date



:ER/2019/C0075

**Report Number** 

4804.00

Peak

-		:BLE(1M) :2402 MHz :Tx CH Lov :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :HORIZONTA :Thomas	۱L
117	Level (dBuV/m)						
110							
90							
70							
50		2					
30							
10				- - - - - - - - - - - - - - - - - - -			
0	1000	6100.	11200. Frequer	16300. ncy (MHz)	21400.	26500	
F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
48	804.00	Average	19.84	14.57	34.41	54.00	-19.59

14.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

45.29

Test Date



:ER/2019/C0075

**Report Number** 

Operation Mo Test Channel Test Mode	. ,			Temp./Humi. Antenna Pol.	:21.8/63 :VERTICAL :Thomas	
		J		Engineer	. momas	
EUT Pol	:E2 Plane					
117 Level (dBu	V/m)					
110						
90						
70						
50	2					
30	1					
10						
0 <mark>1000</mark>	6100.	11200. Freque	16300. ncy (MHz)	21400.	26500	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4880.00	Average	20.00	15.06	35.06	54.00	-18.94
4880.00	Peak	30.55	15.06	45.61	74.00	-28.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Test Date



:ER/2019/C0075

**Report Number** 

4880.00

Peak

Operation Mode	:BLE(1M)			Temp./Humi.	:21.8/63	
Test Channel	:2440 MHz	<u>.</u>		Antenna Pol.	:HORIZONT/	4L
Test Mode	:Tx CH Mic	Ł		Engineer	:Thomas	
EUT Pol	:E2 Plane					
117 Level (dBuV/m)						
110	     					
90						
70	       					
50	2					
30						
10						
0 <mark></mark>	6100.	11200.	16300.	21400.	26500	
			cy (MHz)	21100		
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	_					
4880.00	Average	19.53	15.06	34.59	54.00	-19.41

15.06

45.62

74.00

-28.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.56

74.00

-29.14

Test Date



:ER/2019/C0075

**Report Number** 

4960.00

Operation Mode Test Channel Test Mode EUT Pol	:BLE(1M) :2480 MHz :Tx CH Hig :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :VERTICAL :Thomas	
117 Level (dBuV/m)						
110						
90	 					
70						
50	2					
30						
10						
0 <mark>.</mark> 1000	6100.	11200. Frequen	16300. cv (MHz)	21400.	26500	
_						
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	20.56	15.13	35.69	54.00	-18.31

15.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

29.73

Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

44.86

Test Date



:ER/2019/C0075

**Report Number** 

4960.00

Peak

-		:BLE(1M) :2480 MHz :Tx CH Hig :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :HORIZONTA :Thomas	4L
117	Level (dBuV/m)						
110				,	· · · · · · · · · · · · · · · · · · ·		
90				· · · · · · · · · · · · · · · · · · ·			
70			- J	/ 	· · · · · · · · · · · · · · · · · · ·		
50		- 2					
30							
10							
0	1000	6100.	11200.	16300.	21400.	26500	
	1000	0100.		ncy (MHz)	21400.	20300	
F	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
I	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
			•		•	•	
49	60.00	Average	20.40	15.13	35.53	54.00	-18.47

15.13

45.68

74.00

-28.32


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.55



### DATA RATE 2 Mbps:

Report Number	:ER/2019/C0075	Test Date	:2020-01-14
Operation Mode	:BLE(2M)	Temp./Humi.	:21.8/63
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

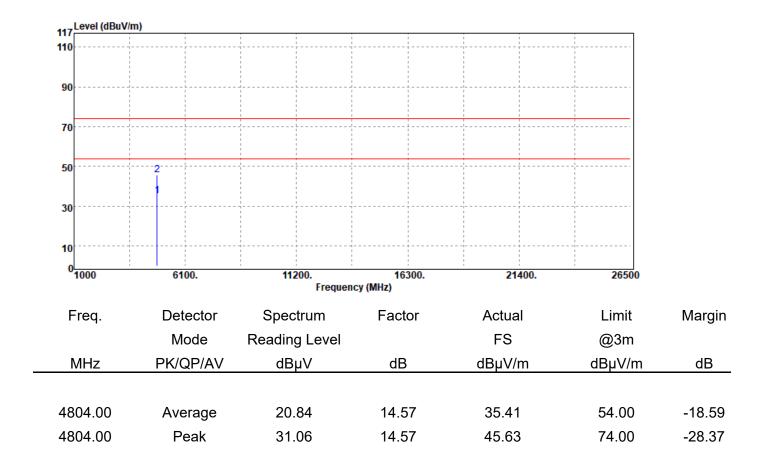

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

74.00

-29.04

Test Date

44.96



:ER/2019/C0075

**Report Number** 

4804.00

Peak

Operation Mode Test Channel		:BLE(2M) :2402 MHz			Temp./Humi. Antenna Pol.	:21.8/63 :HORIZONT/	AL.
Test N	lode	:Tx CH Lov	N		Engineer	:Thomas	
EUT F	Pol	:E2 Plane					
447	Level (dBuV/m)						
117 110							
90							
70							
50		2					
30							
10							
0	1000	6100.	11200.	16300.	21400.	26500	
				ncy (MHz)			
F	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
48	804.00	Average	19.52	14.57	34.09	54.00	-19.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

14.57

74.00

-29.28

Test Date



:ER/2019/C0075

**Report Number** 

4880.00

Peak

-		:BLE(2M) :2440 MHz :Tx CH Mic :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :VERTICAL :Thomas	
117	Level (dBuV/m)						
110							
90							
70			J	· · · · · · · · · · · · · · · · · · ·			
50					· · · · · · · · · · · · · · · · · · ·		
50		2					
20							
30							
10							
0	1000	6100.	11200.	16300.	21400.	26500	
			rieque	ncy (MHz)			
F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	-	dB		_	dB
I			dBµV	UD	dBµV/m	dBµV/m	uD
48	80.00	Average	20.34	15.06	35.40	54.00	-18.60

15.06

44.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

29.66

Test Date



:ER/2019/C0075

**Report Number** 

4880.00

Opera	ation Mode	:BLE(2M)			Temp./Humi.	:21.8/63	
Test C	Channel	:2440 MHz	:		Antenna Pol.	:HORIZONT/	۹L
Test N	/lode	:Tx CH Mic	ł		Engineer	:Thomas	
EUT F	Pol	:E2 Plane					
117	Level (dBuV/m)		:	:		-:1	
110				,			
90							
70	1						
50				· · · · · · · · · · · · · · · · · · ·			
		Ĩ.					
30							
10							
0	1000	6100.	11200.	16300.	21400.	26500	
			Frequer	icy (MHz)			
F	-req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
I	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
						- /	
48	380.00	Average	19.64	15.06	34.70	54.00	-19.30

15.06

45.77

74.00

-28.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.71

Peak

Test Date



:ER/2019/C0075

**Report Number** 

4960.00

Operation Mode Test Channel Test Mode EUT Pol	:BLE(2M) :2480 MHz :Tx CH Hig :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :VERTICAL :Thomas	
117 Level (dBuV/m)	)					
110						
90						
70						
50						
50	2					
30						
10						
0 <mark></mark>	6100.	11200.	16300.	21400.	26500	
1000	01001		cy (MHz)	211001	20000	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Average	20.50	15.13	35.63	54.00	-18.37

15.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

30.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Peak

45.38

74.00

-28.62

74.00

-29.11

Test Date



:ER/2019/C0075

**Report Number** 

4962.00

Peak

-		:BLE(2M) :2480 MHz :Tx CH Hig :E2 Plane			Temp./Humi. Antenna Pol. Engineer	:21.8/63 :HORIZONT/ :Thomas	AL.
117	Level (dBuV/m)						
110							
90							
70				/			
50		2					
30							
10							
	1000	6100.	11200. Frequer	16300. icy (MHz)	21400.	26500	
F	-req.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
49	960.00	Average	19.56	15.13	34.69	54.00	-19.31

15.14

44.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

29.75



# **11. PEAK POWER SPECTRAL DENSITY**

## 11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### **11.2 Measurement Equipment Used:**

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/02/2019	05/01/2020
DC Power Supply	Agilent	E3640A	MY52410006	12/10/2019	12/09/2020
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2020	01/01/2021

### 11.3 Test Set-up:



### **11.4 Measurement Procedure:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### **11.5 Measurement Result:**

### DATA RATE 1 Mbps:

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-7.69	8	PASS
2440	-7.62	8	PASS
2480	-7.65	8	PASS

NOTE: cable loss as 1.5dB that offsets in the spectrum

#### DATA RATE 2 Mbps:

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-11.97	8	PASS
2440	-11.56	8	PASS
2480	-11.83	8	PASS

NOTE: cable loss as 1.5dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### Power Density\_BLE\_1M\_LowCH00-2402



### Power Density\_BLE\_1M\_MidCH19-2440



# Power Density\_BLE\_1M\_HighCH39-2480



#### Power Density\_BLE\_2M\_LowCH00-2402 r Freq 2.402000000 GHz Frequency ALIGNAUTO Avg Type: Log-Pw Trig: Free Run Mkr1 2.402 027 0 GH -11.97 dBr Auto Tur Ref Offset 1.5 dB Ref 20.00 dBm Center Fre Start Fre 2.401250000 GH Stop Fre



### Power Density\_BLE\_2M\_MidCH19-2440



# Power Density\_BLE\_2M\_HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司	t (886-2) 2299-3279
La va la	- (

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 www.tw.sgs.com



# **12. ANTENNA REQUIREMENT**

### 12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

## 12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.