

FCC TEST REPORT

REPORT NO.: RF940922A04C

MODEL NO.: 8193URF2

RECEIVED: Sep. 22, 2005

TESTED: Sep. 22 ~ 23, 2005

ISSUED: Oct. 26, 2005

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, Tung Hsing Rd., Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 25 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528
ILAC MRA

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.1	DESCRIPTION OF TEST MODES	6
3.1.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.1.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	8
3.2	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.3	DESCRIPTION OF SUPPORT UNITS	10
4	TEST PROCEDURE AND RESULT	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	16
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2	TEST INSTRUMENT	17
4.2.3	TEST PROCEDURE	18
4.2.4	TEST SETUP	19
4.2.5	EUT OPERATING CONDITION	19
4.2.6	TEST RESULT	20
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	22
6	INFORMATION ON THE TESTING LABORATORIES	24
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT: Wireless Transceiver
BRAND NAME: BTC
MODEL NO: 8193URF2
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Sep. 22 ~ 23, 2005
STANDARDS: FCC Part 15, Subpart C (Section 15.227),
ANSI C63.4 -2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessica Cheng , **DATE:** Oct. 26, 2005
(Jessica Cheng)

TECHNICAL
ACCEPTANCE : Ken Liu , **DATE:** Oct. 26, 2005
Responsible for RF (Ken Liu)

APPROVED BY : Cody Chang , **DATE:** Oct. 26, 2005
(Cody Chang / Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Minimum passing margin is -13.67dB at 0.173MHz
15.227 15.209	Radiated Emission Test	PASS	Minimum passing margin is -13.23dB at 47.49MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Uncertainty
Conducted emissions	2.44 dB
Radiated emissions	3.86 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Transceiver
MODEL NO.	8193URF2
POWER SUPPLY	5.0Vdc from host equipment
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	26.995MHz, 27.045MHz, 27.095MHz, 27.145MHz, 27.195MHz.
NUMBER OF CHANNEL	5
ANTENNA TYPE	Loop antenna
DATA CABLE	1.2m USB shielded cable
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a transceiver, which included transmitter part and receiver part.
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.1 DESCRIPTION OF TEST MODES


Five channels were provided to this EUT

Channel	Frequency (MHz)
1	26.995MHz
2	27.045MHz
3	27.095MHz
4	27.145MHz
5	27.195MHz


Note: Channel 3 (27.095MHz) was the worst case and chosen for final test.

3.1.1 CONFIGURATION OF SYSTEM UNDER TEST

(For Conducted test)

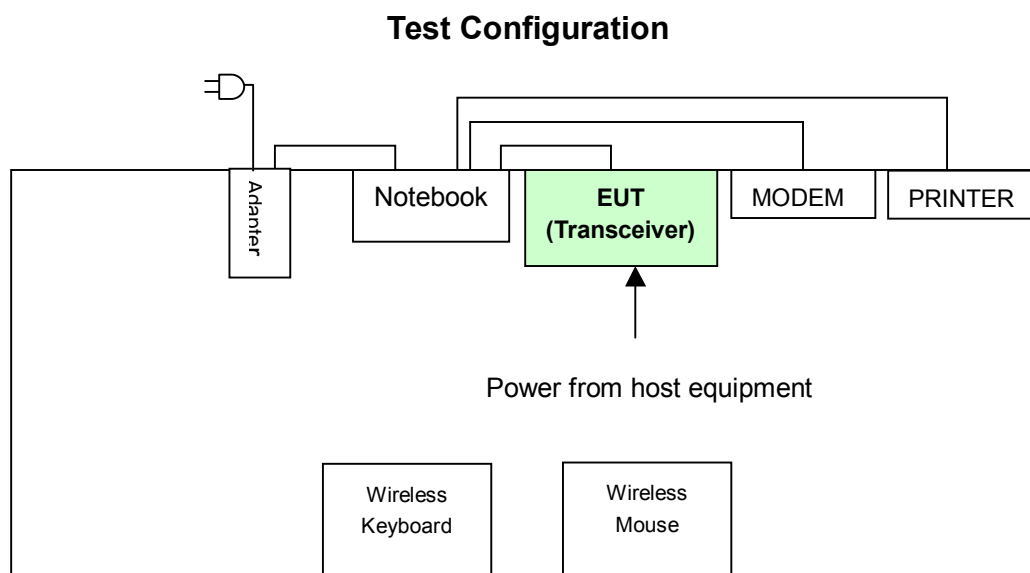

(For Radiated test)

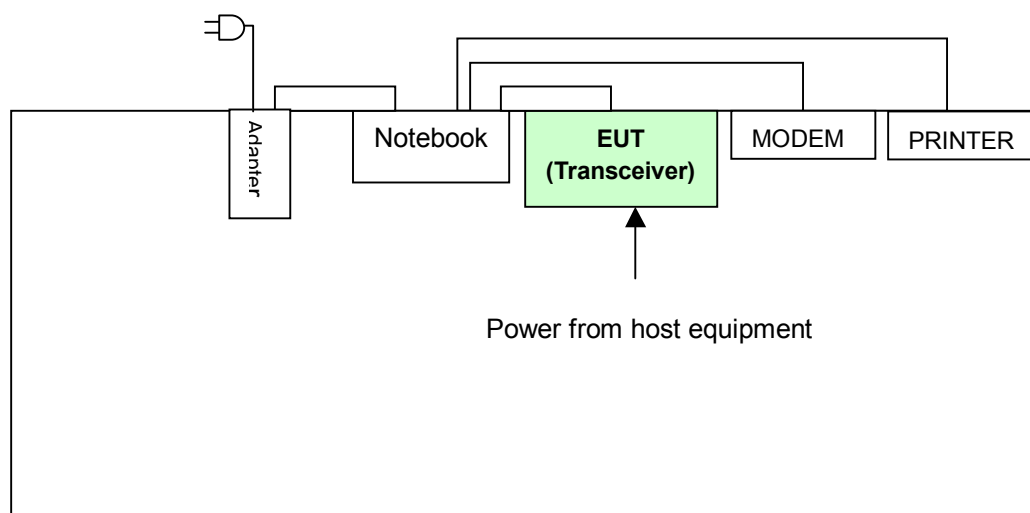

3.1.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to		Description
	PLC	RE<1G	
1	v	v	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

Power Line Conducted Emission Test:

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT	Available Channel	Tested Channel	Modulation Type
Wireless Transceiver	1 ~ 5	3	FSK

Radiated Emission Test (Below 1 GHz):

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT	Available Channel	Tested Channel	Modulation Type
Wireless Transceiver	1 ~ 5	3	FSK

3.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless Transceiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.227)

ANSI C63.4 -2003

All test items have been performed and recorded as per the above standards.

3.3 DESCRIPTION OF SUPPORT UNITS

(For Conducted test)

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
2	MODEM	ACEEX	1414	980020520	IFAXDM1414
3	DELL Notebook	DELL	D600	CN-0G5152-48643-487-0213	E2K24CLNS
4	Wireless Keyboard	BTC	8193URF2	N/A	E5XMSM957U2
5	Wireless Mouse	BTC	8193URF2	N/A	E5XKB8193URF2

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	N/A
4	N/A
5	N/A

NOTE: All power cords of the above support units are non-shielded (1.8m).

(For Radiated test)

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
2	MODEM	ACEEX	1414	980020520	IFAXDM1414
3	DELL Notebook	DELL	D600	CN-0G5152-48643-487-0213	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	N/A

NOTE: All power cords of the above support units are non-shielded (1.8m).

4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Transceiver	ESCS 30	838251/021	Dec. 5, 2005
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 1, 2005
LISN With Adapter (for EUT)	AD10	C10Ada-001	Dec. 1, 2005
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 1, 2005
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 1, 2005
Software	ADT_Conc_V7.3.2	NA	NA
Software	ADT_ISN_V7.3.2	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Apr. 05, 2006
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Mar. 04, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. 10.
 3. The VCCI Site Registration No. C-1852.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

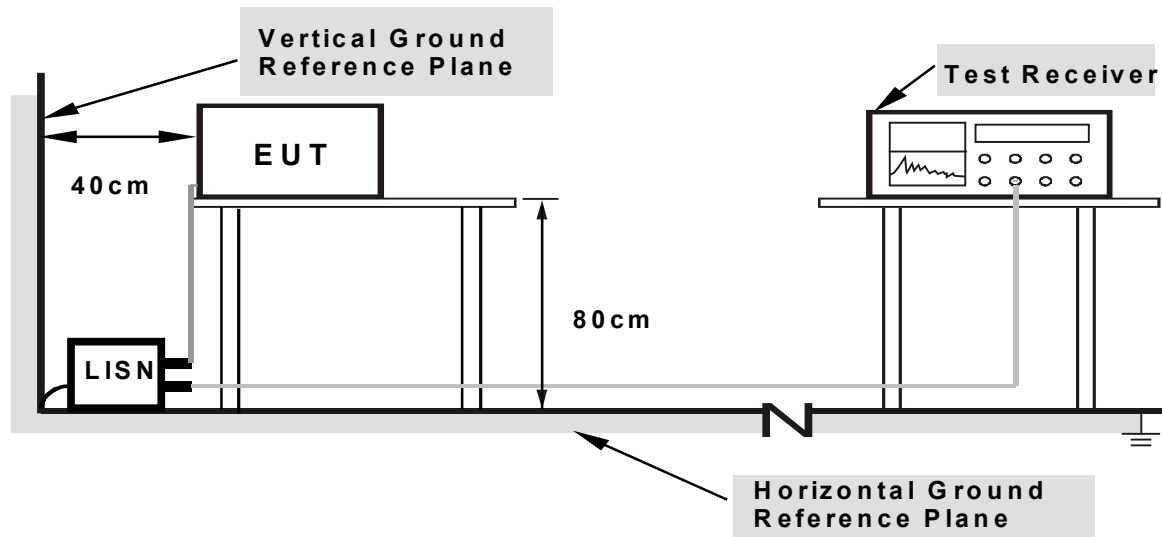

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with a Notebook on the testing table.
- b. Checked if the transceiver part (EUT) and the transmitter part wireless keyboard & wireless mouse were set at the same channel.
- c. Set the EUT for under transmitting / receiving condition at specific channel.
- d. The Notebook sent "H" messages LCD panel and displayed "H" patterns on its screen. (for Radiated test).
- e. The Notebook sent "H" messages to modem.
- f. The Notebook sent "H" messages to printer and the printer prints them out.
- g. Repeated d ~g.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Wireless Transceiver	MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	MODEL	8193URF2
ENVIRONMENTAL CONDITIONS	27deg. C, 70% RH, 997hPa	6dB BANDWIDTH	9kHz
TESTED BY	Jamison Chan	PHASE	Line (L)

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.20	50.92	-	51.12	-	64.79	54.79	-13.67	-
2	0.232	0.20	43.18	-	43.38	-	62.38	52.38	-19.00	-
3	0.291	0.20	38.82	-	39.02	-	60.51	50.51	-21.49	-
4	2.387	0.32	34.11	-	34.43	-	56.00	46.00	-21.57	-
5	3.727	0.39	37.44	-	37.83	-	56.00	46.00	-18.17	-
6	19.180	1.43	28.76	-	30.19	-	60.00	50.00	-29.81	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

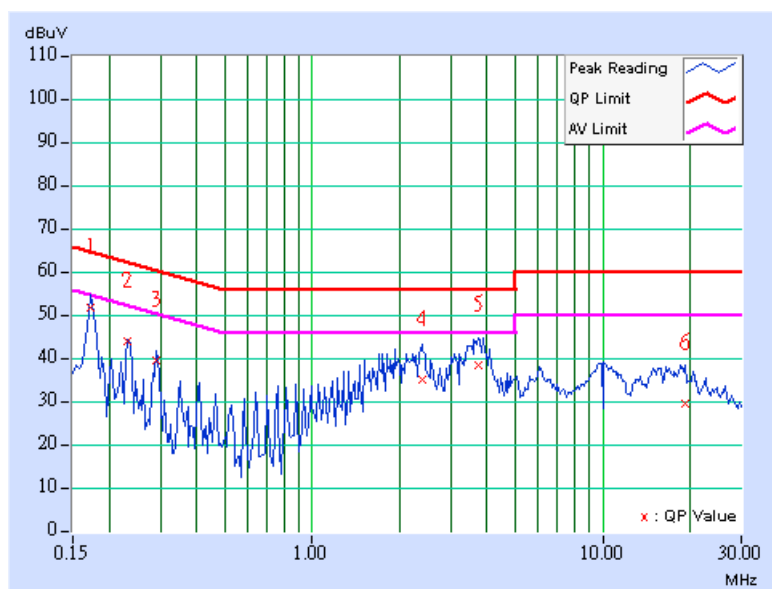

EUT	Wireless Transceiver	MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	MODEL	8193URF2
ENVIRONMENTAL CONDITIONS	27deg. C, 70% RH, 997hPa	6dB BANDWIDTH	9kHz
TESTED BY	Jamison Chan	PHASE	Neutral (N)

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.20	49.70	-	49.90	-	64.61	54.61	-14.71	-
2	0.236	0.20	43.15	-	43.35	-	62.24	52.24	-18.89	-
3	0.295	0.20	39.30	-	39.50	-	60.40	50.40	-20.90	-
4	2.160	0.32	35.27	-	35.59	-	56.00	46.00	-20.41	-
5	3.680	0.47	36.37	-	36.84	-	56.00	46.00	-19.16	-
6	18.926	0.98	26.58	-	27.56	-	60.00	50.00	-32.44	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

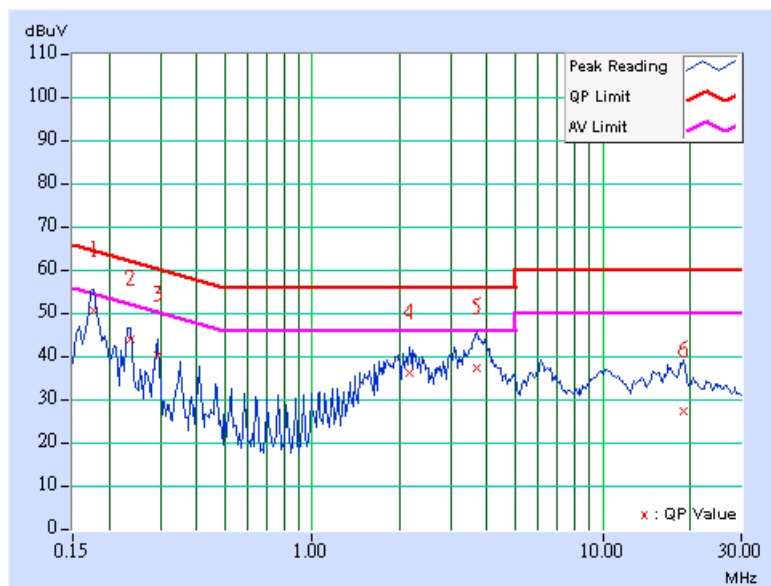

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of Emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 22, 2006
HP Preamplifier	8449B	3008A01924	Sep. 06, 2006
HP Preamplifier	8449B	3008A01638	Sep. 21, 2006
SCHWARZBECK Tunable Dipole Antenna	VHA 9103	NA	Oct. 29, 2005
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Nov. 05, 2005
Schwarzbeck Antenna	VULB9168	137	Feb. 27, 2006
EMCO Horn Antenna	3115	6714	Oct. 28, 2005
EMCO Horn Antenna	3115	9312-4192	Mar. 21, 2006
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V 7.6.01	NA	NA
IMES RF cable	LL142	CABLE-CH6-01	Dec. 19, 2005
Loop Antenna R & S	HFH2-Z2	100070	Nov. 14, 2005

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.


4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-Transceiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test Transceiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test Transceiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 TEST SETUP

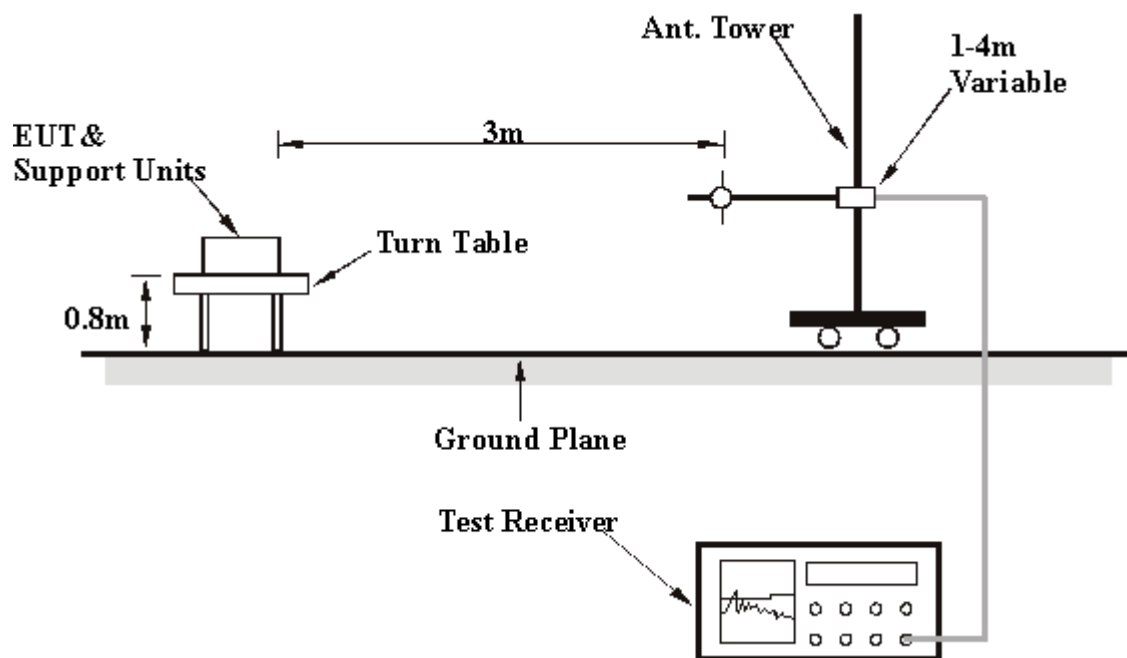

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Same as item 4.1.6.

4.2.6 TEST RESULT

EUT	Wireless Transceiver	MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	MODEL	8193URF2
ENVIRONMENTAL CONDITIONS	27deg. C, 79% RH, 996hPa	FREQUENCY RANGE	Below 1000MHz
TESTED BY	Jamison Chan	DETECTOR FUNCTION	Peak / Average

TEST DISTANCE: 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.09	49.71PK	100.00	-50.29	1.76	33	42.31	7.40
2	*27.09	24.50AV	80.00	-55.50	1.76	33	17.10	7.40

REMARKS:

- 1 Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2 Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 3 The other emission levels were very low against the limit.
- 4 Margin value = Emission level – Limit value.
- 5 "*"= Fundamental frequency.
- 6 Loop antenna was used for all radiated emission below 30MHz.

EUT	Wireless Transceiver	MEASUREMENT DETAIL	
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	MODEL	8193URF2
ENVIRONMENTAL CONDITIONS	27deg. C, 79% RH, 996hPa	FREQUENCY RANGE	Below 1000MHz
TESTED BY	Jamison Chan	DETECTOR FUNCTION	Quasi-Peak

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.59	22.08 QP	43.50	-21.42	3.02 H	304	11.86	10.21
2	214.67	22.91 QP	43.50	-20.59	1.11 H	70	12.07	10.84
3	362.40	19.86 QP	46.00	-26.14	1.05 H	10	3.55	16.31
4	399.34	22.47 QP	46.00	-23.53	1.46 H	355	5.09	17.38
5	426.55	30.12 QP	46.00	-15.88	2.20 H	31	11.97	18.15
6	663.71	19.68 QP	46.00	-26.32	1.24 H	25	-3.29	22.97
7	731.74	19.86 QP	46.00	-26.14	1.54 H	232	-4.37	24.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.49	26.77 QP	40.00	-13.23	1.00 V	190	13.09	13.68
2	113.59	25.02 QP	43.50	-18.48	1.05 V	205	14.81	10.21
3	216.61	27.66 QP	46.00	-18.34	1.01 V	127	16.76	10.90
4	663.71	25.06 QP	46.00	-20.94	1.21 V	292	2.09	22.97
5	731.74	25.83 QP	46.00	-20.17	1.53 V	235	1.60	24.23
6	933.91	28.21 QP	46.00	-17.79	1.77 V	13	1.35	26.86


- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

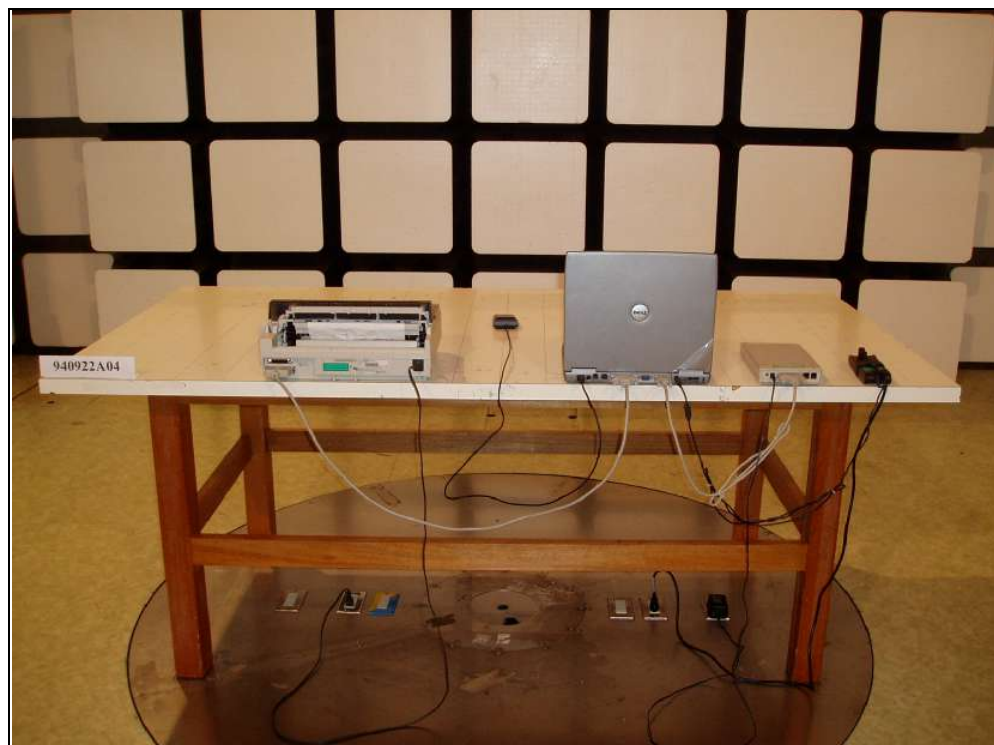

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL , A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.