


三、Unit and Component



Unit Body

①



Cylinder Air Filter

②



Power Adapter


③



User Manual


④

四、Product Structure

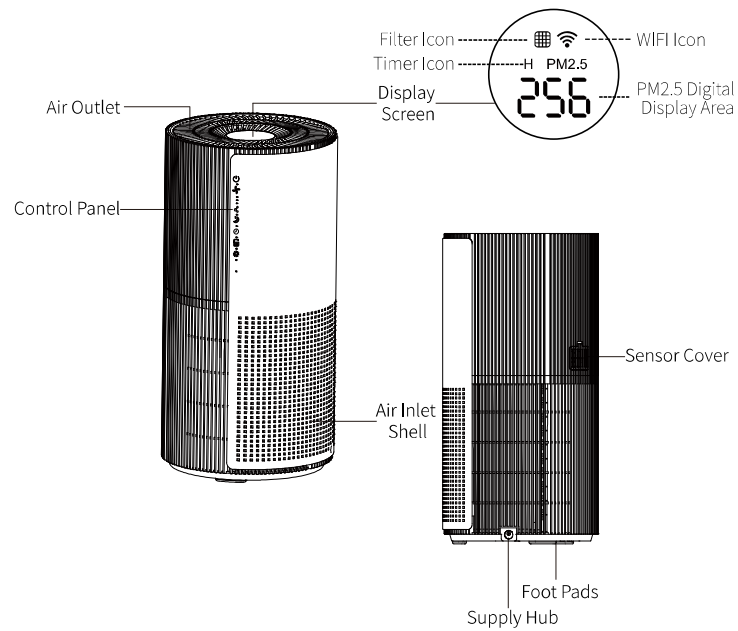


五、Using Guide


The product you purchased has been installed with the packaged filter. Please take down the plastic bag of the filter according to the following steps before use, and install and use it correctly.




1、Unpack the package and take out the machine.




2、Flip the machine, twist the bottom cover to unlock direction, take out the packaged filter.




3、Take down the plastic bag of filter.




4、The filter is fixed on the bottom cover.




5、Close the bottom cover and twist in the lock direction.



6、Plug in the power adapter line to the machine.



7、Plug the power adapter into the socket.




8、Press the on/off key to run the machine

六、Operation Guide

1、Regular function



- Turn on/off

After the product is connected to the power supply ,touch the button ,the product enters the working state ,it defaults to automatic mode operation.The gear of the product fan is adjusted according to the PM2.5 real-time monitoring data,the PM2.5 data is displayed as follow :


PM.25 Index	Air Quality	Fan Gear
10-79	Excellent	1
80-299	Good	2
300-500	Pollution	3

10 seconds after turn on the machine ,the display “ — — — ” after 10 seconds ,shows the real-time PM2.5 data .

- Wind speed adjustment


Touch the wind speed  button,disable automatic mode ,enter manual mode.

- Negative ion purification (WIFI function is only applicable to KJA07-A3)


Touch the negation ion button ,turn on/off the negative ion function.

On working state,long press the negative ion button for 3 seconds ,enter the wifi status and connect the APP.


- Mode-SLEEP

Touch the sleep button ,and the machine enter the sleep mode ,the screen display and PM2.5 status indicator will be turn off,the fan will work at ultra-low speed ,if you need to wake up the screen ,tap any button can wake up the screen .

- Timer


Touch the Timer button ,the timer starts from 1-12hours,the power will be turned off when time expires .

- Child lock

Touch the Child lock button ,the machine will be locked .In the state of the child lock, the other buttons can' t be used .Long press the the button child lock for 3 seconds,the child lock function will be unlocked .
In non-child lock state ,long press the child lock button ,the screen display switches to the usage time(hours)of the filter .

2、Special function

- Sterilization (for KJA07-A2,KJA07-A3)

Touch the sterilization button ,turn on/off this function.

七、Cleaning and Maintenance

Cautions:


Always turn off the adapter plug before cleaning.

Never immerse products and accessories in water or any other liquid.




Never use abrasive,corrosive or flammable detergents(such as bleach or alcohol)to clean any part of the product.

The air purification filter should not be washed or vacuumed .

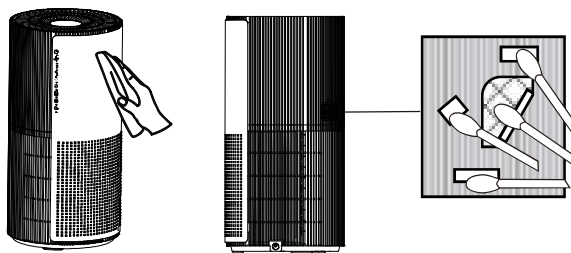Cleaning Plan	
Frequency	Cleaning method
When necessary	Clean the surface of the product with a dry soft cloth,air inlet and outlet .
Every two months	Clean the air quality sensor air inlet and air outlet with a dry soft cloth or soft brush.



Filter Replacement:

1. After the product is powered off,unscrew the filter cover according to the direction of the base filter cover switch,and take out the air purification filter whose service life has ended, and put it into the corresponding garbage can.
 2. Remove all packaging materials from the new filter and put the removed filter back into the product.
 3. Screw the filter cover in the direction indicated by the base screen cover switch to place the product on a stable table.
 4. Insert the adapter into the socket. After the product is powered on,tap the power button to make the product work normally.About XT-KJA07-A1 and XT-KJA07-A2 touch the timer button  for 5 seconds. (About XT-KJA07-A3 touch the timer button  for 5 seconds.)The  remaining life timer is reset.
- Note: The used air filter contains contaminants collected from the air. Do not touch the filter cotton directly or smell the filter.