


## Appendix C. Radiated Emission Co-location Report

FCC ID: KA2IR895LA1 Page No. : C1 of C3





40


20

0 1000 4000. 6000. 8000. 10000.

## 1. Results of Radiated Emissions for Co-located

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	2.4G + 5G

## 



18000.

22000.

Frequency (MHz)

26000.

30000.

34000.

40000


14000.

FCC ID: KA2IR895LA1 Page No. : C2 of C3





## Vertical

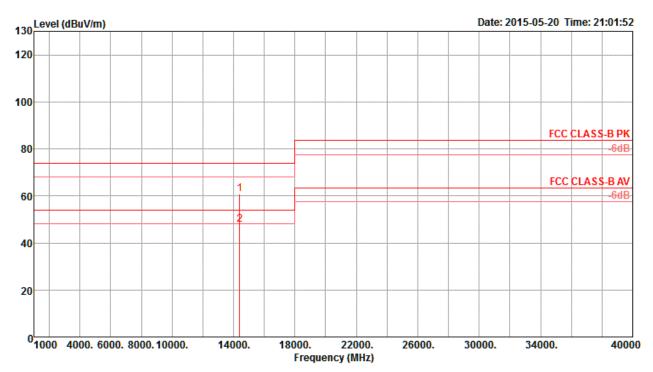

	Freq	Level	Limit Line					Preamp Factor	T/Pos	A/Pos Remark	Pol/Phase	
	MHz	$\overline{dBuV/m}$	$\overline{\mathtt{dBuV/m}}$	dB	dBuV	dB	dB/m	——dB	deg	Cm		
1	14393.73	60.84	74.00	-13.16	46.37	7.27	40.74	33.54	137	115 Peak	VERTICAL	
2	14396.00	47.70	54.00	-6.30	33.23	7.27	40.74	33.54	137	115 Average	VERTICAL	

FCC ID: KA2IR895LA1 Page No. : C3 of C3