

Page: 1 of 101

# **Hearing Aid Compatibility (HAC) TEST REPORT**

## <For RF-Emission Measurement>





Model No.(EUT):	L51		
Company Name	GREAT TALENT TECHNOLOGY LIMITED		
O A -l -l	RM602,T3 Software Park,Hi-Tech Park South,Nanshan,		
Company Address	Shenzhen,China		
FCC ID	2ALZM-L51		
Date of receive	Mar. 07, 2019		
Date of test	Mar. 29, 2019		
Date of Issue	Apr. 11, 2019		
<u> </u>	·		

Standards:

### **ANSI C63.19-2011**

FCC RULE PART(S): 47 CFR PART 20.19(B)

HAC CATEGORY: M4 (M Category)

In the configuration tested, the EUT complied with the standards specified above.

#### Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

The test results of this report relate only to the tested sample (EUT) identified in this re-port.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Signed on behalf of SGS				
Engineer	Asst. Manager			
Stella.Chang	Alex.wu Alex Wu			
Date: Apr. 11, 2019	Date: Apr. 11, 2019			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Compliance Certification Services Inc. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan /新北市五股區五工六路11號 t:(886-2) 2299-9720 f:(886-2) 2298-1882 www.sgs.tw www.ccsrf.com 程智科技股份有限公司



Page: 2 of 101

## **Revision History**

Report Number	Revision	Description	Issue Date
T190329W04	Rev.00	Initial creation of document	Apr. 11, 2019



Page: 3 of 101

## **Table of Contents**

1. Introduction	4
2. Testing Laboratory	5
3. Details of Applicant	
4. Description of EUT	6
5. Air Interfaces and Bands	
6. Test Environment	9
7. Description of test system	10
8. Test Procedure	14
9. System Verification	16
10. Modulation Interference Factor	17
11. Maximum Average Antenna input power	19
12. Justification of held to ear modes tested	20
13. ANSI C63.19-2011 performance and categories	22
14. Instruments List	23
15. Summary of Results	25
16. Measurement Data	26
17. System Verification data	44
18. DAE & Probe Calibration Certificate	48
19. Uncertainty Budget	91
20. System Validation from Original Equipment Supplier	92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 101

### 1. Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

a) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD: RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 5 of 101

## 2. Testing Laboratory

Company Name	Compliance Certification Services Inc.	
Company address	No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891,	
	Taiwan. (R.O.C.)	
Website	http://www.ccsrf.com	

## 3. Details of Applicant

Applicant Name	GREAT TALENT TECHNOLOGY LIMITED	
Applicant Address	RM602,T3 Software Park,Hi-Tech Park South,Nanshan,	
Applicant Address	Shenzhen,China	



Page: 6 of 101

## 4. Description of EUT

Model No.	L51				
FCC ID	2ALZM-L51				
	⊠CDMA 1xRTT	⊠CDMA EVD	00		
Mode of Operation	⊠LTE FDD	□ LTE TDD			
	⊠WLAN802.11b/g/n/(2	20M) ⊠Blueto	ooth		
	CDMA			1	
	LTE FDD			1	
Duty Cycle	LTE TDD			0.633	
	WLAN802.11b/g/n(20N	<b>1</b> )		1	
	Bluetooth			1	
	CDMA BC 0		824	_	849
	CDMA BC 1		1850	_	1910
	CDMA BC 10		815	_	826
TV 5	LTE FDD Band 13		777	_	787
TX Frequency Range (MHz)	LTE FDD Band 25		1850	_	1915
	LTE FDD Band 26		814	_	849
	LTE FDD Band 41		2496	_	2690
	WLAN802.11 b/g/n(20M)		2412	_	2462
	Bluetooth		2402	_	2480

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 101

Channel Number (ARFCN)	CDMA BC 0	1013	_	777
	CDMA BC 1	25	_	1175
	CDMA BC 10	476	_	684
	LTE FDD Band 13	23205	_	23255
	LTE FDD Band 25	26047	-	26683
(* 511)	LTE FDD Band 26	26697	_	27033
	LTE TDD Band 41	39675	_	41565
	WLAN802.11 b/g/n(20M)	1	_	11
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 8 of 101

### 5. Air Interfaces and Bands

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
	BC0				CMRS voice	
CDMA	BC1	VO	Yes	BT or Wi-Fi	service*	NA
CDIVIA	BC10			D1 01 VVI-11	301 1100	INA
	EVDO	DT	NA		NA	
	13					
LTE FDD	25	DT	NA	BT or Wi-Fi	NA	NA
	26					
LTE TDD	41	DT	NA	BT or Wi-Fi	NA	NA
Wi-Fi	2450	DT	NA	WWAN	NA	NA
BT	2450	DT	NA	WWAN	NA	NA

VO: Legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

1. \*: Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011



Page: 9 of 101

### 6. Test Environment

Ambient Temperature	21.7° C
Relative Humidity	<80 %

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 10 of 101

## 7. Description of test system

7.1 Measurement system Diagram for SPEAG Robotic

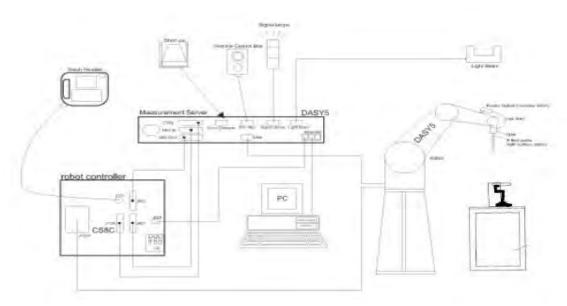


Fig.1 The SPEAG Robotic Diagram

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- · E Field probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic

This documents, subject to Terms and Conditions for Electronic Documents at www.sg..com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and purisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 101

- · A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- · Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch phantom.
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.



Page: 12 of 101

#### 7.2 E Field Probe

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material			
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy ±6.0%, k=2)			
Frequency	(extended to 20 MHz for MRI), Linearity: ± 0.2 dB (100 MHz to 3 GHz)	ED2DV0 E Field Dashe		
Directivity	LOOD in air (retation around prob	ER3DV6 E-Field Probe		
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)			
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB			
Dimensions	Tip diameter: 8 mm Distance from probe tip to dipole centers: 2.5 mm			

#### 7.3 Test Arch

Description	Enables easy and well defined	
	positioning of the phone and	
	validation dipoles as well as simple	
	teaching of the robot.	
Dimensions	length: 370 mm	
	width: 370 mm	
	height: 370 mm	Test Arch

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 101

#### 7.4 Phone Holder

. <u>- 110110 110140</u>		
Description	Supports accurate and reliable	
	positioning of any phone Effect on	-
	near field <+/- 0.5 dB	
		Phone Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 101

### 8. Test Procedure

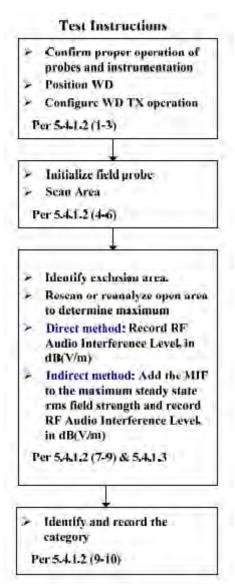


Fig.2 RF emission flow chart

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責。同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Compliance Certification Services Inc.</mark>No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan /新北市五股區五工六路11號 t:(886-2) 2299-9720 f:(886-2) 2298-1882 www.sgs.tw www.ccsrf.com 程智科技股份有限公司



Page: 15 of 101

The following illustrate a typical RF emissions test scan over a wireless communications device (Indirect method):

- 1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
- 2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
- 4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
- 5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
- 6. The measurement system measured the field strength at the reference location.
- 7. Measurements at 5mm increments in the  $5 \times 5$  cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
- 8. The system performed a drift evaluation by measuring the field at the reference location.

#### Note.

Per KDB 285076 D01 v05 2.c) 1), handsets that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2011. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責。同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 101

## 9. System Verification

A dipole antenna meeting the requirements given in ANSI C63.19-2011 was placed in the position normally occupied by the WD.

The length of the dipole was scanned by E-field probes and the maximum values for each were recorded.

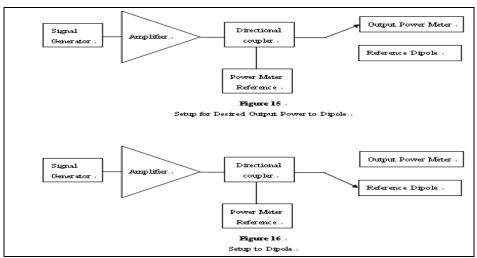


Fig.3 System verification

#### For E-Field Scan

Mode	Frequency(MHz)	Input Power(dBm)	E-Field 1 (V/m)	E-Field 2(V/m)	Target Value(V/m)	Deviation	Measured Date
CW	835	20	108.9	110.5	110.3	-0.54%	Mar. 29, 2019
CW	1880	20	89.94	91.43	88.6	2.35%	Mar. 29, 2019

#### Note:

For E-Field, the deviation is [(E-Field 1 + E-Field 2) / 2 – Target value] / Target value x 100%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責。同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 101

### 10. Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The MIF may be determined using a radiated RF field or a conducted RF signal,

- b) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.
- c) Measure the steady-state rms level at the output of the fast probe or sensor.
- d) Measure the steady-state average level at the weighting output.
- e) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.
- f) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.
- g) The MIF for the specific modulation characteristic is provided by the ratio of the step f) measurement to the step c) measurement, expressed in dB (20 × log(step f))/step c)).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責。同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 101

Based on the KDB285076D01v05, the handset can also use the MIF values predetermined by the test equipment manufacturer, and the following table lists the MIF values evaluated by DASY manufacturer (SPEAG), and the test result will be calculated with the MIF parameter automatically.

SPEAG UID	UID version	Communication system	MIF(dB)
10293	AAB (9.25.2018)	CDMA2000, RC3, SO3, Full Rate	-19.43
10295	AAB (9.25.2018)	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	3.26



Page: 19 of 101

## 11. Maximum Average Antenna input power

		Maximum
Band	Channel	Tune-up limit
		power(dBm)
	1013	24.5
CDMA BC0	384	24.5
	777	24.5
	25	21.5
CDMA BC1	600	21.5
	1175	21.5
	476	24.5
CDMA BC10	580	24.5
	684	24.5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責;同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions if one The Company's findings at the time of its intervention only and within the limits of Client's intervention from expression all their inflate and eligibility is to it eight and eligibility is expressed in the eligibility in the eligibility is to it eight and eligibility in the eligibility is to it eight and eligibility in the eligibility in the eligibility is to it eligibility in the eligibility in the eligibility in the eligibility is to it eligibility in the eligibility in eligibility in e instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 101

### 12. Justification of held to ear modes tested

### I. Analysis of RF air interface technologies

- a. The device doesn't support VoLTE/VoWLAN, so HAC test for them is not required.
- b. Based on ANSI. C63.19-2011. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operating modes. If a device supports multiple RF air interfaces, each RF air interface shall be evaluated individually.
- c. There is no OTT voice service pre-installed (installed and delivered) by the manufacturer.
- d. There is no OTT voice service pre-installed (installed and delivered) by the manufacturer for the operating system manufacturer's software partner.
- e. There is no OTT voice service installed and delivered by the manufacturer at the direction of the service provider.

The MIF plus the worst case average power for all modes are investigated below to determine the testing requirements for this device.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 21 of 101

### II. Low power exemption

Air interference	Maximum Average Antenna input power (dBm)	Worst case MIF (dB)	Maximum Average Antenna input power + MIF (dBm)	Low power exemption
CDMA BC0 (RC1, SO3, 1/8th Rate 25 fr.)	24.5	3.26	27.76	No
CDMA BC1 (RC1, SO3, 1/8th Rate 25 fr.)	21.5	3.26	24.76	No
CDMA BC10 (RC1, SO3, 1/8th Rate 25 fr.)	24.5	3.26	27.76	No
CDMA BC0 (RC3, SO3, Full Rate)	24.5	-19.43	5.07	Yes
CDMA BC1 (RC3, SO3, Full Rate)	21.5	-19.43	2.07	Yes
CDMA BC10 (RC3, SO3, Full Rate)	24.5	-19.43	5.07	Yes

- # We used the predetermined MIF to evaluate the low power exemption.
- # Based on ANSI C63.19-2011, RF emission testing for CDMA (RC1, SO3, full rate) is exempted.
- # Based on ANSI C63.19-2011, CDMA (RC1, SO3, full rate) that is exempted from testing shall be rated as M4.



Page: 22 of 101

## 13. ANSI C63.19-2011 performance and categories

The measurements were performed to ensure compliance to the ANSI C63.19-2011 standard,

Category	E-Field Emissions dB(V/m) < 960MHz
M1	50-55
M2	45-50
M3	40-45
M4	<40

Category	E-Field Emissions dB(V/m) > 960MHz
M1	40-45
M2	35-40
M3	30-35
M4	<30

WD RF audio interference level categories in logarithmic units



Page: 23 of 101

### 14. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	E-Field Probe	ER3DV6	2480	Dec.10,2018	Dec.09,2019
Schmid & Partner	System Validation	CD835V3	1149	Dec.10,2018	Dec.09,2019
Engineering AG	Dipole	CD1880V3	1023	Jun.21,2018	Jun.20,2019
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	1336	Aug.06,2018	Aug.05,2019
Schmid & Partner	Coffwara	DASY52	N/A	Calibration	Calibration
Engineering AG	Software	52.10.1	IN/A	not required	not required
Agilent	Dual-directional	772D	MY52180142	Jul.04,2018	Jul.03,2019
Aglient	coupler	778D	MY52180302	Jul.05,2018	Jul.04,2019
Agilent	RF Signal Generator	N5181A	MY52180142	Jul.04,2018	Jul.03,2019
Schmid & Partner Engineering AG	Test Arch SD HAC	P01	1047	Calibration not required	Calibration not required
Agilent	Power Meter	ML2496A	1326001	Aug.09,2018	Aug.02,2019
Agilent	Power Sensor	MA2411B	1315048	Aug.09,2018	Aug.02,2019



Page: 24 of 101

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
R&S	Radio Communication Tester	CMW 500	143913	Apr.29.2018	Apr.28.2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 101

## 15. Summary of Results

#### E-Field

E-Field Emission	Channel	Modulation Interference Factor	Power Drift(dB)	Audio Interference Level dB(V/m)	RESULT	Excl Blocks per 4.3.1.2.2
	1013	3.26	0.01	29.93	M4	369
CDMA BC0	384	3.26	0.03	35.20	M4	369
	777	3.26	0.01	31.23	M4	478
E-Field Emission	Channel	Modulation Interference Factor	Power Drift(dB)	Audio Interference Level dB(V/m)	RESULT	Excl Blocks per 4.3.1.2.2
	25	3.26	0.02	26.57	M4	123
CDMA BC1	600	3.26	-0.01	27.88	M4	123
	1175	3.26	-0.08	26.92	M4	123
E-Field Emission	Channel	Modulation Interference Factor	Power Drift(dB)	Audio Interference Level dB(V/m)	RESULT	Excl Blocks per 4.3.1.2.2
	476	3.26	0.04	31.41	M4	369
CDMA BC10	560	3.26	-0.01	31.65	M4	478
	684	3.26	-0.02	36.93	M4	789

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 26 of 101

### 16. Measurement Data

Date: 2019/3/29

#### HAC-RF-EMISSION CDMA Cellular(BC0) CH 1013

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 824.7 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

### **Device E-Field measurement/E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.05 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 29.93 dBV/m

**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b> <b>26.69 dBV/m</b>	Grid 3 <b>M4</b> <b>30.44 dBV/m</b>
Grid 4 <b>M4</b>	Grid 6 <b>M4</b>
Grid 7 <b>M4</b> <b>27.39 dBV/m</b>	 Grid 9 <b>M4</b> <b>30.05 dBV/m</b>


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 27 of 101

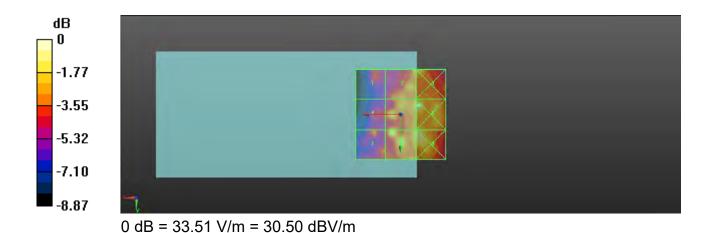



Report No.: T190329W04 Page: 28 of 101

Date: 2019/3/29

#### HAC-RF-EMISSION\_CDMA Cellular(BC0)\_CH 384

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 836.5 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Device E-Field measurement/E Scan: Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.47 V/m; Power Drift = 0.03 dB

Applied MIF = 3.26 dB

RF audio interference level = 35.20 dBV/m


**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 M4
27.18 dBV/m	34.02 dBV/m	34.69 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
31.52 dBV/m	35.2 dBV/m	35.62 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
31.19 dBV/m	34.61 dBV/m	35.2 dBV/m



Page: 29 of 101

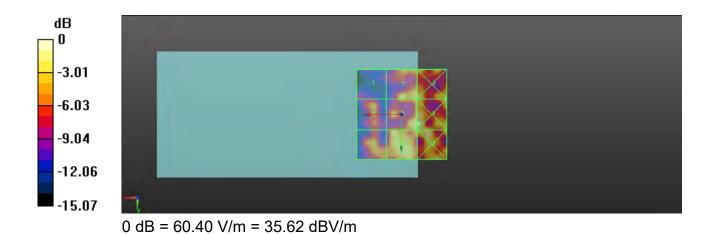

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 30 of 101

Date: 2019/3/29

### HAC-RF-EMISSION\_CDMA Cellular(BC0)\_CH 777

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 848.31 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### DASY5 Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Device E-Field measurement/E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000

mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 18.73 V/m; Power Drift = 0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 31.23 dBV/m


**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 <b>M4</b>
28.8 dBV/m	28.8 dBV/m	27.89 dBV/m
Grid 4 M4	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
29.31 dBV/m	31.23 dBV/m	28.18 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
31.09 dBV/m	32.6 dBV/m	28.17 dBV/m



Page: 31 of 101

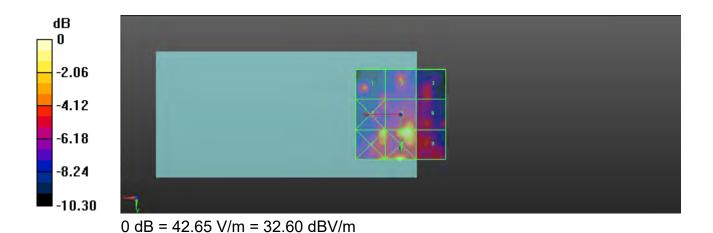



Report No.: T190329W04 Page: 32 of 101

Date: 2019/3/29

#### HAC-RF-EMISSION\_CDMA Cellular(BC1)\_CH 25

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 1851.25 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Device E-Field measurement /E Scan: Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.566 V/m; Power Drift = 0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.57 dBV/m


**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M3</b>	Grid 3 <b>M3</b>
26.52 dBV/m	31.8 dBV/m	30.03 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
22.05 dBV/m	22.68 dBV/m	22.6 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
26.44 dBV/m	26.3 dBV/m	26.57 dBV/m



Page: 33 of 101

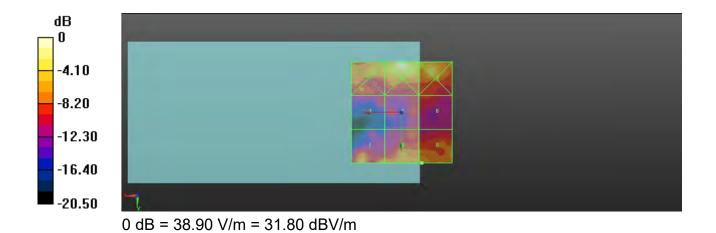

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 34 of 101

Date: 2019/3/29

### HAC-RF-EMISSION\_CDMA Cellular(BC1)\_CH 600

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 1880 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Device E-Field measurement:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.02 V/m; Power Drift = -0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 27.88 dBV/m


**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M3</b>	Grid 3 <b>M4</b>
26 dBV/m	31.03 dBV/m	29.04 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
21.71 dBV/m	23.06 dBV/m	23.36 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
27.88 dBV/m	27.08 dBV/m	25.52 dBV/m



Page: 35 of 101

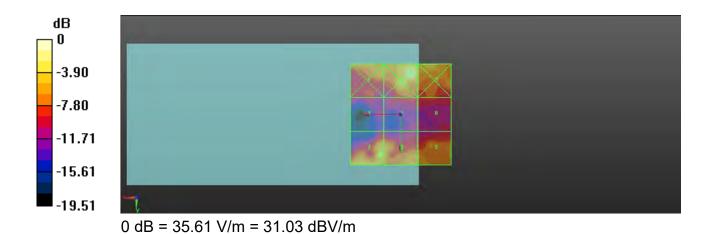



Report No.: T190329W04 Page: 36 of 101

Date: 2019/3/29

#### HAC-RF-EMISSION\_CDMA Cellular(BC1)\_CH 1175

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 1908.75 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

#### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Device E-Field measurement /E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.567 V/m; Power Drift = -0.08 dB

Applied MIF = 3.26 dB

RF audio interference level = 26.92 dBV/m


**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 <b>M4</b>
23.56 dBV/m	28.5 dBV/m	26.66 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
17.68 dBV/m	22.25 dBV/m	22.23 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
23.21 dBV/m	25.2 dBV/m	26.92 dBV/m



Page: 37 of 101

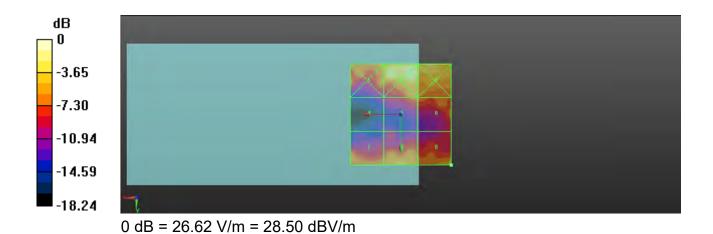

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 38 of 101

Date: 2019/3/29

# HAC-RF-EMISSION\_CDMA Cellular(BC10)\_CH 476

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 817.9 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Device E-Field measurement/E Scan:** Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 21.27 V/m; Power Drift = 0.04 dB

Applied MIF = 3.26 dB

RF audio interference level = 31.41 dBV/m

**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 M4
29.73 dBV/m	31.41 dBV/m	37.09 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 M4
29.59 dBV/m	30.67 dBV/m	35.91 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
30.58 dBV/m	30.16 dBV/m	32.45 dBV/m


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 101

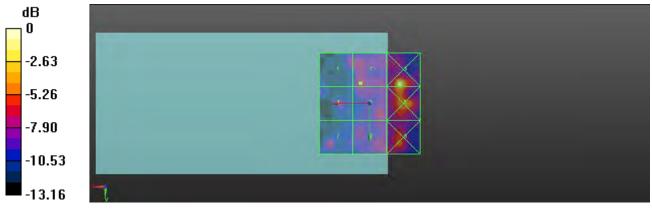

0 dB = 71.57 V/m = 37.09 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 40 of 101

Date: 2019/3/29

# HAC-RF-EMISSION\_CDMA Cellular(BC10)\_CH 560

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 820 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Device E-Field measurement /E Scan: Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.89 V/m; Power Drift = -0.01 dB

Applied MIF = 3.26 dB

RF audio interference level = 31.65 dBV/m

**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 <b>M4</b>
31.65 dBV/m	30.3 dBV/m	30.61 dBV/m
Grid 4 M4	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
33.04 dBV/m	29.67 dBV/m	31.32 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
34.44 dBV/m	31.71 dBV/m	30.58 dBV/m


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 41 of 101

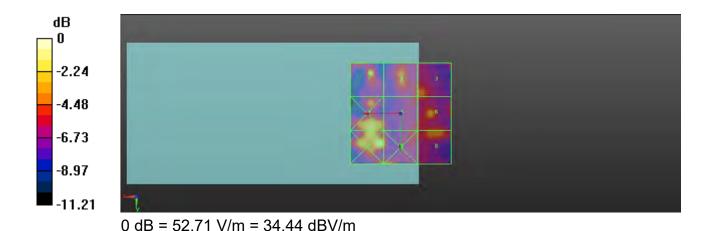

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 42 of 101

Date: 2019/3/29

# HAC-RF-EMISSION\_CDMA Cellular(BC10)\_CH 684

Communication System: UID 10295 - AAB, CDMA2000, RC1, SO3, 1/8th Rate 25 fr.;

Frequency: 823.1 MHz; Duty Cycle: 1:17.7419

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Device E-Field measurement /E Scan: Interpolated grid: dx=0.5000 mm, dy=0.5000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.77 V/m; Power Drift = -0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 36.93 dBV/m

**Emission category: M4** 

MIF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 <b>M4</b>
33.96 dBV/m	36.58 dBV/m	34.95 dBV/m
Grid 4 <b>M4</b>	Grid 5 <b>M4</b>	Grid 6 <b>M4</b>
33.39 dBV/m	36.93 dBV/m	33.82 dBV/m
Grid 7 <b>M4</b>	Grid 8 <b>M4</b>	Grid 9 <b>M4</b>
35.35 dBV/m	36.93 dBV/m	34.82 dBV/m


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 43 of 101

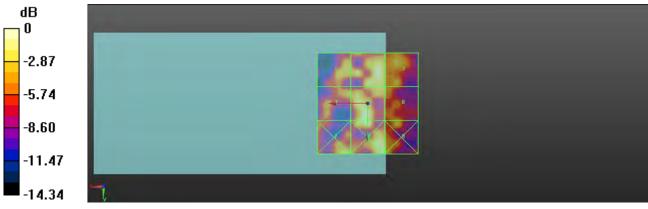

0 dB = 70.24 V/m = 36.93 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 44 of 101

# 17. System Verification data

Date: 2019/3/29

**Dipole CD835V3 SN:1149** 

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m

Phantom section: RF Section

### **DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Dipole E-Field measurement:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 107.4 V/m; Power Drift = 0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 108.9 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 <b>M4</b>	Grid 2 <b>M4</b>	Grid 3 <b>M4</b>
103.7 V/m	108.9 V/m	102.2 V/m
Grid 4 <b>M4</b>	Grid 5 M4	Grid 6 <b>M4</b>
62.44 V/m	62.63 V/m	60.59 V/m
Grid 7 <b>M4</b>	Grid 8 M4	Grid 9 <b>M4</b>
110.4 V/m	110.5 V/m	110.0 V/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 45 of 101


### **Cursor:**

Total = 110.5 V/m

E Category: M4

Location: 3, 78, 9.7 mm





0 dB = 110.5 V/m = 40.86 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 46 of 101

Date: 2019/3/29

# Dipole CD1880V3\_SN:1023

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

**DASY5** Configuration:

Probe: ER3DV6 - SN2480; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2018/12/10

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn1336; Calibrated: 2018/8/6

Phantom: HAC Test Arch;;

DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

**Dipole E-Field measurement:** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 159.3 V/m; Power Drift = -0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 89.94 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
90.06 V/m	91.43 V/m	90.04 V/m
Grid 4 M3	Grid 5 M3	Grid 6 <b>M3</b>
69.98 V/m	70.52 V/m	69.25 V/m
Grid 7 <b>M3</b>	Grid 8 <b>M3</b>	Grid 9 <b>M3</b>
88.80 V/m	89.94 V/m	88.25 V/m

### **Cursor:**

Total = 91.43 V/mE Category: M3

Location: 0, -32.5, 9.7 mm


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 47 of 101





0 dB = 91.43 V/m = 39.22 dBV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits of Client's intervention only and within the document is company's findings at the time of its intervention only and within the limits of Client's intervention only and within the decument is the present of the prese instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 101

# 18. DAE & Probe Calibration Certificate



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page: 49 of 101

Calibration Laboratory of Schmid & Partner Engineering AG aughausstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage C Servizio svizzero di taratura Swins Calibration Service

Accredited by the Swiss Accreditation Service (SAS) The Swins Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificans According No.: SCS 0108

### Glossary

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity. Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement,
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input veltage
  - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
  - input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate Not DAE4-1338\_Aug18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 50 of 101

### DC Voltage Measurement:

A/D - Converte: Resolution nomine

High Flange: 4LSB\_ full range = -100...+500 mV Low Range 

Calibration Factors	× -	, A.	Z
High Range	403.344 ± 0,02% (k=2)	403.624 ± 0.02% (k=2)	40% 107 ± 0.02% (k=2)
Low Range	3,95102 ± 1.50% (k=2)	3,98703 ± 1,50% (k=2)	3.99683 ± 1.50% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	287.0 ° ± 1 °

Certificate No: DAE4-1336 Aug 15

Page I of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 51 of 101

### Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200042.98	8.66	0.00
Channel X + Input	20006.34	1.11	0.01
Channel X - Input	-20005,65	-0.58	0.00
Channel Y + Input	200034,32	0.12	0.00
Channel Y + Input	20003.47	+1:57	0.01
Channel Y - Input	-20008.39	-1.21	0,01
Channel Z + Input	200032.22	-2.05	-0.00°
Channel Z + Input	20002.78	-2.14	-0.01
Channel Z - Input	-20007.34	2.00	0.01

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.47	0.30	0.01
Channel X + Input	201.92	0.79	0.39
Channel X - Input	-198,26	0.59	0.30
Channel Y + Input	2001.55	0.87	0.02
Channel Y + Input	200.97	-0.11	-0.05
Channel V - Input	199.34	0.43	17,22
Channel 2 + Input	2001.12	0.04	0,00
Channel Z. + Input	200 15	0.89	-0,44
Channel Z - Input	-200.14	1.15	0.58

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec. Measuring time: 3 sec.

	Common mode Input Voltage (mV)	High Renge Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	6.04	4.72
	500	4.13	4.79
Channel Y	500	-3.65	-3.78
	200	2,68	2.45
Channel Z	200	22,48	22.16
	-200	-24.83	-25.10

	Input Voitage (mV)	Channel X (µV)	Channel Y (jsV)	Channel Z (µV)
Channel X	200		6:12	-1,64
Channel V	800	9.19		6:46
Channel Z	200	8.44	6.31	-

Certificate No: DAE4 1336\_Aug18

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 52 of 101

### 4. AD-Converter Values with inputs shorted

	High Range (LSB)	Low Range (LSB)
Channel X	15665	16509
Channel Y	15907	15587
Channel Z	15855	15507

### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time. 3 sec. Measuring lime: 3 sec.

DI			

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)	
Channel X	0.87	-0.00	2.62	0.36	
Channel Y	3,53	2,87	4,59	0.34	
Channel Z	-0,18	-1.54	1.53	0.54	

### 5. Input Offset Current

Nominal Input circuitry offset current on all channels <25tA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)		
Channel X	200	500		
Channel Y	200	200		
Channel Z	200	200		

Low Battery Alarm Voltage (Typical value

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	47,9	
Supply (- Vcc)	7.6	

9. Power Consumption (Typical values for Information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)	
Supply (+ Vcc)	40.01	46	114	
Supply (- Vcc)	-10,01	-8	-9	

Dartificate No: DAE4-1386\_Aug 18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 53 of 101

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 5004 Zurich, Switzerland





Accreditation No.: SCS 0108

According by the Sees According to Service (SAS) The Swiss Accreditation Service is one of the signatures to the EA

Multilateral Agreement for the recognition of calibration certificans

Auden

Certificate No ER3-2480 Dec18

**CALIBRATION CERTIFICATE** 

ER3DV6 - SN:2480

Carbration procedura(s) QA CAL-02.V8. QA CAL-25.V8

Calibration procedure for E-field probes optimized for close near field

evaluations in an

December 10, 2018

This call trailing certificate documents the Baceabrilly to national standards, which make the physical links of measurements (SI) The measurements and the uncorpainties with confidence producing are given on the following pages and are part of the centiform

All collections have been conducted in the obsaid language facility or was mention producted (22 ± 3) °C unit to many < 70%.

Castronica Equipment used (MATE trates) for characters

Primary Standards	in	Call Date (Cartificate No.)	Scheduled Calibration
Fower meter NRP	SW: 104778	04-Apr-18 (No. 217-02672/02678)	Aprile
Power sensor NRP 291	SN 103244	84-Apr-18 (No. 217-02672)	Apr-15
Power sensor NRP-ZB1	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-15
Reference 20 dB Attenuator	BN: 85277 (20x)	04-Apr 18 (No. 217-02662)	Apr-15
Reference Proce ER3DV6	SN-2528	DR-Oct-18 (No. ER3-2325, Oct18)	Oct-19
DAE4	SN 789	07-Aug-16 (No. DAE4-789, Aug 18)	Aug-18
Secondary Standards	JD:-	Check; Date (In house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	in house check: Jun 25
Power sensor Edd FZA	38/ MY4149W087	08-Apr-16 (in nouse check Jun-18)	in house check: Jun 20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in floure check Jun-18)	in house check, Jun 20
HF generator HF 86481	SN: US3642U01700	04-Aug-99 jin house check Jun-18)	iii novise check Jun 20
Network Analyzar EB358A	SN: US410B0477	31-May-14 (in Figure of eck Oct-18)	in house-sheek Oct-19

Jeton Kastrali	Laboratory Teconissis	- 4 7 2 -
	Sectional Section 150	- De
Eath Postvice	Teotracal fahroger	All 19
		mused December 11 2018
		Earlin Postoric: Technical Manager  Technical Manager

Certificate No: ER3-2490\_Dec18

Page 7 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 54 of 101

Calibration Laboratory of Schmid & Partner Engineering AG Zeughauswasse 43, 1994 Zürich, Switzenand





Service suless d'étalonnage C Servizio systemo di tanatura Swiss Calibration Service

Accreditation No. SCS 0108

Acceptant by the Swes Acceptanton Service (SAS)

The Swiss Accreditation Service is one of the signalories to the EA Mullimeen: Agrenment for the recognition of calibration certification

Glossary:

NORMX,y,z sensitivity in free space DCP

diade compression point crest factor (1/duty\_cycle) of the RF signal modulation dependent incarration parameters QF A.B.C.D

Polarization y if ristation around probe axis

Potenzation 9 à rotation around an axis that is in the plane normal to prope ave (at measurement center).

i.e., II = 0 is normal to probe axis

Connector Anglei Information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

iEEE Std 1309-2005. "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antiennas. Irom 9 kHz to 40 GHz", December 2005
 CTIA Test Plan for Hearing Aid Compatibility, Rev 3.1.1, May 2017

Methods Applied and Interpretation of Parameters:

NORMs, y.z. Assessed for E-field polarization G = 0 for XY sensors and  $\phi = 90$  for Z sensor (F  $\leq 900$  MHz in TEM-call; f  $\simeq 1800$  MHz. R22 waveguide)

NORM(f)x y z = NORMx y z \* frequency\_response (see Frequency Response Chart).

DCFx,v.z. DCF are numerical linearization paremeters assessed based on the data of power sweep with CW erginal (no uncertainty required). DCP does not depend on frequency nor media.

PAR: PAR is the Feak to Average Ratio that is not calibrated but determined based on the signal

 $A\kappa_{r}/x$ ;  $\Theta\kappa_{r}/x$ ;  $C\kappa_{r}/x$ ;  $D\kappa_{r}/x$ ;  $VR\kappa_{r}/x$ ; A, B, C, D are managed linearization parameters assessed based on the data of power sweep for specific monutation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode

Spherical isotropy (30 deviation from isotropy); in a locally homogeneous field realized using an open wavequide setup.

Swinsor Offset. The sensor offset corresponds to the offset of virtual measurement center from the probe to (on probe axis). No tolerance required.

Connector Angle. The angle is assessed using the information gained by determining the MDRMX inc. uncartainty required).

Confidente No. ERS-2480, Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 55 of 101

ER3DV6 - SN:2480

December 10, 2018

# Probe ER3DV6

SN:2480

Manufactured: Calibrated:

March 31, 2009 December 10, 2018

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ER3-2380\_Dec18

Page 3 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 56 of 101

ER3DV6 - SN:2480 December 10, 2018

### DASY/EASY - Parameters of Probe: ER3DV6 - SN:2480

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)	
Norm (µV/(V/m) <sup>2</sup> )	1.98	1.43	1.78	± 10.1 %	
DCP (mV) <sup>S</sup>	100.2	101.8	101.5		

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc <sup>≥</sup> (k=2)
0 0	CW	X	10.0	0.0	1.0	0.00	224.4	±3.5 %
		Y	0.0	0.0	1.0		199.8	
		Z	10.0	0.0	1.0		197.8	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V-1	T1 ms.V <sup>-2</sup>	T2 Ims.V <sup>-1</sup>	T3 ms	T4 V-2	T5 V-1	T6
X	109.0	522.0	36.34	29.18	2.596	5.100	0.00	0.746	1.021
Y	82.59	393.3	35.93	24.73	1.001	5.100	0.00	0.591	1.015
Z	76.35	364.5	36.33	29.64	3.089	5.100	0.00	0.823	1.015

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: ER3-2480\_Dec18 Page 4 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Numerical linearization parameter: uncertainty not required.
Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the faild value.




Page: 57 of 101

ER30V6 - SN 2480

December 10, 2018

### Frequency Response of E-Field (TEM-Cell:Ifi110 EXX, Waveguide: R22)

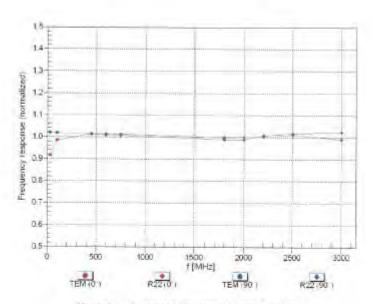

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No. ER3-2480, Dec18

Page 5 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


程智科技股份有限公司




Page: 58 of 101



## Receiving Pattern (6), 9 = 0°

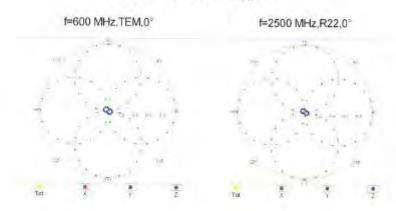

### Receiving Pattern (6), 9 = 90°

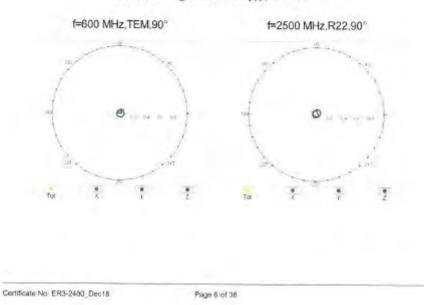


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 59 of 101


ER3DV6 - BN:2480 December 10, 2018

### Receiving Pattern (6), 9 = 0°



Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

### Receiving Pattern (6), 9 = 90°



Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: ER3-2480\_Dec18

Page 7 of 38


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 60 of 101

ER3DV6 - SN:2480 December 10, 2018

# Dynamic Range f(E-field) (TEM cell , f = 900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No. ER3-2480, Dec18

Page 8 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 61 of 101

ER3DV6 - SN:2480

December 10, 2018

### Deviation from Isotropy in Air Error (¢, 9), f = 900 MHz



Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: ER3-2460\_Dec18

Page 9 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

程智科技股份有限公司



Page: 62 of 101

ER3DV6 ~ SN:2480

December 10, 2018

## DASY/EASY - Parameters of Probe: ER3DV6 - SN:2480

### Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle (")	15.5
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	8 mm
Probe Tip to Sensor X Calibration Point	2.5 mm
Probe Tip to Sensor Y Calibration Point	2.5 mm
Probe Tip to Sensor Z Calibration Point	2.5 mm

Certificate No: ER3-2480\_Dec18

Page 10 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 63 of 101

December 10, 2018 ER3DV6 - SN:2480

pendix: Medulation Calibration Parameter

ÚIĎ	ix: Modulation Calibration Paran Communication System Name		A dB	dB√μV	С	D dB	VR mV	Max Unc <sup>E</sup> (k=2)
D	CW	Х	0.00	0.00	1.00	0.00	224.4	± 3.5 %
		Υ	0.00	0.00	1.00		199.8	
		Z	0.00	0.00	1.00		197.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	Х	8.63	79.95	19.00	10.00	30.0	± 9.6 %
		Y	6.70	77.12	15.99		30.0	
		Z	8.99	80.35	19.54		30.0	
10011- CAB	UMTS-FDD (WCDMA)	Х	1.36	70.64	16.32	0.00	150.0	± 9.6 %
		Υ	1.23	69.34	15.34		150.0	
		Z	1.34	71.71	17.01	0.44	150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	Х	1.54	68.30	17.36	0.41	150.0	± 9.6 %
		Y	1.44	67.56	16.75		150.0	
		Z	1.54	68.77	17.71	4.40	150.0	± 9.6 %
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	Х	5.86	70.01	19.22	1.46	150.0	± 9.0 %
		Υ	5.60	69.70	18.89		150.0	
		Z	5.73	70.20	19.18	0.00	150.0	1000
10021- DAC	GSM-FDD (TDMA, GMSK)	×	11.63	85.73	22.68	9.39		± 9.6 %
		Y	15.63	90.72	22.51		50.0	
		Z	11.90	86.22	23.37		50.0	. 0.00
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	Х	11.58	85.57	22.69	9.57	50.0	± 9.6 %
		Y	14.99	90.02	22.32		50.0	
		Z	11.76	85.86	23.28		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	×	11.28	86.30	21.43	6.56	60.0	± 9.6 %
		Y	17.09	91.72	21.52		60.0	
		Z	12.07	87.73	22.41		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	93.41	158.53	57.75	12.57	50.0	±9.6%
		Y	100.00	166.21	60.12		50.0	
		Z	29.69	119.35	45.13		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	Х	37.14	120.85	41.81	9.56	60.0	±9.6 %
		Υ	100.00	150.48	50.32		60.0	
		Z	26.69	111.39	38.52		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	×	12.05	88.41	21.21	4.80	80.08	± 9.6 %
		Υ	21.78	94.95	21.58	-	80.0	
	ARRA ERA (MRIII) AMBII MITTO	Z	14.58	91.83	22.80	3.55	80.0	± 9.6 %
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	Х	14.27	91.86	21.54	3.55		± 9.6 %
		Y	30.68	99.19	21.97		100.0	
		Z	23.90	99.90	24.40	7.00	100.0	± 9.6 %
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	Х	28.21	113.72	38.42	7.80	80.0	19.0%
		Y	78.28	143.02	47.23			
		Z	20.57	105.31	35.44	6.00	80.0	40.00
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Х	10.81	86.16	20.73	5.30	70.0	±9.6 %
		Y	15.07	89.87	20.31		70.0	
		Z	11.88	87.96	21.76	4.00	70.0	1000
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	×	11.86	91.81	20.12	1.88	100.0	± 9.6 %
		Y	7.92	85.14	16.54		100.0	
		Z	54.88	111.31	25.62		100.0	

Page 11 of 38 Certificate No: ER3-2480\_Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 64 of 101

ETTI-STYLE	231-2490	December 10, 2018
ER3DV6 -	SN:2480	December 10, 2018

10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	10.94	93.17	19.71	1.17	100.0	± 9.6 %
		Y	3.30	78.73	13.78		100.0	
		Z	100.00	119.12	26.34		100.0	
10033- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	13.61	93.20	25.94	5.30	70.0	±9.6 %
		Υ	23.98	103.66	28.28		70.0	
		Z	11.23	88.67	24.00		70.0	
10034- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	5.82	84.07	21.54	1.88	100.0	± 9.6 %
	0110)	Y	5.35	83.13	20.29		100.0	
		Z	5.83	83.11	20.47		100.0	
10035- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	3.98	80.06	19.86	1.17	100.0	± 9.6 %
		Υ	3.38	77.98	18.14		100.0	
		Z	4.20	80.20	19.11		100.0	
10036- CAA	IEEE 802.15.1 Bluelooth (8-DPSK, DH1)	X	14.43	94.31	26.35	5.30	70.0	± 9.6 %
		Y	28.22	106.48	29.11		70.0	
		Z	11.88	89.74	24.41		70.0	
10037- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Х	5.92	84.36	21.59	1.88	100.0	±9.6 %
		Y	5.41	83.36	20.32		100.0	
		Z	5.84	83.18	20.46		100.0	
10038- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Х	4.15	80.86	20.22	1.17	100.0	± 9.6 %
		Y	3.51	78.76	18.51		100.0	
		Z	4.40	81.08	19.51		100.0	
10039- CAB	CDMA2000 (1xRTT, RC1)	X	2.03	71.19	16.04	0.00	150.0	± 9.6 %
		Y	1.78	70.21	14.65		150.0	
		Z	1.96	72.68	15.91		150.0	
10042- CAB	IS-54 / IS-136 FDD (TDMA/FDM, Pl/4- DQPSK, Halfrate)	X	10.28	83.81	20.58	7.78	50.0	± 9.6 %
0110		Υ	11.53	85.51	19.47		50.0	
		Z	10.85	84.73	21.35		50.0	
10044- CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.10	86.30	4.07	0.00	150.0	± 9.6 %
		Y	0.02	75.50	0.86		150.0	
		Z	0.42	85.33	1.06		150.0	
10048- CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	Х	14.09	87.71	25.45	13.80	20.0	± 9.6 %
		Y	29.01	100.24	27.05		20.0	
		Z	12.69	85.28	24.98		20.0	
10049- CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	×	11.52	84.98	22.94	10.79	40.0	± 9.6 %
		Y	13.18	87.82	21.91		40.0	
		Z	11.66	85.02	23.41		40.0	
10056- CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	×	12.96	88.40	25.17	9.03	50.0	± 9.6 %
		Y	18.98	96.89	26.98		50.0	
		Z	12.13	86.32	24.24		50.0	
10058- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	Х	21.29	107.31	35.59	6.55	100.0	± 9.6 %
		Y	31.87	120.23	39.93		100.0	
		Z	16.32	100.61	33.14		100.0	
10059- CAB	IEEE 802.11b WIFI 2.4 GHz (DSSS, 2 Mbps)	Х	1.84	71.30	18.69	0.61	110.0	± 9.6 %
		Y	1.68	70.33	18.03		110.0	
		Z	1.87	71.97	19.10		110.0	
10060- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	Х	14.61	101.46	25.90	1.30	110.0	±9.6%
		Y	27.67	110.54	27.71		110.0	
		Z	32.31	114.03	29.50		110.0	

Page 12 of 38 Certificate No: ER3-2480 Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 65 of 101

December 10, 2018 ER3DV6 - SN:2480

10061- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	10.58	96.27	26.74	2.04	110.0	± 9.6 %
		Y	15.14	103.99	28.88		110.0	
		Ż	11.66	98.01	27.36		110.0	
0062-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	5.54	69.47	18.26	0.49	100.0	± 9.6 %
20.102		Y	5.33	69.31	18.02		100.0	
		Z	5.37	69.61	18.25		100.0	
0063- CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	5.60	69.73	18.46	0.72	100.0	± 9.6 %
2110		Y	5.38	69.52	18.18		100.0	
		Z	5.44	69.86	18.43		100.0	
10064- CAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps)	X	6.05	70.30	18.86	0.86	100.0	±9.6 %
		Y	5.77	70.05	18.58		100.0	
		Z	5.82	70.37	18.81		100.0	
10065- CAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 18 Mbos)	X	5.92	70.32	19.02	1.21	100.0	± 9.6 %
		Y	5.65	70.07	18.75		100.0	
		Z	5.75	70.53	19.04		100.0	
10066- CAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24 Mbps)	Х	6.01	70.62	19.36	1.46	100.0	±9.6%
		Y	5.70	70.28	19.04		100.0	
		Z	5.84	70.81	19.36		100.0	
10067- CAC	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps)	Х	6.46	71.29	20.21	2.04	100.0	± 9.6 %
		Y	6.06	70.67	19.70		100.0	
		Z	6.23	71.26	19.99		100.0	
10068- CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	6.65	71.83	20.67	2.55	100.0	± 9.6 %
		Y	6.22	71.18	20.18		100.0	
		Z	6.46	71.90	20.53		100.0	
10069- CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	6.70	71.72	20.89	2.67	100.0	±9.6%
	maps)	Y	6.29	71.17	20.42		100.0	
		Z	6.55	71.94	20.78		100.0	
10071- GAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	6.03	70.40	19.73	1.99	100.0	± 9.6 %
0.10	(2000)	Y	5.75	70.01	19.35		100.0	
		Z	5.93	70.63	19.68		100.0	
10072- CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 12 Mbp8)	X	6.14	71.05	20.05	2.30	100.0	± 9.6 %
0. 45		Y	5.82	70.63	19.70		100.0	
		Z	6.06	71.41	20.10		100.0	
10073- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	6.33	71.67	20.65	2.83	100.0	± 9.6 %
		Y	5.95	71.09	20.22		100.0	
		Z	6.28	72.04	20.67		100.0	
10074- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	6.40	72.06	21.14	3.30	100.0	±9.6 %
		Y	5.96	71.25	20.56		100.0	
		Z	6.37	72.35	21.05		100.0	
10075- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	×	6.72	73.23	22.03	3.82	90.0	±9.6 %
		Y	6.16	72.07	21.29		90.0	
		Z	6.66	73.31	21.80		90.0	
10076- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	6.70	73.09	22.25	4.15	90.0	± 9.6 %
		Y	6.13	71.83	21.45		90.0	
		Z	6.72	73.34	22.08		90.0	
10077- CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	6.74	73.22	22.38	4.30	90.0	± 9.6 %
		Y	6.16	71.94	21.57		90.0	
		1	0.10	F 11.00%	40.1140.0		90.0	

Page 13 of 38 Certificate No: ER3-2480 Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Compliance Certification Services Inc. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan /新北市五股區五工六路11號



Page: 66 of 101

December 10, 2018 ER3DV6 - SN:2480

10081- CAB	CDMA2000 (1xRTT, RC3)	X	1.24	69.19	14.61	0.00	150.0	± 9.6 %
		Y	1.03	67.34	12.70		150.0	
		Z	1.10	69.27	13.86		150.0	
10082- CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Fullrate)	X	3.55	68.94	10.92	4.77	80.0	± 9.6 %
		Y	2.56	66.51	8.49		80.0	
		Z	3.74	69.36	11.38		80.0	
10090- DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	Х	11.24	86.25	21.45	6.56	60.0	± 9.6 %
		Y	16.99	91.67	21.53		60.0	
		Z	12.02	87.67	22.43		60.0	
10097- CAB	UMTS-FDD (HSDPA)	X	2.07	68.85	16.28	0.00	150.0	± 9.6 %
		Y	1.98	68.48	15.72		150.0	
		Z	2.04	69.54	16.53		150.0	
10098- CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.04	68.88	16.27	0.00	150.0	± 9.6 %
		Y	1.95	68.49	15.70		150.0	
		Z	2.00	69.57	16.54		150.0	
10099- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	×	36.62	120.44	41.68	9.56	60.0	±9.6 %
		Y	100.00	150.45	50.31		60.0	
		Z	26.42	111.10	38.43		60.0	
10100- CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.54	71.40	16.85	0.00	150.0	± 9.6 %
		Y	3.36	70.98	16.60		150.0	
		Z	3.43	71.76	17.26		150.0	
10101- CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	Х	3.87	69.98	17.03	0.00	150.0	±9.6 %
		Y	3.69	69.59	16.75		150.0	
		Z	3.69	69.92	17.13		150.0	
10102- CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz. 64-QAM)	Х	3.96	69.82	17.10	0.00	150.0	±9.6 %
		Y	3.79	69.49	16.83		150.0	
		Z	3.79	69.80	17.19		150.0	
10103- CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	Х	8.30	77.07	20.70	3.98	65.0	± 9.6 %
		Y	8.44	79.20	21.62		65.0	
		Z	8.42	77.75	21.11		65.0	
10104- CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	Х	11.08	82.39	24.19	3.98	65.0	± 9.6 %
		Y	11.02	84.00	24.81		65.0	
		Z	10.73	81.90	23.90		65.0	
10105- CAG	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	8.40	76.37	21.76	3.98	65.0	± 9.6 %
		Y	7.66	76.27	21.76		65.0	
		Z	8.05	75.67	21.39		65.0	
10108- CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	Х	3.28	71.26	16.99	0.00	150.0	± 9.6 %
		Y	3.08	70.88	16.73		150.0	
		Z	3.14	71.77	17.45		150.0	
10109- CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	Х	3.55	69.91	17.04	0.00	150.0	± 9.6 %
		Y	3.35	69.52	16.69		150.0	
		Z	3.35	69.95	17.12		150.0	
10110- CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.84	71.03	17.04	0.00	150.0	± 9.6 %
		Y	2.61	70.55	16.62		150.0	
		Z	2.66	71.60	17,41		150.0	
10111-	LTE-FDD (SC-FDMA, 100% RB, 5 MHz,	X	3.12	69.73	16.97	0.00	150.0	± 9.6 %
	16-QAM							
CAG	16-QAM)	Y	2.92	69.43	16.51		150.0	

Certificate No: ER3-2480\_Dec18 Page 14 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 67 of 101

December 10, 2018 ER3DV6 - SN:2480

10112- CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	Х	3.66	69.71	17.04	0.00	150.0	± 9.6 %
		Y	3.46	69.40	16.72		150.0	
		Z	3.46	69.81	17.12		150.0	
10113- CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.29	69.76	17.08	0.00	150.0	± 9.6 %
		Y	3.08	69.51	16.63		150.0	
		Z	3.09	70.18	17.16		150.0	
10114- CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.47	67.85	16.76	0.00	150.0	± 9.6 %
		Y	5.31	67.69	16.59		150.0	
		Z	5.33	67.94	16.86		150.0	
10115- CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	6.03	68.70	17.22	0.00	150.0	± 9.6 %
		Y	5.73	68.24	16.90		150.0	
		Z	5.68	68.24	17.03		150.0	
10116- CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.63	68.15	16.83	0.00	150.0	±9.6 %
		Y	5.47	68.07	16.71		150.0	
		Z	5.47	68.28	16.96		150.0	
10117- CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	×	5.49	67.92	16.82	0.00	150.0	± 9.6 %
		Y	5.31	67.70	16.62		150.0	
		Z	5.29	67.81	16.81		150.0	
10118- CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16- QAM)	X	5.99	68.48	17.11	0.00	150.0	±9.6%
		Y	5.77	68.26	16.92		150.0	
		Z	5.81	68.60	17.22		150.0	
10119- CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64- QAM)	X	5.63	68.22	16.89	0.00	150.0	± 9.6 %
		Y	5.46	68.09	16.74		150.0	
		Z	5.47	68.31	16.99		150.0	
10140- CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	Х	4.02	69.78	17.01	0.00	150.0	± 9.6 %
		Y	3.84	69.48	16.75		150.0	
		Z	3.83	69.80	17.11		150.0	
10141- CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	4.13	69.75	17.13	0.00	150.0	± 9.6 %
		Y	3.95	69.49	16.89		150.0	
		Z	3.94	69.80	17.24		150.0	
10142- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	Х	2.59	70.84	16.85	0.00	150.0	± 9.6 %
		Y	2.35	70.29	16.21		150.0	
		Z	2.41	71.54	17.06		150.0	
10143- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.94	69.87	16.67	0.00	150.0	± 9.6 %
		Y	2.71	69.52	15.96		150.0	
		Z	2.74	70.43	16.56		150.0	
10144- CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	Х	2.91	69.07	15.96	0.00	150.0	±9.6 %
		Y	2.67	68.61	15.14		150.0	
		Z	2.67	69.21	15.53		150.0	
10145- CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.91	69.28	15.05	0.00	150.0	± 9.6 %
		Y	1.58	67.49	13.01		150.0	
		Z	1.59	68.31	13.39		150.0	
10146- CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	Х	3.79	74.52	17.93	0.00	150.0	± 9.6 %
		Y	2.87	70.95	14.82		150.0	
		Z	3.26	72.60	15.46		150.0	
10147- CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	4.03	75.49	18.50	0.00	150.0	± 9.6 %
		Y	3.04	71.80	15.36		150.0	
		Z	3.53	73.80	16.15		150.0	

Page 15 of 38 Certificate No: ER3-2480 Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 68 of 101

R3DV6 = SN:2480	December 10, 2018

10149-	LTE-FDD (SC-FDMA, 50% RB, 20 MHz,	Х	3.56	69.94	17.07	0.00	150.0	± 9.6 %
CAE	16-QAM)	Υ	3.35	69.55	16.72		150.0	
		Z	3.35	69.99	17.15		150.0	
10150- CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.66	69.73	17.06	0.00	150.0	±9.6 %
		Y	3.47	69.42	16.74		150.0	
		Z	3.47	69.84	17.15		150.0	
10151- CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	9.93	81.64	22.71	3.98	65.0	±9.6 %
		Y	10.43	84.49	23.77		65.0	
		Z	10.01	82.23	22.98		65.0	
10152- CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	Х	10.43	82.03	23.80	3.98	65.0	±9.6 %
		Y	10.41	83.79	24.39		65.0	
		Z	10.08	81.46	23.38		65.0	
10153- CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	10.65	82.40	24.29	3.98	65.0	± 9.6 %
		Υ	10.66	84.24	24.92		65.0	
		Z	10.33	81.93	23.89		65.0	
10154- CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK).	Х	2.86	71.23	17.19	0.00	150.0	± 9.6 %
		Υ	2.63	70.73	16.76		150.0	
		Z	2.69	71.83	17.58		150.0	
10155- CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	3.12	69.72	16.97	0.00	150.0	± 9.6 %
		Υ	2.92	69.43	16.52		150.0	
		Z	2.94	70.14	17.08		150.0	
10156- CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	Х	2.46	71.13	16.86	0.00	150.0	± 9.6 %
		Y	2.19	70.33	15.99		150.0	
		Z	2.26	71.74	16.89		150.0	
10157- CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	24.89	104.83	28.36	0.00	150.0	± 9.6 %
		Y	9.38	88.72	22.53		150.0	
		Z	14.41	95.39	24.55		150.0	
10158- CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	Х	3.29	69.77	17.09	0.00	150.0	± 9.6 %
		Y	3.08	69.52	16.65		150.0	
		Z	3.09	70.20	17.18		150.0	
10159- CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.76	69.39	16.02	0.00	150.0	± 9.6 %
		Y	2.52	68.96	15.11		150.0	
		Z	2.56	69.83	15.62		150.0	
10160- CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	1332.26	164.87	41.83	0.00	150.0	± 9.6 %
		Y	739.45	156.14	40.09		150.0	
10161-	LTE-FDD (SC-FDMA, 50% RB, 15 MHz,	X	888.72 3.52	158.74 69.46	40.54 16.95	0.00	150.0 150.0	± 9.6 %
CAE	16-QAM)	Y	3.33	69.21	16.61		150.0	
		Z	3.33	69.67	17.03	-	150.0	
10162-	LTE-FDD (SC-FDMA, 50% RB, 15 MHz,	X	3.61	69.40	16.97	0.00	150.0	± 9.6 %
CAE	64-QAM)	^	3.43	69.24	16.67	0.00	150.0	10.00
		Z	3.43	69.70	17.09		150.0	
10166- CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.93	74.27	21.98	3.01	150.0	± 9.6 %
CAL	Grony	Y	4.44	73.42	21.23		150.0	
		Z	4.75	74.82	21.25		150.0	
10167-	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz,	X	6.52	77.81	22.61	3.01	150.0	± 9.6 %
CAF	16-QAM)	^	5.74	76.87	21.82	0.01	150.0	2 0.0 %
		Z	6.40	78.65	22.57		150.0	
			0.40	16.03	22.07		100.0	

Certificate No: ER3-2480\_Dec18 Page 16 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 69 of 101

ER3DV6 - SN:2480 December 10, 2018

10168- CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	6.76	78.59	23.14	3.01	150.0	± 9.6 %
	1	Y	6.01	77.93	22.50		150.0	
		Z	6.79	80.06	23.42		150.0	
10169- CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.48	79.72	24.24	3.01	150.0	± 9.6 %
		Y	4.28	76.12	22.50		150.0	
		Z	4.82	77.75	23.20		150.0	
10170- CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	Х	7.91	85.28	25.72	3.01	150.0	± 9.6 %
		Y	6.01	81.78	24.23		150.0	
		Z	7.01	83.57	24.91		150.0	
10171- AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	Х	7.05	82.42	23.89	3.01	150.0	± 9.6 %
		Y	5.32	78.87	22.26		150.0	
		Z	6.10	80.19	22.77		150.0	
10172- CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	38.29	115.29	35.95	6.02	65.0	± 9.6 %
		Y	100.00	138.93	42.21		65.0	
		Z	36.22	114.04	35.25		65.0	
10173- CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	Х	22.54	99.62	29.56	6.02	65.0	± 9.6 %
		Υ	47.85	116.92	34.40		65.0	
		Z	23.62	100.80	29.72		65.0	
10174- CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	Х	21.42	97.66	28.58	6.02	65.0	± 9.6 %
		Y	38.12	111.05	32.26		65.0	
		Z	21.97	98.40	28.54		65.0	
10175- CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	7.68	87.17	27.29	3.01	150.0	± 9.6 %
		Y	5.51	81.56	24.83		150.0	
		Z	6.53	84.19	25.82		150.0	
10176- CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	7.88	85.19	25.69	3.01	150.0	± 9.6 %
		Y	6.00	81.73	24.21		150.0	
		Z	7.00	83.51	24.89		150.0	
10177- CAI	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	5.45	79.50	24.08	3.01	150.0	± 9.6 %
		Y	4.27	75.95	22.35		150.0	
		Z	4.80	77.54	23.04		150.0	
10178- CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	7.79	84.95	25.58	3.01	150.0	± 9.6 %
		Y	5.94	81.51	24.11		150.0	
		Z	6.92	83.29	24.79		150.0	
10179- CAG	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	×	7.37	83.50	24.58	3.01	150.0	± 9.6 %
		Y	5.62	80.13	23.07		150.0	
		Z	6.50	81.68	23.67		150.0	
10180- CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	X	7.03	82.34	23.84	3.01	150.0	± 9.6 %
		Y	5.32	78.83	22.23		150.0	
		Z	6.09	80.13	22.73		150.0	
10181- CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	5.45	79.51	24.09	3.01	150.0	± 9.6 %
		Y	4.27	75.97	22.36		150.0	
		Z	4.80	77.56	23.05		150.0	
10182- CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	×	7.77	84.93	25.57	3.01	150.0	± 9.6 %
		Y	5.93	81.48	24.10		150.0	
		Z	6.91	83.26	24.77		150.0	
10183- AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	×	7.02	82.32	23.84	3.01	150.0	± 9.6 %
		Y	5.31	78.80	22.22		150.0	
		Z	6.08	80.10	22.72		150.0	

Page 17 of 38 Certificate No: ER3-2480\_Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 70 of 101

December 10, 2018 ER3DV6 - SN:2480

10184- CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	5.46	79.52	24.09	3.01	150.0	± 9.6 %
		Y	4.28	75.97	22.36		150.0	
		ż	4.81	77.56	23.05		150.0	
10185- CAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	Х	7.81	84.99	25.60	3.01	150.0	±9.6%
		Y	5.96	81,55	24.13		150.0	
		Z	6.94	83.33	24.81		150.0	
10186- AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	X	7.05	82.38	23.86	3.01	150.0	± 9.6 %
		Y	5.34	78.88	22.25		150.0	
		Z	6.11	80.17	22.75		150.0	
10187- CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	Х	6.04	81.80	25.12	3.01	150.0	± 9.6 %
		Y	4.63	77.72	23.20		150.0	
		Z	5.27	79.60	23.98		150.0	
10188- CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	Х	7.98	85.46	25.84	3.01	150.0	± 9.6 %
		Y	6.09	82.02	24.39		150.0	
		Z	7.11	83.85	25.08		150.0	
10189- AAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	Х	7.16	82.70	24.05	3.01	150.0	± 9.6 %
		Υ	5.41	79.18	22.44		150.0	
		Z	6.21	80.51	22.96		150.0	
10193- CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	Х	5.27	69.00	17.64	0.00	150.0	± 9.6 %
		Y	5.09	68.90	17.40		150.0	
		Z	5.05	69.00	17.55		150.0	
10194- CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	5.52	69.44	17.75	0.00	150.0	± 9.6 %
0110	10 00 019	Y	5.32	69.32	17.55		150.0	
		ż	5.27	69.43	17.72		150.0	
10195- CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	5.55	69.38	17.72	0.00	150.0	± 9.6 %
41.10		Υ	5.35	69.32	17.55		150.0	
		Ż	5.31	69.43	17.72		150.0	
10196- CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	Х	5.31	69.17	17.70	0.00	150.0	± 9.6 %
		Y	5.12	69.05	17.46		150.0	
		Z	5.08	69.15	17.61		150.0	
10197- CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16- QAM)	Х	5.53	69.42	17.74	0.00	150.0	± 9.6 %
		Y	5.33	69.34	17.56		150.0	
		Z	5.29	69.44	17.73		150.0	
10198- CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64- QAM)	Х	5.56	69.41	17.74	0.00	150.0	± 9.6 %
	·	Y	5.36	69.34	17.57		150.0	
		Z	5.32	69.46	17.74		150.0	
10219- CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	5.26	69.19	17.66	0.00	150.0	± 9.6 %
		Y	5.07	69.06	17.41		150.0	
		Z	5.03	69.17	17.57		150.0	
10220- CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16- QAM)	×	5.54	69.47	17.77	0.00	150.0	± 9.6 %
		Y	5.34	69.37	17.59		150.0	
		Z	5.30	69.47	17.75		150.0	
10221- CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64- QAM)	Х	5.57	69.40	17.77	0.00	150.0	± 9.6 %
		Y	5.37	69.30	17.58		150.0	
		Z	5.33	69.40	17.74		150.0	
10222- CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	Х	5.48	67.96	16.83	0.00	150.0	± 9.6 %
					1000			
		Y	5.29	67.71	16.61		150.0	

Page 18 of 38 Certificate No: ER3-2480 Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 71 of 101

December 10, 2018 ER3DV6 - SN:2480

10223- CAC	IEEE 802.11n (HT Mixed, 90 Mbps, 16- QAM)	Х	5.89	68.34	17.06	0.00	150.0	± 9.6 %
0,10	GD-0H)	Y	5.73	68.34	16.98		150.0	
		ż	5.65	68.25	17.06		150.0	
0224- CAC	IEEE 802.11n (HT Mixed, 150 Mbps, 64- QAM)	X	5.54	68.06	16.79	0.00	150.0	± 9.6 %
2	a. ony	Y	5.32	67.75	16.55		150.0	
		Z	5.32	67.92	16.78		150.0	
10225- CAB	UMTS-FDD (HSPA+)	X	3.36	68.28	16.76	0.00	150.0	± 9.6 %
U1 10		Y	3.19	68.09	16.30		150.0	
		Z	3.17	68.44	16.60		150.0	
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	22.79	99.88	29.71	6.02	65.0	± 9.6 %
		Y	49.39	117.66	34.68		65.0	
		Z	24.02	101.20	29.90		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	19.82	96.19	28.13	6.02	65.0	± 9.6 %
		Y	33.96	108.95	31.70		65.0	
		Z	20.96	97.58	28.33		65.0	
10228- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	×	32.10	112.05	35.09	6.02	65.0	± 9.6 %
	,	Y	100.00	139.36	42.37		65.0	
		Z	36.68	114.90	35.60		65.0	
10229- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	х	22.39	99.46	29.52	6.02	65.0	±9.6%
W 10		Y	47.06	116.59	34.32		65.0	
		Z	23.49	100.68	29.69		65.0	
10230- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	Х	19.53	95.88	27.98	6.02	65.0	± 9.6 %
0.10		Y	32.88	108.28	31.45		65.0	
		Z	20.62	97.24	28.18		65.0	
10231- CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	31.38	111.50	34.87	6.02	65.0	± 9.6 %
Gryo	40 011	Y	100.00	139.26	42.29		65.0	
		Z	35.49	114.13	35.33		65.0	
10232- CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	22.41	99.49	29.52	6.02	65.0	± 9.6 %
0.1		Y	47.15	116.64	34.33		65.0	
		Z	23.51	100.71	29.69		65.0	
10233- CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	X	19.56	95.92	28.00	6.02	65.0	±9.6 %
20.0		Y	33.01	108.36	31.48		65.0	
		Z	20.64	97.27	28.19		65.0	
10234- CAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	×	30.64	110.87	34.60	6.02	65.0	± 9.6 %
		Y	100.00	139.03	42.14		65.0	
		Z	34.35	113.29	35.00		65.0	
10235- CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	22.54	99.62	29.57	6.02	65.0	±9.6 %
		Y	47.83	116.92	34.41		65.0	
		Z	23.62	100.81	29.73		65.0	
10236- CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	×	19.68	96.00	28.02	6.02	65.0	± 9.6 %
	,	Y	33.37	108.52	31.51		65.0	
		Z	20.75	97.34	28.20		65.0	
10237- CAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	31.93	111.88	34.98	6.02	65.0	± 9.6 %
		Y	100.00	139.23	42.27		65.0	
		Z	36.13	114.52	35.44		65.0	
10238- CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	22.44	99.52	29.53	6.02	65.0	± 9.6 %
	20 000				34.36		65.0	
		Y	47.39	116.74	34.36		65.0	

Page 19 of 38 Certificate No: ER3-2480\_Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 72 of 101

ER3DV6 -	- SN:2480	December 10, 2018
----------	-----------	-------------------

10239- CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	19.60	95.98	28.02	6.02	65.0	± 9.6 %
		Y	33.21	108.49	31.52		65.0	
		ż	20.69	97.32	28.20		65.0	
10240- CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	31.66	111.72	34.93	6.02	65.0	± 9.6 %
		Υ	100.00	139.27	42.29		65.0	
		Z	35.83	114.36	35.39		65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	18.12	96.14	32.07	6.98	65.0	±9.6%
		Y	17.99	98.31	32.51		65.0	
		Z	17.45	94.73	30.71		65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	13.73	89.03	29.15	6.98	65.0	±9.6 %
		Y	14.16	92.42	30.21		65.0	
		Z	13.21	88.07	28.03		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	12.01	88.63	30.07	6.98	65.0	±9.6 %
		Υ	11.96	91.26	30.98		65.0	
		Z	12.55	89.47	29.64		65.0	
10244- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	12.01	85.46	24.05	3.98	65.0	± 9.6 %
		Y	10.91	84.65	22.64		65.0	
		Z	10.71	82.50	21.81		65.0	
10245- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	Х	11.94	85.12	23.89	3.98	65.0	± 9.6 %
		Y	10.81	84.25	22.46		65.0	
		Z	10.70	82.27	21.68		65.0	
10246- CAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	Х	10.01	84.28	22.85	3.98	65.0	± 9.6 %
		Y	10.44	86.31	22.80		65.0	
		Z	9.22	82.59	21.54		65.0	
10247- CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	9.85	82.42	22.94	3.98	65.0	± 9.6 %
		Y	9.44	83.02	22.48		65.0	
		Z	9.06	80.60	21.49		65.0	
10248- CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	9.97	82.21	22.89	3.98	65.0	± 9.6 %
		Y	9.55	82.80	22.43		65.0	
		Z	9.21	80.50	21.46		65.0	
10249- CAF	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	10.28	84.66	23.42	3.98	65.0	± 9.6 %
		Y	11.56	88.46	24.30		65.0	
		Z	9.98	84.21	22.85		65.0	
10250- CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	10.45	83.57	24.40	3.98	65.0	± 9.6 %
		Y	10.65	85.78	25.00		65.0	
		Z	10.05	82.84	23.76		65.0	
10251- CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	Х	10.24	82.22	23.74	3.98	65.0	± 9.6 %
		Y	10.19	83.86	24.06		65.0	
		Z	9.85	81.51	23.02		65.0	
10252- CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	Х	10.23	83.81	23.58	3.98	65.0	± 9.6 %
		Y	11.51	88.07	25.00		65.0	
		Z	10.33	84.41	23.70		65.0	
10253- CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	10.26	81.76	23.83	3.98	65.0	± 9.6 %
		Y	10.10	83.19	24.23		65.0	
		Z	9.86	81.01	23.23		65.0	
10254- CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	10.53	82.18	24.29	3.98	65.0	± 9.6 %
		Y	10.44	83.77	24.76		65.0	

Certificate No: ER3-2480\_Dec18 Page 20 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 101

December 10, 2018 ER3DV6 - SN:2480

10255- CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	Х	10.00	82.17	23.24	3.98	65.0	± 9.6 %
		Y	10.48	85.02	24.27		65.0	
		Ż	9.98	82.47	23.31		65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	11.55	84.54	23.07	3.98	65.0	± 9.6 %
		Y	9.78	82.29	20.87		65.0	
		Z	9.81	80.56	20.26		65.0	
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	Х	11.65	84.34	22.95	3.98	65.0	± 9.6 %
		Y	9.77	81.91	20.66		65.0	
		Z	9.84	80.31	20.09		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	Х	9.87	83.92	22.30	3.98	65.0	± 9.6 %
		Y	9.21	83.70	21.18		65.0	
		Z	8.40	80.57	20.14		65.0	
10259- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	Х	10.06	82.71	23.41	3.98	65.0	± 9.6 %
		Y	9.93	84.02	23.38		65.0	
		Z	9.49	81.47	22.32		65.0	
10260- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	Х	10.17	82.67	23.44	3.98	65.0	±9.6 %
		Y	9.96	83.82	23.34		65.0	
		Z	9.55	81.34	22.29		65.0	
10261- CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	Х	10.24	84.39	23.59	3.98	65.0	± 9.6 %
		Y	11.44	88.27	24.64		65.0	
		Z	10:04	84.20	23.20		65.0	
10262- CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	10.46	83.57	24.38	3.98	65.0	± 9.6 %
		Y	10.66	85.77	24.98		65.0	
		Z	10.05	82.83	23.73		65.0	
10263- CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	10.26	82.27	23.76	3.98	65.0	±9.6%
		Y	10.21	83.91	24.08		65.0	
		Z	9.86	81.53	23.03		65.0	
10264- CAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	Х	10.22	83.78	23.56	3.98	65.0	±9.6%
		Y	11.49	88.01	24.96		65.0	
		Z	10.32	84.36	23.67		65.0	
10265- CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	Х	10.43	82.03	23.81	3.98	65.0	± 9.6 %
01.0		Y	10.41	83.79	24.39		65.0	
		Z	10.06	81.47	23.38		65.0	
10266- CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAW)	Х	10.66	82.40	24.29	3.98	65.0	± 9.6 %
		Y	10.67	84.24	24.92		65.0	
		Z	10.33	81.93	23.89		65.0	
10267- CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz. QPSK)	×	9.93	81.63	22.71	3.98	65.0	± 9.6 %
		Y	10.42	84.47	23.76		65.0	
		Z	10.00	82.21	22.97		65.0	
10268- CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	×	10.71	81.23	23.88	3.98	65.0	± 9.6 %
		Y	10.58	82.69	24.45		65.0	
		Z	10.44	80.89	23.62		65.0	
10269- CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	Х	10.66	81.05	23.94	3.98	65.0	± 9.6 %
		Y	10.47	82.34	24.43		65.0	
		Z	10.39	80.61	23.60		65.0	
10270- CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	9.96	80.32	22.46	3.98	65.0	± 9.6 %
2.0		Y	9.99	82.13	23.17		65.0	
		Z	0.00	80.60	22.61		65.0	

Certificate No: ER3-2480\_Dec18 Page 21 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 74 of 101

ER3DV6 -	- SN:2480	December 10, 2018
----------	-----------	-------------------

10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	Х	2.95	67.90	16.20	0.00	150.0	± 9.6 %
		Y	2.85	67.86	15.83		150.0	
		Z	2.87	68.35	16.23		150.0	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	Х	1.97	69.97	16.34	0.00	150.0	± 9.6 %
		Y	1.83	69.30	15.70		150.0	
		Z	1.91	70.67	16.73		150.0	
10277- CAA	PHS (QPSK)	Х	7.97	75.75	17.09	9.03	50.0	± 9.6 %
		Y	5.81	71.64	13.18		50.0	
		Z	7.91	74.86	16.46		50.0	
10278- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	Х	11.76	85.36	23.27	9.03	50.0	± 9.6 %
		Υ	10.97	84.81	21.41		50.0	
		Z	10.13	81.28	21.20	- 1	50.0	
10279- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	12.03	85.65	23.39	9.03	50.0	± 9.6 %
		Υ	11.30	85.22	21.60		50.0	
		Z	10.31	81.53	21.31		50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	Х	1.86	69.97	15.29	0.00	150.0	±9.6 %
		Υ	1.63	69.02	13.86		150.0	
		Z	1.74	70.88	14.83		150.0	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	1.21	68.90	14.47	0.00	150.0	± 9.6 %
		Υ	1.01	67.16	12.60		150.0	
		Z	1.07	69.02	13.73		150.0	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	×	1.28	70.46	15.53	0.00	150.0	± 9.6 %
		Υ	1.06	68.51	13.58		150.0	
		Z	1.21	71.63	15.35		150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	Х	1.41	71.96	16.64	0.00	150.0	± 9.6 %
		Y	1.19	70.03	14.75		150.0	
		Z	1.47	74.63	17.18		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	Х	100.00	131.68	39.67	9.03	50.0	± 9.6 %
		Υ	1222.05	173.65	46.68		50.0	
		Z	100.00	126.71	36.81		50.0	
10297- AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	3.29	71.30	17.02	0.00	150.0	±9.6 %
		Y	3.08	70.92	16.77		150.0	
		Z	3.14	71.82	17.50		150.0	
10298- AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	Х	2.17	70.28	15.98	0.00	150.0	± 9.6 %
		Y	1.88	69.15	14.61		150.0	
1000	177 500 100 5041	Z	1.93	70.49	15.36		150.0	
10299- AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.08	74.88	18.56	0.00	150.0	± 9.6 %
		Y	3.31	72.44	16.28		150.0	
40000	LES PRO COC PRAIA PAR MR	Z	3.83	74.60	17.20	0.05	150.0	1000
10300- AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	3.82	72.98	17.13	0.00	150.0	± 9.6 %
		Y	3.03	70.32	14.65		150.0	
10001	HEEE BOO AS AND MANAGE S	Z	3.32	71.52	15.11	4.47	150.0	1000
10301- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	6.00	68.65	19.39	4.17	80.0	± 9.6 %
		Y	5.58	68.27	19.00		80.0	
10000	IEEE DOD 40 - MONACH CO. CO. CO.	Z	5.87	68.95	19.09	4.00	80.0	
10302- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	Х	6.92	71.05	21.19	4.96	80.0	± 9.6 %
		Y	6.27	69.80	20.29		80.0	
		Z	6.97	72.03	21.21		80.0	

Certificate No: ER3-2480\_Dec18 Page 22 of 38



Page: 75 of 101

ER3DV6 - S	201/2490	December 10, 2018
EM3DV9 = 9	3N.Z90U	December 10, 2016

10303- AAA	IEEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	6.76	71.13	21.26	4.96	80.0	± 9.6 %
		Y	6.06	69.70	20.27		80.0	
		Z	6.85	72.24	21.31		80.0	
10304- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	Х	6.35	70.24	20.28	4.17	80.0	± 9.6 %
		Y	5.76	69.08	19.43		80.0	
		Z	6.39	71.20	20.32		80.0	
10305- AAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	8.32	80.67	26.77	6.02	50.0	± 9.6 %
		Υ	6.16	74.53	23.38		50.0	
		Z	7.63	77.27	23.68		50.0	
10306- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	Х	7.68	76.79	25.21	6.02	50.0	± 9.6 %
		Y	6.21	72.54	22.62		50.0	
		Z	7.32	75.01	23.11		50.0	
10307- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	Х	7.74	77.37	25.22	6.02	50.0	± 9.6 %
		Y	6.17	72.91	22.61		50.0	
		Z	7.35	75.40	23.06		50.0	
10308- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	Х	7.79	77.79	25.42	6.02	50.0	±9.6%
		Y	6.14	73.09	22.71		50.0	
		Z	7.35	75.64	23.16		50.0	
10309- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	7.77	76.92	25.26	6.02	50.0	± 9.6 %
		Y	6.32	72.90	22.81		50.0	
		Z	7.45	75.37	23.30		50.0	
10310- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	Х	7.65	76.90	25.14	6.02	50.0	± 9.6 %
		Y	6.15	72.56	22.53		50.0	
		Z	7.29	75.06	23.02		50.0	
10311- AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	Х	3.59	70.27	16.54	0.00	150.0	± 9.6 %
		Y	3.40	69.87	16.30		150.0	
		Z	3.45	70.61	16.93		150.0	
10313- AAA	IDEN 1:3	Х	8.99	81.34	19.72	6.99	70.0	± 9.6 %
		Y	9.44	83.19	19.65		70.0	
		Z	9.00	81.11	19.79		70.0	
10314- AAA	IDEN 1:6	Х	12.12	88.36	24.57	10.00	30.0	± 9.6 %
		Υ	20.11	99.11	27.41		30.0	
		Z	11.41	86.73	24.08		30.0	
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.34	67.32	16.81	0.17	150.0	±9.6%
		Υ	1.27	66.66	16.20		150.0	
		Z	1.34	67.85	17.25		150.0	
10316- AAB	IEEE 802.11g WiFl 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	5.41	69.36	17.93	0.17	150.0	± 9.6 %
		Y	5.21	69.23	17.71		150.0	
		Z	5.23	69.47	17.92		150.0	
10317- AAC	IEEE 802.11a WIFI 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	Х	5.41	69.36	17.93	0.17	150.0	± 9.6 %
		Y	5.21	69.23	17.71		150.0	
		Z	5.23	69.47	17.92		150.0	
10400- AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	Х	5.12	67.60	16.61	0.00	150.0	± 9.6 %
		Y	4.90	67.46	16.42		150.0	
		Z	4.87	67.63	16.64		150.0	
10401- AAD	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.75	67.82	16.80	0.00	150.0	±9.6 %
	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Y	5.64	67.90	16.76		150.0	
			5.67					

Certificate No: ER3-2480\_Dec18 Page 23 of 38



Page: 76 of 101

December 10, 2018 ER3DV6 - SN:2480

10402-	IEEE 802.11ac WiFi (80MHz, 64-QAM,	X	6.07	68.35	16.87	0.00	150.0	± 9.6 %
AAD	99pc duty cycle)		E 07	00.00	40.00		450.0	
		Y	5.87	68.09	16.89		150.0 150.0	
10403-	CDMA2000 (1xEV-DO, Rev. 0)	Z	5.87	68.26 69.97	15.29	0.00	115.0	± 9.6 %
AAB	CDMA2000 (1xEV-DO, Rev. 0)		1100	00.01	10.20	0.00		1 8.0 %
		Y	1.63	69.02	13.86		115.0	
		Z	1.74	70.88	14.83		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	Х	1.86	69.97	15.29	0.00	115.0	±9.6 %
		Υ	1.63	69.02	13.86		115.0	
		Z	1.74	70.88	14.83		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	Х	8.65	89.41	24.11	0.00	100.0	± 9.6 %
		Y	6.51	85.54	21.84		100.0	
		Z	9.62	90.16	23.59		100.0	
10410- AAF	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4)	Х	26.51	103.00	27.53	3.23	80.0	± 9.6 %
		Y	89.12	121.57	31.25		80.0	
		Z	45.84	111.39	29.35		80.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	Х	1.13	65.12	15.61	0.00	150.0	± 9.6 %
		Y	1.10	64.81	15.13		150.0	
		Z	1.11	65.43	15.97		150.0	
10416- AAA	IEEE 802.11g WIFI 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	Х	5.26	68.98	17.64	0.00	150.0	± 9.6 %
		Y	5.09	68.95	17.46		150.0	
		Z	5.06	69.07	17.63		150.0	
10417- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	Х	5.26	68.98	17.64	0.00	150.0	± 9.6 %
		Υ	5.09	68.95	17.46		150.0	
		Z	5.06	69.07	17.63		150.0	
10418- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	X	5.22	69.00	17.55	0.00	150.0	±9.6 %
		Y	5.06	69.00	17.40		150.0	
		Z	5.03	69.14	17.58		150.0	
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short presmbule)	X	5.26	69.02	17.60	0.00	150.0	± 9.6 %
	,	Y	5.10	69.00	17.44		150.0	
		Z	5.06	69.13	17.62		150.0	
10422- AAB	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	Х	5.42	69.11	17.68	0.00	150.0	± 9.6 %
		Y	5.24	69.08	17.51		150.0	
		Z	5.21	69.19	17.67		150.0	
10423- AAB	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	5.71	69.65	17.89	0.00	150.0	± 9.6 %
		Y	5.48	69.56	17.70		150.0	
		Z	5.44	69.66	17.86		150.0	
10424- AAB	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	5.59	69.54	17.82	0.00	150.0	± 9.6 %
		Y	5.38	69.44	17.63		150.0	
		Z	5.33	69.55	17.79		150.0	
10425- AAB	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	×	5.84	68.43	17.09	0.00	150.0	± 9.6 %
		Y	5.64	68.22	16.89		150.0	
		Z	5.64	68.42	17.13		150.0	
10426- AAB	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.85	68.43	17.08	0.00	150.0	± 9.6 %
		Y	5.66	68.28	16.92		150.0	
		Z	5.67	68.52	17.17		150.0	

Page 24 of 38 Certificate No: ER3-2480\_Dec18



Page: 77 of 101

December 10, 2018 ER3DV6 - SN:2480

10427- AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	Х	5.84	68.32	17.01	0.00	150.0	± 9.6 %
		Y	5.63	68.12	16.83		150.0	
			5.64	68.34	17.08		150.0	
10430- AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.72	70.82	18.45	0.00	150.0	± 9.6 %
		Y	4.45	70.87	18.09		150.0	
		Z	4.46	71.51	18.53		150.0	
10431- AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	5.07	69.65	17.73	0.00	150.0	± 9.6 %
		Y	4.82	69.53	17.43		150.0	
		Z	4.78	69.71	17.62		150.0	
10432- AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	5.37	69.60	17.79	0.00	150.0	± 9.6 %
		Y	5.14	69.47	17.55		150.0	
		Z	5.09	69.60	17.73		150.0	
10433- AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	5.62	69.64	17.87	0.00	150.0	± 9.6 %
		Y	5.40	69.49	17.66		150.0	
		Z	5.35	69.59	17.82		150.0	
10434- AAA	W-CDMA (BS Test Model 1, 64 DPCH)	Х	4.73	71.02	18.22	0.00	150.0	±9.6%
		Y	4.44	71.11	17.79		150.0	
		Z	4.46	71.86	18.25		150.0	
10435- AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	25.87	102.51	27.36	3.23	80.0	± 9.6 %
		Y	84.95	120.71	31.01		0.08	
		Z	43.52	110.48	29.08		80.0	
10447- AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	4.34	69.51	17.18	0.00	150.0	± 9.6 %
		Y	4.08	69.33	16.64		150.0	
		Ż	4.02	69.64	16.85		150.0	
10448- AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	X	4.82	69.27	17.50	0.00	150.0	± 9.6 %
	1.	Y	4.61	69.20	17.22		150.0	
		Z	4.57	69.40	17.43		150.0	
10449- AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	Х	5.07	69.22	17.56	0.00	150.0	± 9.6 %
		Y	4.88	69.15	17.35		150.0	
		Z	4.85	69.30	17,55		150.0	
10450- AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	Х	5.24	69.16	17.59	0.00	150.0	± 9.6 %
		Y	5.07	69.07	17.40		150.0	
		Z	5.04	69.19	17.58		150.0	
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	Х	4.27	69.65	16.87	0.00	150.0	±9.6%
		Y	3.97	69.47	16.24		150.0	
		Z	3.94	69.83	16.45		150.0	
10456- AAB	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	×	11.65	82.40	24.30	0.00	150.0	±9.69
		Y	16.99	91.05	27.75		150.0	
		Z	20.13	94.59	29.01		150.0	
10457- AAA	UMTS-FDD (DC-HSDPA)	×	4.28	67.64	17.43	0.00	150.0	± 9.6 %
		Υ	4.19	67.50	17.16		150.0	
		Z	4.17	67.57	17.32		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	Х	4.14	69.34	17.39	0.00	150.0	±9.6 %
		Y	3.99	69.96	17.06		150.0	
		Z	4.02	70.77	17.51		150.0	
40.450	CDMA2000 (1xEV-DO, Rev. B, 3	X	5.13	66.36	17.40	0.00	150.0	± 9.6 5
10459- AAA	carriers)							
	carriers)	Y	4.94	66.97	17.37		150.0	

Certificate No: ER3-2480\_Dec18

Page 25 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 78 of 101

December 10, 2018 ER3DV6 - SN:2480

10460- AAA	UMTS-FDD (WCDMA, AMR)	Х	1.13	70.75	16.71	0.00	150.0	± 9.6 %
		Y	1.02	69.38	15.62		150.0	
		Z	1.15	72.52	17.80		150.0	
10461- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	Х	100.00	125.02	33.54	3.29	80.0	± 9.6 %
	a are as a contains and in total	Y	100.00	125.08	32.59		80.0	
		Z	100.00	124.38	32.85		80.0	
10462- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	18.99	92.52	22.81	3.23	80.0	± 9.6 %
		Y	13.33	88.03	20.20		80.0	
		Z	19.07	92.39	22.30		80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	×	13.83	87.13	20.77	3.23	80.0	± 9.6 %
		Y	8.50	81.35	17.60		0.08	
		Z	12.97	86.22	19.98		80.0	
10464- AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	123.67	32.76	3.23	80.0	± 9.6 %
		Y	100.00	123.21	31.56		80.0	
		Z	100.00	122.88	32.00		80.0	
10465- AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	17.45	91.24	22.36	3.23	80.0	±9.6 %
		Y	11.69	86.28	19.59		80.0	
		Z	16.81	90.58	21.70		80.0	
10466- AAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	12.88	86.07	20.38	3.23	80.0	± 9.6 %
		Y	7.75	80.14	17.14		80.0	
		Z	11.73	84.81	19.48		80.0	
10467- AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	123.77	32.81	3.23	80.0	±9.6 %
		Y	100.00	123.35	31.62		80.0	
		ż	100.00	123.00	32.06		80.0	
10468- AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2.3.4.7.8.9)	X	17.82	91.58	22.48	3.23	80.0	±9.6 %
		Y	12.10	86.76	19.76		80.0	
		ż	17.38	91.09	21.87		80.0	
10469- AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	х	12.98	86.17	20.41	3.23	80.0	±9.6 %
		Υ	7.78	80.20	17.16		80.0	
		Ż	11.84	84.94	19.52		80.0	
10470- AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	Х	100.00	123.78	32.80	3.23	80.0	± 9.6 %
	an or of our opplication model to be to	Y	100.00	123.36	31.62		80.0	
		Z	100.00	123.00	32.06		80.0	
10471- AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	17.91	91.63	22.49	3.23	0.08	±9.6 %
		Y	12.12	86.76	19.75		0.08	
		Z	17,44	91.11	21.87		0.08	
10472- AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	13.01	86.20	20.41	3.23	80.0	± 9.6 %
		Y	7.77	80.17	17.14		80.0	
		Z	11.85	84.93	19.51		80.0	
10473- AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	123.76	32.80	3.23	80.0	± 9.6 %
		Y	100.00	123.33	31,61		80.0	
		Z	100.00	122.99	32.05		80.0	
10474- AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	17.80	91.57	22.47	3.23	80.0	± 9.6 %
		Y	12.03	86.69	19.73		80.0	
		Z	17.33	91.05	21.85		80.0	
10475- AAE	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	12.96	86.16	20.40	3.23	80.0	± 9.6 %
		V	7.74	80.14	17.13		80.0	

Certificate No: ER3-2480\_Dec18 Page 26 of 38



Page: 79 of 101

December 10, 2018 ER3DV6 - SN:2480

10477- AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	17.66	91.40	22.39	3.23	80.0	± 9.6 %
		Y	11.80	86.38	19.61		80.0	
		Z	17.02	90.74	21.73		80.0	
10478- AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	12.95	86.13	20.39	3.23	0.08	± 9.6 %
		Y	7.71	80.08	17.10		80.0	
		Z	11.76	84.83	19.47		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	9.86	88.16	25.22	3.23	80.0	± 9.6 %
		Y	9.29	88.40	24.40		80.0	
		Z	13.16	92.75	25.78		80.0	
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	×	9.65	83.44	22.28	3.23	80.0	± 9.6 %
		Y	8.35	82.18	20.74		80.0	
		Z	10.48	84.35	21.56		80.0	
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	9.41	82.52	21.71	3.23	80.0	± 9.6 %
		Y	7.77	80.55	19.86		80.0	
		Z	9.64	82.52	20.63		80.0	
10482- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.98	78.69	20.03	2.23	80.0	± 9.6 %
		Y	5.22	77.89	18.99		80.0	
		Z	6.05	79.12	19.51		80.0	
10483- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	×	7.71	80.19	21.28	2.23	80.0	± 9.6 %
		Y	6.40	78.08	19.36		80.0	
		Z	7.63	79.68	19.93		80.0	
10484- AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	×	7.74	80.02	21.23	2.23	80.0	± 9.6 %
		Y	6.38	77.78	19.26		80.0	
		Z	7.49	79.18	19.75		80.0	
10485- AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	×	6.53	80.04	21.00	2.23	80.0	±9.6 %
		Y	6.02	80.30	20.68		0.08	
		Z	6.90	81.50	21.19		80.0	
10486- AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.66	75.24	19.19	2.23	80.0	±9.6 %
		Y	4.97	74.48	18.27		80.0	
		Z	5.54	75.31	18.59		80.0	
10487- AAE	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.74	75.13	19.18	2.23	80.0	± 9.6 %
		Y	5.01	74.27	18.20		80.0	
		Z	5.55	75.03	18.48		80.0	
10488- AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.63	78.86	20.90	2.23	80.0	±9.6 %
		Y	6.26	79.62	21.09		80.0	
		Z	6.97	80.53	21.54		80.0	
10489- AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.05	75.51	20.09	2.23	80.0	± 9.6 %
		Y	5.47	75.23	19.74		80.0	
		Z	5.99	75.91	20.02		80.0	
10490- AAE	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.13	75.22	20.04	2.23	80.0	±9.6%
		Y	5.56	74.98	19.69		80.0	
		Z	6.06	75.62	19.95		80.0	
10491- AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.45	76.71	20.24	2.23	80.0	± 9.6 %
		Y	6.03	77.13	20.38		80.0	
		Z	6.60	77.85	20.76		80.0	
10492- AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.33	74.63	20.02	2.23	80.0	± 9.6 %
		2.4	E 20	74.40	19.79		80.0	
		Y	5.78	74.40	10.70		80.0	

Certificate No: ER3-2480\_Dec18 Page 27 of 38



Page: 80 of 101

ER3DV6 - SN:2480 December 10, 2018

10493- AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.42	74.53	20.03	2.23	80.0	± 9.6 %
		Y	5.87	74.29	19.78		80.0	
		Z	6.30	74.77	19.99		80.0	
10494- AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.75	77.42	20.23	2.23	0.08	± 9.6 %
		Y	6.37	77.98	20.46		80.0	
		Z	6.95	78.69	20.88		80.0	
10495- AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.46	75.21	20.17	2.23	80.0	± 9.6 %
		Y	5.90	74.95	19.98		80.0	
10100		Z	6.34	75.42	20.21	0.00	80.0	+96%
10496- AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.52	74.88	20.13	2.23	80.0	± 9.6 %
		Y	5.97	74.64 75.09	19.94		80.0	
10497-	1 TE TOO (00 FOLIA 4000 DD 4 4	Z	6.39 5.21	76.88	18.88	2.23	80.0	±9.6%
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X		- 0.00		2.23		19.6%
		Y	4.00	73.99	16.71		80.0	
10.100	LIFE TOP ORGETONAL LODGE DE	Z	4.62	74.96 72.58	17.12	2.23	80.0	± 9.6 %
10496- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х			16.60	2.23	80.0	19.6%
		Y	3.47	69.39	13.99		80.0	
		Z	3.84	69.84	14.15		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.70	72.38	16.42	2.23	80.0	±9.6%
		Y	3.47	69.08	13.73		80.0	
		Z	3.82	69.47	13.86		80.0	
10500- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.47	79.26	20.90	2.23	80.0	± 9.6 %
		Y	6.00	79.71	20.77		80.0	
		Z	6.80	80.79	21.25		80.0	
10501- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	5.81	75.24	19.50	2.23	80.0	±9.6%
		Y	5.18	74.73	18.82		80.0	
		Z	5.73	75.51	19.12		80.0	
10502- AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.82	74.90	19.36	2.23	80.08	± 9.6 %
		Y	5.21	74.42	18.66		80.0	
		Z	5.74	75.19	18.96		80.0	
10503- AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.59	78.78	20.86	2.23	80.0	± 9.6 %
		Y	6.21	79.49	21.03		80.0	
1085		Z	6.91	80.40	21.48		80.0	
10504- AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.05	75.49	20.07	2.23	80.0	± 9.6 %
		Y	5.47	75.20	19.71		80.0	
1000		Z	5.98	75.86	19.99		0.08	
10505- AAE	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.12	75.18	20.01	2.23	80.0	± 9.6 %
		Y	5.54	74.93	19.66		80.0	
		Z	6.04	75.56	19.91		0.08	
10506- AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.73	77.36	20.20	2.23	80:0	± 9.6 %
		Y	6.34	77.90	20.42		80.0	
10000		Z	6.92	78.60	20.83		80.0	
10507- AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	6.45	75.17	20.15	2.23	80.0	± 9.6 %
		Y	5.89	74.91	19.96		80.0	
		7	6.33	75.38	20.19		80.0	

Certificate No: ER3-2480\_Dec18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 81 of 101

ER3DV6 - SN:2480 December 10, 2018

10508- AAE	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9i	Х	6.51	74.85	20.11	2.23	80.0	± 9.6 %
		Y	5.96	74.60	19.91		80.0	
		Z	6.38	75.05	20.12		80.0	
10509- AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.68	75.42	19.53	2.23	80.0	± 9.6 %
		Y	6.26	75.62	19.64		80.0	
		Z	6.74	76.18	20.00		80.0	
10510- AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.84	74.43	19.95	2.23	80.0	± 9.6 %
		Y	6.31	74.17	19.82		80.0	
		Z	6.69	74.52	20.00		80.0	
10511- AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.86	74.15	19.93	2.23	80.0	±9.6%
		Y	6.33	73.88	19.78		0.08	
		Z	6.71	74.22	19.95		80.0	
10512- AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.81	76.32	19.65	2.23	80.0	± 9.6 %
		Y	6.41	76.61	19.79		80.0	
		Z	6.92	77.20	20.19	0.00	80.0	- 0.0.01
10513- AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.82	74.99	20.10	2.23	80.0	±9.6%
		Y	6.25	74.66	19.96		80.0	
		Z	6.65	74.98	20.14		80.0	
10514- AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.76	74.54	20.05	2.23	80.0	± 9.6 %
		Y	6.21	74.19	19.88		80.0	
		Z	6.61	74.53	20.06		80.0	
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.09	65.39	15.67	0.00	150.0	±9.6%
		Y	1.06	65.03	15.16		150.0	
		Z	1.07	65.74	16.07		150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.89	74.74	17.70	0.00	150.0	± 9.6 %
		Y	0.74	71.63	15.78		150.0	
		Z	1.20	81.41 68.17	20.97	0.00	150.0	±9.6%
10517- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	Х	1.00	67.28	15.56	0.00	150.0	19.0 %
		Z	0.94	68.97	17,11		150.0	
10518- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	5.27	69.12	17.64	0.00	150.0	±9.6 %
POLD	maps, sope day eyere)	Y	5.09	69.04	17,44		150.0	
		Z	5.06	69.15	17.61		150.0	
10519- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	5.57	69.56	17.86	0.00	150.0	±9.6 %
		Y	5.36	69.47	17.66		150.0	
		Z	5.31	69.56	17.82		150.0	
10520- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	×	5.38	69.42	17.69	0.00	150.0	± 9.6 %
		Y	5.19	69.38	17.53		150.0	
10521-	IEEE 802.11a/h WIFI 5 GHz (OFDM, 24	Z X	5.15 5.29	69.50 69.37	17.71 17.64	0.00	150.0	± 9.6 %
AAB	Mbps, 99pc duty cycle)		6.10	00.00	48.10	_	455.5	-
		Y	5.10	69.33	17.48	_	150.0	
10500	ARREST AND ALL STATES OF COLUMN AND ADDRESS OF THE PARTY	Z	5.06	69.46	17.67	0.00	150.0	±9.6%
10522- AAB	IEEE 802.11a/h WIFI 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	5.34	69.29	17.69	0.00	150.0	19.0 %
			5.14				150.0	
		Z	5.11	69.44	17.70		150.0	

Certificate No: ER3-2480\_Dec18 Page 29 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 82 of 101

ER3DV6 =	= SN:2480	December 10, 2018

10523- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	5.20	69.24	17.53	0.00	150.0	± 9.6 %
		Y	5.00	69.13	17.33		150.0	
		Z	4.97	69.27	17.52		150.0	
10524- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	Х	5.28	69.27	17.66	0.00	150.0	±9.6 %
	and of order order of other	Y	5.10	69.27	17.51		150.0	
		Ż	5.06	69.42	17.70		150.0	
10525- AAB	IEEE 802.11ac WIFI (20MHz, MCS0, 99pc duty cycle)	X	5.22	68.26	17.22	0.00	150.0	± 9.6 %
7010	sope duty cycles	Y	5.05	68.20	17.04		150.0	
		Z	5.02	68.32	17.21		150.0	
10526- AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	5.48	68.73	17.38	0.00	150.0	± 9.6 %
	Days any agency	Y	5.28	68.66	17.21		150.0	
		Ż	5.24	68.79	17.39		150.0	
10527- AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	5.40	68.73	17.34	0.00	150.0	± 9.6 %
row	cope and almol	Y	5.19	68.61	17.14		150.0	
		ż	5.15	68.73	17.32		150.0	
10528-	IEEE 802.11ac WIFI (20MHz, MCS3,	X	5.42	68.75	17.37	0.00	150.0	±9.6%
10528- AAB	99pc duty cycle)	Ŷ	5.21	68.65	17.19	0.00	150.0	23.0 %
		Z	5.17	68.77	17.18		150.0	
10500	VEED OOD AA HAIT VOORAGE MOOR	X	5.42	68.75	17.37	0.00	150.0	± 9.6 %
10529- AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	, v	0.11			0.00		± 9.6 %
			5.21	68.65	17.19		150.0	
		Z	5.17	68.77	17.36		150.0	
10531- AAB	IEEE 802.11ac WIFI (20MHz, MCS6, 99pc duty cycle)	X	5.44	68.87	17.36	0.00	150.0	± 9.6 %
		Y	5.23	68.83	17.22		150.0	
		Z	5.20	68.97	17.41		150.0	
10532- AAB	IEEE 802.11ac WIFi (20MHz, MCS7, 99pc duty cycle)	Х	5.31	68.93	17.41	0.00	150.0	± 9.6 %
		Y	5.08	68.70	17.16		150.0	
		Z	5.03	68.80	17.34		150.0	
10533- AAB	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	Х	5.44	68.76	17.35	0.00	150.0	± 9.6 %
		Y	5.22	68.67	17.16		150.0	
		Z	5.18	68.80	17.34		150.0	
10534- AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	6.64	71.44	18.85	0.00	150.0	± 9.6 %
	oops oog opsio	Y	6.42	71.18	18.61		150.0	
		Z	6.43	71.37	18.80		150.0	
10535- AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	6.61	71.09	18.62	0.00	150.0	± 9.6 %
		Y	6.61	71.66	18.84		150.0	
		Z	6.72	72.16	19.17		150.0	
10536- AAB	IEEE 802.11ac WIFI (40MHz, MCS2, 99pc duty cycle)	X	6.50	71.26	18.69	0.00	150.0	± 9.6 %
		Y	6.31	71.11	18.50		150.0	
		Z	6.30	71.24	18.67		150.0	
10537- AAB	IEEE 802.11ac WIFI (40MHz, MCS3, 99pc duty cycle)	X	6.60	71.34	18.75	0.00	150.0	±9.6%
		Y	6.49	71.46	18.71		150.0	
		Z	6.58	71.92	19.04		150.0	
10538- AAB	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	6.62	70.97	18.58	0.00	150.0	± 9.6 %
		Y	6.32	70.53	18.26		150.0	
		Z	6.29	70.64	18.42		150.0	
10540-	IEEE 802.11ac WIFi (40MHz, MCS6,	X	6.83	72.10	19.21	0.00	150.0	± 9.6 %
10540- AAB	99pc duty cycle)	v	6.31	70.84	18.43		150.0	

Certificate No: ER3-2480\_Dec18



Page: 83 of 101

ER3DV6 - SN:2480	December 10, 2018
------------------	-------------------

10541- AAB	IEEE 802.11ac WiFi (40MHz, MCS7, 99ac duty cycle)	X	6.59	71.28	18.77	0.00	150.0	± 9.6 %
	and and alone	T Y	6.16	70.31	18.16		150.0	
		ż	6.18	70.55	18.39		150.0	
10542- AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	6.78	71.40	18.89	0.00	150.0	± 9.6 %
		Y	6.66	71.49	18.82		150.0	
		Z	6.75	71.93	19.14		150.0	
10543- AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	7.88	74.52	20.56	0.00	150.0	±9.6 %
		Y	6.50	70.62	18.38		150.0	
		Z	6.71	71.51	18.94		150.0	
10544- AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	×	6.36	69.53	17.73	0.00	150.0	± 9.6 %
		Y	6.29	69.67	17.74		150.0	
		Z	6.37	70.05	18.05		150.0	
10545- AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	×	7.71	73.40	19.73	0.00	150.0	± 9.6 %
	' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	Y	7.90	74.24	20.05		150.0	
		Z	8.29	75.37	20.66		150.0	
10546- AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	6.67	70.44	18.15	0.00	150.0	±9.6 %
		Y	6.53	70.36	18.05		150.0	
		Z	6.62	70.79	18.38		150.0	
10547- AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	7.45	72.67	19.36	0.00	150.0	± 9.6 %
		Y	6.95	71.53	18.67		150.0	
		Z	7.08	72.06	19.04		150.0	
10548- AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	×	65.69	118.79	36.36	0.00	150.0	± 9.6 %
		Y	48.81	111.94	34.00		150.0	
		Z	39.45	107.18	32.43		150.0	
10550- AAB	IEEE 802.11ac WIFI (80MHz, MCS6, 99pc duty cycle)	X	7.26	72.26	19.17	0.00	150.0	± 9.6 %
		Y	7.63	73.72	19.83		150.0	
		Z	8.18	75.31	20.68		150.0	
10551- AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	7.78	73.75	19.88	0.00	150.0	± 9.6 %
		Y	6.88	71.46	18.61		150.0	
		Z	6.84	71.46	18.71		150.0	
10552- AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	6.59	70.20	18.02	0.00	150.0	± 9.6 %
	out only of our	Y	6.86	71.57	18.71		150.0	
		Z	6.46	70.36	18.16		150.0	
10553- AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	6.47	69.49	17.66	0.00	150.0	± 9.6 %
		Y	6.40	69.72	17.73		150.0	
		Z	6.40	69.88	17.92		150.0	
10554- AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	Х	7.38	71.81	18.88	0.00	150.0	±9.6 %
	7 - 7 - 7	Y	7.30	71.84	18.82		150.0	
		Z	7.43	72.30	19.15		150.0	
10555- AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	8.61	75.00	20.47	0.00	150.0	± 9.6 %
		Y	8.40	74.70	20.24		150.0	
		Z	8.42	74.79	20.34		150.0	
10556- AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	8.04	73.44	19.68	0.00	150.0	± 9.6 %
		Y	8.19	74.10	19.93		150.0	
		Z	8.76	75.62	20.74		150.0	
10557- AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	Х	7.83	72.85	19.39	0.00	150.0	± 9.6 %
AAC		Y	7.45	72.05	18.89		150.0	
				71.97	18,94		150.0	

Certificate No: ER3-2480\_Dec18 Page 31 of 38



Page: 84 of 101

ER3DV6-	SN:2480	December 10, 2018

AAC 91 10560- IE AAC 91 10561- IE AAC 91 10562- AAC 92 10563- AAC 92 10564- AAA 0 10565- AAA 0 10566- AAA 0 10566- AAA 0 10566- AAA 0 10567- AAA 0 10568- AAA 0	EEE 802.11ac WiFi (160MHz, MCS4, 199c duty cycle)  EEE 802.11ac WiFi (160MHz, MCS6, 199c duty cycle)  EEE 802.11ac WiFi (160MHz, MCS7, 199c duty cycle)  EEE 802.11ac WiFi (160MHz, MCS8, 199c duty cycle)  EEE 802.11ac WiFi (160MHz, MCS8, 199c duty cycle)  EEE 802.11ac WiFi (160MHz, MCS9, 199c duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	X Y Z X Y Z X Y Z X Y Z X Y Z X Y Z X Y Z X Y Z X X Y Z X Y Z X X X X	7.29 8.86 8.22 7.45 7.60 7.89 7.51 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48 5.45 6.00	71.10 75.85 74.27 71.56 72.40 73.30 72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.86 73.56 69.43 69.33 69.43	18.41 20.83 20.11 18.76 19.15 19.69 19.08 18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.76	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 %  ±9.6 %  ±9.6 %  ±9.6 %  ±9.6 %
AAC 96  10561- IE AAC 96  10562- IE AAC 96  10563- IE AAAC 96  10564- IE AAA 0  10565- IE AAA 0  10566- IE AAA 0  10567- AAA 0  10568- AAA 0	Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS7, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS9, Higher dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc dutly cycle)	Z X Y Z X Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X X Y Y X X X Y Y X X X Y Y X X X X Y Y X X X X X Y Y X	8.22 7.45 7.60 7.89 7.51 7.27 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48	74.27 71.56 72.40 73.30 72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.86 73.86 69.44 69.33 69.43	20.11 18.76 19.15 19.69 19.08 18.75 18.90 24.31 21.04 22.28 19.76 19.65 17.76	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	± 9.6 % ± 9.6 %
AAC 96  10561- IE AAC 96  10562- IE AAC 96  10563- IE AAAC 96  10564- IE AAA 0  10565- IE AAA 0  10566- IE AAA 0  10566- IE AAA 0  10567- IE AAA 0	Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS7, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS9, Higher dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc dutly cycle)	X Y Z X Y Z X Y Z X Y Z X	7.45 7.60 7.89 7.51 7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67	71.56 72.40 73.30 72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.66 69.44 69.33 69.43	18.76 19.15 19.69 19.06 18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.76	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	± 9.6 % ± 9.6 %
AAC 96  10561- IE AAC 96  10562- IE AAC 96  10563- IE AAAC 96  10564- IE AAA 0  10565- IE AAA 0  10566- IE AAA 0  10566- IE AAA 0  10566- IE AAA 0	Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS7, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS8, Higher dutly cycle)  EEEE 802.11ac WIFI (160MHz, MCS9, Higher dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc dutly cycle)  EEEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc dutly cycle)	X Y Z X Y Z X Y Z X Y Z X	7.60 7.89 7.51 7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67	72.40 73.30 72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.86 69.44 69.33 69.43	19.15 19.69 19.06 18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.76	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	± 9.6 % ± 9.6 %
10561- IE AAC 9: 10562- IE AAC 9: 10563- IE AAA 0: 10564- AAA 0: 10566- AAA 0: 10568- AAA 0: 10568- AAA 0:	EEE 802.11ac WIFI (160MHz, MCS7, 19pc duly cycle)  EEE 802.11ac WIFI (160MHz, MCS8, 19pc duly cycle)  EEE 802.11ac WIFI (160MHz, MCS9, 19pc duly cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duly cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	Z X Y Z X Y Z X Y Z X	7.89 7.51 7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48	73.30 72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.66 69.44 69.33 69.43	19.69 19.06 18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.85 17.98	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 %
AAC 9 10562- IE AAC 9 10563- IE AAC 9 10564- IE AAA C 10565- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C 10568- IE AAA C	ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS8, ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS9, ISpc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	X Y Z X Y Z X Y Z X	7.51 7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48	72.04 71.61 71.72 83.09 76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	19.08 18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.98	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 %
AAC 9 10562- IE AAC 9 10563- IE AAC 9 10564- IE AAA C 10565- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C 10568- IE AAA C	ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS8, ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS9, ISpc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	X Y Z X Y Z X Y Z X	7.51 7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48	71.61 71.72 83.09 76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.98	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 %
AAC 9 10562- IE AAC 9 10563- IE AAC 9 10564- IE AAA C 10565- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C 10566- IE AAA C	ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS8, ISpc duty cycle)  EEE 802.11ac WIFI (160MHz, MCS9, ISpc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WIFI 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	Y Z X Y Z X Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X X Y Y X X X X Y Y X X X X Y Y X	7.26 7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48	71.61 71.72 83.09 76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	18.75 18.90 24.31 21.04 20.40 22.28 19.76 19.65 17.98	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0	± 9.6 %
AAC 9  10563- IE AAAC 9  10564- IE AAAA 0  10565- IE AAAA 0  10566- IE AAAA 0  10567- IE AAAA 0	ISpc duty cycle)  EEE 802.11ac WiFi (160MHz, MCS9, 19pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	Z X Y Z X Y Z X	7.27 12.43 9.00 8.39 10.40 8.36 8.24 5.67 5.48 5.45	71.72 83.09 76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	18.90 24.31 21.04 20.40 22.28 19.76 19.85 17.98	0.00	150.0 150.0 150.0 150.0 150.0 150.0 150.0	± 9.6 %
AAC 9  10563- IE AAC 9  10564- II AAA 0  10565- IE AAA 0  10566- IE AAA 0  10567- IE AAA 0  10568- IE AAA 0	ISpc duty cycle)  EEE 802.11ac WiFi (160MHz, MCS9, 19pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	X Y Z X Y Z X	9.00 8.39 10.40 8.36 8.24 5.67 5.48	76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	24.31 21.04 20.40 22.28 19.76 19.65 17.98	0.00	150.0 150.0 150.0 150.0 150.0	± 9.6 %
AAC 9  10563- IE AAC 9  10564- II AAA 0  10565- IE AAA 0  10566- IE AAA 0  10567- IE AAA 0  10568- IE AAA 0	ISpc duty cycle)  EEE 802.11ac WiFi (160MHz, MCS9, 19pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-DFDM, 12 Mbps, 99pc duty cycle)	Y Z X Y Z X Y Z X Y	9.00 8.39 10.40 8.36 8.24 5.67 5.48	76.21 74.75 78.67 73.86 73.56 69.44 69.33 69.43	21.04 20.40 22.28 19.76 19.65 17.98	0.00	150.0 150.0 150.0 150.0	± 9.6 %
AAC 9  10564- IE AAA C  10565- IE AAA C  10566- IE AAA C  10567- IE AAA C  10568- IE AAA C	EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	X Y Z X Y Z X	8.39 10.40 8.36 8.24 5.67 5.48 5.45	74.75 78.67 73.86 73.56 69.44 69.33 69.43	20.40 22.28 19.76 19.85 17.98		150.0 150.0 150.0 150.0	
AAC 9 10564- IE AAA C 10565- IE AAA C 10566- IE AAA C 10567- IE AAA C 10568- IE AAA C	EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	X Y Z X Y Z X	10.40 8.36 8.24 5.67 5.48 5.45	78.67 73.86 73.56 69.44 69.33 69.43	22.28 19.76 19.65 17.98		150.0 150.0 150.0	
AAC 9 10564- IE AAA C 10565- IE AAA C 10566- IE AAA C 10567- IE AAA C 10568- IE AAA C	EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	Y Z X Y Z X Y	8.36 8.24 5.67 5.48 5.45	73.86 73.56 69.44 69.33 69.43	19.76 19.65 17.98		150.0 150.0	
10564- AAA G 10565- AAA G 10566- AAA G 10567- AAA G 10568- AAA G	EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	X Y Z X	8.24 5.67 5.48 5.45	73.56 69.44 69.33 69.43	19.65 17.98	0.46	150.0	± 9.6 %
10565- IE AAA CO 10566- AAA CO 10567- AAA CO 10568- AAA CO 10568- AAA CO 10568- AAA CO	DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	Y Z X	5.67 5.48 5.45	69.44 69.33 69.43	17.98	0.46		± 9.6 %
10565- IE AAA CO 10566- IE AAA CO 10567- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO	DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	Y Z X	5.67 5.48 5.45	69.44 69.33 69.43	17.98	0.46		± 9.6 %
10565- IE AAA CO 10566- IE AAA CO 10567- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO 10568- IE AAA CO	DFDM, 9 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS- DFDM, 12 Mbps, 99pc duty cycle)  EEE 802.11g WiFi 2.4 GHz (DSSS-	Y Z X	5.48 5.45	69.33 69.43	17.76	0.40	100.0	- 20 7
10566- IE AAA C 10567- IE AAA C 10568- IE AAA C	OFDM, 12 Mbps, 99pc duty cycle) EEE 802.11g WiFi 2.4 GHz (DSSS-	Z X	5.45	69.43			150.0	
10566- IE AAA C 10567- IE AAA C 10568- IE AAA C	OFDM, 12 Mbps, 99pc duty cycle) EEE 802.11g WiFi 2.4 GHz (DSSS-	X			47.00		150.0	
10566- IE AAA C 10567- IE AAA C 10568- IE AAA C	OFDM, 12 Mbps, 99pc duty cycle) EEE 802.11g WiFi 2.4 GHz (DSSS-	Y	6.00	00.00	17.90	0.45		+000
AAA C 10567- IE AAA C 10568- IE AAA C				69.98	18.31	0.46	150.0	±9.6 %
AAA C 10567- IE AAA C 10568- IE AAA C		7	5.77	69.86	18.11		150.0	
AAA C 10567- IE AAA C 10568- IE AAA C			5.73	69.95	18.25		150.0	
10567- IE AAA C 10568- IE AAA C		×	5.80	69.78	18.09	0.46	150.0	± 9.6 %
10568- IE AAA C		Y	5.59	69.71	17.91		150.0	
10568- IE AAA C		Z	5.56	69.82	18.07		150.0	
10568- IE AAA C	EEE 802.11g WIFI 2.4 GHz (DSSS- DFDM, 24 Mbps, 99pc duty cycle)	X	5.77	69.93	18.25	0.46	150.0	± 9.6 %
AAA C	or and an inepat cope only of one)	Y	5.58	69.88	18.11		150.0	
AAA C		Ż	5.55	70.03	18.30		150.0	
	EEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	X	5.73	69.65	17.95	0.46	150.0	± 9.6 %
10569- 16	or om, so maps, sope day cycle)	V	5.51	69.54	17.74		150.0	
10569- 16		Z	5.49	69.66	17.89		150.0	
10589- I II	FFF 888 44 - WEST 8 4 844 - 18888					0.10		±9.63
	EEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	X	5.70	69.92	18.24	0.46	150.0	± 9.6 %
		Y	5.49	69.81	18.06		150.0	
		Z	5.48	69.99	18.28		150.0	
	EEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	X	5.75	69.78	18.23	0.46	150.0	± 9.6 %
		Y	5.56	69.77	18.09		150.0	
		Z	5.53	69.94	18.28		150.0	
	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	Х	1.62	69.54	17.88	0.46	130.0	± 9.6 %
		Y	1.50	68.69	17.24		130.0	
		Z	1.64	70.12	18.27		130.0	
10572- 1	IEEE 802.11b WIFI 2.4 GHz (DSSS, 2	X	1.65	70.12	18.16	0.46	130.0	± 9.6 5
	Mbps, 90pc duty cycle)					0,40		1 0.0 7
		Y	1.53	69.27	17.52		130.0	
		Z	1.68	70.82	18.62		130.0	
	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	4.16	90.92	23.41	0.46	130.0	± 9.6 %
		Y	3.34	87.84	21.93		130.0	
		Z	10.18	106.24	28.34		130.0	
		X	2.00	76.38	20.56	0.46	130.0	± 9.6 9
	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	Y	1.78	75.01	19.75		130.0	
	IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)		2.16	78.69	21.81		130.0	

Certificate No: ER3-2480\_Dec18 Page 32 of 38



Page: 85 of 101

ER3DV6 -	- SN:2480	December 10, 2018

10575- AAA	IEEE 802.11g WIFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	5.47	69.34	18.10	0.46	130.0	±9.6 %
		Y	5.27	69.21	17.87		130.0	
		ż	5.28	69.43	18.07		130.0	
10576- AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	5.50	69.49	18.14	0.46	130.0	±9.6%
	or only or makes or open only of one)	Y	5.29	69.32	17.89		130.0	
		ż	5.30	69.55	18.10		130.0	
10577-	IEEE 802.11g WIFI 2.4 GHz (DSSS-	X	5.81	69.93	18.38	0.46	130.0	± 9.6 %
AAA	OFDM, 12 Mbps, 90pc duty cycle)	Y	5.56	69.76	18.14		130.0	20.0 %
		Z	5.56	69.96	18.33		130.0	
10578-	IEEE 802.11g WiFi 2.4 GHz (DSSS-	X	5.67	69.97	18.36	0.46	130.0	± 9.6 %
AAA	OFDM, 18 Mbps, 90pc duty cycle)		5.43			0.40		I 8.0 %
		Y		69.81	18.14		130.0	
		Z	5.44	70.06	18.37		130.0	
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	Х	5.50	69.69	17.96	0.46	130.0	± 9.6 %
		Y	5.26	69.47	17.70		130.0	
		Z	5.26	69.67	17.89		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	Х	5.60	69.85	18.09	0.46	130.0	± 9.6 %
		Y	5.32	69.54	17.76		130.0	
		Z	5.32	69.73	17.93		130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	Х	5.63	70.25	18.40	0.46	130.0	± 9.6 %
		Y	5.35	69.95	18.12		130.0	
		Z	5,36	70.20	18.35		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle)	X	5.51	69.68	17.93	0.46	130.0	± 9.6 %
	of pm; or maps; sope stay ayers	Y	5.24	69.42	17,63		130.0	
		Z	5.24	69.60	17.78		130.0	
10583- AAB	IEEE 802.11a/n WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	5.47	69.34	18.10	0.46	130.0	± 9.6 %
7012	maps, sope day cyaley	Y	5.27	69.21	17.87		130.0	
		ż	5.28	69.43	18.07		130.0	
10584- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	5.50	69.49	18.14	0.46	130.0	± 9.6 %
7000	maps, sope day cyacy	Y	5.29	69.32	17.89		130.0	
		Z	5.30	69.55	18.10		130.0	
10585- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	5.81	69.93	18.38	0.46	130.0	± 9.6 %
PAPE .	mups, sope duly cycle)	Y	5.56	69.76	18.14		130.0	
		Z	5.56	69.96	18.33		130.0	
10586- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18	X	5.67	69.97	18.36	0.46	130.0	± 9.6 %
MAD	Mbps, 90pc duty cycle)	Y	5.43	69.81	18.14		130.0	
		Z	5.44	70.06	18.37		130.0	
10587-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24	X	5.50	69.69	17.96	0.46	130.0	±9.6 %
AAB	Mbps, 90pc duty cycle)	V	5.26	69.47	17.70		130.0	
	-	Z	5.26	69.67	17.70		130.0	
10500	FEE 000 11-5 MEE 6 OU-105011 00	X	5.80	69.85	18.09	0.46	130.0	±9.6 %
10588- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)					0.46		X 9.0 %
		Y	5.32	69.54	17.76		130.0	_
		Z	5.32	69.73	17.93	0.46	130.0	
10589- AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	Х	5.63	70.25	18.40	0.46	130.0	±9.6 %
		Y	5.35	69.95	18.12		130.0	
		Z	5.36	70.20	18.35		130.0	
10590-	THE PARTY OF THE P	X	5.51	69.68	17.93	0.46	130.0	± 9.6 %
10590- AAB	IEEE 802.11a/h WIFI 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	^						
	Mbps, 90pc duty cycle)	Y	5.24	69.42	17.63		130.0	

Certificate No: ER3-2480\_Dec18 Page 33 of 38



Page: 86 of 101

EDSEW48	SN-2480	December 10, 2018

10591- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	×	5.63	69.39	18.20	0.46	130.0	± 9.6 %
		Y	5.42	69.24	17.96		130.0	
		Z	5.43	69.44	18.15		130.0	
10592- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	5.84	69.74	18.30	0.46	130.0	± 9.6 %
		Y	5.62	69.62	18.10		130.0	
		Z	5.62	69.82	18.29		130.0	
10593- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	×	5.80	69.80	18.26	0.46	130.0	± 9.6 %
		Y	5.56	69.63	18.04		130.0	
		Z	5.56	69.83	18.22		130.0	
10594- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.82	69.83	18.33	0.46	130.0	± 9.6 %
		Y	5.59	69.69	18.12		130.0	
		Z	5.60	69.90	18.32		130.0	
10595- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	5.85	69.97	18.33	0.46	130.0	± 9.6 %
		Y	5.60	69.77	18.09		130.0	
		Z	5.59	69.96	18.27		130.0	
10596- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	×	5.78	69.95	18.32	0.46	130.0	± 9.6 %
		Y	5.52	69.74	18.07		130.0	
		Z	5.53	69.96	18.27		130.0	
10597- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	5.74	69.95	18.26	0.46	130.0	±9.6%
		Y	5.48	69.72	18.00		130.0	
		Z	5.49	69.92	18.19		130.0	
10596- AAB	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	5.70	70.14	18.46	0.46	130.0	± 9.6 %
		Y	5.44	69.86	18.18		130.0	
		Z	5.45	70.08	18.39		130.0	
10599- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	8.49	77.10	22.23	0.46	130.0	±9.6 %
		Y	7.68	75.15	21.10		130.0	
		Z	8.05	76.29	21.69		130.0	
10600- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	81.62	128.75	40.59	0.46	130.0	± 9.6 %
		Y	38.25	110.83	34.83		130.0	
		Z	37.25	109.76	34.31		130.0	
10601- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	8.79	77.75	22.46	0.46	130.0	± 9.6 %
		Y	9.61	80.24	23.48		130.0	
		Z	9.75	80.59	23.63		130.0	
10602- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	9.66	79.56	23.26	0.46	130.0	±9.69
		Y	9.86	80.52	23.57		130.0	
		Z	10.26	81.41	23.94		130.0	
10603- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	7.91	74.84	21.02	0.46	130.0	± 9.6 9
		Y	9.40	79.48	23.19		130.0	
		Z	11.06	83.18	24.84		130.0	
10604- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	7.34	73.48	20.36	0.46	130.0	± 9.6 %
		Y	7.32	73.96	20.51		130.0	
		Z	7.65	75.08	21.13		130.0	
10605- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	10.81	82.61	24.84	0.46	130.0	± 9.6 %
		Y	9.69	80.31	23.58		130.0	
		Z	9.72	80.36	23.58		130.0	
10606- AAB	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	6.81	71.93	19.41	0.46	130.0	± 9.6 %
		Y	6.97	73.08	19.94		130.0	
							130.0	

Certificate No: ER3-2480\_Dec18



Page: 87 of 101

December 10, 2018 ER3DV6 - SN:2480

10607- AAB	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	5.44	68.53	17.67	0.46	130.0	± 9.6 %
		Y	5.24	68.40	17.45		130.0	
		Z	5.25	68.61	17.66		130.0	
10608- AAB	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duly cycle)	X	5.71	68.99	17.83	0.46	130.0	± 9.6 %
		Y	5.48	68.87	17.63		130.0	
		Z	5.48	69.08	17.84		130.0	
10609- AAB	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	5.60	68.94	17.73	0.46	130.0	± 9.6 %
		Y	5.37	68.78	17.50		130.0	
		Z	5.38	68.98	17.70		130.0	
10610- AAB	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	×	5.65	69.03	17.84	0.46	130.0	±9.6 %
		Y	5.42	68.90	17.64		130.0	
		Z	5.42	69.11	17.84		130.0	
10611- AAB	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	×	5.63	69.11	17.84	0.46	130.0	± 9.6 %
		Y	5.37	68.88	17.58		130.0	
		Z	5.37	69.07	17.78		130.0	
10612- AAB	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	×	5.63	69.17	17.82	0.46	130.0	±9.6%
		Y	5.39	69.01	17.60		130.0	
		Z	5.39	69.23	17.81		130.0	
10613- AAB	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	×	5.66	69.15	17.76	0.46	130.0	± 9.6 %
		Y	5.41	68.98	17.55		130.0	
		Z	5.41	69.18	17.74		130.0	
10614- AAB	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	5.58	69.35	17.97	0.46	130.0	± 9.6 %
70.2	1	Y	5.31	69.02	17.67		130.0	
		Z	5.31	69.22	17.88		130.0	
10615- AAB	IEEE 802.11ac WIFI (20MHz, MCS8, 90pc duty cycle)	×	5.63	68.92	17.65	0.46	130.0	± 9.6 %
		Y	5.38	68.74	17.40		130.0	
		Z	5.38	68.93	17.59		130.0	
10516- AAB	IEEE 802.11ac WIFI (40MHz, MCS0, 90pc duty cycle)	X	7.03	72.28	19.63	0.46	130.0	± 9.6 %
		Y	6.99	72.63	19.70		130.0	
		Z	6.97	72.64	19.76		130.0	
10617- AAB	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	7.14	72.41	19.63	0.46	130.0	±9.6 %
		Y	7.13	72.92	19.81		130.0	
		Z	7.33	73.61	20.21		130.0	
10618- AAB	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	6.99	72.41	19.63	0.46	130.0	±9.6 %
		Y	6.83	72.41	19.53		130.0	
		Z	6.83	72.52	19.64		130.0	
10619- AAB	IEEE 802.11ac WiFi (40MHz, MC\$3, 90pc duty cycle)	X	7.24	72.98	19.91	0.46	130.0	±9.6%
		Y	7.10	73.01	19.81		130.0	
		Z	7.19	73.39	20.05		130.0	
10620- AAB	IEEE 802.11ac WIFi (40MHz, MCS4, 90pc duty cycle)	×	6.93	71.53	19.17	0.46	130.0	± 9.6 %
		Y	6.67	71.31	18.97		130.0	
		Z	6.67	71.42	19.10		130.0	
10621- AAB	IEEE 802.11ac WIFI (40MHz, MCS5, 90pc duty cycle)	X	6.66	70.87	18.91	0.46	130.0	± 9.6 %
		Y	6.49	70.84	18.81		130.0	
		Z	6.53	71.11	19.04		130.0	
10622- AAB	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	×	7.70	74.37	20.76	0.46	130.0	± 9.6 %
		Y	6.82	72.06	19.44		130.0	
		Ż	6.80	72.10	19.53		130.0	

Certificate No: ER3-2480\_Dec18

Page 35 of 38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is suses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 88 of 101

ER3DV6 - SN:2480 December 10, 2018

10623- AAB	IEEE 802.11ac WiFi (40MHz, MCS7,	X	7.11	72.51	19.72	0.46	130.0	± 9.6 %
AAB	90pc duty cycle)	Y	6.54	71.18	18.91		130.0	
		Z	6.62	71.57	19.18		130.0	
10624- AAB	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	7.26	72.52	19.81	0.46	130.0	± 9.6 %
	ode and alone	Y	7.34	73.25	20.06		130.0	
		Z	7.52	73.88	20.43		130.0	
10625- AAB	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	12.41	84.31	25.41	0.46	130.0	± 9.6 %
	orgonial educat	Y	11.20	81.94	24.07		130.0	
		Z	13.65	86.24	25.84		130.0	
10626- AAB	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	Х	6.63	70.02	18.31	0.46	130.0	± 9.6 %
		Y	6.58	70.22	18.35		130.0	
		Z	6.71	70.73	18.71		130.0	
10627- AAB	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	8.06	74.01	20.37	0.46	130.0	± 9.6 %
		Y	8.94	76.67	21.57		130.0	
		Z	9.98	79.11	22.73		130.0	
10628- AAB	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	6.98	71.03	18.74	0.46	130.0	± 9.6 %
		Y	6.82	70.91	18.60		130.0	
		Z	6.89	71.22	18.85		130.0	
10629- AAB	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	8.27	74.68	20.68	0.46	130.0	±9.6 %
		Y	7.30	72.23	19.31		130.0	
		Z	7.42	72.65	19.59		130.0	
10630- AAB	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	62.71	118.49	36.75	0.46	130.0	± 9.6 %
		Y	64.87	118.70	36.49		130.0	
		Z	57.07	115.53	35.42		130.0	
10631- AAB	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	23.88	98.00	30.40	0.46	130.0	± 9.6 %
		Y	10.02	79.12	22.70		130.0	
		Z	8.36	75.22	20.92		130.0	
10632- AAB	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	8.19	74.54	20.75	0.46	130.0	± 9.6 %
		Y	8.77	76.48	21.62		130.0	
		Z	9.81	78.98	22.81		130.0	
10633- AAB	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	8.83	76.22	21.43	0.46	130.0	± 9.6 %
		Y	7.54	73.09	19.77		130.0	
		Z	7.54	73.19	19.89		130.0	
10634- AAB	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	Х	7.05	71.12	18.82	0.46	130.0	± 9.6 %
		Y	7.75	73.87	20.25		130.0	
		Z	7.33	72.67	19.69		130.0	
10635- AAB	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	6.73	69.90	18.00	0.46	130.0	± 9.6 %
		Y	6.65	70.14	18.07		130.0	
		Z	6.70	70.40	18.30		130.0	
10636- AAC	IEEE 802.11ac WiFi (160MHz, MCSo, 90pc duty cycle)	X	8.01	73.33	20.03	0.46	130.0	± 9.6 %
		Y	7.87	73.14	19.83		130.0	
10637-	IEEE 802.11ac WiFi (160MHz, MCS1,	X	8.37 10.08	74.57 78.28	20.61	0.46	130.0	± 9.6 %
AAC	90pc duty cycle)	- 52	9.31	70.70	24.50		495.0	_
	-	Y	9.31	76.70	21.56		130.0	
10020	IEEE 900 stop WIEL/SOUNDS SECON	Z		76.72	21.59	0.46	130.0	± 9.6 %
10638- AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	9.02	75.76	21.19	0.46	130.0	x 9.0 %
		Y	9.34	76.73	21.55		130.0	
		Z	10.03	78.29	22.31		130.0	

Certificate No: ER3-2480\_Dec18 Page 36 of 38



Page: 89 of 101

December 10, 2018 ER3DV6 - SN:2480

10639- AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	8.43	74.18	20.42	0.46	130.0	± 9.6 %
		Y	8.01	73.32	19.89		130.0	
		Z	7.76	72.63	19.59		130.0	
10640- AAC	IEEE 802.11ac WIFI (160MHz, MCS4, 90pc duty cycle)	Х	7.58	71.51	18.87	0.46	130.0	± 9.6 %
		Y	9.66	77.49	21.91		130.0	
		Z	9.39	76.86	21.63		130.0	
10641- AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	Х	8.23	73.42	20.02	0.46	130.0	± 9.6 %
		Y	8.26	73.79	20.13		130.0	
		Z	8.47	74.38	20.48		130.0	
10642- AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	8.01	72.86	19.84	0.46	130.0	± 9.6 %
		Y	8.28	73.98	20.36		130.0	
		Z	8.84	75.51	21.18		130.0	
10643- AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	Х	8.08	73.34	20.04	0.46	130.0	± 9.6 %
		Y	7.73	72.64	19.57		130.0	
		Z	7.61	72.32	19.46		130.0	
10644- AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	Х	17.33	90.48	27.71	0.46	130.0	±9.6%
		Y	10.40	79.16	22.75		130.0	
		Z	9.29	76.66	21.60		130.0	
10645- AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	Х	12.67	82.92	24.55	0.46	130.0	± 9.6 %
		Y	9.33	76.00	21.13		130.0	
		Z	9.04	75.13	20.67		130.0	
10646- AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	33.91	115.70	38.89	9.30	60.0	± 9.6 %
		Y	100.00	145.90	47.24		60.0	
		Z	39.18	119.15	39.53		60.0	
10647- AAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	Х	37.47	118.97	40.03	9.30	60.0	±9.6 %
		Y	100.00	146.83	47.63		60.0	
		Z	45.23	123.46	40.93		60.0	
10648- AAA	CDMA2000 (1x Advanced)	Х	1.11	67.81	13.44	0.00	150.0	±9.6 %
		Y	0.93	66.20	11.61		150.0	
		Z	0.97	67.57	12.43		150.0	
10852- AAD	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	Х	5.45	72.12	19.22	2.23	0.08	± 9.6 %
		Y	5.00	71.69	18.74		80.0	
		Z	5.39	72.40	19.03		80.0	
10853- AAD	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	Х	6.01	71.76	19.51	2.23	80.0	± 9.6 %
		Y	5.59	71.30	19.13		80.0	
		Z	5.91	71.76	19.31		80.0	
10654- AAD	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	Х	5.87	71.40	19.50	2.23	80.0	±9.6 %
		Y	5.49	70.92	19.14		80.0	
		Z	5.81	71.37	19.33		80.0	
10655- AAE	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	5.97	71.62	19.62	2.23	80.0	± 9.6 %
		Y	5.58	71.06	19.25		80.0	
		Z	5.90	71.45	19.42		80.0	
10658- AAA	Pulse Waveform (200Hz, 10%)	Х	10.71	83.30	21.82	10.00	50.0	± 9.6 %
		Y	10.92	84.33	20.32		50.0	
		Z	10.85	83.39	22.27		50.0	
10659- AAA	Pulse Waveform (200Hz, 20%)	X	9.89	83.31	20.36	6.99	60.0	± 9.6 %
AAA		V	40.74	84.40	19.06		60.0	
		Z	10.71	84.14	21.07		60.0	

Page 37 of 38 Certificate No: ER3-2480, Dec18



Page: 90 of 101

ER3DV6 - SN:2480

December 10, 2018

10660- AAA	Pulse Waveform (200Hz, 40%)	X	10.29	86.12	19.74	3.98	80.0	±9.6 %
		Y	11.52	86.36	18.25		80.0	
		Z	12.69	89.51	21.25		80.0	
10661- AAA	Pulse Waveform (200Hz, 60%)	X	100.00	86.91	12.34	2.22	100.0	±9.6 %
		Y	100.00	83.70	10.45		100.0	
		Z	100.00	85.81	11.37		100.0	
10662- AAA	Pulse Waveform (200Hz, 80%)	X	100.00	108.21	21.35	0.97	120.0	±9.6 %
		Y	100.00	99.15	17.04		120.0	
		Z	100.00	105.70	20.36		120.0	
10670- AAA	Bluetooth Low Energy	X	9.38	87.55	19.37	2.19	100.0	±9.6 %
		Y	9.35	86.05	17.53		100.0	
		Z	18.29	96.85	22.51		100.0	

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: ER3-2480\_Dec18

Page 38 of 38



Page: 91 of 101

# 19. Uncertainty Budget

Error Description	Uncert.	Prob. Dist.	Div.	(c <sub>i</sub> ) E	$\begin{pmatrix} c_i \end{pmatrix}$	Std. Unc. E	Std. Unc
Measurement System							
Probe Calibration	±5,1%	N	1	1	1	±5.1%	±5.1 %
Axial Isotropy	$\pm 4.7\%$	R	$\sqrt{3}$	1	1	±2.7%	$\pm 2.7\%$
Sensor Displacement	±16.5 %	R	$\sqrt{3}$	1	0.145	±9.5 %	±1.4%
Boundary Effects	±2.4%	R	√3	1 -	1	±1.4%	±1.4%
Phantom Boundary Effect	±7.2%	R	$\sqrt{3}$	1	0	±4.1 %	±0.0%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Scaling with PMR calibration	±10.0%	R	$\sqrt{3}$	1	1	±5.8%	±5.8%
System Detection Limit	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6 %
Readout Electronics	±0.3%	N	1	1.	1	±0.3%	±0.3 %
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5 %
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Reflections	±12.0%	R	$\sqrt{3}$	1	1	±6.9%	±6.9 %
Probe Positioner	±1.2%	R	$\sqrt{3}$	1	0.67	±0.7%	±0.5 %
Probe Positioning	±4.7%	R	√3	1	0.67	±2.7%	±1.8%
Extrap. and Interpolation	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Test Sample Related							
Device Positioning Vertical	±4.7%	R	$\sqrt{3}$	1	0.67	±2.7%	±1.8%
Device Positioning Lateral	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Device Holder and Phantom	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9 %
Phantom and Setup Related			155				
Phantom Thickness	$\pm 2.4\%$	R	$\sqrt{3}$	1	0.67	±1.4%	$\pm 0.9 \%$
Combined Std. Uncertainty				14.5		±16,3 %	±12.3 %
Expanded Std. Uncertainty o		1	100		±32.6 %	±24.6 %	



Page: 92 of 101

## 20. System Validation from Original Equipment Supplier



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document on the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 93 of 101

## Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstraase 43, 8004 Zurich, Switzerland





Bervice wildse d'étalonnage Servizio svizzero di teratura Swiss Calibration Service

reditation No.: SCS 0108

Accredited by the Sales Accreditation Service (SAS) The Sees Accreditation Service is one of the signatories to the EA Multisteral Agreement for the recognition of calibration contill

#### References

ANSI-C63.19-2011 American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- Coordinate System: y-axis is in the direction of the dipole arms, z-axis is from the basis of the america. (mounted on the lable) towards its feed point between the two dipole arms, x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipote connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to  $\alpha$ directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level
- Antenna Positioning: The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections.

  It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move eastically in vertical direction without changing its relative position to the top center of the Test. Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface. Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantons with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe elessential for the
- Feed Point Impedance and Return Loss: These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any
- E-field distribution: E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the anterma feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dpole arms. Two 3D maxima are evaluable near the end of the dipole arms. Assuming the dipole arms arm perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

and the second of the second o	nt is stated as the standard uncertainty of measur distribution corresponds to a coverage probability	the second secon
Certificane No: CD835V3-1149 Dec18	Page 2 of 6	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 94 of 101

#### Measurement Conditions

n, as far as not given on page 1

DASY Version	DASY5	V52.10.2
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

#### Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	110.4 V/m = 40.86 dBV/m
Maximum measured above low end	100 mW input power	110.2 V/m = 40.85 dBV/m
Averaged maximum above arm	100 mW input power	110.3 V/m ± 12.8 % (k=2)

#### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	17.9 dB	42.5 Ω - 9.2 jΩ
835 MHz	25.1 dB	53.6 Ω + 4.4 jΩ
880 MHz	16.5 dB	61.5 Ω - 12.3 jΩ
900 MHz	15,9 dB	51.8 Ω - 16.3 jΩ
945 MHz	22.4 dB	$43.5 \Omega + 2.8 j\Omega$

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be

damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD835V3-1149 Dec18 Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 95 of 101

#### Impedance Measurement Plot

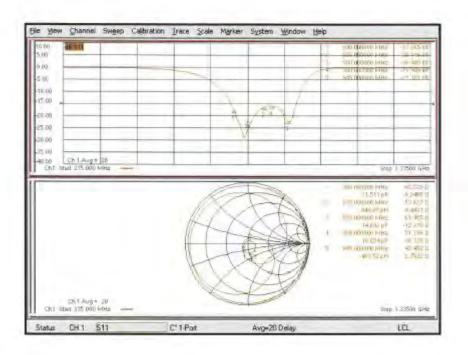

Certificate No: CD835V3-1149\_Dec18

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 96 of 101

#### **DASY5 E-field Result**

Date: 10,12.2018

Test Laboratory: SPEAG Lab2

#### DUT: HAC-Dipole 835 MHz; Type; CD835V3; Serial; CD835V3 - SN: 1149

Communication System: UID 0 - CW : Frequency: 835 MHz Medium parameters used:  $\sigma = 0.8/m_e c_e = 1$ ;  $\rho = 0.kg/m^3$ Phantom section: RF Section Measurement Standard: DASY5 (IEFE/IEC/ANSI C63.19-2011)

#### DASY32 Configuration:


- Probe: EF30V3 5N4013, ConvF(1, 1, 1) @ 835 MHz; Calibrated: 05.03.2018
- Electronics: DAE4 Sn781; Calibrated: 17.01.2018
- Phantom: HAC Test Arch with AMCC; Type: SD HAC F01 BA; Siriali 1070
- DASYS2 52.10.2(1495); SEMCAD x 14.6.12(7450)

Dipole E-Field measurement @ 835MHz/E-Scun - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0, 0, -6.3 mm Reference Value = 132.1 V/m; Power Drift = 0.01 dfl Applied MIP = 0.00 dB RF audio interference level = 40.86 dBV/m Emission category: M3

#### MIT scaled E-field

	Grid 2 M3 40.85 dBV/m	Grid 3 M3 40.84 dBV/m
Grid 4 M4	Grid 5 M4	Grid 5 M4
35.6 dBV/m	36,03 dBV/m	36.01 dBV/m
Grid 7 M3	Grid 6 M3	Grid 9 M3
40.45 dBV/m	40.86 d/8V/m	40.83 dBV/m

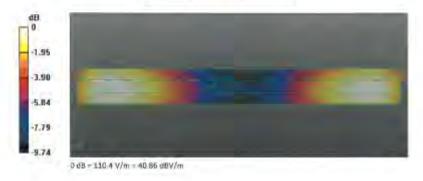

Certificate No. CD835V3-1189\_Dec18

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 97 of 101

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8994 Zurich, Switzurland





S Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di tersture S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Switz Accreditation Sampa (SAS) The Swiss Accreditation Service is one of the signatories to the EA Mutilateral Agreement for the recognition of calibration certificates

Auden

Certificate No. CD1880V3-1023 Jun18

Disject	CD1880V3 - SN:	1023	
Califred on procedure(s)	QA CAL-20.v6 Calibration proce		
anomics tiles	June 21, 2018		
		shall standards, which makes the physical por	
in measuraments and the unce	munities with confidence p	robabilly are given on the hillowing pages an	are part of the certificate:
All calibratetrs have been condu	stud in the Glosed Military 16	ry lacility, environment temperature (22 ± 31 €	and number - 70%
Tellumber Engineeri (maa 1818)	NE SOURCE POR CORPORATION AND ADDRESS OF THE PARTY OF THE		
Calibration Equiposed (mod-IM&) Primary Sondards	(E-strike) for careration)	Property Services (Co. 45)	W. C. T. T. T. V. W.
Power meter NRP	SN 104778	Dat Date (Clerificate No.) 04-Apr-16 (No. 217-0267202673)	Schedulad Calibration
Ower sensor NRP-Z91	SN 104778	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Acr-19
Priver sensor NRP Z91	SN 103245	04-Apr-18 (No. 217-02672) 04-Apr-18 (No. 217-02673)	Apr-13 Apr-13
Reference 20 dB Attenuation	BN 5058 (20k)	04-Apr-18 (No. 217-02682)	Acr-10
ype-N minnetch contrinstrov	SN 5047.2 / 06327	04 Apr. 18 (No. 217-02683)	Acc-10.
Probe EF3DV3	SN: 4013	05-Mar-18 (No. EF3-4013, Mar16)	Man+till
DAE4	SM 781	17 Jun-18 (No. ()AE4 7R1 Jan18)	Jen-19
		sanding.	mand the same
Enterorism Chard Com	100 m		School and Chook
	ID #	Check Date (in house)	10 fire ion effected Cost file
rower meter Agrint (1419)	SN GB42428191	09-Oct-09 (in house check Oct-17)	In house check Oct-20
Power meter Agiline 44188. Power sensor HP E44128.	SN GB42428191 SN US38485109	09-Oct-09 (in house check Oct-17) (6-Uen-1) (in hinse check Oct-17)	In nouse check: Oct-20
rower meter Agilint (44188) Power sensor HP E44128, Power sensor HP 8482A	SN GB42420191 SN: US38485102 SN: US3729567	09-Oct-09 (in house check Oct-17) 05-Jan-10 (in hinse check Oct-17) 09-Oct-09 (in house check Oct-17)	In house check. Oct-20 In house check. Cict-20
Priver meter Aglinn 44188 Priver sensor HP E4412A Priver sensor HP 8482A RF generalor FISS SMT-00	SN GB42428191 SN US38485109	09-Oct-09 (in house check Oct-17) (6-Uen-1) (in hinse check Oct-17)	In nouse check: Oct-20
Priver meter Aglinn 44188 Priver sensor HP E4412A Priver sensor HP 8482A RF generalor FISS SMT-00	56/ GB42420191 SN: U538485109 5N: U537295597 56/ 632283/011	06-O3-06 (in house check Oct-17) 05-den-10 (in hinse check Oct-17) 194-Od-19 (in house check Oct-17) 27-Aug-12 (in house check Oct-17)	In incuse check. Oct-20 In house check. Oct-20 In house check. Oct-20
Power mister Aguint 44198 Power sensor HP E4412A Power sensor HP 8482A 3E generalor FBS SMT-00 National Analyzer HP 0783E	SN: CB42420191 SN: US38485102 SN: US37295507 SN: US37290685	b9-Oct-28 (in house check Oct-17) (6-Jan-10 (in hinse check Oct-17) (9-Oct-09 (in house check Oct-17) 27-Aug-12 in house check Oct-17) 18-Oct-01 (in house check Oct-17)	In house check: Oct-20 In house check: Cct-20 In house check: Oct-20 In house check: Oct-16
Secondary Standards Proces mater Agilian via 198 Proces sonsor HP E4422 Proces sonsor HP 8482A RE generalor FIAS SMT-00 National Archyzer HP 07836 Calibrated By	SN GB42428101 SN US38485109 SN US3729507 SN 03283011 SN: US3739086 Name Lef Klysser	b9-Oct-28 (in historic check Oct-17) (6-Jan-19 (in himse check Oct-17) (96-Oct-99 (in house check Oct-17) 27-Aug-12 (in house check Oct-17) 18-Oct-01 (in house check Oct-17) Function Laboration Technicism	In house check: Oct-20 In house check: Cct-20 In house check: Oct-20 In house check: Oct-16
Pawer mister Agilinit (1419). Pawer stansor HP E4412A. Pawer stansor HP 8482A. RE generalor RSS SMT-00. Natiwork Analyzer HP 0783E.	SN: CB42420191 SN: US38485109 SN: US37795597 SN: US3779585 Nome:	b9-Oct-28 (in house-check Oct-17) (6-Jan-10 (in hinse-check Oct-17) (9-Oct-09 (in house-check Oct-17) 27-Aug-12 (in house-check Oct-17) 18-Oct-01 (in house-check Oct-17) Function	In house check: Oct-20 In house check: Cct-20 In house check: Oct-20 In house check: Oct-16

Certicate No CD1880V3-1023 Jun18

Page 1 al 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 98 of 101

Calibration Laboratory of Schmid & Partner Engineering AG sugnausstrasse 42,8004 Zurich, Switzerlan





Schweizerischer Kaliterierdenne S Service auisse d'étalonnage C Sarvirio gvizzero di teratora Swiss Calibration Service

Accreditation No.: SCS 0108

Accretion by the Sweet Accredition Service (SAS) The Swine Accreditation Service is one of the signatories to the EA Musicatural Agreement for the recognition of calibration certification

#### References

AMSI-C83,19-2011 American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids

#### Methods Applied and Interpretation of Parameters:

- Coordinate System y-axis is in the direction of the dipole arms, z-axis is from the basis of the antenna (mounted on the table) towards its feed point browners the two dipole arms, x-axis is normal to the other axes. In coincidence with the standards [1], the measurement plants (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions: Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power is the dipolir connector is set with a calibrated nower meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, this forward power is adjusted to the same level.
- Antenna Prisillaning/ The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the effections.
  It is venified button it in mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line it is installed on the HAC dipole positionar with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantiam. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface. Check job: Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the majoring accion of the HAC Test Arch chantom with the proper device reference point (upper surface of the dipole) and the majoring yed wiference point (tip of the probe) considering the probe sensor offset. The ventical distance to the probe is essential for the accuracy
- Feed Foint Impediance and Flature Loss: These parameters are measured using a HP 8753E Vactor Natwork Analyzer. The impacance is specified at the SMA connector of the dipole. The influence of reflections was aliminating by applying the averaging function while moving the cipole in the air, at least 70cm away from any
- E-field distribution. E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW. forward power to the entenna feed point, in accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in 2) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of trissic two maximir (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the consor displacement. The E licits value stated as satisfaction value represents the maximum of the interpolated 30-E-field, in the plane above the dipute surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. CD1880V3 1023 Jun 9

Page 2 tr 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 99 of 101

#### Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.10.1
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz ± 1 MHz	
Input power drift	< 0.05 dB	

#### Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	89.9 V/m = 39.08 dBV/m
Maximum measured above low end	100 mW input power	87.2 V/m = 38.81 dBV/m
Averaged maximum above arm	100 mW input power	88.6 V/m ± 12.8 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	22.4 dB	55.8 Ω + 5.6 jΩ
1880 MHz	21.3 dB	58.9 Ω + 3.2 jΩ
1900 MHz	21.7 dB	58.9 Ω + 0.5 jΩ
1950 MHz	28.8 dB	51.5 Ω - 3.4 jΩ
2000 MHz	19.8 dB	44.0 Ω + 7.5 jΩ

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is

therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Certificate No: CD1880V3-1023 Jun18 Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190329W04 Page: 100 of 101

## Impedance Measurement Plot

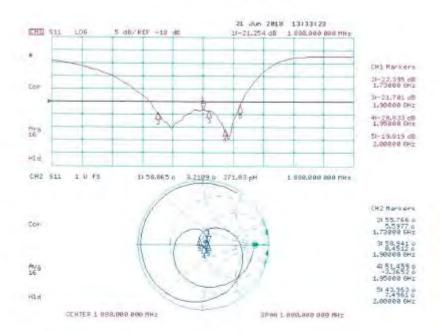

Certificate No: CD1880V3-1023\_Jun18

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and withi instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 101 of 101

#### **DASY5 E-field Result**

Date: 21,06,2018

## DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1023

Communication System: UID 0, CW; Frequency: 1880 MHz: Medium parameters used:  $\sigma = 0$  S/m;  $\tau_0 = 1$ ;  $\rho = 0$  kg/m Phantom section: RF Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63 19-2011)

#### DASY Configuration:

- Probe: EF3DV3 SN4013; ConvF(1 I, I) @ 1880 MHz;
- Sensor Surface: (Fix Surface)
- Electronics: DAE4 5n781; Calibrated: 17.01,2018
- Phantom: HAC Test Arch with AMCC: Type: SD HAC PQ3 BA; Serial: 1070
- DASYS2 57.10 1(1476); SEMCAD X 14.6 11(7439)


Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm Device Reference Point: 0. 0, +6.3 mm Reference Value = (53.7 V/m, Power Drift = -0.0) dBApplied MIP = 0.00 dBRF audio interference level = 39.08 dBV/m

Emission category: M2

#### MIF scaled E-field

Particular Control	Grid 2 M2 39.08 dBV/m	Grid 3 MIZ 39.03 dBV/m
TOTAL CONTRACTOR	Grid 5 M2 36.07 dBV/m	Grid 6 M2 36.02 dBV/m
Grid 7 M2 38,57 dBV/m	Grid 8 M2 38.81 dBV/m	Grid 9 M2 38.7 d8V/m

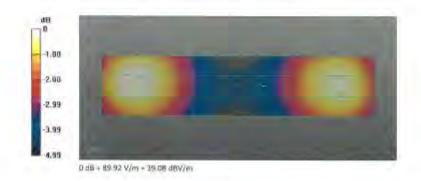

Certificate No. CD1880V3-1023\_Jun18

Page 5 of 5

# **End of report**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's intervention only and within the limits o instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.