

FCC
RF
TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
8BitDo M30 2.4G wireless gamepad

ISSUED TO
SHENZHEN 8BITDO TECH CO., LTD.

Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou,
Nanshan District, Shenzhen



Tested by:

Heng Aiping
(Engineer)

Date

Mar. 06, 2019

Approved by:

Wei Yanquan
(Chief Engineer)

Date

Mar. 06, 2019

Report No.: BL-SZ1910250-601

EUT Name: 8BitDo M30 2.4G wireless gamepad

Model Name: 81CA (refer section 2.4)

Brand Name: 8BITDO

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AOWF-24GM30

Test Conclusion: Pass

Test Date: Jan. 16, 2019 ~ Feb. 21, 2019

Date of Issue: Mar. 06, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions</u>
<u>Rev. 01</u>	<u>Mar. 04, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Mar. 06, 2019</u>	<u>Updated section A.9</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	6
1.1	Identification of the Testing Laboratory	6
1.2	Identification of the Responsible Testing Location	6
1.3	Laboratory Condition	6
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Ancillary Equipment	7
2.6	Technical Information	8
2.7	Additional Instructions	10
3	SUMMARY OF TEST RESULTS	11
3.1	Test Standards	11
3.2	Verdict	12
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments	13
4.2	Test Equipment List	13
4.3	Description of Test Setup	15
4.3.1	For Antenna Port Test	15
4.3.2	For AC Power Supply Port Test	15
4.3.3	For Radiated Test (Below 30 MHz)	16
4.3.4	For Radiated Test (30 MHz-1 GHz)	16
4.3.5	For Radiated Test (Above 1 GHz)	17
4.4	Measurement Results Explanation Example	18

4.4.1	For conducted test items:	18
4.4.2	For radiated band edges and spurious emission test:	18
5	TEST ITEMS	19
5.1	Antenna Requirements	19
5.1.1	Relevant Standards	19
5.1.2	Antenna Anti-Replacement Construction	19
5.1.3	Antenna Gain	19
5.2	Number of Hopping Frequency	20
5.2.1	Limit	20
5.2.2	Test Setup	20
5.2.3	Test Procedure	20
5.2.4	Test Result	20
5.3	Peak Output Power	21
5.3.1	Test Limit	21
5.3.2	Test Setup	21
5.3.3	Test Procedure	21
5.3.4	Test Result	21
5.4	Occupied Bandwidth	22
5.4.1	Limit	22
5.4.2	Test Setup	22
5.4.3	Test Procedure	22
5.4.4	Test Result	22
5.5	Carrier Frequency Separation	23
5.5.1	Limit	23
5.5.2	Test Setup	23
5.5.3	Test Procedure	23
5.5.4	Test Result	23
5.6	Time of Occupancy (Dwell time)	24
5.6.1	Limit	24
5.6.2	Test Setup	24
5.6.3	Test Procedure	24
5.6.4	Test Result	24

5.7	Conducted Spurious Emission & Authorized-band band-edge.....	25
5.7.1	Limit.....	25
5.7.2	Test Setup.....	25
5.7.3	Test Procedure.....	25
5.7.4	Test Result.....	25
5.8	Conducted Emission.....	26
5.8.1	Limit.....	26
5.8.2	Test Setup.....	26
5.8.3	Test Procedure.....	26
5.8.4	Test Result.....	26
5.9	Radiated Spurious Emission.....	27
5.9.1	Limit.....	27
5.9.2	Test Setup.....	27
5.9.3	Test Procedure.....	27
5.9.4	Test Result.....	28
5.10	Band Edge (Restricted-band band-edge)	29
5.10.1	Limit.....	29
5.10.2	Test Setup	29
5.10.3	Test Procedure	29
5.10.4	Test Result	29
ANNEX A	TEST RESULT	30
A.1	Number of Hopping Frequency.....	30
A.2	Peak Output Power and E.I.R.P	31
A.3	20 dB and 99% bandwidth.....	33
A.4	Hopping Frequency Separation	37
A.5	Average Time of Occupancy	38
A.6	Conducted Spurious Emissions & Authorized-band band-edge.....	40
A.7	Conducted Emissions.....	44
A.8	Radiated Emission.....	46
A.9	Band Edge (Restricted-band band-edge)	56
ANNEX B	TEST SETUP PHOTOS	61
ANNEX C	EUT EXTERNAL PHOTOS	61

ANNEX D	EUT INTERNAL PHOTOS.....	61
---------	--------------------------	----

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN 8BITDO TECH CO., LTD.
Address	Room 210, Building 1, Nanhai Ecool, No.6 Xinghua Road, Shekou, Nanshan District, Shenzhen

2.2 Manufacturer Information

Manufacturer	Shenzhen Zhongxingda Electronic Co., Ltd.
Address	3-4/F, Bldg 10, Tongfuyu Industrial Zone, Lezhujiao Village, Xixiang, Baoan District, Shenzhen

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Type	8BitDo M30 2.4G wireless gamepad
Model Name Under Test	81CA
Series Model Name	81C
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only different on appearance color and screen printing.
Hardware Version	1.0
Software Version	1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	RYX
	Model No.	451860P
	Serial No.	N/A
	Capacity	480 mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	4.2 V
Ancillary Equipment 2	USB Cable	
	Length (Approx.)	1.0 m

2.6 Technical Information

Network and Wireless connectivity	2.4G ISM Band (GFSK modulation)
-----------------------------------	---------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	0.25 Mbps
Frequency Range	The frequency range used is 2405.5 MHz – 2475 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of channel	140 (See note 1)
Tested Channel	Low channel (2405.5 MHz), Middle channel(2437.5 MHz), High channel (2475 MHz)
Antenna Type	PCB Antenna
Antenna Gain	-2 dBi (In test items related to antenna gain, the final results reflect this figure.)
Adaptive or non-adaptive	non-adaptive
The Max RF Output power	0.93 dBm

Channel List

Number	Frequency (MHz)	Number	Frequency (MHz)
1	2405.5(Low)	9	2445
2	2409	10	2450
3	2413	11	2453
4	2425	12	2457
5	2429	13	2461
6	2432	14	2465
7	2435	15	2469
8	2437.5(Middle)	16	2475(High)

Note: The modulation is GFSK with FHSS, there are total 140 channels (frequency range is 2405.5-2475MHz, channel step is 0.5MHz, totally 140 channels), when this part works, it will choose 16 channels, each channel band width is 1MHz, if one channel is chosen, adjacent two channels cannot be chosen to make sure step of working channels is more than 1MHz. there are two antennas in this part, they are same and work alternatively But in this report, the equipment select the lowest, middle and highest channel from 140 channels, Which are 2405.5 MHz, 2437.5 MHz and 2475 MHz. The more information please refer to the manufacturer's instructions.

Test Case	Test Conditions			
	Modulation Technology	Modulation Type	Date rate	Channel
Number of Hopping Frequency	FHSS	GFSK	0.25 Mbps	Hopping
Peak Output Power	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Occupied Bandwidth	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Carrier Frequency Separation	FHSS	GFSK	0.25 Mbps	Hopping
Time of Occupancy (Dwell time)	FHSS	GFSK	0.25 Mbps	Hopping
Conducted Spurious Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Conducted Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Radiated Emission	FHSS	GFSK	0.25 Mbps	Low/Middle/High
Band Edge	FHSS	GFSK	0.25 Mbps	Low/High

2.7 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software		
Test Software Version	N/A	
Mode	Channel	Soft Set
GFSK	All	TX LEVEL is built-in set parameters and cannot be changed and selected.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note 1}
2	Number of Hopping Frequency	15.247(a)	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	ANNEX A.5	Pass
7	Conducted Spurious Emission& Authorized-band band-edge	15.247(d)	ANNEX A.6	Pass
8	Conducted Emission	15.207	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	ANNEX A.8	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	ANNEX A.9	Pass
11	Receiver Spurious Emissions	--	--	N/A ^{Note 2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	20°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2018.06.11	2019.06.10
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.11	2019.06.10
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2018.11.06	2019.11.05
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	18141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2019.02.20	2021.02.19
Anechoic Chamber	EMC TECHNOLOGY LTD	21.1m*11.6m*7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2019.02.15	2020.02.14

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Amplifier	OPHIR RF	5273F	1016	2019.02.15	2020.02.14
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14


4.3 Description of Test Setup

4.3.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

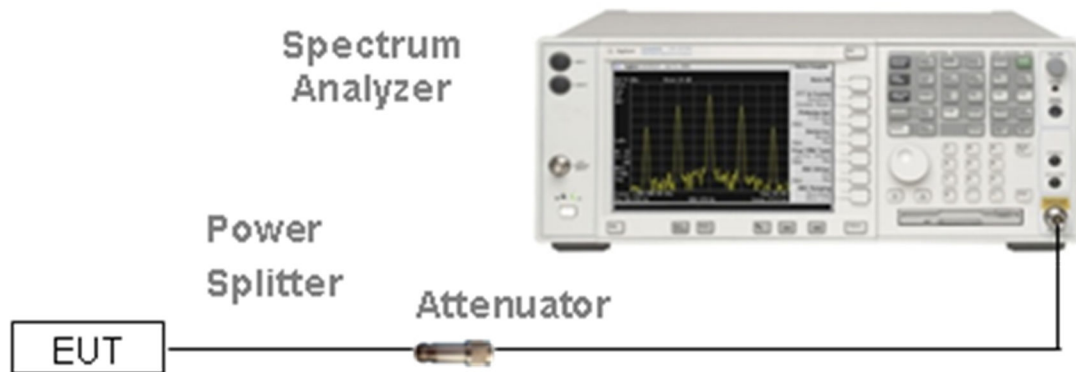


(Diagram 1)

4.3.2 For AC Power Supply Port Test

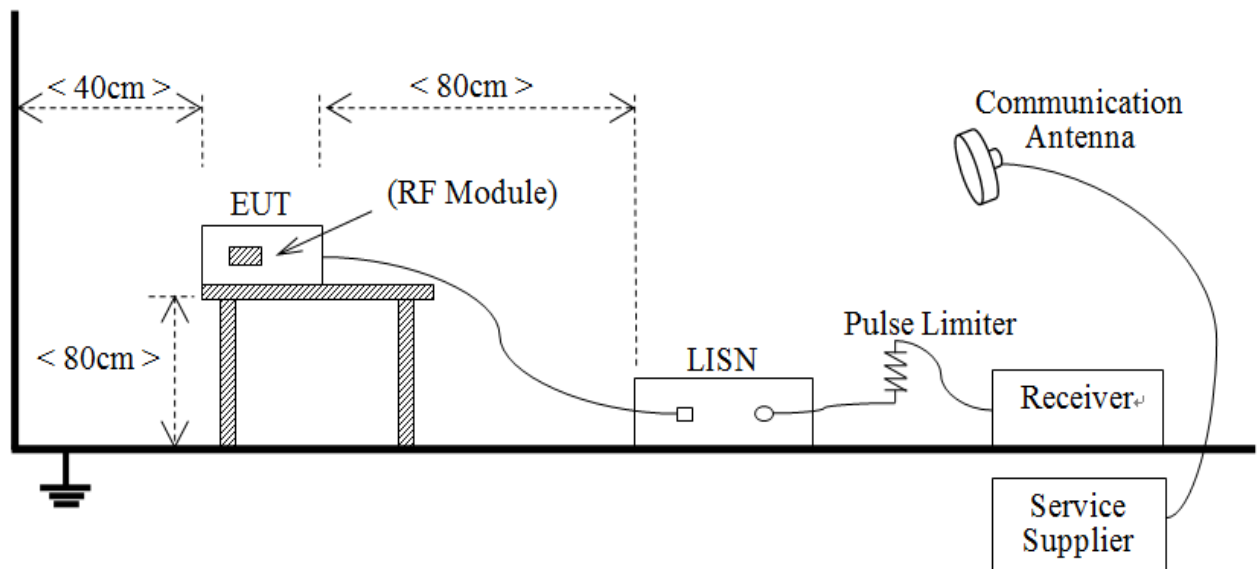


(Diagram 2)

4.3.3 For Radiated Test (Below 30 MHz)

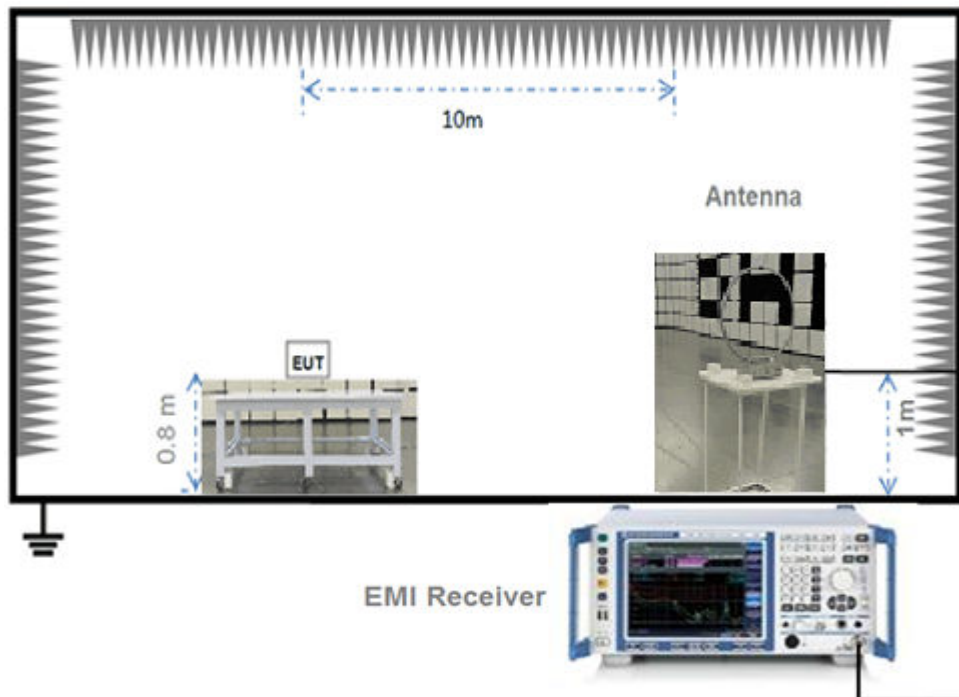


(Diagram 3)

4.3.4 For Radiated Test (30 MHz-1 GHz)

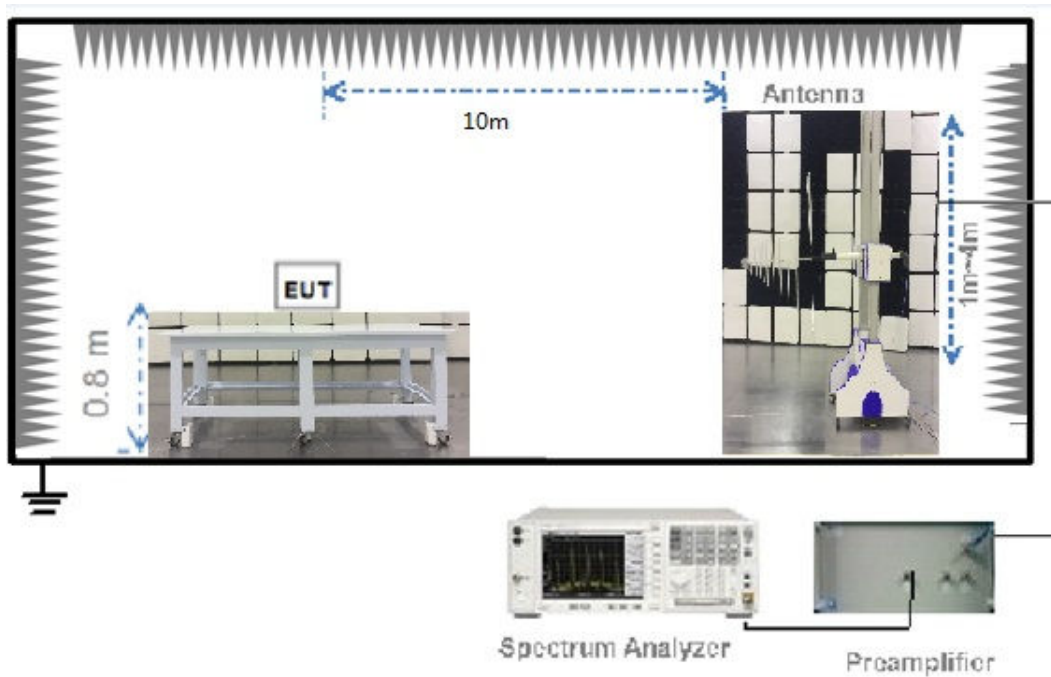

(Diagram 4)

4.3.5 For Radiated Test (Above 1 GHz)

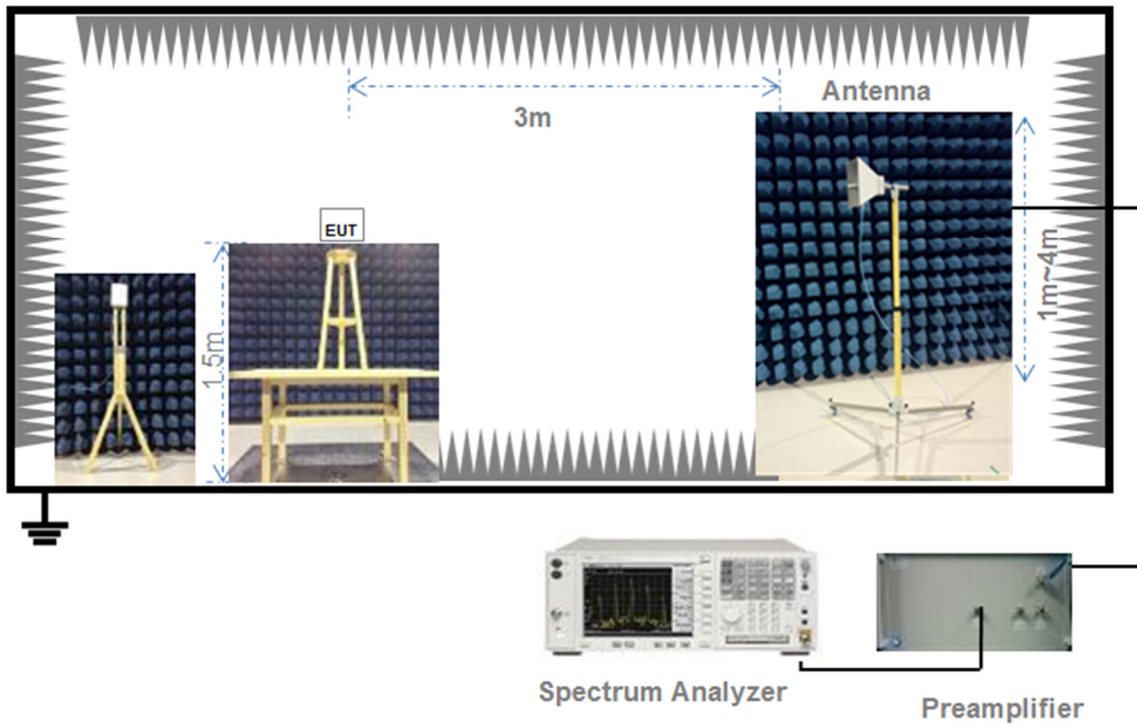

(Diagram 5)

4.4 Measurement Results Explanation Example

4.4.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.4.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log (\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log ((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

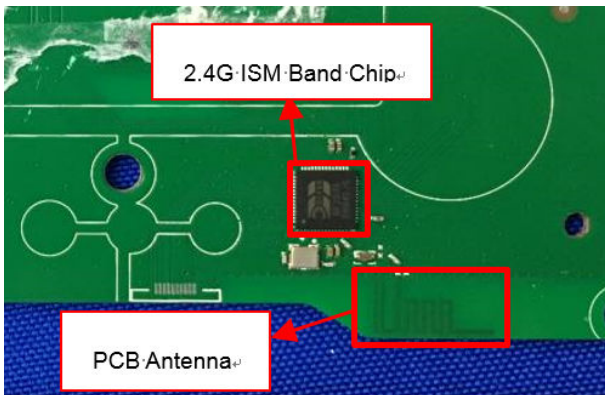Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (4)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (2)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (4)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	16	15	Pass

Test plots

GFSK 2.4 GHz ~ 2.4835 GHz

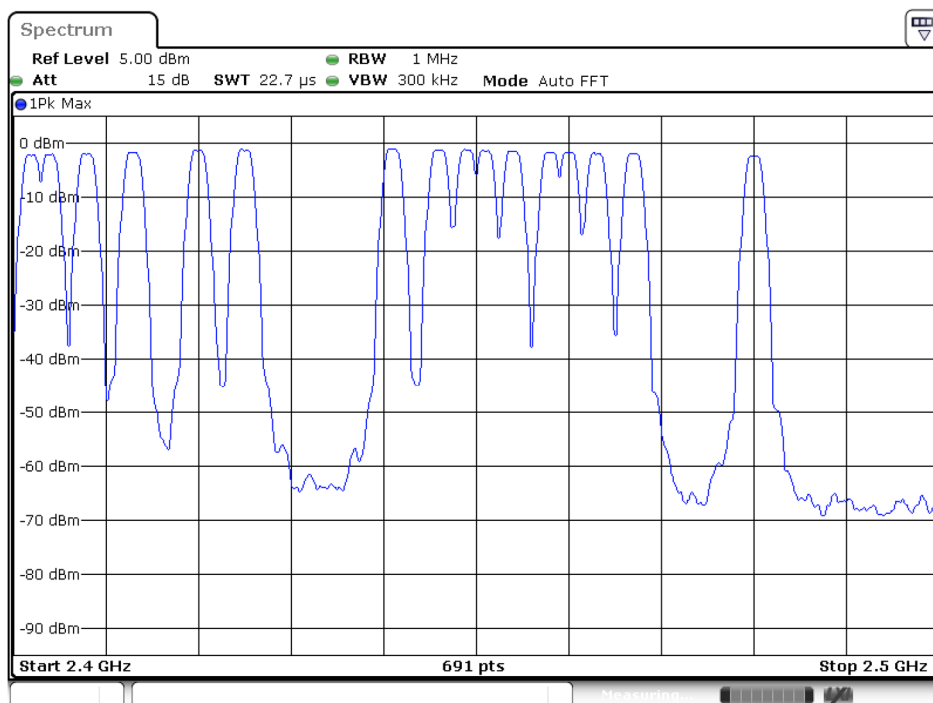


A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	-0.75	0.84	30	1000	Pass
Middle	0.93	1.24			Pass
High	-0.81	0.83			Pass


Test plots

GFSK LOW CHANNEL

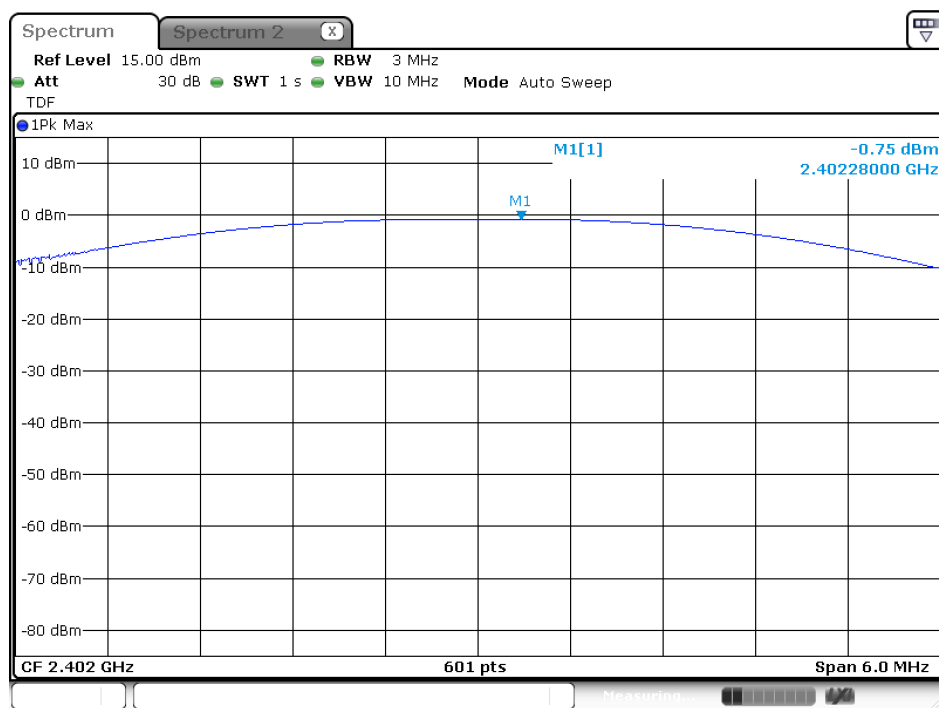


Date: 1.FEB.2019 19:43:42

GFSK MIDDLE CHANNEL

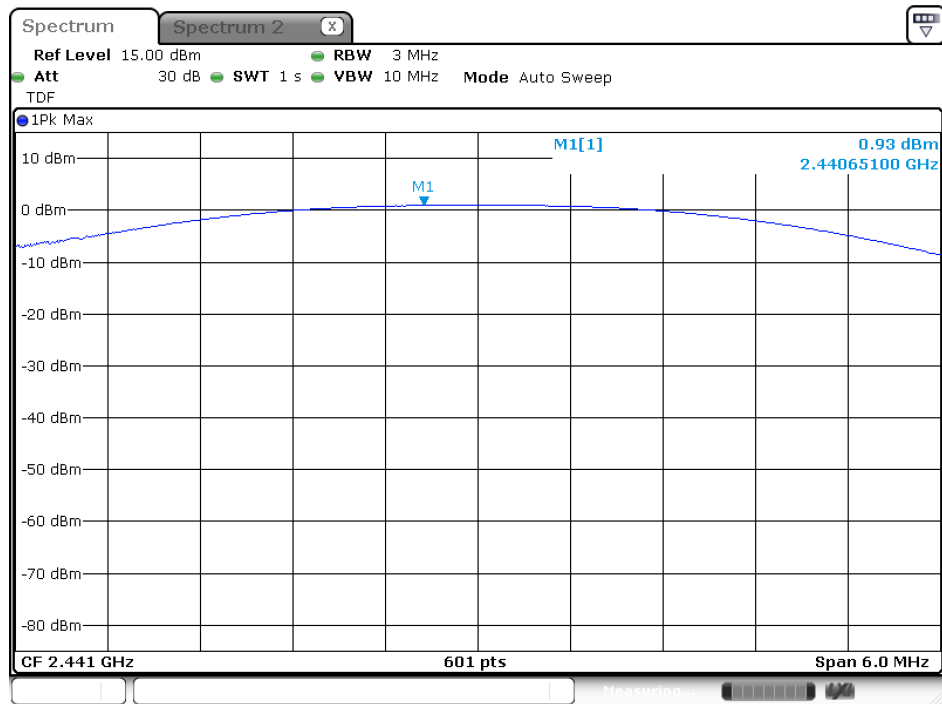

Date: 1.FEB.2019 19:44:05

GFSK HIGH CHANNEL

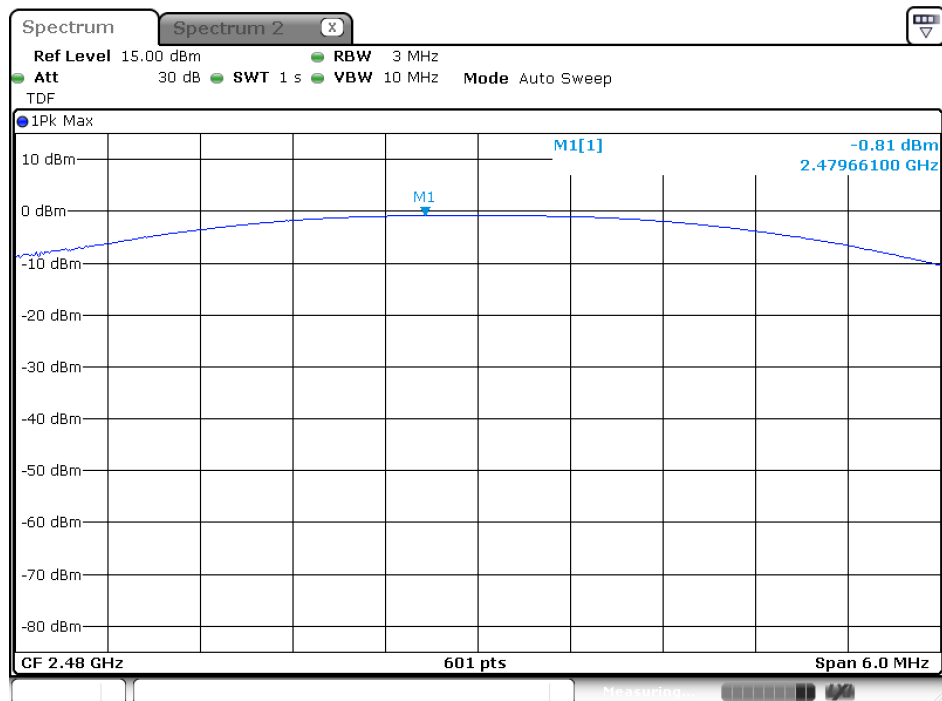

Date: 1.FEB.2019 19:44:28

A.3 20 dB and 99% bandwidth

Test Data


GFSK Mode:

Channel	20 dB Bandwidth (MHz)	99% Bandwidth (kHz)
Low	0.885986	0.792
Middle	0.900879	0.804
High	0.900879	0.804

Test plots


20 dB Bandwidth

GFSK LOW CHANNEL

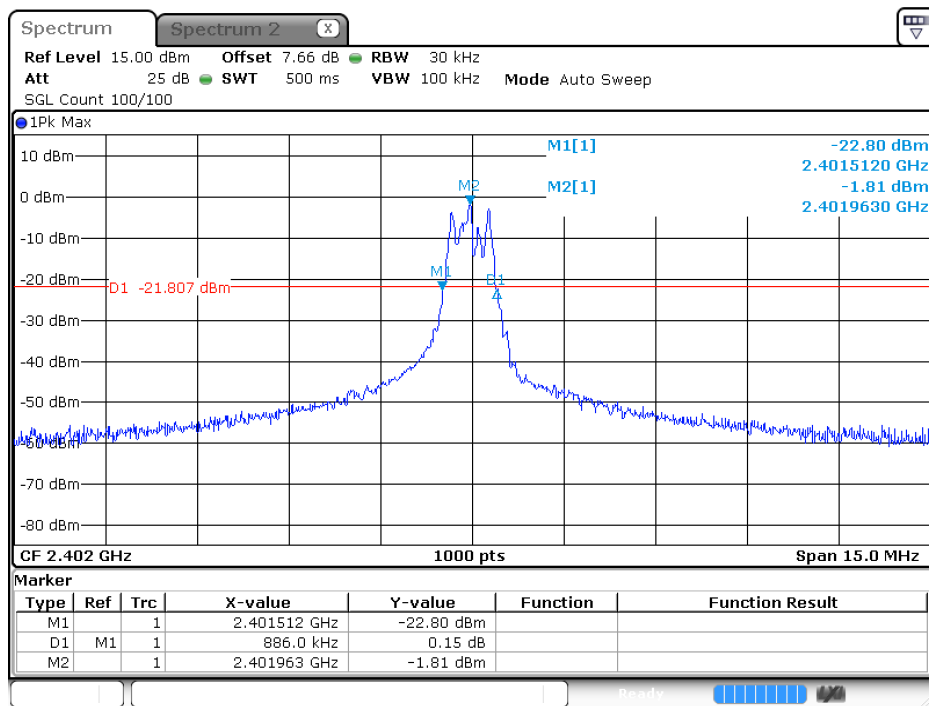


Date: 21.FEB.2019 14:00:54

GFSK MIDDLE CHANNEL

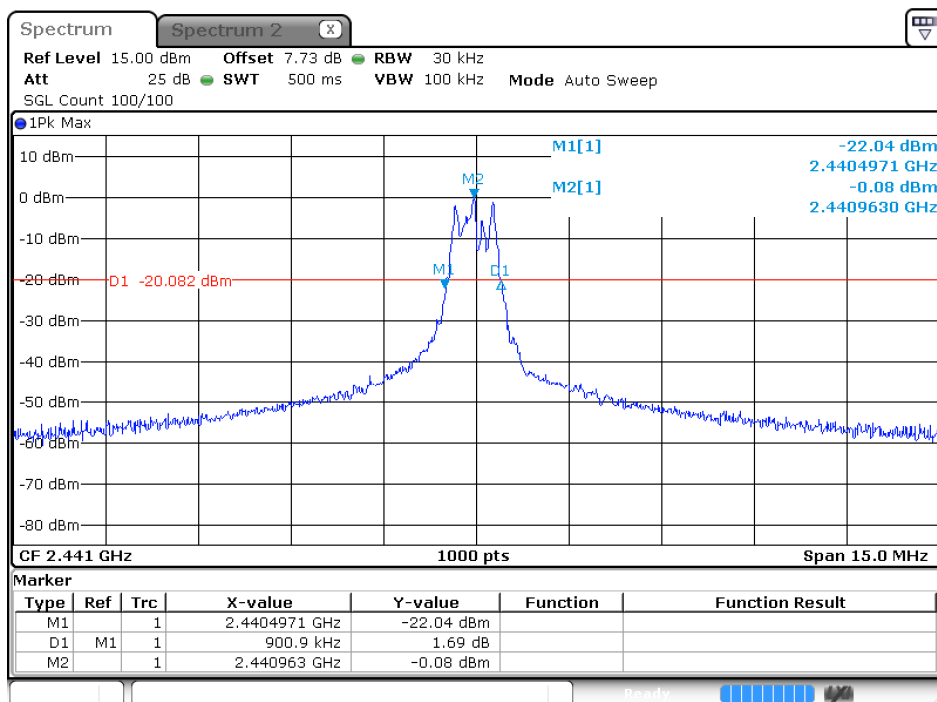

Date: 21.FEB.2019 14:03:58


GFSK HIGH CHANNEL

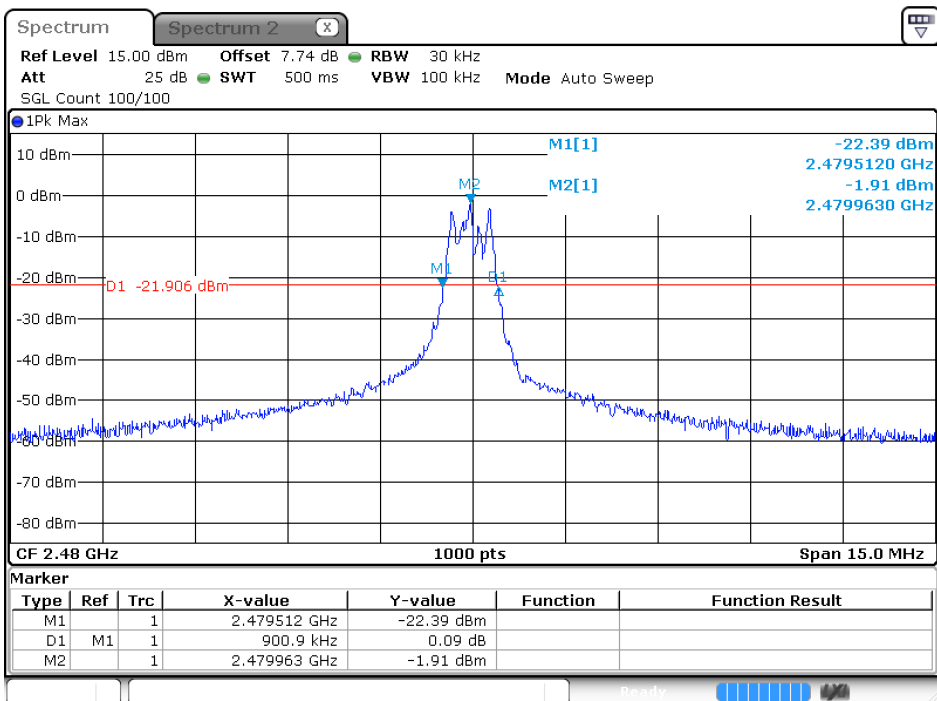

Date: 21.FEB.2019 14:05:08


99% Bandwidth

GFSK LOW CHANNEL

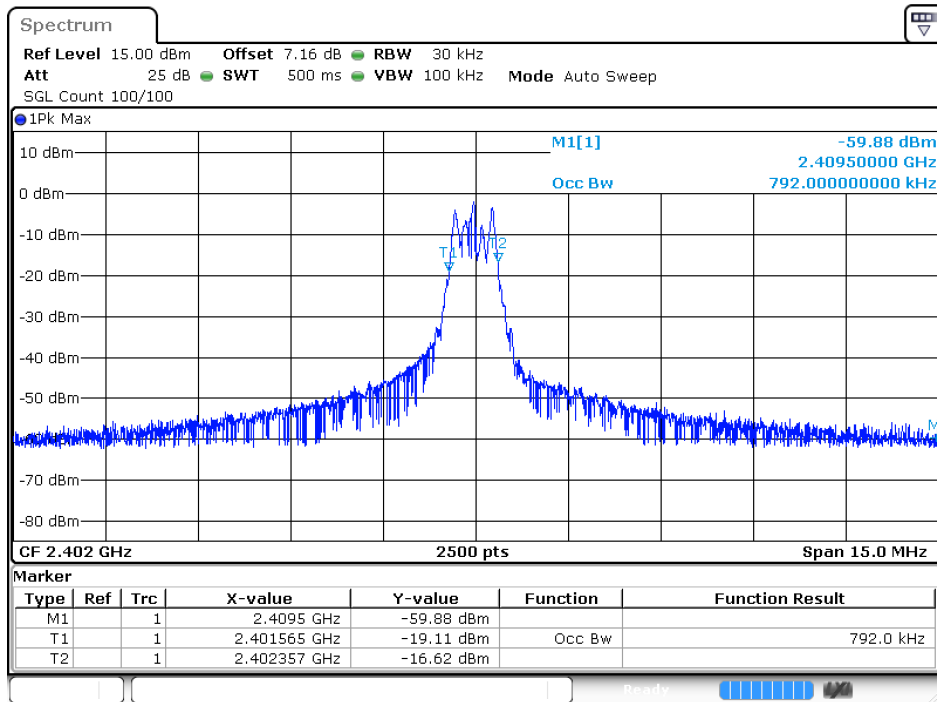


Date: 21.FEB.2019 16:11:39

GFSK MIDDLE CHANNEL

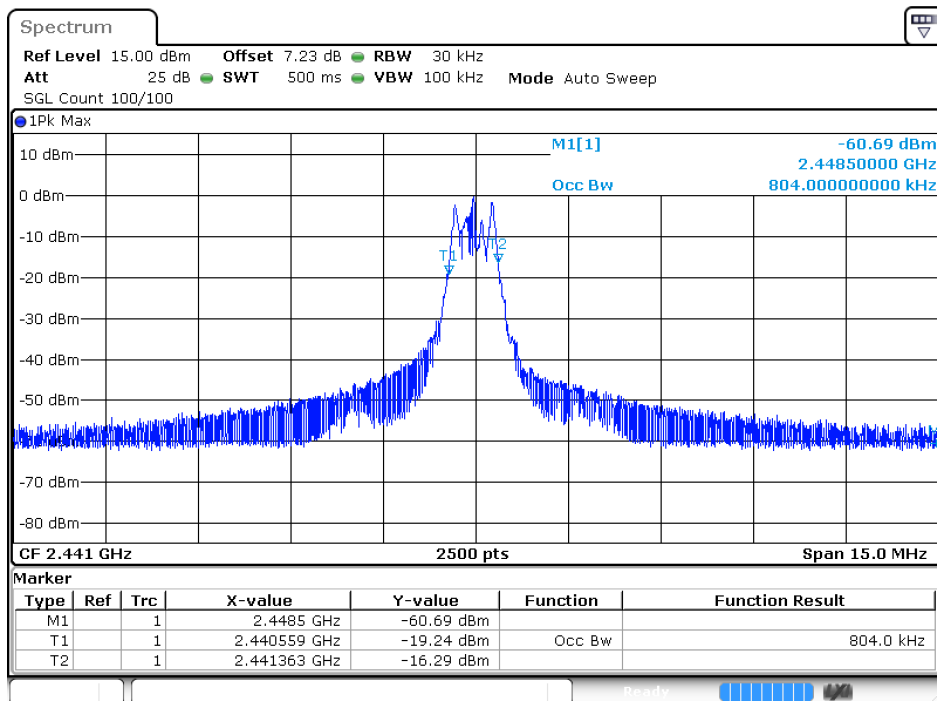

Date: 21.FEB.2019 16:13:11

GFSK HIGH CHANNEL

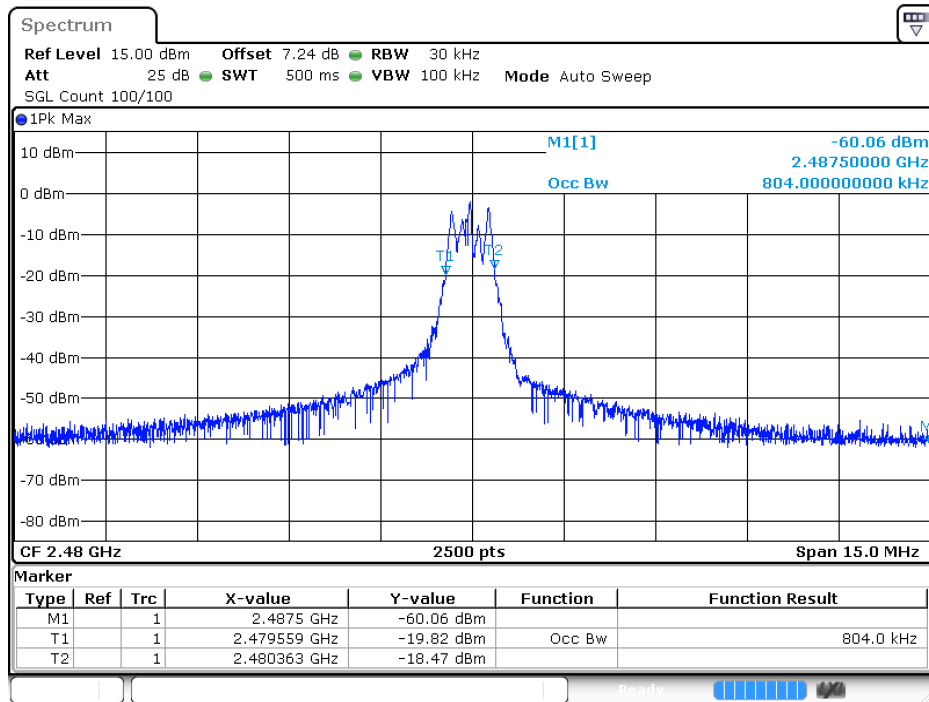

Date: 21.FEB.2019 16:14:17


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Verdict
GFSK	2.007	0.901	0.601	Pass

Test Plots

GFSK

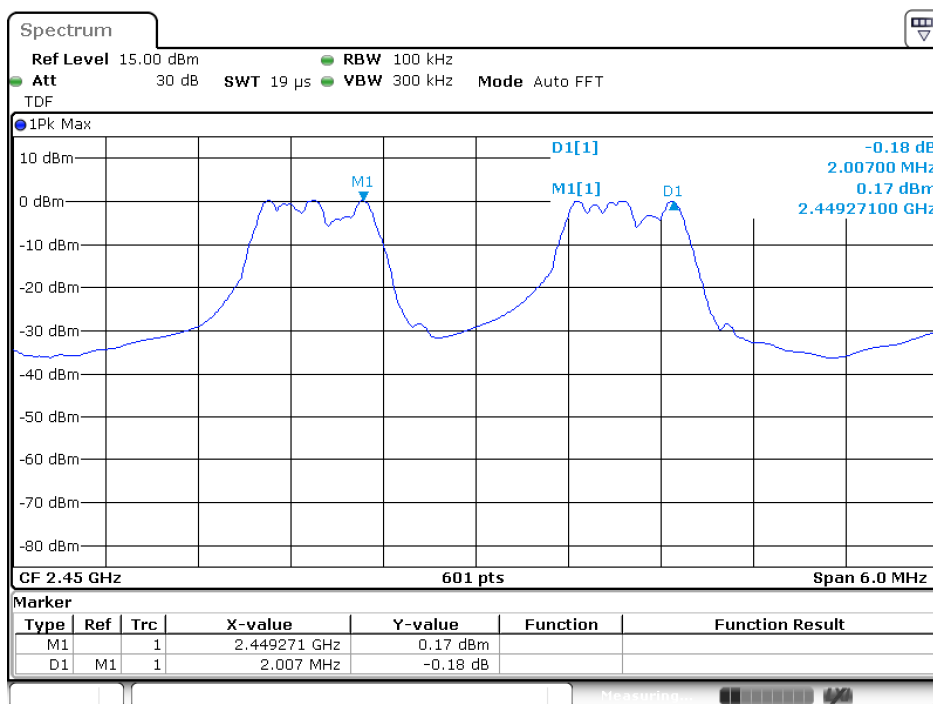

Date: 20.FEB.2019 21:56:17

A.5 Average Time of Occupancy


Test Data

GFSK Mode:

Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
4.6957	219.0059	0.4	Pass


Test Plots

GFSK 1

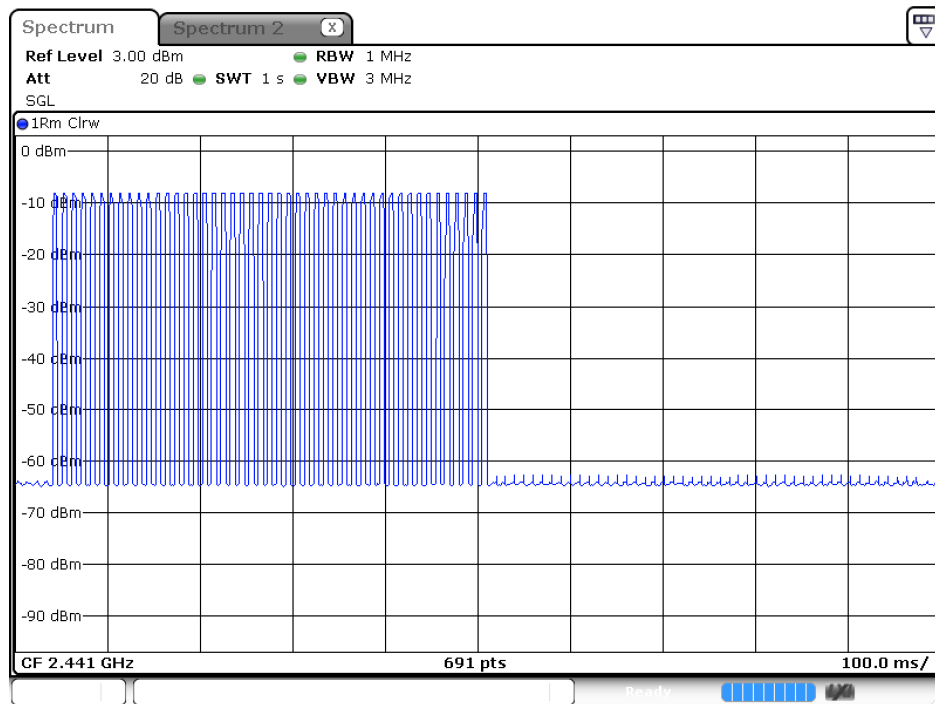


Date: 21.FEB.2019 13:01:36

GFSK 2

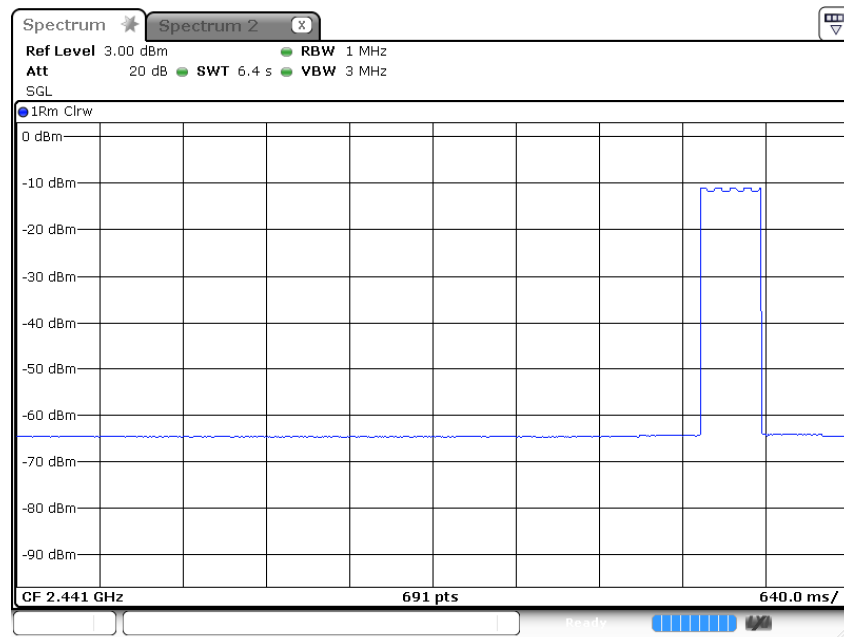

GFSK 3

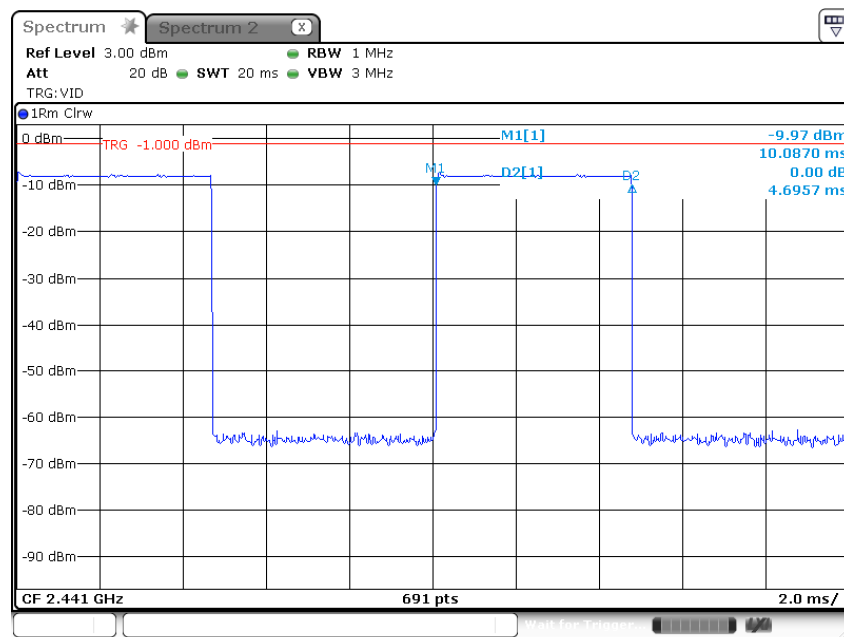

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-29.93	-0.46	-20.46	Pass
Middle	-42.93	1.16	-18.84	Pass
High	-34.75	-0.23	-20.23	Pass

Hopping Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-27.41	0.43	-19.57	Pass


Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

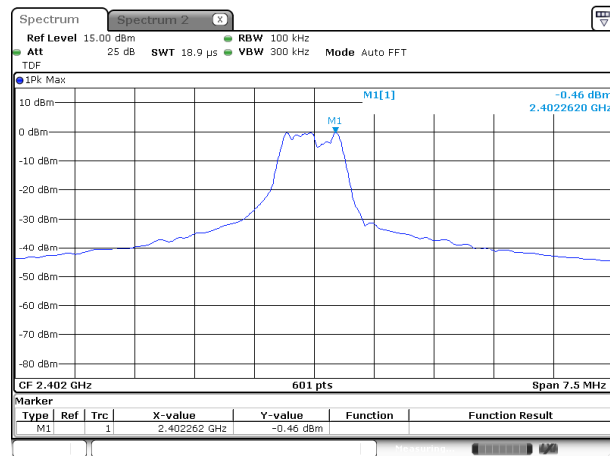


Date: 1.FEB.2019 19:46:33

GFSK LOW CHANNEL, BAND EDGE

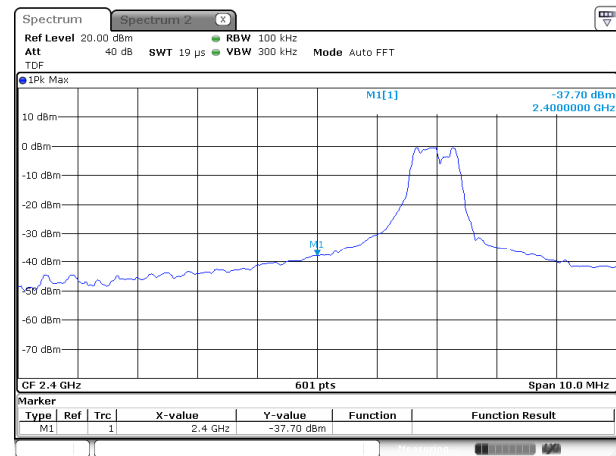


Date: 1.FEB.2019 19:47:39

GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

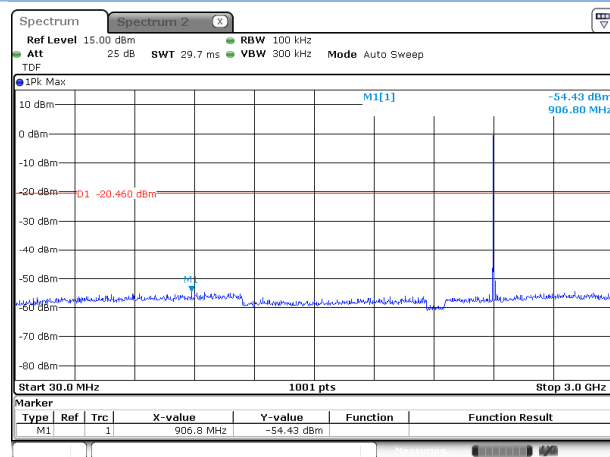


Date: 1.FEB.2019 19:47:16

GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

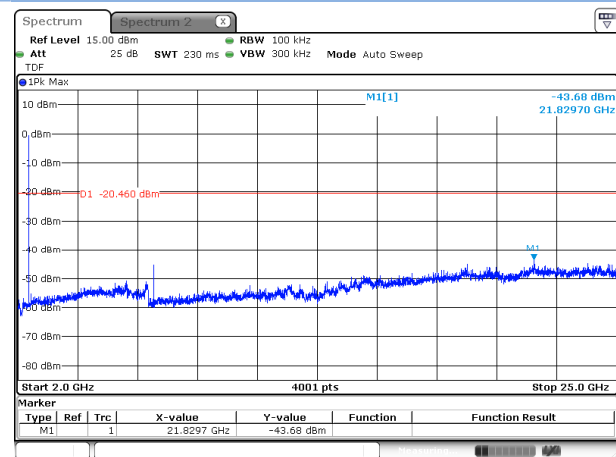


Date: 1.FEB.2019 19:47:28

GFSK MIDDLE CHANNEL, CARRIER LEVEL

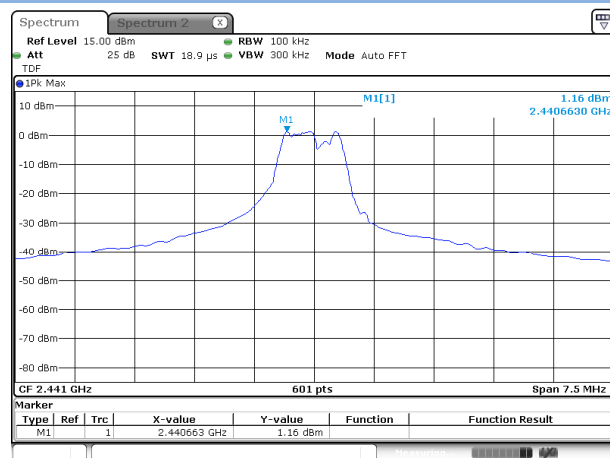


Date: 1.FEB.2019 19:49:52

GFSK MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

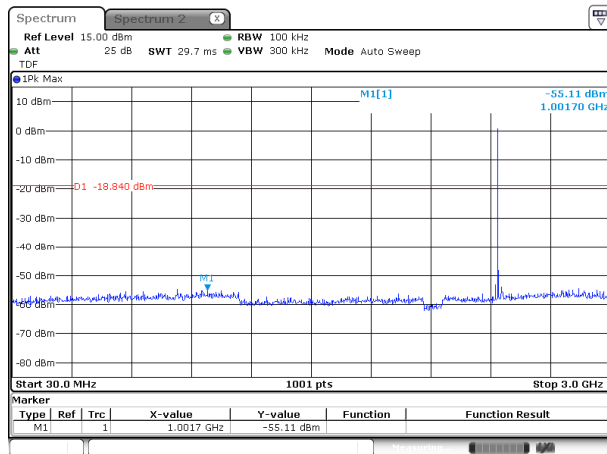


Date: 1.FEB.2019 19:50:36

GFSK MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

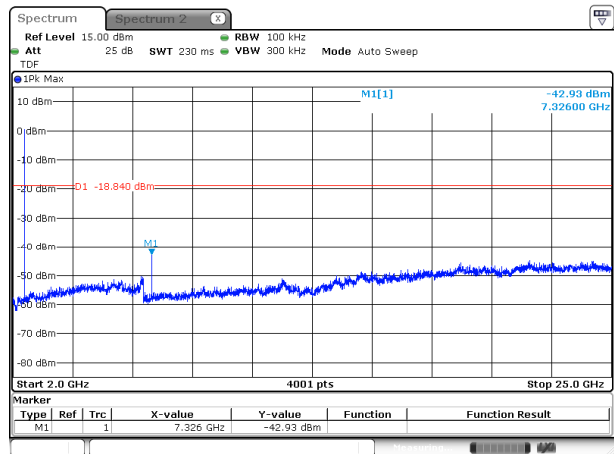


Date: 1.FEB.2019 19:50:52

GFSK HIGH CHANNEL, CARRIER LEVEL

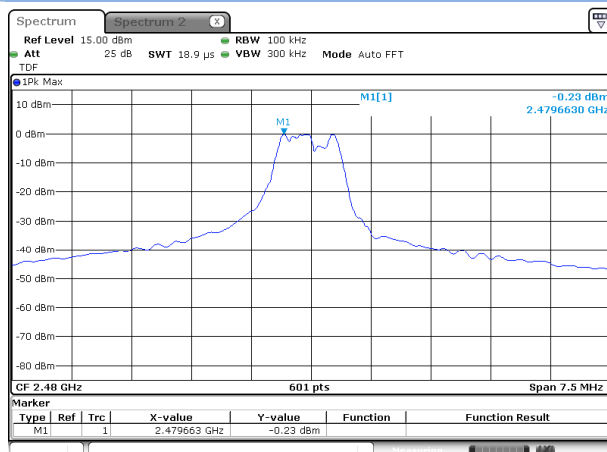


Date: 1.FEB.2019 19:52:24

GFSK HIGH CHANNEL , BAND EDGE

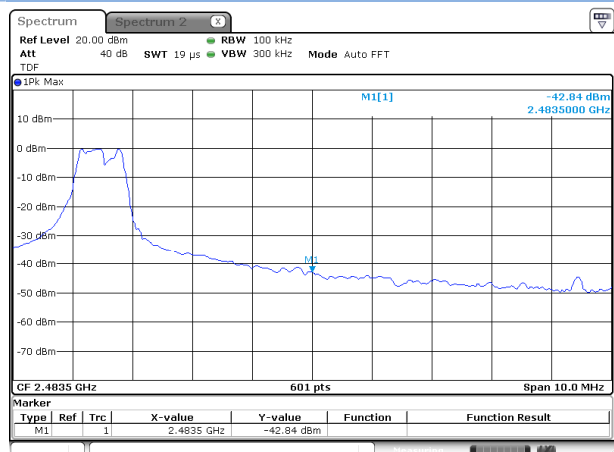


Date: 1.FEB.2019 19:53:20

GFSK HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

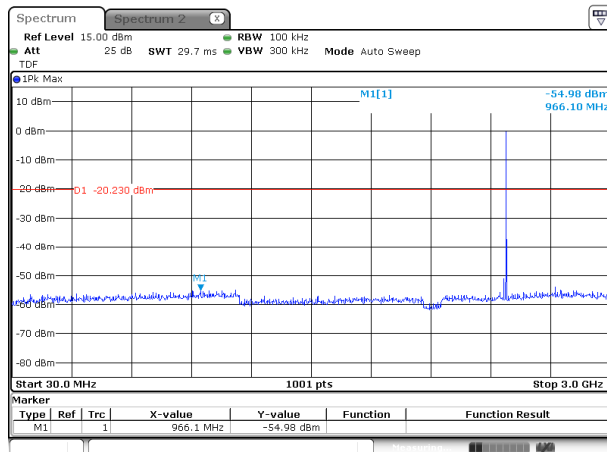


Date: 1.FEB.2019 19:52:53

GFSK HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

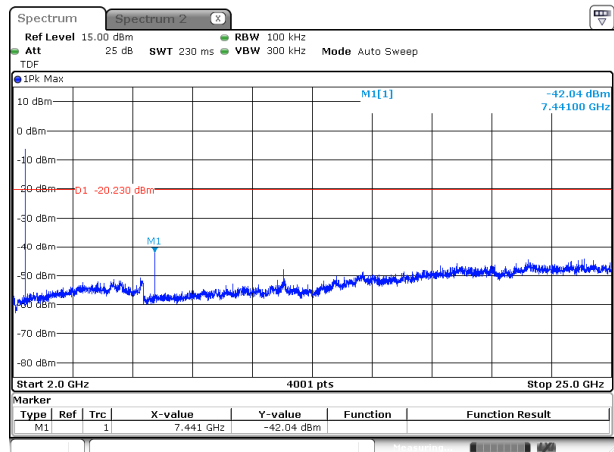


Date: 1.FEB.2019 19:53:03

GFSK HOPPING, CARRIER LEVEL

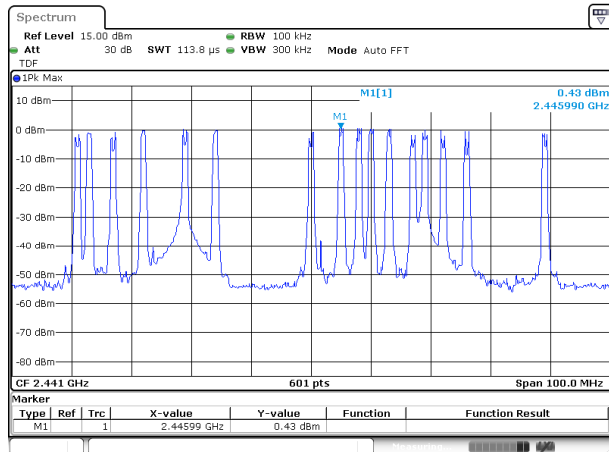


Date: 19.FEB.2019 20:32:23

GFSK HOPPING BAND EDGE (LOW)

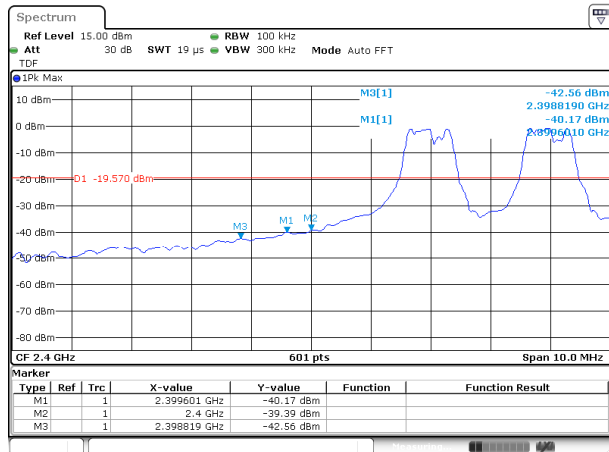


Date: 19.FEB.2019 20:35:26

GFSK HOPPING BAND EDGE (HIGH)

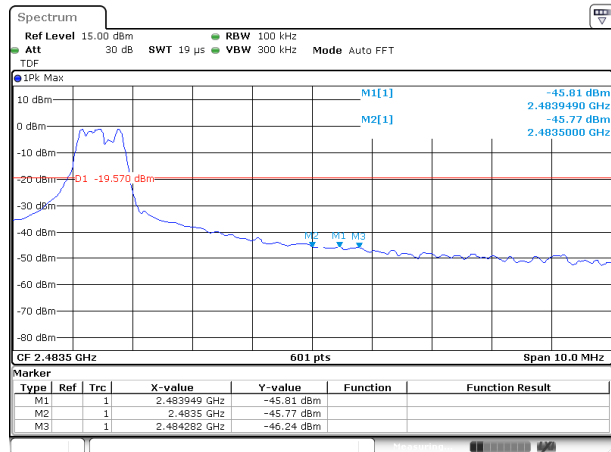


Date: 19.FEB.2019 20:36:25

GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

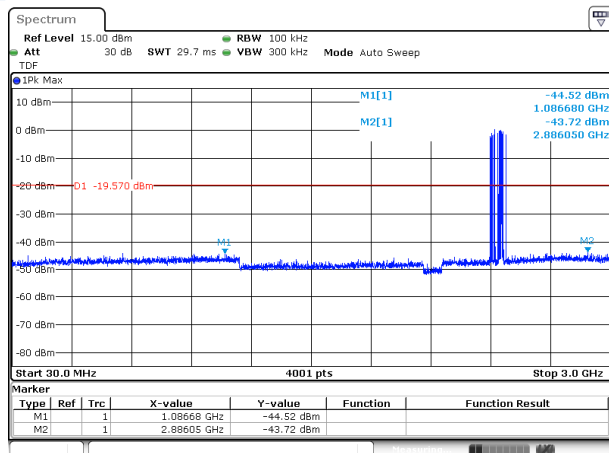

Date: 19.FEB.2019 20:33:42

GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

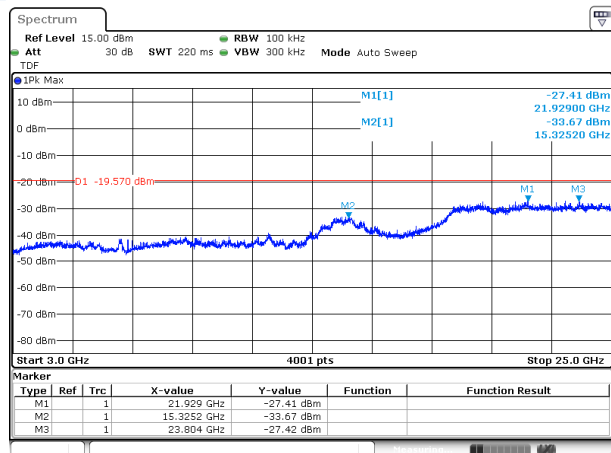


Date: 19.FEB.2019 20:34:29

A.7 Conducted Emissions

Note: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.


Test Data and Plots

PHASE L

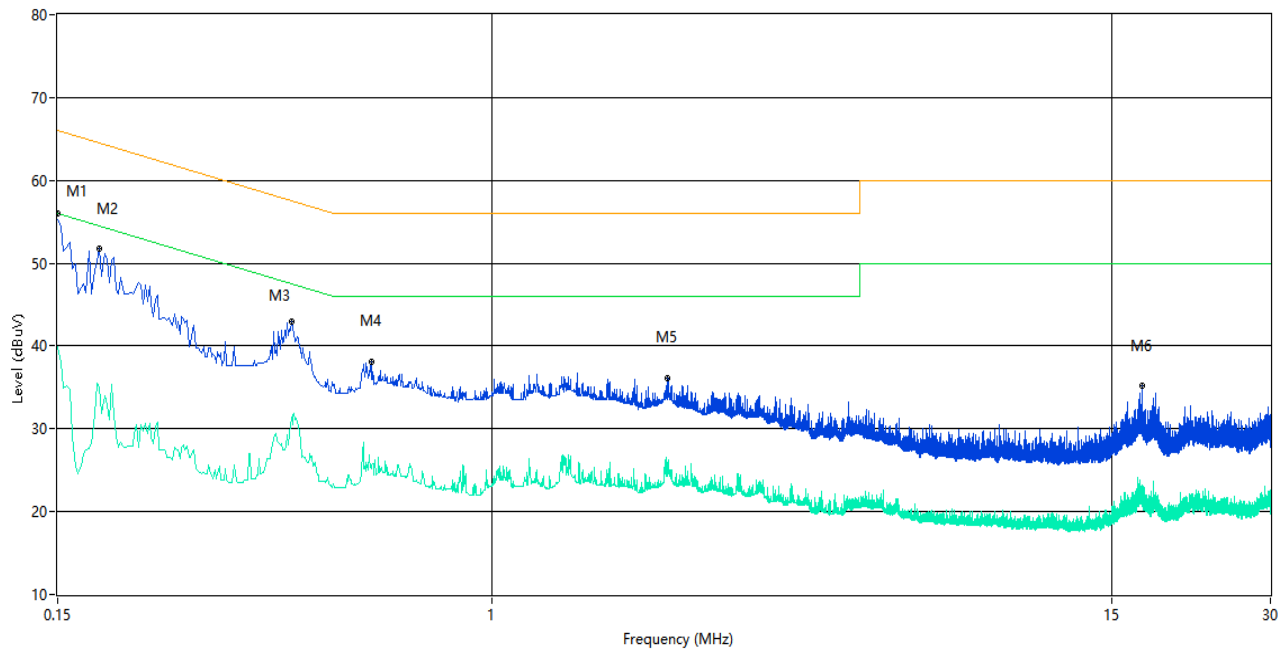

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	55.3	10.01	66.0	-10.70	Peak	L Line	Pass
1**	0.150	40.0	10.01	56.0	-16.00	AV	L Line	Pass
2	0.180	51.8	10.01	64.5	-12.70	Peak	L Line	Pass
2**	0.180	35.0	10.01	54.5	-19.50	AV	L Line	Pass
3	0.416	42.9	10.03	57.5	-14.60	Peak	L Line	Pass
3**	0.416	31.4	10.03	47.5	-16.10	AV	L Line	Pass
4	0.592	38.1	10.02	56.0	-17.90	Peak	L Line	Pass
4**	0.592	25.5	10.02	46.0	-20.50	AV	L Line	Pass
5	2.158	36.0	10.07	56.0	-20.00	Peak	L Line	Pass
5**	2.158	25.5	10.07	46.0	-20.50	AV	L Line	Pass
6	17.172	35.3	10.22	60.0	-24.70	Peak	L Line	Pass
6**	17.172	22.4	10.22	50.0	-27.60	AV	L Line	Pass

PHASE N

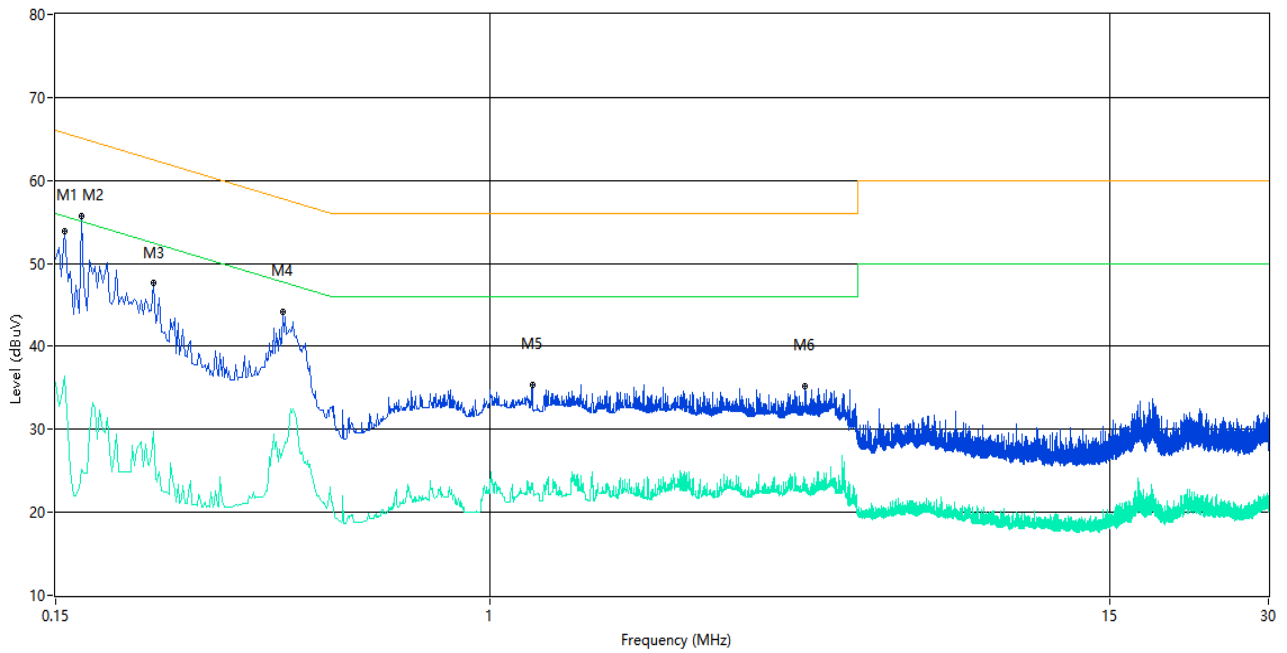

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	54.0	10.01	65.7	-11.70	Peak	N Line	Pass
1**	0.156	36.4	10.01	55.7	-19.30	AV	N Line	Pass
2	0.168	55.8	10.01	65.1	-9.30	Peak	N Line	Pass
2**	0.168	25.2	10.01	55.1	-29.90	AV	N Line	Pass
3	0.230	47.7	10.01	62.4	-14.70	Peak	N Line	Pass
3**	0.230	29.8	10.01	52.4	-22.60	AV	N Line	Pass
4	0.404	44.2	10.02	57.8	-13.60	Peak	N Line	Pass
4**	0.404	27.6	10.02	47.8	-20.20	AV	N Line	Pass
5	1.204	35.3	10.05	56.0	-20.70	Peak	N Line	Pass
5**	1.204	23.3	10.05	46.0	-22.70	AV	N Line	Pass
6	3.954	35.2	10.09	56.0	-20.80	Peak	N Line	Pass
6**	3.954	24.0	10.09	46.0	-22.00	AV	N Line	Pass

A.8 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: All configurations have been tested, only the worst configuration (GFSK High Channel) shown here.


Note⁴: The spurious from 18G to the 10th harmonic of the fundamental frequency is noise only, do not show on the report.

Test Data and Plots

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

30 MHz to 1 GHz, ANT V


10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

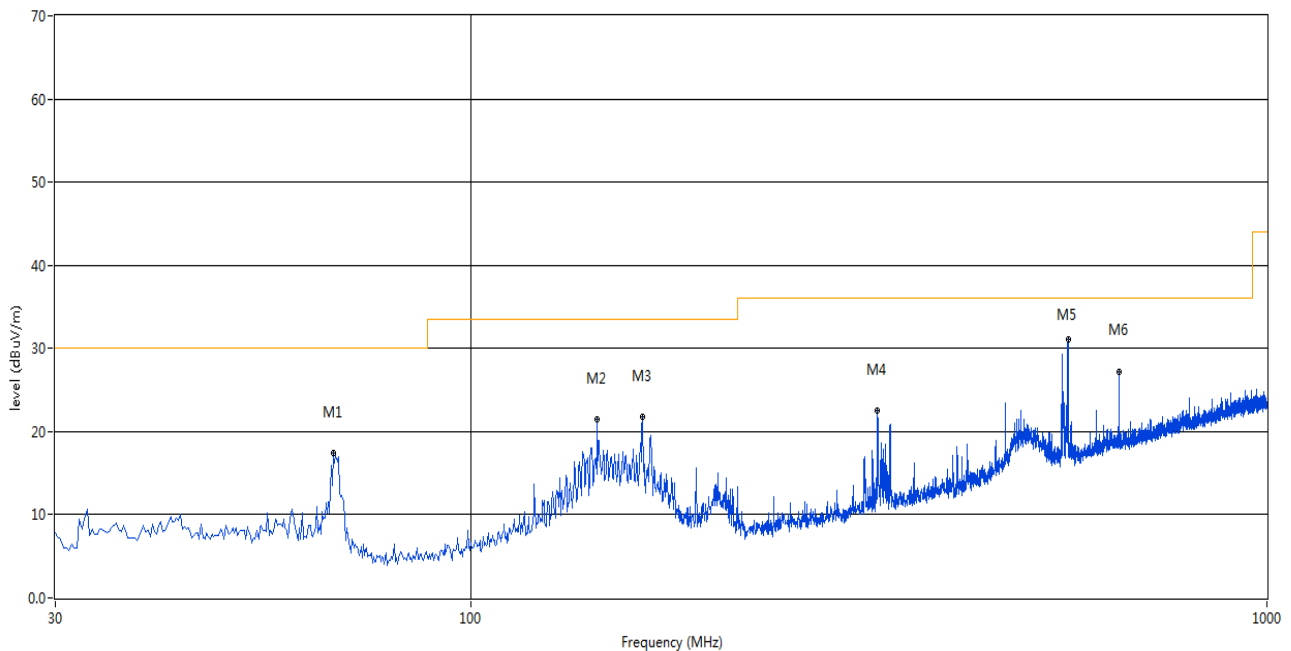

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	67.103	17.44	-29.22	30.0	-12.56	Peak	224.00	300	V	Pass
2	143.975	21.44	-26.14	33.5	-12.06	Peak	360.00	200	V	Pass
3	164.102	21.75	-26.20	33.5	-11.75	Peak	287.00	100	V	Pass
4	324.153	22.46	-24.76	36.0	-13.54	Peak	360.00	200	V	Pass
5	562.287	31.10	-19.19	36.0	-4.90	Peak	35.00	300	V	Pass
6	652.255	27.25	-16.97	36.0	-8.75	Peak	35.00	300	V	Pass

30 MHz to 1 GHz, ANT H

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

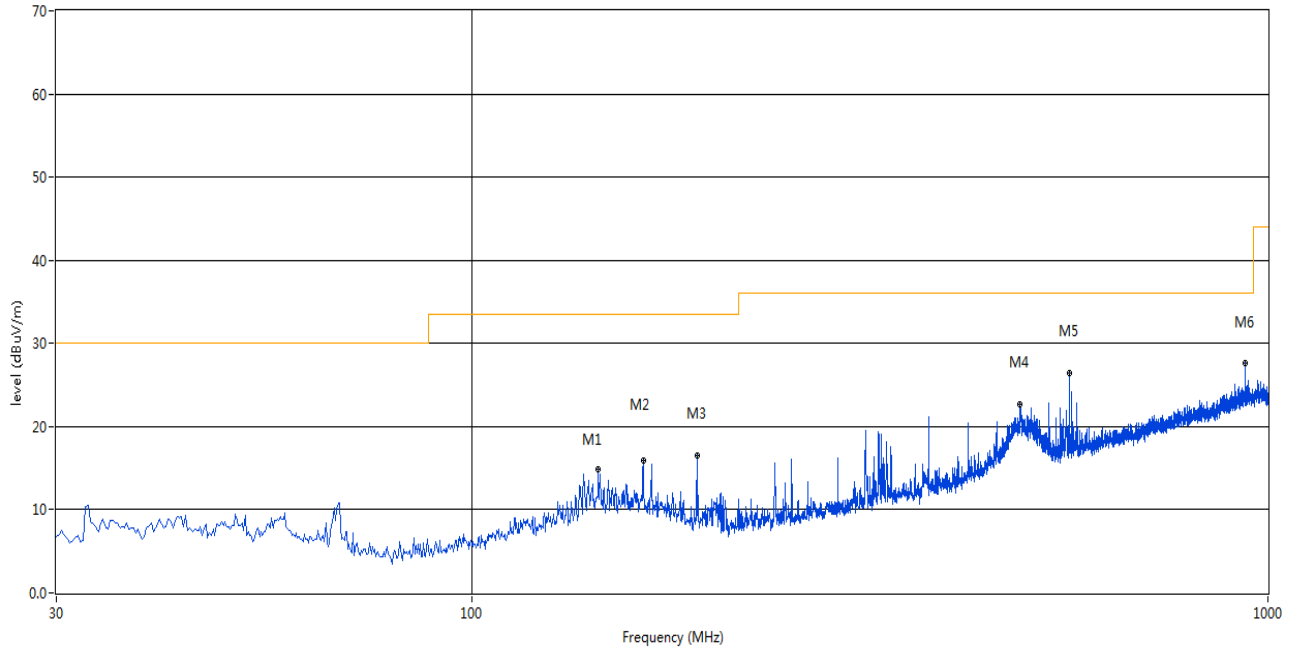


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	143.975	14.94	-26.14	33.5	-18.56	Peak	35.00	300	H	Pass
2	164.102	15.88	-26.20	33.5	-17.62	Peak	230.00	300	H	Pass
3	191.505	16.60	-29.08	33.5	-16.90	Peak	256.00	300	H	Pass
4	487.840	22.63	-21.07	36.0	-13.37	Peak	274.00	200	H	Pass
5	562.530	26.49	-19.17	36.0	-9.51	Peak	224.00	200	H	Pass
6	937.435	27.65	-11.68	36.0	-8.35	Peak	198.00	100	H	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Test Data and Plots (1 GHz ~ 10th Harmonic)

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

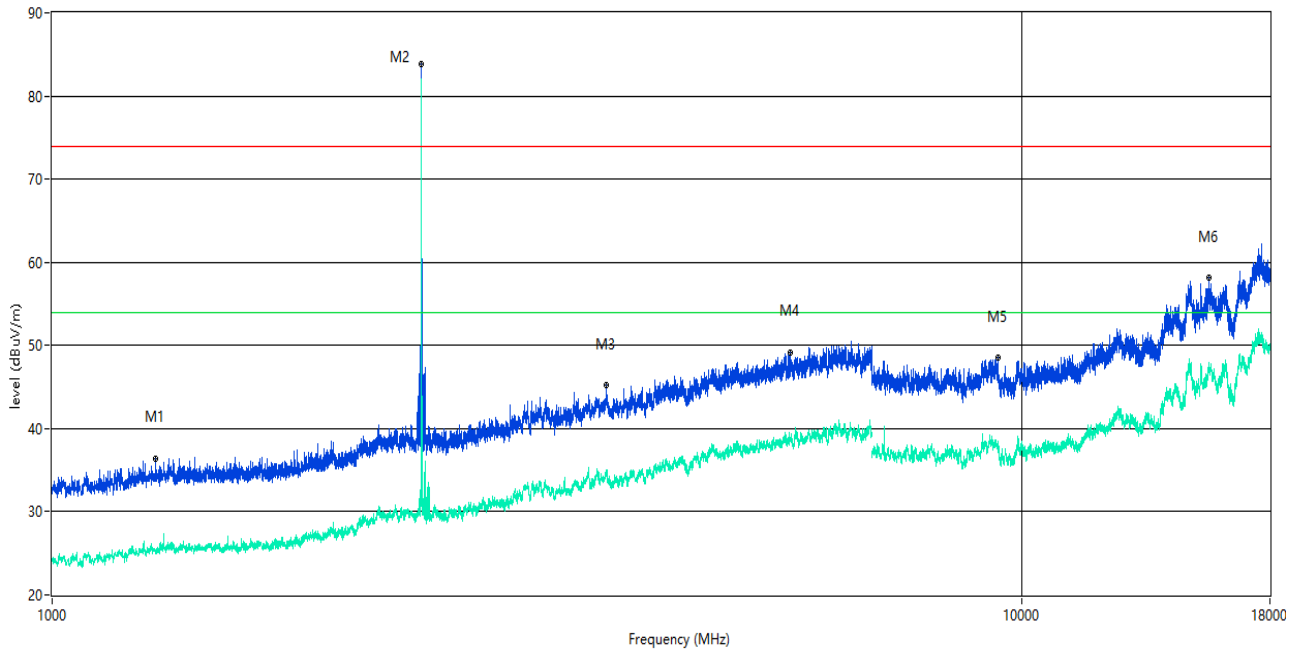

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1279.000	25.06	-15.01	54.0	-28.94	AV	0.00	150	V	Pass
1	1279.000	36.44	-15.01	74.0	-37.56	Peak	0.00	150	V	Pass
2**	2401.500	71.78	-10.44	54.0	17.78	AV	148.00	150	V	N/A
2	2401.500	83.81	-10.44	74.0	9.81	Peak	148.00	150	V	N/A
3**	3729.000	34.87	-4.70	54.0	-19.13	AV	57.00	150	V	Pass
3	3729.000	45.19	-4.70	74.0	-28.81	Peak	57.00	150	V	Pass
4**	5760.000	38.58	-0.11	54.0	-15.42	AV	139.00	150	V	Pass
4	5760.000	49.20	-0.11	74.0	-24.80	Peak	139.00	150	V	Pass
5**	9432.250	37.75	17.99	54.0	-16.25	AV	360.00	150	V	Pass
5	9432.250	48.54	17.99	74.0	-25.46	Peak	360.00	150	V	Pass
6**	15575.812	47.62	27.24	54.0	-6.38	AV	41.00	150	V	Pass
6	15575.812	58.15	27.24	74.0	-15.85	Peak	41.00	150	V	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

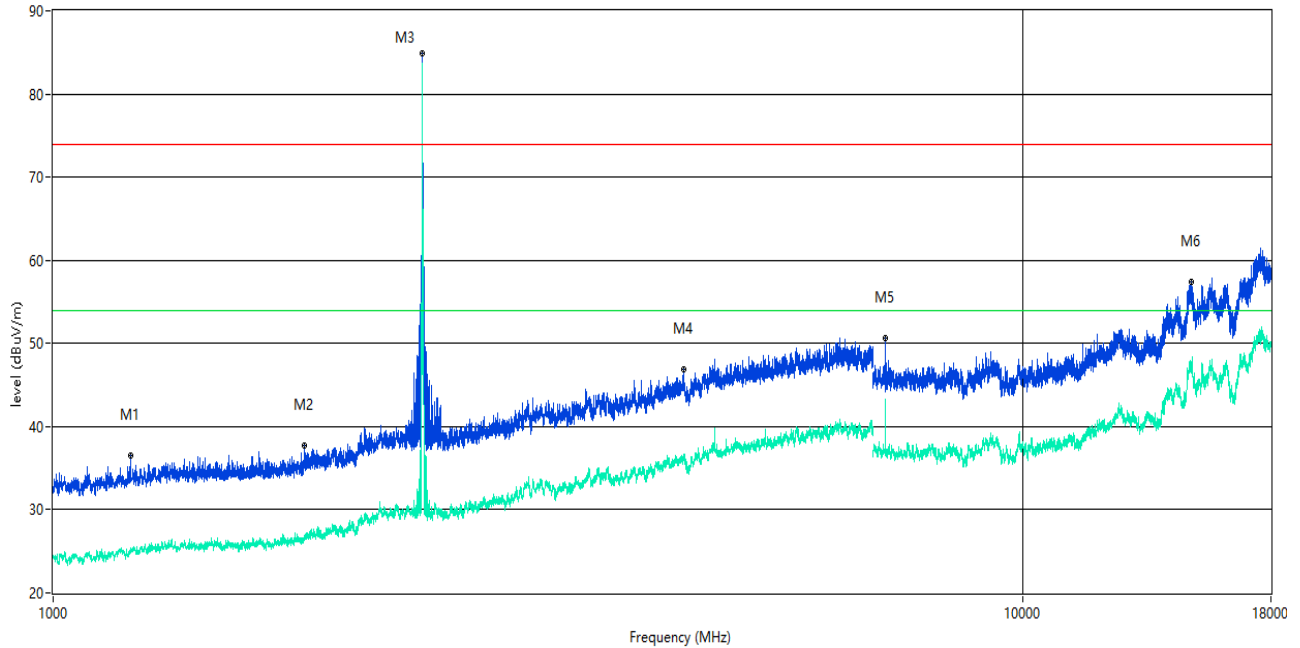

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1201.500	24.95	-15.20	54.0	-29.05	AV	151.00	150	H	Pass
1	1201.500	36.55	-15.20	74.0	-37.45	Peak	151.00	150	H	Pass
2**	1817.000	26.52	-14.84	54.0	-27.48	AV	305.00	150	H	Pass
2	1817.000	37.75	-14.84	74.0	-36.25	Peak	305.00	150	H	Pass
3**	2401.500	73.86	-10.44	54.0	19.86	AV	243.00	150	H	N/A
3	2401.500	84.96	-10.44	74.0	10.96	Peak	243.00	150	H	N/A
4**	4468.000	36.72	-2.70	54.0	-17.28	AV	3.00	150	H	Pass
4	4468.000	46.88	-2.70	74.0	-27.12	Peak	3.00	150	H	Pass
5**	7205.562	39.46	16.49	54.0	-14.54	AV	260.00	150	H	Pass
5	7205.562	50.59	16.49	74.0	-23.41	Peak	260.00	150	H	Pass
6**	14918.250	47.75	27.64	54.0	-6.25	AV	221.00	150	H	Pass
6	14918.250	57.34	27.64	74.0	-16.66	Peak	221.00	150	H	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

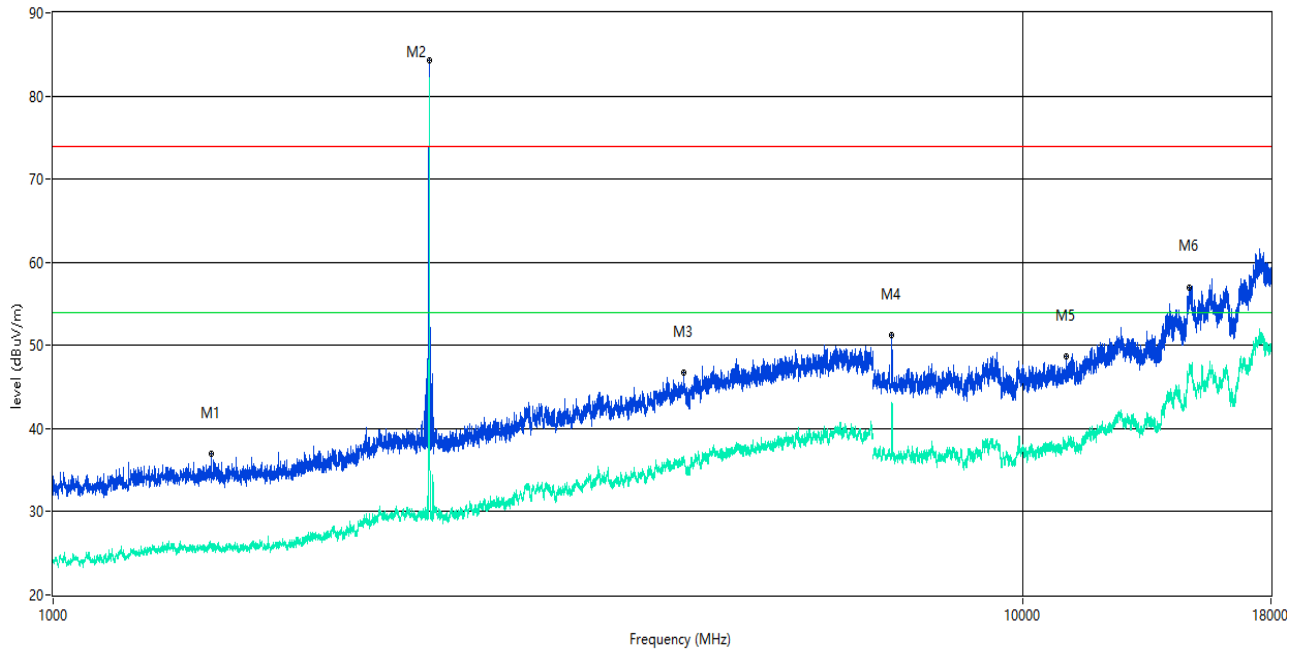

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1454.000	25.84	-14.94	54.0	-28.16	AV	224.00	150	V	Pass
1	1454.000	36.94	-14.94	74.0	-37.06	Peak	224.00	150	V	Pass
2**	2440.500	72.18	-10.95	54.0	18.18	AV	96.00	150	V	N/A
2	2440.500	84.26	-10.95	74.0	10.26	Peak	96.00	150	V	N/A
3**	4472.000	36.18	-2.63	54.0	-17.82	AV	263.00	150	V	Pass
3	4472.000	46.71	-2.63	74.0	-27.29	Peak	263.00	150	V	Pass
4**	7323.438	43.17	17.09	54.0	-10.83	AV	174.00	150	V	Pass
4	7323.438	51.26	17.09	74.0	-22.74	Peak	174.00	150	V	Pass
5**	11069.563	37.75	18.69	54.0	-16.25	AV	360.00	150	V	Pass
5	11069.563	48.68	18.69	74.0	-25.32	Peak	360.00	150	V	Pass
6**	14834.250	46.65	26.80	54.0	-7.35	AV	235.00	150	V	Pass
6	14834.250	57.01	26.80	74.0	-16.99	Peak	235.00	150	V	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

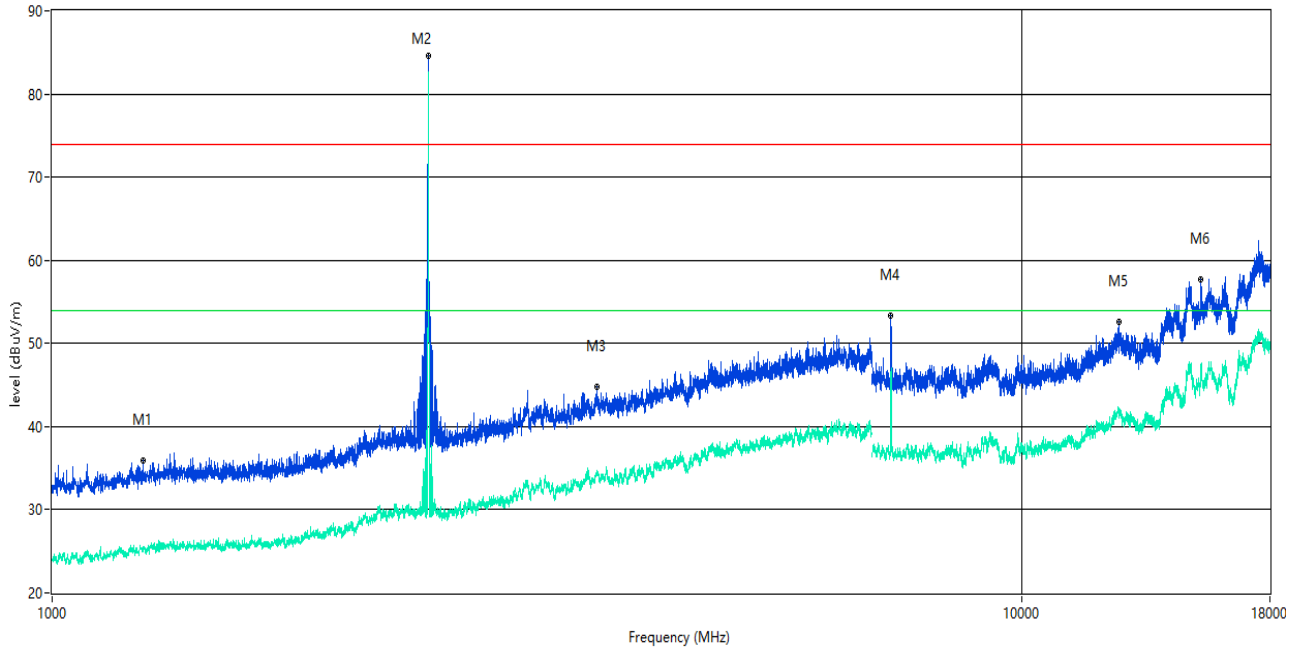

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1240.500	25.24	-14.87	54.0	-28.76	AV	216.00	150	H	Pass
1	1240.500	35.87	-14.87	74.0	-38.13	Peak	216.00	150	H	Pass
2**	2440.500	73.10	-10.95	54.0	19.10	AV	0.00	150	H	N/A
2	2440.500	84.53	-10.95	74.0	10.53	Peak	0.00	150	H	N/A
3**	3640.000	34.06	-5.16	54.0	-19.94	AV	214.00	150	H	Pass
3	3640.000	44.74	-5.16	74.0	-29.26	Peak	214.00	150	H	Pass
4**	7323.438	46.32	17.09	54.0	-7.68	AV	277.00	150	H	Pass
4	7323.438	53.35	17.09	74.0	-20.65	Peak	277.00	150	H	Pass
5**	12594.750	41.47	21.89	54.0	-12.53	AV	224.00	150	H	Pass
5	12594.750	52.53	21.89	74.0	-21.47	Peak	224.00	150	H	Pass
6**	15281.812	47.52	25.78	54.0	-6.48	AV	333.00	150	H	Pass
6	15281.812	57.64	25.78	74.0	-16.36	Peak	333.00	150	H	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

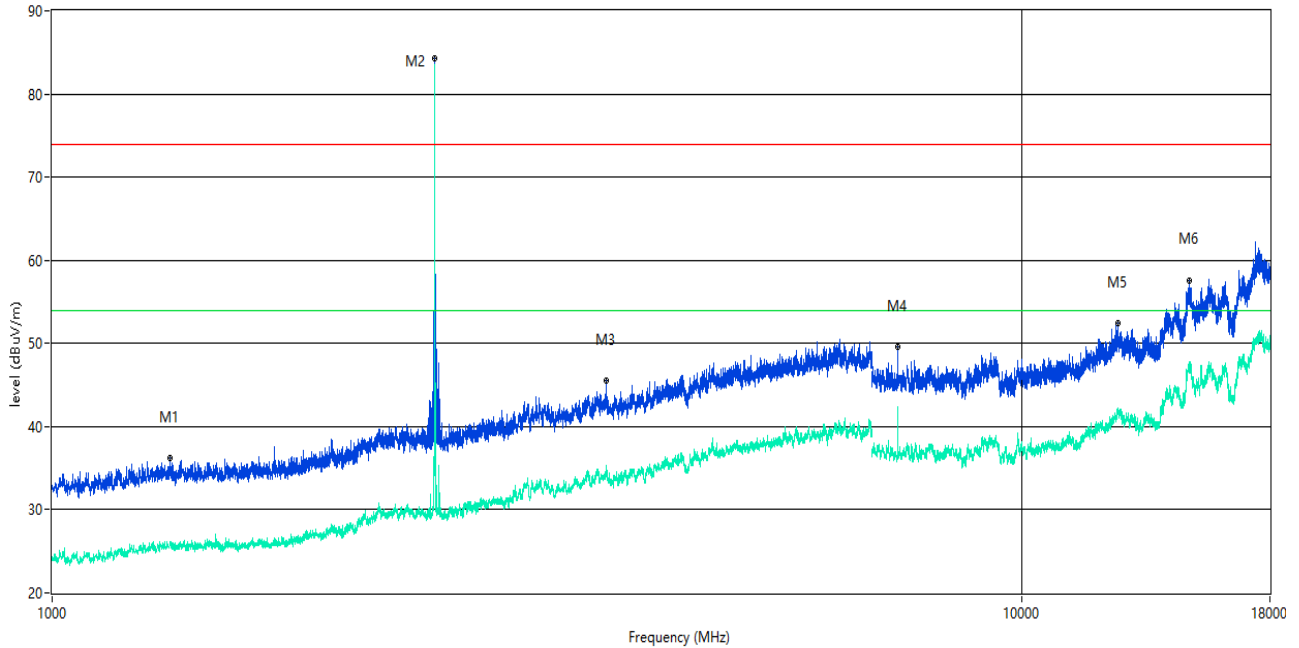

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1323.500	26.02	-14.76	54.0	-27.98	AV	0.00	150	V	Pass
1	1323.500	36.16	-14.76	74.0	-37.84	Peak	0.00	150	V	Pass
2**	2480.000	80.84	-10.01	54.0	26.84	AV	112.00	150	V	N/A
2	2480.000	84.27	-10.01	74.0	10.27	Peak	112.00	150	V	N/A
3**	3725.000	34.94	-4.80	54.0	-19.06	AV	205.00	150	V	Pass
3	3725.000	45.54	-4.80	74.0	-28.46	Peak	205.00	150	V	Pass
4**	7438.437	36.86	17.01	54.0	-17.14	AV	177.00	150	V	Pass
4	7438.437	49.63	17.01	74.0	-24.37	Peak	177.00	150	V	Pass
5**	12535.812	41.82	21.56	54.0	-12.18	AV	194.00	150	V	Pass
5	12535.812	52.43	21.56	74.0	-21.57	Peak	194.00	150	V	Pass
6**	14882.813	46.51	26.52	54.0	-7.49	AV	1.00	150	V	Pass
6	14882.813	57.61	26.52	74.0	-16.39	Peak	1.00	150	V	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

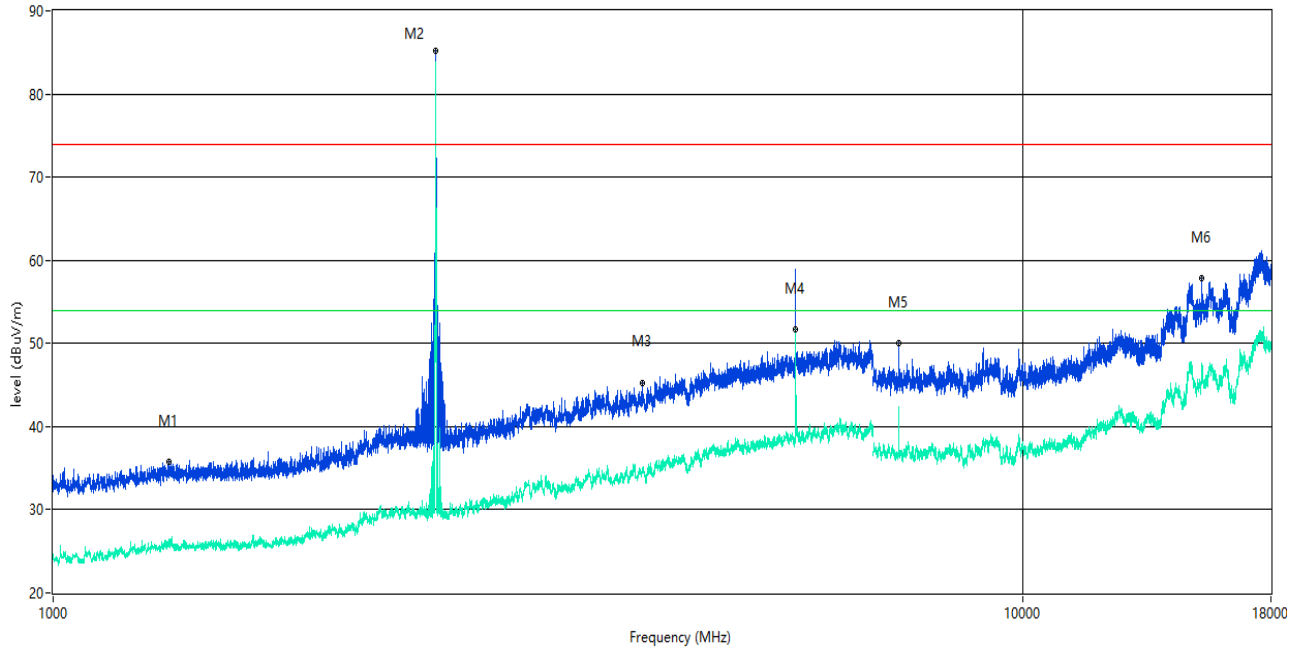


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1317.000	26.40	-14.79	54.0	-27.60	AV	278.00	150	H	Pass
1	1317.000	35.75	-14.79	74.0	-38.25	Peak	278.00	150	H	Pass
2**	2479.500	73.86	-10.05	54.0	19.86	AV	0.00	150	H	N/A
2	2479.500	85.15	-10.05	74.0	11.15	Peak	0.00	150	H	N/A
3**	4049.000	34.92	-4.30	54.0	-19.08	AV	0.00	150	H	Pass
3	4049.000	45.30	-4.30	74.0	-28.70	Peak	0.00	150	H	Pass
4**	5828.000	51.75	0.52	54.0	-2.25	AV	308.00	150	H	Pass
4	5828.000	57.90	0.52	74.0	-16.10	Peak	308.00	150	H	Pass
5**	7439.875	41.54	17.08	54.0	-12.46	AV	272.00	150	H	Pass
5	7439.875	49.99	17.08	74.0	-24.01	Peak	272.00	150	H	Pass
6**	15277.875	46.99	25.62	54.0	-7.01	AV	94.00	150	H	Pass
6	15277.875	57.80	25.62	74.0	-16.20	Peak	94.00	150	H	Pass

Hopping Mode:

GFSK MODE 1 GHz to 25 GHz, ANT V


RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

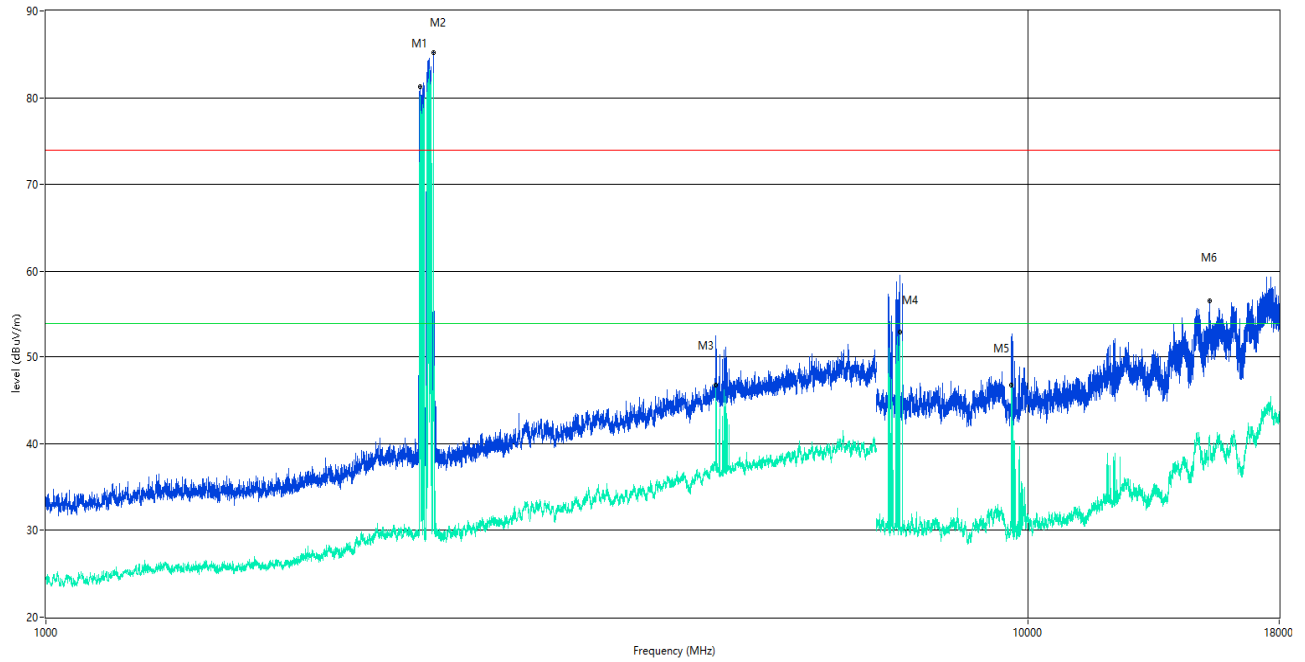

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2403.500	68.81	-10.65	54.0	14.81	AV	237.00	150	V	N/A
1	2403.500	81.21	-10.65	74.0	7.21	Peak	237.00	150	V	N/A
2**	2480.500	82.77	-9.97	54.0	28.77	AV	305.00	150	V	N/A
2	2480.500	85.15	-9.97	74.0	11.15	Peak	305.00	150	V	N/A
3**	4805.000	46.72	-1.99	54.0	-7.28	AV	353.00	150	V	Pass
3	4805.000	51.60	-1.99	74.0	-22.40	Peak	353.00	150	V	Pass
4**	7402.500	52.89	16.82	54.0	-1.11	AV	16.00	150	V	Pass
4	7402.500	59.08	16.82	74.0	-14.92	Peak	16.00	150	V	Pass
5**	9610.500	46.77	18.29	54.0	-7.23	AV	115.00	150	V	Pass
5	9610.500	44.70	18.29	74.0	-29.30	Peak	115.00	150	V	Pass
6**	15287.063	40.44	25.65	54.0	-13.56	AV	229.00	150	V	Pass
6	15287.063	56.54	25.65	74.0	-17.46	Peak	229.00	150	V	Pass

GFSK MODE 1 GHz to 25 GHz, ANT H

RE Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

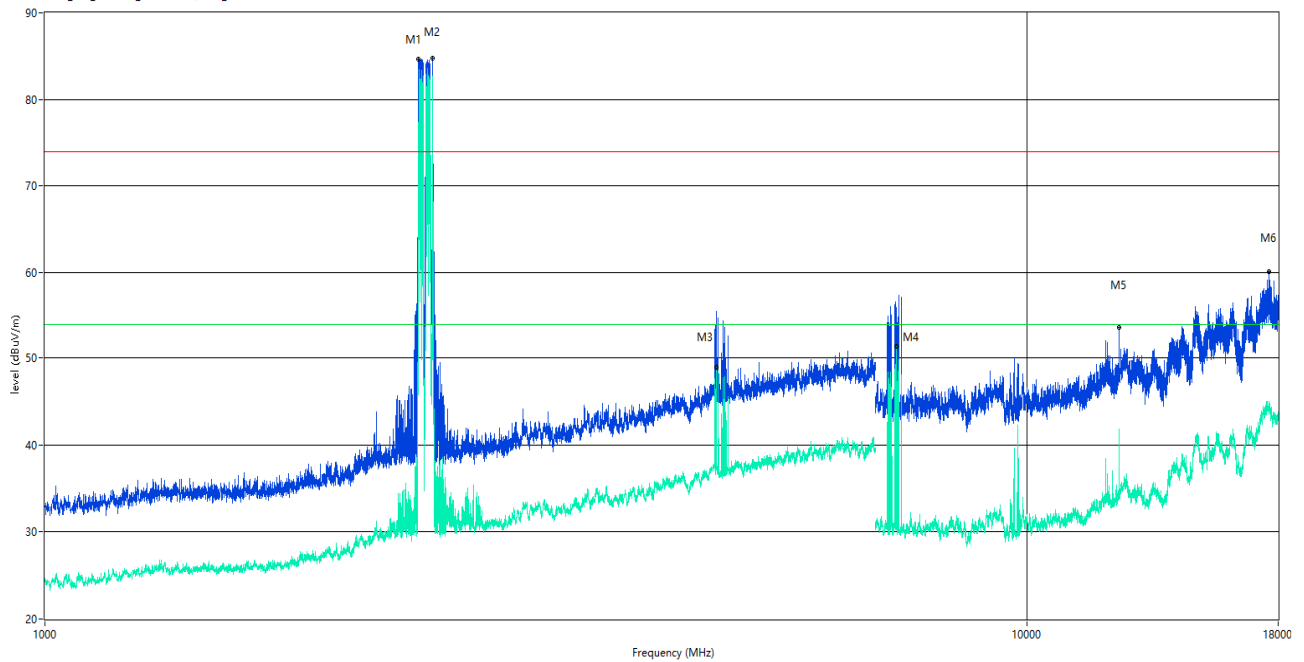

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	2401.500	72.75	-10.44	54.0	18.75	AV	143.00	150	H	N/A
1	2401.500	84.67	-10.44	74.0	10.67	Peak	143.00	150	H	N/A
2**	2479.500	71.51	-10.05	54.0	17.51	AV	298.00	150	H	N/A
2	2479.500	84.74	-10.05	74.0	10.74	Peak	298.00	150	H	N/A
3**	4827.000	48.91	-1.39	54.0	-5.09	AV	260.00	150	H	Pass
3	4827.000	55.49	-1.39	74.0	-18.51	Peak	260.00	150	H	Pass
4**	7353.625	51.37	16.69	54.0	-2.63	AV	2.00	150	H	Pass
4	7353.625	55.03	16.69	74.0	-18.97	Peak	2.00	150	H	Pass
5**	12400.687	35.58	21.08	54.0	-18.42	AV	32.00	150	H	Pass
5	12400.687	53.56	21.08	74.0	-20.44	Peak	32.00	150	H	Pass
6**	17600.999	44.14	29.60	54.0	-9.86	AV	239.00	150	H	Pass
6	17600.999	60.07	29.60	74.0	-13.93	Peak	239.00	150	H	Pass

A.9 Band Edge (Restricted-band band-edge)

Test Data

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: The average levels were calculated from the peak level corrected with duty cycle correction factor (-31.73 dB) derived from $20\log(\text{dwell time}/100 \text{ ms})$.


For example: Average level = 62.29 dBuV/m – 31.73 (dB) = 30.56 dBuV/m.

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	57.37	74	16.63	PEAK	Pass
		2390	43.00	54	N/A	AVERAGE	Pass
GFSK	HIGH	2491.3	68.00	74	6.00	PEAK	Pass
		2491.3	43.12	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2389.6	52.86	74	21.14	PEAK	Pass
		2389.6	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2484.8	61.48	74	12.53	PEAK	Pass
		2484.8	43.08	54	N/A	AVERAGE	Pass


GFSK LOW CHANNEL, PEAK

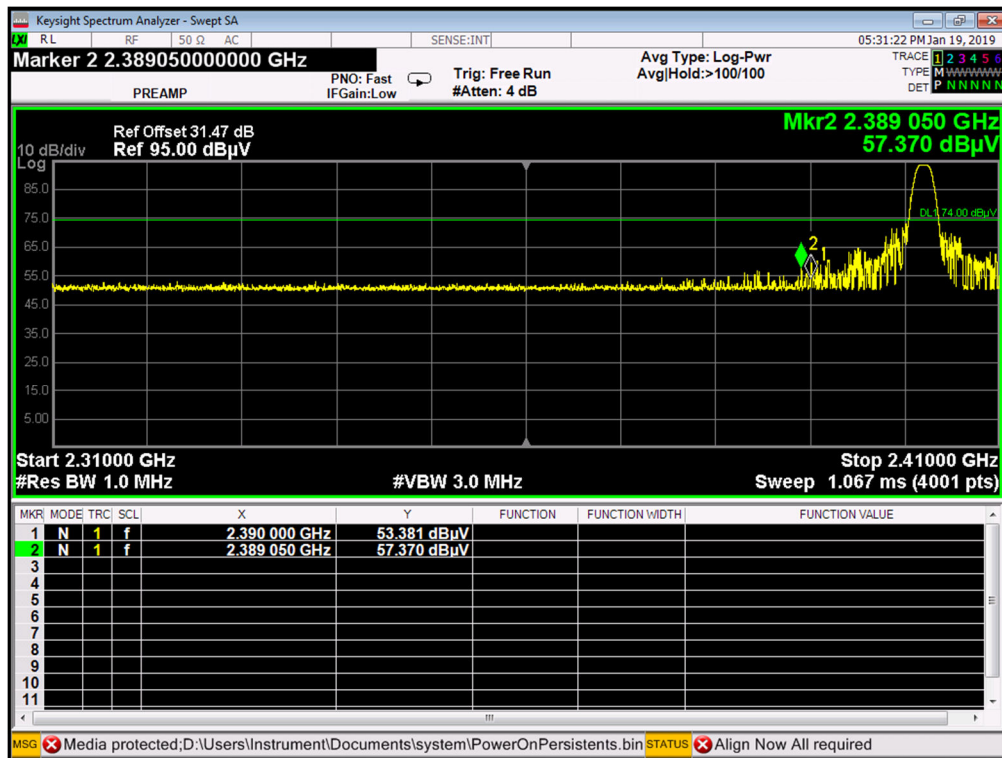


GFSK LOW CHANNEL, AV

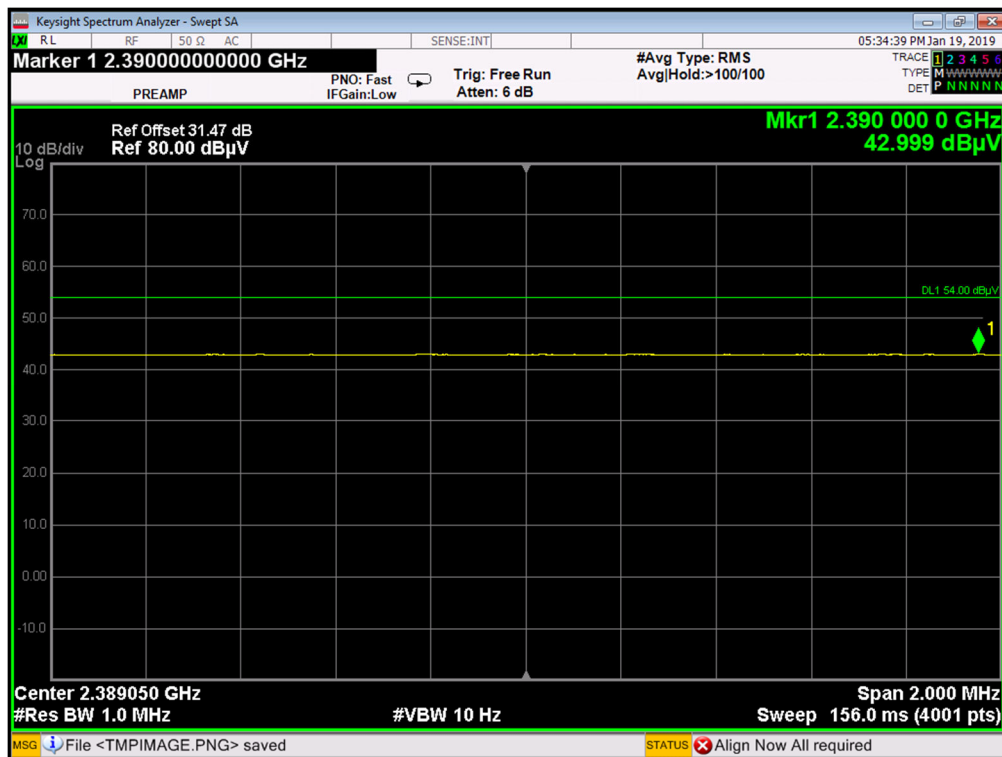

GFSK HIGH CHANNEL, PEAK

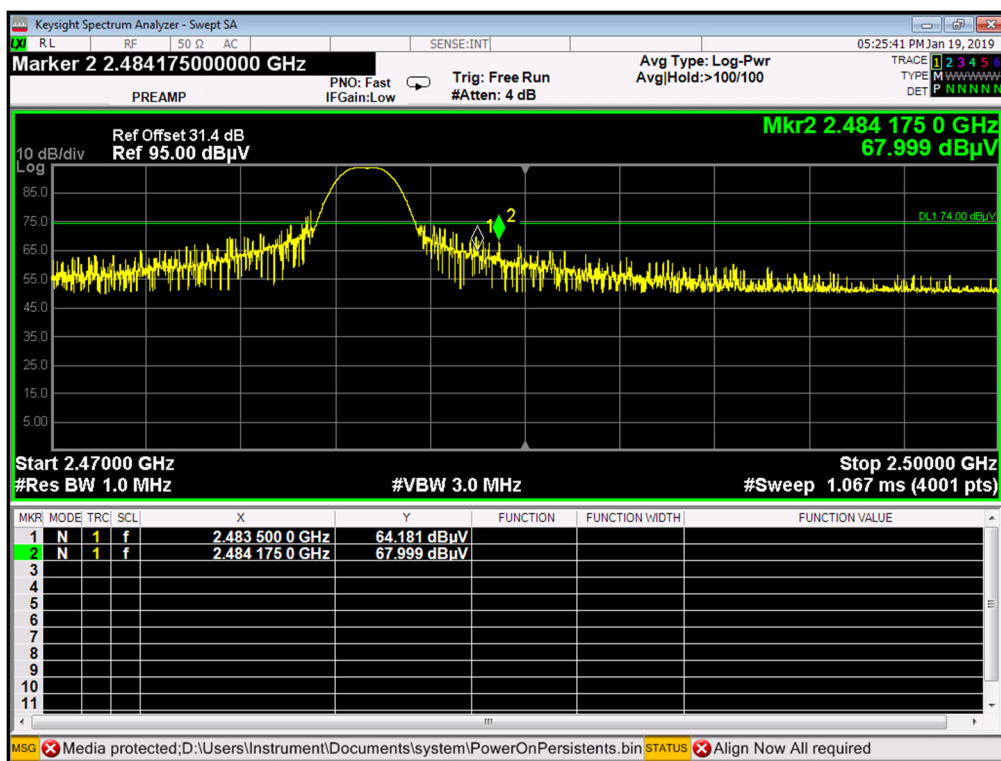


GFSK HIGH CHANNEL, AV

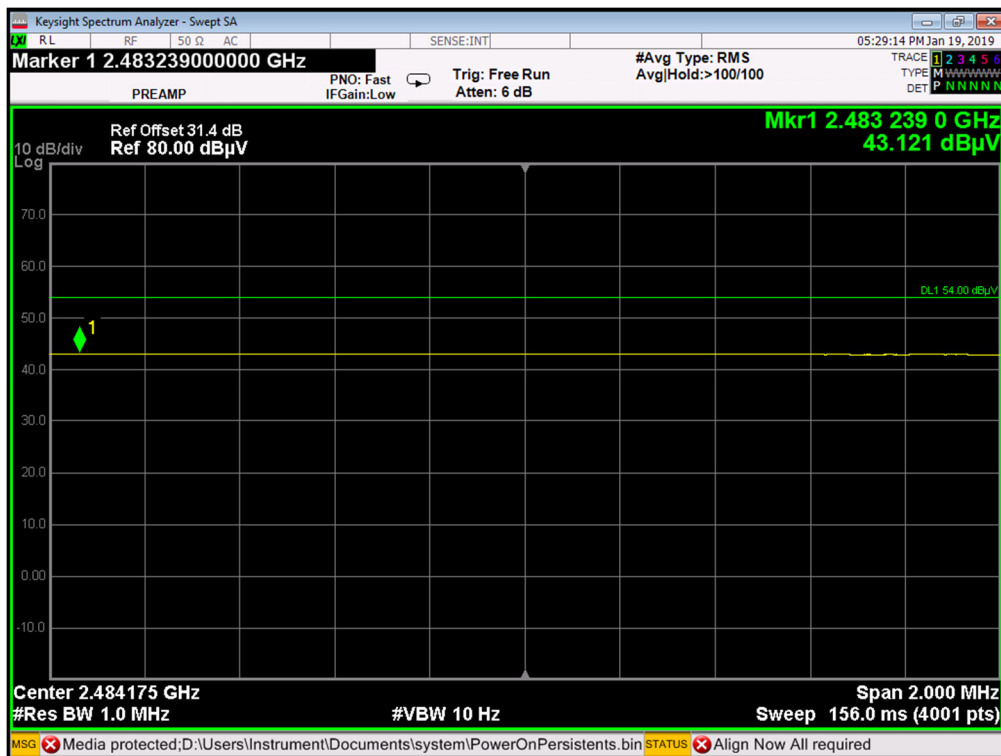


Hopping Mode:


GFSK LOW FREQUENCY BAND, PEAK

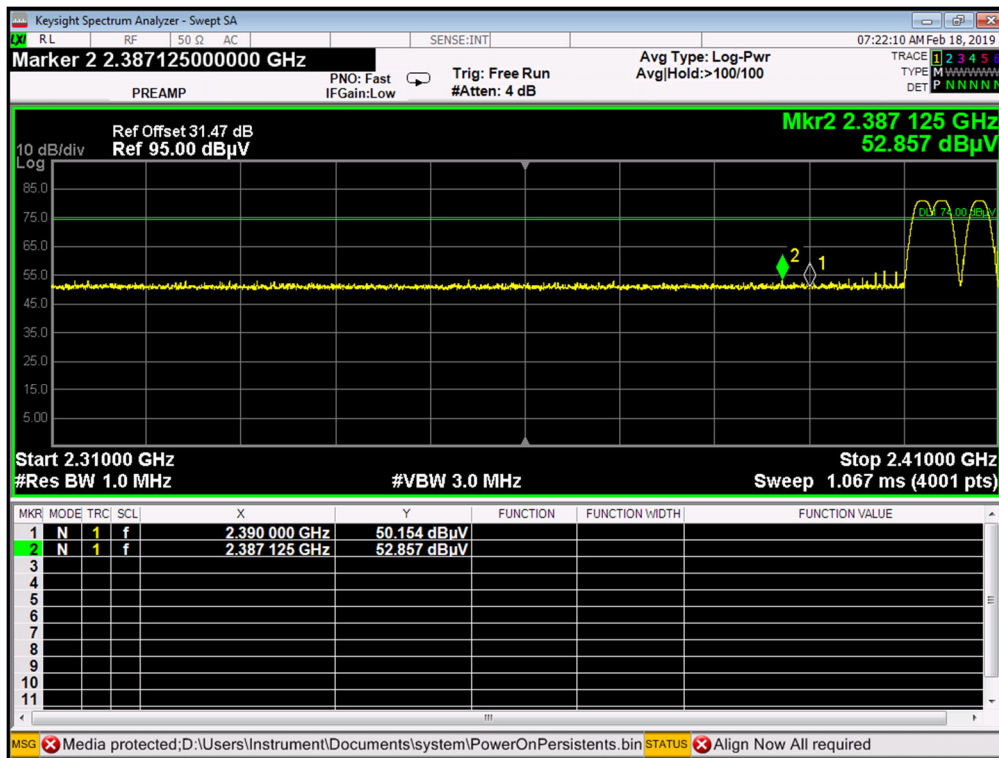

GFSK HIGH FREQUENCY BAND, PEAK

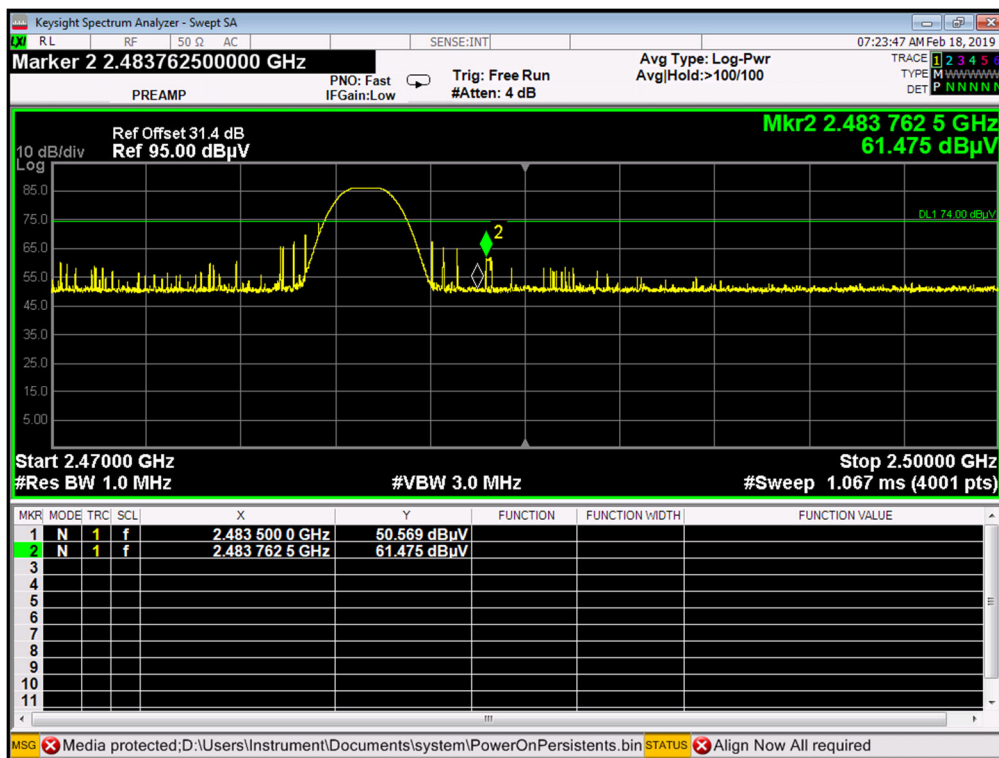

GFSK HIGH FREQUENCY BAND, AV

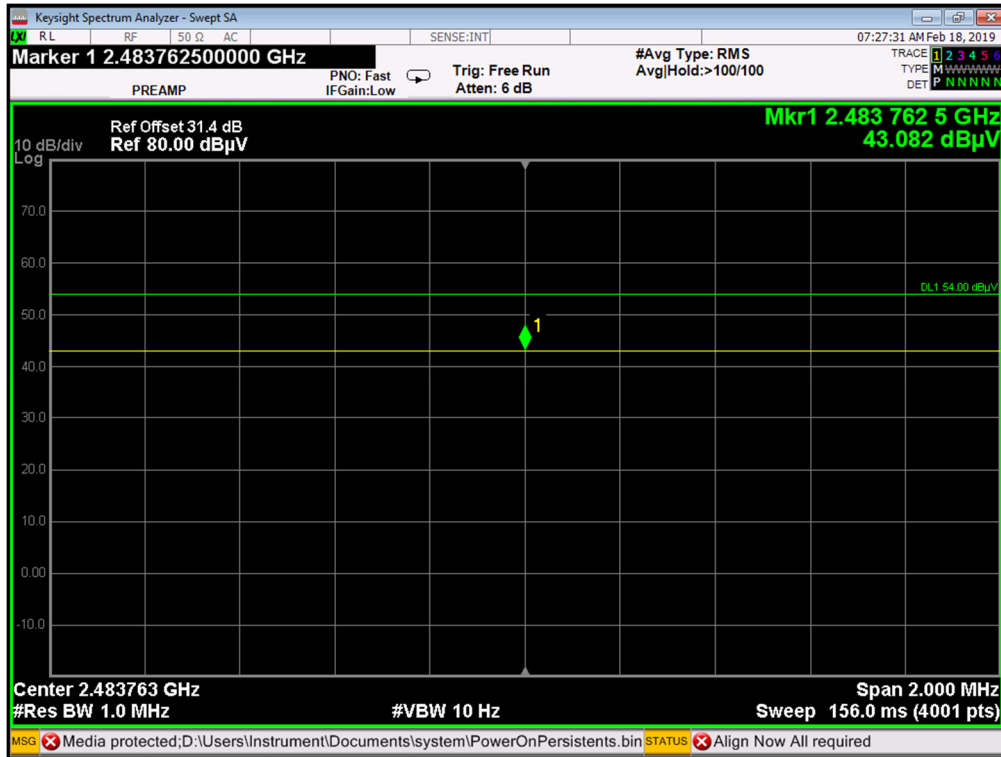

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1910250-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ1910250-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ1910250-AI.PDF”.

--END OF REPORT--