

915MHz_Left side 0mm

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 915 MHz;

Medium parameters used (interpolated): $f = 915$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(9.99, 9.99, 9.99); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.664 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00506 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

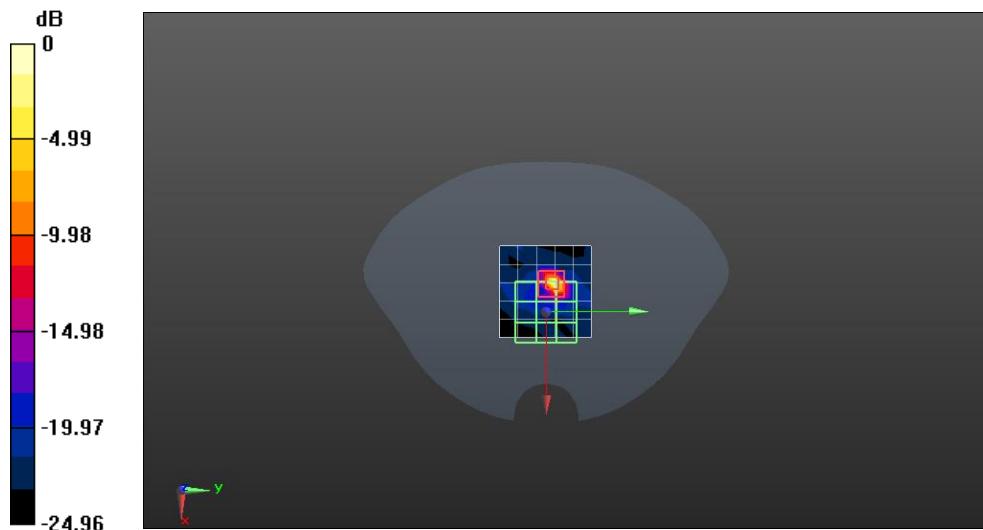

0 dB = 0.150 W/kg = -8.24 dBW/kg