

RFA-02-JP882-P1


Electrical Specifications

Frequency range	2400-2500 MHz
Peak gain	1.87 dBi
Average gain	-2.31 dBi
VSWR	2.5 : 1 Max.
Polarization	Linear, vertical
Impedance	50 Ω
Connector	IPEX
Cable	Ø1.13 / Black / L=150mm

Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 25°C




VSWR

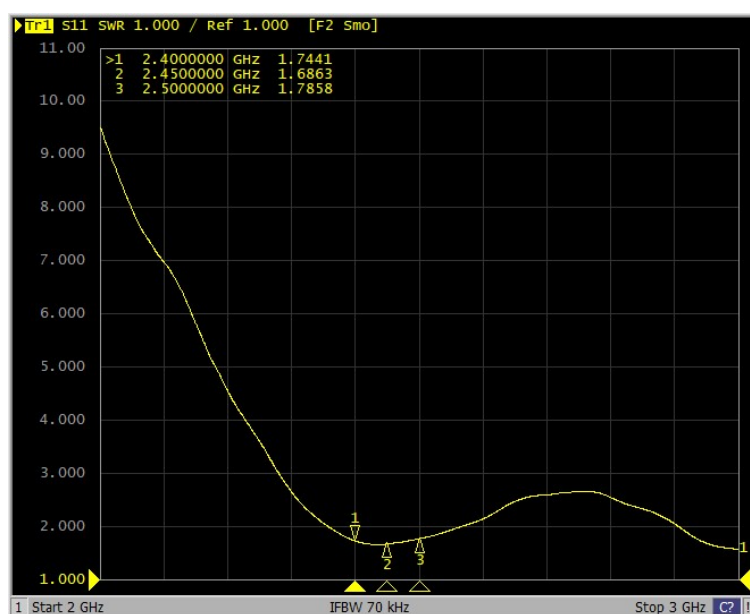

Radiation Pattern

2G Band = 2400 - 2500 MHz % 2G BAND

XY Plane (+X = 0°X, +Y = +90°X) / Elevation = 90°X ZX Plane (+Z = 0°X, +X = +90°X) / Azimuth = 0°X

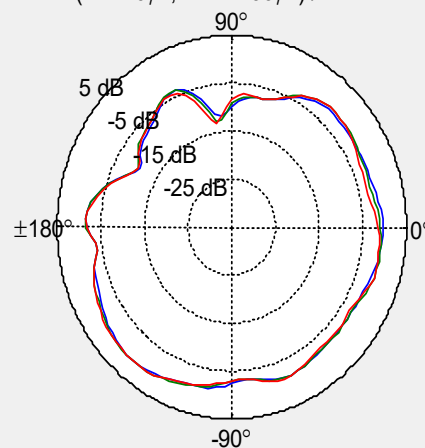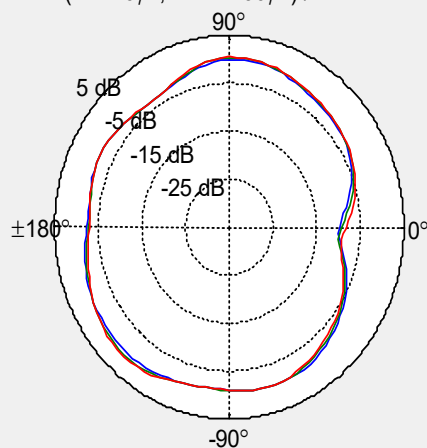

YZ Plane (+Z = 0°X, +Y = +90°X) / Azimuth = 90°X

