




FCC PART 15.407  
RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019  
RSS-247, ISSUE 2, FEBRUARY 2017  
TEST REPORT

For  
SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18  
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China

**FCC ID:SS3-MT2PD2007**  
**IC:11805A-MT2PD2007**

|   |   |
|---|---|
| <b>Report Type:</b><br>Original Report        | <b>Product Name:</b><br>Camera Drone  |
| <b>Report Number:</b> <u>RDG200810010-00B</u> |   |
| <b>Report Date:</b> <u>2020-09-05</u>         |   |
| <b>Reviewed By:</b>                           | Ivan Cao<br>Assistant Manager   |
| <b>Test Laboratory:</b>                       | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |



## **TABLE OF CONTENTS**

|  |           |
|--|-----------|
| <b>GENERAL INFORMATION.....</b>  | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....   | 4         |
| OBJECTIVE .....  | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....   | 4         |
| TEST METHODOLOGY .....   | 5         |
| MEASUREMENT UNCERTAINTY.....   | 5         |
| TEST FACILITY .....  | 5         |
| DECLARATIONS.....  | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>  | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....  | 6         |
| EUT EXERCISE SOFTWARE .....  | 6         |
| EQUIPMENT MODIFICATIONS .....  | 9         |
| BLOCK DIAGRAM OF TEST SETUP .....  | 9         |
| <b>SUMMARY OF TEST RESULTS .....</b>   | <b>10</b> |
| <b>FCC §15.407 (f) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>                         | <b>11</b> |
| APPLICABLE STANDARD .....  | 11        |
| <b>RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION .....</b>                      | <b>12</b> |
| APPLICABLE STANDARD .....  | 12        |
| <b>FCC §15.203&amp; RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT .....</b>   | <b>13</b> |
| APPLICABLE STANDARD .....  | 13        |
| ANTENNA CONNECTOR CONSTRUCTION .....   | 14        |
| <b>FCC §15.209, §15.205 , §15.407(b) &amp; RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION .....</b>      | <b>15</b> |
| APPLICABLE STANDARD .....  | 15        |
| EUT SETUP .....  | 17        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....  | 19        |
| TEST PROCEDURE .....   | 19        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....   | 20        |
| TEST EQUIPMENT LIST AND DETAILS.....   | 21        |
| TEST DATA .....  | 21        |
| <b>FCC §15.407(a)(e) &amp; RSS-247 CLAUSE 6.2,RSS-Gen CLAUSE 6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH .....</b> | <b>31</b> |
| APPLICABLE STANDARD .....  | 31        |
| TEST EQUIPMENT LIST AND DETAILS.....   | 31        |
| TEST PROCEDURE .....   | 31        |
| TEST DATA .....  | 31        |
| <b>FCC §15.407(a) &amp; RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER.....</b>                                  | <b>41</b> |
| APPLICABLE STANDARD .....  | 41        |
| TEST EQUIPMENT LIST AND DETAILS.....   | 43        |
| TEST PROCEDURE .....   | 43        |
| TEST DATA .....  | 44        |
| <b>FCC §15.407(a)&amp; RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY .....</b>  | <b>45</b> |
| APPLICABLE STANDARD .....  | 45        |



|  |           |
|--|-----------|
| TEST PROCEDURE .....                                   | 47        |
| TEST EQUIPMENT LIST AND DETAILS.....                   | 47        |
| TEST DATA .....  | 48        |
| <b>RSS-247 CLAUSE 6.4- ADDITIONAL REQUREMENT .....</b> | <b>54</b> |
| APPLICABLE STANDARD .....                              | 54        |
| RESULT .....   | 55        |



## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|  |                |  |
|--|----------------|--|
| <b>Manufacturer:</b>                             |                | SZ DJI TECHNOLOGY CO., LTD   |
| <b>Manufacturer address:</b>                     |                | 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China |
| <b>EUT Name:</b>                                 |                | Camera Drone   |
| <b>EUT Model:</b>                                |                | MT2PD  |
| <b>Operation Frequency:</b>                      |                | 5745-5825 MHz(802.11a/n ht20/ac vht20)<br>5755-5795 MHz(802.11n ht40/ac vht40)<br>5775 MHz(802.11ac vht80)                             |
| <b>Maximum Average Output Power (Conducted):</b> |                | 18.16 dBm  |
| <b>Antenna Gain</b>                              |                | 3.5 dBi  |
| <b>Modulation Type:</b>                          |                | OFDM   |
| <b>Rated Input Voltage:</b>                      |                | DC 7.7V from battery   |
| <b>Adapter(BYD) Information</b>                  | <b>Model:</b>  | QC18-US  |
|  | <b>Input:</b>  | 100-240~50/60Hz 0.5A   |
|  | <b>Output:</b> | 5V~3A;9V~2A,12V~1.5A   |
| <b>Adapter(AOHAI) Information</b>                | <b>Model:</b>  | QC18-US  |
|  | <b>Input:</b>  | 100-240~50/60Hz 0.5A   |
|  | <b>Output:</b> | 5V~3A;9V~2A,12V~1.5A   |
| <b>Serial Number:</b>                            |                | RDG200810010-RF -S1  |
| <b>EUT Received Date:</b>                        |                | 2020.08.12   |
| <b>EUT Received Status:</b>                      |                | Good   |

### Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS, 15E NII submissions with FCC ID: SS3-MT2PD2007  
 RSS-247 DTSS, LE-LAN submissions with IC: 11805A-MT2PD2007  
 Part of System submissions with FCC ID: SS3-RC2311911, IC: 11805A- RC2311911



## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

| Parameter                         | Measurement Uncertainty  |
|-----------------------------------|--|
| Occupied Channel Bandwidth        | ±5 %   |
| RF output power, conducted        | ±0.61dB  |
| Power Spectral Density, conducted | ±0.61 dB   |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | ±1.5 dB  |
| Temperature                       | ±1 °C  |
| Humidity                          | ±5%  |
| DC and low frequency voltages     | ±0.4%  |
| Duty Cycle                        | 1%   |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)  |

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.



## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode (which was selected by manufacturer). The system supports 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80 modes the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

The EUT has 2 antennas, the system configure 1T1R on chain 1 for 802.11a/n/ac modes.

For 5725~5850MHz band, 7 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 149     | 5745            | 157     | 5785            |
| 151     | 5755            | 159     | 5795            |
| 153     | 5765            | 161     | 5805            |
| 155     | 5775            | 165     | 5825            |

For 802.11a, 802.11n ht20, Channel 149, 157 and 165 was tested;

For 802.11n ht40, Channel 151, 159 was tested;

For 802.11ac vht80, Channel 155 was tested;

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

### EUT Exercise Software

Software " DJI Certification " was used during test, which was provided by manufacturer and the maximum power was configured as below:


| Mode           | Channel | Frequency (MHz) | Data rate | Power level Setting |
|----------------|---------|-----------------|-----------|---------------------|
| 802.11 a       | Low     | 5745            | 6Mbps     | 17                  |
|                | Middle  | 5785            | 6Mbps     | 17                  |
|                | High    | 5825            | 6Mbps     | 17                  |
| 802.11n ht20   | Low     | 5745            | MCS0      | 17                  |
|                | Middle  | 5785            | MCS0      | 17                  |
|                | High    | 5825            | MCS0      | 17                  |
| 802.11n ht40   | Low     | 5755            | MCS0      | 17                  |
|                | High    | 5795            | MCS0      | 17                  |
| 802.11ac vht80 | Middle  | 5775            | MCS0      | 17                  |

The maximum duty cycle as following table:

| Mode           | T <sub>on</sub> (ms) | T <sub>on+off</sub> (ms) | Duty Cycle (%) |
|----------------|----------------------|--------------------------|----------------|
| 802.11 a       | 2.860                | 2.920                    | 97.95          |
| 802.11n ht20   | 2.640                | 2.700                    | 97.78          |
| 802.11n ht40   | 1.290                | 1.370                    | 94.16          |
| 802.11ac vht80 | 0.634                | 0.718                    | 88.30          |




## 802.11a

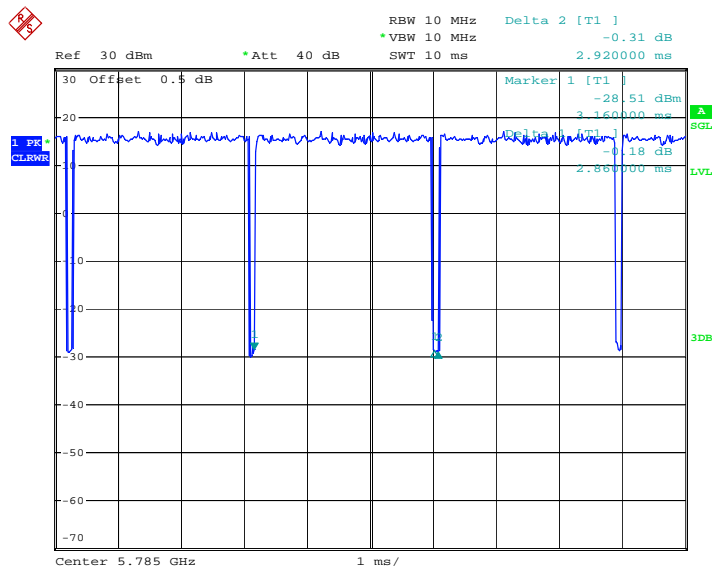

Date: 27.AUG.2020 13:30:04

## 802.11n ht20

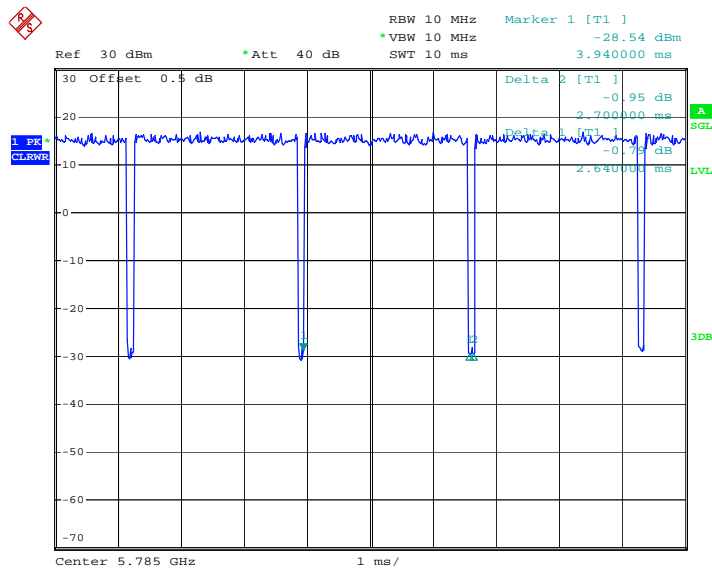

Date: 27.AUG.2020 13:30:44



RBW 10 MHz Delta 2 [T1 ]  
 \* VBW 10 MHz 0.49 dB  
 SWT 5 ms 1.370000 ms

Ref 30 dBm \* Att 40 dB

Offset 0.5 dB


Marker 1 [T1 ]  
 -29.12 dBm  
 1.750000 ms

Delta 1 [T1 ]  
 1.370000 ms

1 PK  
 CLAWR

Center 5.755 GHz 500  $\mu$ s/

Date: 27.AUG.2020 13:32:11

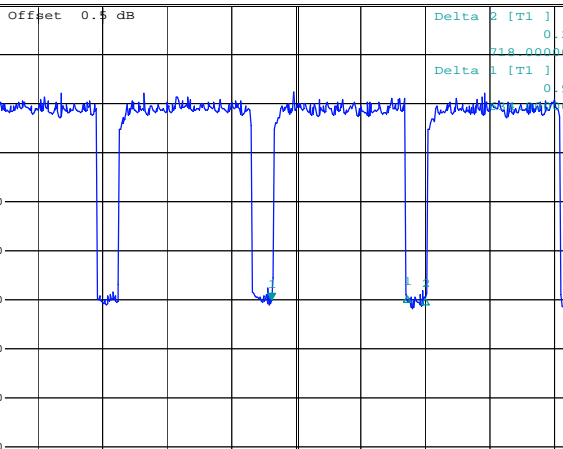

RBW 10 MHz Marker 1 [T1]  
 -30.03 dBm  
 \* VBW 10 MHz  
 1.384000 ms  
 Ref 30 dBm \* Att 40 dB  
 SWT 3 ms

Offset 0.5 dB

Delta 2 [T1] 0.24 dB  
 218.000000 μs  
 Delta 1 [T1] 0.95 dB  
 218.000000 μs

1 PK  
 CLAMP

30 dBm

Center 5.775 GHz 300 μs/


Date: 27.AUG.2020 13:33:23



### Equipment Modifications

No modification was made to the EUT.

### Block Diagram of Test Setup

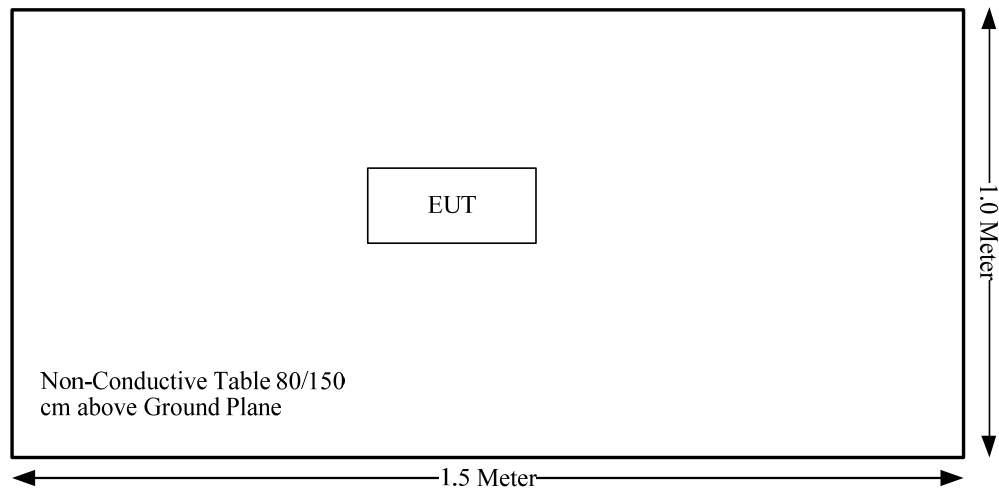



**SUMMARY OF TEST RESULTS**

| Rules  | Description of Test  | Result         |
|--|--|----------------|
| FCC §15.407 (f) & §1.1310 & §2.1091                            | Maximum Permissible Exposure (MPE)                             | Compliance     |
| RSS-102 Clause 2.5.2   | Exemption Limits For Routine Evaluation-RF Exposure Evaluation | Compliance     |
| FCC§15.203,<br>RSS-Gen Clause 6.8                              | Antenna Requirement  | Compliance     |
| FCC§15.407(b)(6)&<br>§15.207(a),<br>RSS-Gen Clause 8.8         | Conducted Emissions  | Not Applicable |
| FCC§15.205& §15.209<br>&§15.407(b),<br>RSS-247 Clause 6.2      | Undesirable Emission& Restricted Bands                         | Compliance     |
| FCC§15.407(a) (e),<br>RSS-247 Clause 6.2<br>RSS-Gen Clause 6.7 | Emission Bandwidth   | Compliance     |
| FCC§15.407(a)<br>RSS-247 Clause 6.2                            | Conducted Transmitter Output Power                             | Compliance     |
| FCC§15.407 (a),<br>RSS-247 Clause 6.2                          | Power Spectral Density   | Compliance     |
| RSS-247 Clause 6.4   | Additional requirements  | Compliance     |

Not Applicable: the device was powered by battery when use.



## FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
| 0.3–1.34  | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30   | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30–300  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500  | /                             | /                             | f/1500                              | 30                       |
| 1500–100,000  | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

| Modes      | Frequency (MHz) | Antenna Gain |           | Conducted output power including Tune-up Tolerance |        | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|------------|-----------------|--------------|-----------|--|--------|--------------------------|-------------------------------------|---------------------------------|
|            |                 | (dBi)        | (numeric) | (dBm)  | (mW)   |                          |                                     |                                 |
| 2.4G Wi-Fi | 2412-2462       | 2.5          | 1.78      | 24   | 251.19 | 20.00                    | 0.09                                | 1.0                             |
| BLE        | 2402-2480       | 2.5          | 1.78      | 4  | 2.51   | 20.00                    | 0.001                               | 1.0                             |
| 2.4G SDR   | 2405.5-2476.5   | 2.5          | 1.78      | 29   | 794.33 | 20.00                    | 0.28                                | 1.0                             |
| 5.8G Wi-Fi | 5745-5825       | 3.5          | 2.24      | 19   | 79.43  | 20.00                    | 0.04                                | 1.0                             |
| 5.8G SDR   | 5728.5-5846.12  | 3.5          | 2.24      | 25   | 316.23 | 20.00                    | 0.14                                | 1.0                             |

Note:

The Max. Target Power including Tolerance was declared by manufacturer.

None of these 2.4GHz band or 5.8GHz band modes can transmit Simultaneously.

**Result:** The device meet FCC MPE at 20 cm distance



## **RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION**

### **Applicable Standard**

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### **Calculated Data:**

| Mode       | Frequency (MHz) | Antenna Gain | Conducted output power including Tune-up Tolerance | EIRP  |       | Exemption limits (W) |
|------------|-----------------|--------------|--|-------|-------|----------------------|
|            |                 | (dBi)        | (dBm)  | (dBm) | (W)   |                      |
| 2.4G Wi-Fi | 2412-2462       | 2.5          | 24   | 26.5  | 0.447 | 5.37                 |
| BLE        | 2402-2480       | 2.5          | 4  | 6.5   | 0.004 | 5.35                 |
| 2.4G SDR   | 2405.5-2476.5   | 2.5          | 29   | 31.5  | 1.413 | 5.36                 |
| 5.8G Wi-Fi | 5845-5825       | 3.5          | 19   | 22.5  | 0.178 | 9.83                 |
| 5.8G SDR   | 5728.5-5846.12  | 3.5          | 25   | 28.5  | 0.708 | 9.69                 |

Note:

The Max. Target Power including Tolerance was declared by manufacturer.

None of these 2.4GHz band or 5.8GHz band modes can transmit Simultaneously.

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

**Result:** Compliance



---

**FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen Clause 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.



**Antenna Connector Construction**

The EUT has 2 internal antennas, fulfill the requirement of this section. Please refer to the EUT photos.

| Antenna Chain | Antenna Type | input impedance<br>(Ohm) | Antenna Gain<br>/Frequency Range            |
|---------------|--------------|--------------------------|---|
| Chain 0       | PCB          | 50                       | 2.5 dBi/2.4~2.5GHz<br>3.5 dBi/5.725~5.85GHz |
| Chain 1       | PCB          | 50                       | 2.5 dBi/2.4~2.5GHz<br>3.5 dBi/5.725~5.85GHz |

**Result:** Compliance.



---

**FCC §15.209, §15.205 , §15.407(b) & RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION**

---

**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.



According to RSS-247 Clause 6.2

### **Frequency band 5150-5250 MHz**

#### **6.2.1.2 Unwanted emission limits**

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.2 Unwanted emission limits**

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

### **Frequency bands 5470-5600 MHz and 5650-5725 MHz:**

#### **6.2.3.2 Unwanted emission limits**

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.



## Frequency band 5725-5850 MHz

### 6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:



- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

## EUT Setup

### Below 1 GHz:

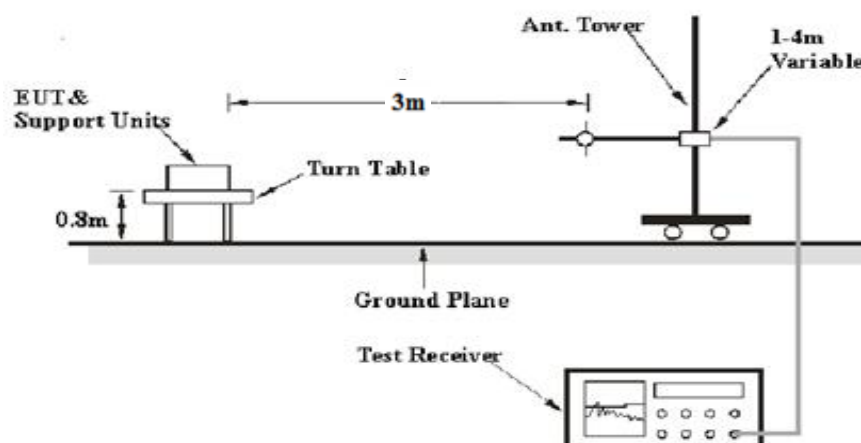

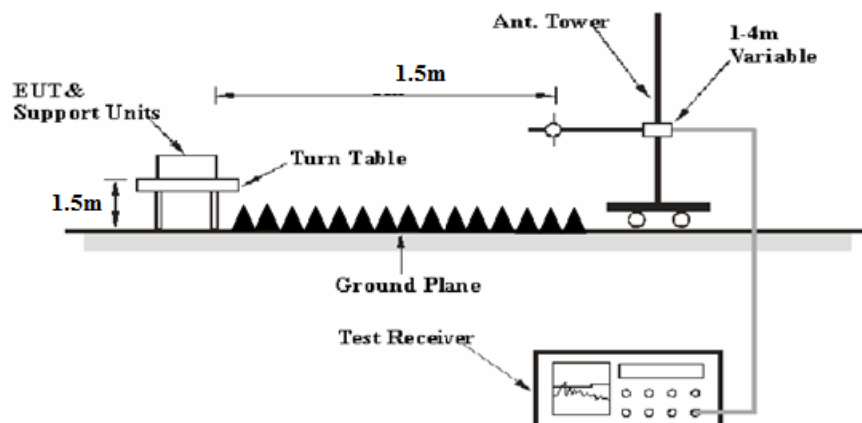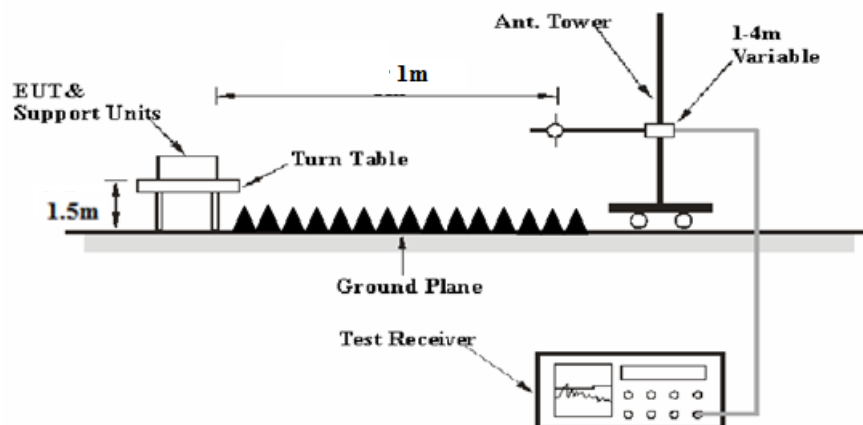

**1-26.5 GHz:****26.5-40 GHz:**

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

| Measurement | RBW     | Video B/W | IF B/W |
|-------------|---------|-----------|--------|
| QP          | 120 kHz | 300 kHz   | 120kHz |

1GHz- 40GHz:

| Measurement | Duty cycle | RBW  | Video B/W |
|-------------|------------|------|-----------|
| PK          | Any        | 1MHz | 3 MHz     |
| Ave.        | >98%       | 1MHz | 10 Hz     |
|             | <98%       | 1MHz | 1/T       |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor =  $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$  dB= 6.02 dB

or

Distance extrapolation factor =  $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$  dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.



**Corrected Amplitude & Margin Calculation**

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



**Test Equipment List and Details**

| Manufacturer          | Description       | Model                   | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|-------------------------|--------------------|------------------|----------------------|
| Radiation Below 1GHz  |                   |                         |                    |                  |                      |
| Sunol Sciences        | Antenna           | JB3                     | A060611-1          | 2017-11-10       | 2020-11-10           |
| R&S                   | EMI Test Receiver | ESR3                    | 102453             | 2019-09-12       | 2020-09-12           |
| Unknown               | Coaxial Cable     | C-NJNJ-50               | C-0075-01          | 2019-09-05       | 2020-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50               | C-0400-01          | 2019-09-05       | 2020-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50               | C-1400-01          | 2020-05-06       | 2021-05-06           |
| HP                    | Amplifier         | 8447D                   | 2727A05902         | 2019-09-05       | 2020-09-05           |
| Farad                 | Test Software     | EZ-EMC                  | V1.1.4.2           | N/A              | N/A                  |
| Radiation Above 1GHz  |                   |                         |                    |                  |                      |
| ETS-Lindgren          | Horn Antenna      | 3115                    | 000 527 35         | 2018-10-12       | 2021-10-12           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02             | 1007726-01<br>1304 | 2017-12-06       | 2020-12-05           |
| Ducommun Technologies | Horn Antenna      | ARH-2823-02             | 1007726-01<br>1302 | 2017-12-06       | 2020-12-05           |
| R&S                   | Spectrum Analyzer | FSP 38                  | 100478             | 2020-07-07       | 2021-07-07           |
| Agilent               | Spectrum Analyzer | E4440A                  | SG43360054         | 2020-07-07       | 2021-07-07           |
| Unknown               | Coaxial Cable     | C-SJSJ-50               | C-0800-01          | 2019-09-05       | 2020-09-05           |
| Unknown               | Coaxial Cable     | C-2.4J2.4J-50           | C-0700-02          | 2020-06-27       | 2021-06-27           |
| Mini-Circuit          | Amplifier         | ZVA-213-S+              | 54201245           | 2019-09-05       | 2020-09-05           |
| Quinstar              | Amplifier         | QLW-18405536-JO         | 15964001001        | 2020-06-27       | 2021-06-27           |
| Sinoscite             | Bandstop Filters  | BSF5150-5850MN-0899-003 | 0899003            | 2020-05-06       | 2021-05-06           |
| Mini Circuits         | High Pass Filter  | VHF-6010+               | 31118              | 2020-06-16       | 2021-06-16           |

*\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data****Environmental Conditions**


| Test Items         | Radiation Below 1GHz | Radiation Above 1GHz |
|--------------------|----------------------|----------------------|
| Temperature:       | 28.3 °C              | 28.1 °C              |
| Relative Humidity: | 46%                  | 42%                  |
| ATM Pressure:      | 100.5 kPa            | 100.5 kPa            |
| Tester:            | Jalon Liu            | Caros Jia            |
| Test Date:         | 2020-08-21           | 2020-08-21           |

*Test Mode: Transmitting*




1) Below 1GHz(802.11a 5825 MHz was the worst):

### Horizontal

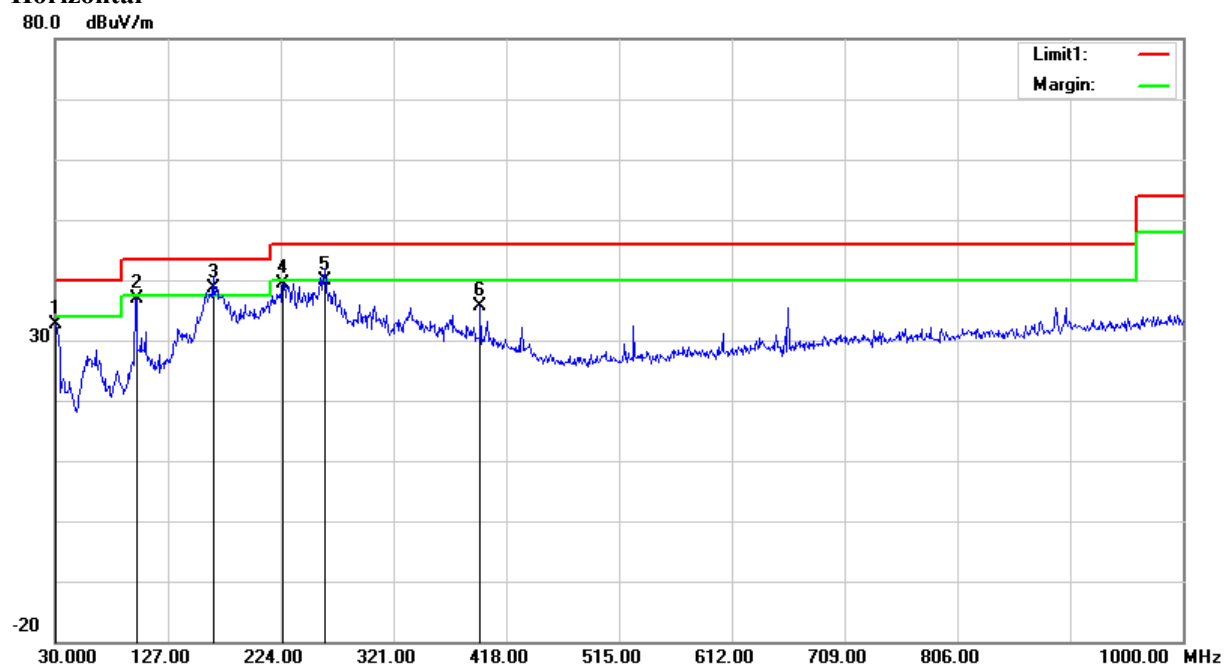

| Frequency (MHz) | Receiver Reading (dB $\mu$ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 30.0000         | 31.27                         | peak     | 1.46                     | 32.73                     | 40.00                | 7.27        |
| 99.8400         | 45.98                         | peak     | -9.05                    | 36.93                     | 43.50                | 6.57        |
| 165.8000        | 45.09                         | QP       | -6.42                    | 38.67                     | 43.50                | 4.83        |
| 225.9400        | 46.05                         | peak     | -6.65                    | 39.40                     | 46.00                | 6.60        |
| 261.8300        | 44.76                         | QP       | -4.87                    | 39.89                     | 46.00                | 6.11        |
| 395.6900        | 37.82                         | peak     | -2.21                    | 35.61                     | 46.00                | 10.39       |

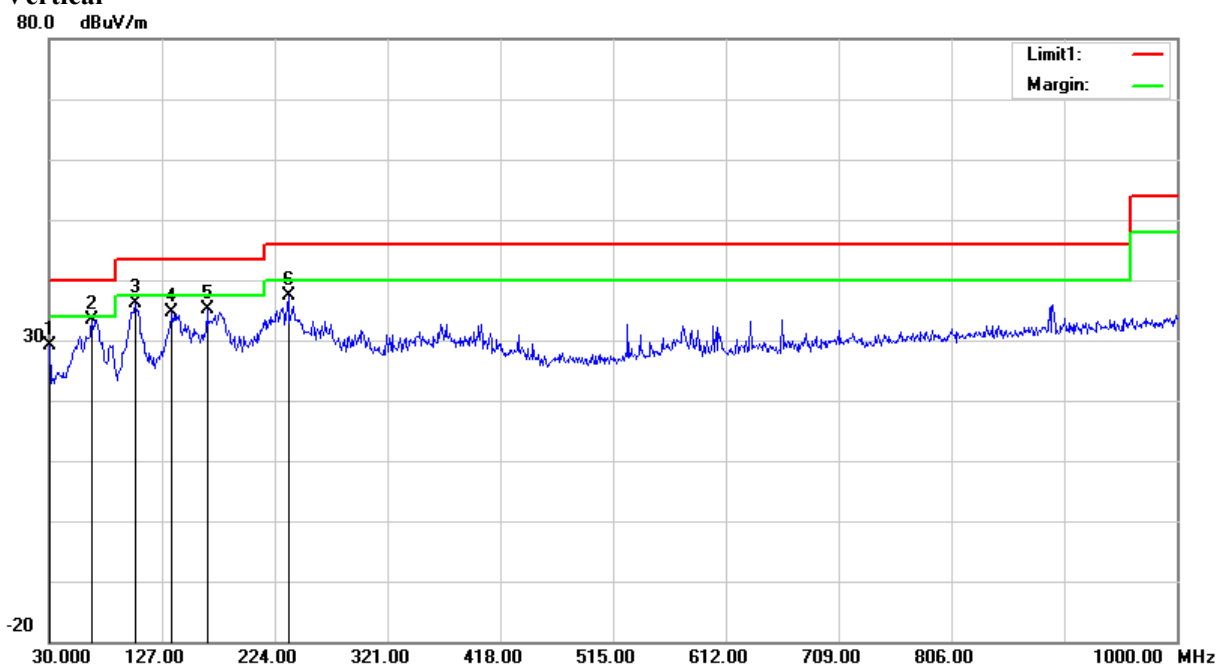

**Vertical**

| Frequency (MHz) | Receiver Reading (dB $\mu$ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 30.9700         | 28.31                         | peak     | 0.74                     | 29.05                     | 40.00                | 10.95       |
| 66.8600         | 45.02                         | peak     | -11.65                   | 33.37                     | 40.00                | 6.63        |
| 103.7200        | 44.16                         | peak     | -8.03                    | 36.13                     | 43.50                | 7.37        |
| 135.7300        | 39.89                         | peak     | -5.32                    | 34.57                     | 43.50                | 8.93        |
| 165.8000        | 41.57                         | peak     | -6.42                    | 35.15                     | 43.50                | 8.35        |
| 235.6400        | 43.52                         | peak     | -6.18                    | 37.34                     | 46.00                | 8.66        |



**2) 1GHz-40GHz:**  
**802.11a:**

| Frequency                | Receiver |          | Rx Antenna |        | Cable loss | Amplifier Gain | Corrected Amplitude | Extrapolation result | Limit  | Margin |
|--------------------------|----------|----------|------------|--------|------------|----------------|---------------------|----------------------|--------|--------|
|                          | Reading  | Detector | Polar      | Factor |            |                |                     |                      |        |        |
| MHz                      | dBμV     | PK/QP/AV | H/V        | dB/m   | dB         | dB             | dBμV/m              | dBμV/m               | dBμV/m | dB     |
| Low Channel: 5745 MHz    |          |          |            |        |            |                |                     |                      |        |        |
| 5745.00                  | 69.51    | PK       | H          | 34.20  | 3.69       | 0.00           | 107.40              | 101.38               | N/A    | N/A    |
| 5745.00                  | 60.29    | AV       | H          | 34.20  | 3.69       | 0.00           | 98.18               | 92.16                | N/A    | N/A    |
| 5745.00                  | 78.83    | PK       | V          | 34.20  | 3.69       | 0.00           | 116.72              | 110.7                | N/A    | N/A    |
| 5745.00                  | 69.65    | AV       | V          | 34.20  | 3.69       | 0.00           | 107.54              | 101.52               | N/A    | N/A    |
| 5725.00                  | 51.91    | PK       | V          | 34.19  | 3.69       | 0.00           | 89.79               | 83.77                | 122.20 | 38.43  |
| 5720.00                  | 48.14    | PK       | V          | 34.19  | 3.69       | 0.00           | 86.02               | 80                   | 110.80 | 30.80  |
| 5700.00                  | 41.31    | PK       | V          | 34.18  | 3.68       | 0.00           | 79.17               | 73.15                | 105.20 | 32.05  |
| 5650.00                  | 28.07    | PK       | V          | 34.16  | 3.63       | 0.00           | 65.86               | 59.84                | 68.20  | 8.36   |
| 11490.00                 | 35.70    | PK       | V          | 38.99  | 6.59       | 25.51          | 55.77               | 49.75                | 74.00  | 24.25  |
| 11490.00                 | 22.98    | AV       | V          | 38.99  | 6.59       | 25.51          | 43.05               | 37.03                | 54.00  | 16.97  |
| 17235.00                 | 38.64    | PK       | V          | 41.56  | 8.78       | 23.72          | 65.26               | 59.24                | 68.20  | 8.96   |
| Middle Channel: 5785 MHz |          |          |            |        |            |                |                     |                      |        |        |
| 5785.00                  | 70.19    | PK       | H          | 34.21  | 3.71       | 0.00           | 108.11              | 102.09               | N/A    | N/A    |
| 5785.00                  | 60.89    | AV       | H          | 34.21  | 3.71       | 0.00           | 98.81               | 92.79                | N/A    | N/A    |
| 5785.00                  | 77.89    | PK       | V          | 34.21  | 3.71       | 0.00           | 115.81              | 109.79               | N/A    | N/A    |
| 5785.00                  | 68.67    | AV       | V          | 34.21  | 3.71       | 0.00           | 106.59              | 100.57               | N/A    | N/A    |
| 11570.00                 | 36.43    | PK       | V          | 39.00  | 6.61       | 25.46          | 56.58               | 50.56                | 74.00  | 23.44  |
| 11570.00                 | 22.99    | AV       | V          | 39.00  | 6.61       | 25.46          | 43.14               | 37.12                | 54.00  | 16.88  |
| 17355.00                 | 38.61    | PK       | V          | 42.26  | 8.81       | 23.60          | 66.08               | 60.06                | 68.20  | 8.14   |
| High Channel: 5825 MHz   |          |          |            |        |            |                |                     |                      |        |        |
| 5825.00                  | 75.22    | PK       | H          | 34.23  | 3.73       | 0.00           | 113.18              | 107.16               | N/A    | N/A    |
| 5825.00                  | 65.22    | AV       | H          | 34.23  | 3.73       | 0.00           | 103.18              | 97.16                | N/A    | N/A    |
| 5825.00                  | 77.69    | PK       | V          | 34.23  | 3.73       | 0.00           | 115.65              | 109.63               | N/A    | N/A    |
| 5825.00                  | 68.31    | AV       | V          | 34.23  | 3.73       | 0.00           | 106.27              | 100.25               | N/A    | N/A    |
| 5850.00                  | 43.39    | PK       | V          | 34.24  | 3.75       | 0.00           | 81.38               | 75.36                | 122.20 | 46.84  |
| 5855.00                  | 42.00    | PK       | V          | 34.24  | 3.75       | 0.00           | 79.99               | 73.97                | 110.80 | 36.83  |
| 5875.00                  | 30.47    | PK       | V          | 34.25  | 3.77       | 0.00           | 68.49               | 62.47                | 105.20 | 42.73  |
| 5925.00                  | 28.04    | PK       | V          | 34.27  | 3.80       | 0.00           | 66.11               | 60.09                | 68.20  | 8.11   |
| 11650.00                 | 35.68    | PK       | V          | 39.00  | 6.64       | 25.41          | 55.91               | 49.89                | 74.00  | 24.11  |
| 11650.00                 | 22.72    | AV       | V          | 39.00  | 6.64       | 25.41          | 42.95               | 36.93                | 54.00  | 17.07  |
| 17475.00                 | 39.05    | PK       | V          | 42.96  | 8.84       | 23.48          | 67.37               | 61.35                | 68.20  | 6.85   |



**802.11n ht20:**

| Frequency                | Receiver |          | Rx Antenna |        | Cable loss | Amplifier Gain | Corrected Amplitude | Extrapolation result | Limit  | Margin |
|--------------------------|----------|----------|------------|--------|------------|----------------|---------------------|----------------------|--------|--------|
|                          | Reading  | Detector | Polar      | Factor |            |                |                     |                      |        |        |
| MHz                      | dBμV     | PK/QP/AV | H/V        | dB/m   | dB         | dB             | dBμV/m              | dBμV/m               | dBμV/m | dB     |
| Low Channel: 5745 MHz    |          |          |            |        |            |                |                     |                      |        |        |
| 5745.00                  | 73.35    | PK       | H          | 34.20  | 3.69       | 0.00           | 111.24              | 105.22               | N/A    | N/A    |
| 5745.00                  | 64.53    | AV       | H          | 34.20  | 3.69       | 0.00           | 102.42              | 96.4                 | N/A    | N/A    |
| 5745.00                  | 77.23    | PK       | V          | 34.20  | 3.69       | 0.00           | 115.12              | 109.1                | N/A    | N/A    |
| 5745.00                  | 68.22    | AV       | V          | 34.20  | 3.69       | 0.00           | 106.11              | 100.09               | N/A    | N/A    |
| 5725.00                  | 51.48    | PK       | V          | 34.19  | 3.69       | 0.00           | 89.36               | 83.34                | 122.20 | 38.86  |
| 5720.00                  | 43.84    | PK       | V          | 34.19  | 3.69       | 0.00           | 81.72               | 75.7                 | 110.80 | 35.10  |
| 5700.00                  | 35.39    | PK       | V          | 34.18  | 3.68       | 0.00           | 73.25               | 67.23                | 105.20 | 37.97  |
| 5650.00                  | 28.07    | PK       | V          | 34.16  | 3.63       | 0.00           | 65.86               | 59.84                | 68.20  | 8.36   |
| 11490.00                 | 36.31    | PK       | V          | 38.99  | 6.59       | 25.51          | 56.38               | 50.36                | 74.00  | 23.64  |
| 11490.00                 | 23.08    | AV       | V          | 38.99  | 6.59       | 25.51          | 43.15               | 37.13                | 54.00  | 16.87  |
| 17235.00                 | 38.62    | PK       | V          | 41.56  | 8.78       | 23.72          | 65.24               | 59.22                | 68.20  | 8.98   |
| Middle Channel: 5785 MHz |          |          |            |        |            |                |                     |                      |        |        |
| 5785.00                  | 75.60    | PK       | H          | 34.21  | 3.71       | 0.00           | 113.52              | 107.5                | N/A    | N/A    |
| 5785.00                  | 65.84    | AV       | H          | 34.21  | 3.71       | 0.00           | 103.76              | 97.74                | N/A    | N/A    |
| 5785.00                  | 76.96    | PK       | V          | 34.21  | 3.71       | 0.00           | 114.88              | 108.86               | N/A    | N/A    |
| 5785.00                  | 67.03    | AV       | V          | 34.21  | 3.71       | 0.00           | 104.95              | 98.93                | N/A    | N/A    |
| 11570.00                 | 35.87    | PK       | V          | 39.00  | 6.61       | 25.46          | 56.02               | 50                   | 74.00  | 24.00  |
| 11570.00                 | 22.71    | AV       | V          | 39.00  | 6.61       | 25.46          | 42.86               | 36.84                | 54.00  | 17.16  |
| 17355.00                 | 38.56    | PK       | V          | 42.26  | 8.81       | 23.60          | 66.03               | 60.01                | 68.20  | 8.19   |
| High Channel: 5825 MHz   |          |          |            |        |            |                |                     |                      |        |        |
| 5825.00                  | 72.03    | PK       | H          | 34.23  | 3.73       | 0.00           | 109.99              | 103.97               | N/A    | N/A    |
| 5825.00                  | 60.12    | AV       | H          | 34.23  | 3.73       | 0.00           | 98.08               | 92.06                | N/A    | N/A    |
| 5825.00                  | 76.40    | PK       | V          | 34.23  | 3.73       | 0.00           | 114.36              | 108.34               | N/A    | N/A    |
| 5825.00                  | 66.42    | AV       | V          | 34.23  | 3.73       | 0.00           | 104.38              | 98.36                | N/A    | N/A    |
| 5850.00                  | 42.46    | PK       | V          | 34.24  | 3.75       | 0.00           | 80.45               | 74.43                | 122.20 | 47.77  |
| 5855.00                  | 39.22    | PK       | V          | 34.24  | 3.75       | 0.00           | 77.21               | 71.19                | 110.80 | 39.61  |
| 5875.00                  | 29.34    | PK       | V          | 34.25  | 3.77       | 0.00           | 67.36               | 61.34                | 105.20 | 43.86  |
| 5925.00                  | 28.07    | PK       | V          | 34.27  | 3.80       | 0.00           | 66.14               | 60.12                | 68.20  | 8.08   |
| 11650.00                 | 35.91    | PK       | V          | 39.00  | 6.64       | 25.41          | 56.14               | 50.12                | 74.00  | 23.88  |
| 11650.00                 | 22.70    | AV       | V          | 39.00  | 6.64       | 25.41          | 42.93               | 36.91                | 54.00  | 17.09  |
| 17475.00                 | 38.10    | PK       | V          | 42.96  | 8.84       | 23.48          | 66.42               | 60.4                 | 68.20  | 7.80   |



**802.11n ht40:**

| Frequency              | Receiver |          | Rx Antenna |         | Cable loss | Amplifier Gain | Corrected Amplitude | Extrapolation result | Limit  | Margin |
|------------------------|----------|----------|------------|---------|------------|----------------|---------------------|----------------------|--------|--------|
|                        | Reading  | Detector | Polar      | Factor  |            |                |                     |                      |        |        |
| MHz                    | dBμV     | PK/QP/AV | H/V        | dB(1/m) | dB         | dB             | dBμV/m              | dBμV/m               | dBμV/m | dB     |
| Low Channel: 5755 MHz  |          |          |            |         |            |                |                     |                      |        |        |
| 5755.00                | 62.99    | PK       | H          | 34.20   | 3.70       | 0.00           | 100.89              | 94.87                | N/A    | N/A    |
| 5755.00                | 52.76    | AV       | H          | 34.20   | 3.70       | 0.00           | 90.66               | 84.64                | N/A    | N/A    |
| 5755.00                | 72.46    | PK       | V          | 34.20   | 3.70       | 0.00           | 110.36              | 104.34               | N/A    | N/A    |
| 5755.00                | 61.57    | AV       | V          | 34.20   | 3.70       | 0.00           | 99.47               | 93.45                | N/A    | N/A    |
| 5725.00                | 52.32    | PK       | V          | 34.19   | 3.69       | 0.00           | 90.20               | 84.18                | 122.20 | 38.02  |
| 5720.00                | 50.52    | PK       | V          | 34.19   | 3.69       | 0.00           | 88.40               | 82.38                | 110.80 | 28.42  |
| 5700.00                | 42.13    | PK       | V          | 34.18   | 3.68       | 0.00           | 79.99               | 73.97                | 105.20 | 31.23  |
| 5650.00                | 29.59    | PK       | V          | 34.16   | 3.63       | 0.00           | 67.38               | 61.36                | 68.20  | 6.84   |
| 11510.00               | 35.69    | PK       | V          | 39.00   | 6.59       | 25.50          | 55.78               | 49.76                | 74.00  | 24.24  |
| 11510.00               | 22.69    | AV       | V          | 39.00   | 6.59       | 25.50          | 42.78               | 36.76                | 54.00  | 17.24  |
| 17265.00               | 39.05    | PK       | V          | 41.74   | 8.79       | 23.69          | 65.89               | 59.87                | 68.20  | 8.33   |
| High Channel: 5795 MHz |          |          |            |         |            |                |                     |                      |        |        |
| 5795.00                | 71.23    | PK       | H          | 34.22   | 3.71       | 0.00           | 109.16              | 103.14               | N/A    | N/A    |
| 5795.00                | 61.56    | AV       | H          | 34.22   | 3.71       | 0.00           | 99.49               | 93.47                | N/A    | N/A    |
| 5795.00                | 75.72    | PK       | V          | 34.22   | 3.71       | 0.00           | 113.65              | 107.63               | N/A    | N/A    |
| 5795.00                | 65.65    | AV       | V          | 34.22   | 3.71       | 0.00           | 103.58              | 97.56                | N/A    | N/A    |
| 5850.00                | 44.20    | PK       | V          | 34.24   | 3.75       | 0.00           | 82.19               | 76.17                | 122.20 | 46.03  |
| 5855.00                | 41.17    | PK       | V          | 34.24   | 3.75       | 0.00           | 79.16               | 73.14                | 110.80 | 37.66  |
| 5875.00                | 35.60    | PK       | V          | 34.25   | 3.77       | 0.00           | 73.62               | 67.6                 | 105.20 | 37.60  |
| 5925.00                | 28.49    | PK       | V          | 34.27   | 3.80       | 0.00           | 66.56               | 60.54                | 68.20  | 7.66   |
| 11590.00               | 36.02    | PK       | V          | 39.00   | 6.62       | 25.45          | 56.19               | 50.17                | 74.00  | 23.83  |
| 11590.00               | 23.20    | AV       | V          | 39.00   | 6.62       | 25.45          | 43.37               | 37.35                | 54.00  | 16.65  |
| 17385.00               | 39.05    | PK       | V          | 42.43   | 8.82       | 23.57          | 66.73               | 60.71                | 68.20  | 7.49   |






**802.11ac vht80:**


| Frequency             | Receiver |          | Rx Antenna |         | Cable loss | Amplifier Gain | Corrected Amplitude | Extrapolation result | Limit  | Margin |
|-----------------------|----------|----------|------------|---------|------------|----------------|---------------------|----------------------|--------|--------|
|                       | Reading  | Detector | Polar      | Factor  |            |                |                     |                      |        |        |
| MHz                   | dBμV     | PK/QP/AV | H/V        | dB(1/m) | dB         | dB             | dBμV/m              | dBμV/m               | dBμV/m | dB     |
| Low Channel: 5775 MHz |          |          |            |         |            |                |                     |                      |        |        |
| 5775.00               | 69.76    | PK       | H          | 34.21   | 3.70       | 0.00           | 107.67              | 101.65               | N/A    | N/A    |
| 5775.00               | 57.48    | AV       | H          | 34.21   | 3.70       | 0.00           | 95.39               | 89.37                | N/A    | N/A    |
| 5775.00               | 72.30    | PK       | V          | 34.21   | 3.70       | 0.00           | 110.21              | 104.19               | N/A    | N/A    |
| 5775.00               | 61.94    | AV       | V          | 34.21   | 3.70       | 0.00           | 99.85               | 93.83                | N/A    | N/A    |
| 5725.00               | 49.00    | PK       | V          | 34.19   | 3.69       | 0.00           | 86.88               | 80.86                | 122.20 | 41.34  |
| 5720.00               | 47.88    | PK       | V          | 34.19   | 3.69       | 0.00           | 85.76               | 79.74                | 110.80 | 31.06  |
| 5700.00               | 45.51    | PK       | V          | 34.18   | 3.68       | 0.00           | 83.37               | 77.35                | 105.20 | 27.85  |
| 5650.00               | 33.63    | PK       | V          | 34.16   | 3.63       | 0.00           | 71.42               | 65.4                 | 68.20  | 2.80   |
| 5850.00               | 45.49    | PK       | V          | 34.24   | 3.75       | 0.00           | 83.48               | 77.46                | 122.20 | 44.74  |
| 5855.00               | 43.16    | PK       | V          | 34.24   | 3.75       | 0.00           | 81.15               | 75.13                | 110.80 | 35.67  |
| 5875.00               | 37.87    | PK       | V          | 34.25   | 3.77       | 0.00           | 75.89               | 69.87                | 105.20 | 35.33  |
| 5925.00               | 28.55    | PK       | V          | 34.27   | 3.80       | 0.00           | 66.62               | 60.6                 | 68.20  | 7.60   |
| 11550.00              | 36.02    | PK       | V          | 39.00   | 6.61       | 25.48          | 56.15               | 50.13                | 74.00  | 23.87  |
| 11550.00              | 22.78    | AV       | V          | 39.00   | 6.61       | 25.48          | 42.91               | 36.89                | 54.00  | 17.11  |
| 17325.00              | 38.89    | PK       | V          | 42.09   | 8.80       | 23.63          | 66.15               | 60.13                | 68.20  | 8.07   |





**Test Plots(For worst mode 802.11a 5825MHz)**  
**Horizontal**

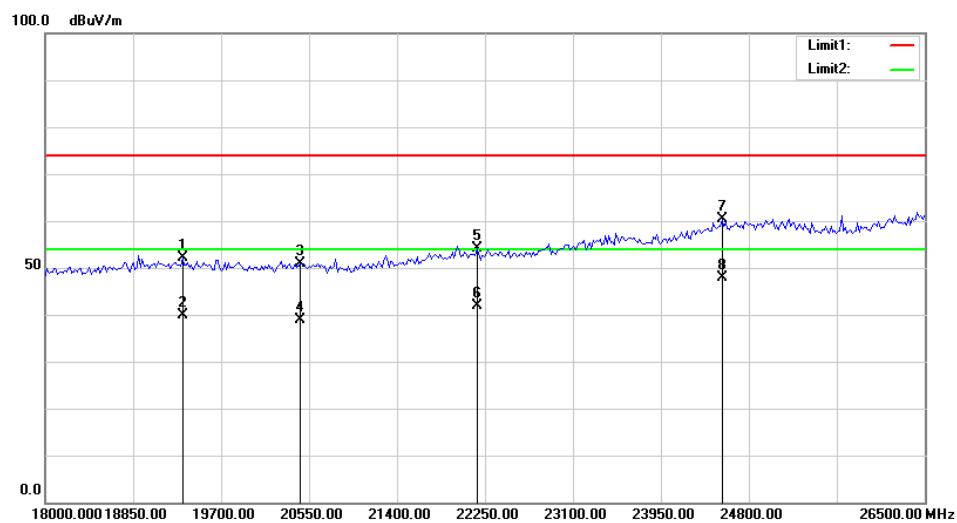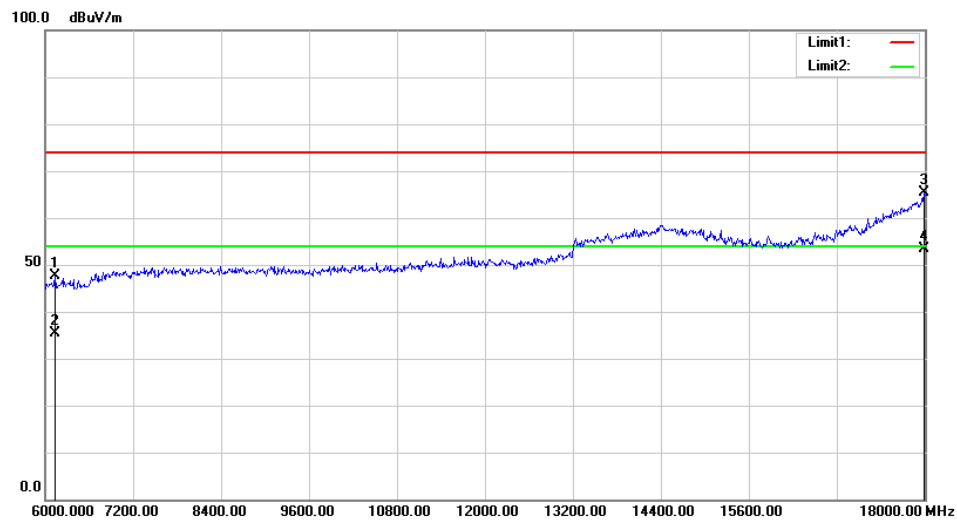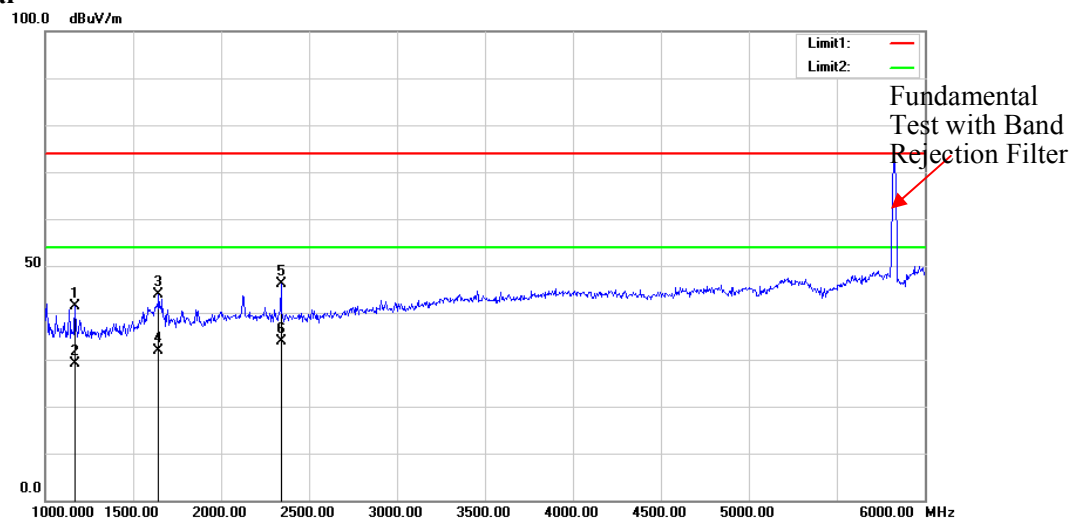





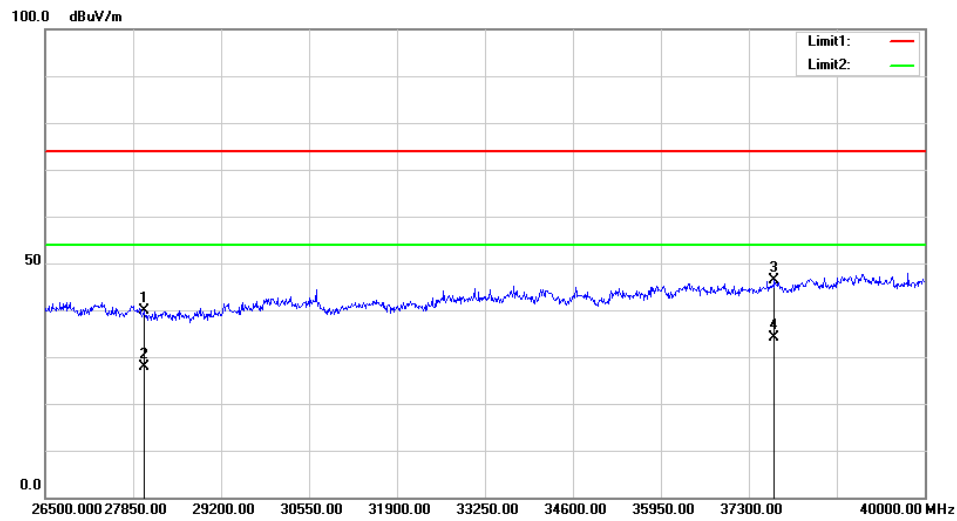

# Vertical

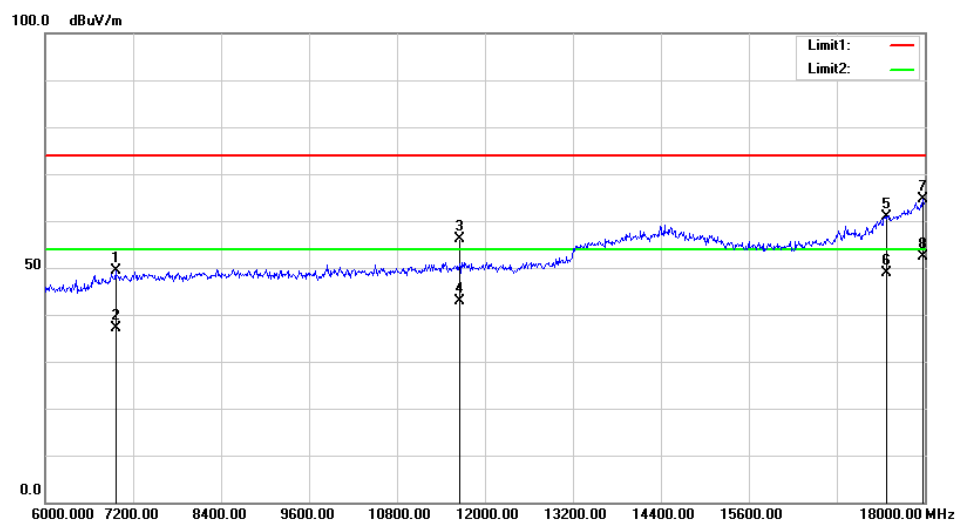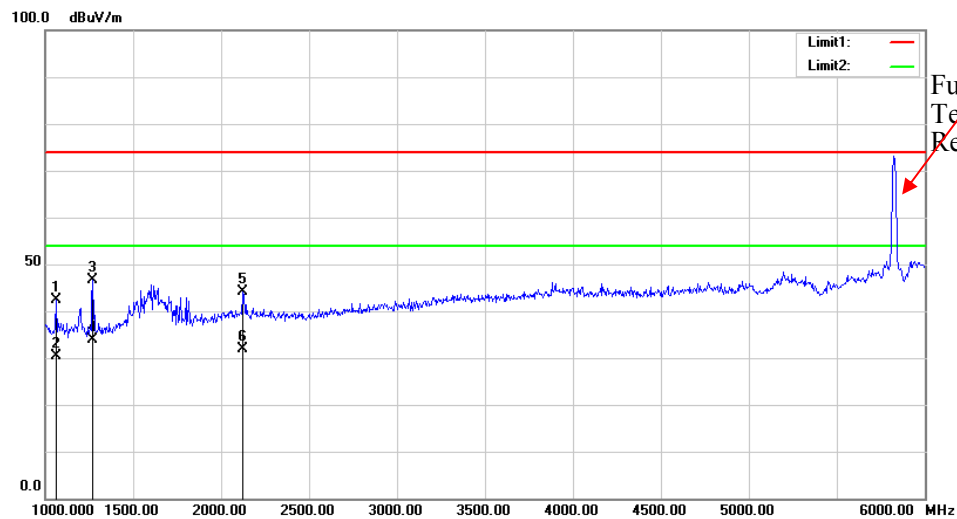



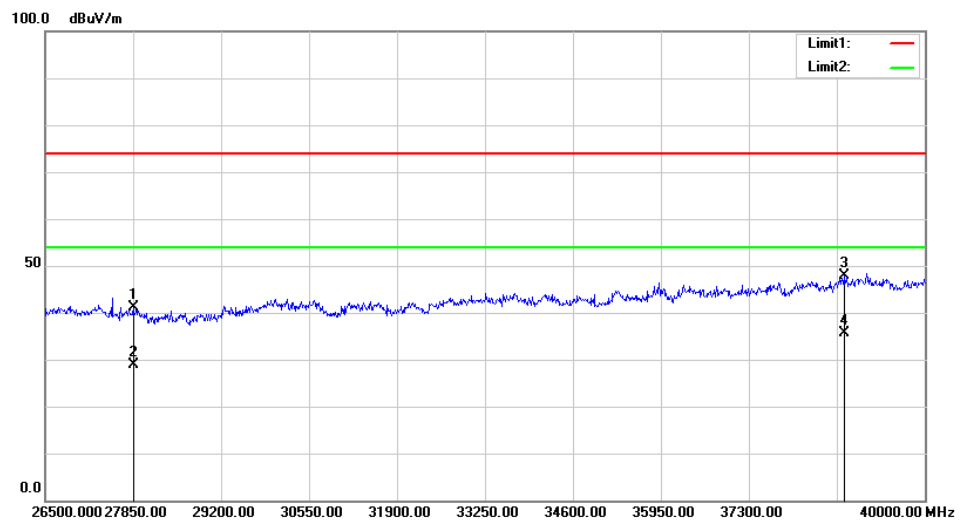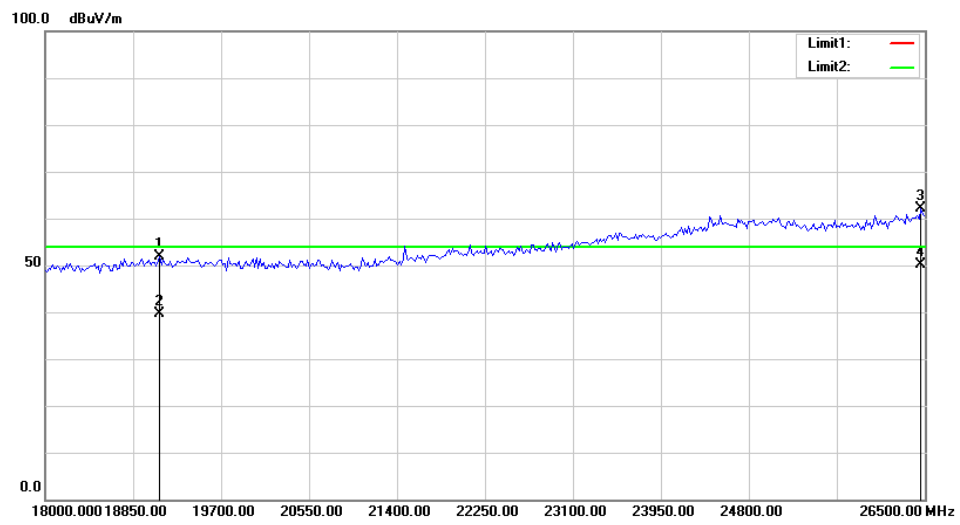



## FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2, RSS-Gen CLAUSE 6.7– EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

### Applicable Standard

15.407(a) (e), RSS-247 Clause 6.2 and RSS-Gen Clause 6.7

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101474        | 2020-01-09       | 2021-01-09           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/02      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 26.5 °C    |
| Relative Humidity: | 72 %       |
| ATM Pressure:      | 100.9 kPa  |
| Tester:            | Chris Mo   |
| Test Date:         | 2020-08-27 |

**Test Result:** Pass. Please refer to the following tables and plots.


*Test mode: Transmitting*

| Mode           | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | 6 dB Emission Bandwidth Limis (MHz) |
|----------------|-----------------|-------------------------------|------------------------------|-------------------------------------|
| 802.11 a       | 5745            | 15.760                        | 17.840                       | ≥0.5                                |
|                | 5785            | 16.240                        | 17.680                       | ≥0.5                                |
|                | 5825            | 16.240                        | 17.920                       | ≥0.5                                |
| 802.11n ht20   | 5745            | 16.560                        | 18.720                       | ≥0.5                                |
|                | 5785            | 17.600                        | 18.720                       | ≥0.5                                |
|                | 5825            | 17.280                        | 18.880                       | ≥0.5                                |
| 802.11n ht40   | 5755            | 36.000                        | 39.200                       | ≥0.5                                |
|                | 5795            | 35.840                        | 38.240                       | ≥0.5                                |
| 802.11ac vht80 | 5775            | 76.160                        | 76.800                       | ≥0.5                                |




6dB Emission Bandwidth:

802.11a Low Channel

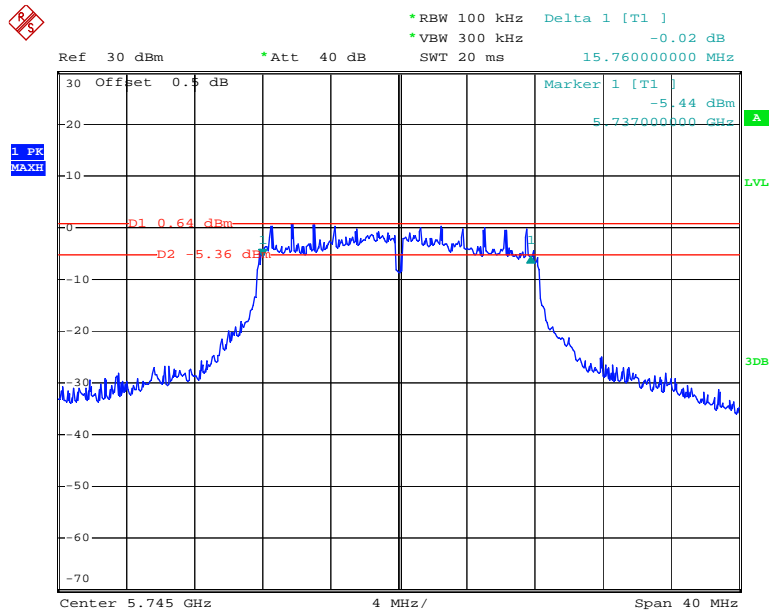

Date: 27.AUG.2020 13:23:29


802.11a Middle Channel

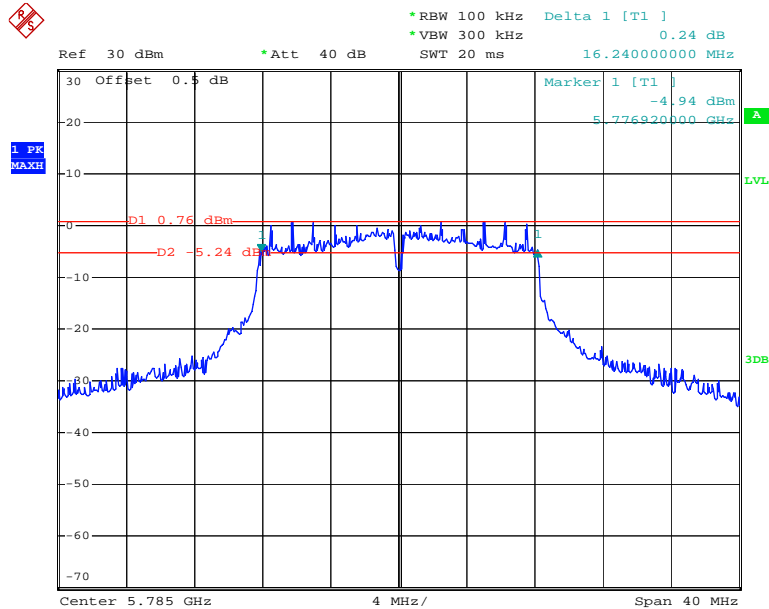

Date: 27.AUG.2020 13:22:51




## 802.11a High Channel

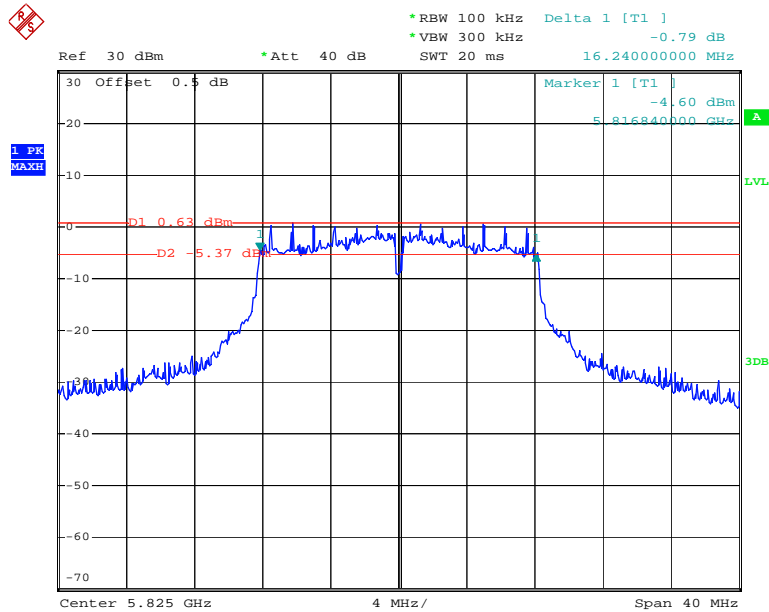

Date: 27.AUG.2020 13:22:17


## 802.11n ht20 Low Channel

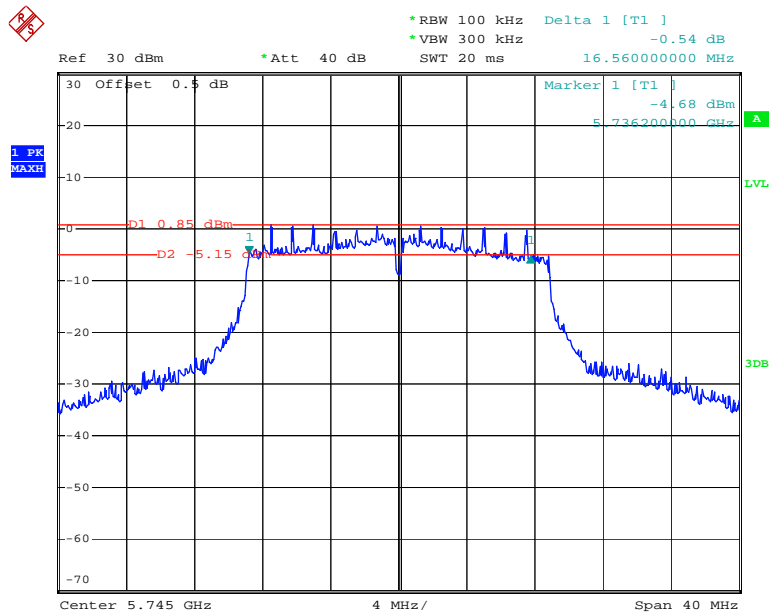

Date: 27.AUG.2020 13:19:48




## 802.11n ht20 Middle Channel

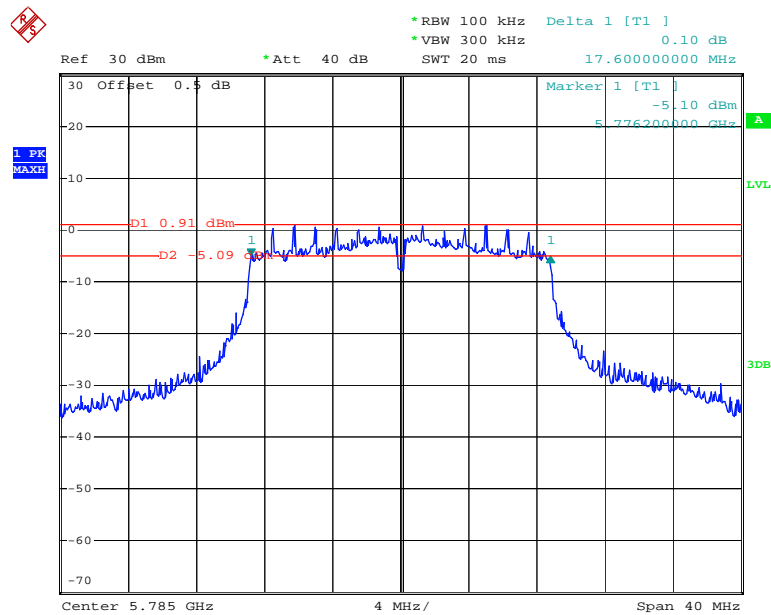

Date: 27.AUG.2020 13:20:34


## 802.11n ht20 High Channel

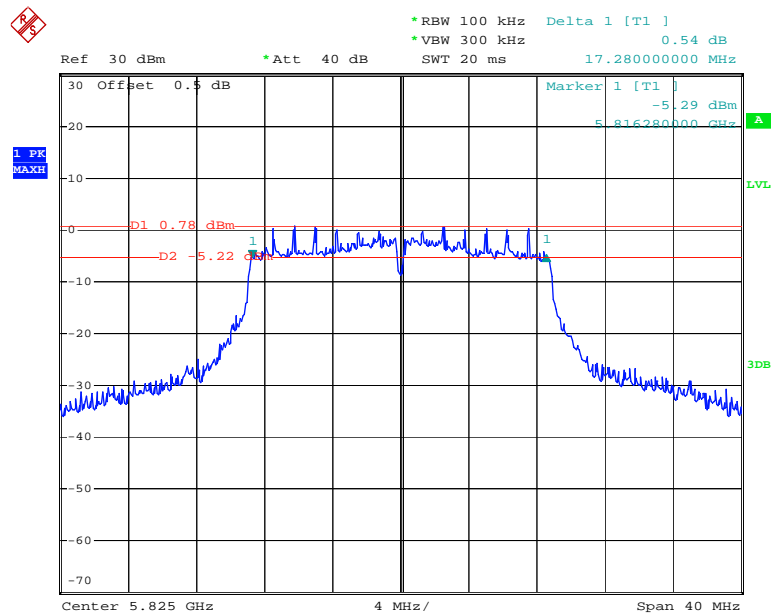

Date: 27.AUG.2020 13:21:42




## 802.11n ht40 Low Channel

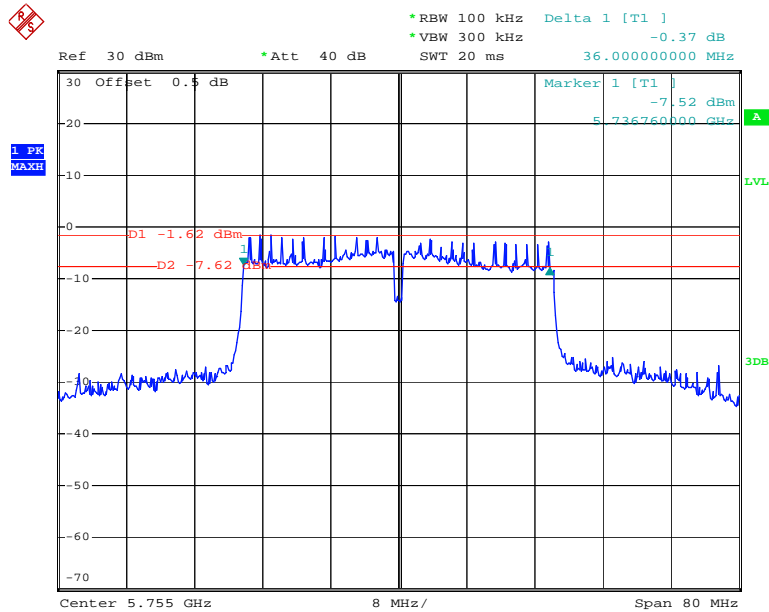

Date: 27.AUG.2020 13:17:15


## 802.11n ht40 High Channel

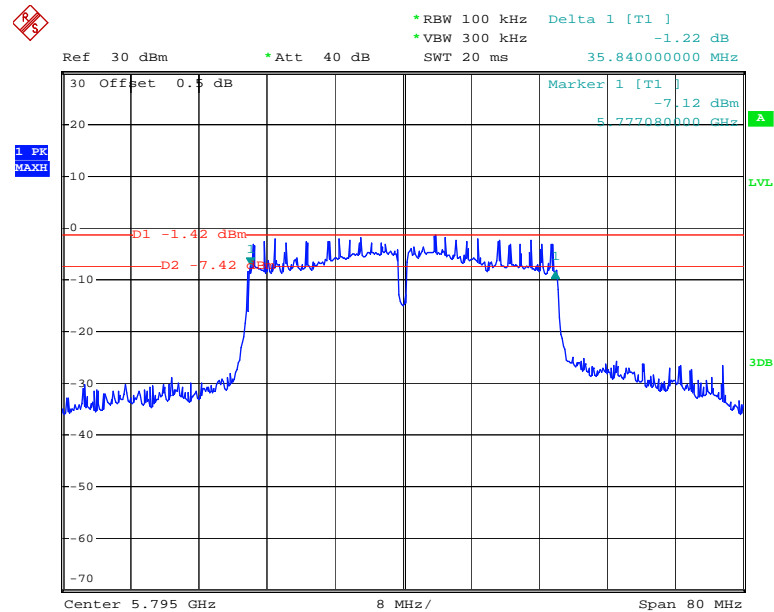

Date: 27.AUG.2020 13:18:17




## 802.11ac vht80 Middle Channel

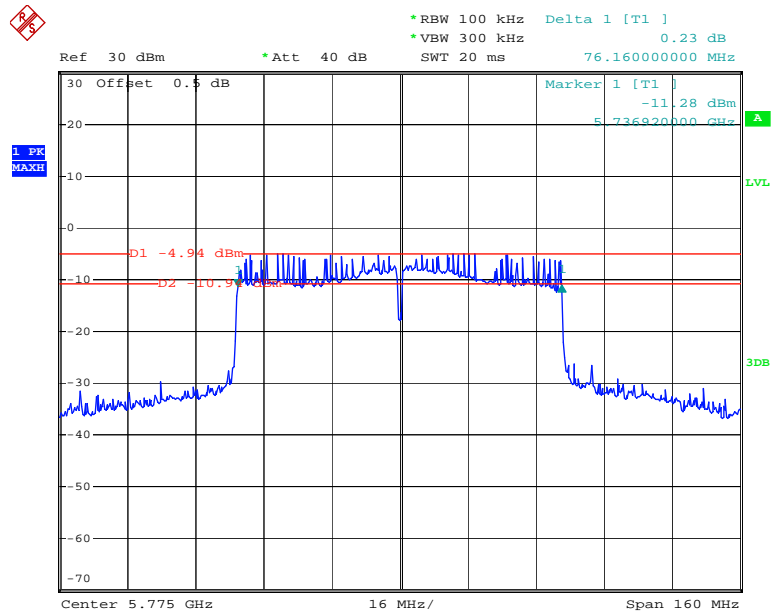

Date: 27.AUG.2020 13:19:03

## Occupied Bandwidth:


## 802.11a Low Channel

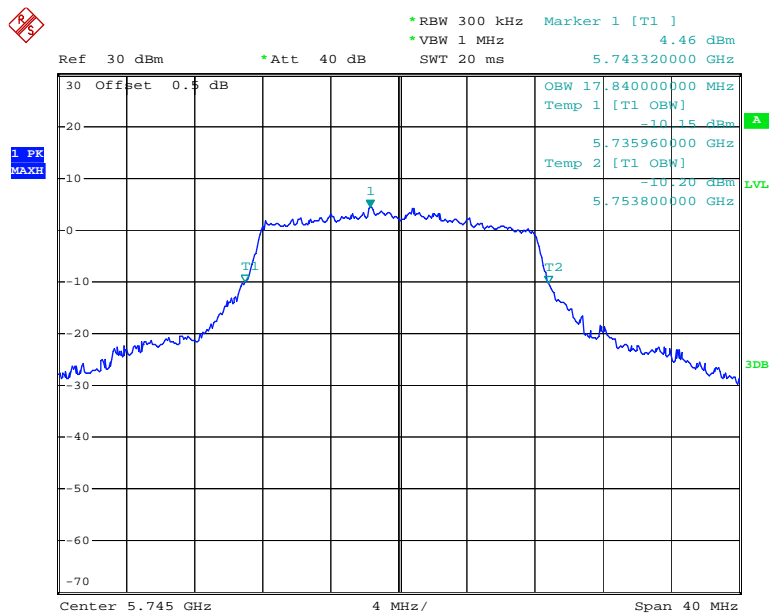

Date: 27.AUG.2020 11:24:20




## 802.11a Middle Channel

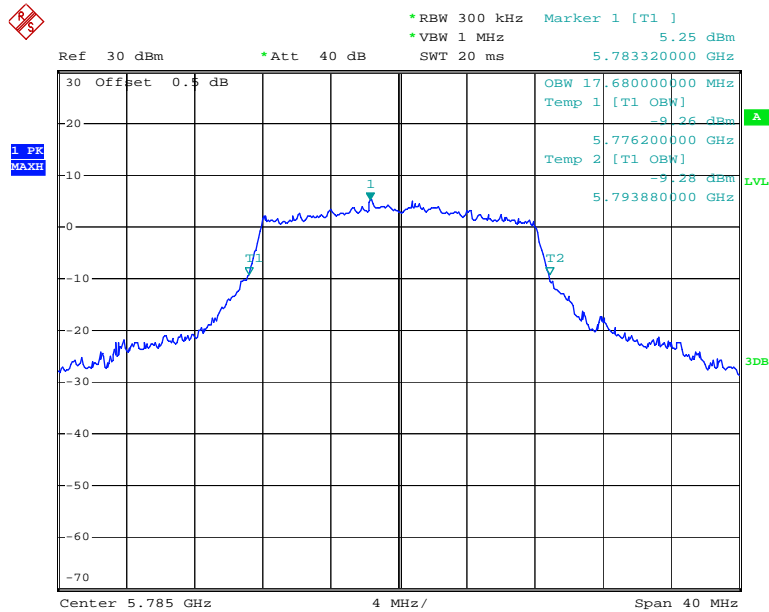

Date: 27.AUG.2020 11:28:33


## 802.11a High Channel

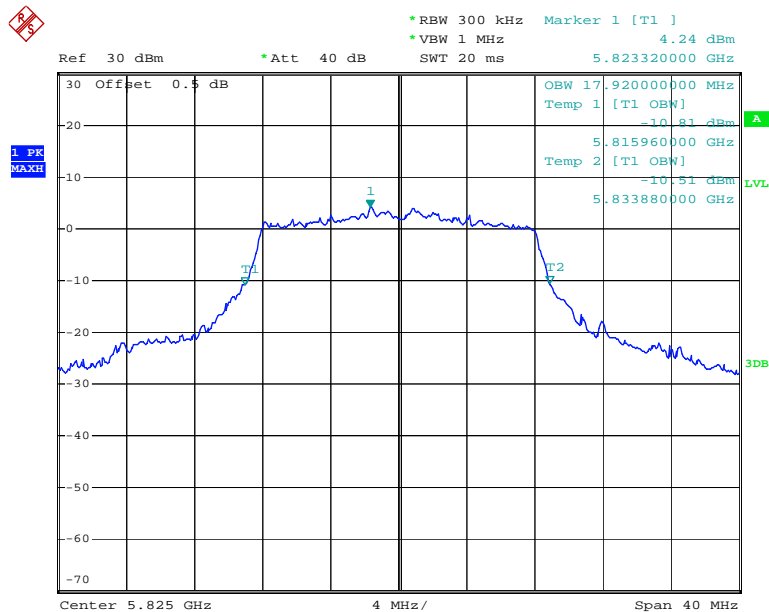

Date: 27.AUG.2020 11:29:34




### 802.11n ht20 Low Channel

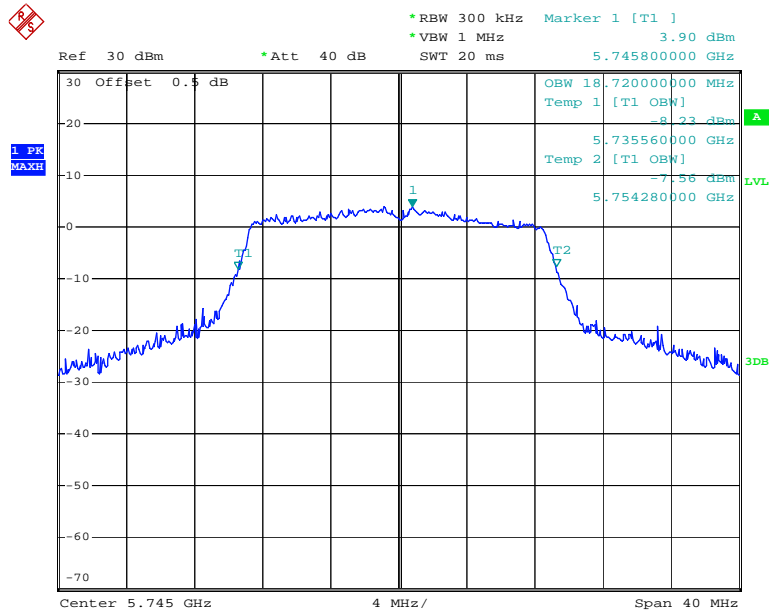

Date: 27.AUG.2020 11:35:40


### 802.11n ht20 Middle Channel

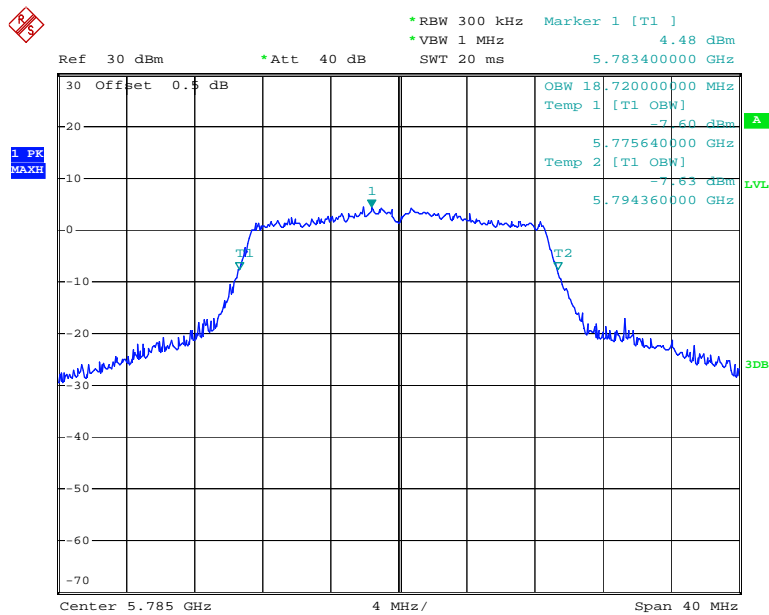

Date: 27.AUG.2020 11:34:28




## 802.11n ht20 High Channel

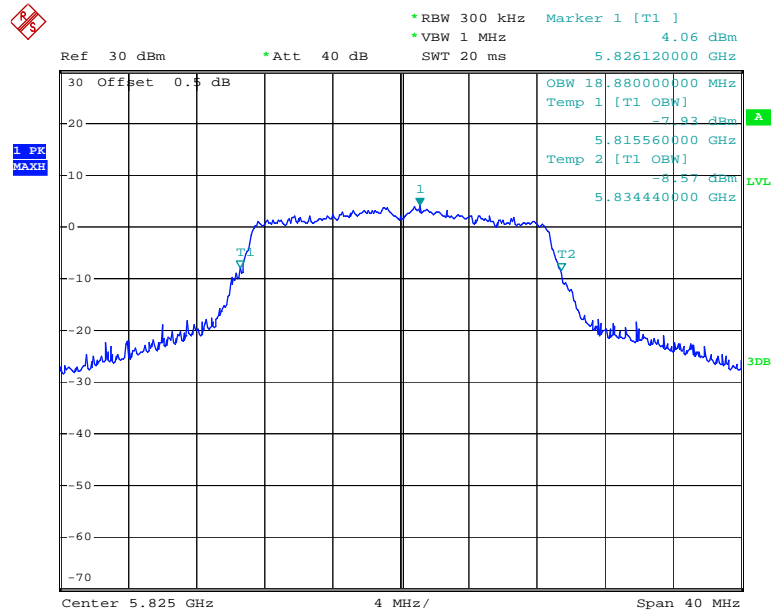

Date: 27.AUG.2020 11:32:04


## 802.11n ht40 Low Channel

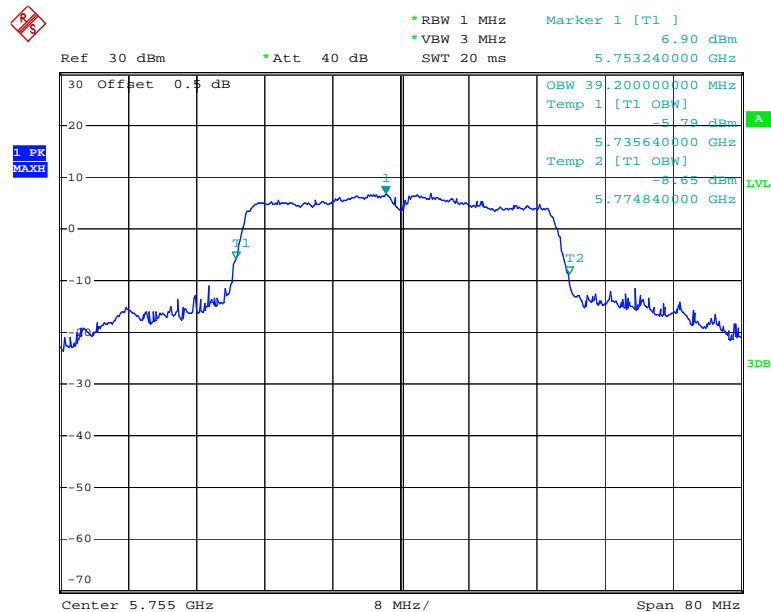

Date: 27.AUG.2020 11:38:23




## 802.11n ht40 High Channel

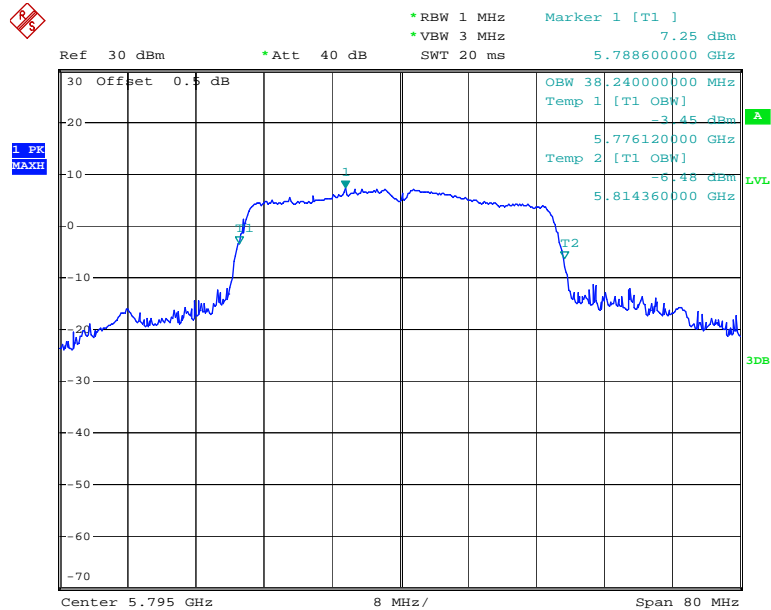

Date: 27.AUG.2020 11:41:01

## 802.11ac vht80 Middle Channel

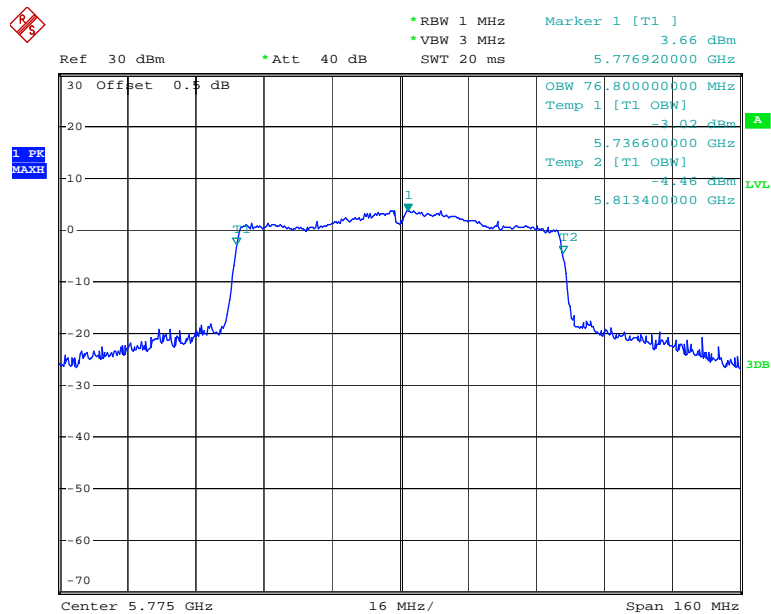

Date: 27.AUG.2020 11:43:39



## **FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER**

---

### **Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 Clause 6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.



## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Equipment List and Details

| Manufacturer | Description               | Model        | Serial Number | Calibration Date | Calibration Due Date |
|--------------|---------------------------|--------------|---------------|------------------|----------------------|
| Unknown      | Coaxial Cable             | C-SJ00-0010  | C0010/02      | Each time        | N/A                  |
| E-Microwave  | Coaxial Attenuators       | EMCA10-5RN-6 | OE01203239    | Each time        | N/A                  |
| Agilent      | USB Wideband Power Sensor | U2021XA      | MY5425009     | 2020-05-09       | 2021-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01



**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 26.5 °C    |
| <b>Relative Humidity:</b> | 65 %       |
| <b>ATM Pressure:</b>      | 100.8 kPa  |
| <b>Tester:</b>            | Chris Mo   |
| <b>Test Date:</b>         | 2020-08-31 |

*Test Mode: Transmitting*

| <b>Mode</b>    | <b>Frequency (MHz)</b> | <b>Conducted Average Output Power (dBm)</b> | <b>Limit</b> |
|----------------|------------------------|---|--------------|
| 802.11a        | 5745                   | 17.29                                       | 30           |
|                | 5785                   | 17.22                                       | 30           |
|                | 5825                   | 17.39                                       | 30           |
| 802.11n ht20   | 5745                   | 17.19                                       | 30           |
|                | 5785                   | 17.14                                       | 30           |
|                | 5825                   | 17.16                                       | 30           |
| 802.11n ht40   | 5755                   | 18.15                                       | 30           |
|                | 5795                   | 17.96                                       | 30           |
| 802.11ac vht80 | 5775                   | 18.16                                       | 30           |

Note: the duty cycle factor have been calculated into the Conducted power result. Antenna gain is 3.5dBi. meet the EIRP requirement of RSS-247.



---

**FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY**

---

**Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm  $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output



power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 Clause 6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.



## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10} B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

## Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101474        | 2020-01-09       | 2021-01-09           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/02      | Each time        | N/A                  |

*\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*



**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 27.1 °C    |
| <b>Relative Humidity:</b> | 72 %       |
| <b>ATM Pressure:</b>      | 100.9 kPa  |
| <b>Tester:</b>            | Chris Mo   |
| <b>Test Date:</b>         | 2020-08-27 |

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table and plot.*

| Mode         | Channel | Frequency (MHz) | Reading (dBm/300kHz) | Power Spectral Density (dBm/500kHz) | Limit (dBm/500kHz) |
|--------------|---------|-----------------|----------------------|-------------------------------------|--------------------|
| 802.11 a     | Low     | 5745            | -2.40                | -0.18                               | 30                 |
|              | Middle  | 5785            | -1.89                | 0.33                                | 30                 |
|              | High    | 5825            | -2.79                | -0.57                               | 30                 |
| 802.11n ht20 | Low     | 5745            | -2.30                | -0.08                               | 30                 |
|              | Middle  | 5785            | -2.20                | 0.02                                | 30                 |
|              | High    | 5825            | -2.14                | 0.08                                | 30                 |
| 802.11n ht40 | Low     | 5755            | -4.48                | -2.26                               | 30                 |
|              | High    | 5795            | -3.92                | -1.7                                | 30                 |
| 802.11n ht80 | Middle  | 5775            | -8.14                | -5.92                               | 30                 |

Note:


The maximum antenna gain is 3.5dBi in 5GHz band.

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.




### 802.11a Low Channel

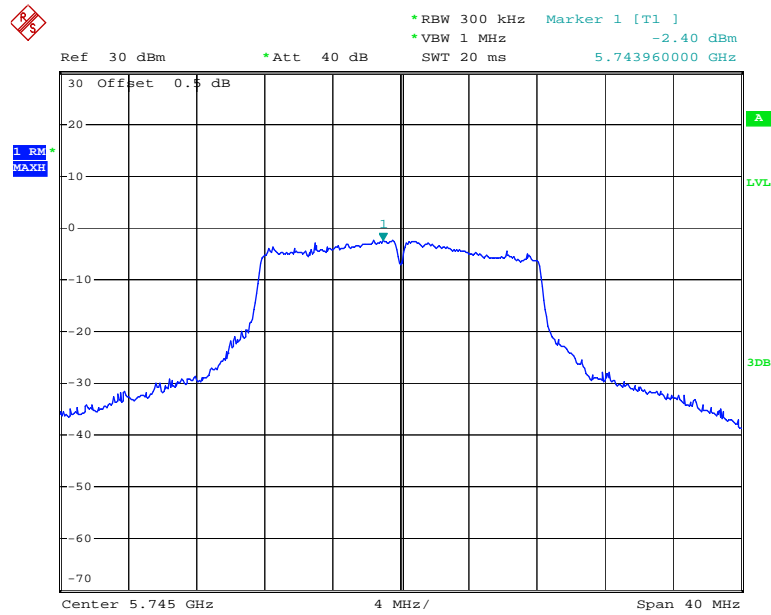

Date: 27.AUG.2020 11:24:32


### 802.11a Middle Channel

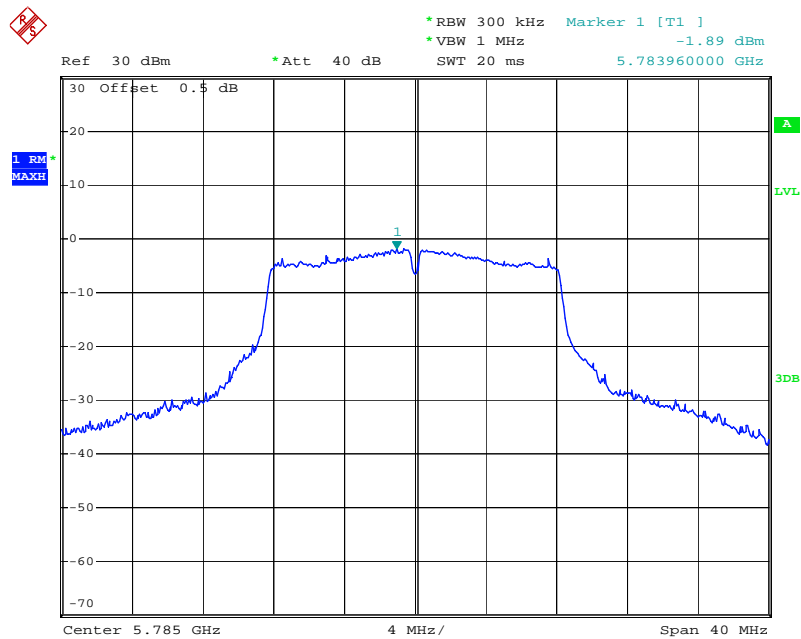

Date: 27.AUG.2020 11:28:44




### 802.11a High Channel

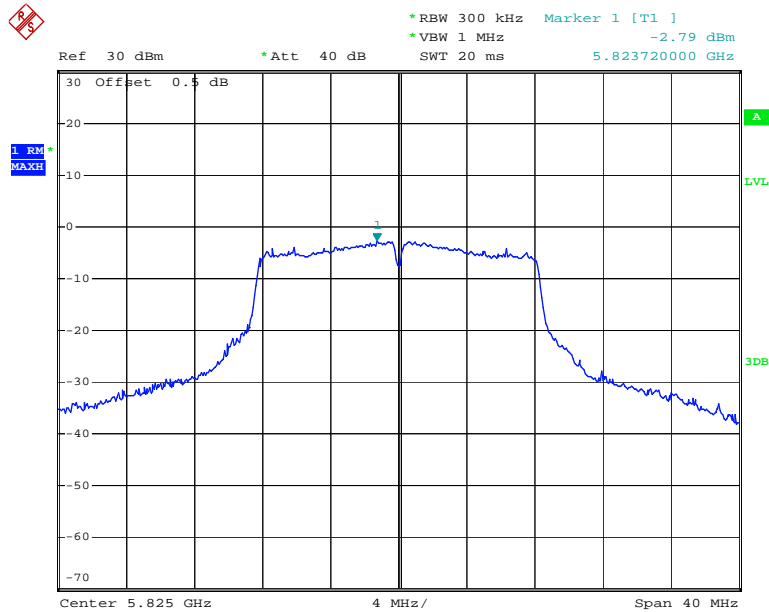

Date: 27.AUG.2020 11:29:42


### 802.11n ht20 Low Channel

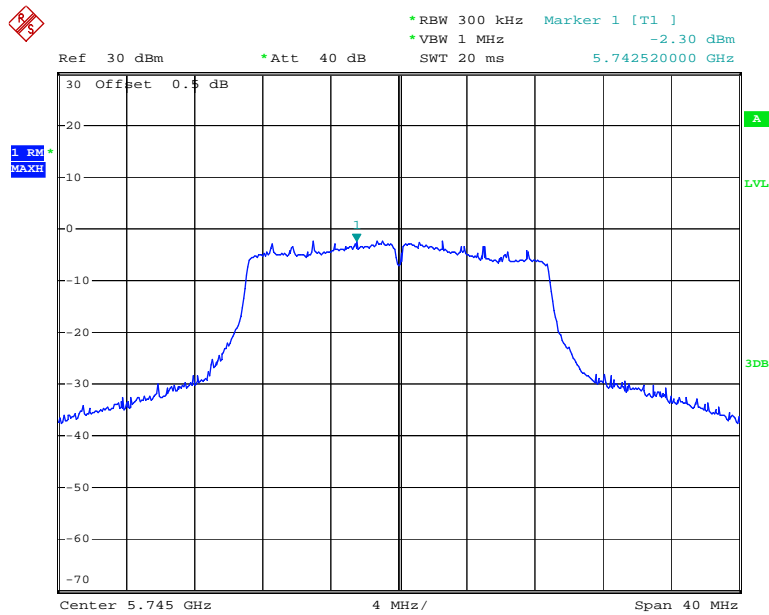

Date: 27.AUG.2020 11:35:52




## 802.11n ht20 Middle Channel

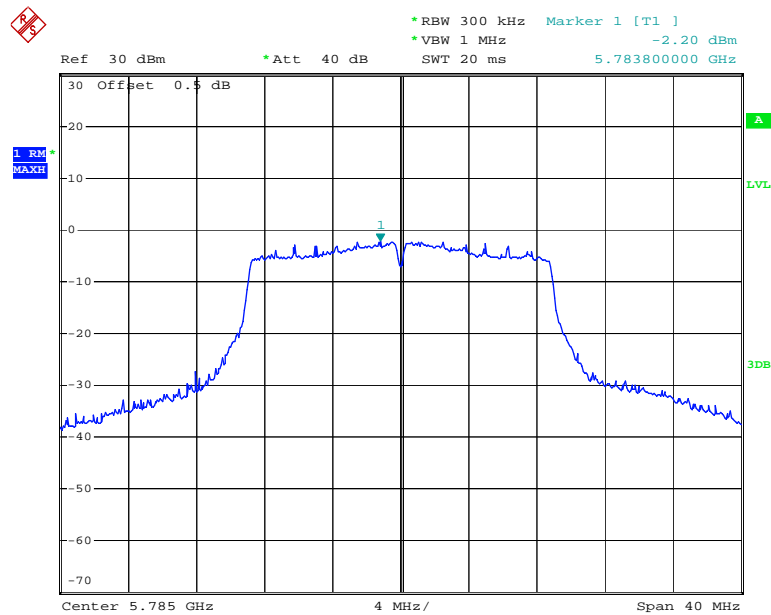

Date: 27.AUG.2020 11:34:39


## 802.11n ht20 High Channel

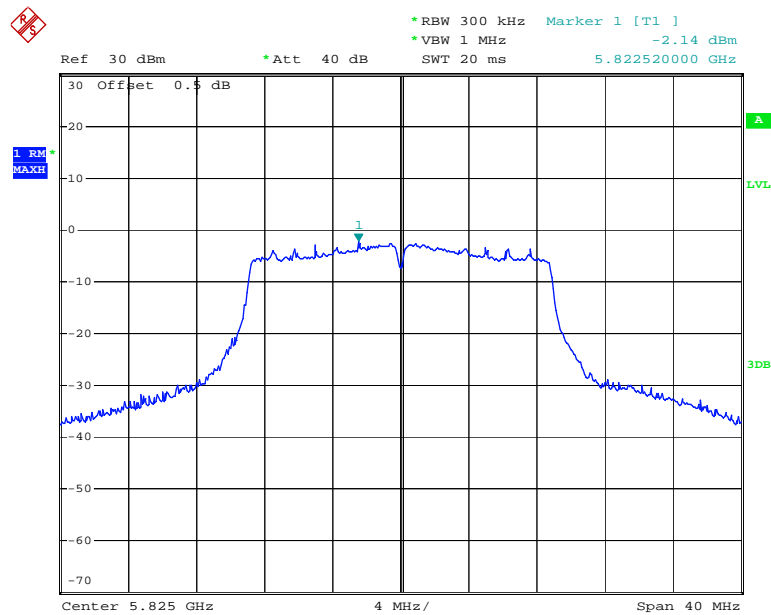

Date: 27.AUG.2020 11:32:15




### 802.11n ht40 Low Channel

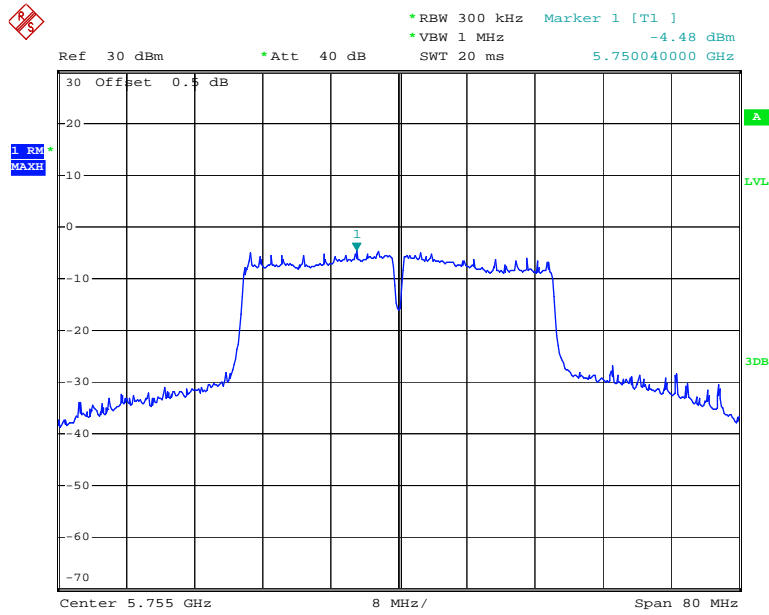

Date: 27.AUG.2020 11:38:34


### 802.11n ht40 High Channel

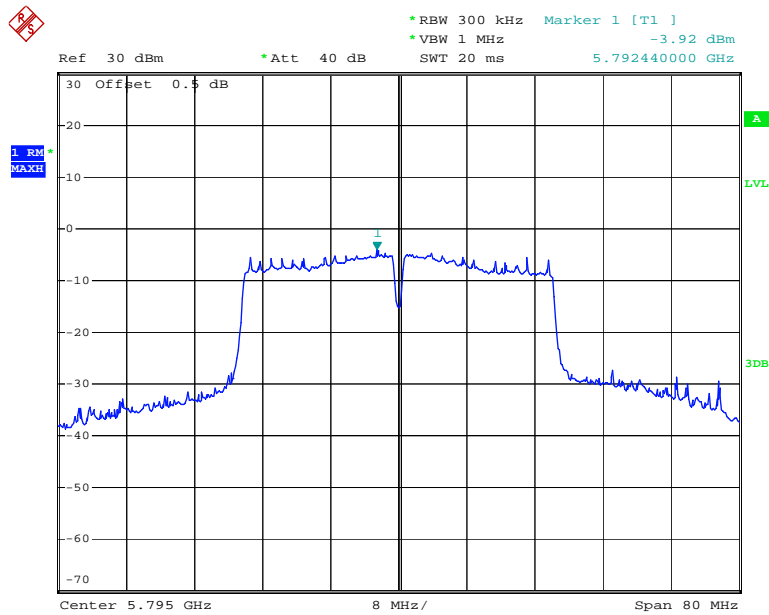

Date: 27.AUG.2020 11:41:13



### 802.11ac vht80 Middle Channel

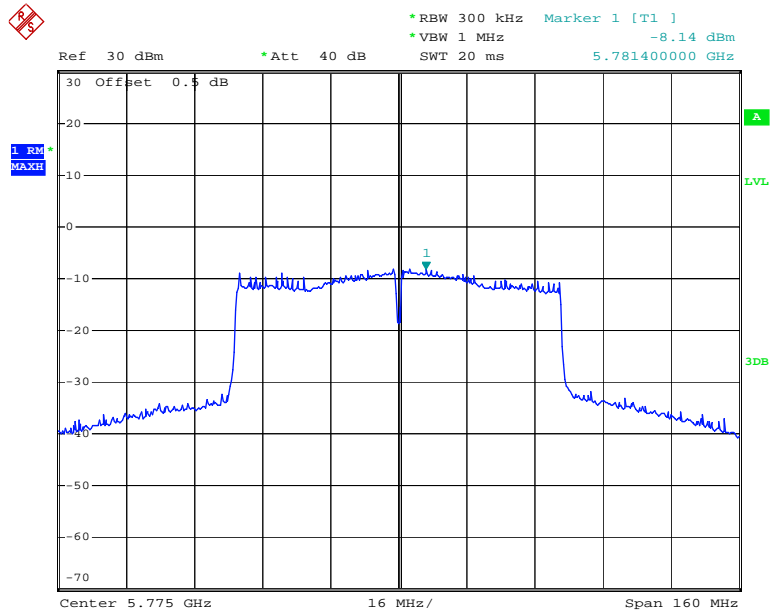

Date: 27.AUG.2020 11:43:50



---

## **RSS-247 CLAUSE 6.4- ADDITIONAL REQUIREMENT**

---

### **Applicable Standard**

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
  - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;<sup>4</sup>
  - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
  - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
  - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.



## **Result**

### **Compliance.**

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

The device operates on 5725-5850MHz, the antennas are un-detachable, and meets the EIPR limit.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***