



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

802.11b/g HALF SIZE MINI-PCI WLAN MODULE

MODEL NUMBER: PA3426U-1MPC

FCC ID: CJ6UPA3426WL

REPORT NUMBER: 04U3194-1 REV B

ISSUE DATE: FEBRUARY 25, 2005

Prepared for
**TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN**

Prepared by
**COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
B	Revise antenna type and description under Section 5.3	Danielle Z.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	8
5.6. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. LIMITS AND RESULTS	12
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	12
7.1.1. 6 dB BANDWIDTH	12
7.1.2. 99% BANDWIDTH.....	20
7.1.3. PEAK OUTPUT POWER	28
7.1.4. AVERAGE POWER.....	37
7.1.5. PEAK POWER SPECTRAL DENSITY	38
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	46
7.2. RADIATED EMISSIONS.....	61
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	61
7.2.2. TRANSMITTER ABOVE 1 GHz WITH ANTENNA HTL017 IN FIREBOLT	64
7.2.2.1 STAND-ALONE CONFIGURATION.....	64
7.2.2.2 PORTABLE CONFIGURATION	83
7.2.3. TRANSMITTER ABOVE 1 GHz WITH ANTENNA HTL004 IN FIREBOLT	102
7.2.3.1 STAND-ALONE CONFIGURATION.....	102
7.2.3.2 PORTABLE CONFIGURATION	121
7.2.4. CO-LOCATED TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, WITH ANTENNA HTL017 IN FIREBOLT	140
7.2.4.1 STAND-ALONE CONFIGURATION, WITH BLUETOOTH BC04	140
7.2.4.2 MOBILE CONFIGURATION, WITH BLUETOOTH BC04.....	141
7.2.4.3 PORTABLE CONFIGURATION, WITH BLUETOOTH BC04.....	150
7.2.4.4 STAND-ALONE CONFIGURATION, WITH BLUETOOTH BC02	159
7.2.4.5 MOBILE CONFIGURATION, WITH BLUETOOTH BC02.....	160

7.2.4.6	PORTABLE CONFIGURATION, WITH BLUETOOTH BC02.....	169
7.2.5	CO-LOCATED TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, WITH ANTENNA HTL004 IN FIREBOLT	178
7.2.5.1	STAND-ALONE CONFIGURATION, WITH BLUETOOTH BC04.....	178
7.2.5.2	MOBILE CONFIGURATION, WITH BLUETOOTH BC04.....	179
7.2.5.3	PORTABLE CONFIGURATION, WITH BLUETOOTH BC04.....	188
7.2.5.4	STAND-ALONE CONFIGURATION, WITH BLUETOOTH BC02	197
7.2.5.5	MOBILE CONFIGURATION, WITH BLUETOOTH BC02.....	198
7.2.5.6	PORTABLE CONFIGURATION, WITH BLUETOOTH BC02.....	207
7.2.6	WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, WITH ANTENNA HTL017 IN FIREBOLT	216
7.2.6.1	STAND-ALONE CONFIGURATION.....	216
7.2.6.2	PORTABLE CONFIGURATION	220
7.2.7	WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, WITH ANTENNA HTL004 IN FIREBOLT	224
7.2.7.1	STAND-ALONE CONFIGURATION.....	224
7.2.7.2	PORTABLE CONFIGURATION	228
7.3	POWERLINE CONDUCTED EMISSIONS	232
8	SETUP PHOTOS	236

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: TOSHIBA CORPORATION DIGITAL MEDIA NETWORK COMPANY
2-9 SUEHIRO-CHO, OME
TOKYO, 198-8710, JAPAN

EUT DESCRIPTION: 802.11 b/g HALF SIZE MINI-PCI WLAN MODULE

MODEL: PA3426U-1MPC

SERIAL NUMBER: 0011F5-32AFOF

DATE TESTED: JANUARY 03 Thru FEBRUARY 04, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g transceiver WLAN.

The radio module is manufactured by Atheros.

Optionally the WLAN may be collocated with two Bluetooth transceivers BC04 (FCC ID: CJ6UPA3418BT) or BC02 (FCC ID: CJ6UPA3232BT).

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	19.44	87.90
2412 - 2462	802.11g	22.97	198.15
2412 - 2462	802.11g Turbo	21.53	142.23

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes four PIFA Film type antennas, each has a maximum gain as follows:

PIFA type antennas:

1. HTL017 - 4.24 dBi at 2.4GHz without cable loss;
2. HTL004 - 4.18 dBi at 2.4GHz without cable loss;
3. HTL008 - 2.89 dBi at 2.4GHz without cable loss;
4. TIAN01 - 4.02 dBi at 2.4GHz without cable loss.

The HTL017 antenna, which has the highest gain, represents the worst-case scenario, however the tests were also conducted with HTL004 antenna too just to verify the worst-case.

5.4. SOFTWARE AND FIRMWARE

The test firmware was installed in the EUT during testing.

The test utility software used during testing was “art program” rev. V5_2_b14.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2412 MHz for both b and g modes.

The worst-case data rate for this channel is determined to be 1 Mb/s for b mode and 6 Mb/s for g mode, based on previous experience with 802.11b/g WLAN product design architectures.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	TOSHIBA	PPM20U-AAAA8	Z3044588JU	DOC
AC/DC Adapter	TOSHIBA	PA3282-1ACA	148662	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	115VAC	Unshielded	2m	No
2	DC	1	DC	Unshielded	1.5m	No


TEST SETUP

Stand-alone and Portable configurations were used during testing: Mobile configuration was used for co-location testing only. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS – FOR STAND-ALONE POSITION

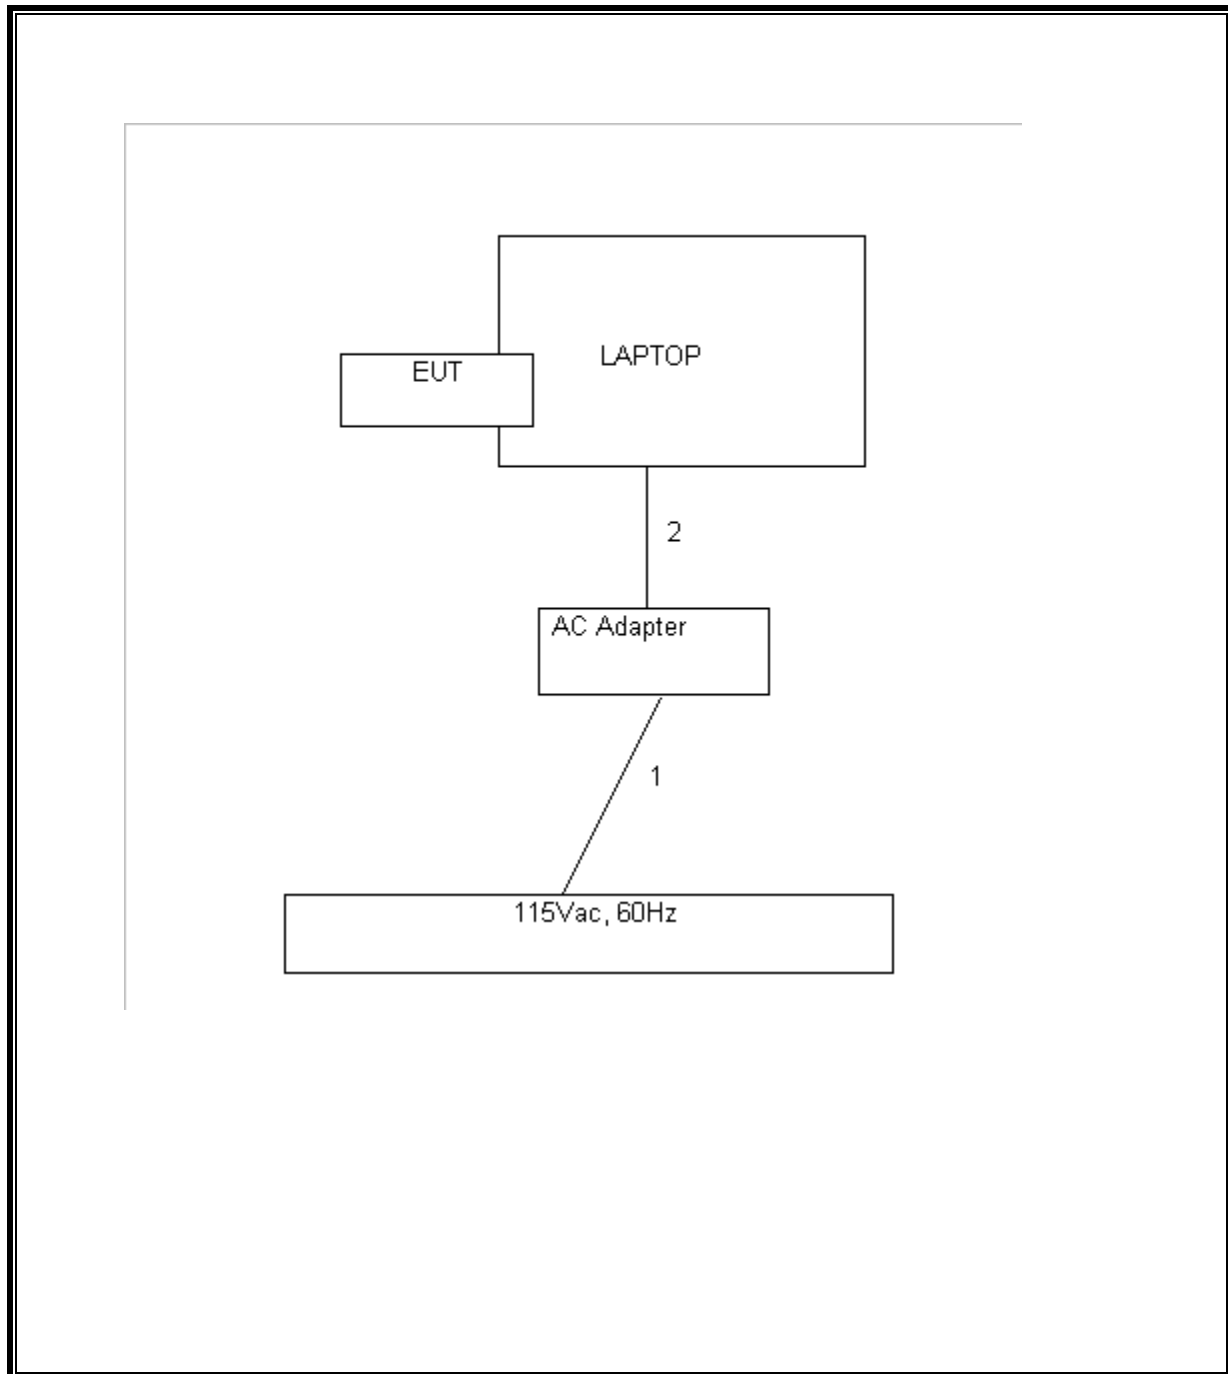

SETUP DIAGRAM FOR TESTS – FOR PORTABLE

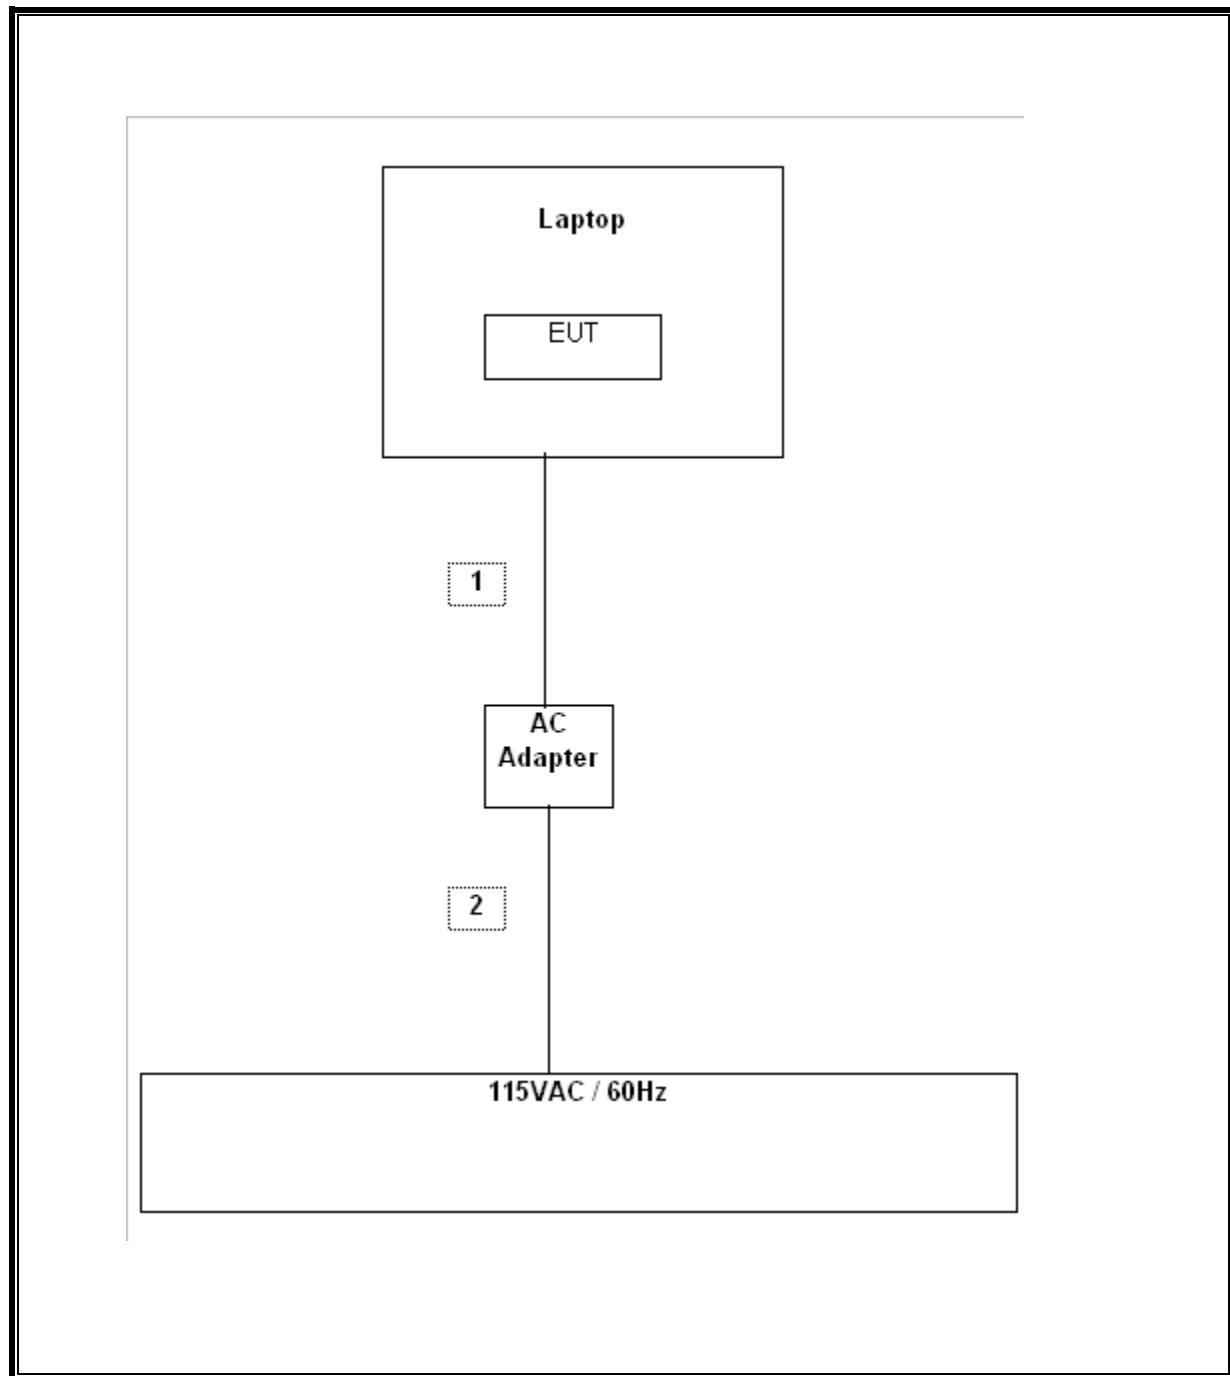

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Triplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2005
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/2005
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	9/21/2005
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/2006
Preamplifier, 1300MHz	HP	8447D	2944A06550	8/26/2005
PSA Series Spectrum Analyzer	Agilent	E4440A	US42511954	6/16/2005
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/2006
2.7GHz HPF	MicroTronic	HPM13194	2	CNR

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12030	500	11530
Middle	2437	12000	500	11500
High	2462	12030	500	11530


802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16400	500	15900
Middle	2437	16300	500	15800
High	2462	16400	500	15900


802.11g Turbo Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Middle	2437	32500	500	32000


6 DB BANDWIDTH (802.11b MODE)

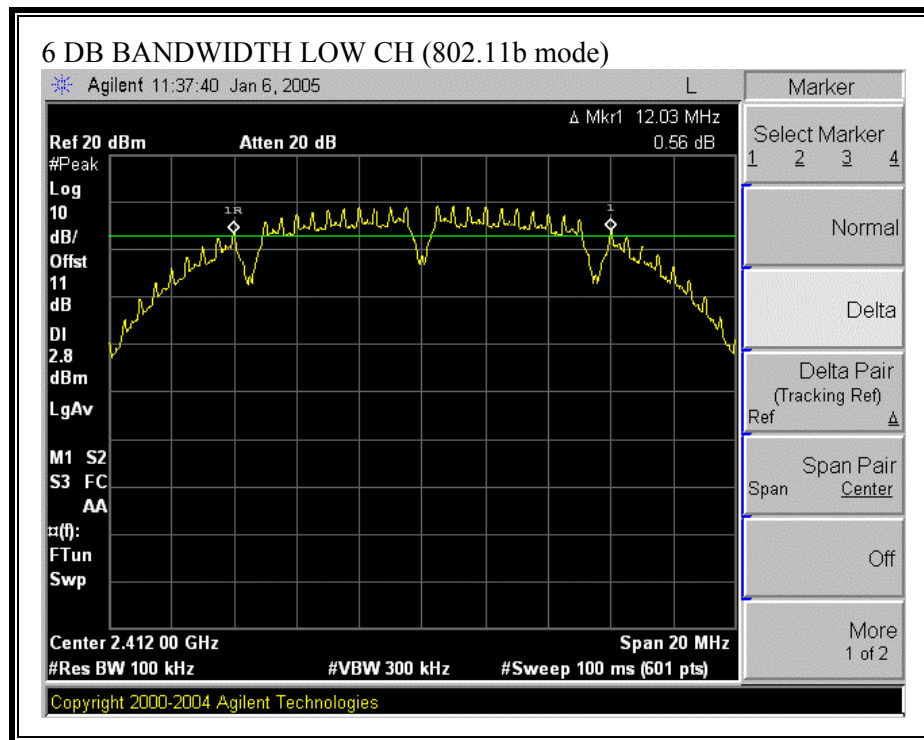


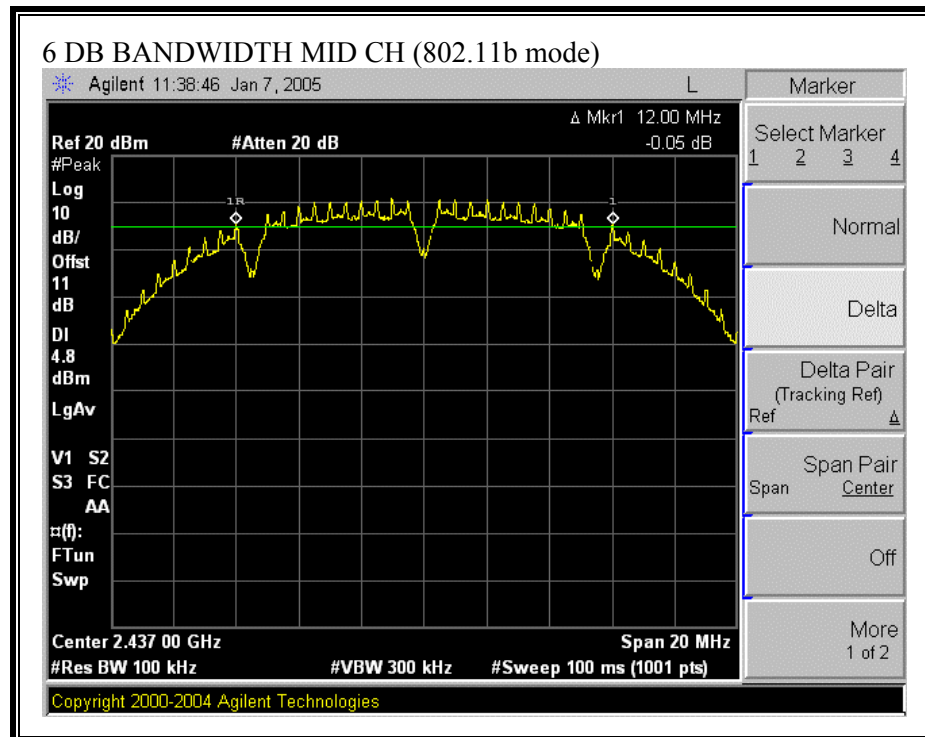


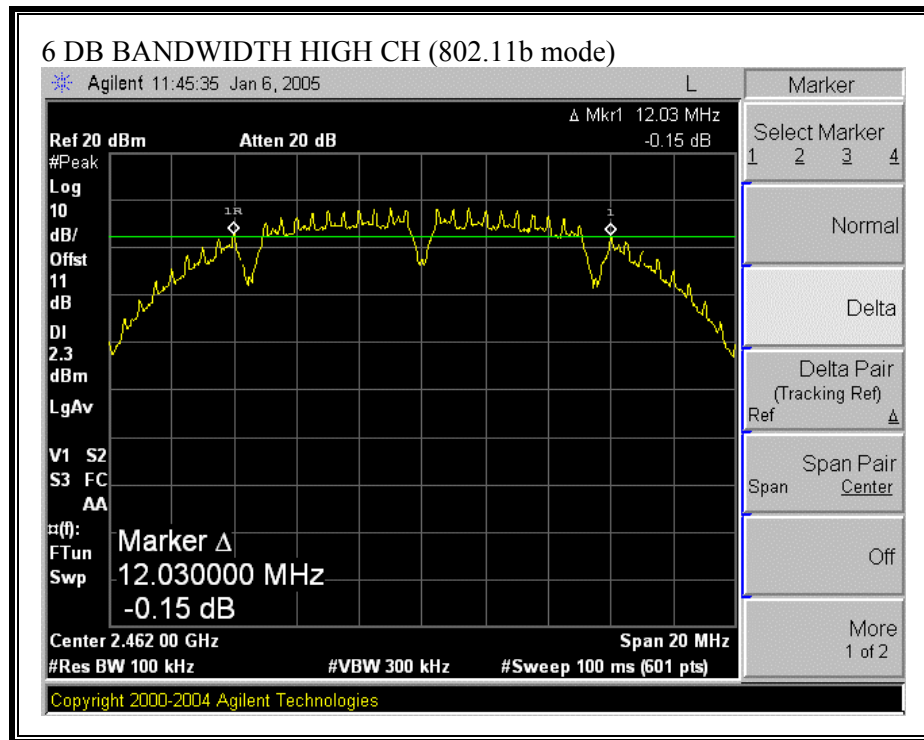


6 DB BANDWIDTH (802.11g MODE)

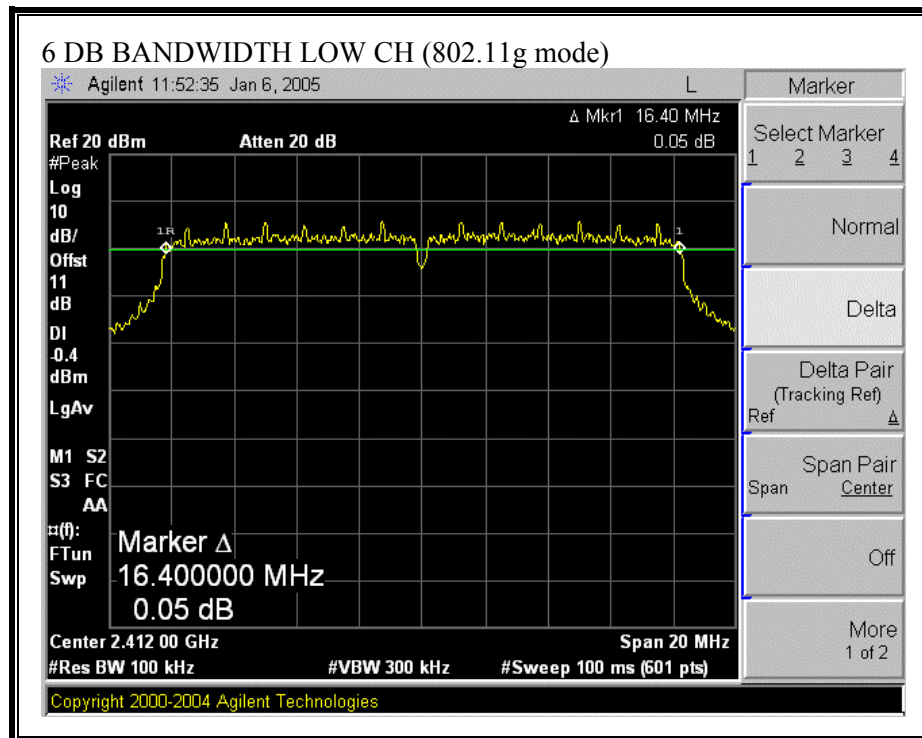

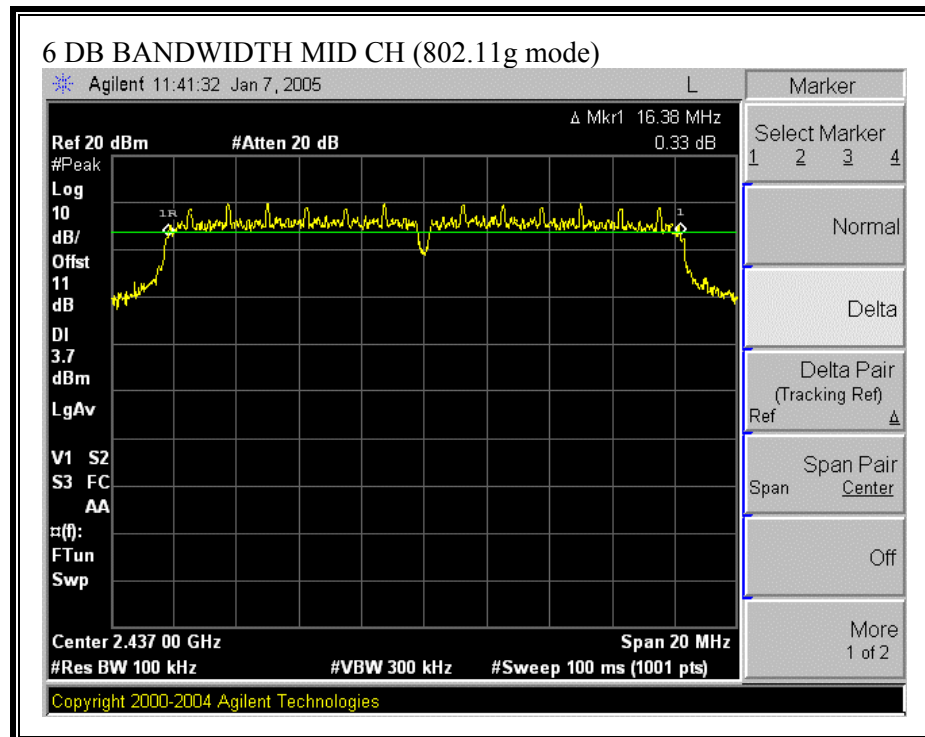

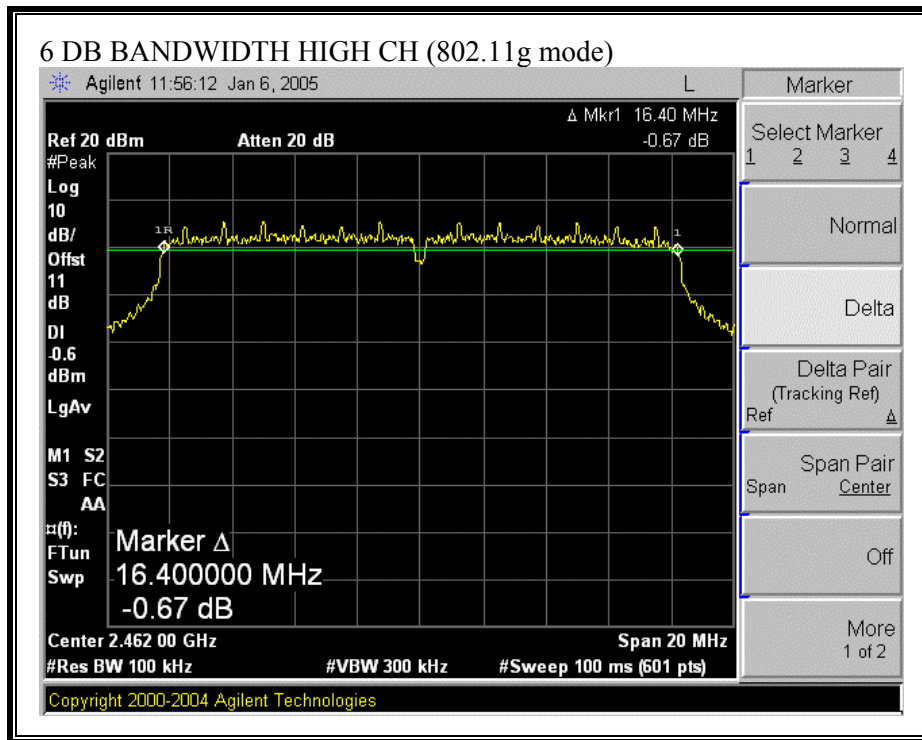

6 DB BANDWIDTH (802.11g TURBO MODE)

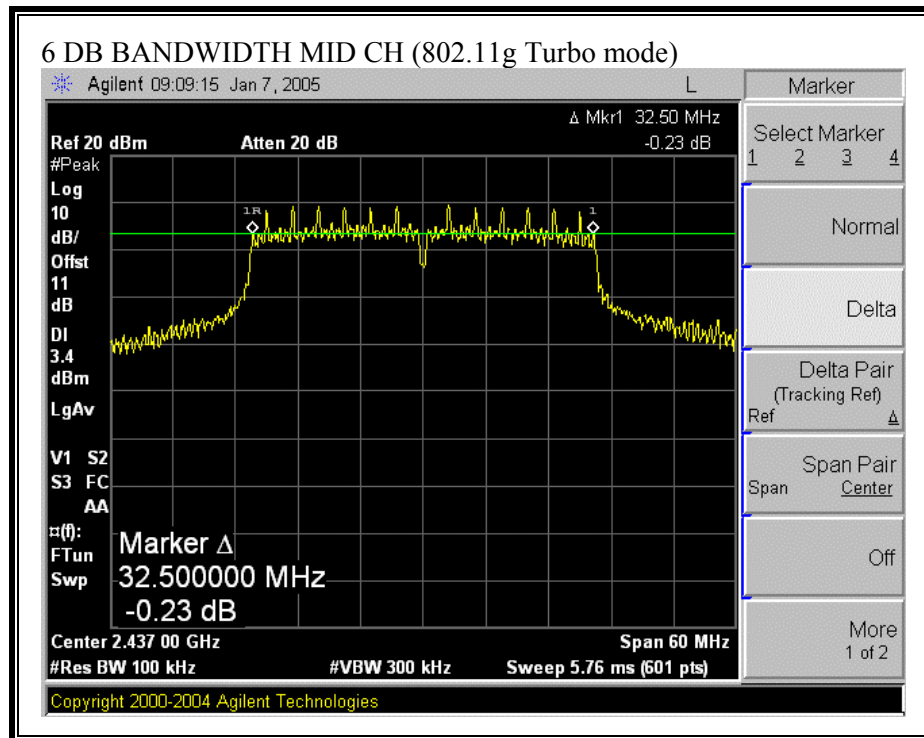

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.8089
Middle	2437	15.8007
High	2462	15.8009


802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.6204
Middle	2437	16.6343
High	2462	16.6233


802.11g Turbo Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Middle	2437	32.8648


99% BANDWIDTH (802.11b MODE)

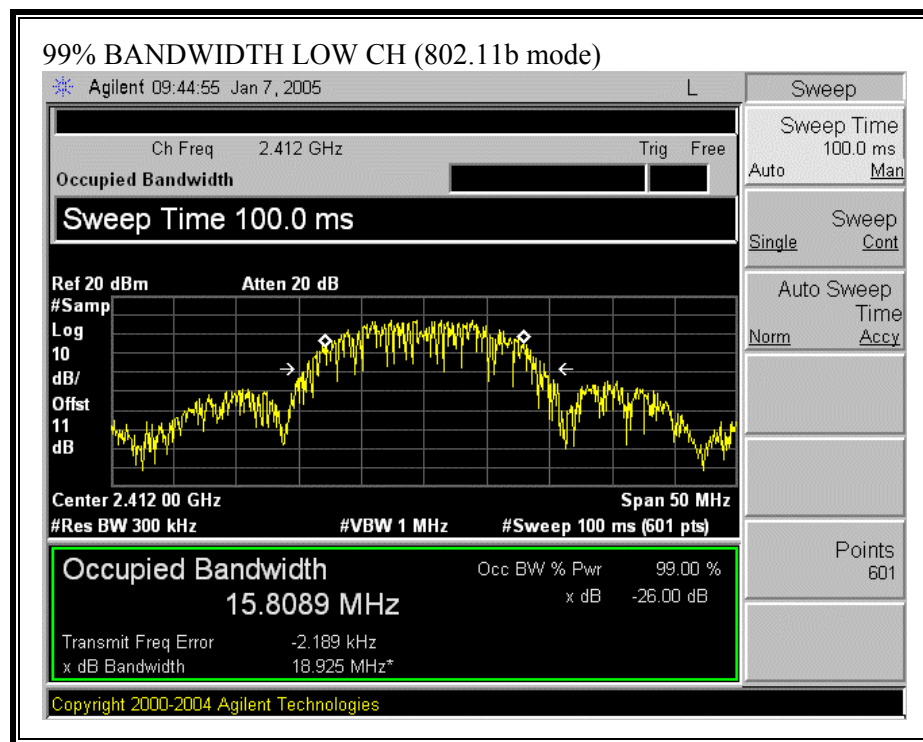


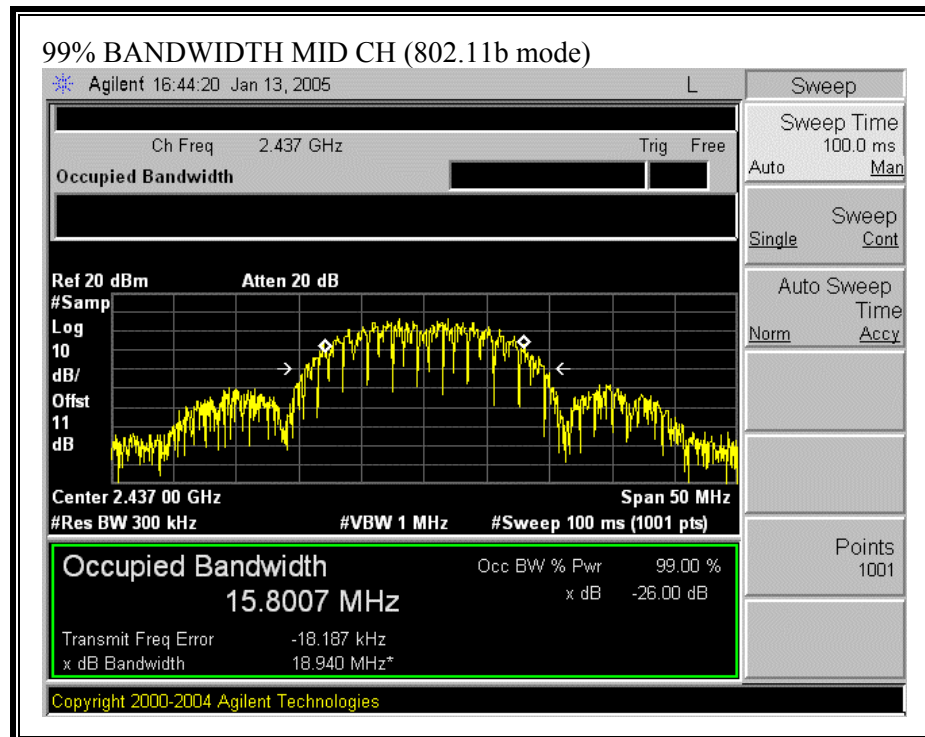


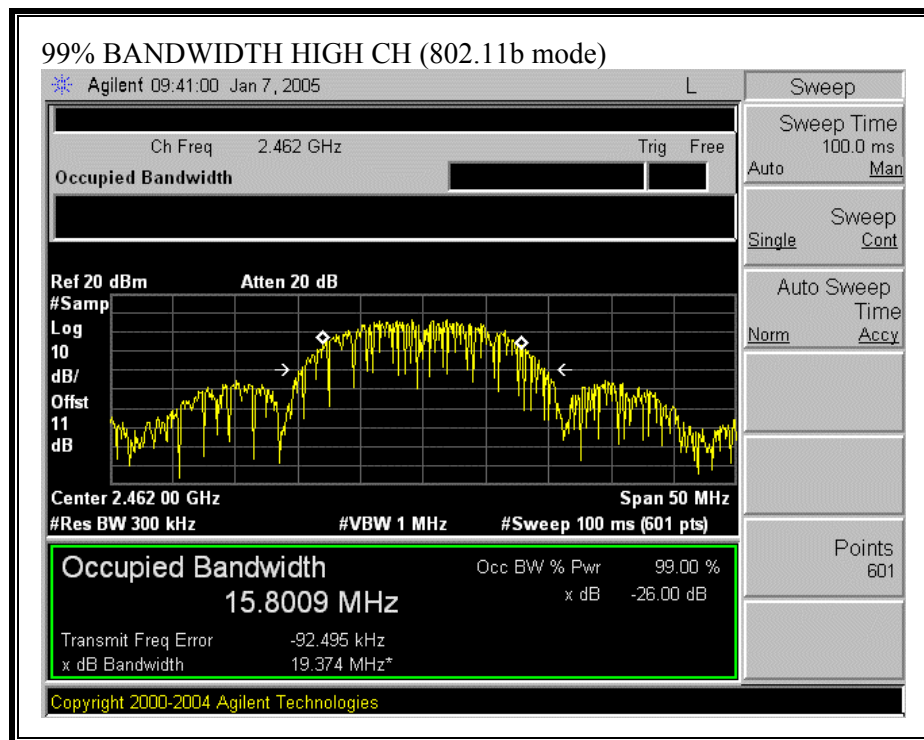


99% BANDWIDTH (802.11g MODE)

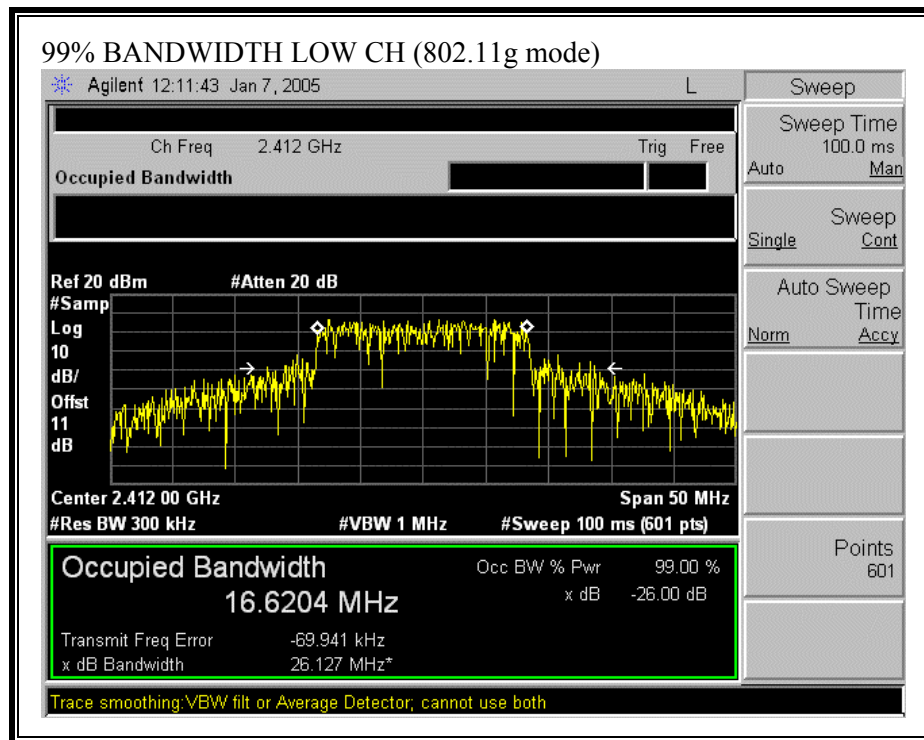

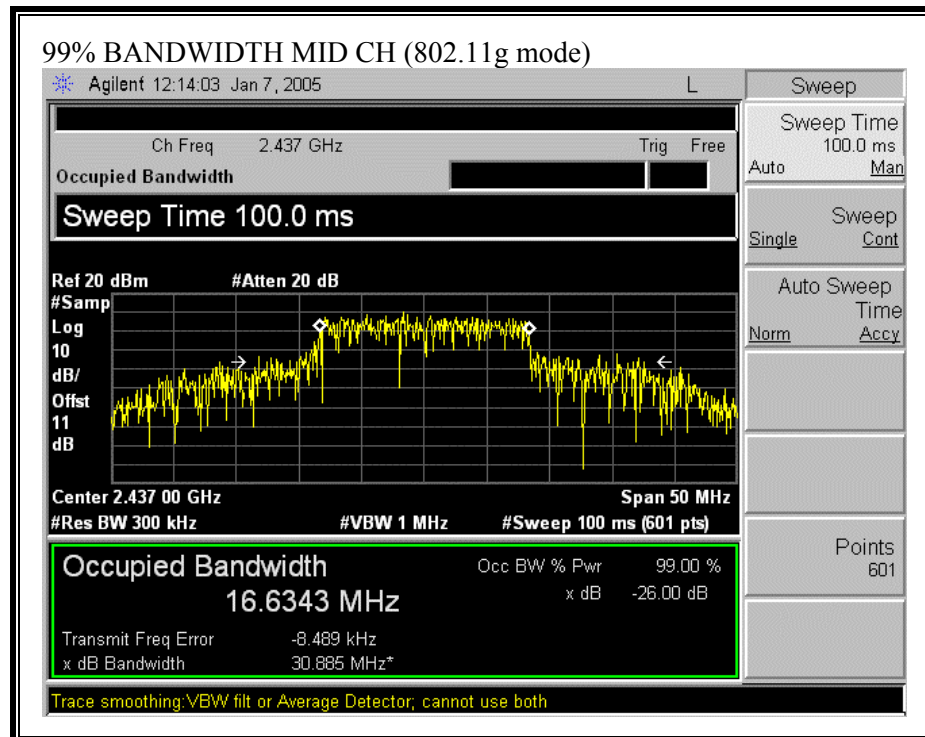

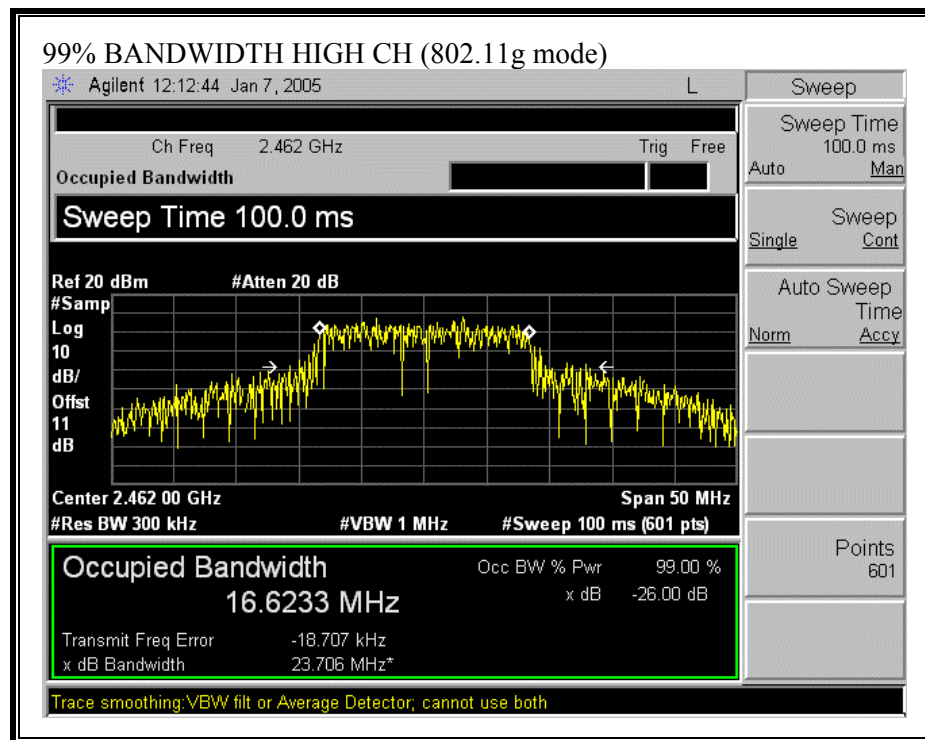

99% BANDWIDTH (802.11g TURBO MODE)

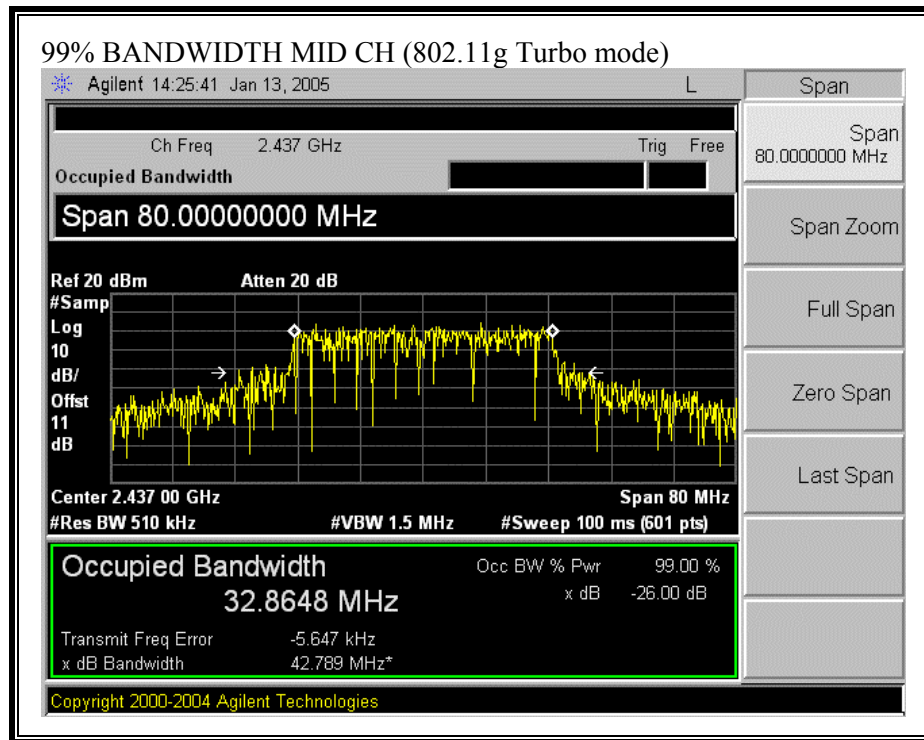

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 4.24 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.44	30	-10.56
Middle	2437	19.39	30	-10.61
High	2462	19.40	30	-10.60


802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.97	30	-7.03
Middle	2437	22.74	30	-7.26
High	2462	22.78	30	-7.22


802.11g Turbo Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	21.53	30	-8.47


OUTPUT POWER (802.11b MODE)

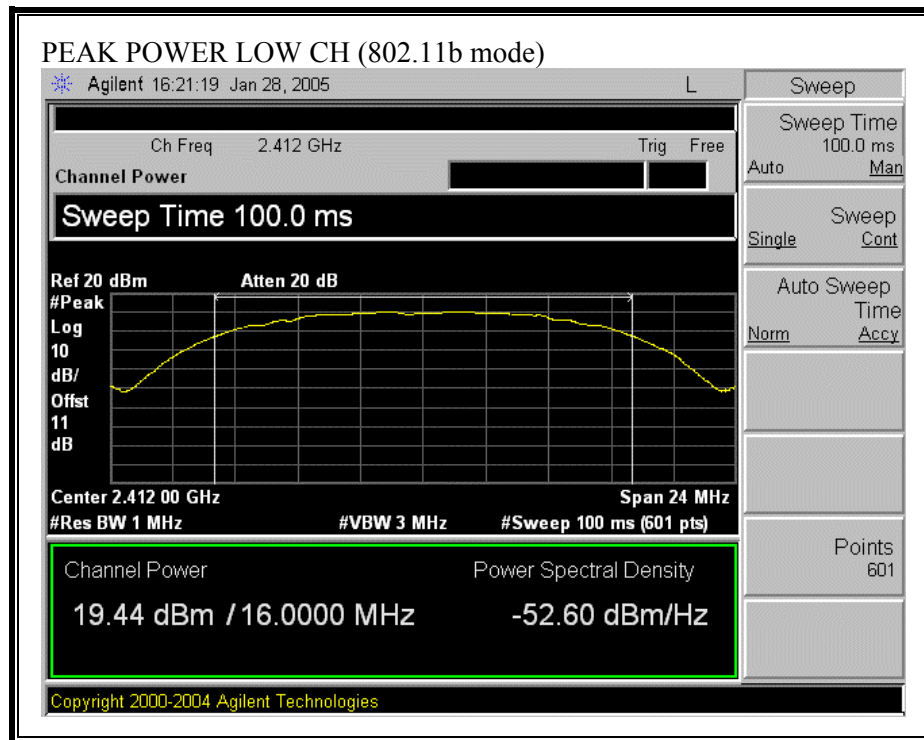


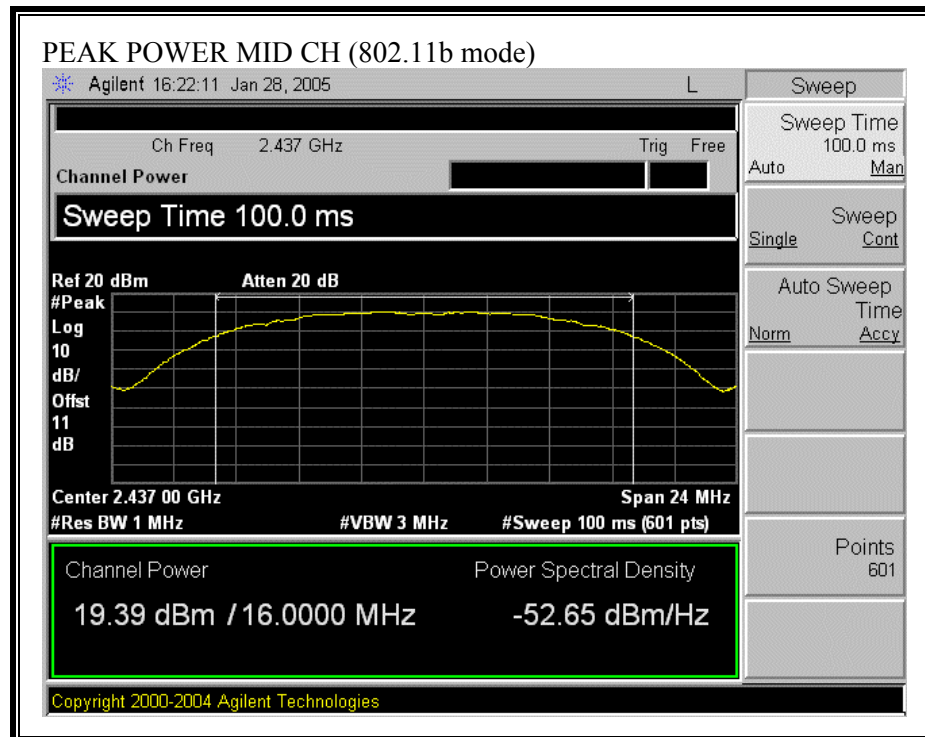


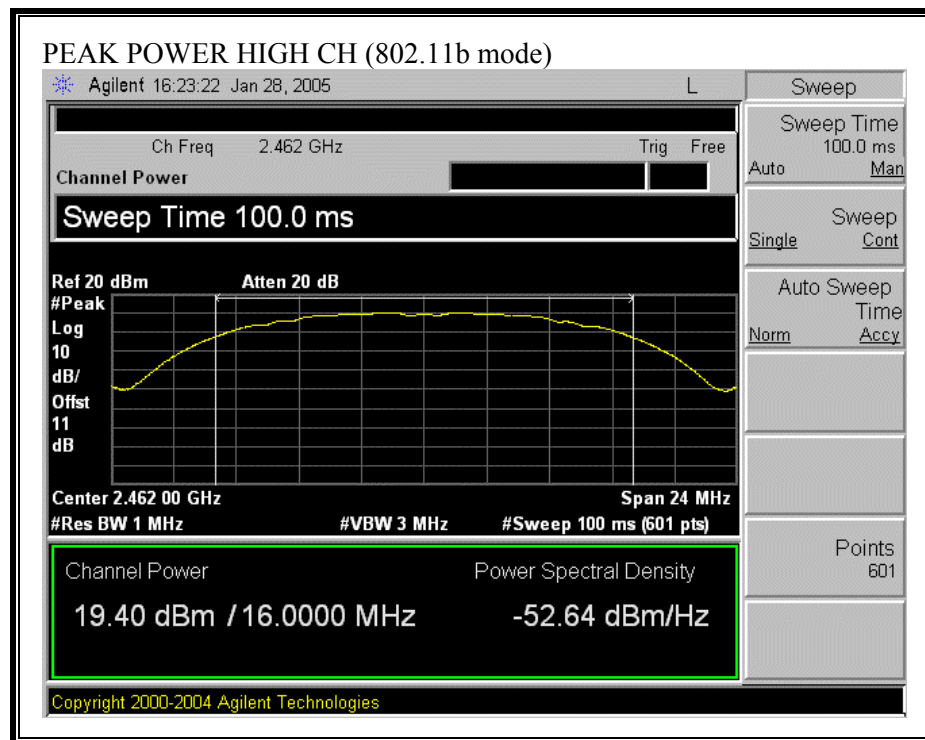


OUTPUT POWER (802.11g MODE)

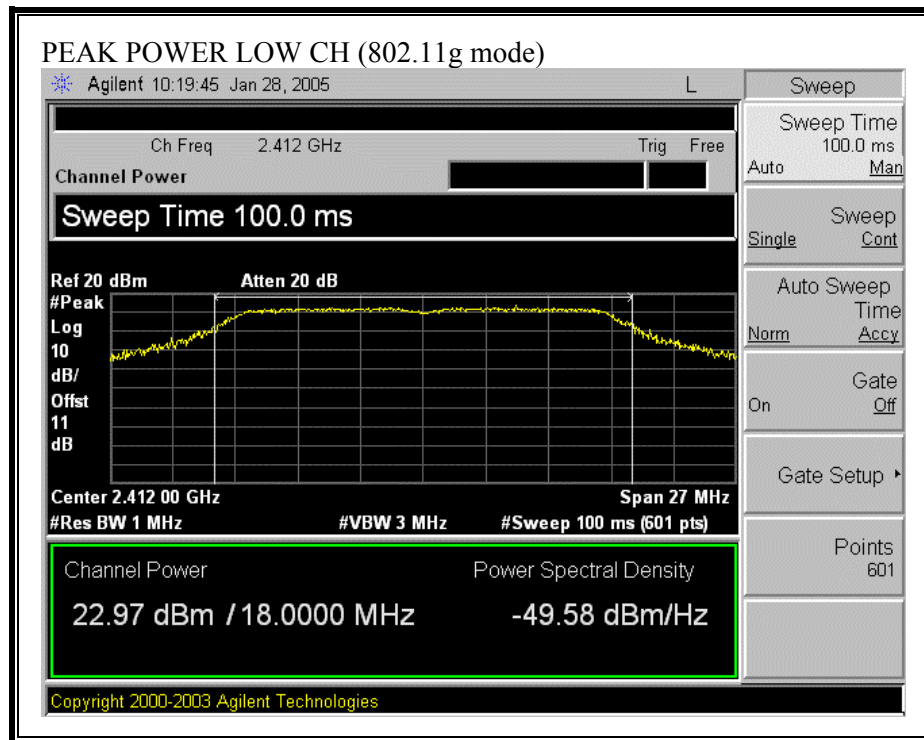

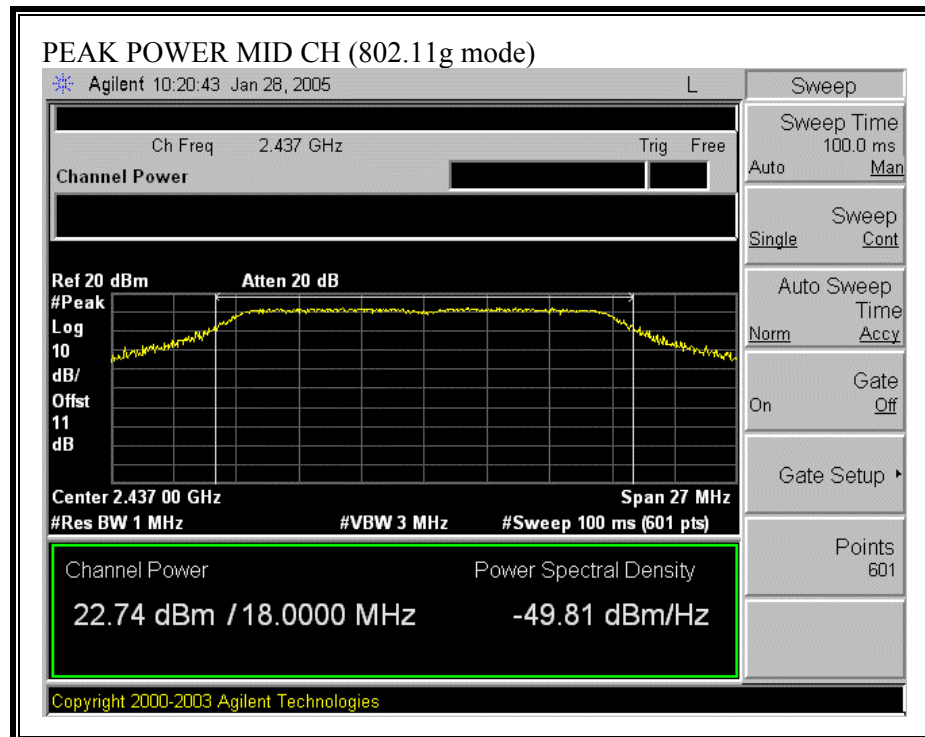

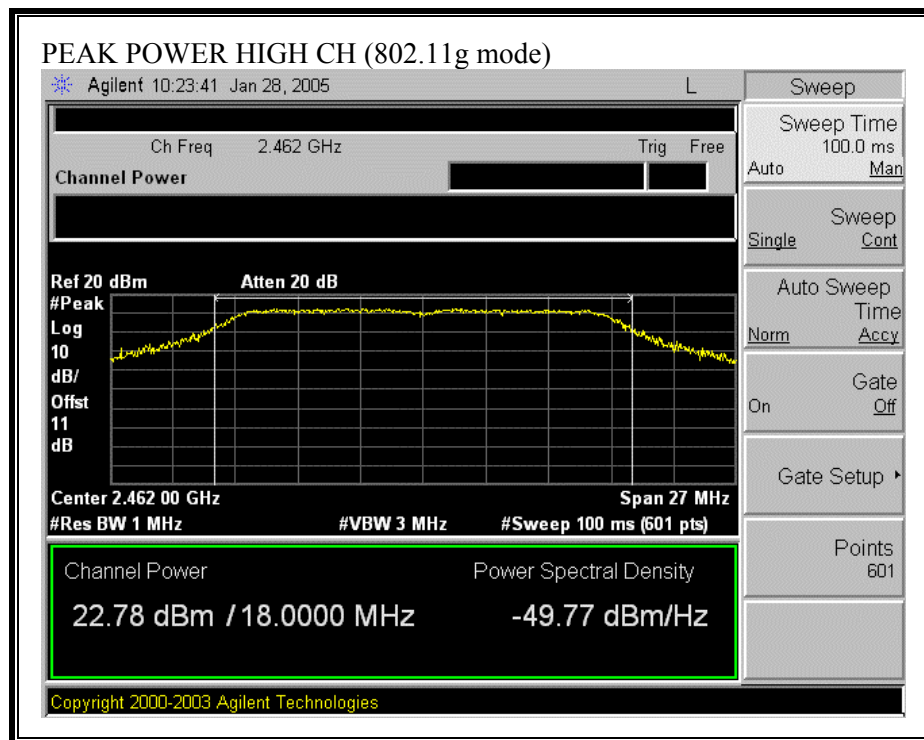

OUTPUT POWER (802.11g TURBO MODE)

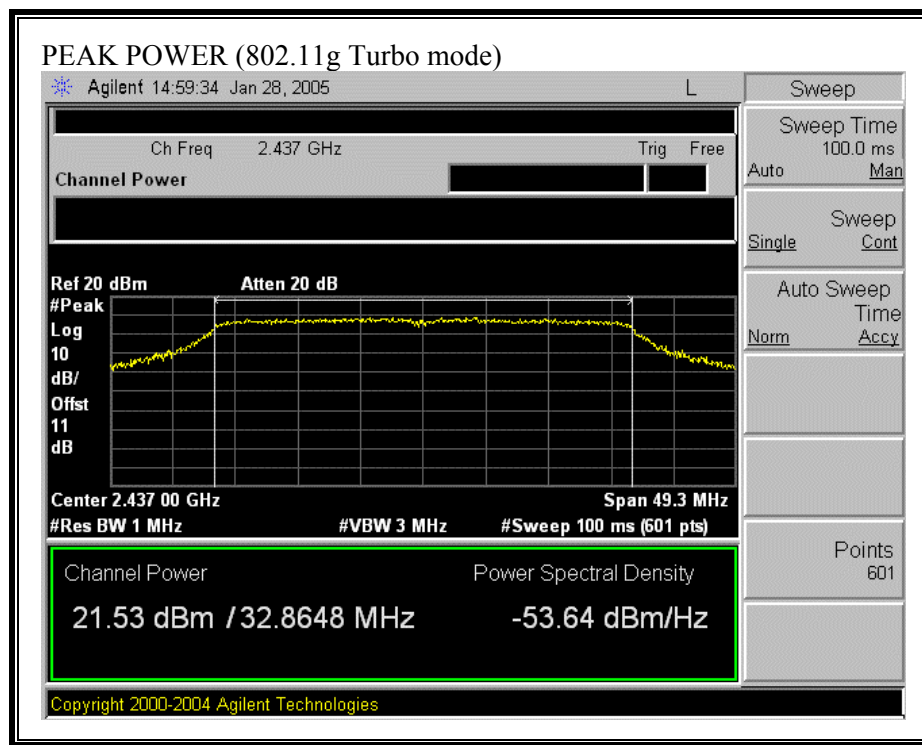

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	16.56
Middle	2437	16.39
High	2462	16.45

802.11g Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	15.21
Middle	2437	15.05
High	2462	15.12

802.11g Turbo Mode

Channel	Frequency (MHz)	Average Power (dBm)
Middle	2437	15.00

7.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.39	8	-16.39
Middle	2437	-7.81	8	-15.81
High	2462	-8.34	8	-16.34


802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.96	8	-16.96
Middle	2437	-8.18	8	-16.18
High	2462	-8.78	8	-16.78


802.11g Turbo Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	-9.61	8	-17.61


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

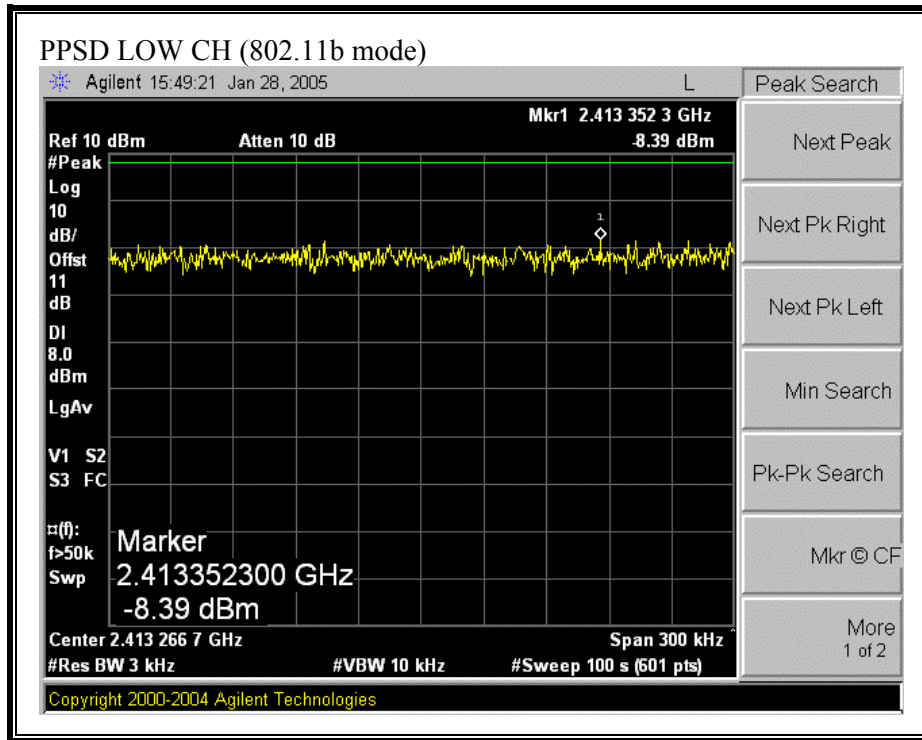


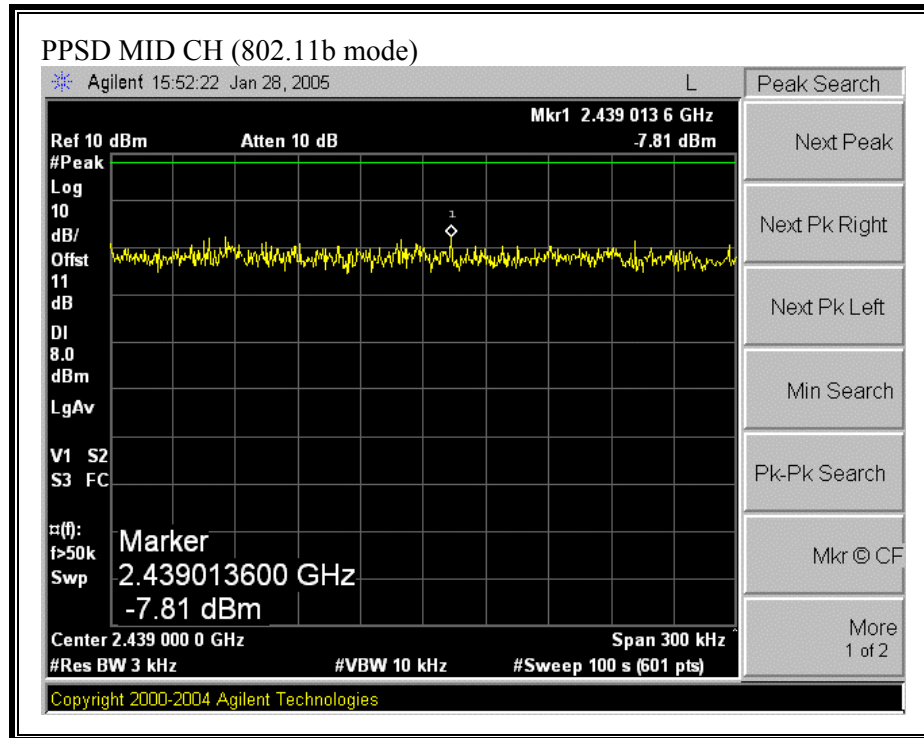


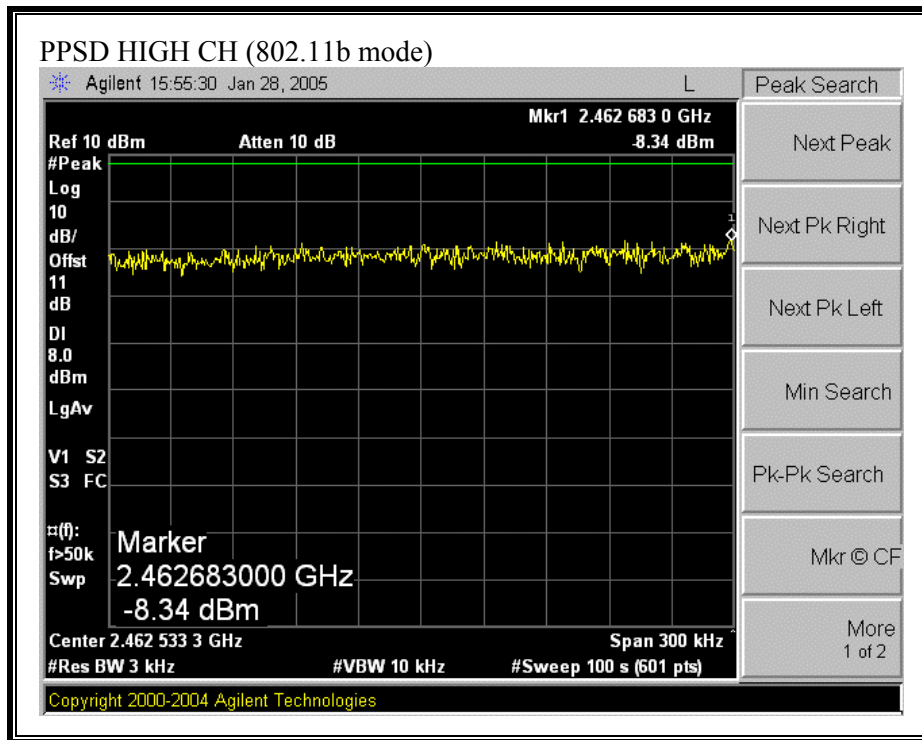


PEAK POWER SPECTRAL DENSITY (802.11g MODE)

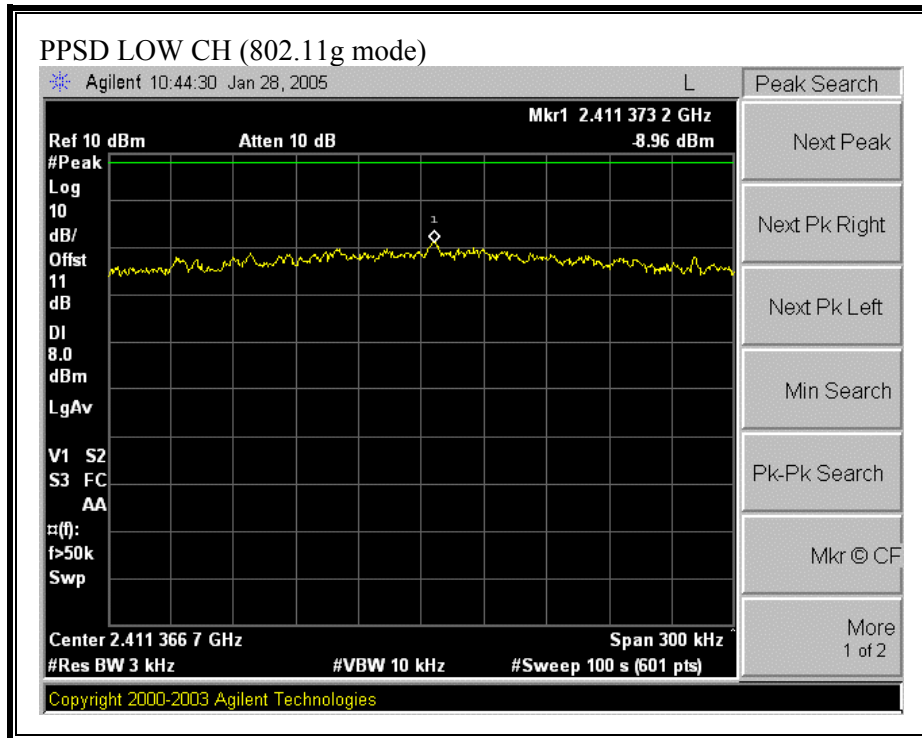

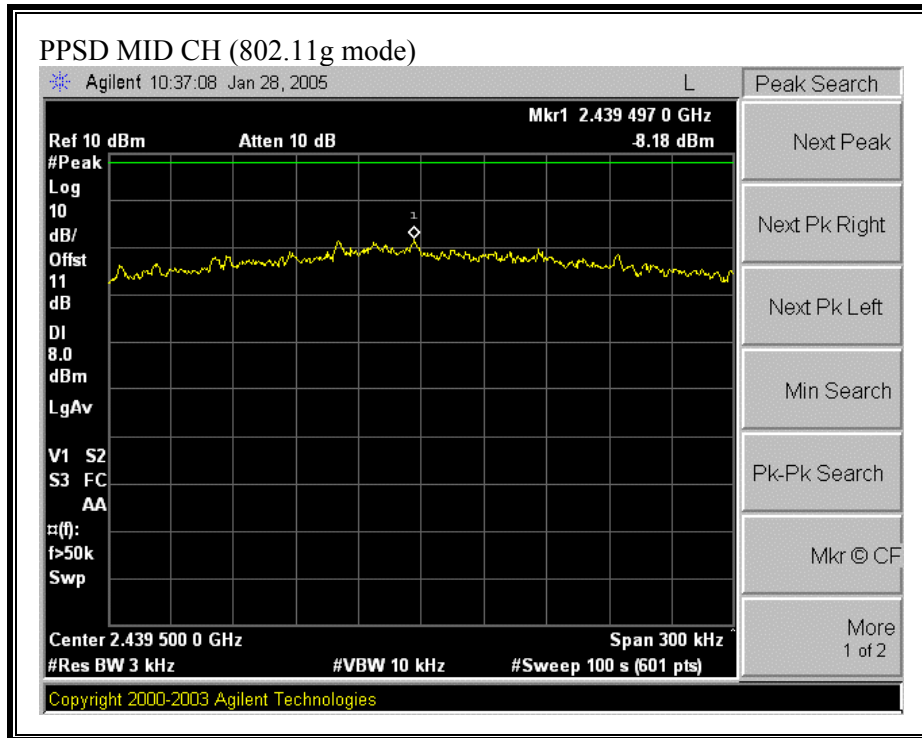

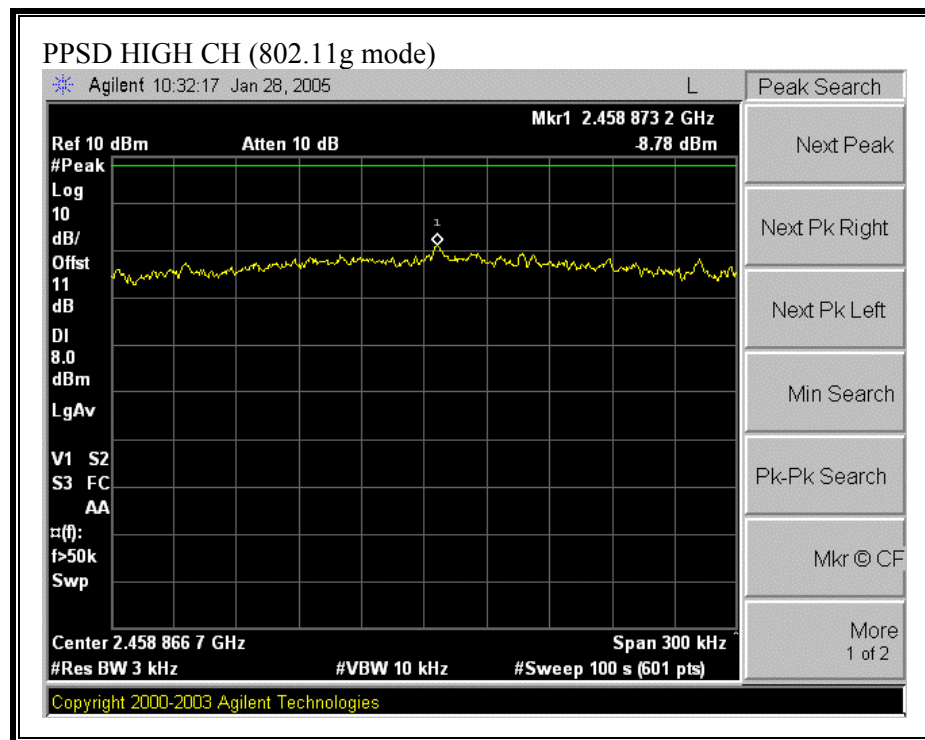

PEAK POWER SPECTRAL DENSITY (802.11g TURBO MODE)

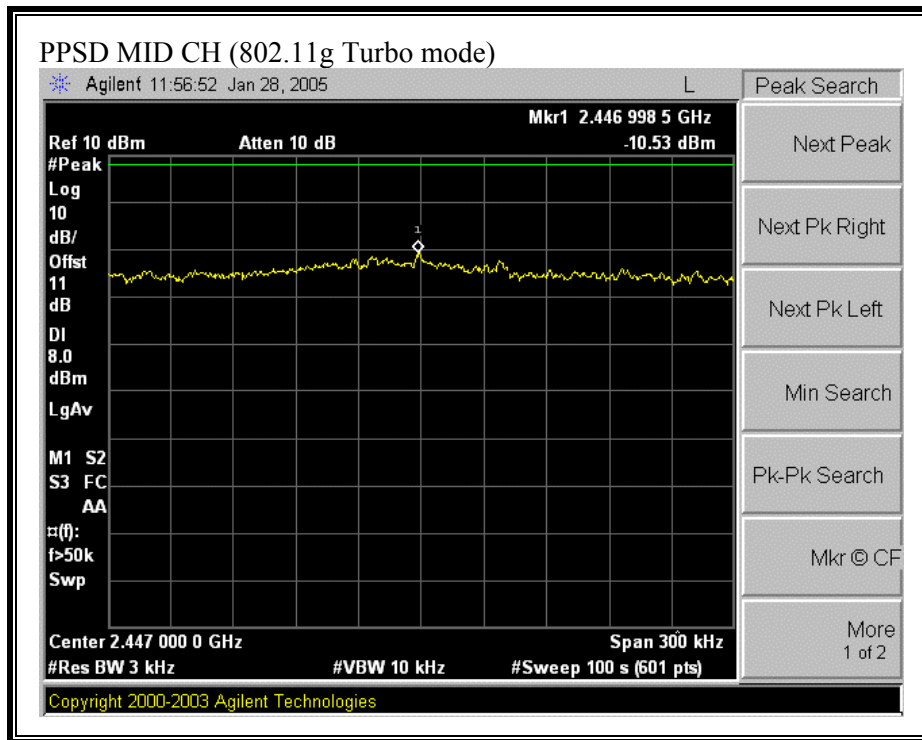

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

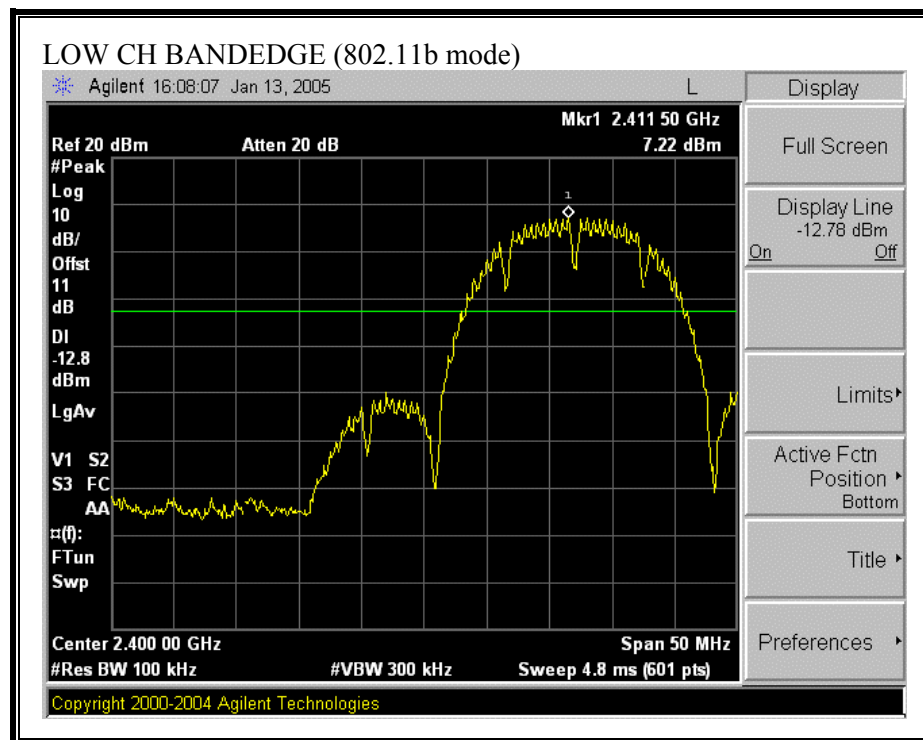

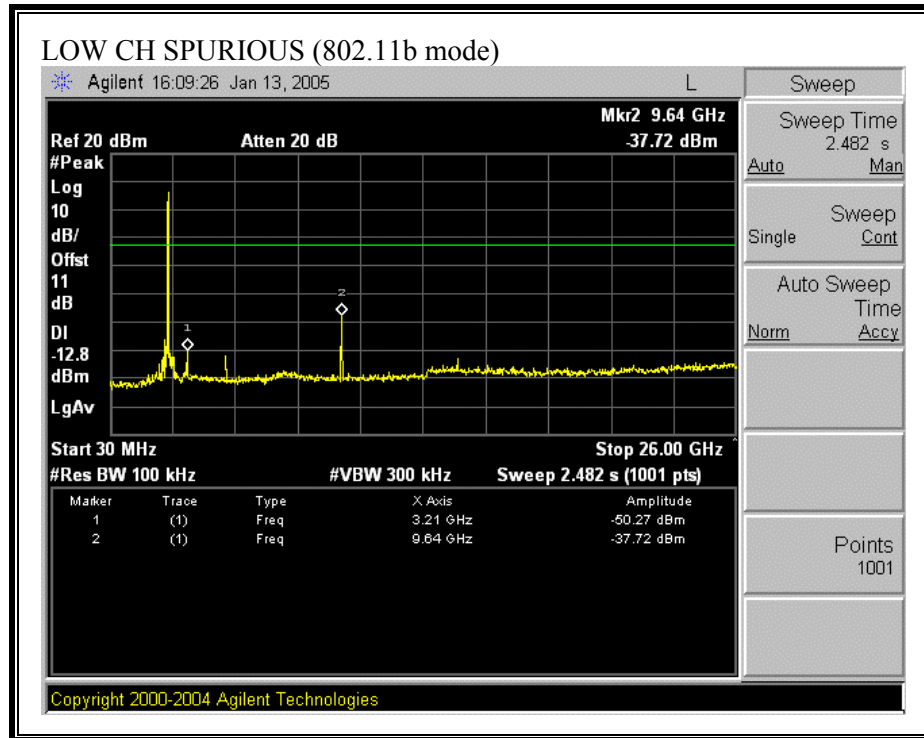



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

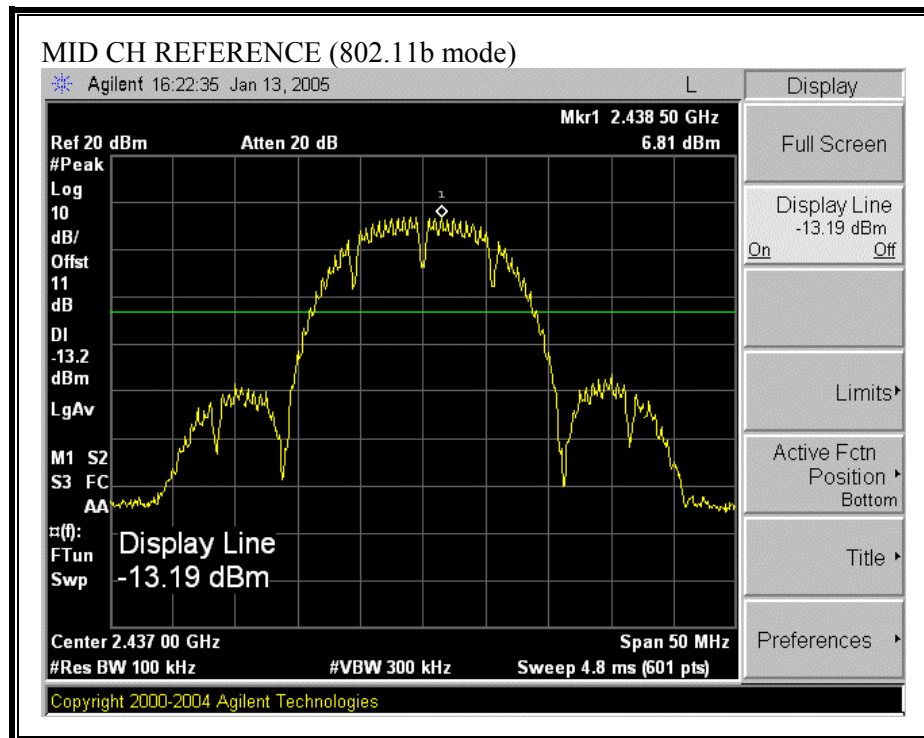

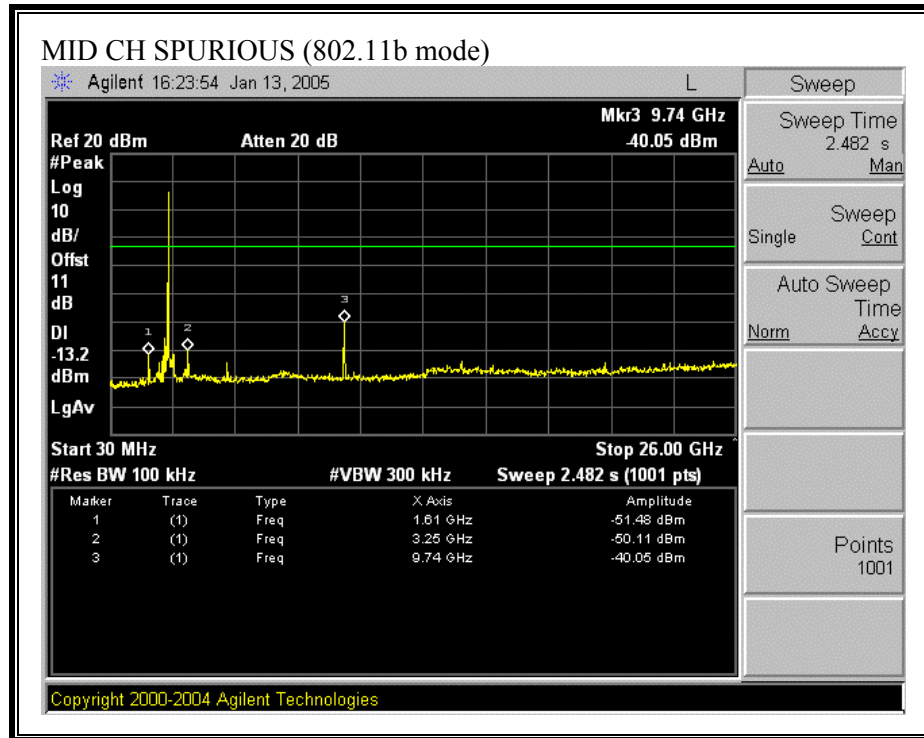



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

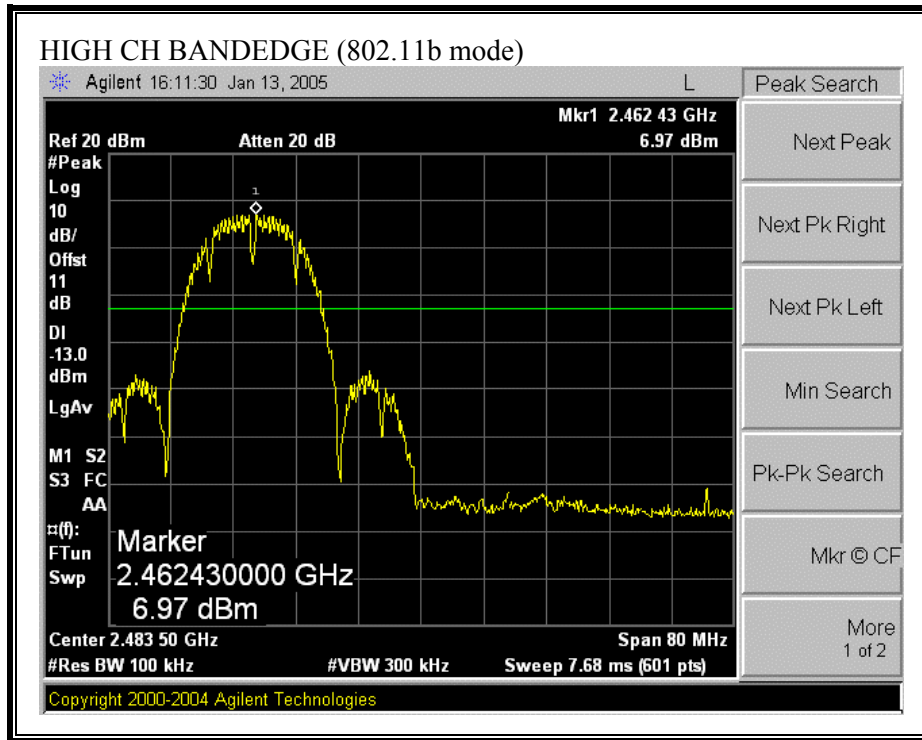

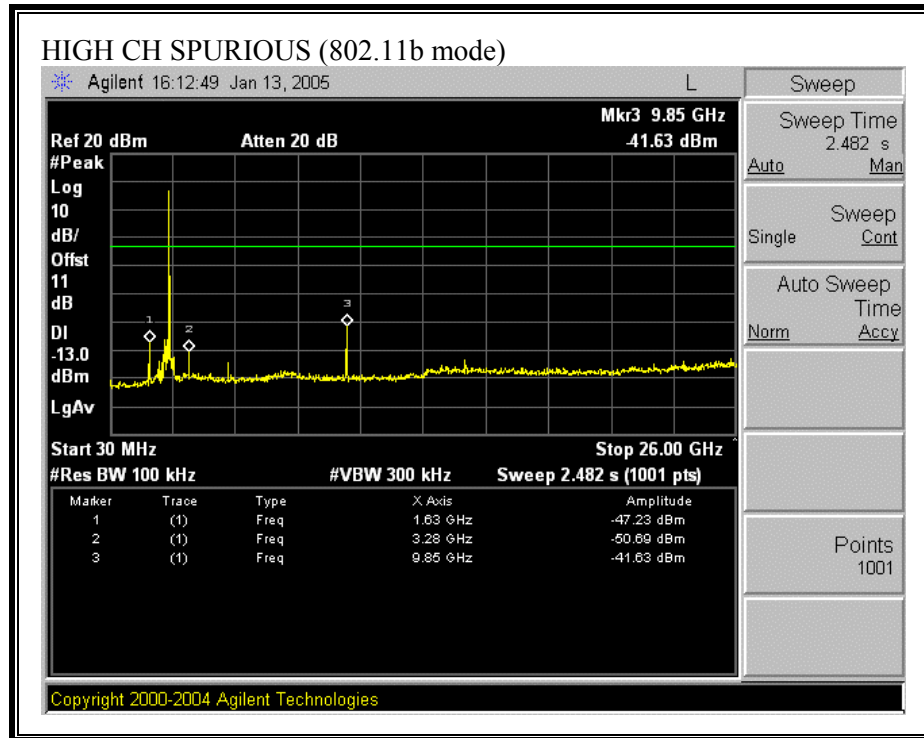



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

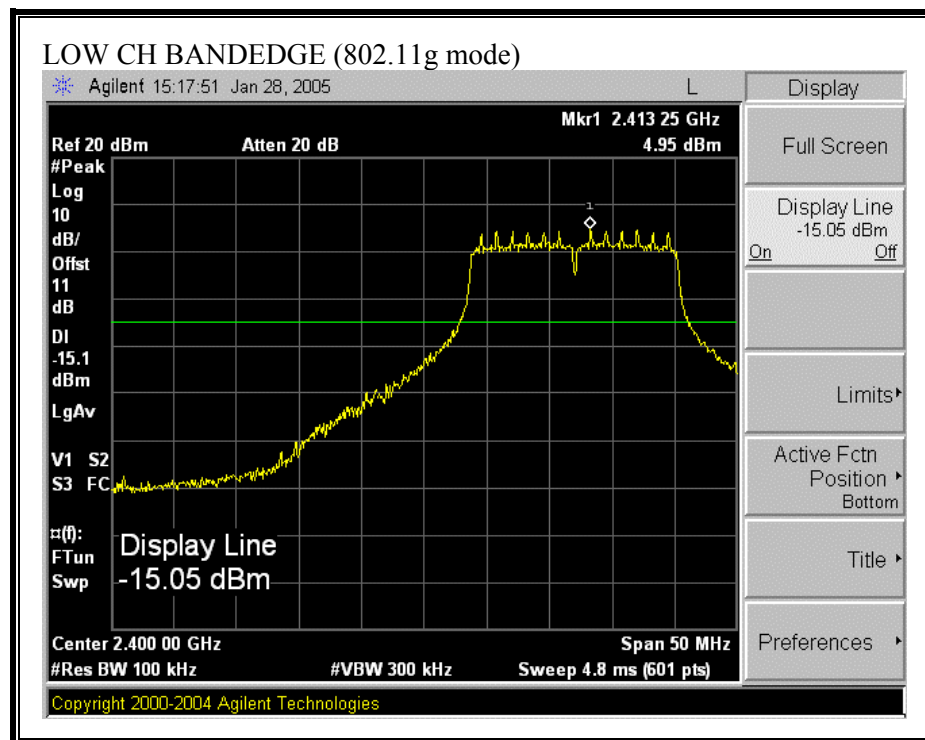

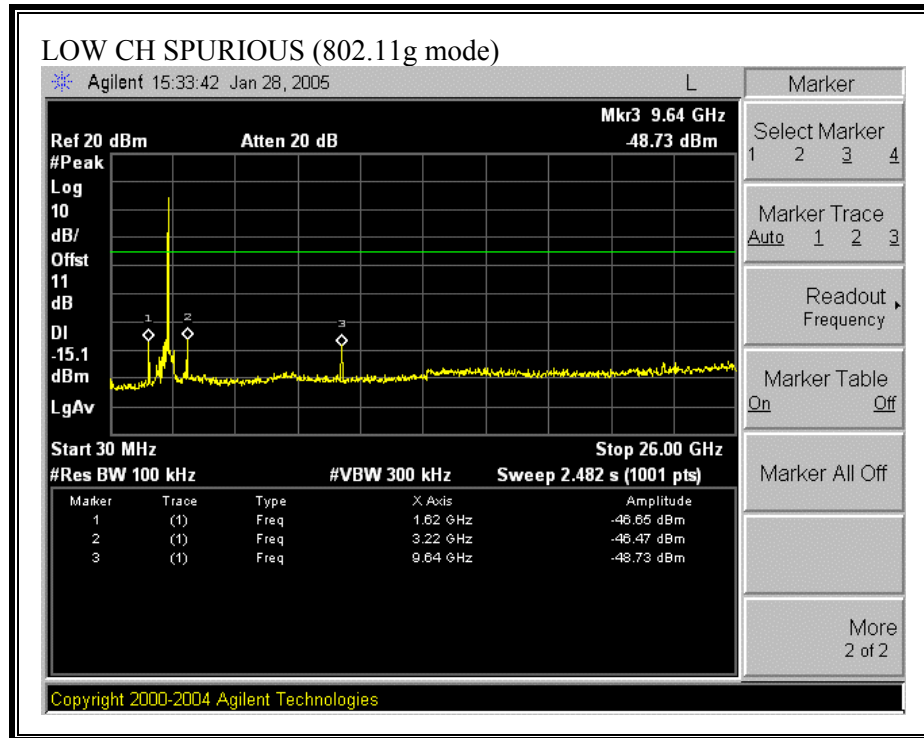



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

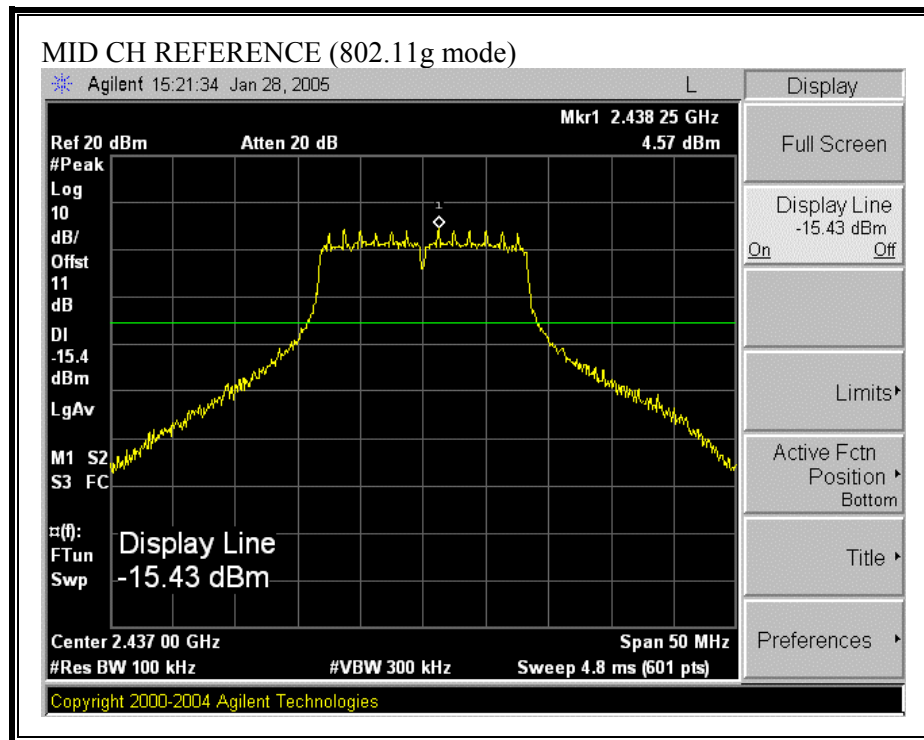

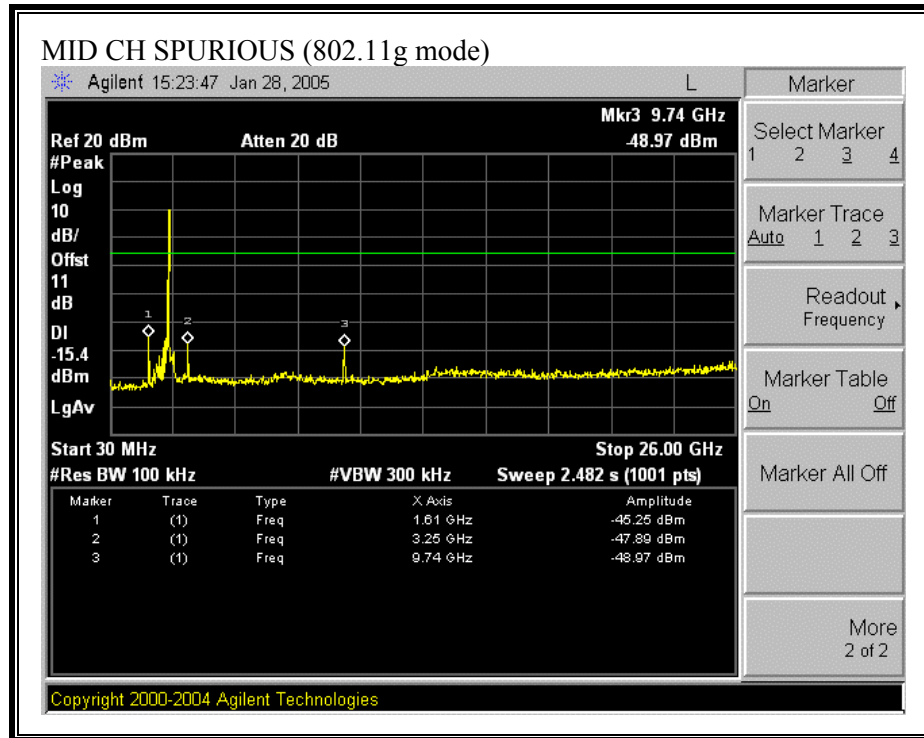



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

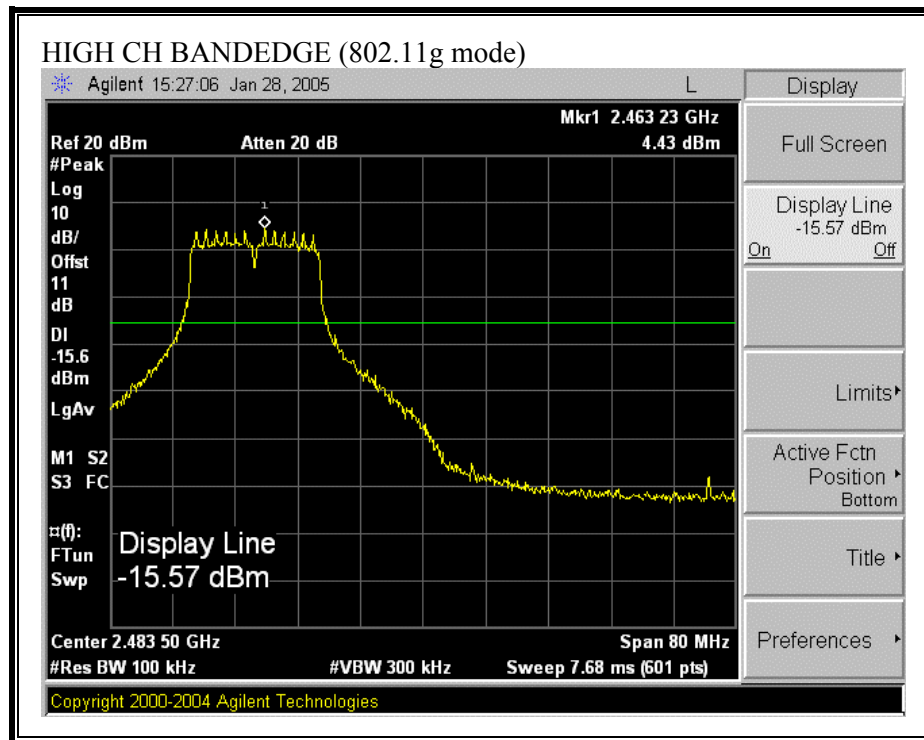

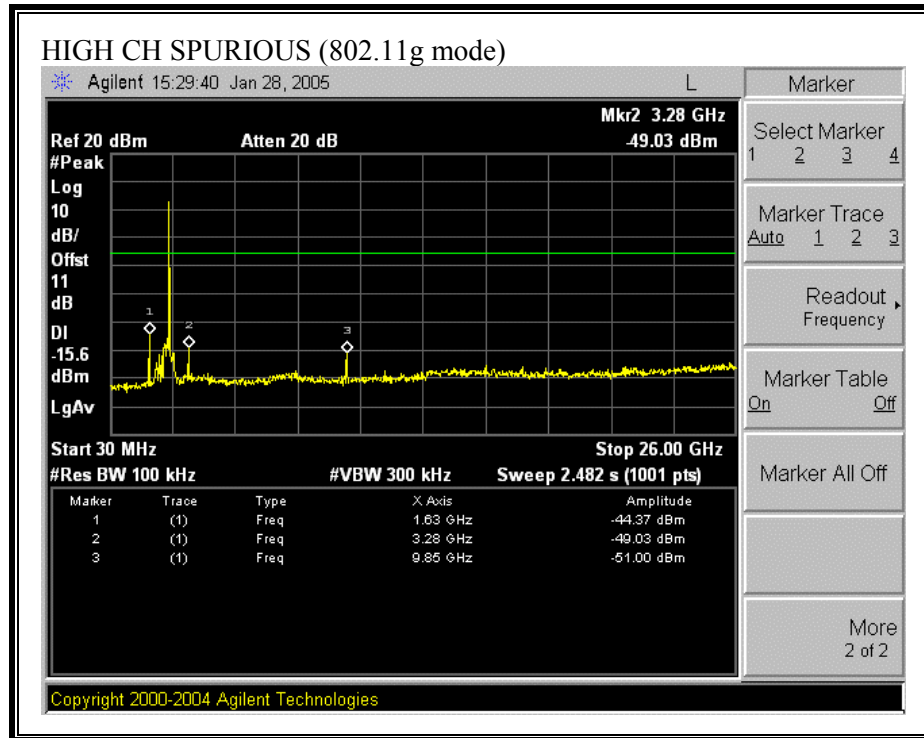

SPURIOUS EMISSIONS, MID CHANNEL (802.11g TURBO MODE)

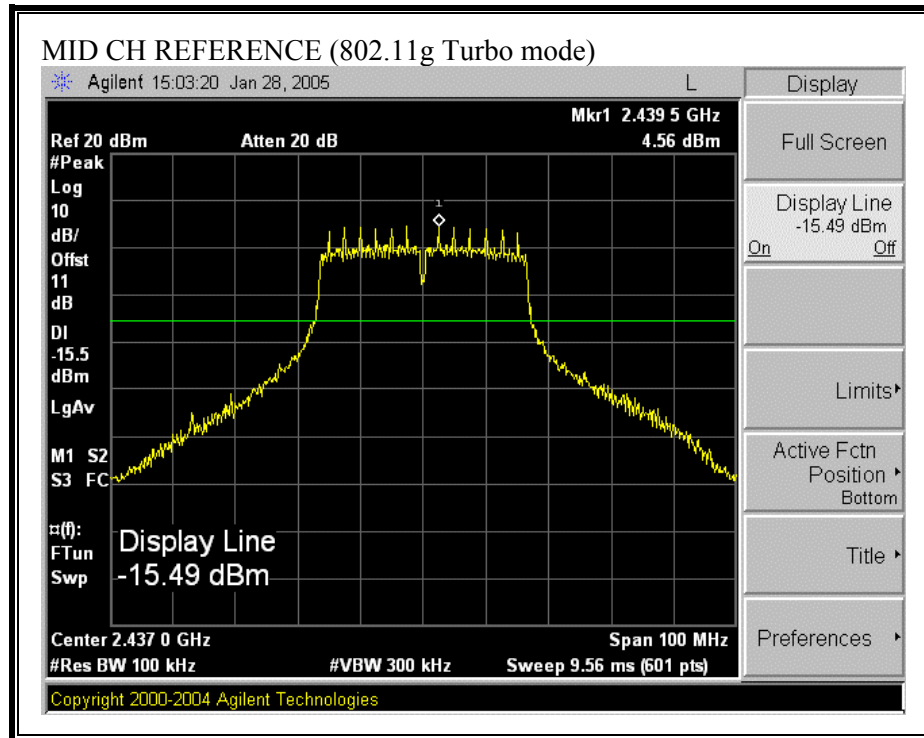

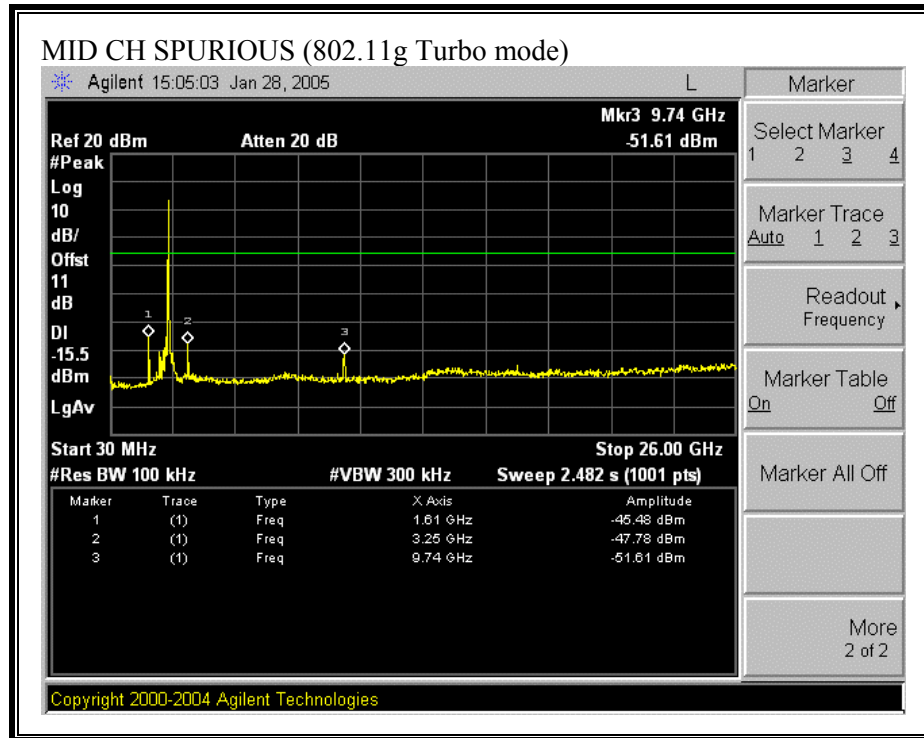

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15*
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*: 4.5 – 5.25 per Standard LP0002.

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


SUPPLEMENTAL TEST PROCEDURE FOR CO-LOCATED TRANSMITTERS


The dominant transmitter is set to the worst case channel. The spurious emissions performance of the dominant transmitter is investigated as the settings of the non-dominant transmitter are varied. The spectrum is searched for intermodulation products. Worst-case results are reported.

7.2.2. TRANSMITTER ABOVE 1 GHz WITH ANTENNA HTL017 IN FIREBOLT


7.2.2.1 STAND-ALONE CONFIGURATION


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

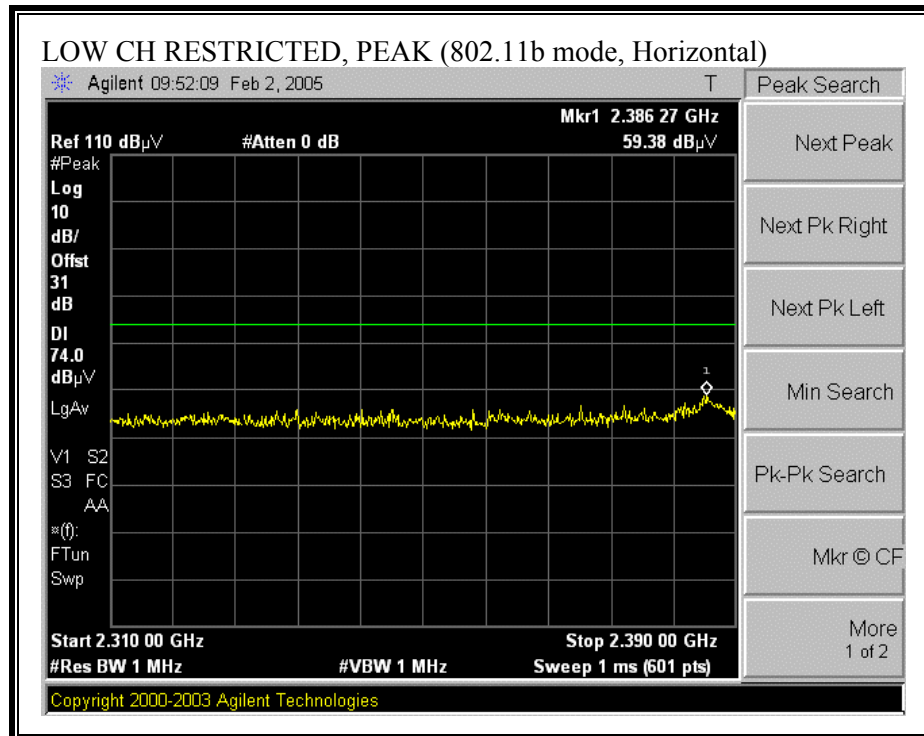

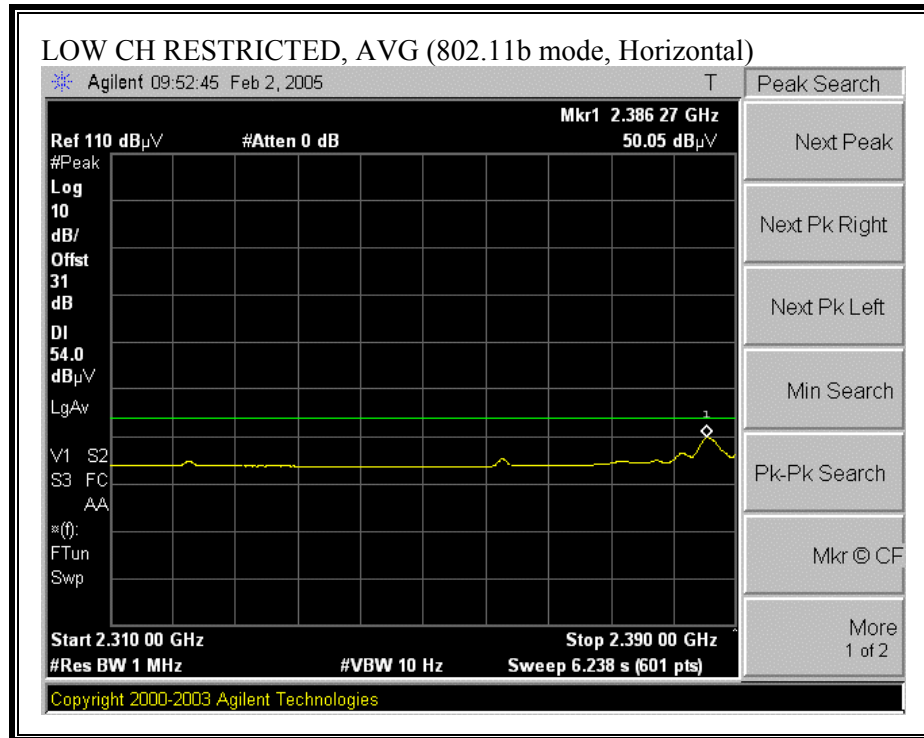



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

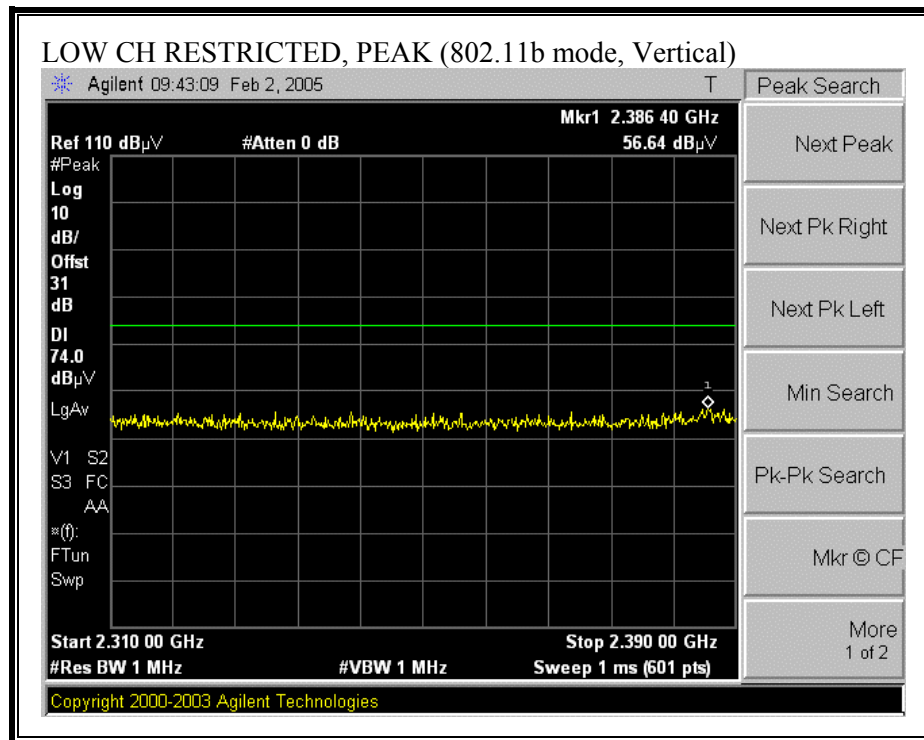

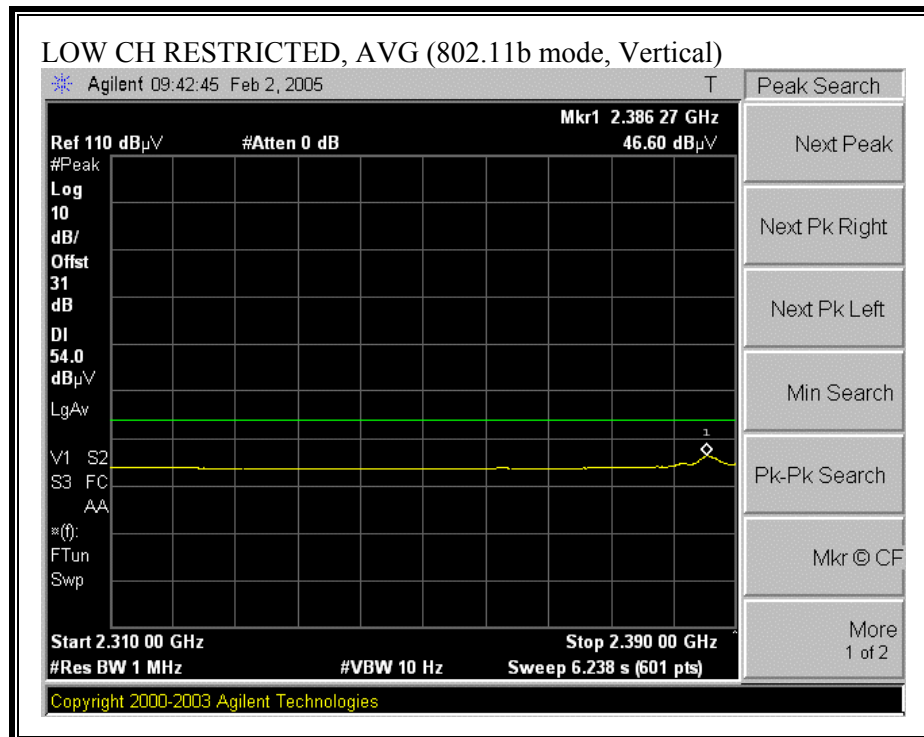



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

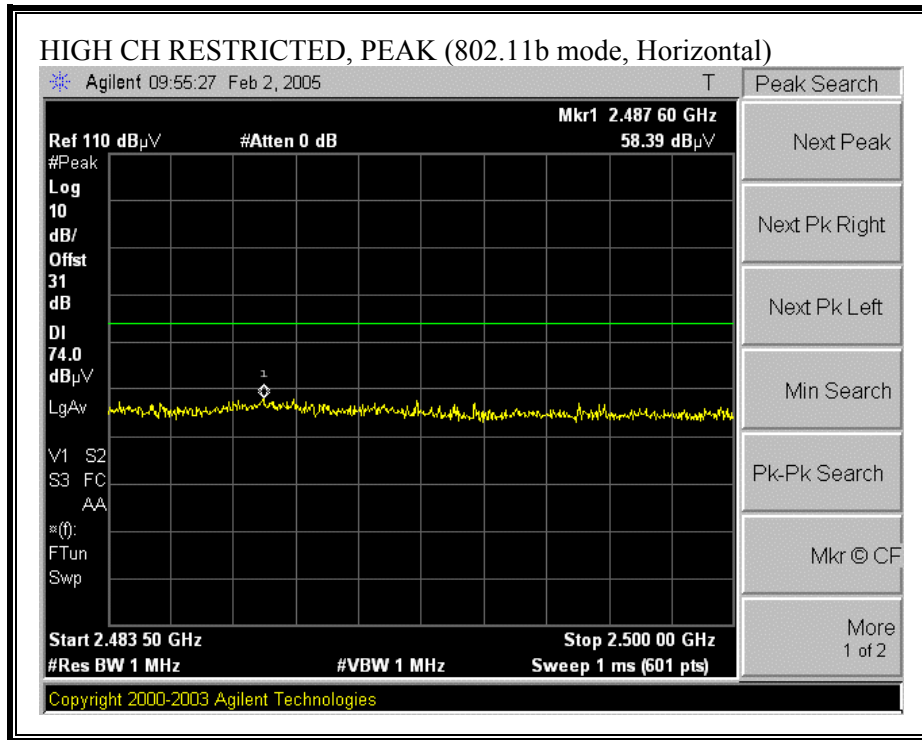

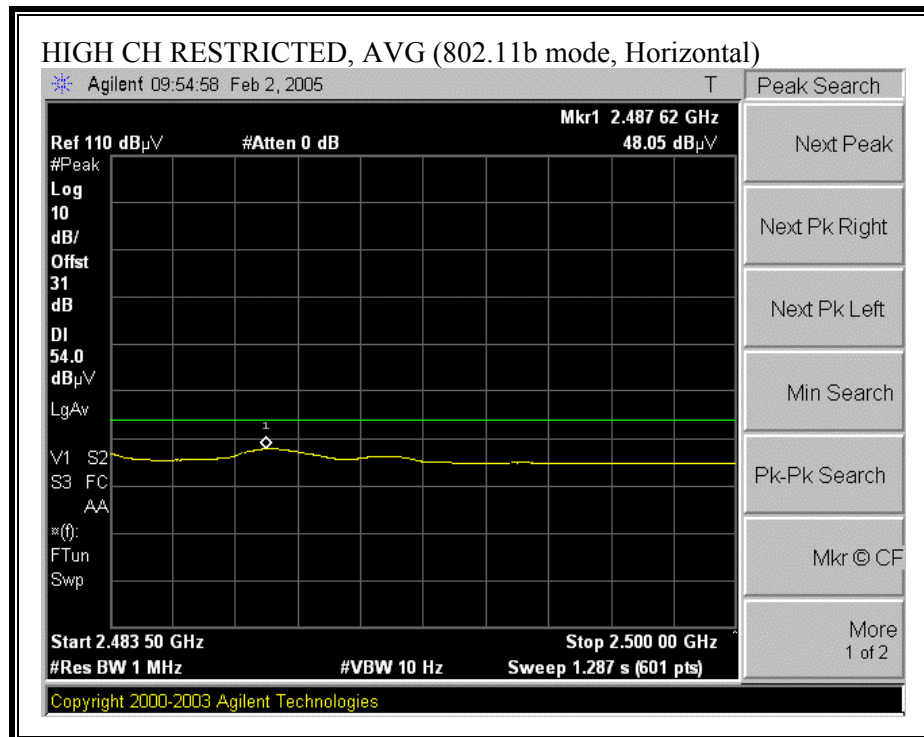

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

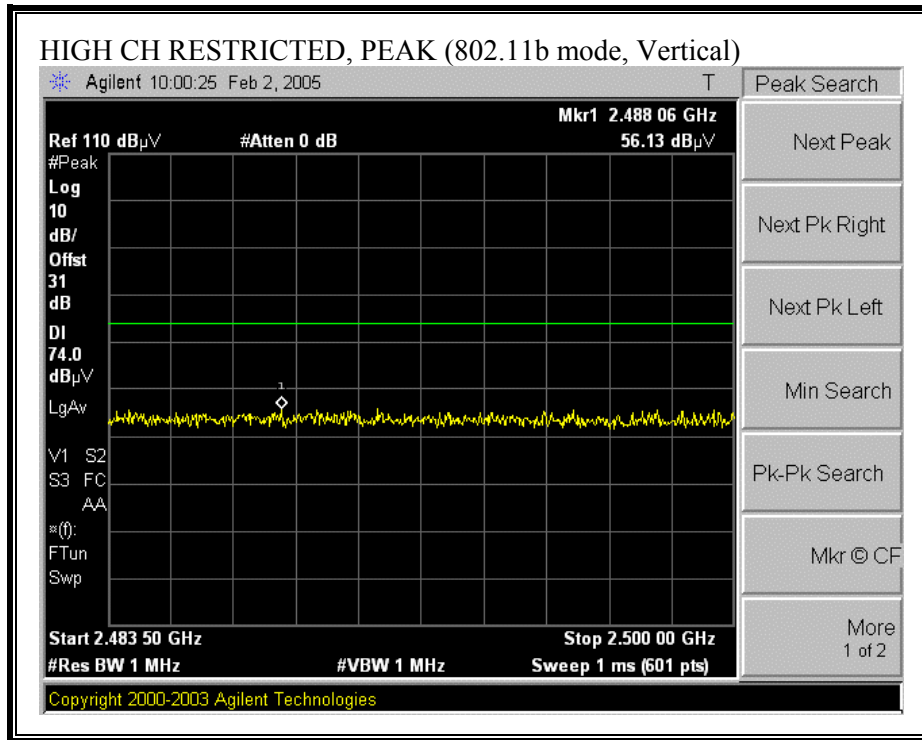

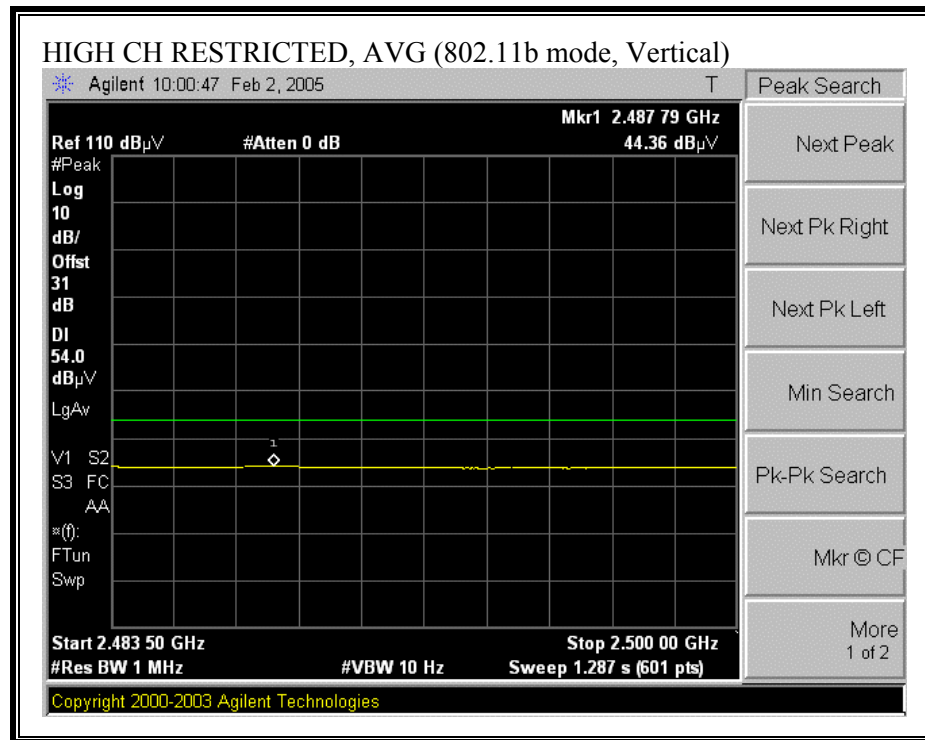



HARMONICS AND SPURIOUS EMISSIONS (b MODE)

ANTENNA HTL017


02/02/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Chin Pang Project #: 04U3194-1 Company: Toshiba EUT Descrip.: 802.11b/g Half Size Mini-PCI WLAN Module EUT M/N: PA3426U-1MPC Test Target: FCC 15.247 Mode Oper: TX_b mode_antenna HTL017, Stand-alone															
Test Equipment:															
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205							
Hi Frequency Cables										HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz	
2 foot cable		3 foot cable		4 foot cable		12 foot cable		HPF 4.0GHz		Reject Filter		Average Measurements RBW=1MHz, VBW=10Hz			
3_Chin						12_Neelesh									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch															
4.824	3.0	50.0	42.7	32.9	3.8	-39.6	0.0	0.6	47.7	40.4	74	54	-26.3	-13.6	V
4.824	3.0	52.8	44.0	32.9	3.8	-39.6	0.0	0.6	50.5	41.7	74	54	-23.5	-12.3	H
Mid ch															
4.874	3.0	49.3	42.3	32.9	3.8	-39.6	0.0	0.6	47.0	40.0	74	54	-27.0	-14.0	V
7.311	3.0	51.2	43.8	35.8	4.9	-40.3	0.0	0.6	52.2	44.8	74	54	-21.8	-9.2	V
4.874	3.0	53.3	45.5	32.9	3.8	-39.6	0.0	0.6	51.0	43.2	74	54	-23.0	-10.8	H
7.311	3.0	54.0	45.0	35.8	4.9	-40.3	0.0	0.6	55.0	46.0	74	54	-19.0	-8.0	H
High Ch															
3.335	3.0	49.6	42.5	30.8	3.0	-38.4	0.0	0.2	45.3	38.2	74	54	-28.7	-15.8	V
4.924	3.0	50.0	41.4	33.0	3.8	-39.7	0.0	0.6	47.7	39.1	74	54	-26.3	-14.9	V
7.386	3.0	48.6	39.5	36.0	4.9	-40.3	0.0	0.6	49.8	40.7	74	54	-24.2	-13.3	V
3.335	3.0	53.4	39.8	30.8	3.0	-38.4	0.0	0.2	49.1	35.5	74	54	-24.9	-18.5	H
4.924	3.0	55.3	47.2	33.0	3.8	-39.7	0.0	0.6	53.0	44.9	74	54	-21.0	-9.1	H
7.386	3.0	54.6	45.5	36.0	4.9	-40.3	0.0	0.6	55.8	46.7	74	54	-18.2	-7.3	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

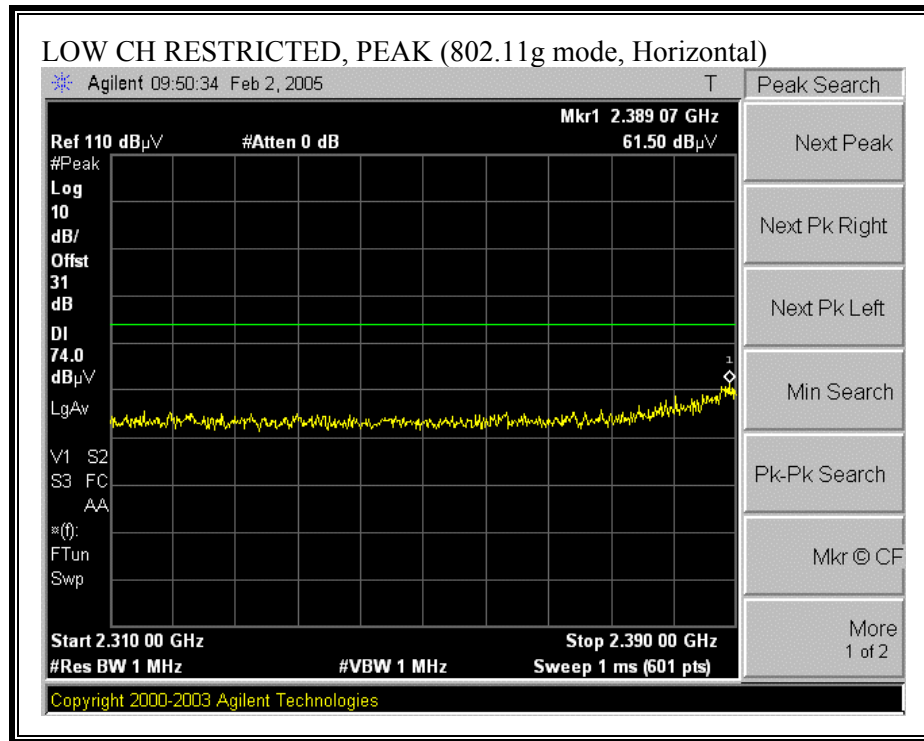

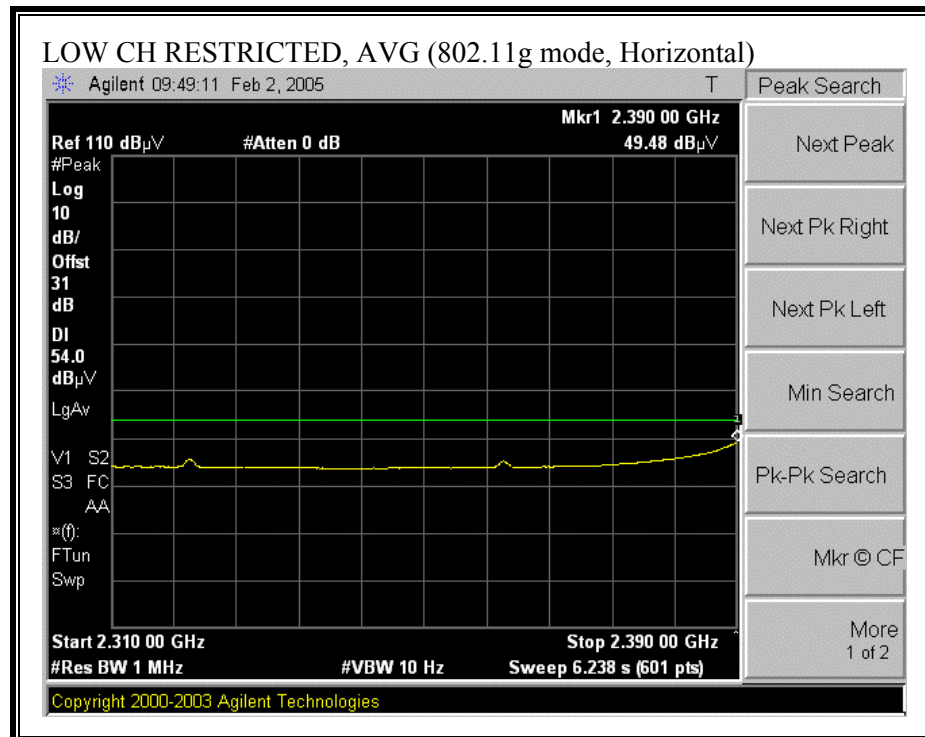



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

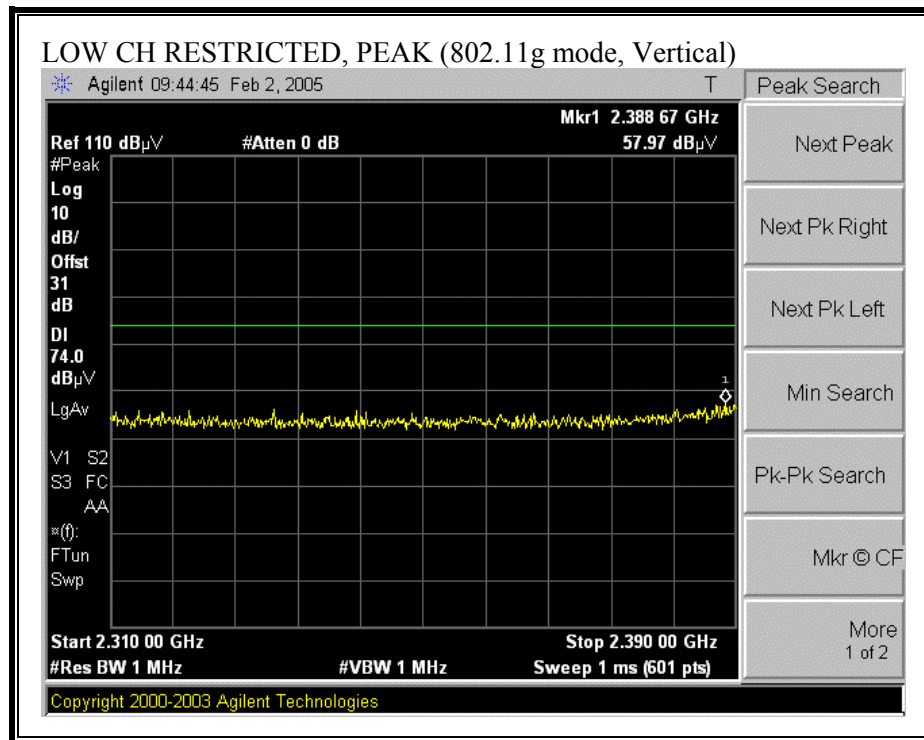

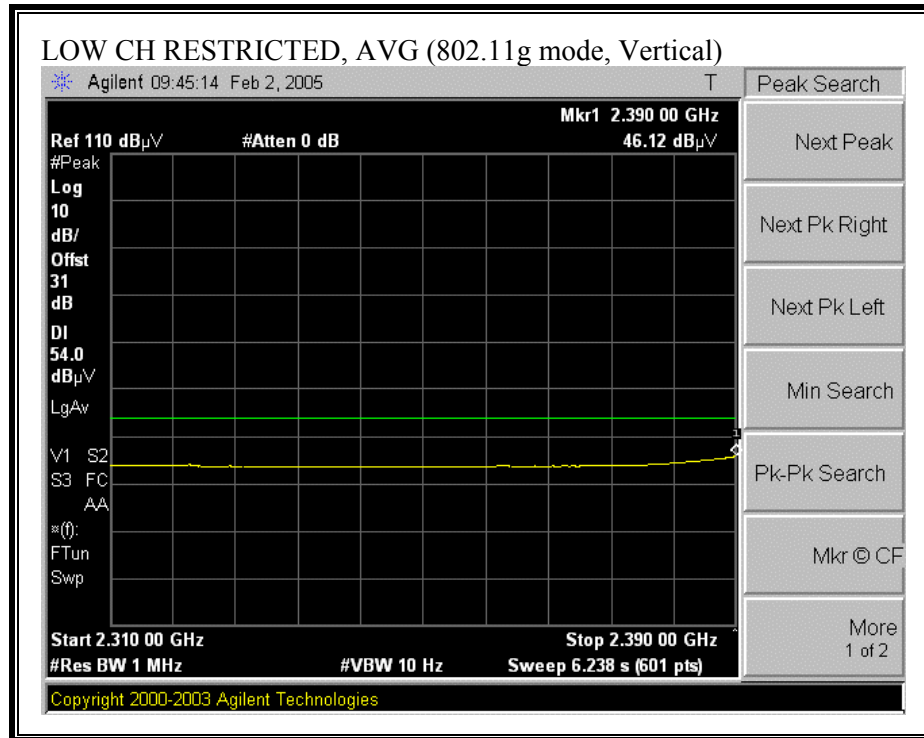



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

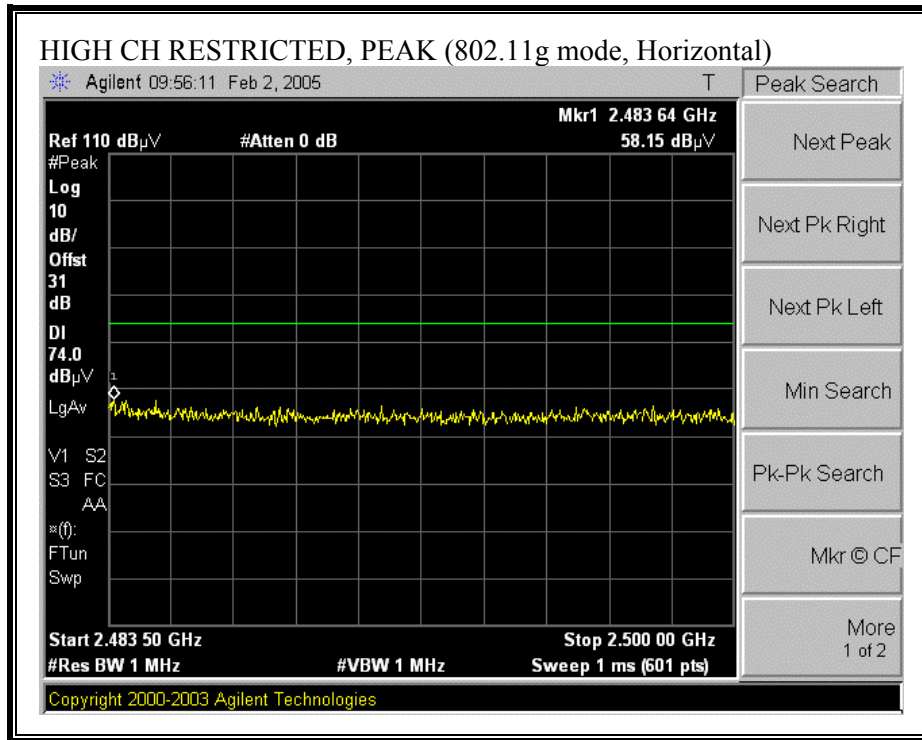

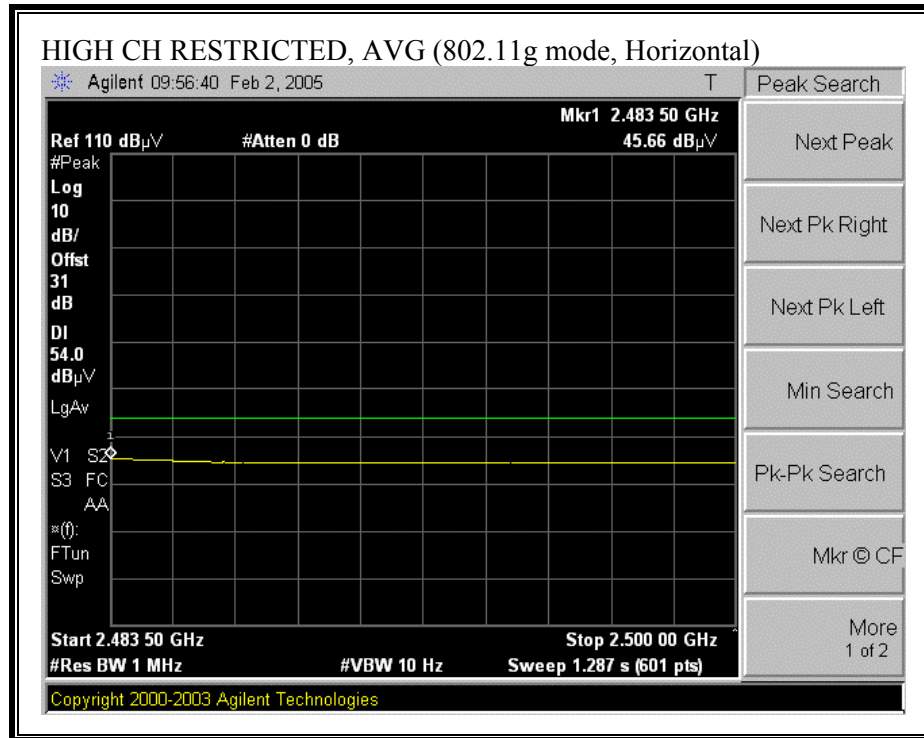

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

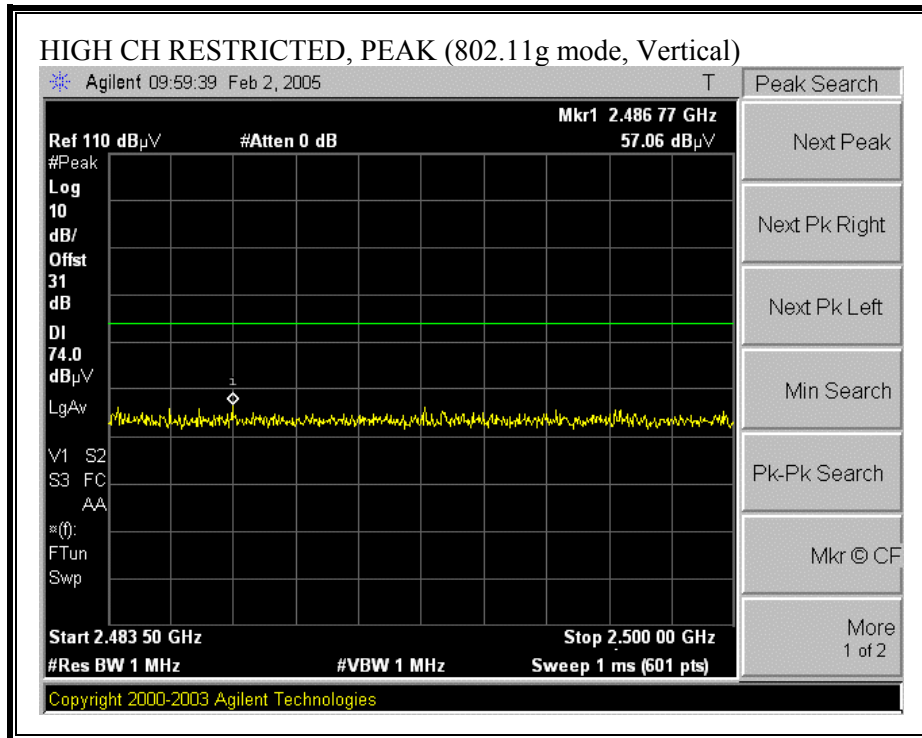

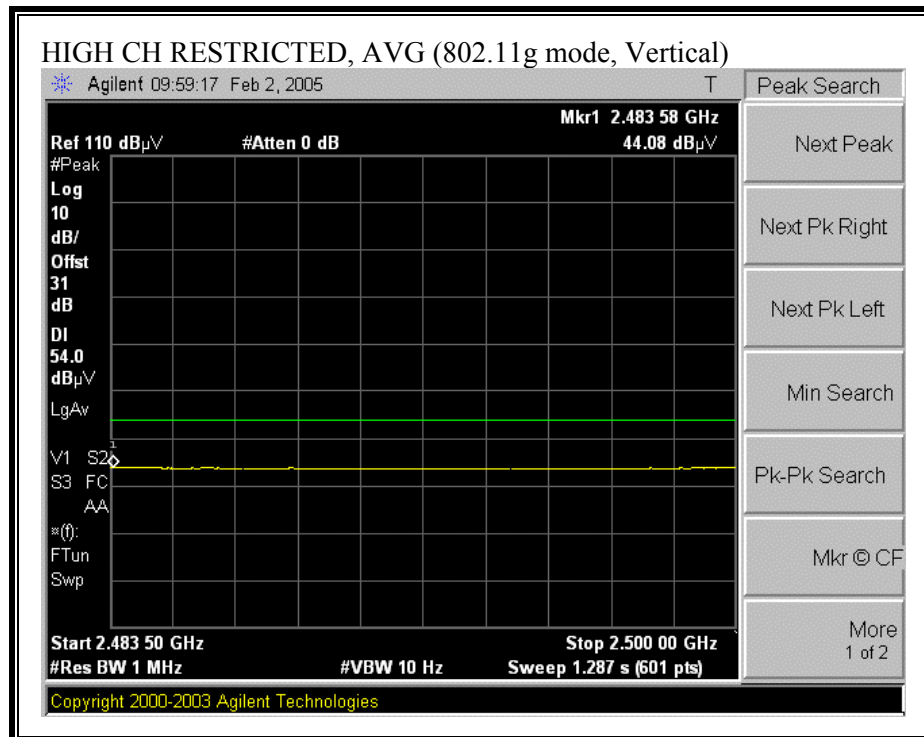

HARMONICS AND SPURIOUS EMISSIONS (g MODE)


02/03/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Chin Pang Project #:04U3194-1 Company:Toshiba EUT Descr.: 802.11b/g Half Size Mini-PCI WLAN Module EUT M/N:PA3426U-1MPC Test Target:FCC 15.247 Mode Oper: TX_g mode_antenna HTL017, Stand-alone															
Test Equipment:															
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205							
Hi Frequency Cables										HPF HPF_4.0GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
2 foot cable		3 foot cable 3_Chin		4 foot cable		12 foot cable 12_Neelesh									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
low ch															
4.824	3.0	46.0	33.0	32.9	3.8	-39.6	0.0	0.6	43.7	30.7	74	54	-30.3	-23.3	V
4.824	3.0	47.0	35.0	32.9	3.8	-39.6	0.0	0.6	44.7	32.7	74	54	-29.3	-21.3	H
mid ch															
4.874	3.0	50.4	38.4	32.9	3.8	-39.6	0.0	0.6	48.1	36.1	74	54	-25.9	-17.9	V
7.311	3.0	53.7	41.6	35.8	4.9	-40.3	0.0	0.6	54.7	42.6	74	54	-19.3	-11.4	V
4.874	3.0	54.7	45.8	32.9	3.8	-39.6	0.0	0.6	52.4	43.5	74	54	-21.6	-10.5	H
7.311	3.0	55.5	42.4	35.8	4.9	-40.3	0.0	0.6	56.5	43.4	74	54	-17.5	-10.6	H
High Ch															
3.335	3.0	47.8	35.0	30.8	3.0	-38.4	0.0	0.2	43.5	30.7	74	54	-30.5	-23.3	V
4.924	3.0	49.0	37.5	33.0	3.8	-39.7	0.0	0.6	46.7	35.2	74	54	-27.3	-18.8	V
7.386	3.0	53.9	36.0	36.0	4.9	-40.3	0.0	0.6	55.1	37.2	74	54	-18.9	-16.8	V
4.924	3.0	54.0	42.0	33.0	3.8	-39.7	0.0	0.6	51.7	39.7	74	54	-22.3	-14.3	H
7.386	3.0	56.5	43.0	36.0	4.9	-40.3	0.0	0.6	57.7	44.2	74	54	-16.3	-9.8	H
3.335	3.0	52.7	38.6	30.8	3.0	-38.4	0.0	0.2	48.4	34.3	74	54	-25.6	-19.7	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)

01/10/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Chin Pang Project #: 04U3194-1 Company: Toshiba EUT Descrip.: 802.11b/g Half Size Mini-PCI WLAN Module EUT M/N: PA3426U-1MPC Test Target: FCC 15.247 Mode Oper: TX_g Turbo mode_antenna HTL017, Stand-alone																
Test Equipment:																
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205								
Hi Frequency Cables										HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz		
2 foot cable		3 foot cable 3_Chin		4 foot cable		12 foot cable 12_Neelesh		HPF_4.0GHz				Average Measurements RBW=1MHz, VBW=10Hz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
mid ch																
4.874	3.0	53.6	39.4	32.9	3.8	-39.6	0.0	0.6	51.3	37.1	74	54	-22.7	-16.9	V	
7.311	3.0	54.8	41.6	35.8	4.9	-40.3	0.0	0.6	55.8	42.6	74	54	-18.2	-11.4	V	
4.874	3.0	58.6	46.7	32.9	3.8	-39.6	0.0	0.6	56.3	44.4	74	54	-17.7	-9.6	H	
7.311	3.0	60.4	45.8	35.8	4.9	-40.3	0.0	0.6	61.4	46.8	74	54	-12.6	-7.2	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


7.2.2.2 PORTABLE CONFIGURATION


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL

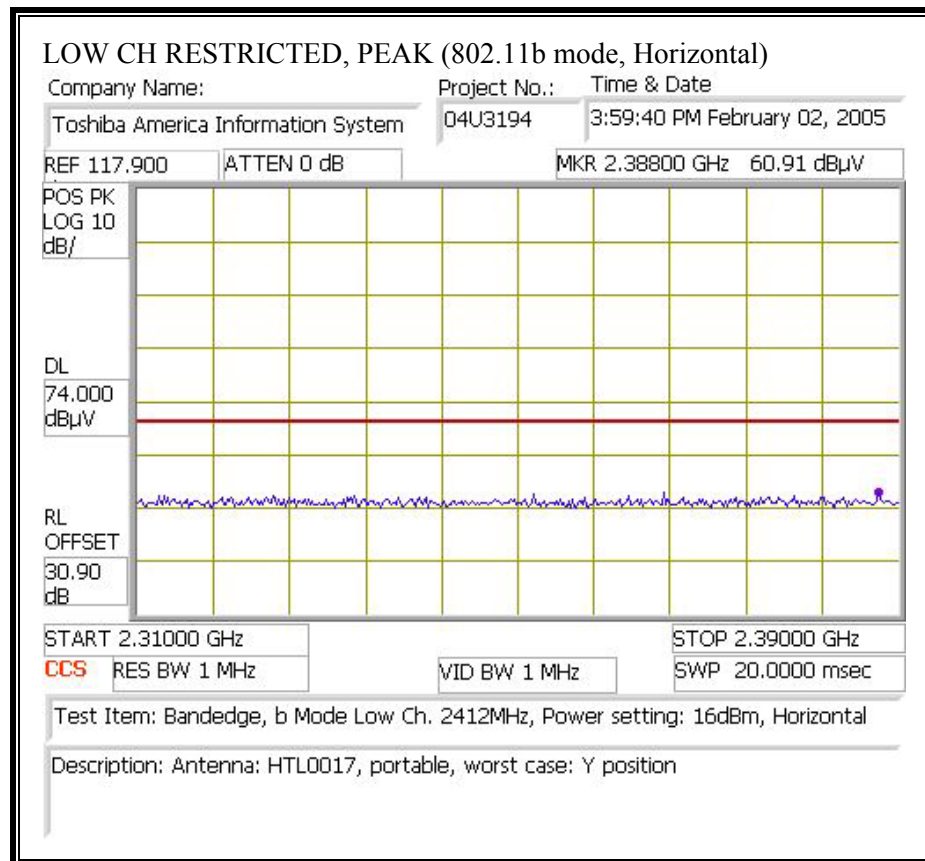

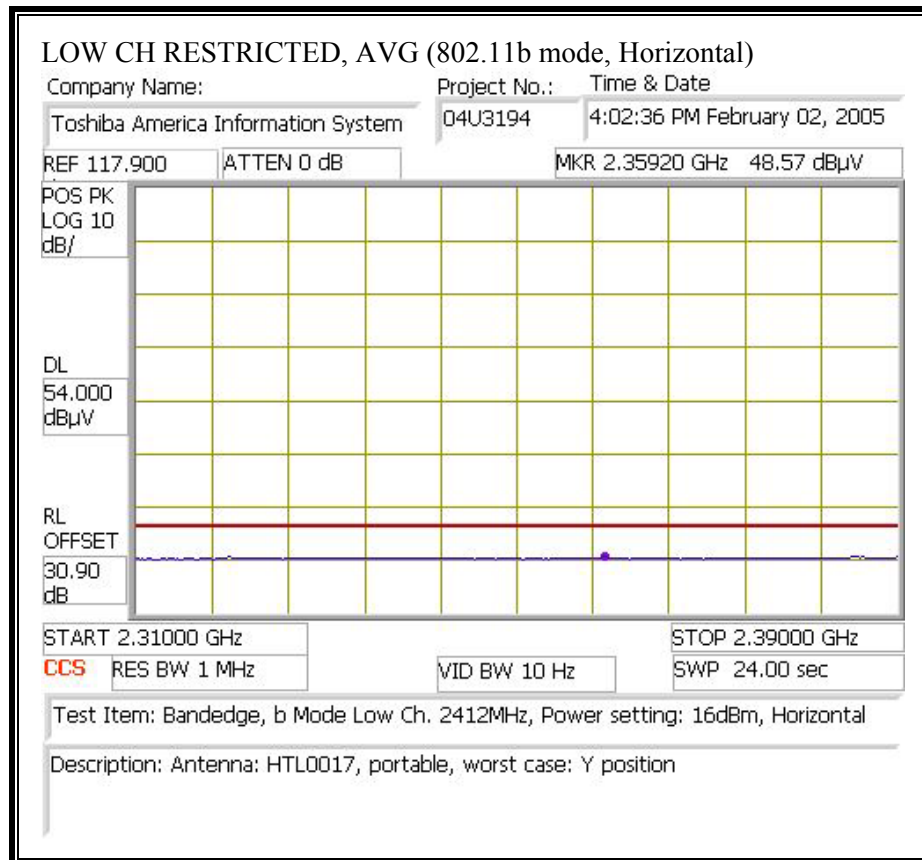



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

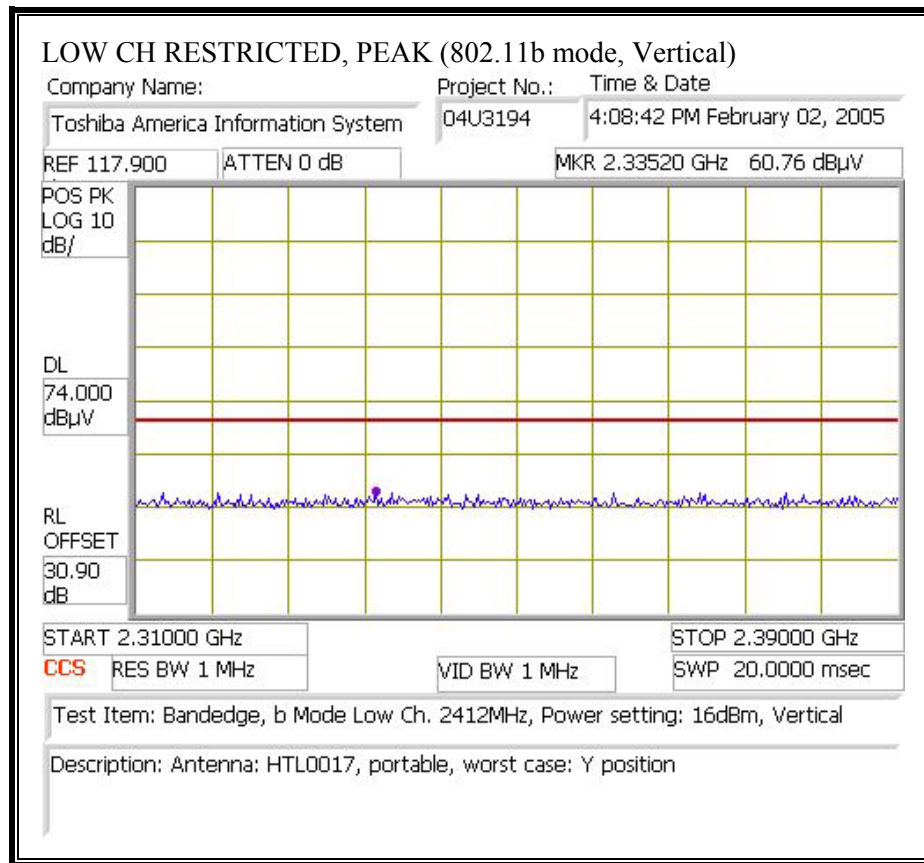

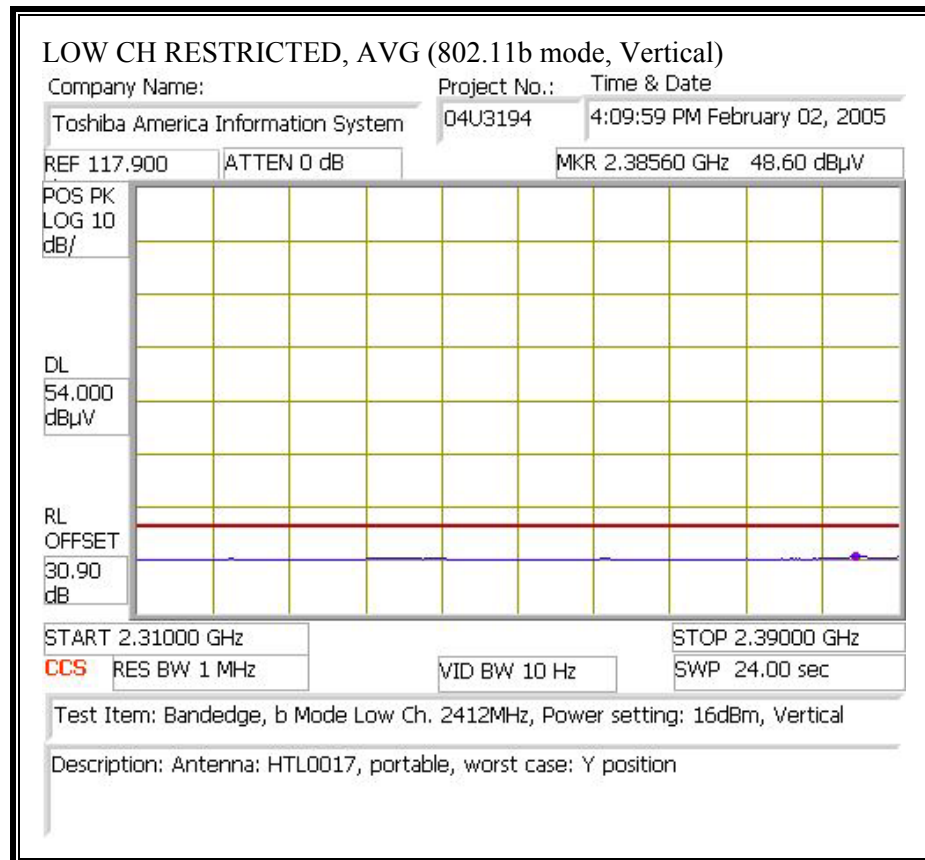



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

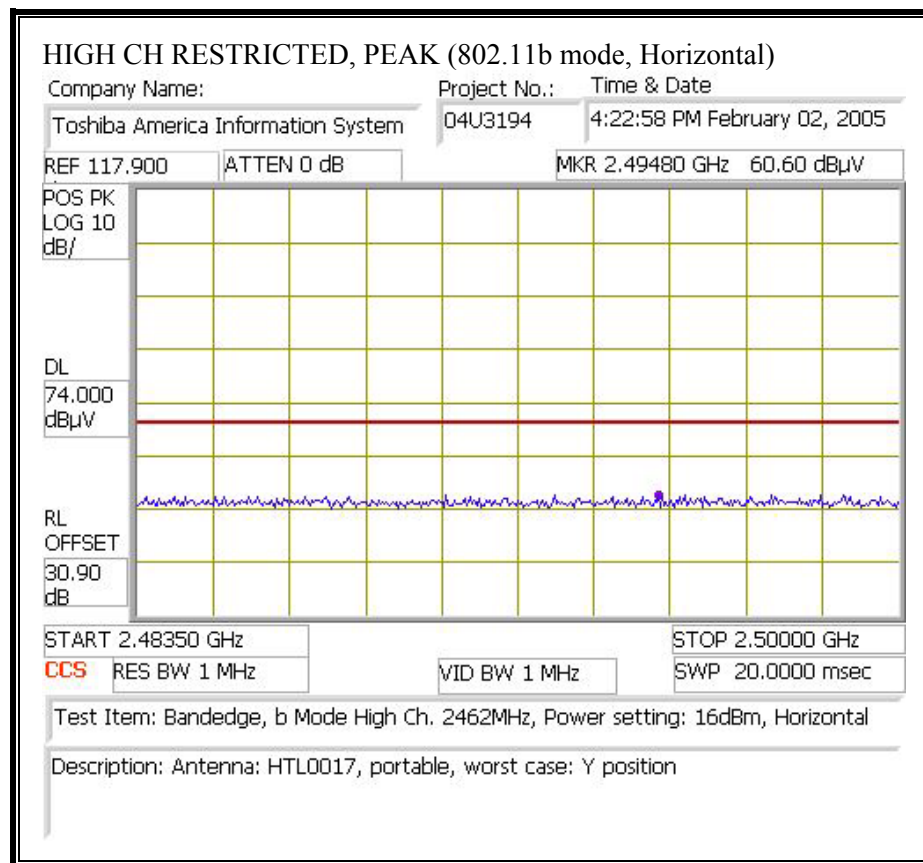

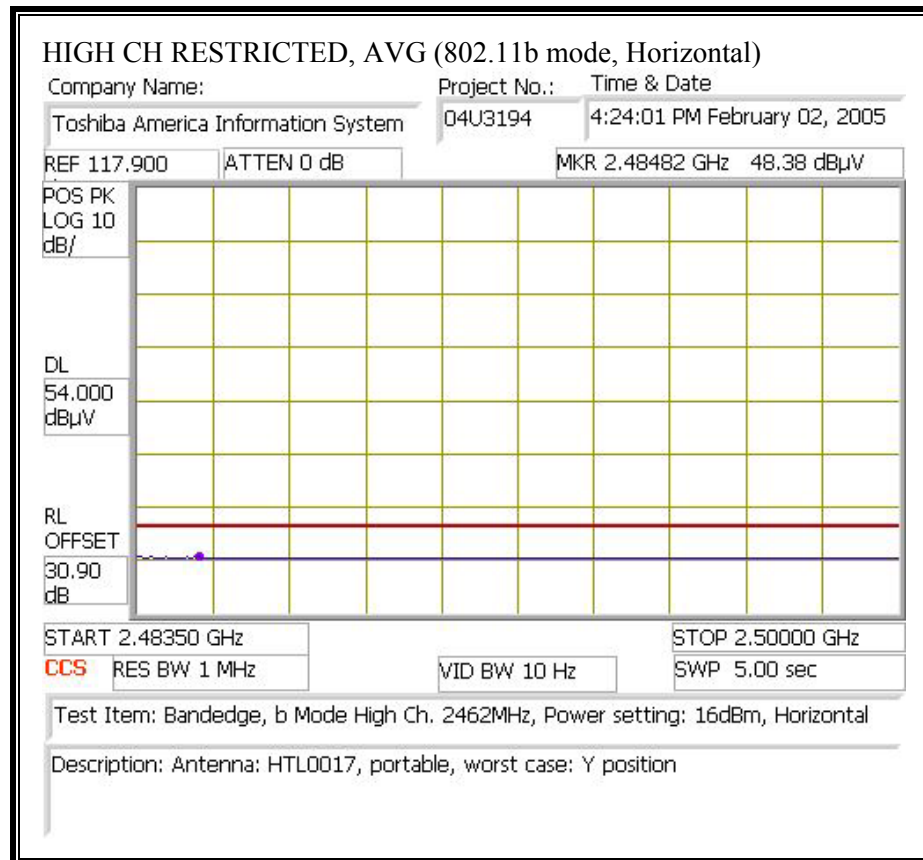

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

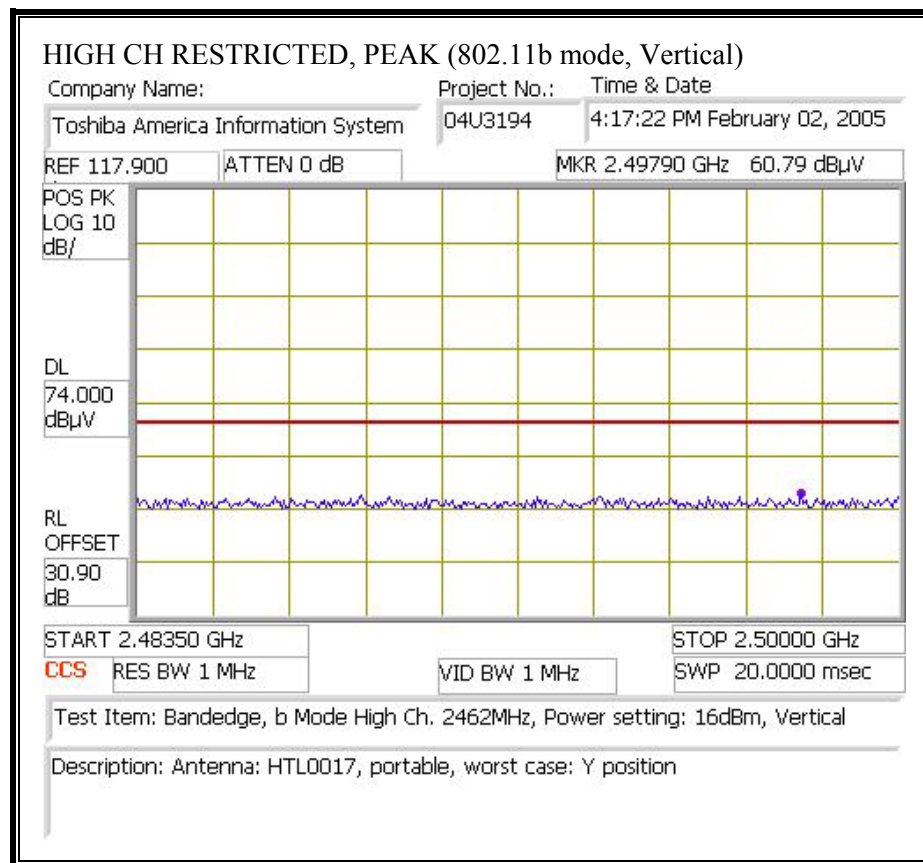


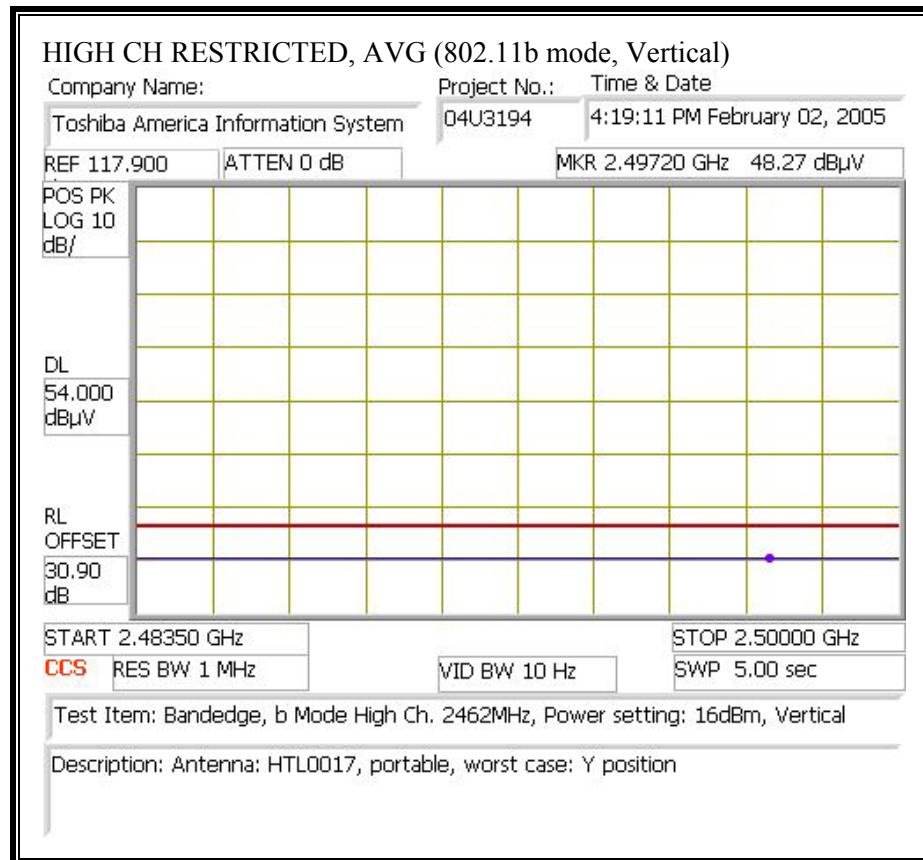


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


02/02/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Chin Pang Project #: 04U3194-1 Company: Toshiba EUT Descrip.: 802.11b/g Half Size Mini-PCI WLAN Module EUT M/N: PA3426U-1MPC Test Target: FCC 15.247 Mode Oper: TX_b mode_antenna HTL017, Portable																
Test Equipment:																
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205								
Hi Frequency Cables		2 foot cable 3 foot cable 4 foot cable 12 foot cable		3_Chin		12_Neelesh		HPF HPF_4.0GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
low ch																
4.824	3.0	53.4	48.5	32.9	3.8	-39.6	0.0	0.6	51.1	46.2	74	54	-22.9	-7.8	V	
12.060	3.0	43.0	34.0	38.8	6.5	-39.2	0.0	0.9	50.1	41.1	74	54	-23.9	-12.9	H	
4.824	3.0	54.0	48.7	32.9	3.8	-39.6	0.0	0.6	51.7	46.4	74	54	-22.3	-7.6	V	
12.060	3.0	44.2	35.8	38.8	6.5	-39.2	0.0	0.9	51.3	42.9	74	54	-22.7	-11.1	H	
mid ch																
4.874	3.0	51.8	47.8	32.9	3.8	-39.6	0.0	0.6	49.5	45.5	74	54	-24.5	-8.5	V	
7.311	3.0	50.5	44.5	35.8	4.9	-40.3	0.0	0.6	51.5	45.5	74	54	-22.5	-8.5	V	
12.180	3.0	43.5	33.2	38.8	6.6	-39.3	0.0	0.9	50.5	40.2	74	54	-23.5	-13.8	V	
4.874	3.0	53.3	48.2	32.9	3.8	-39.6	0.0	0.6	51.0	45.9	74	54	-23.0	-8.1	H	
7.311	3.0	52.0	46.7	35.8	4.9	-40.3	0.0	0.6	53.0	47.7	74	54	-21.0	-6.3	H	
12.180	3.0	44.6	34.0	38.8	6.6	-39.3	0.0	0.9	51.6	41.0	74	54	-22.4	-13.0	H	
High Ch																
4.924	3.0	51.9	47.4	33.0	3.8	-39.7	0.0	0.6	49.6	45.1	74	54	-24.4	-8.9	V	
7.386	3.0	53.6	46.8	36.0	4.9	-40.3	0.0	0.6	54.8	48.0	74	54	-19.2	-6.0	V	
12.310	3.0	42.4	33.0	38.8	6.6	-39.4	0.0	0.9	49.3	39.9	74	54	-24.7	-14.1	V	
4.924	3.0	52.3	45.8	33.0	3.8	-39.7	0.0	0.6	50.0	43.5	74	54	-24.0	-10.5	H	
7.386	3.0	52.8	46.2	36.0	4.9	-40.3	0.0	0.6	54.0	47.4	74	54	-20.0	-6.6	H	
12.310	3.0	44.6	34.7	38.8	6.6	-39.4	0.0	0.9	51.5	41.6	74	54	-22.5	-12.4	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

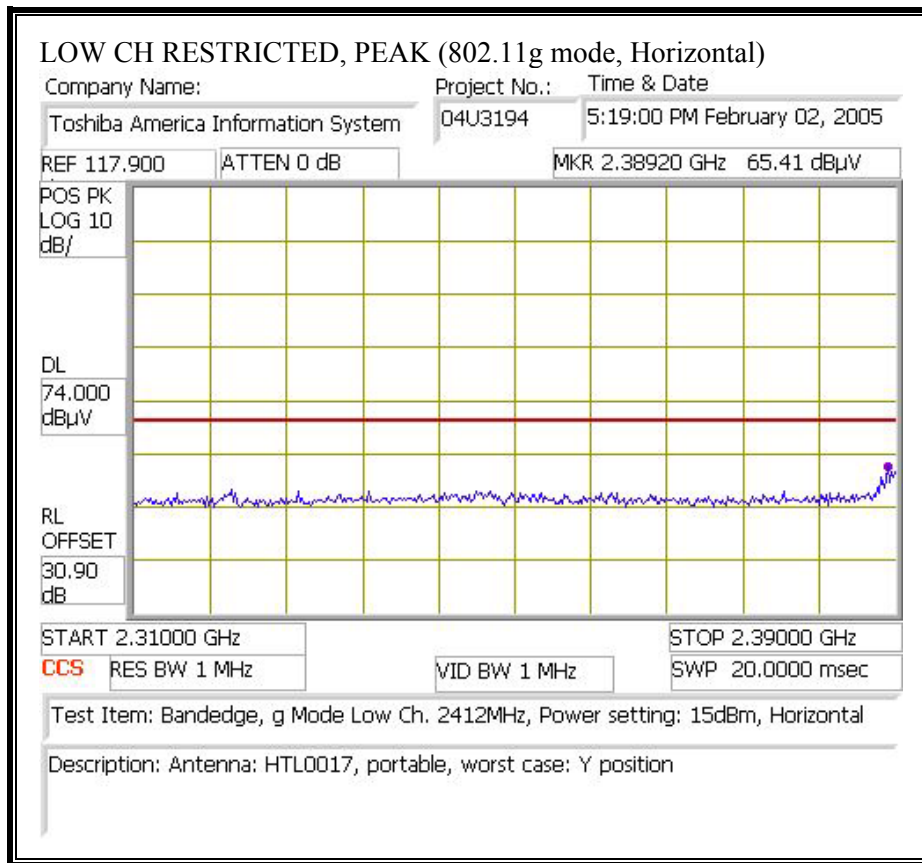

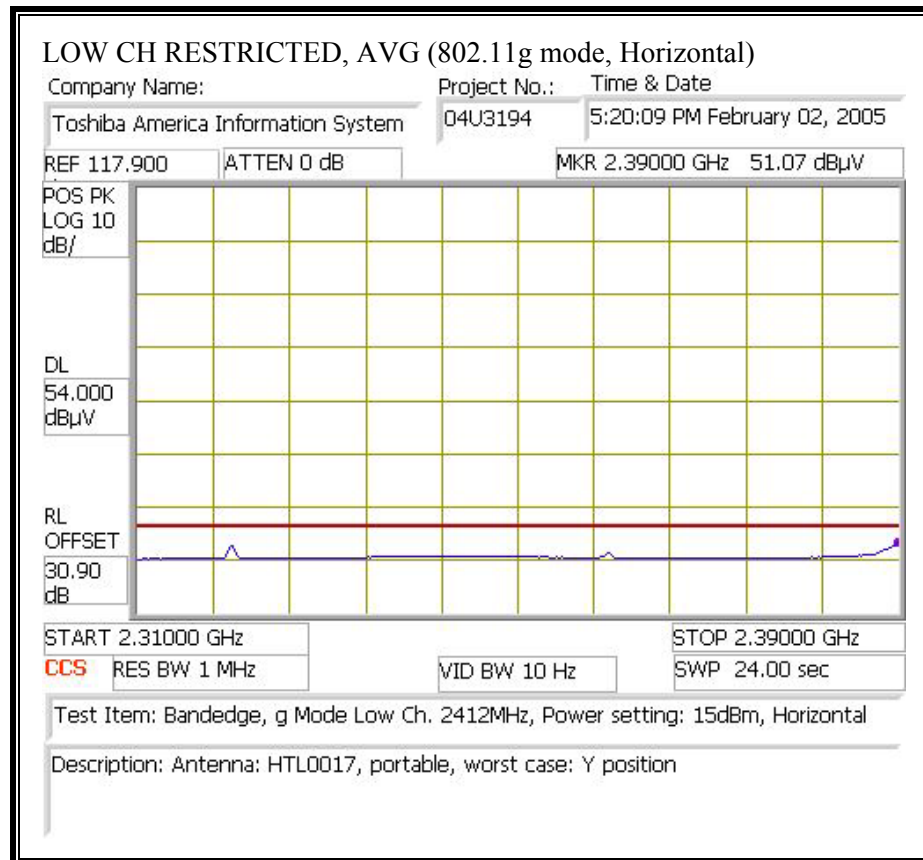



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

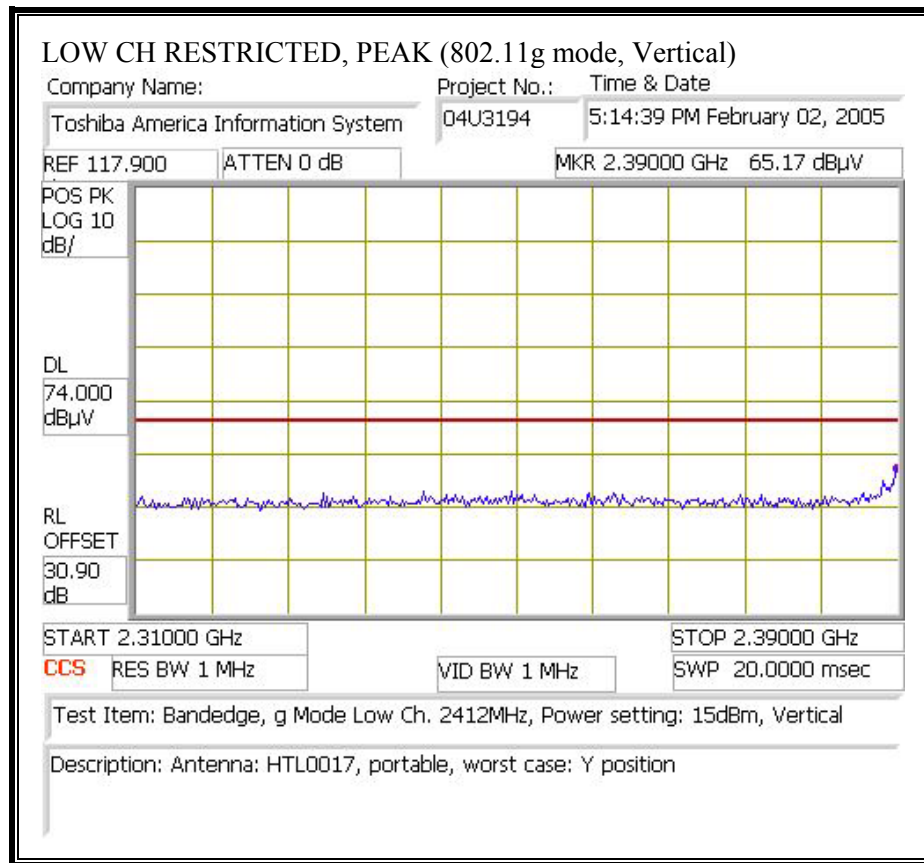

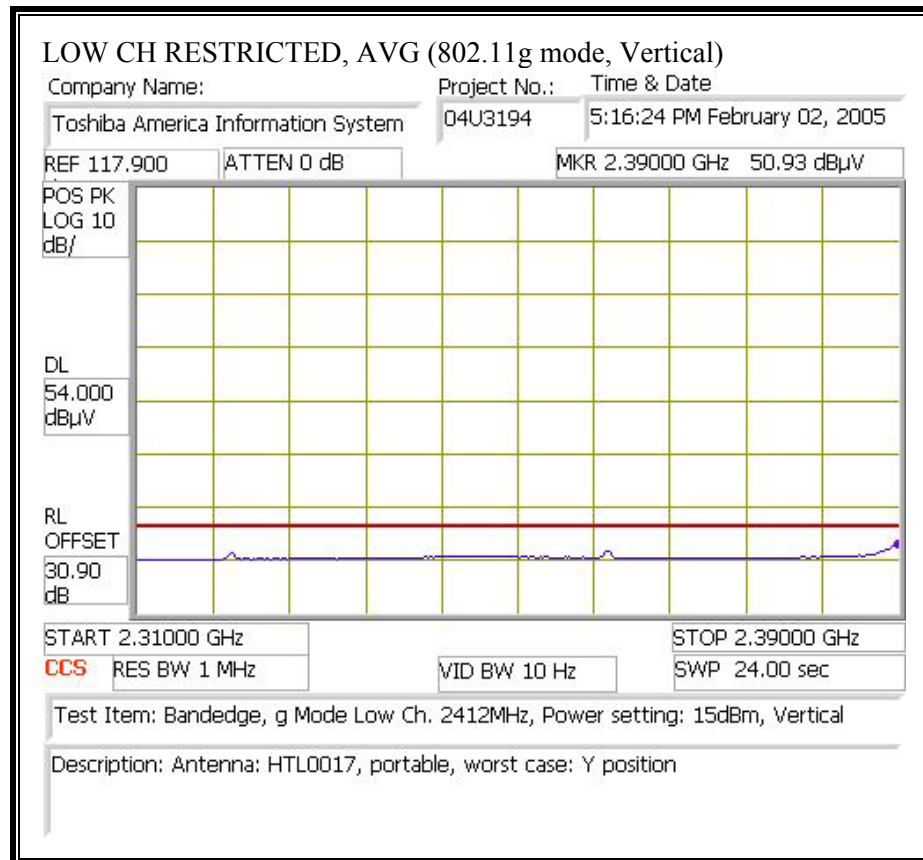



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

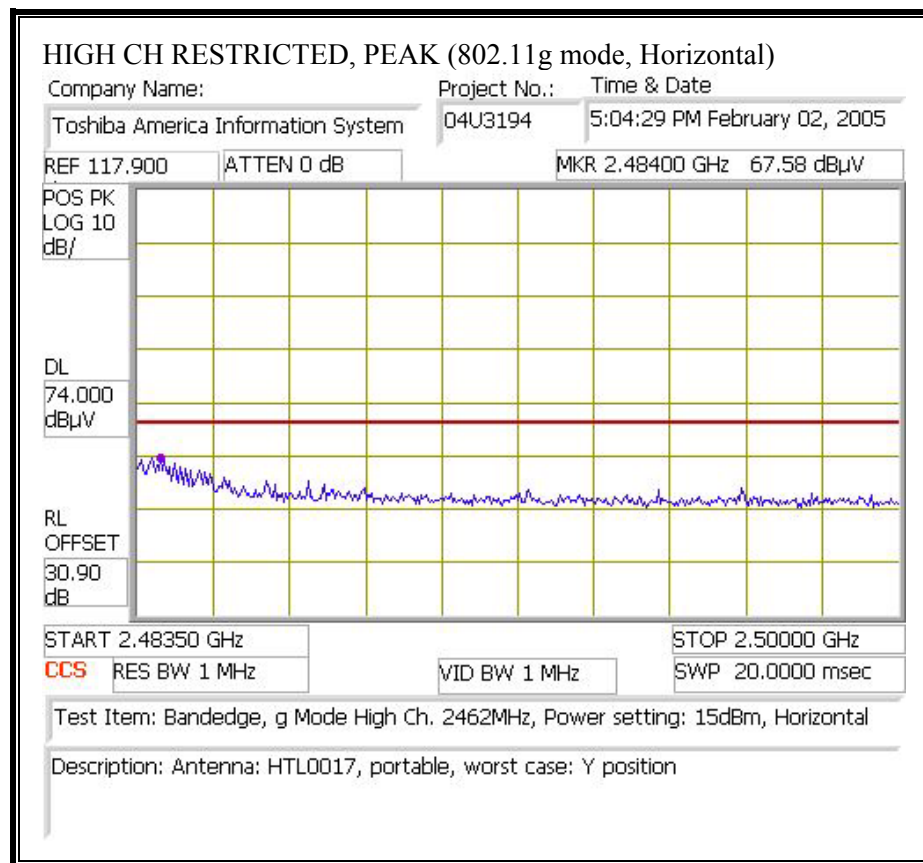

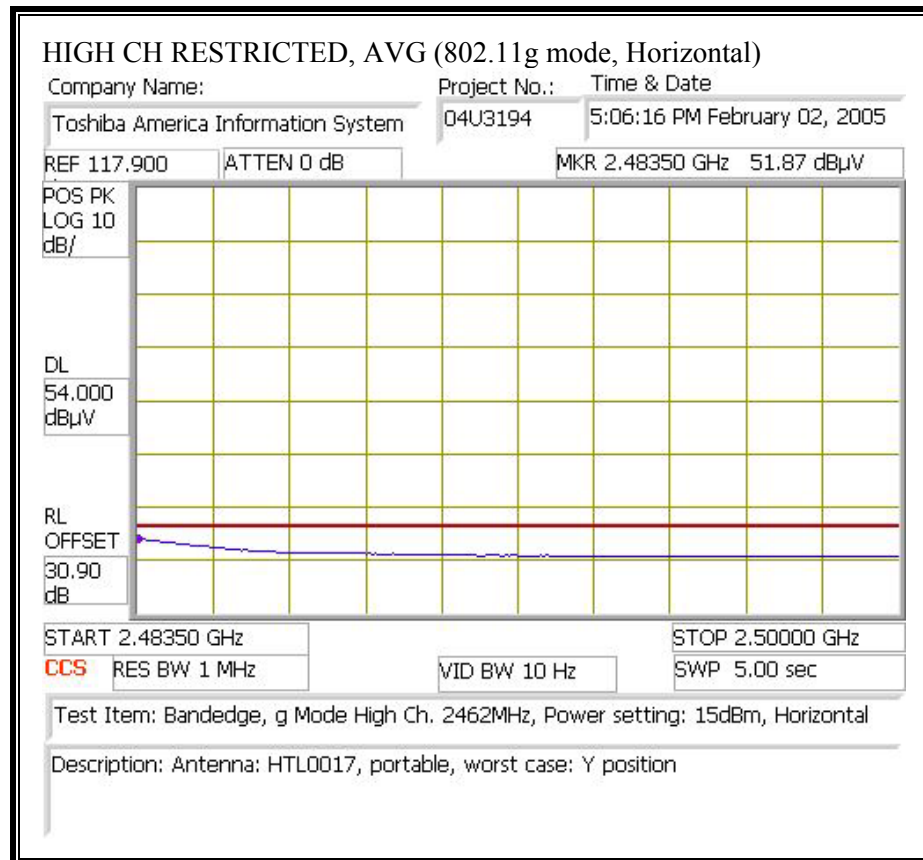

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

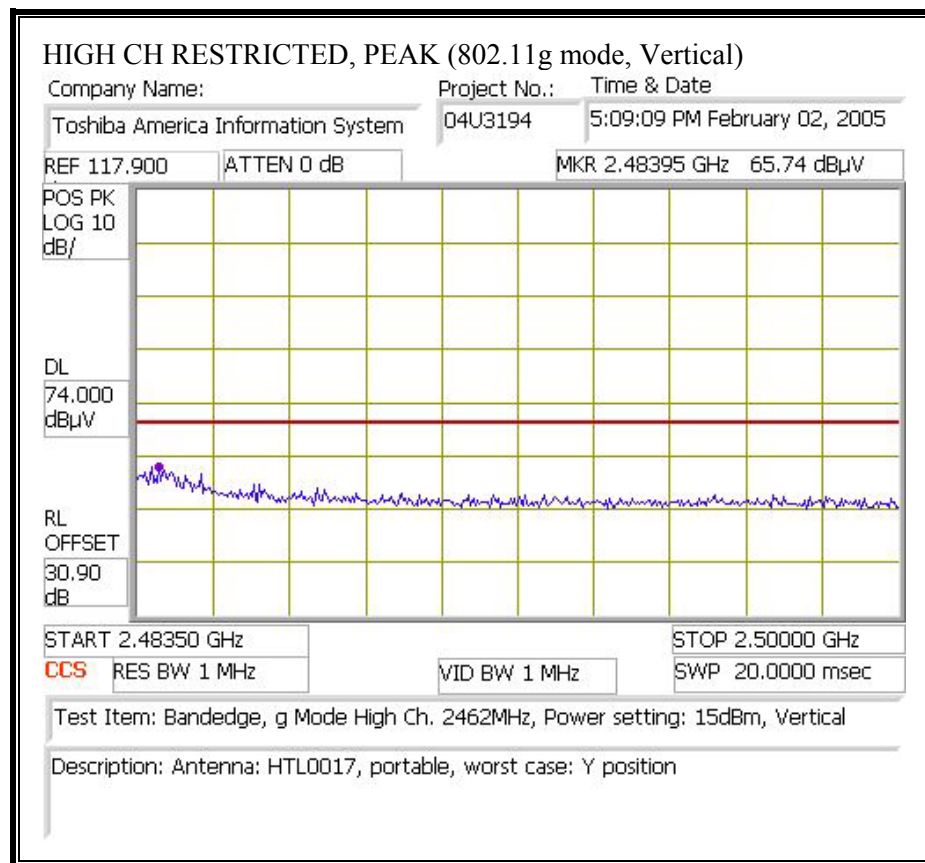

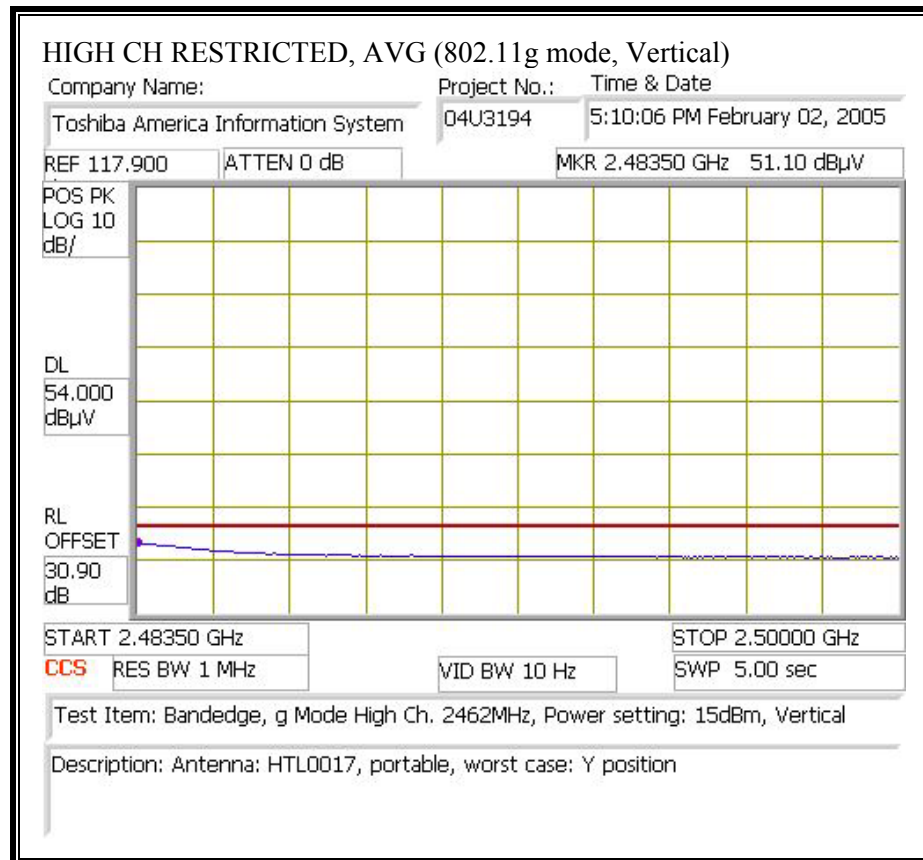

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

PORTABLE CONFIGURATION

02/02/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Chin Pang Project #: 04U3194-1 Company: Toshiba EUT Descrip.: 802.11b/g Half Size Mini-PCI WLAN Module EUT M/N: PA3426U-IMPCC Test Target: FCC 15.247 Mode Oper: TX_g mode_antenna HTL017, Portable															
Test Equipment:															
EMCO Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T87 Miteq 924342		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit FCC 15.205							
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable 3_Chin 12_Neelesh		HPF HPF_4.0GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch															
4.824	3.0	48.8	39.7	32.9	3.8	-39.6	0.0	0.6	46.5	37.4	74	54	-27.5	-16.6	V
12.060	3.0	42.5	33.2	38.8	6.5	-39.2	0.0	0.9	49.6	40.3	74	54	-24.4	-13.7	H
4.824	3.0	51.6	41.2	32.9	3.8	-39.6	0.0	0.6	49.3	38.9	74	54	-24.7	-15.1	V
12.060	3.0	43.0	34.2	38.8	6.5	-39.2	0.0	0.9	50.1	41.3	74	54	-23.9	-12.7	H
Mid Ch															
4.874	3.0	55.6	42.7	32.9	3.8	-39.6	0.0	0.6	53.3	40.4	74	54	-20.7	-13.6	V
7.311	3.0	56.2	42.4	35.8	4.9	-40.3	0.0	0.6	57.2	43.4	74	54	-16.8	-10.6	V
12.180	3.0	42.3	32.0	38.8	6.6	-39.3	0.0	0.9	49.3	39.0	74	54	-24.7	-15.0	V
4.874	3.0	52.5	40.4	32.9	3.8	-39.6	0.0	0.6	50.2	38.1	74	54	-23.8	-15.9	H
7.311	3.0	55.3	42.3	35.8	4.9	-40.3	0.0	0.6	56.3	43.3	74	54	-17.7	-10.7	H
12.180	3.0	43.1	33.6	38.8	6.6	-39.3	0.0	0.9	50.1	40.6	74	54	-23.9	-13.4	H
High Ch															
4.924	3.0	52.4	40.0	33.0	3.8	-39.7	0.0	0.6	50.1	37.7	74	54	-23.9	-16.3	V
7.386	3.0	53.6	41.2	36.0	4.9	-40.3	0.0	0.6	54.8	42.4	74	54	-19.2	-11.6	V
12.310	3.0	43.5	34.0	38.8	6.6	-39.4	0.0	0.9	50.4	40.9	74	54	-23.6	-13.1	V
4.924	3.0	47.9	37.3	33.0	3.8	-39.7	0.0	0.6	45.6	35.0	74	54	-28.4	-19.0	H
7.386	3.0	49.5	38.0	36.0	4.9	-40.3	0.0	0.6	50.7	39.2	74	54	-23.3	-14.8	H
12.310	3.0	43.0	33.6	38.8	6.6	-39.4	0.0	0.9	49.9	40.5	74	54	-24.1	-13.5	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										