

FCC RF TEST REPORT

APPLICANT SZ DJI TECHNOLOGY CO.,LTD

PRODUCT NAME : DJI Camera

FC200 MODEL NAME

TRADE NAME DJI

DJI BRAND NAME

FCC ID : SS3-SF2001307

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE 2016-01-28

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

TES	T REPORT DECLARATION	4
<u>1.]</u>	TECHNICAL INFORMATION	5
110		
1.1	APPLICANT INFORMATION	5
1.2	EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1		6
1.3	TEST STANDARDS AND RESULTS	6
1.3.1		
2. 4	47 CFR PART 15C REQUIREMENTS	7
al Al	TORE HIS NE STAF TORE MO	AB TLAB AOR
2.1	ANTENNA REQUIREMENT	7
2.1.1		
2.1.2		
2.2	ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	······································
2.2.1		7
2.2.2		
2.3		
2.3.1		
2.3.2		
2.3.3		
2.4	BANDWIDTH	
2.4.1		
2.4.2		
2.4.3		
2.5		
2.5.1		
2.5.2	2 Test Description	28
2.5.3		
2.6	POWER SPECTRAL DENSITY (PSD)	
2.6.1		47
2.5.2		
2.5.3		
2.6	RESTRICTED FREQUENCY BANDS	62



2.6.1	REQUIREMENT		62
			62
			63
			79
			79
2.7.2	TEST DESCRIPTION		80
2.7.3	TEST RESULT		82
ANNE	X A GENERAL INFORMATIO	ON	103

Change History						
Issue	Issue Date Reason for change					
1.0	2016-01-28	First edition				
RLAR	MORL	AB THE MORE HE AB THE ME				



TEST REPORT DECLARATION

Applicant	SZ DJI TECHNOLOGY CO.,LTD		
Applicant Address	Room 613、614, 6/F, HKUST SZ IER Bldg, No.9 Yuexing 1st Rd Hi-Tech Park(south), Nanshan District, Shenzhen, Guangdong, China		
Manufacturer	SZ DJI TECHNOLOGY CO., LTD		
Manufacturer Address	Room 613、614, 6/F, HKUST SZ IER Bldg,No.9 Yuexing,1st Rd Hi-Tech Park(south),Nanshan District, Shenzhen, Guangdong, China		
Product Name	DJI Camera		
Model Name	FC200		
Brand Name	DJI		
HW Version	V4.0		
SW Version	V2.0.0		
Test Standards	47 CFR Part 15 Subpart C		
Test Date	2016-01-16 to 2016-01-28		
Test Result	PASS		

Tested by

Qiu Xiaojum Reviewed by

Qiu Xiaojun

Approved by

Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	SZ DJI TECHNOLOGY CO.,LTD
Address:	Room 613、614, 6/F, HKUST SZ IER Bldg, No.9 Yuexing 1st Rd
MO, OB I	Hi-Tech Park(south), Nanshan District, Shenzhen, Guangdong, China

1.2 Equipment under Test (EUT) Description

Brand Name:	DJI
Trade Name:	DJI O' IB TALLE TOPLE HOLD TO THE TALLED
Model Name:	FC200
Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz
Channel Number:	802.11b/g/n-20MHz: 11
Modulation Type:	DSSS, OFDM
Antenna Type:	Integral Antenna
Antenna Gain:	ANT 1: 1dBi ANT 2: 1dBi

NOTE:

- 1. The EUT is a DJI Camera, it contains WIFI operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.
- 2. For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is F (MHz) =2412+5*(n-1) (1<=n<=11). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).
- 3. The EUT has 2 antennas, the EUT incorporates a MIMO function.
- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R) for 2.4GHz band.

Operation mode mode	ANT		
802.11b	ANT 1 and ANT 2		
802.11g	ANT 1 and ANT 2		
802.11n(20MHz)	ANT 1 and ANT 2		

According to KDB 662911 D01, the directional gain = G_{ANT} +10log(N_{ANT}) dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

- 5. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.
- The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.



1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V4.0	V2.0.0

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
4	(10-1-13 Edition)	LAS CORLE MORE OF ME

Test detailed items/section required by FCC rules and results are as below:

No. Section 1 15.203		Description	Test Date	Result PASS	
		Antenna Requirement	N.A		
2	15.247(b)	Peak Output Power	Jan 28, 2016	PASS	
3	15.247(a)	Bandwidth	Jan 28, 2016	PASS	
4 15.247(d)		Conducted Spurious Emission and Band Edge	Jan 28, 2016	PASS	
5 15.247(d) Restricted Frequency Bands		Jan 28, 2016	PASS		
6	5 15.209 ,15.247(d) Radiated Emission		Jan 28, 2016	PASS	
7	15.247(e)	Power spectral density (PSD)	Jan 28, 2016	PASS	

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10, 2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35	
Relative Humidity (%):	30 -60	~40
Atmospheric Pressure (kPa):	86-106	B



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The maximum gain of antenna was defined by manufacturer. The max gain of the antenna1 is 1dBi, The max gain of the antenna2 is 1dBi.

For more info, please refer to the user manual.


2.2 On time, duty cycle and measurement methods

2.2.1 Limits

None; For reporting purposes only.

2.2.2 Test description

A. Test set



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A(1.4).

2.2.3 Test result


A. Test verdict:

Toot made	Frequency	On Time	Period	Duty Cycle	Duty Cycle Refer t	Refer to
Test mode	(MHz)	(msec)	(msec)	x(linear)	(%)	Plot
В	2415	1.061	1.077	0.9851	98.51	Plot A
G	2434	0.188	0.211	0.8910	89.10	Plot B
N ₁₀ RL	2454	1.506	1.543	0.9760	97.60	Plot C


B. Test plots





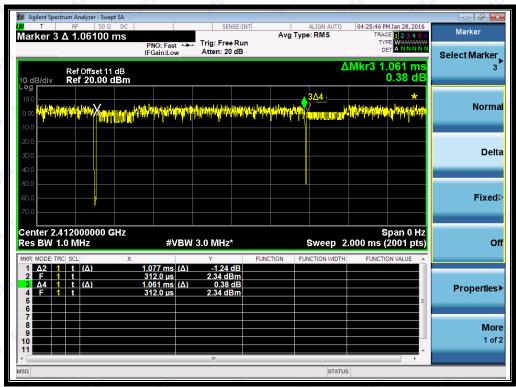


(PlotA: @ 802.11b)

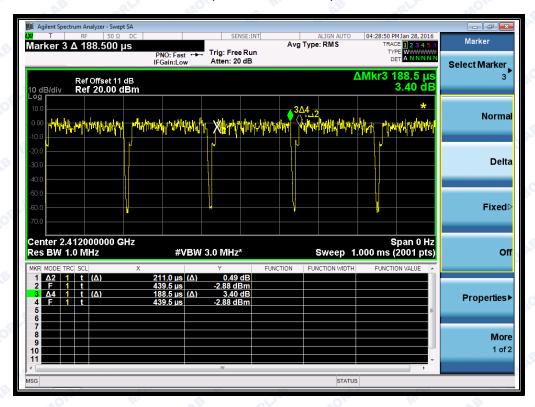

(PlotB: @ 802.11g)



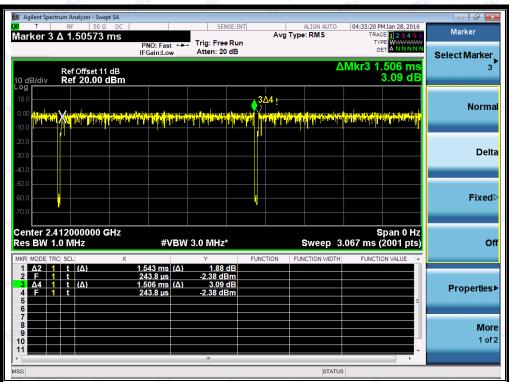

(PlotC: @ 802.11n-20MHz)



2.3 Peak Output Power

2.3.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed1 Watt.

2.3.2 Test Description

The measured output power was calculated by the reading of the Power sensor and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the Power sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Power sensor.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the EUT.

2.3.3.1 802.11b Test Mode

Peak power:

ANT 1:

Channel Frequency (MHz)		Measured C	Output Peak Power	Limit	Verdict	
Chamilei	Frequency (MHz)	dBm	W	dBm	W	verdict
101	2412	7.63	0.00579	A	LAB	PASS
6	2437	9.62	0.00916	30	1.	PASS
11	2462	7.65	0.00582	ZLAB	ORLA	PASS



ANT 2:

Channal	Fragues ov (MHz)	Measured C	Output Peak Power	Limi	Vordict	
Channel	Frequency (MHz)	dBm	W	dBm	W	Verdict
1	2412	2.45	0.00176	ORLA	Mole	PASS
6	2437	3.31	0.00214	30	1 081	PASS
11	2462	2.36	0.00172	MORE	S W	PASS

ANT 1+ANT 2:

Channal	Channel Fraguency (MHz)		output Peak Power	Limi	Verdict	
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
RLP 1	2412	8.78	0.00755	ME	ORL	PASS
6	2437	10.53	0.01131	30	1	PASS
- 11	2462	8.78	0.00754	AB OF	LAL	PASS

Average power:

ANT 1:

		Measured		Max	kimum	Lin	nit	
Channel	Frequency (MHz)	Output (average)	10log(1/x)	Conducted Output (average) Power		dBm	W	Verdict
		Power(dBm)		dBm	W			
1 1110	2412	5.08	0.07	5.15	0.00327	, NOR	Mark Control	PASS
6	2437	7.22	0.07	7.29	0.00536	30	1.0	PASS
11 💸	2462	5.12	0.07	5.19	0.00330			PASS
Note: v re	fers to duty o	vicle	The Carry	₹¶O.	4.	OB		QL.

ANT 2:

M		Measured		Max	kimum	Lir	nit	
Channal	Frequency Output		4.01o a/4 ///	Conducted Output				\/o#d:o#
Channel	(MHz)	(average)	10log(1/x)	(average) Power		dBm	W	Verdict
		Power(dBm)		dBm	W			
. 1	2412	0.09	0.07	0.16	0.00104	200	· Q ///	PASS
6 💨	2437	0.94	0.07	1.01	0.00126	30	1	PASS
11	2462	0.03	0.07	0.1	0.00102	3 1110		PASS

Note: x refers to duty cycle.

ANT 1+ANT 2:

Channal	Fragues and (MIIII)	Measured C	Output Peak Power	Limi	Verdict	
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
LAS1	2412	6.35	0.00431	MORE	W.	PASS
6	2437	8.21	0.00662	30	102	PASS
11	2462	6.36	0.00433	Z WIE	AB	PASS



2.3.3.2 802.11g Test mode

Peak power:

ANT 1:

Channal	Fraguesov (MHz)	Measured C	Output Peak Power	Limi	\/ordiot	
Channel	Frequency (MHz)	dBm	W	dBm	W	Verdict
1,00	2412	2.36	0.00172	Moke	S W	PASS
6	2437	3.85	0.00243	30	1 .	PASS
11	2462	2.62	0.00183		AB	PASS

ANT 2:

Channal	Fraguency (MHz)	Measured C	Output Peak Power	Limi	Verdict	
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
101	2412	7.22	0.00527	AB OF	LAL	PASS
6	2437	8.06	0.00640	30	1,3	PASS
11	2462	7.52	0.00565	RLAB	MORL	PASS

ANT 1+ANT 2:

Channel Fraguency (MHz)		Measured C	output Peak Power	Limi	Verdict	
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
1 🔊	2412	8.45	0.00699	Br. Mo.	QB.	PASS
6	2437	9.46	0.00882	30	oP1	PASS
11	2462	8.74	0.00748	MO.	7	PASS

Average power:

ANT 1:

/ (1 1 1 1 .								
	Measured			Ma	ximum	Lir	nit	
Channel	Frequency	Output	10100(1/4)	Conduc	Conducted Output			Verdict
Channel	(MHz)	(average)	10log(1/x)	(avera	(average) Power		W	verdict
		Power(dBm)		dBm	W			
121	2412	1.82	0.50	2.32	0.00171	LAB		PASS
6	2437	2.67	0.50	3.17	0.00207	30	1	PASS
11 🐠	2462	1.39	0.50	1.89	0.00155	OP!		PASS
Note: v re	fore to duty of	cycle		21.14	401	M		3



ANT 2:

	Measured			Maximum		Limit		
Channal	Frequency	Output	4010 (4/4)	Conducted Output				\/o#d:o#
Channel	(MHz)	(average)	10log(1/x)	(average) Power		dBm	W	Verdict
		Power(dBm)		dBm	W			
1 AB	2412	5.76	0.50	6.26	0.00423	0.	4n	PASS
6	2437	7.25	0.50	7.75	0.00596	30	1	PASS
11	2462	6.02	0.50	6.52	0.00449		AB	PASS

Note: x refers to duty cycle.

ANT 1+ANT 2:

Channel Fraguency (MHz)		Measured O	utput Peak Power	Limi	Verdict	
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
1 _(R)	2412	7.73	0.00593	R. M.	A.B	PASS
6	2437	9.05	0.00803	30	, o ^P 1	PASS
11	2462	7.81	0.00603		الم	PASS

2.3.3.3 802.11n-20MHz Test mode

Peak power:

ANT 1:

Ob a made		Measured C	Output Peak Power	Limi	t	\
Channel	Frequency (MHz)	dBm	W	dBm	W	Verdict
1	2412	3.08	0.00203	RI. MOT	.0	PASS
6	2437	4.3	0.00269	30	1	PASS
11	2462	4.26	0.00267	Moter	III.	PASS

ANT 2:

Channal	Fragues av (NALIE)	Measured C	Output Peak Power	Limi	t	\/ordiot
Channel	Frequency (MHz)	dBm	W	dBm	W	Verdict
1,1101	2412	7.53	0.00566	LAB	ORLA	PASS
6	2437	9.23	0.00838	30	1	PASS
11	2462	7.36	0.00545	RLAI	MORR	PASS

ANT 1+ANT 2:

Channal	Fragues av (MHz)	Measured Output Peak Power		Limit		\/ordigt
Channel	Frequency (MHz)	dBm	W	dBm	W	Verdict
LAB1	2412	8.86	0.00769	MORE	W.	PASS
6	2437	10.44	0.01107	30	108	PASS
11	2462	9.09	0.00811	S MO	AB	PASS



Average power:

ANT 1:

		Measured		Max	ximum	Lir	nit	
01	Frequency	Output	401(46)	Conduc	ted Output			\
Channel	(MHz)	(average)	10log(1/x)	(avera	ge) Power	dBm	W	Verdict
		Power(dBm)		dBm	W			
11	2412	2.02	0.11	2.13	0.00163	RLAL	-11	PASS
S 6	2437	2.93	0.11	3.04	0.00201	30	.61	PASS
11	2462	2.89	0.11	3	0.00200	MOR		PASS

Note: x refers to duty cycle.

ANT 2:

			<u> </u>					
		Measured		Max	kimum	Lir	nit	
Chanal	Frequency	Output	401 (4/-)	Conduc	ted Output			\
Channel	(MHz)	(average)	10log(1/x)	(averaç	ge) Power	dBm	W	Verdict
		Power(dBm)		dBm	W			
1 🕫	2412	6.14	0.11	6.25	0.00422		Mo.	PASS
6	2437	7.73	0.11	7.84	0.00608	30	1	PASS
11	2462	5.81	0.11	5.92	0.00391	0,	NB PI	PASS

Note: x refers to duty cycle.

ANT 1+ANT 2:

Channal	Fraguency (MHz)	Measured Output Average Power		Limit		Verdict
Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
1410	2412	7.67	0.00585	LAB	ORLA	PASS
6	2437	9.08	0.00810	30	1	PASS
11	2462	7.71	0.00590	ORLA	Mole	PASS

Note: Each antenna port was measured individually, and the aggregated power was summed mat hematically.

Remark:

1) The MIMO test requirement, RF conducted output power shall measure each transmit ter chain. And after obtain each individual transmitter chain power, then sum the outp ut power by using the following formula; ((dBm/Chain 1)/10^Log)+ (dBm/Chain 2)/10^Log))+ (dBm/Chain N)/10^Log))= Combi ned peak output power in mW.




2.4 Bandwidth

2.4.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the EUT.


2.4.3.1 802.11b Test mode

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1 N	2412	10.04	≥500	PASS
6	2437	10.44	≥500	PASS
3 11	2462	10.44	≥500	PASS


B. Test Plots







(Channel 1: 2412MHz @ 802.11b)

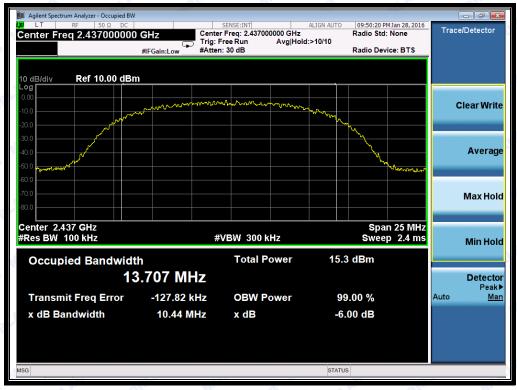

(Channel 6: 2437 MHz @ 802.11b)







(Channel 11: 2462MHz @ 802.11b)

ANT 2:


C. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1.0	2412	10.47	≥500	PASS
41 ⁰ 6	2437	10.45	≥500	PASS
11	2462	10.44	≥500	PASS


D. Test Plots





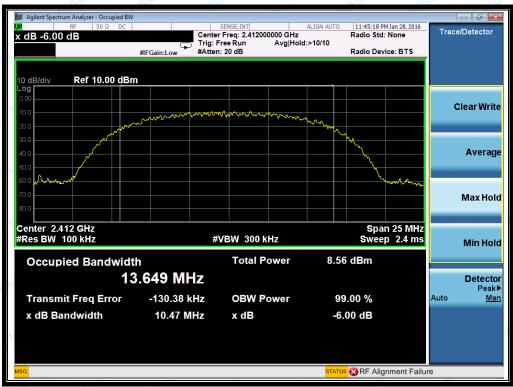

(Channel 1: 2412MHz @ 802.11b)

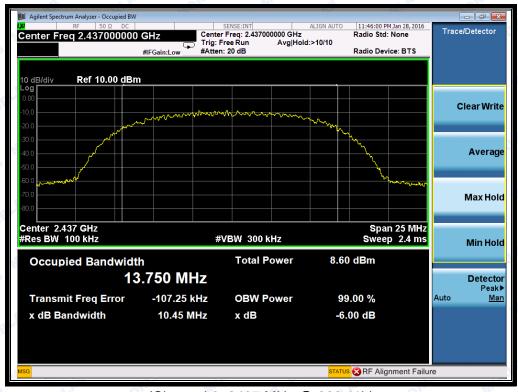

(Channel 6: 2437 MHz @ 802.11b)







(Channel 11: 2462MHz @ 802.11b)

2.4.3.2 802.11g Test mode

ANT 1:


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
₁₁ 01	2412	16.48	≥500	PASS
6 6	2437	16.48	≥500	PASS
11	2462	16.49	≥500	PASS


B. Test Plots:





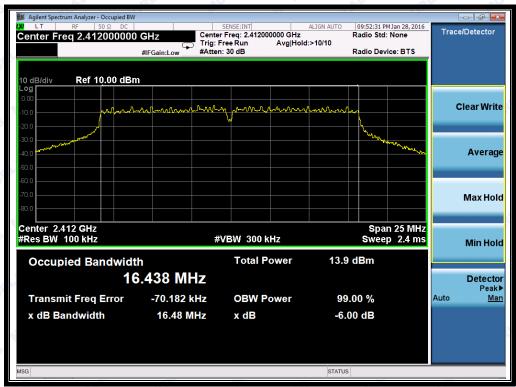


(Channel 1: 2412MHz @ 802.11g)

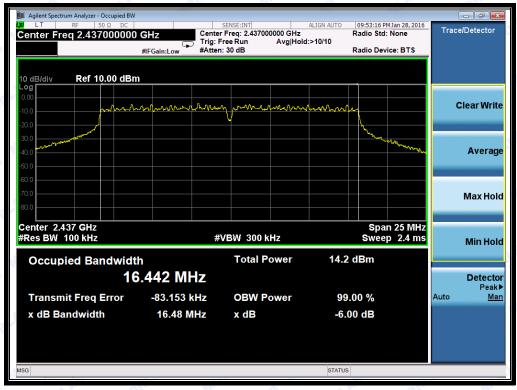

(Channel 6: 2437MHz @ 802.11g)





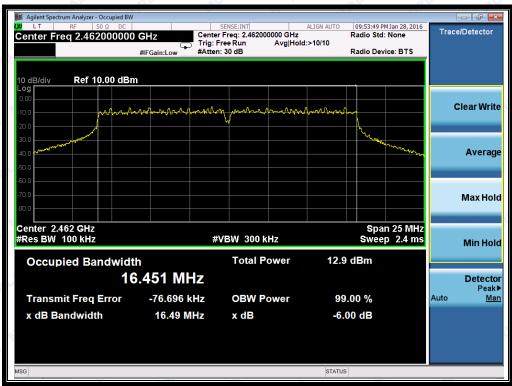


(Channel 11: 2462MHz @ 802.11g)

ANT 2:


C. Test Verdict:

All				
Channal	Frequency	6 dB Bandwidth	Limits	Result
Channel	(MHz)	(MHz)	(kHz)	Result
ALAE1	2412	16.49	≥500	PASS
6	2437	16.48	≥500	PASS
11	2462	16.43	≥500	PASS


D. Test Plots:





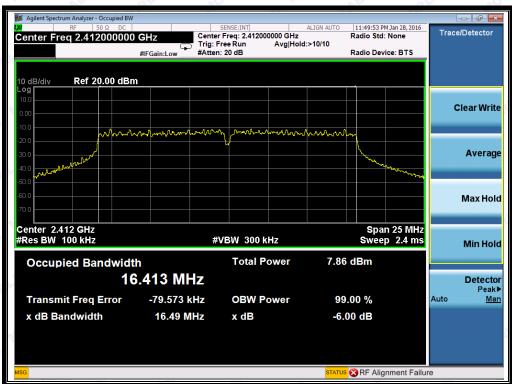


(Channel 1: 2412MHz @ 802.11g)

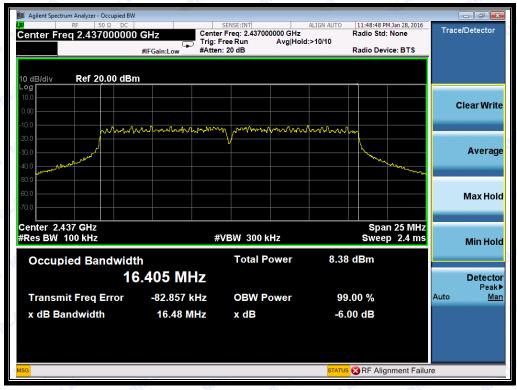

(Channel 6: 2437MHz @ 802.11g)





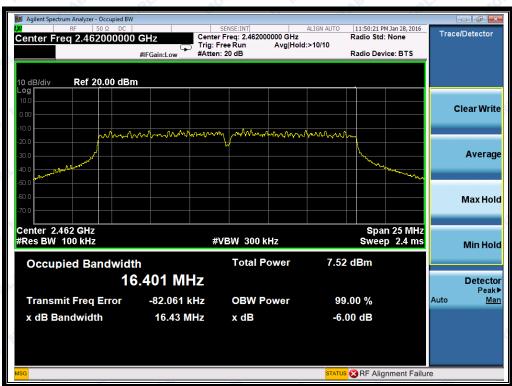

(Channel 11: 2462MHz @ 802.11g)


2.4.3.3 802.11n-20 Test mode

ANT 1:


B. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1119	2412	17.33	≥500	PASS
6	2437	17.56	≥500	PASS
11	2462	17.58	≥500	PASS


B. Test Plots:





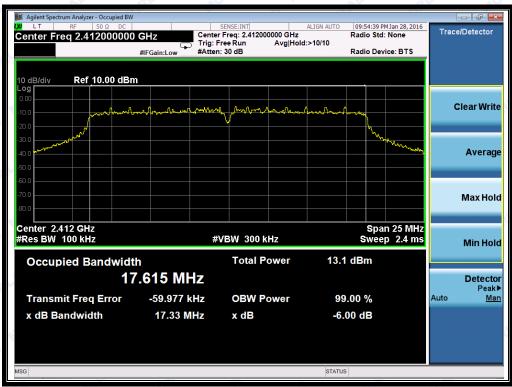


(Channel 1: 2412MHz @ 802.11n-20)

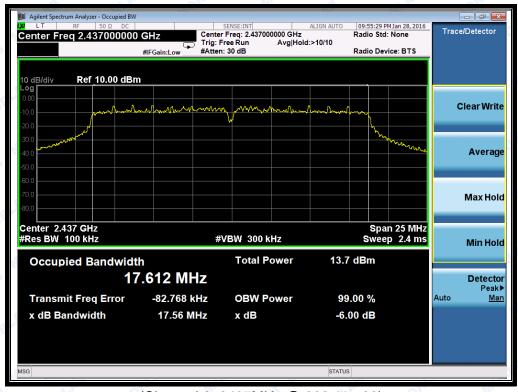

(Channel 6: 2437MHz @ 802.11n-20)





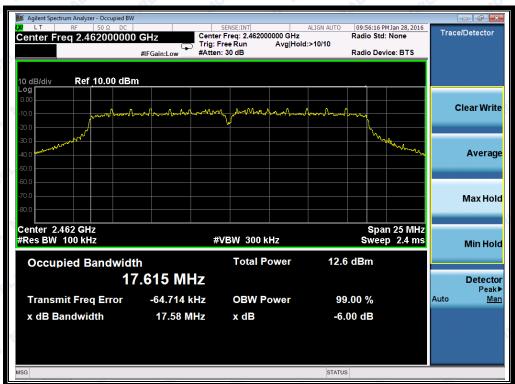

(Channel 11: 2462MHz @ 802.11n-20)

ANT 2:


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
11.5	2412	16.83	≥500	PASS
41 ⁰ 6	2437	17.56	≥500	PASS
11	2462	16.53	≥500	PASS


B. Test Plots





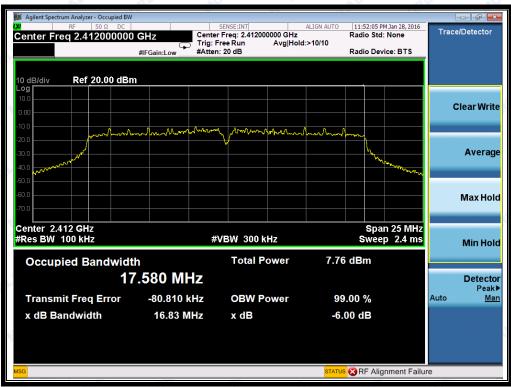


(Channel 1: 2412MHz @ 802.11 n-20)

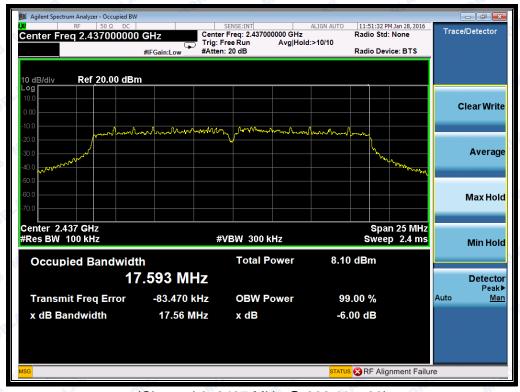

(Channel 6: 2437 MHz @ 802.11 n-20)





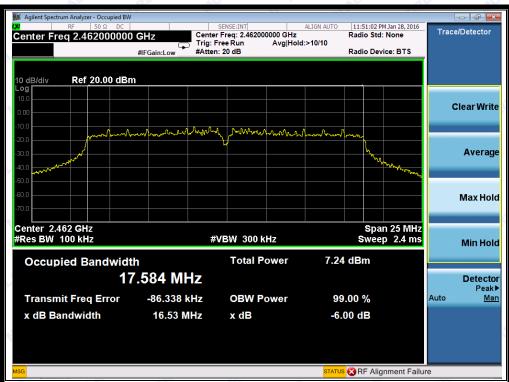

(Channel 11: 2462MHz @ 802.11 n-20)




2.5 Conducted Spurious Emissions and Band Edge

2.5.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.



2.5.3.1 802.11b Test mode


ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
RLA1	2412	-43.80	-4.83	-24.83	PASS
6	2437	-41.56	-4.08	-24.08	PASS
11	2462	-45.86	-6.08	-26.08	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

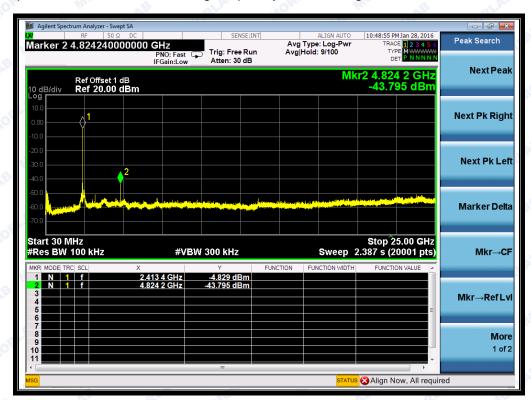


(Channel = 1, 30MHz to 25GHz)





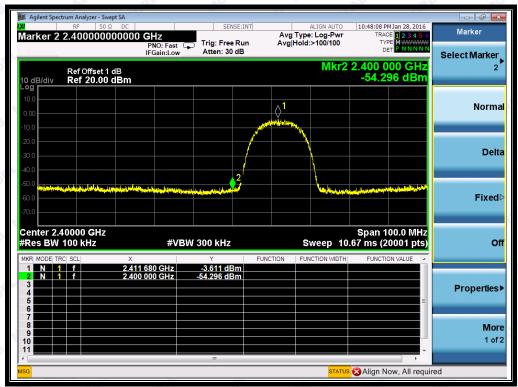

(Band Edge @ Channel = 1)

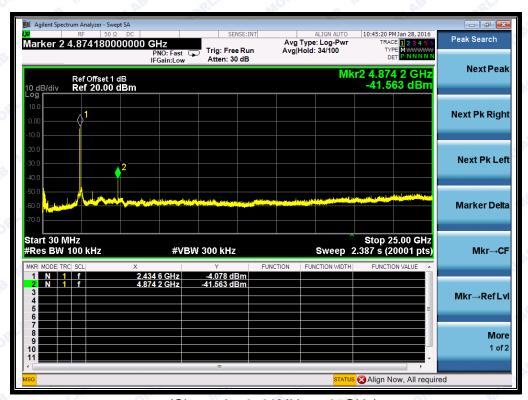


(Channel = 6, 30MHz to 25GHz)








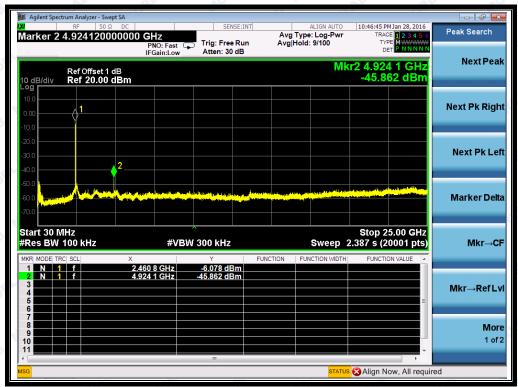

(Channel = 11, 30MHz to 25GHz)

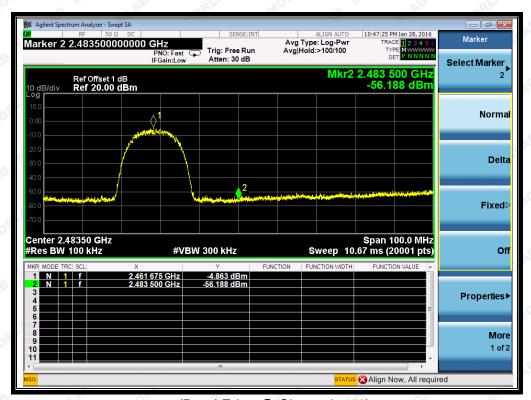

(Band Edge @ Channel = 11)






ANT 2:

C. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
1	2412	-49.86	-9.10	-29.10	PASS
6	2437	-50.00	-10.84	-30.84	PASS
11, 🔊	2462	-50.60	-11.42	-31.42	PASS

D. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

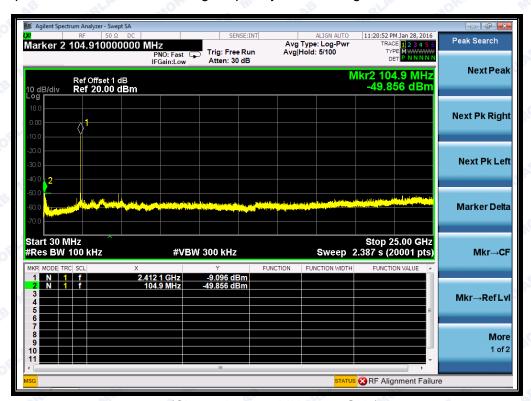


(Channel = 1, 30MHz to 25GHz)





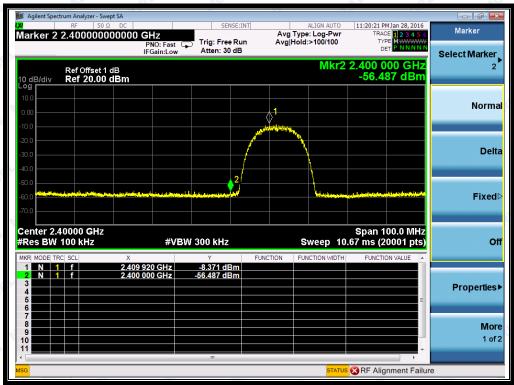

(Band Edge @ Channel = 1)

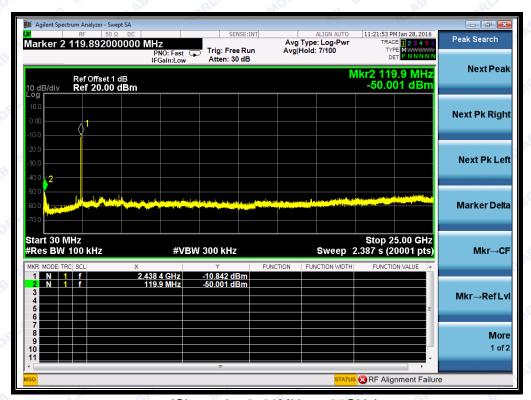


(Channel = 6, 30MHz to 25GHz)








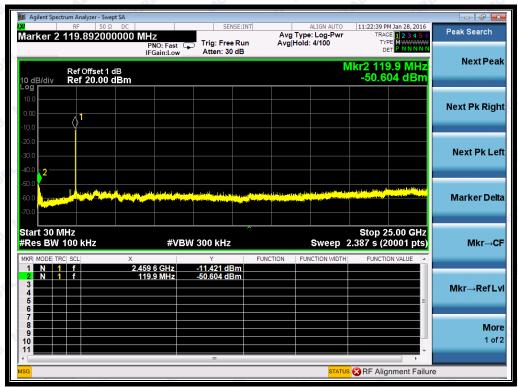

(Channel = 11, 30MHz to 25GHz)

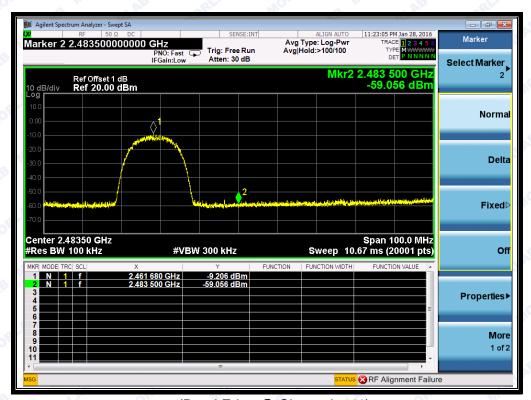

(Band Edge @ Channel = 11)





2.5.3.2 802.11g Test mode

ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max.	Limit (dBm)		
		Out of Band	Carrier	Calculated	Verdict
		Emission (dBm)	Level	-20dBc Limit	
RL1	2412	-45.28	-6.40	-26.40	PASS
6	2437	-48.14	-5.19	-25.19	PASS
11	2462	-49.85	-6.18	-26.18	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.




(Channel = 1, 30MHz to 25GHz)





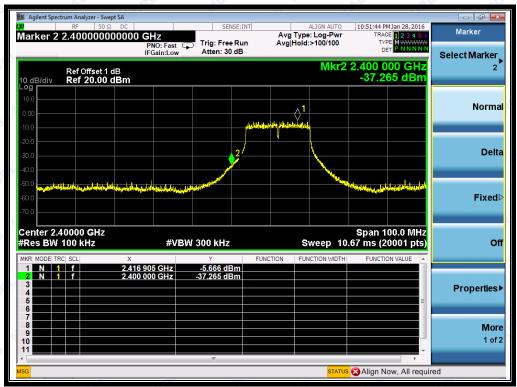

(Band Edge @ Channel = 1)

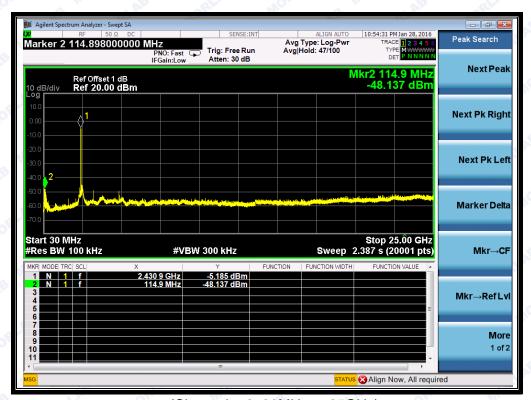


(Channel = 6, 30MHz to 25GHz)








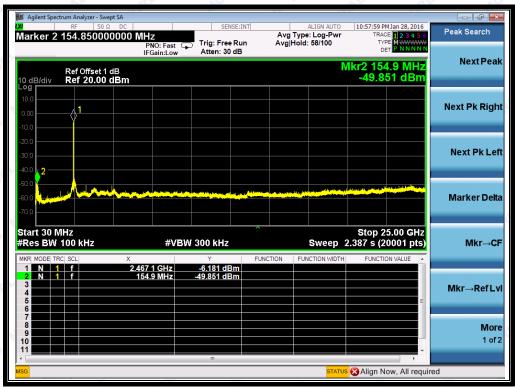

(Channel = 11, 30MHz to 25GHz)

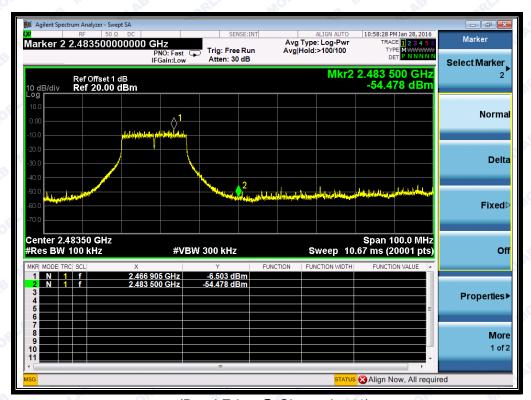

(Band Edge @ Channel = 11)






ANT 2:

C. Test Verdict:

Fraguency		Measured Max.	Limi	t (dBm)	
Channel	Frequency	Out of Band	Carrier	Calculated	Verdict
	(MHz)	Emission (dBm)	Level	-20dBc Limit	
1, 1	2412	-50.05	-11.49	-31.49	PASS
6	2437	-50.50	-11.12	-31.12	PASS
11 🔎	2462	-50.60	-12.12	-32.12	PASS

D. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

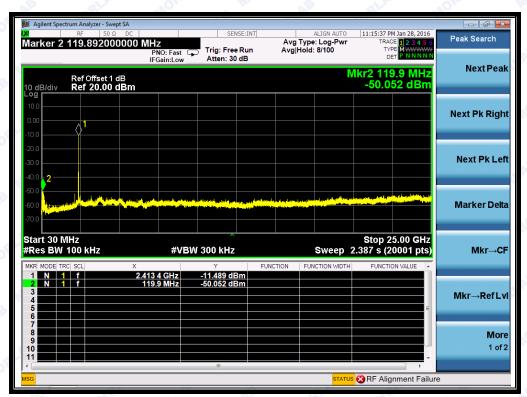


(Channel = 1, 30MHz to 25GHz)





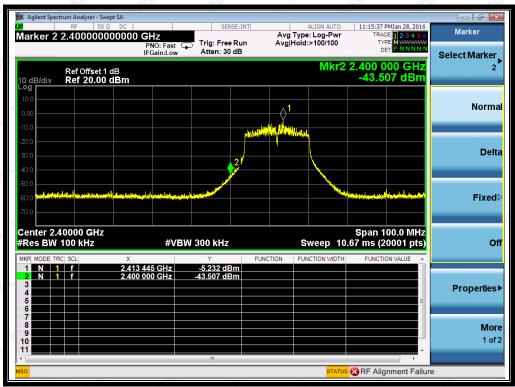


(Band Edge @ Channel = 1)

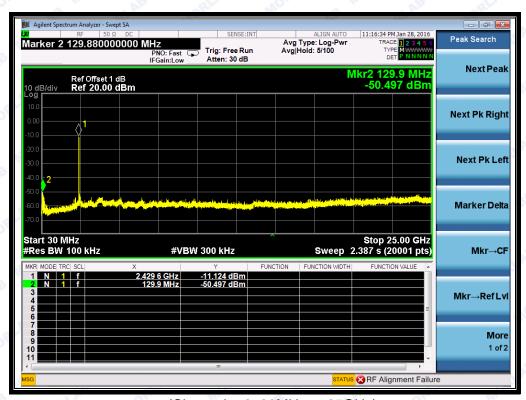


(Channel = 6, 30MHz to 25GHz)








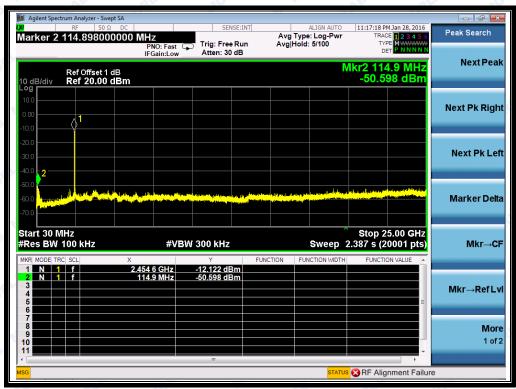

(Channel = 11, 30MHz to 25GHz)

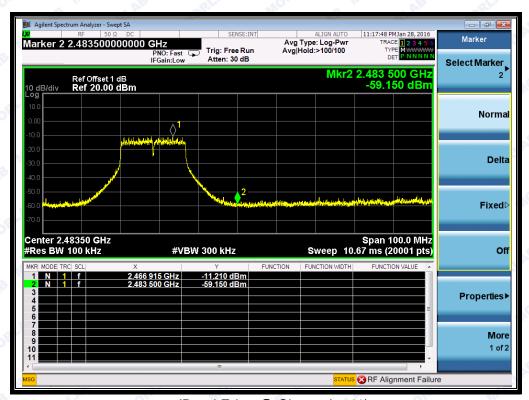

(Band Edge @ Channel = 11)





2.5.3.3 802.11n -20MHz Test mode


ANT 1:

A. Test Verdict:

				V) // // // // // // // // // // // // //	
	Eroguenov	Measured Max.	Limit	(dBm)	
Channel	Frequency	Out of Band	Carrier	Calculated	Verdict
	(MHz)	Emission (dBm)	Level	-20dBc Limit	
1	2412	-48.29	-9.18	-29.18	PASS
6	2437	-48.38	-7.85	-27.85	PASS
11	2462	-48.00	-7.64	-27.64	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

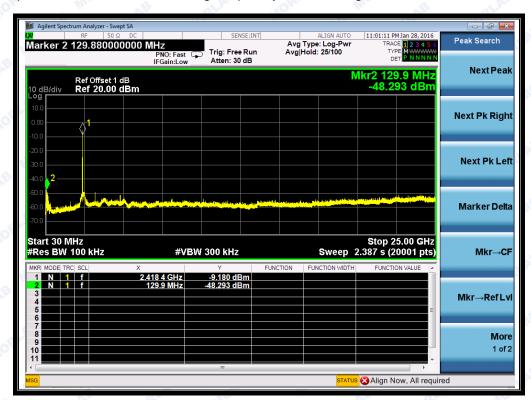


(Channel = 1, 30MHz to 25GHz)





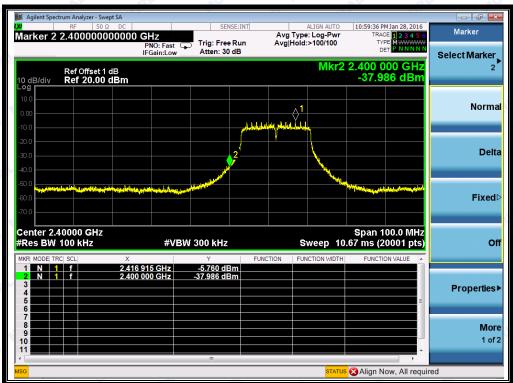

(Band Edge @ Channel = 1)

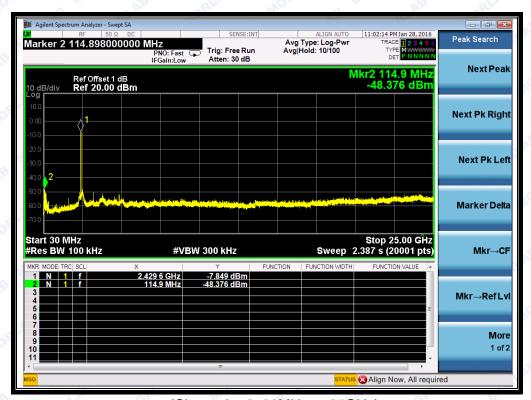


(Channel = 6, 30MHz to 25GHz)








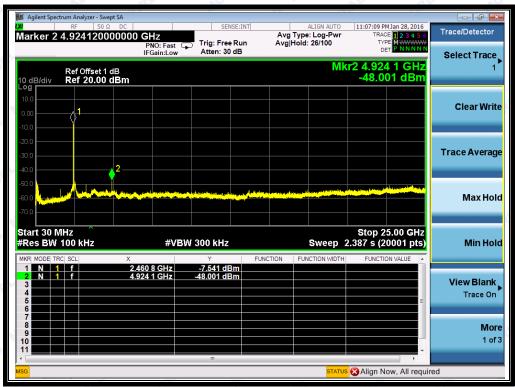

(Channel = 11, 30MHz to 25GHz)

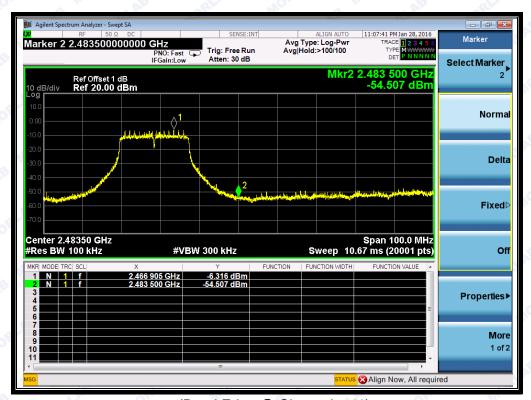

(Band Edge @ Channel = 11)






ANT 2:

A. Test Verdict:

	Fraguenay	Measured Max.	Limit	(dBm)	
Channel	Frequency	Out of Band	Carrier	Calculated	Verdict
	(MHz)	Emission (dBm)	Level	-20dBc Limit	
1, 1	2412	-50.70	-14.41	-34.41	PASS
6	2437	-50.54	-12.30	-32.30	PASS
11 🔎	2462	-50.06	-14.83	-34.83	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

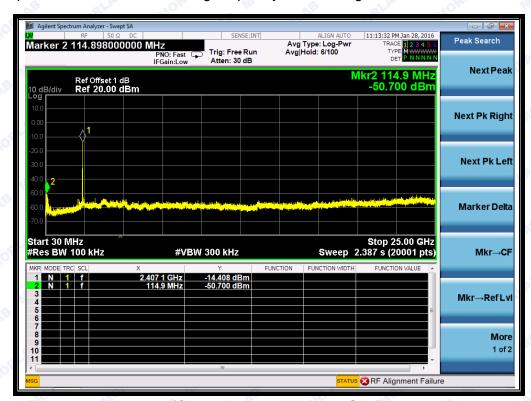


(Channel = 1, 30MHz to 25GHz)





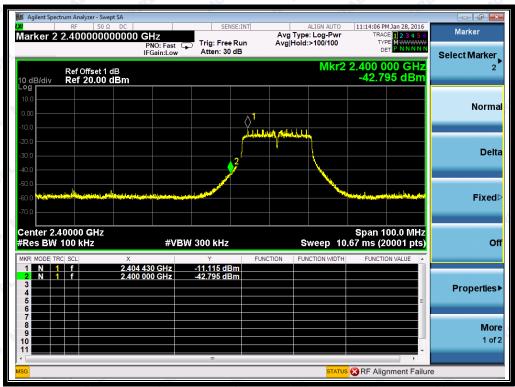


(Band Edge @ Channel = 1)

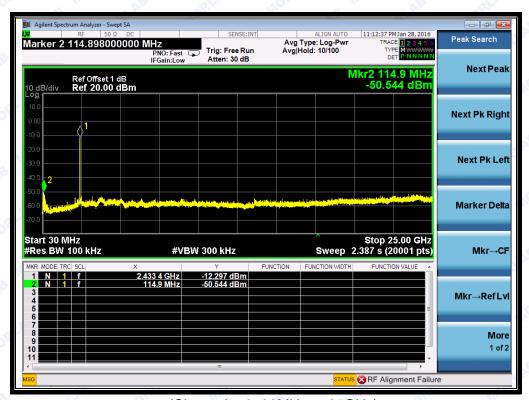


(Channel = 6, 30MHz to 25GHz)








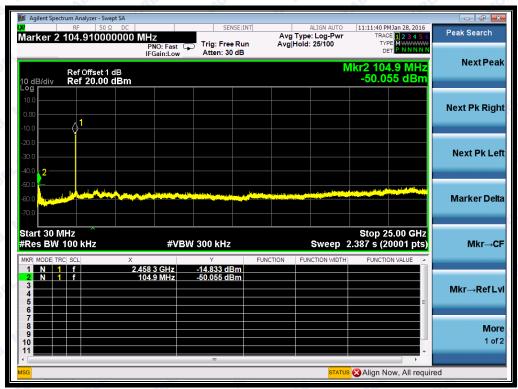

(Channel = 11, 30MHz to 25GHz)

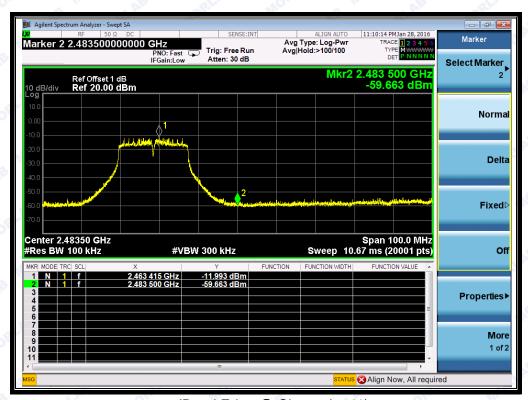

(Band Edge @ Channel = 11)






2.6 Power spectral density (PSD)

2.6.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A(1.4).




2.5.3 Test Result

2.5.3.1 802.11b Test mode

ANT 1:

A. Test Verdict:


Spectral power density (dBm/3kHz)					
Channal	Frequency	Measured PSD	Limit	\/o.wd!.ot	
Channel	(MHz)	(MHz) (dBm/3kHz)	(dBm/3kHz)	Verdict	
1	2412	-19.92	8	PASS	
6	2437	-17.55	8	PASS	
©11	2462	-19.55	8	PASS	
Measurem	ent uncertainty:	±1.3dB	MO. IS TAR	ORI	

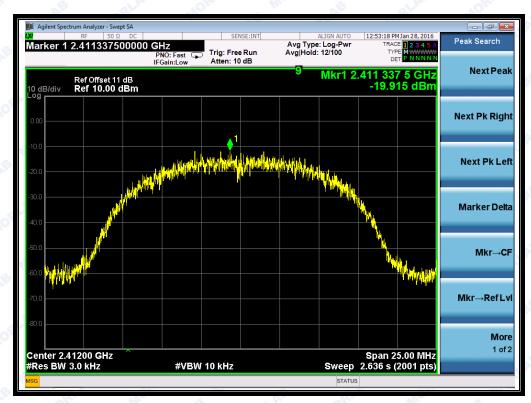


(Channel = 1 @ 802.11b)





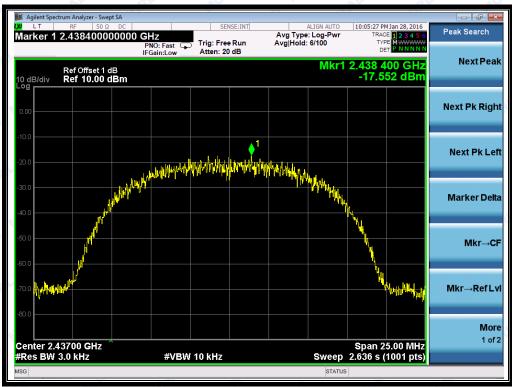

(Channel = 6 @ 802.11b)

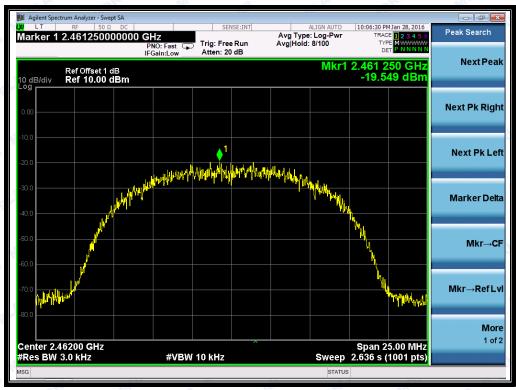


(Channel = 11 @ 802.11b)




ANT 2:

C. Test Verdict:


Spectral power density (dBm/3kHz)					
Channal	Frequency	Measured PSD	Limit	\/o#d:o#	
Channel	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Verdict	
1 1	2412	-23.09	8	PASS	
6	2437	-22.61	8	PASS	
11	2462	-23.47	8	PASS	
Measurem	ent uncertainty:	±1.3dB	AL MO OF	QLAR.	

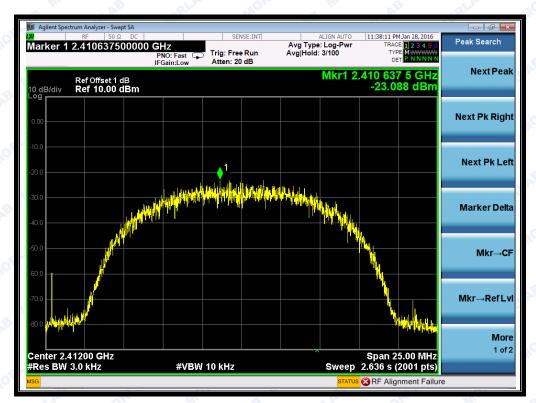


(Channel = 1 @ 802.11b)





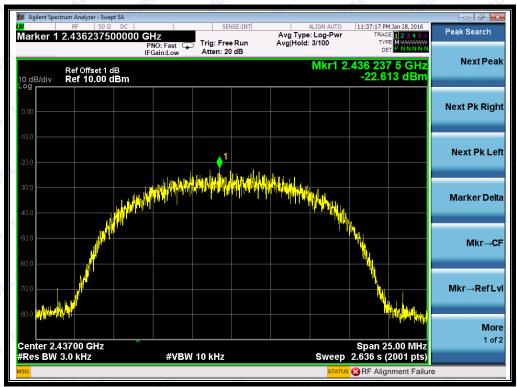

(Channel = 6 @ 802.11b)

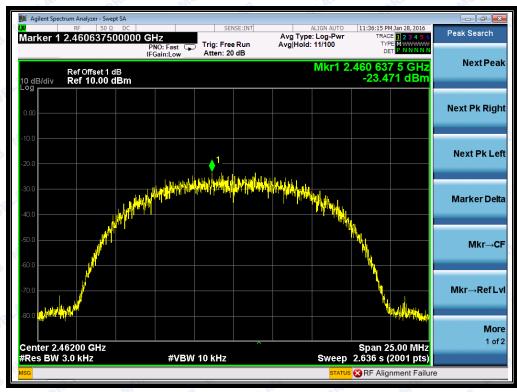

(Channel = 11 @ 802.11b)



Ant 1 + Ant 2:

E. Test Verdict:


Spectral power density (dBm/3kHz)					
Channal	Frequency	Measured PSD	Limit	\/o.v.d!.o.t	
Channel	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Verdict	
1, 1	2412	-18.21	8	PASS	
6	2437	-16.37	8	PASS	
11 📈	2462	-18.07	8	PASS	
Measureme	ent uncertainty:	±1.3dB	MC AB	RLAL	

2.5.3.2 802.11g Test mode


ANT 1:

A. Test Verdict:


Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
^{MC} 1 as	2412	-19.17	8	PASS	
6	2437	-19.97	8	PASS	
1 1	2462	-20.11	8000	PASS	





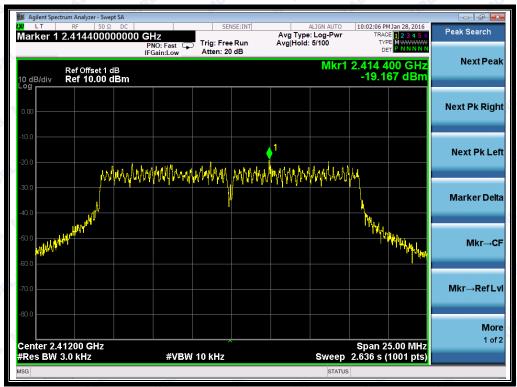

(Channel = 1 @ 802.11g)

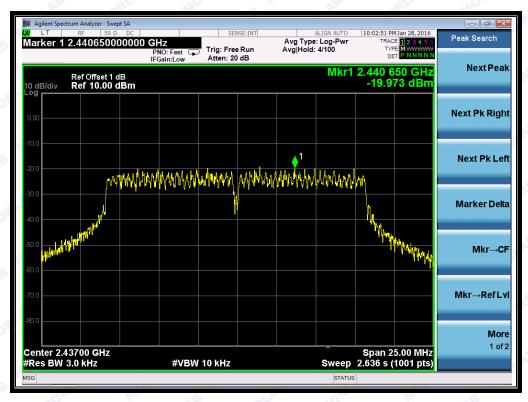

(Channel = 6 @ 802.11g)





(Channel = 11 @ 802.11g)


ANT 2:

C. Test Verdict:


Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
108	2412	-25.31	8	PASS	
6	2437	-25.11	8	PASS	
11	2462	-25.90	8	PASS	
Measureme	ent uncertainty: ±	I.3dB	"Okly Mo.	.0	





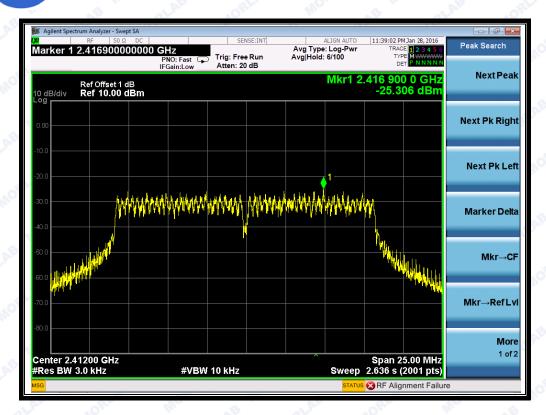


(Channel = 1 @ 802.11g)

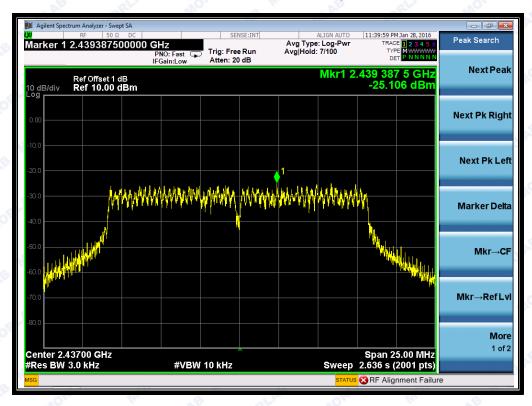

(Channel = 6 @ 802.11q)





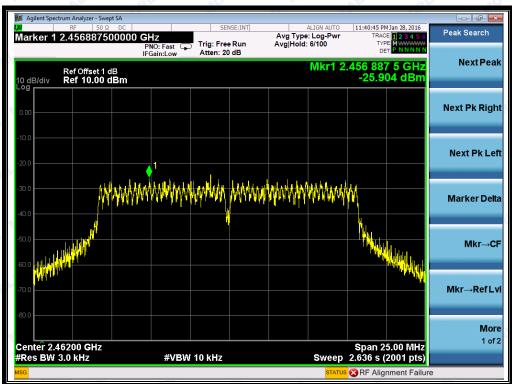

(Channel = 11 @ 802.11g)

Ant 1 + Ant 2:

E. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
3 1	2412	-18.22	8	PASS	
6 🐠	2437	-18.81	8	PASS	
11	2462	-19.09	8 110	PASS	




2.5.3.3 802.11n-20MHz Test mode

ANT 1:


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict	
21	2412	-20.49	8	PASS	
6	2437	-19.97	8	PASS	
11	2462	-20.27	8	PASS	
Measureme	ent uncertainty:	±1.3dB	ALAR OFFI	Mor	

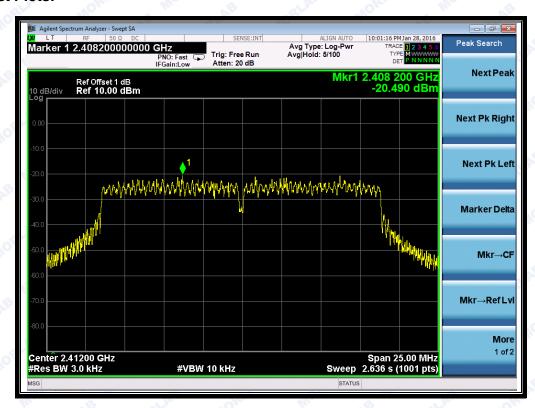


(Channel = 1 @ 802.11n-20MHz)



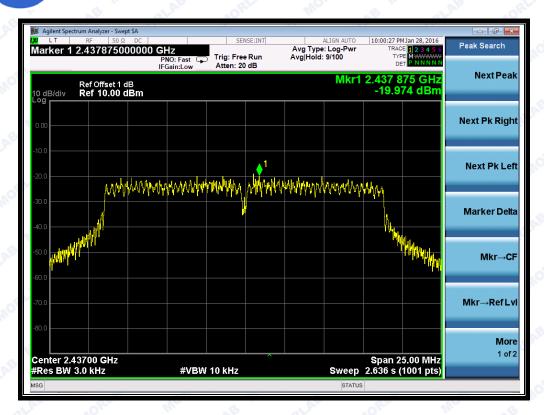

(Channel = 6 @ 802.11n-20MHz)

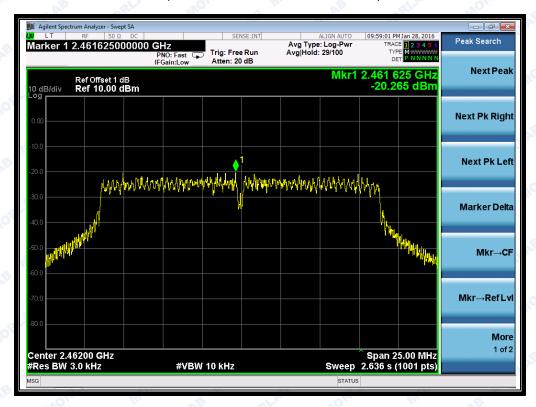

(Channel = 11 @ 802.11n-20MHz)







ANT 2:

A. Test Verdict:


Spectral power density (dBm/3kHz)					
Channal	Frequency	Measured PSD	Limit	\/o.w.di.o.t	
Channel	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Verdict	
1	2412	-24.70	8	PASS	
6	2437	-26.27	8	PASS	
11	2462	-24.73	8	PASS	
Measurement uncertainty: ±1.3dB					

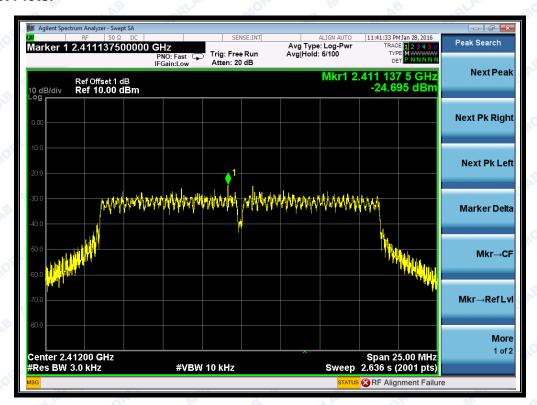


(Channel = 1 @ 802.11n-20MHz)





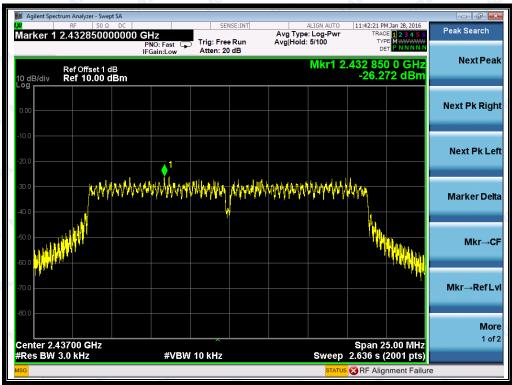

(Channel = 6 @ 802.11n-20MHz)

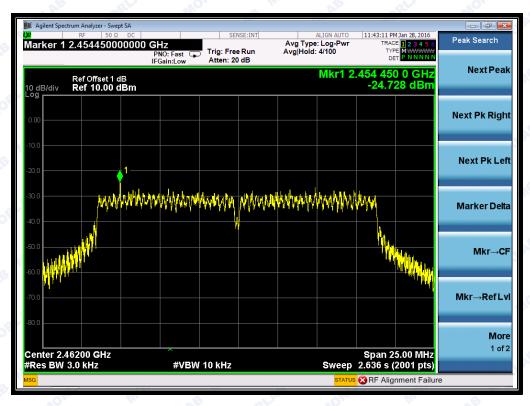

(Channel = 11 @ 802.11n-20MHz)



Ant 1 + Ant 2:

B. Test Verdict:

Spectral power density (dBm/3kHz)					
Channal	Frequency	Measured PSD	Limit	Vordict	
Channel	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Verdict	
1, "	2412	-19.09	8	PASS	
6	2437	-19.06	8	PASS	
11	2462	-18.94	8	PASS	
Measureme	ent uncertainty: :	±1.3dB	Mo. OB	QLA!	




2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

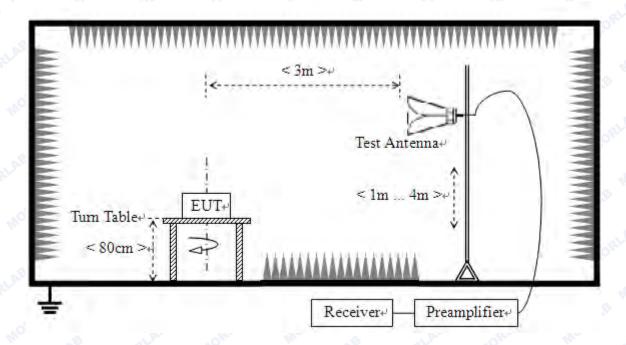

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $\label{eq:energy} E~[dB\mu V/m] = U_R + A_T + A_{Factor}~[dB];~A_T = L_{Cable~loss}~[dB] - G_{preamp}~[dB]$

A_T: Total correction Factor except Antenna

 U_R : Receiver Reading G_{preamp} : Preamplifier Gain A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions


ANT 1:

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
		PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voralist
1 1 1 10 P	2384.59	PK	52.31	-33.63	32.56	51.24	74	Pass
RLAS1	2365.32	AV	38.01	-33.63	32.56	36.94	54	Pass
11	2485.37	PK	48.29	-33.18	32.5	47.61	74	Pass
11,00	2489.66	AV	36.13	-33.18	32.5	35.45	54	Pass





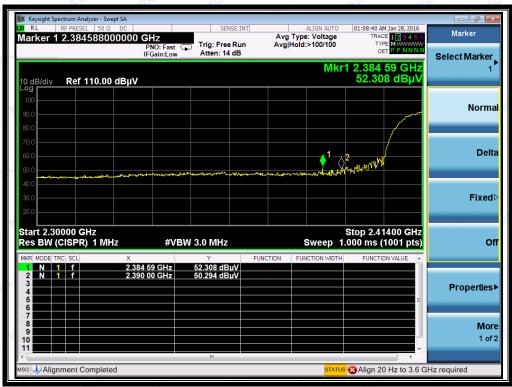

(Channel = 1 PEAK @ 802.11b)

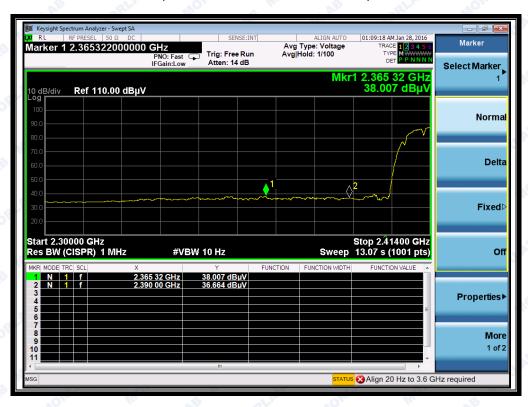

(Channel = 1 AVG @ 802.11b)







(Channel = 11 PEAK @ 802.11b)




(Channel = 11 AVG @ 802.11b)




ANT 2:

C. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBµV/m)	Limit (dBµV/m)	Verdict
		PK/ AV	U _R (dBuV)					
1 _m op	2385.84	PK	52.12	-33.63	32.56	51.05	74	Pass
SRLAR 1	2374.21	AV	37.98	-33.63	32.56	36.91	54	Pass
11	2488.87	PK	47.73	-33.18	32.5	47.05	74	Pass
11 MO	2489.47	AV	35.30	-33.18	32.5	34.62	54	Pass

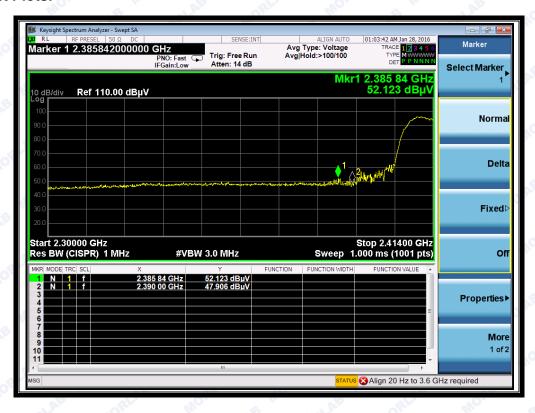

(Channel = 1 PEAK @ 802.11b)





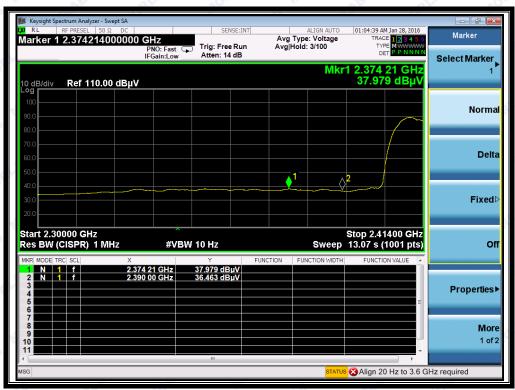

(Channel = 1 AVG @ 802.11b)



(Channel = 11 PEAK @ 802.11b)





(Channel = 11 AVG @ 802.11b)


2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


ANT 1:

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Vordict
		PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
RLAE1	2389.38	PK	54.62	-33.63	32.56	53.55	74	Pass
HCT.LAL	2370.91	AV	37.86	-33.63	32.56	36.79	54	Pass
11 MOF	2483.89	PK	48.74	-33.18	32.5	48.06	74	Pass
11	2483.89	AV	34.71	-33.18	32.5	34.03	54	Pass





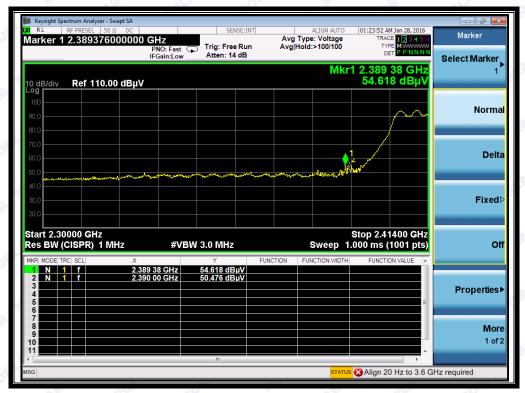

(Channel = 1 PEAK @ 802.11g)



(Channel = 1 AVG @ 802.11g)







(Channel = 11 PEAK @ 802.11g)



(Channel = 11 AVG @ 802.11g)



ANT 1:

C. Test Verdict:


.0	La Company of the Com	. 6	The state of the s	.07		0	A Area	Ole.
I Channel I	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	\/owdiat
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
1 MOR	2389.38	PK	55.40	-33.63	32.56	54.33	74	Pass
3RLAR 1	2370.57	AV	38.22	-33.63	32.56	37.15	54	Pass
11	2486.43	PK	49.38	-33.18	32.5	48.70	74	Pass
11	2483.77	AV	34.69	-33.18	32.5	34.01	54	Pass



(Channel = 1 PEAK @ 802.11g)





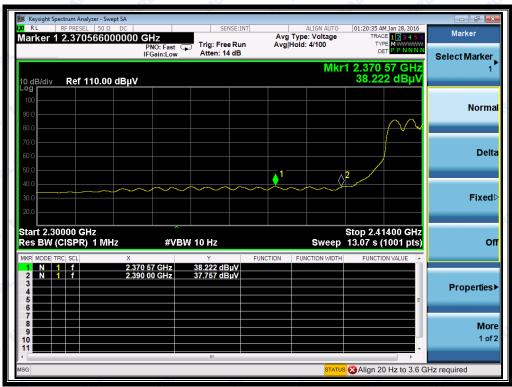

(Channel = 1 AVG @ 802.11g)



(Channel = 11 PEAK @ 802.11g)





(Channel = 11 AVG @ 802.11g)


2.6.3.3 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.

ANT 1:

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
RLAE 1	2389.49	PK	53.93	-33.63	32.56	52.85	74	Pass
MOT LAL	2389.26	AV	37.32	-33.63	32.56	36.25	54	Pass
11	2485.14	PK	49.08	-33.18	32.5	48.40	74	Pass
11	2483.85	AV	34.43	-33.18	32.5	33.75	54	Pass





B. Test Plots:



(Channel = 1 PEAK @ 802.11n-20)




(Channel = 1 AVG @ 802.11n-20)







Channel = 11 PEAK @ 802.11n-20)

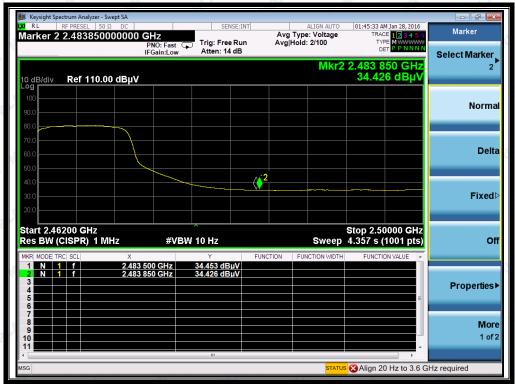

(Channel = 11 AVG @ 802.11n-20)



ANT 2:

C. Test Verdict:

- 631		- 99				Ch.	4.3					
Channel	Frequency		•		•	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)					
1 MOP	2389.49	PK	54.49	-33.63	32.56	53.42	74	Pass				
5 ^{FLA} 1	2389.60	AV	37.43	-33.63	32.56	36.36	54	Pass				
11	2484.88	PK	54.16	-33.18	32.5	53.48	74	Pass				
11	2483.77	AV	34.71	-33.18	32.5	34.03	54	Pass				


D. Test Plots:



(Channel = 1 PEAK @ 802.11n-20)





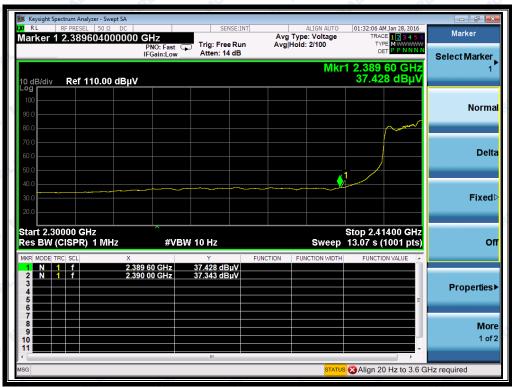

(Channel = 1 AVG @ 802.11n-20)



(Channel = 11 PEAK @ 802.11n-20)





(Channel = 11 AVG @ 802.11n-20)



2.7 Radiated Emission

2.7.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3 82
88 - 216	150	3 LAB OFFLE
216 - 960	200	3 110
Above 960	500	3 DRL MO

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)




2.7.2 Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

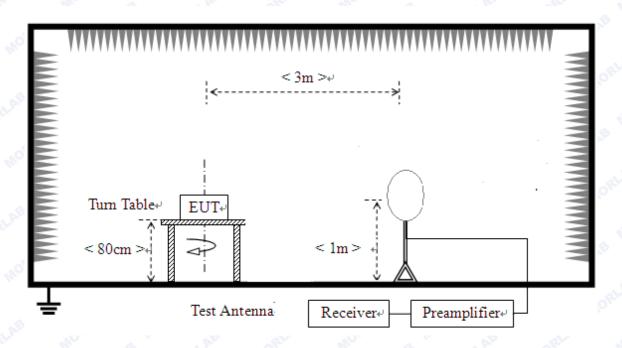


2) For radiated emissions from 30MHz to1GHz

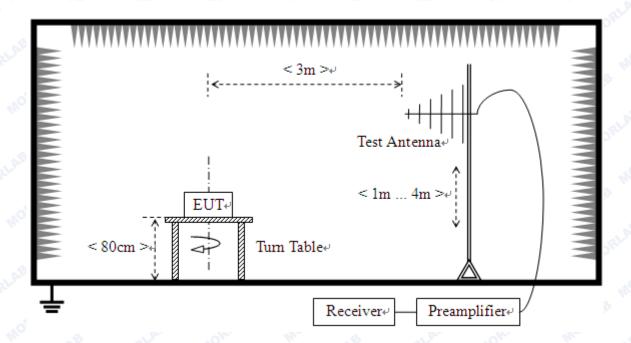



3) For radiated emissions above 1GHz

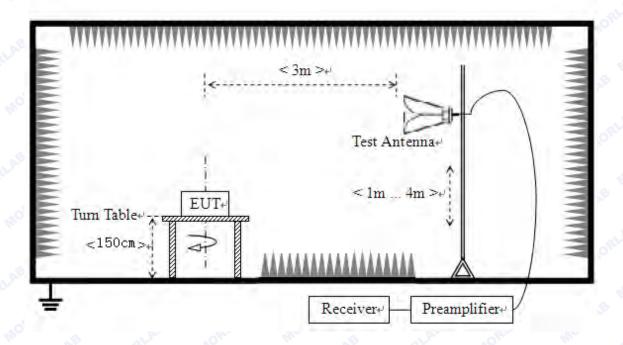

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10-2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 1.5m above the Ground Plane. The set-up and test methods were according to ANSI C63.10-2013.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna.



The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


2.7.3.1 802.11b Test mode

ANT 1:


A. Test Plots for the Whole Measurement Frequency Range:





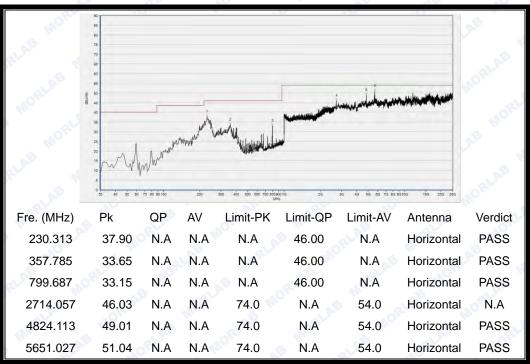


(Antenna Horizontal, 30MHz to 25GHz)

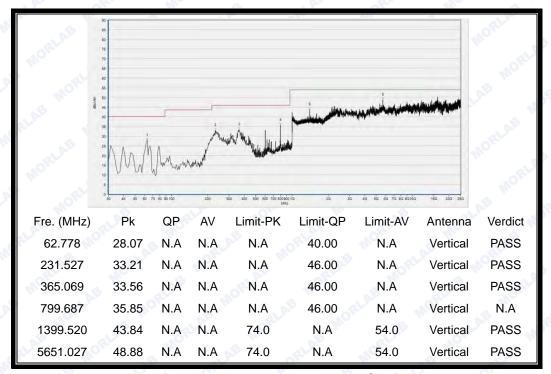


(Antenna Vertical, 30MHz to 25GHz)



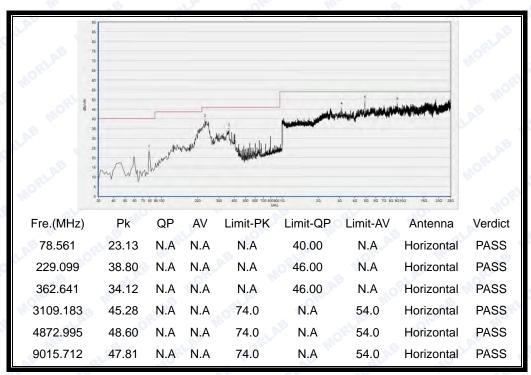


(Antenna Horizontal, 30MHz to 25GHz)

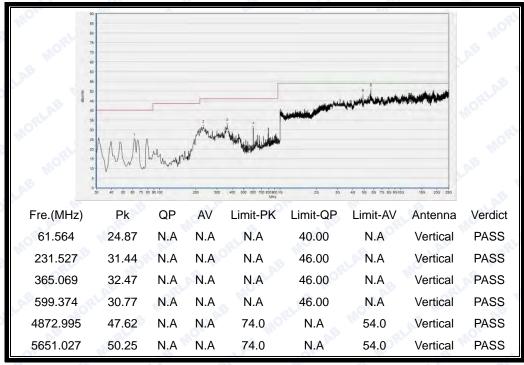


(Antenna Vertical, 30MHz to 25GHz)



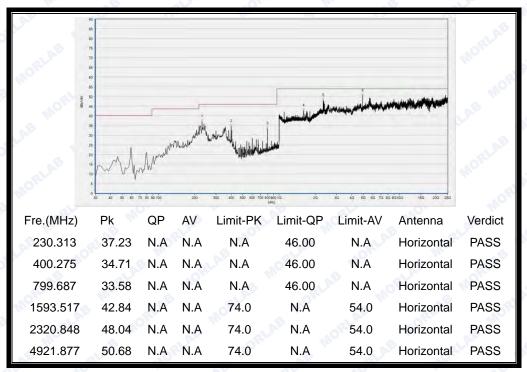

(Antenna Horizontal, 30MHz to 25GHz)

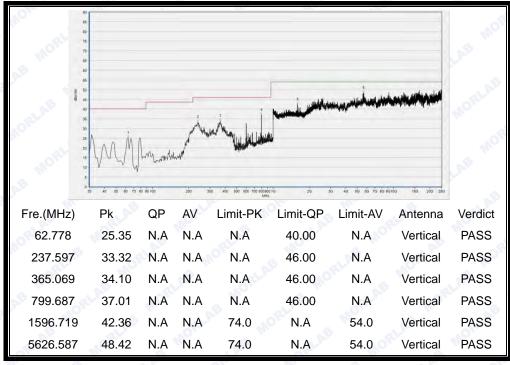


(Antenna Vertical, 30MHz to 25GHz)




ANT 2:

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

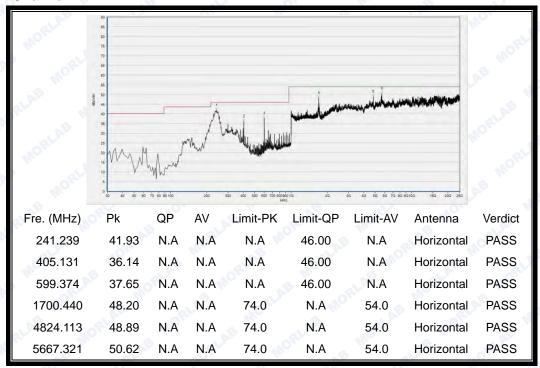


(Antenna Horizontal, 30MHz to 25GHz)

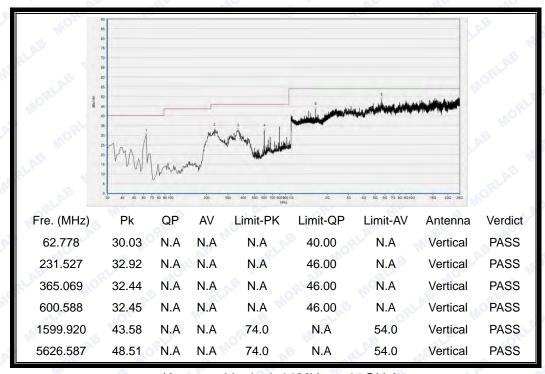


(Antenna Vertical, 30MHz to 25GHz)



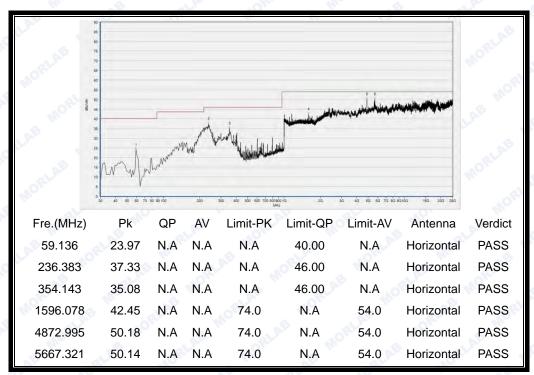


(Antenna Horizontal, 30MHz to 25GHz)

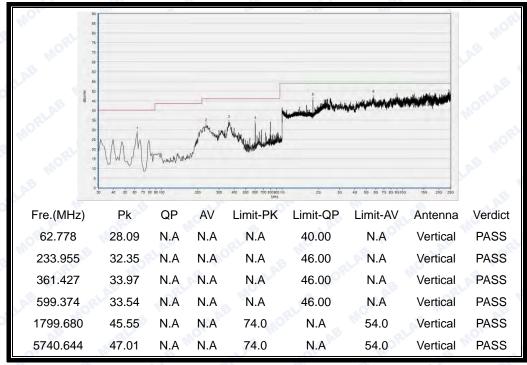


(Antenna Vertical, 30MHz to 25GHz)



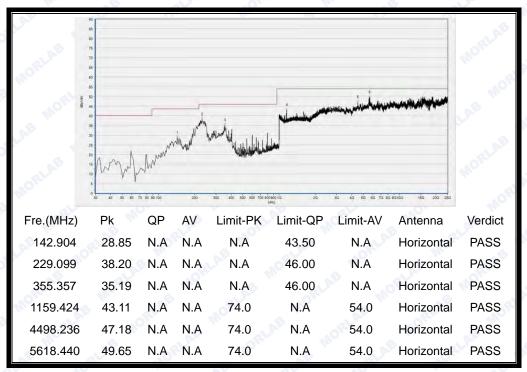

(Antenna Horizontal, 30MHz to 25GHz)

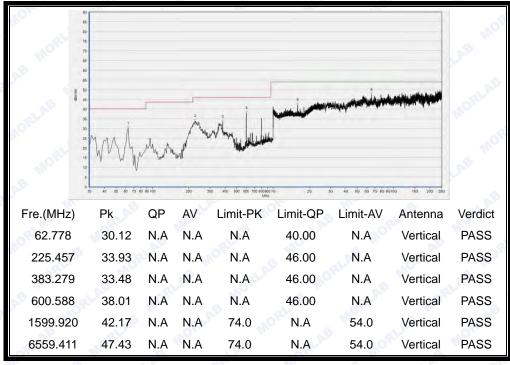

(Antenna Vertical, 30MHz to 25GHz)




2.7.3.2 802.11g Test mode

ANT 1:


A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

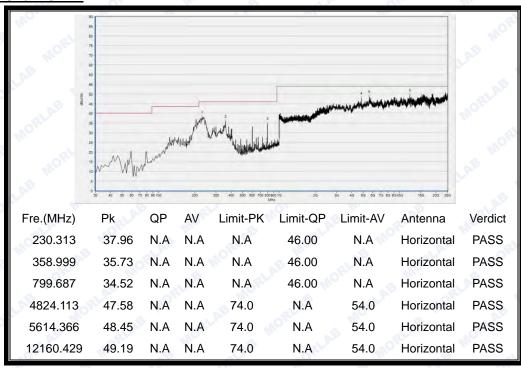


(Antenna Horizontal, 30MHz to 25GHz)



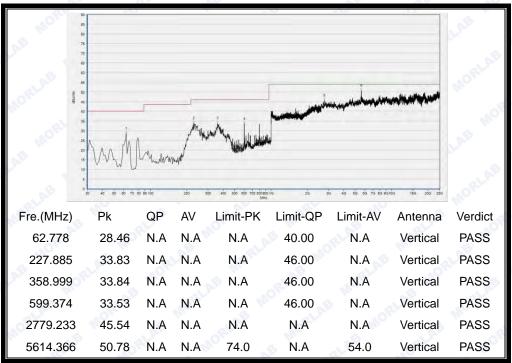


(Antenna Vertical, 30MHz to 25GHz)

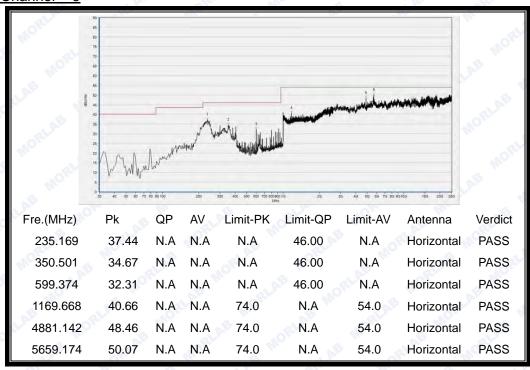


(Antenna Horizontal, 30MHz to 25GHz)



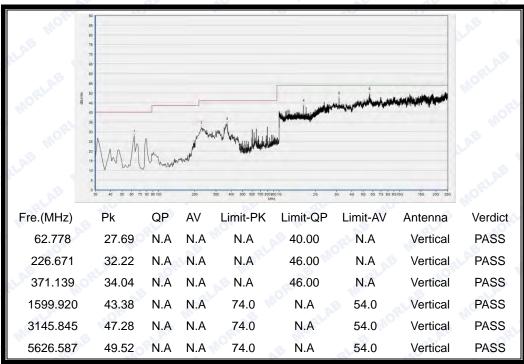


(Antenna Vertical, 30MHz to 25GHz)

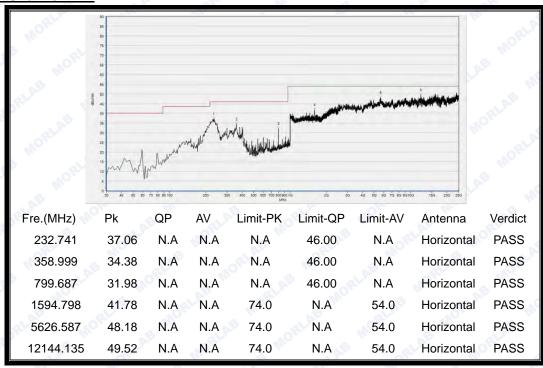

(Antenna Horizontal, 30MHz to 25GHz)



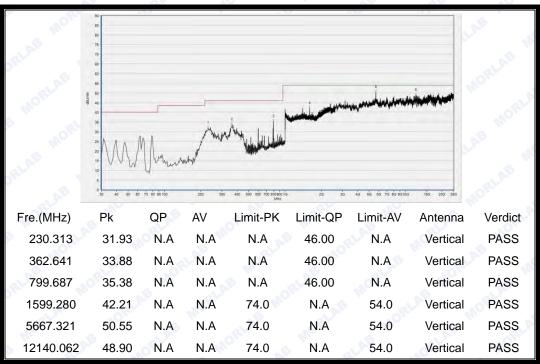


(Antenna Vertical, 30MHz to 25GHz)


ANT 2:

B. Test Plots for the Whole Measurement Frequency Range:



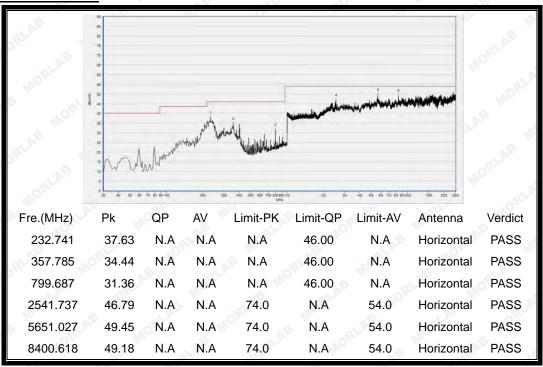


(Antenna Horizontal, 30MHz to 25GHz)

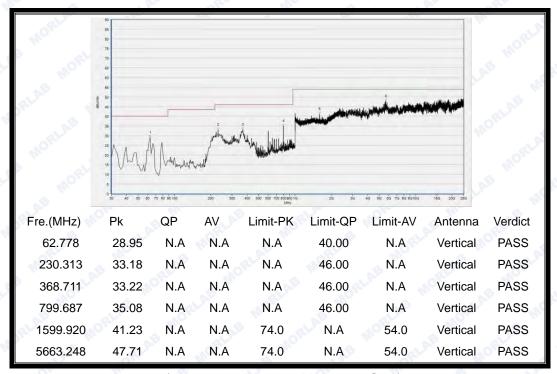


(Antenna Vertical, 30MHz to 25GHz)



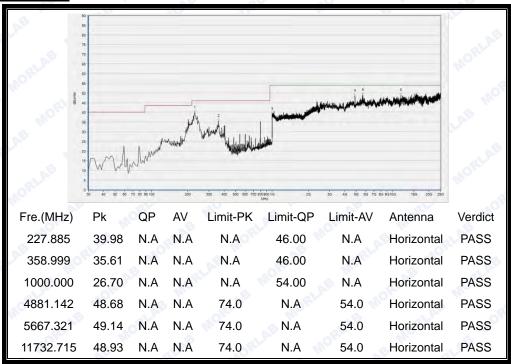

(Antenna Horizontal, 30MHz to 25GHz)

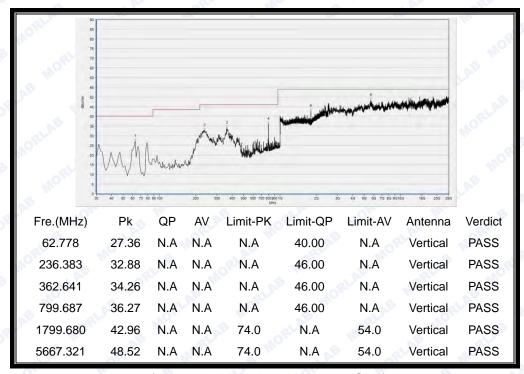


(Antenna Vertical, 30MHz to 25GHz)





(Antenna Horizontal, 30MHz to 25GHz)

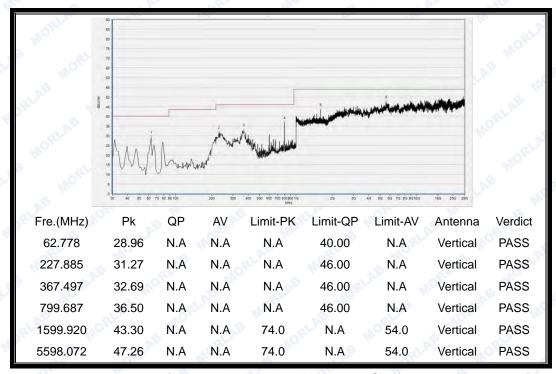

(Antenna Vertical, 30MHz to 25GHz)




2.7.3.3 802.11n-20MHz Test mode

ANT 1:


A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

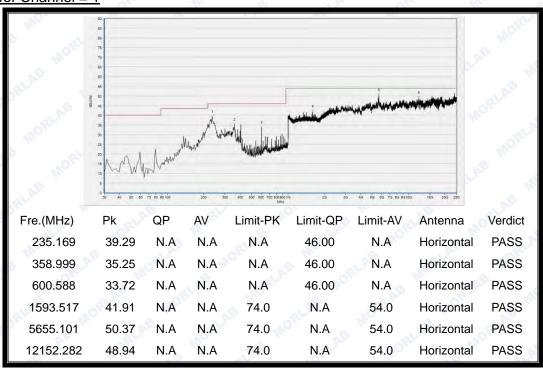


(Antenna Horizontal, 30MHz to 25GHz)



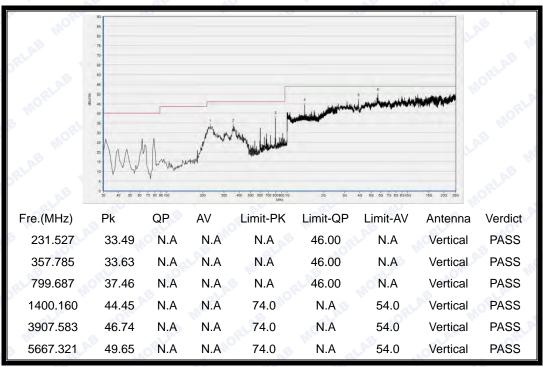


(Antenna Vertical, 30MHz to 25GHz)

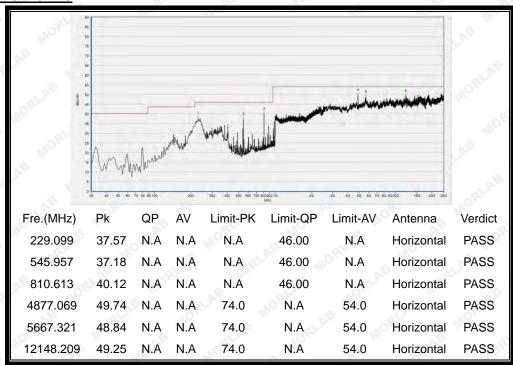


(Antenna Horizontal, 30MHz to 25GHz)



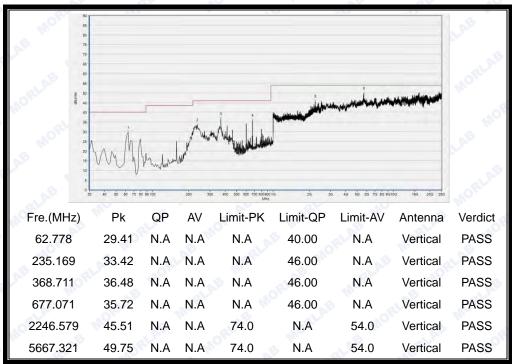


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

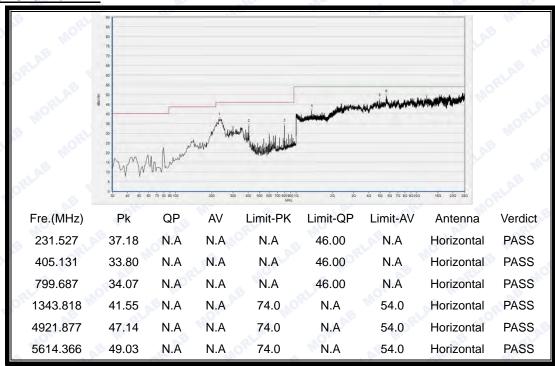

(Antenna Horizontal, 30MHz to 25GHz)



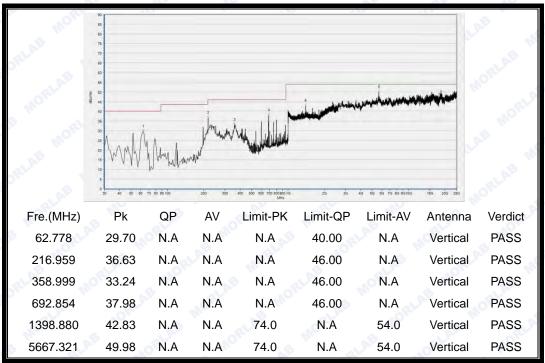


(Antenna Vertical, 30MHz to 25GHz)

ANT 2:


B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

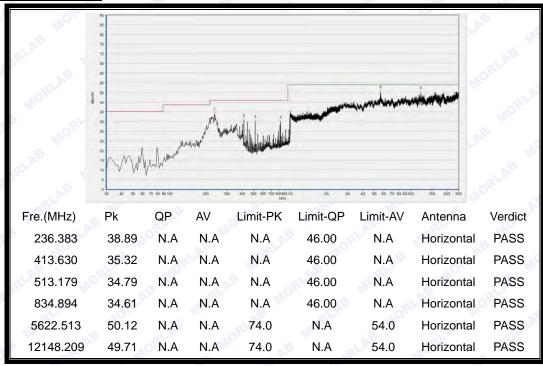


(Antenna Horizontal, 30MHz to 25GHz)



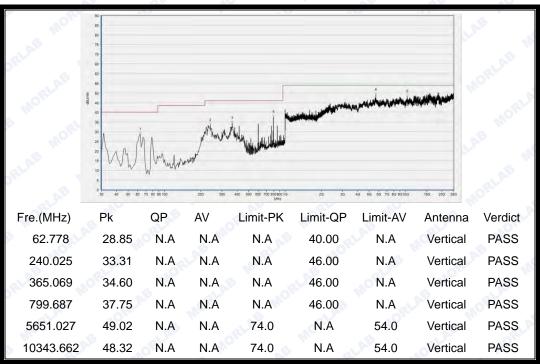


(Antenna Vertical, 30MHz to 25GHz)

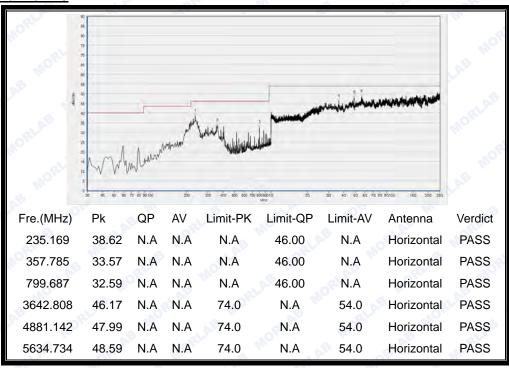


(Antenna Horizontal, 30MHz to 25GHz)



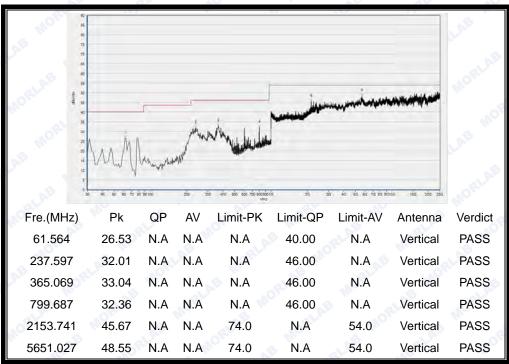


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

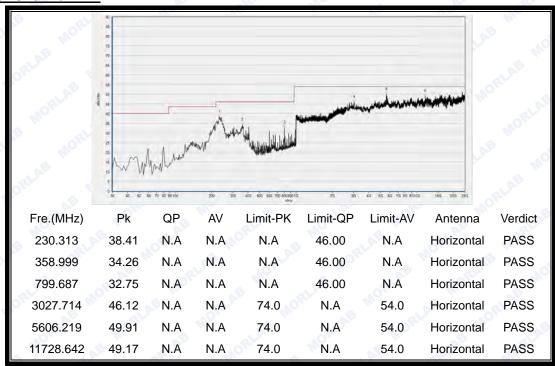

(Antenna Horizontal, 30MHz to 25GHz)



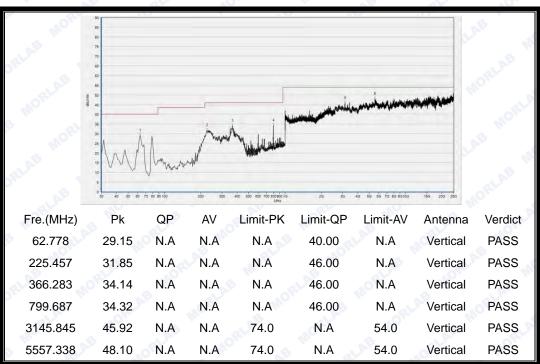

(Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang
	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10,2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty(dB) 2.44	
Conducted emissions	9KHz~30MHz		
RLAD MORL	9KHz~30MHz	2.44	
HO! AE IN TLAE	30MHz~200MHz	2.93	
Radiated emissions	200MHz~1000MHz	2.95	
AE N. GLAE TORY	1GHz~18GHz	2.26	
ORLE MORE OF IN	18GHz~40GHz	1.94	



This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Cond	ducted Test Equipme	nt contact				NORL MI
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.03.28	2016.03.27
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2015.03.28	2016.03.27
3	EXA Signal Analzyer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Cond	lucted Emission Tes	ORLA	Mor			
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
1,110	Receiver	595WX11007	PMM9010	Narda S.T.S/PMM	2015.05.07	2016.05.06
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.06.18	2016.06.17
3	Pulse Limiter	9391	VTSD	Schwarzbeck	2015.05.07	2016.05.06
ORLA	(20dB)	A.A.B	9561-D	a me a	ORLAN	
4	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

RLA	Auxiliary Test Equipment								
No.	No. Equipment Name Serial No. Type Manufacturer Cal.Date Cal.Due Da								
1,08	Computer	N.A	N.A	Asus	N.A	N.A			



1.5.4 Radiated Test Equipments

Radiated Test Equipments								
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal.Due Date		
1	System Simulator	GB4536084 6	8960-E5515 C	Agilent	2015.05.07	2016.05.06		
2	Receiver	MY5413001 6	N9038A	Agilent	2015.05.07	2016.05.06		
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2015.05.14	2016.05.13		
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2015.03.31	2016.03.30		
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2015.02.26	2016.02.25		
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25		
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A		
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A		
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2015.02.26	2016.02.25		
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2015.02.26	2016.02.25		

1.5.5 Climate Chamber

Clima	ate Chamber	ALAB M	Per.	0.	GLAB MORL	MO,
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal.Date	Cal.Due Date
1/10	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

1.5.6 Vibration Table

Vibra	ntion Table	ALAE AC	IRI.	- P	LAB TORLE	MOL
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000- S015L	СМІ-СОМ	2015.02.26	2016.02.25

1.5.7 Anechoic Chamber

Anechoic Chamber		Oke. But	LAB	ORLAS MOR	S IIIC	LAE OFLA
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2015.05.14	2016.05.13

***** END OF REPORT *****