

#01_GSM850_GPRS (1 Tx slot)_Back_0cm_Ch251

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL850_140421 Medium parameters used: $f = 849$ MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.62, 8.62, 8.62); Calibrated: 10/15/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch251/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.856 W/kg


Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.096 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.804 W/kg

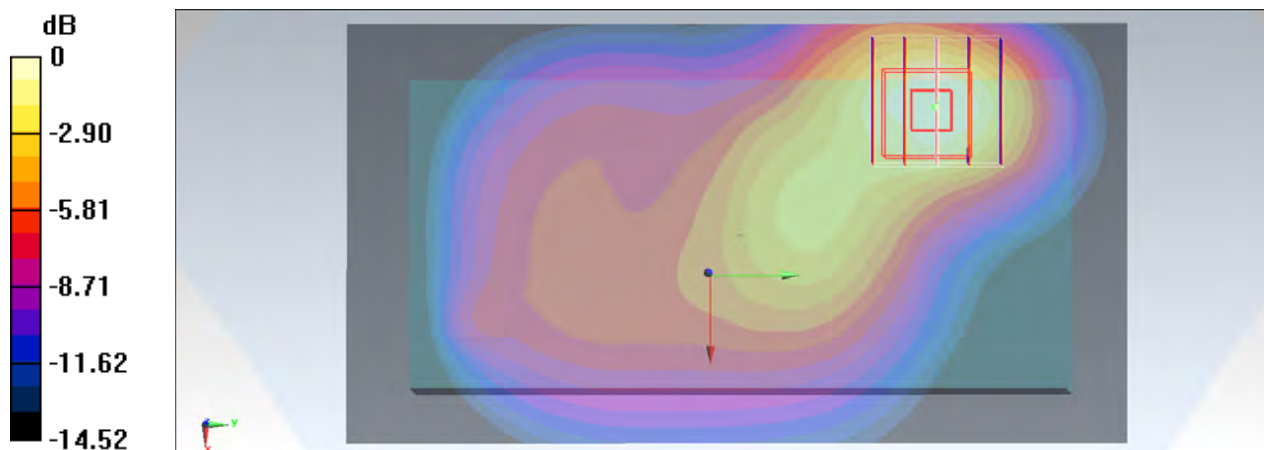

0 dB = 0.804 W/kg = -0.95 dBW/kg

#02_GSM1900_GPRS (2 Tx slots)_Front_0cm_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: MSL1900_140420 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.549$ S/m; $\epsilon_r = 52.581$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.19, 7.19, 7.19); Calibrated: 10/15/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch810/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.515 W/kg


Configuration/Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.157 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.548 W/kg

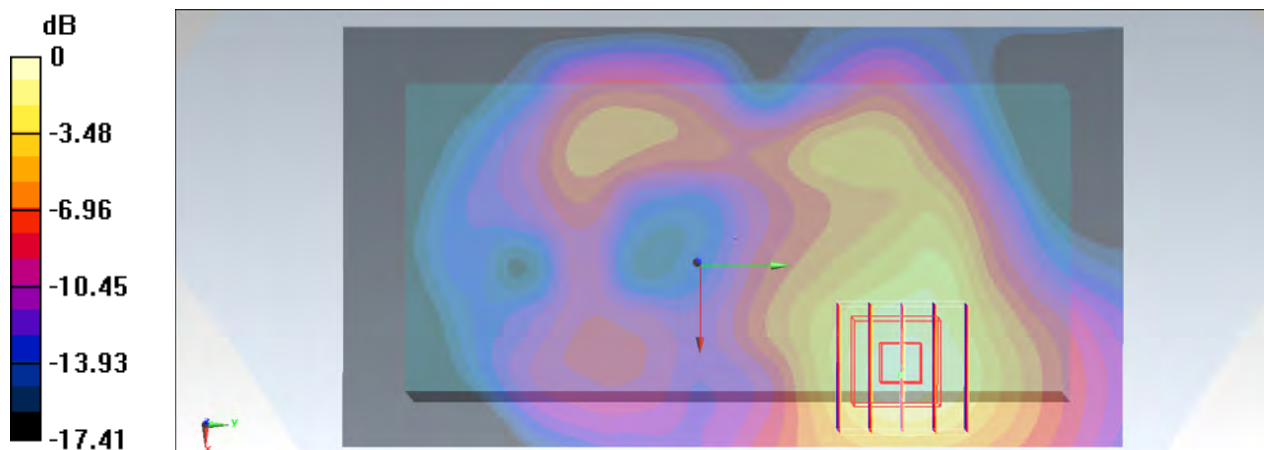

#03_WCDMA V_RMC 12.2Kbps_Back_0cm_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL850_140421 Medium parameters used: $f = 847$ MHz; $\sigma = 0.995$ S/m; $\epsilon_r = 54.829$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(8.62, 8.62, 8.62); Calibrated: 10/15/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch4233/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.25 W/kg


Configuration/Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.162 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

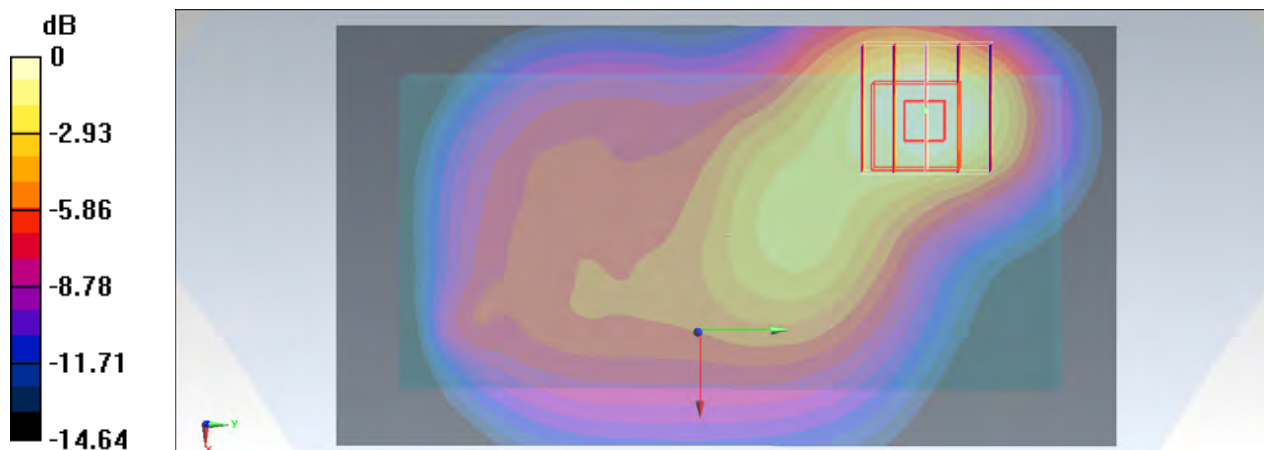

0 dB = 1.12 W/kg = 0.49 dBW/kg

#04_WCDMA II_RMC 12.2Kbps_Front_0cm_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL1900_140420 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.546$ S/m; $\epsilon_r = 52.589$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(7.19, 7.19, 7.19); Calibrated: 10/15/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch9538/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.675 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.439 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

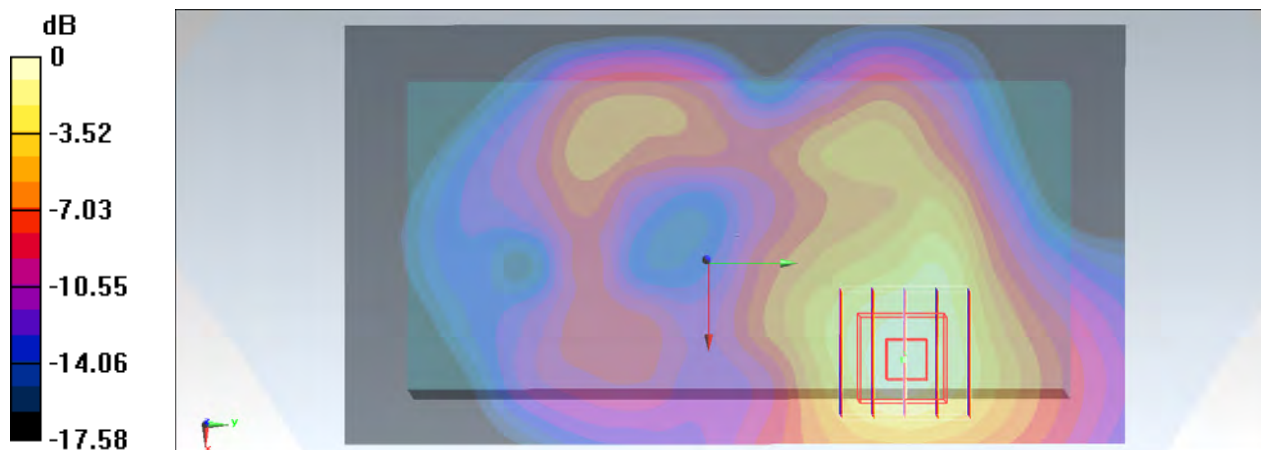

0 dB = 1.05 W/kg = 0.21 dBW/kg

#05_WLAN2.4GHz_802.11b 1Mbps_Back_0cm_Ch11

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL2450_140422 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 51.774$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(6.76, 6.76, 6.76); Calibrated: 10/15/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch11/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.777 W/kg


Configuration/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.565 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 0.747 W/kg

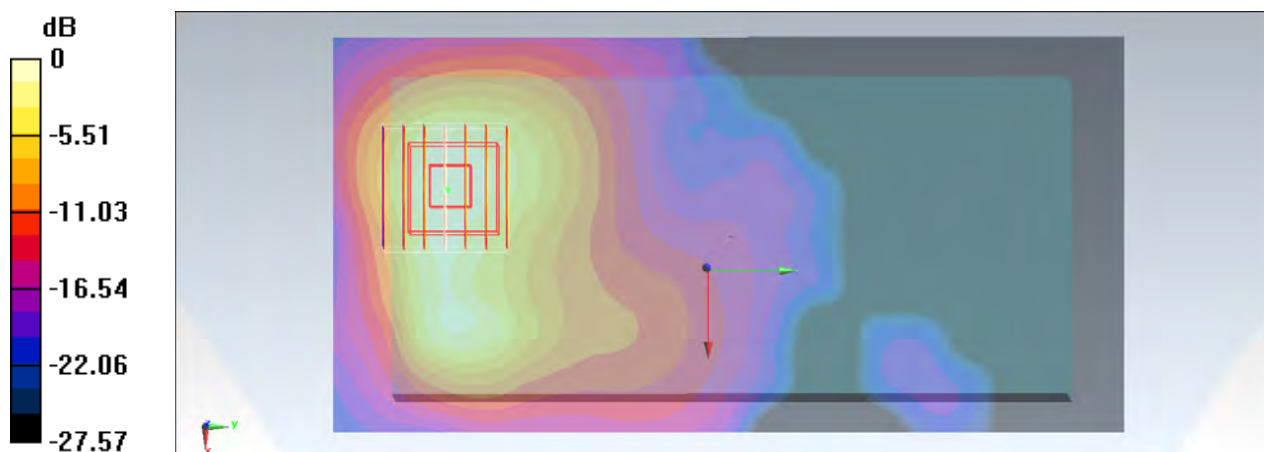

#06_WLAN5GHz_802.11n-HT20 MCS0_Back_0cm_Ch157

Communication System: 802.11n; Frequency: 5785 MHz; Duty Cycle: 1:1.027

Medium: MSL5G_140423 Medium parameters used: $f = 5785$ MHz; $\sigma = 6.103$ S/m; $\epsilon_r = 47.329$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.13, 4.13, 4.13); Calibrated: 10/15/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch157/Area Scan (91x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.28 W/kg


Configuration/Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.082 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

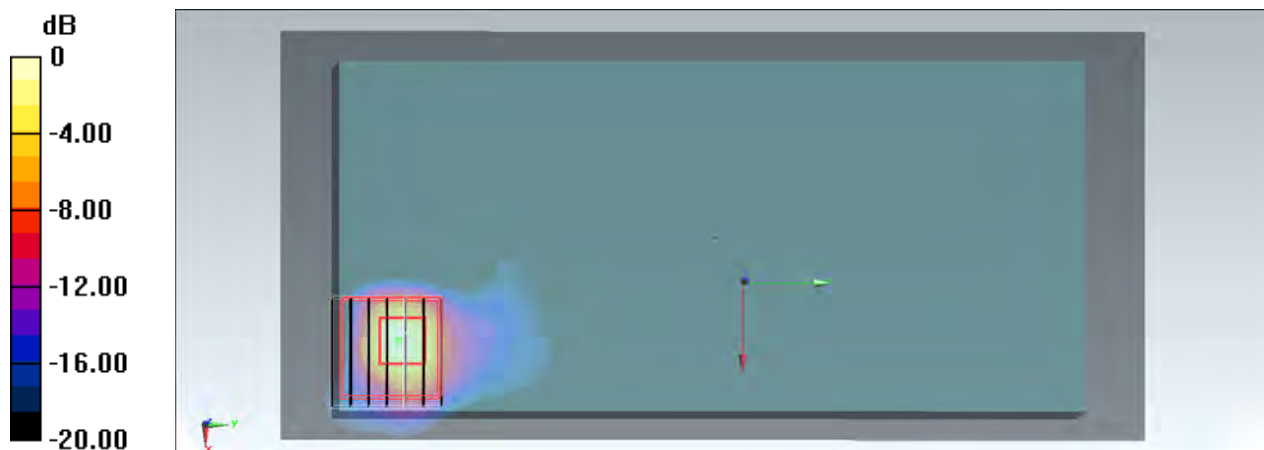

#07_WLAN5GHz_802.11n-HT20 MCS0_Back_0cm_Ch36

Communication System: 802.11n; Frequency: 5180 MHz; Duty Cycle: 1:1.027

Medium: MSL5G_140423 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 48.328$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.31, 4.31, 4.31); Calibrated: 10/15/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch36/Area Scan (91x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.674 W/kg


Configuration/Ch36/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.610 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

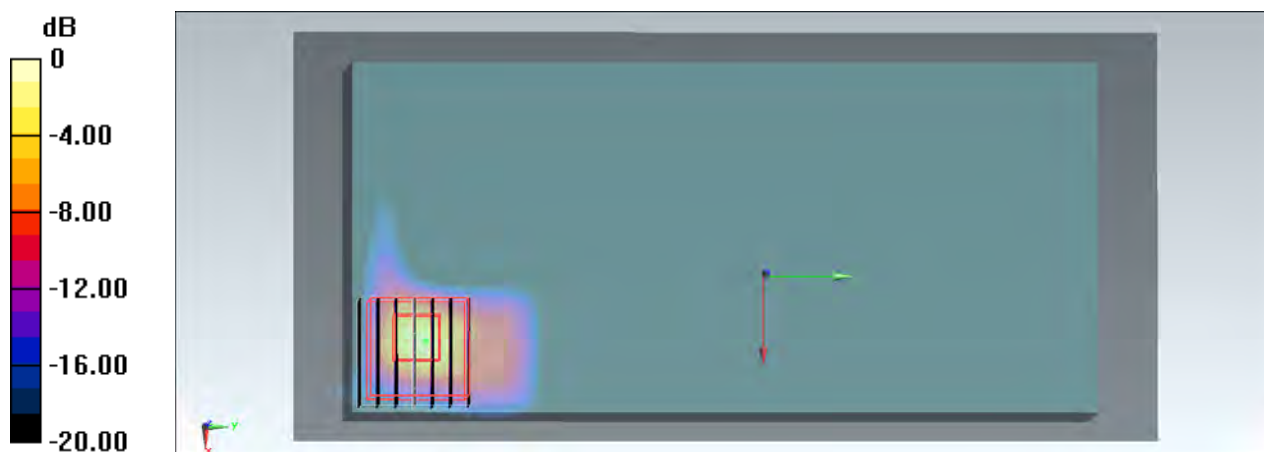

0 dB = 1.11 W/kg = 0.45 dBW/kg

#08_WLAN5GHz_802.11a 6Mbps_Back_0cm_Ch60

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.022

Medium: MSL5G_140423 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.476$ S/m; $\epsilon_r = 48.127$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.09, 4.09, 4.09); Calibrated: 10/15/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch60/Area Scan (91x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.560 W/kg


Configuration/Ch60/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.252 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.313 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.908 W/kg

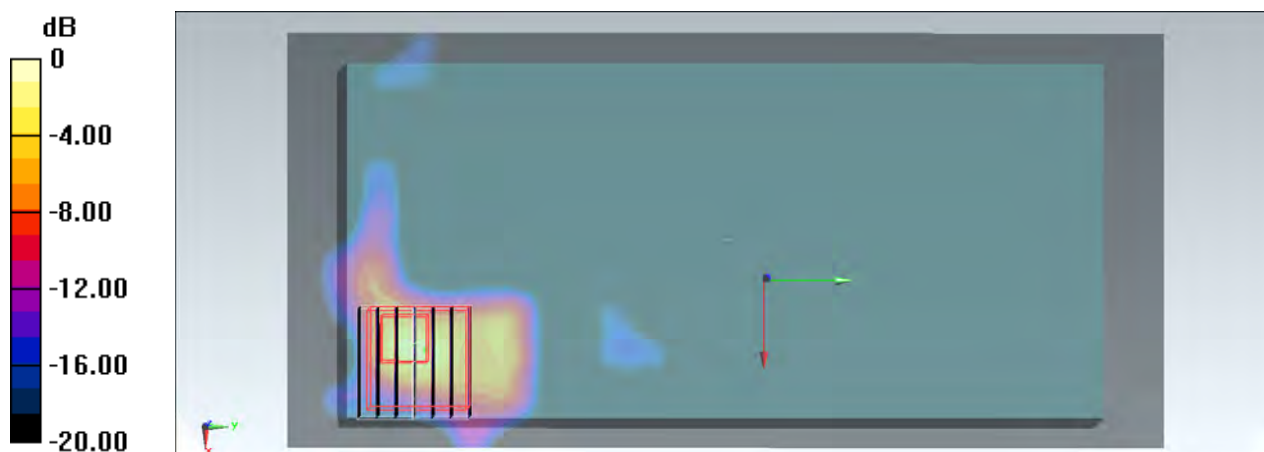

#09_WLAN5GHz_802.11a 6Mbps_Back_0cm_Ch136

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1.022

Medium: MSL5G_140423 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.959$ S/m; $\epsilon_r = 47.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.95, 3.95, 3.95); Calibrated: 10/15/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1388; Calibrated: 10/30/2013
- Phantom: SAM-R; Type: SAM; Serial: 1795
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Ch136/Area Scan (91x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

Configuration/Ch136/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.046 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

