



## **VERIFICATION TEST REPORT**

**FCC Part 22, 24, 27  
IC RSS 130, 132, 133, 139**

**Report No.: LYFT15-U13 Rev A (LTE)**

**Company:** Lyft, Inc.

**Model:** BIT041N

## VERIFICATION TEST REPORT

**Company:** Lyft, Inc.

**Model:** BIT041N

**Standard(s):** FCC Part 22, 24, 27 & ISSED RSS 130, 132, 133, 139

**Test Report Serial No.:** LYFT15-U13 Draft

This report supersedes: NONE

Applicant: Lyft, Inc  
185 Berry St #5000  
San Francisco, California 94107  
USA

Issue Date: 15th August 2022

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

<b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>4</b>
1.1. TESTING ACCREDITATION .....	4
1.2. RECOGNITION .....	5
1.3. PRODUCT CERTIFICATION .....	6
<b>2. DOCUMENT HISTORY .....</b>	<b>7</b>
<b>3. TEST RESULT CERTIFICATE .....</b>	<b>8</b>
<b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
4.1. Normative References .....	9
4.2. Test and Uncertainty Procedure .....	10
<b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>11</b>
5.1. Technical Details .....	11
5.2. Scope Of Test Program .....	12
5.3. Equipment Model(s) and Serial Number(s) .....	13
5.4. External A.C/D.C. Power Adaptor .....	13
5.5. Antenna Details .....	13
5.6. Cabling and I/O Ports .....	13
5.7. Test Configurations .....	14
5.8. Equipment Modifications .....	14
5.9. Deviations from the Test Standard .....	14
<b>6. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>15</b>
6.1. Conducted RF .....	15
6.2. Radiated Emissions - 3m Chamber .....	17
<b>7. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>20</b>
<b>8. TEST SUMMARY .....</b>	<b>21</b>
<b>9. TEST RESULTS .....</b>	<b>22</b>
9.1. Radiated Output Power .....	22
<i>Band 2: Effective Radiated Power .....</i>	<i>23</i>
<i>Band 4: Effective Radiated Power .....</i>	<i>24</i>
<i>Band 12: Effective Radiated Power .....</i>	<i>25</i>
9.2. Radiated Transmitter Emissions .....	26
<i>Band 2: Radiated Transmitter Emissions .....</i>	<i>28</i>
<i>Band 4: Radiated Transmitter Emissions .....</i>	<i>34</i>
<i>Band 12: Radiated Transmitter Emissions .....</i>	<i>40</i>

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



### Accredited Laboratory

A2LA has accredited

**MICOM LABS**

Pleasanton, CA

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 14<sup>th</sup> day of January 2022.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

## 1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC)			
	Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

MRA Phase II – recognition for both product testing and certification



### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



## Accredited Product Certification Body

A2LA has accredited

**MiCOM LABS**

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This product certification body also meets the A2LA R322 – *Specific Requirements – Notified Body Accreditation Requirements* and A2LA R308 - *Specific Requirements – ISO-IEC 17065 - Telecommunication Certification Body Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 14<sup>th</sup> day of January 2022



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2023

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
UK – Approved Body (AB), AB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	11 <sup>th</sup> August 2022	Draft verification report for client review.
Rev A	15 <sup>th</sup> August 2022	Initial Release

In the above table the latest report revision will replace all earlier versions.

### 3. TEST RESULT CERTIFICATE

<b>Manufacturer:</b> Lyft, Inc 185 Berry St #5000 San Francisco California 94107 USA	<b>Tested By:</b> MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
<b>Model:</b> BIT041N	<b>Telephone:</b> +1 925 462 0304
<b>Equipment Type:</b> E-Bike Location and Communication Module	<b>Fax:</b> +1 925 462 0306
<b>S/N's:</b> 65-0000029-A	
<b>Test Date(s):</b> 10 <sup>th</sup> August 2022	<b>Website:</b> www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC Part 22, 24, 27 & ISSED RSS 130, 132, 133, 139 199	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

#### Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	A2LA	October 2019	R105 - Requirement's When Making Reference to A2LA Accreditation Status
II	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
III	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
IV	KDB 412172 D01	August 7, 2015	EIRP and ERP are similarly defined as the product of the power supplied to the antenna and the antenna gain. The primary difference is that for ERP the antenna gain is expressed relative to an ideal half-wave dipole antenna, whereas with EIRP the antenna gain is expressed relative to an ideal (theoretical) isotropic antenna. EIRP and ERP can be expressed mathematically as described in the following sections. <sup>1</sup>
V	RSS-130 Issue 2	February 2019	RSS-130 Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz
VI	RSS-132 Issue 3	January 2013	RSS-132 Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
VII	RSS-133 Issue 6, Amendment 1	January 2018	RSS-133 2GHz Personal Communications Services. This Radio Standards Specification (RSS) sets out the requirements for certification of transmitters and receivers used in radio communications systems to provide Personal Communications Services (PCS) in the bands 1850-1915 MHz and 1930-1995 MHz.
VIII	RSS-139 Issue 3	July 2015	RSS-139 Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz
IX	FCC Part 22H	April 8, 2021	Subpart H – Cellular Radio Telephone Service: The rules in this subpart govern the licensing and operation of cellular radiotelephone systems. (a) Block A: 824-835 MHz and 845-846.5 MHz (b) Block B: 835-845 MHz and 846.5-849 MHz
X	FCC Part 24E	April 8, 2021	Subpart E—Broadband PCS; (c) This subpart sets out the regulations licensing and operations of personal communications services authorized in the 1850-1910 and 1930-1990 MHz bands.
XI	FCC Part 27C, H	April 8, 2021	Miscellaneous Wireless Communications Services This part .. for the provision of wireless communications services in the following bands. (2) 746-758 MHz, 775-788 MHz, and 805-806 MHz. (3) 698-746 MHz, 1710-1755 MHz

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

Details	Description
Purpose:	Test of the Lyft, Inc. BIT041N to requirements of FCC Part 22, 24E, 27C & ISSED RSS-130, 132, 133, 199
Applicant:	Lyft, Inc 185 Berry St #5000 San Francisco, California 94107, USA
Manufacturer:	Same as Applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566, USA
Test report reference number:	LYFT15-U13
Date EUT received:	4 <sup>th</sup> August 2022
Standard(s) applied:	FCC Part 22, 24E, 27C & ISSED RSS-130, 132, 133, 199
Dates of test (from - to):	3 <sup>rd</sup> – 4 <sup>th</sup> & 8 <sup>th</sup> August 2022
No of Units Tested:	1
Type Of Equipment:	E-Bike Location and Control Unit
Model(s):	BIT041N
Equipment Secondary Function(s):	None
Type of Technology:	E-Bike Location and Control Unit
Installation type:	Mobile installation
Construction/Location for Use:	Outdoor
Declared Frequency Range(s):	LTE: B2/B4/B12
Type of Modulation:	QPSK, 64QAM, 256QAM
Declared Nominal Output Power (dBm):	23
Transmit/Receive Operation:	Transceiver
Rated Input Voltage and Current:	50.4VDC / 1A Battery
Operating Temperature Range:	-20°C to +50°C
Equipment Dimensions:	15.75cm x 8.8cm x 5.5cm
Weight:	360 grams
Hardware Rev:	88-0000779-A
Software Rev:	16b00bc1d102c

## **5.2. Scope Of Test Program**

### **Lyft, Inc. BIT041N**

The scope of the test program was a verification test of the Lyft, Inc. BIT041N configurations with the pre-certified LTE Module in the specified frequency bands for compliance against the following IMT Cellular Network specifications:

#### **FCC Part 22 Subpart H – Cellular Radio Telephone Service**

The rules in this subpart govern the licensing and operation of cellular radiotelephone systems.

- (a) Block A: 824-835 MHz and 845-846.5 MHz
- (b) Block B: 835-845 MHz and 846.5-849 MHz

#### **FCC Part 24 Subpart E – Broadband PCS**

This subpart sets out the regulations governing the licensing and operations of personal communications services authorized in the 1850-1910 and 1930-1990 MHz bands.

#### **FCC Part 27 - Miscellaneous Wireless Communications Services**

This part states the conditions under which spectrum is made available and licensed for the provision of wireless communications services in the following bands... 746-758 MHz, 775-788 MHz, and 805-806 MHz, 698-746 MHz. 1710 - 1755 MHz

#### **Industry Canada RSS-130 Issue 2**

This Radio Standards Specification (RSS) sets out the requirements for equipment operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz bands.

#### **Industry Canada RSS-132 Issue 3**

RSS-132 Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz

#### **Industry Canada RSS-133 Issue 6**

RSS-133 2 GHz Personal Communications Services sets out the requirements for certification of transmitters and receivers used in radio communications systems to provide Personal Communications Services (PCS) in the bands 1850-1915 MHz and 1930-1995 MHz.

#### **Industry Canada RSS-139 Issue 3**

RSS-139 Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz

**Note:** The EUT is a pre-certified module incorporated in a host with antennas. This report is a verification report of the pre-certified module in the host. For full testing of the module tested by; TA Technology (Shanghai) Co., LTD. refer to Test Reports numbers:

R1805A0226-R1V3 EC21-A FCC Part 22 Dated June 12, 2018  
R1805A0226-R2V3 EC21-A FCC Part 24 Dated June 12, 2018  
R1805A0226-R3V2 EC21-A FCC Part 27 Dated June 12, 2018

R1805A0226-R4V2 EC21-A IC RSS-132 Dated June 11, 2018  
R1805A0226-R5V2 EC21-A IC RSS-133 Dated June 11, 2018  
R1805A0226-R6V2 EC21-A IC RSS-130 RSS-139 Dated June 11, 2018

### 5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr.	Model No.	Serial No.
EUT	E-Bike Location and Communication Module	Lyft Inc	BIT04IN	65-0000029-A

### 5.4. External A.C/D.C. Power Adaptor

The BIT040B is powered via 48V Battery, no external ac/dc adaptor is used.

### 5.5. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	Quectel	YC0002AA	Chip	-1.50	-	360		690
				0.34				820
				1.68				960
				2.46				1710
				2.94				1990
				2.32				2170
				2.98				2300
				2.51				2580
				2.56				2680
BF Gain - Beamforming Gain Dir BW - Directional BeamWidth X-Pol - Cross Polarization								

### 5.6. Cabling and I/O Ports

Port Type	Max Cable Length	Conn Type	Environment
Discrete I/O	<3m	Higo L810 CG	End-User
Analog	<3m	Higo L309 CM	End-User
Analog	<3m	Higo L609 CM	End-User
CAN+DC IN	<3m	Higo L409 CG	End-User
Power + Digital I/O	<3m	Higo L509 CM	End-User



## 5.7. Test Configurations

Test configurations are as noted in the test results.

LTE Band No.	Bandwidth (MHz)	Channels No.'s	Frequencies (MHz)
2	1.4	18607, 18900, 19193	1850.7, 1880.0, 1909.3
4	1.4	19957, 20175, 20393	1710.7, 1732.0, 1754.3
12	1.4	23017, 23095, 23173	699.7, 707.5, 715.3

## 5.8. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE


## 5.9. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST EQUIPMENT CONFIGURATION(S)

### 6.1. Conducted RF

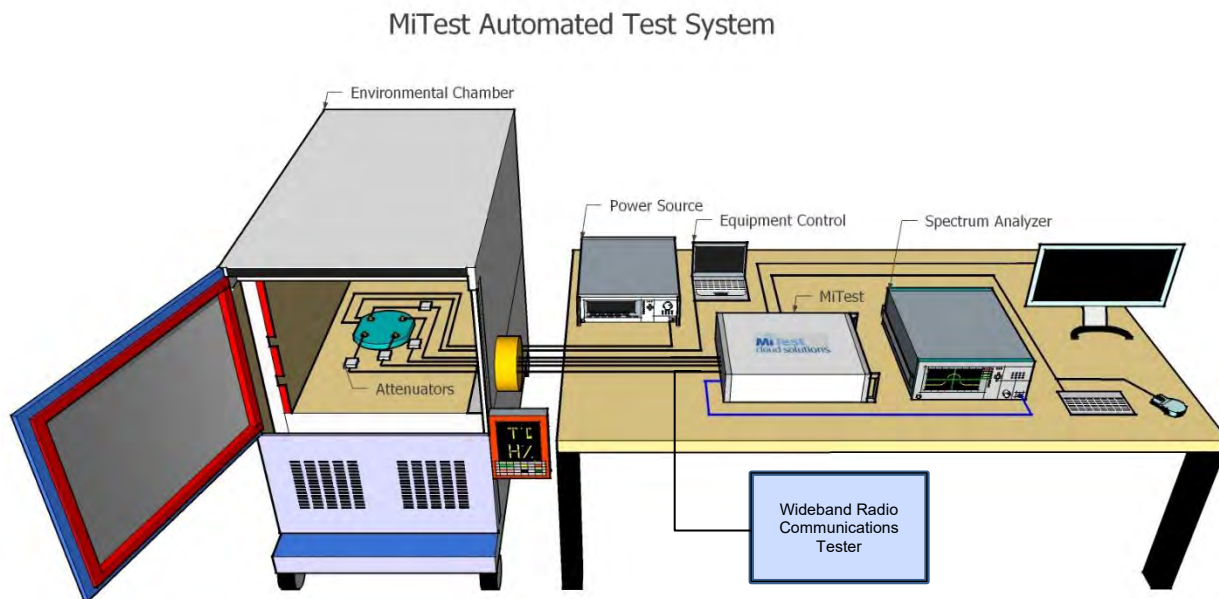


A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	7 Oct 2022
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	7 Oct 2022
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	7 Oct 2022
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	7 Oct 2022
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	7 Oct 2022
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	30 Oct 2022
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
441	USB Wideband Power Sensor	Boonton	55006	9179	20 Sep 2022
442	USB Wideband Power Sensor	Boonton	55006	9181	19 Oct 2022
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2023
493	USB Wideband Power Sensor	Boonton	55006	9634	8 Oct 2022
494	USB Wideband Power Sensor	Boonton	55006	9726	19 Oct 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen with DFS	512	29 Jun 2023
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Feb 2023


## 6.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below.  
Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

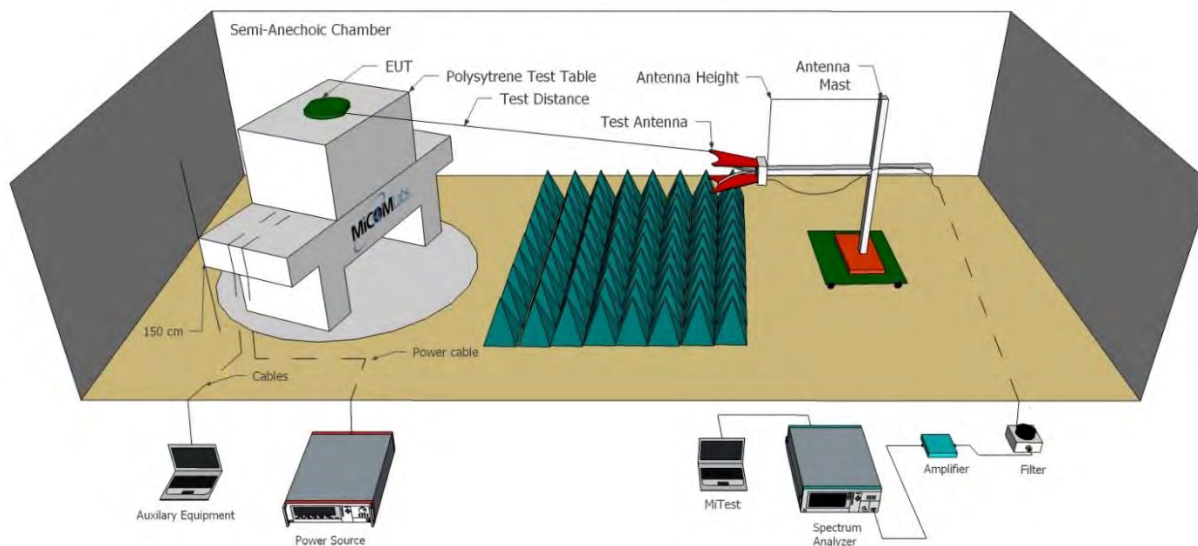

Radiated Emissions Below 1GHz Test Setup

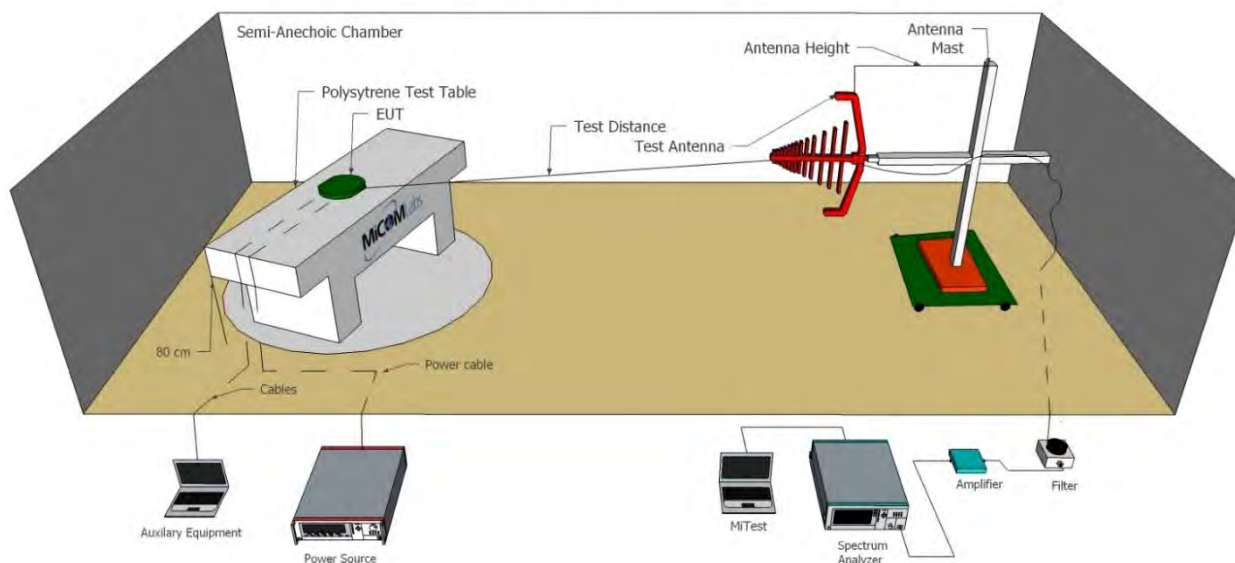



### Test Equipment Utilized

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	8 Oct 2022
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	24 Sep 2022
301	5470 to 5725 MHz Notch Filter	Microtronics	RBC50704	001	6 Oct 2022
302	5150 to 5350 MHz Notch Filter	Microtronics	BRC50703	002	6 Oct 2022
303	5725 to 5875 MHz Notch filter	Microtronics	BRC50705	003	6 Oct 2022
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	29 Nov 2022
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	29 Sep 2023
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	6 Oct 2022
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2022
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2022
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	30 Sep 2023
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2022
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	27 Oct 2022
463	Schwarzbeck cable from	Schwarzbeck	AK 9513	463	27 Oct 2022



	Amplifier to Bulkhead.				
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	27 Oct 2022
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	6 Oct 2022
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	6 Oct 2022
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2023
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	6 Oct 2022
555	Rhode & Schwarz Receiver (Firmware Version : 2.00 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2023
CC05	Confidence Check	MiCOM	CC05	None	27 Feb 2023

## 7. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 8. TEST SUMMARY

Test Header	Result	Data Link
<b>Transmitter Test Parameters</b>		
EIRP Emissions	Complies	<a href="#">View Data</a>
Transmitter Spurious Emissions	Complies	<a href="#">View Data</a>

**Note:** The EUT is a pre-certified module incorporated in a host with antennas. This report is a verification report of the pre-certified module in the host. For full testing of the module tested by; TA Technology (Shanghai) Co., LTD. refer to Test Reports numbers:

R1805A0226-R1V3 EC21-A FCC Part 22 Dated June 12, 2018  
R1805A0226-R2V3 EC21-A FCC Part 24 Dated June 12, 2018  
R1805A0226-R3V2 EC21-A FCC Part 27 Dated June 12, 2018

R1805A0226-R4V2 EC21-A IC RSS-132 Dated June 11, 2018  
R1805A0226-R5V2 EC21-A IC RSS-133 Dated June 11, 2018  
R1805A0226-R6V2 EC21-A IC RSS-130 RSS-139 Dated June 11, 2018

## 9. TEST RESULTS

### 9.1. Radiated Output Power

Radiated Test Conditions for Output Power			
<b>Standard:</b>	FCC Part 22, 24E, 27C, H IC RSS-130, 132, 133, 139	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	EIRP	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	FCC 22, FCC 24E: 24.232 (d) FCC 27C: 27.50 (b), (d) RSS-130: 4.6, RSS-132:5.4, RSS-133: 6.4, RSS-139: 6.5	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Output Power

With reference to the test configuration identified in Section 6.1 Radiated Test Setup the EUT was set to transmit on the appropriate centre frequency of the selected frequency band and bandwidth. Output Power was measured on each of the active chain(s) (antenna outputs) using a power sensor connected to each antenna terminal.

Testing was performed under ambient conditions.

#### Limits Output Power - Band 2:

##### FCC 24E: §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

##### RSS-133: 6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power:

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

#### Limits Output Power - Band 4,12,13:

##### FCC 27.50

(b) (10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

##### RSS-130: 4.6 Transmitter Output Power and Effective Radiated Power:

For base and fixed equipment other than fixed subscriber equipment, refer to SRSP-518 for the e.i.r.p. limits.

##### RSS-139: 6.6 Transmitter Output Power and Effective Radiated Power:

The equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed one watt.

#### Limits Output Power - Band 5:

**FCC 22.913:** (5): The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

##### RSS-132: 5.4: Transmitter Output Power and Effective Radiated Power:

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts. Refer to SRSP-503 for base station e.i.r.p. limits.

## Band 2: Effective Radiated Power

### Equipment Configuration for Average Output Power

<b>Variant:</b>	Band 2	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Full RB	<b>Antenna Gain (dBi):</b>	2.94
<b>Modulation:</b>	QPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
1850.7	21.31	--	--	--	24.25	33.00	-8.75	Max
1880.0	21.29	--	--	--	24.23	33.00	-8.77	Max
1909.3	21.32	--	--	--	24.26	33.00	-8.74	Max

### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB



#### Band 4: Effective Radiated Power

##### Equipment Configuration for Average Output Power

<b>Variant:</b>	Band 4	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Full RB	<b>Antenna Gain (dBi):</b>	2.46
<b>Modulation:</b>	QPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

##### Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power EIRP	EIRP Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
1710.7	21.28	--	--	--	23.74	30.00	-6.26	Max
1732.0	21.29	--	--	--	23.75	30.00	-6.25	Max
1754.3	21.22	--	--	--	23.68	30.00	-6.32	Max

##### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

## Band 12: Effective Radiated Power

### Equipment Configuration for Average Output Power

<b>Variant:</b>	Band 12	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	Full RB	<b>Antenna Gain (dBi):</b>	-1.5
<b>Modulation:</b>	QPSK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

### Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power ERP	ERP Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
699.7	22.20	--	--	--	18.56	34.77	-16.21	Max
707.5	22.31	--	--	--	18.67	34.77	-16.10	Max
715.3	22.17	--	--	--	18.53	34.77	-16.24	Max

### Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

## 9.2. Radiated Transmitter Emissions

Radiated Test Conditions for Transmitter Spurious Emissions			
<b>Standard:</b>	FCC Part 22, 24E, 27C, IC RSS-130, 132, 133, 139	<b>Ambient Temp. (°C):</b>	20.0 - 24.5
<b>Test Heading:</b>	Out of Band Emissions	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	FCC 22:917(a), FCC 24E: 238(a) FCC 27C, H: 27.53 (c), (g) RSS-130: 4.7.1 RSS-132:5.5, RSS-133: 6.5, RSS-139: 6.5	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Out of Band Emissions

With reference to the test configuration identified in Section 6.1 Radiated Test Setup the EUT was set to transmit on the appropriate center frequency of the selected frequency band and bandwidth. Out of Band emissions was tested under QPSK.

Testing was performed under ambient conditions.

### Limits Out of Band Emissions

#### Band 2:

##### FCC 24E: §24.238 Emission limitations for Broadband PCS equipment.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**RSS-133: 6.5 (i)** In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p(\text{watts})$ . 2 GHz Personal Communications Services RSS-133 4

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p(\text{watts})$ . If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### Band 4, 12,13:

##### FCC 27C: §27.53 Emission limits for Miscellaneous Wireless Communications Services.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

**(h) AWS emission limits—(1) General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

**RSS-130: 4.7.1** The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$  (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

**RSS-139: 6.6** Transmitter Unwanted Emissions

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block,<sup>2</sup> which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least  $43 + 10 \log_{10} p$  (watts) dB.

(ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least  $43 + 10 \log_{10} p$  (watts) dB.

**Band 5:**

**FCC 22H: 917(a)** *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**RSS-132: 5.5** Transmitter Unwanted Emissions

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

## Band 2: Radiated Transmitter Emissions

**FCC 27.53 h: AWS emission limits—(1) General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.. ~ -13 dBm or 82.23 dBuV/m

### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz


<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1850.70	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



FCC Spurious 30 MHz to 1 GHz

Antenna: Integral

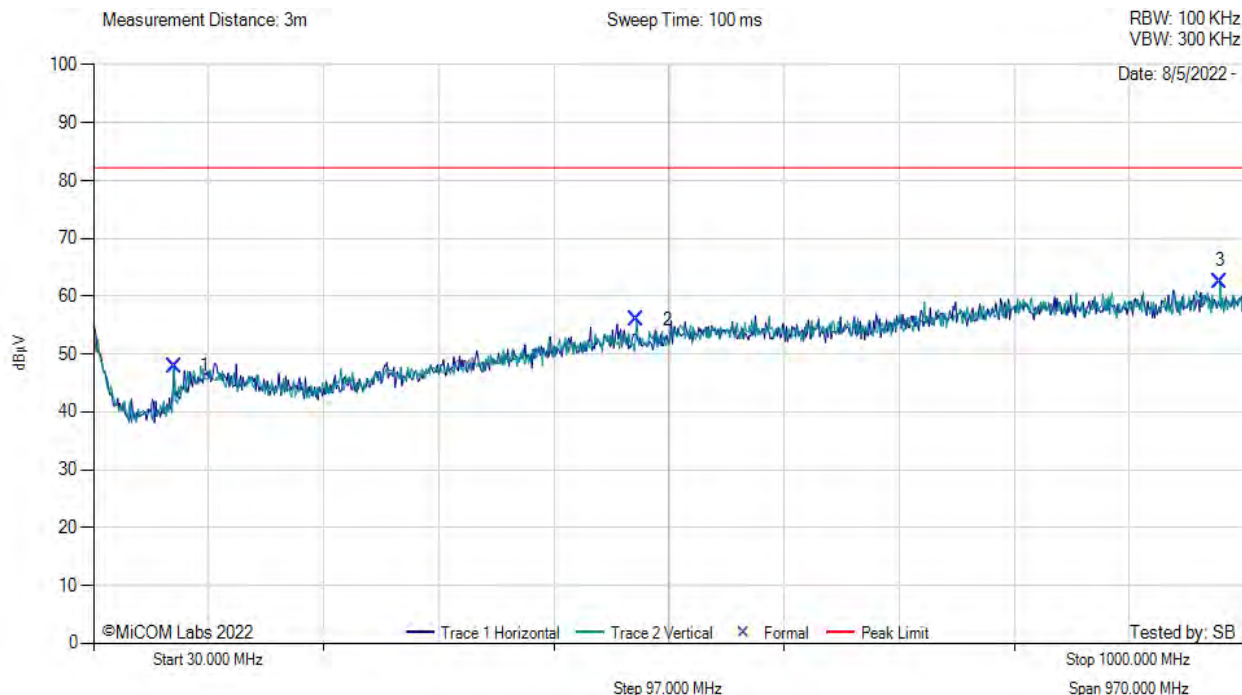

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBuV	Cable Loss dB	AF dB/m	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	97.90	28.05	4.08	15.78	47.91	MaxP	Vertical	151	299	82.2	-34.3	Pass
2	487.84	27.00	5.64	23.32	55.97	MaxP	Vertical	151	179	82.2	-26.3	Pass
3	979.63	27.16	7.21	28.16	62.53	MaxP	Vertical	151	179	82.2	-19.7	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1880.00	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 30 MHz to 1 GHz

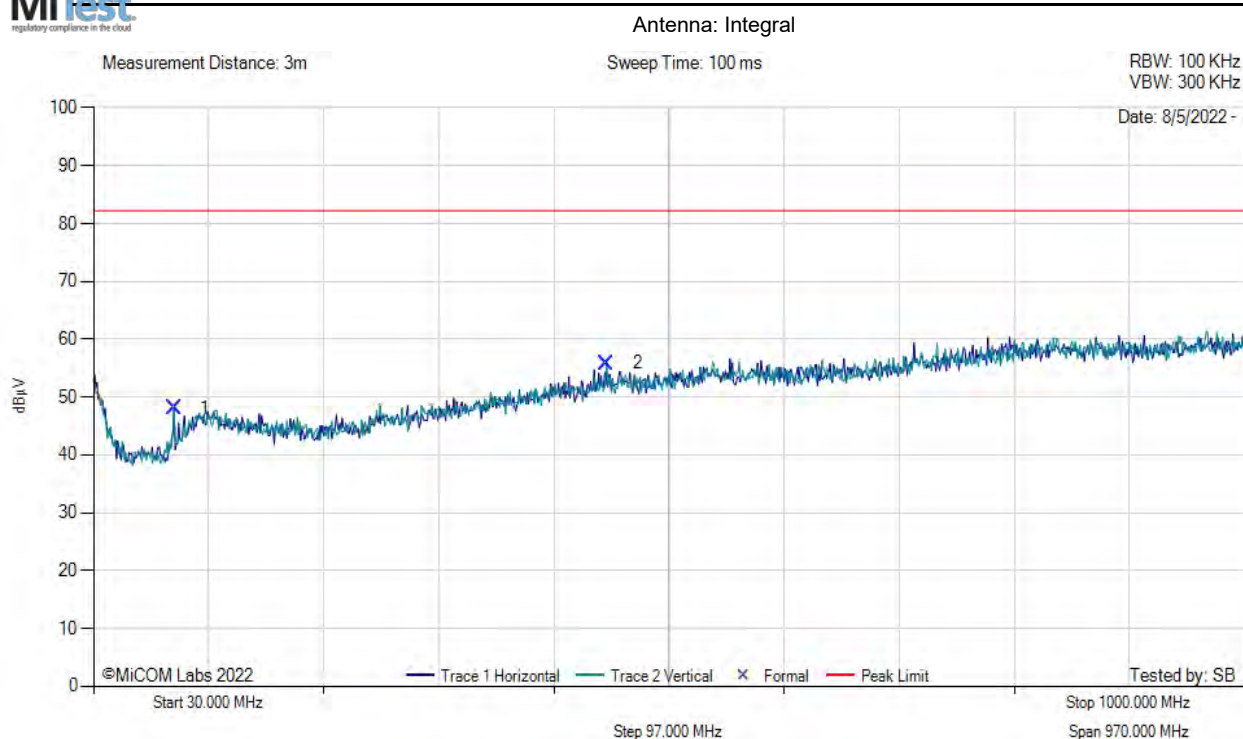

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	97.90	28.25	4.08	15.78	48.11	MaxP	Horizontal	151	118	82.2	-34.1	Pass
2	462.62	27.56	5.56	22.76	55.89	MaxP	Vertical	151	0	82.2	-26.3	Pass

**Test Notes:** Max Power, Full RB

### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz


<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1909.30	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



FCC Spurious 30 MHz to 1 GHz

Antenna: Integral

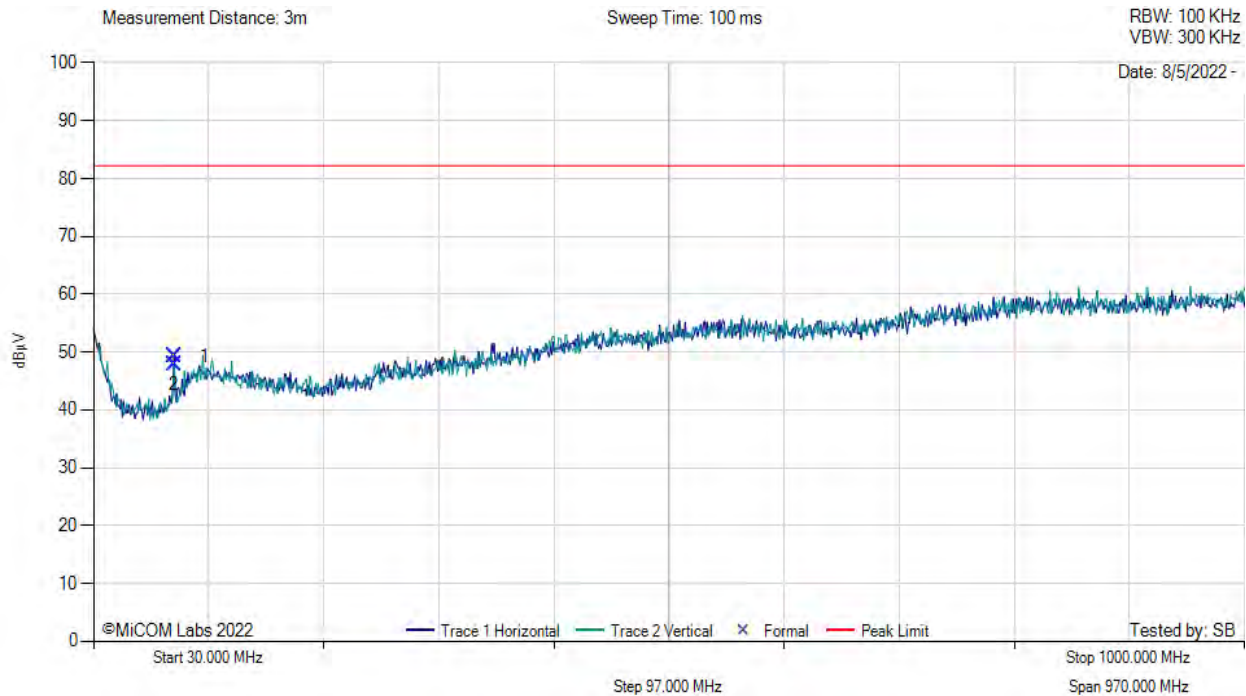

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	97.90	29.40	4.08	15.78	49.27	MaxP	Horizontal	151	208	82.2	-33.0	Pass
2	97.90	28.04	4.08	15.78	47.90	MaxP	Vertical	151	239	82.2	-34.3	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 1 GHz - 18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1909.30	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

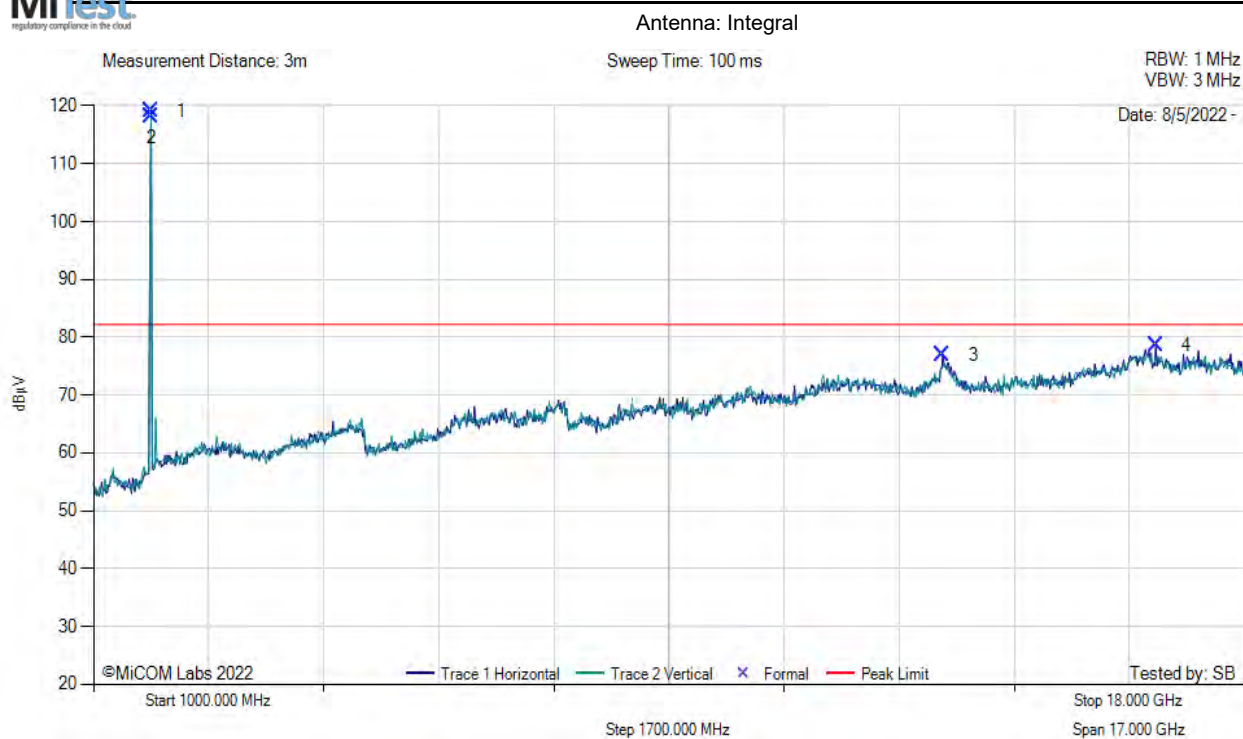

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1850.00	--	--	--	119.04	Fundamental	Vertical	--	--	--	--	Pass
2	1850.00	--	--	--	118.09	Fundamental	Horizontal	--	--	--	--	Pass
3	13546.00	32.65	5.47	38.79	76.91	MaxP	Horizontal	151	148	82.2	-5.3	Pass
4	16691.00	31.35	6.22	41.11	78.68	MaxP	Horizontal	151	298	82.2	-3.6	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1880.00	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

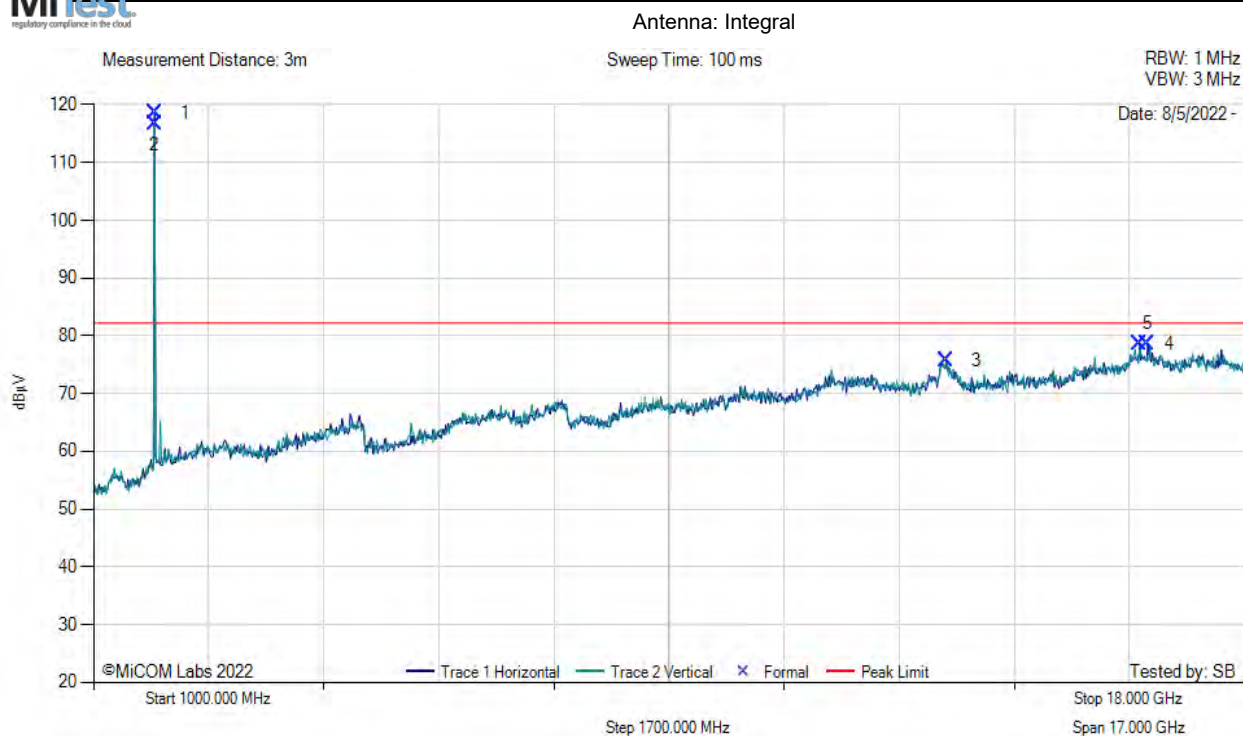

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1901.00	--	--	--	118.62	MaxP	Horizontal	--	--	--	--	Pass
2	1901.00	--	--	--	116.66	MaxP	Vertical	--	--	--	--	Pass
3	13597.00	31.92	5.14	38.68	75.74	MaxP	Vertical	151	270	82.2	-6.5	Pass
4	16453.00	--	--	--	78.60	Noise Floor	--	--	--	--	--	Pass
5	16572.00	31.30	6.15	41.15	78.60	MaxP	Horizontal	151	269	82.2	-3.6	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.94	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1850.70	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

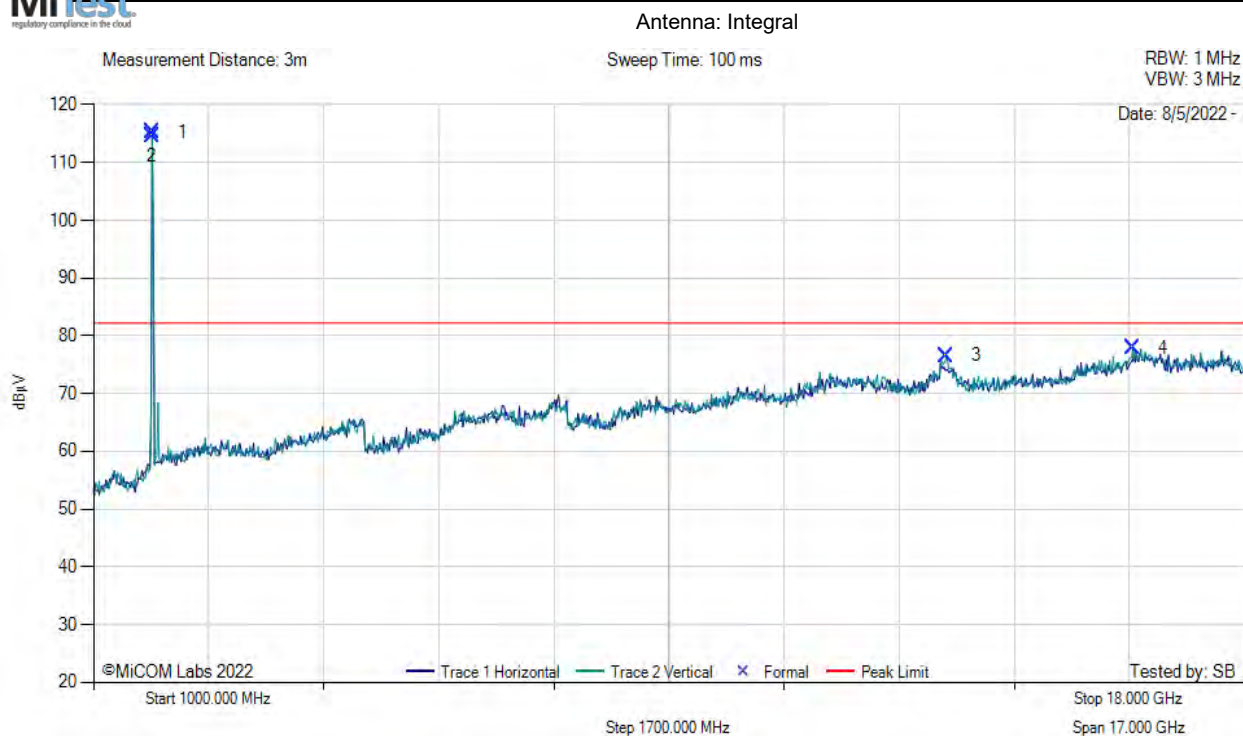

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1907.00	--	--	--	115.29	MaxP	Horizontal	--	--	--	--	Pass
2	1907.00	--	--	--	114.71	MaxP	Vertical	--	--	--	--	Pass
3	13597.00	32.74	5.14	38.68	76.56	MaxP	Vertical	151	209	82.2	-5.7	Pass
4	16351.00	30.62	6.21	41.11	77.94	MaxP	Vertical	151	29	82.2	-4.3	Pass

**Test Notes:** Max Power, Full RB



#### Band 4: Radiated Transmitter Emissions

**FCC 27.53 h: AWS emission limits—(1) General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.. ~ -13 dBm or 82.23 dBuV/m


#### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1710.7	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

#### Test Measurement Results



#### FCC Spurious 30 MHz to 1 GHz

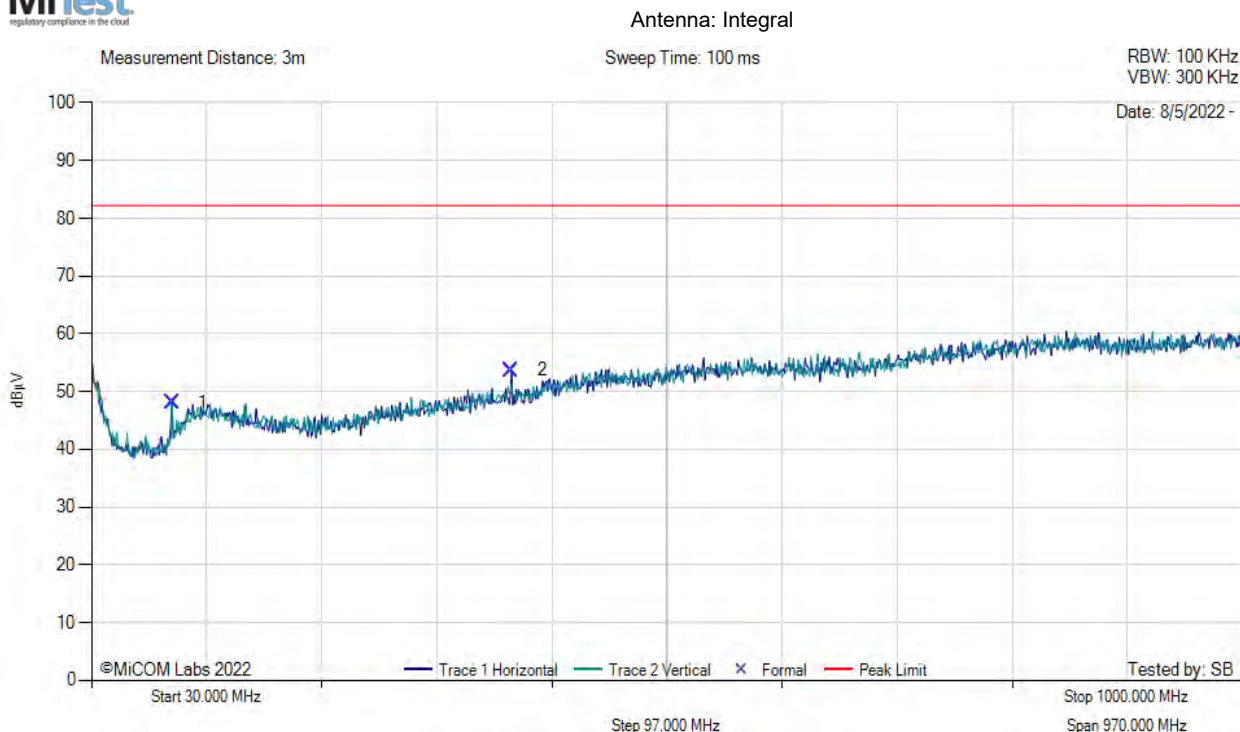

#### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBuV	Cable Loss dB	AF dB/m	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	97.90	28.24	4.08	15.78	48.10	MaxP	Horizontal	151	90	82.2	-34.1	Pass
2	384.05	26.85	5.30	21.51	53.66	MaxP	Horizontal	151	298	82.2	-28.6	Pass

**Test Notes:** Max Power, Full RB

### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz


<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1732.0	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



FCC Spurious 30 MHz to 1 GHz

Antenna: Integral

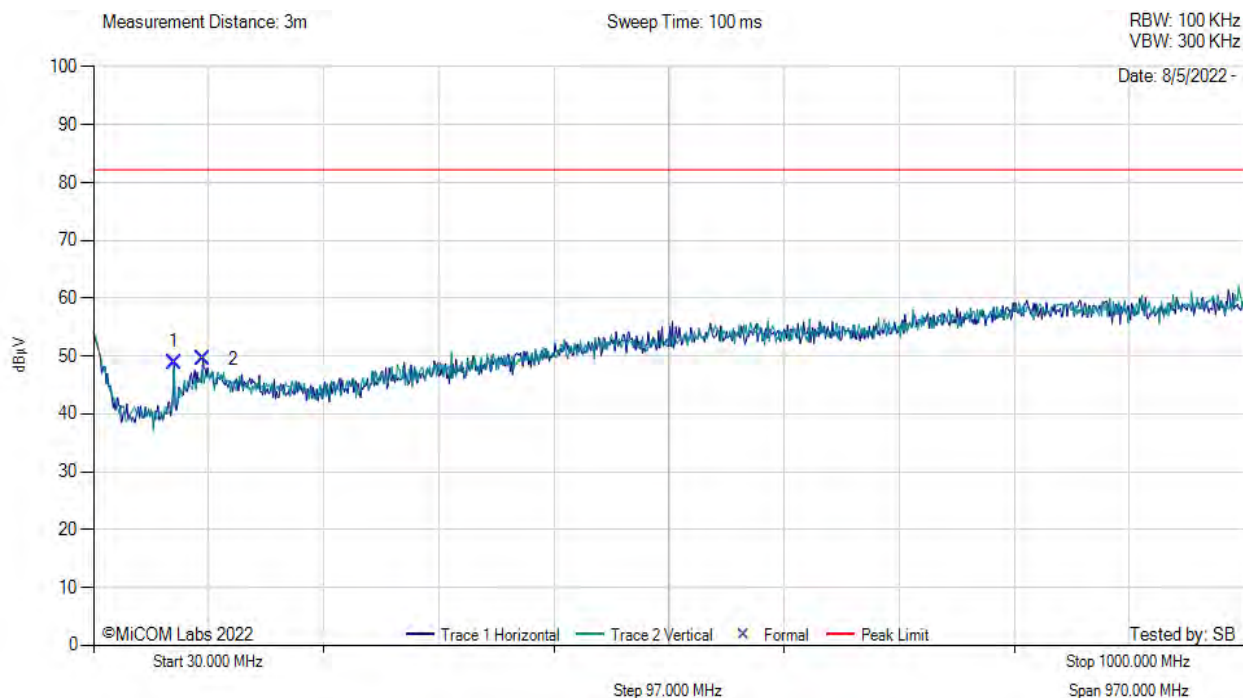

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	97.90	29.02	4.08	15.78	48.88	MaxP	Horizontal	151	90	82.2	-33.3	Pass
2	122.15	25.30	4.20	19.96	49.46	MaxP	Horizontal	151	120	82.2	-32.8	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 30 MHz TO 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1754.3	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 30 MHz to 1 GHz

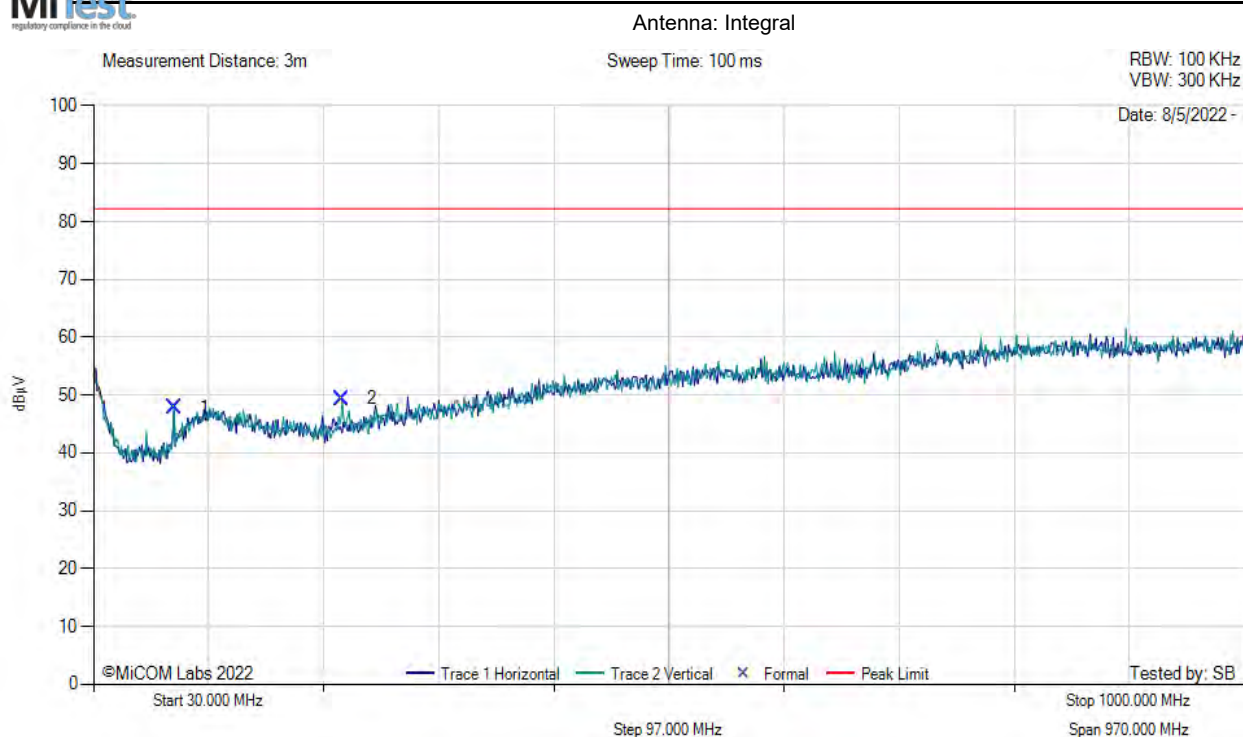

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	97.90	28.03	4.08	15.78	47.89	MaxP	Horizontal	151	90	82.2	-34.3	Pass
2	239.52	27.38	4.76	17.26	49.39	MaxP	Vertical	151	272	82.2	-32.8	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1710.7	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

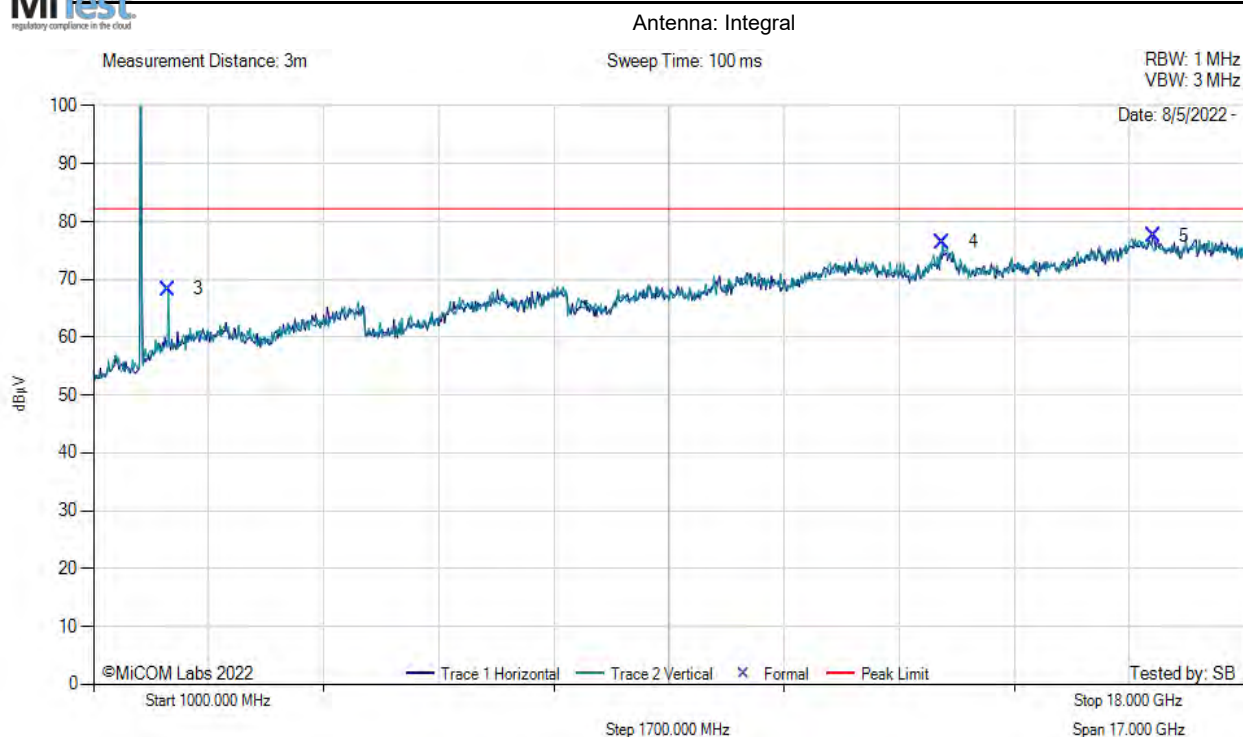

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1697.00	--	--	--	119.02	Fundamental	Horizontal	--	--	--	--	Pass
2	1697.00	--	--	--	114.52	Fundamental	Vertical	--	--	--	--	Pass
3	2105.00	34.61	1.85	31.89	68.35	MaxP	Vertical	151	179	82.2	-13.9	Pass
4	13546.00	32.16	5.47	38.79	76.42	MaxP	Vertical	151	0	82.2	-5.8	Pass
5	16657.00	30.34	6.12	41.13	77.60	MaxP	Horizontal	151	58	82.2	-4.6	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1732.00	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

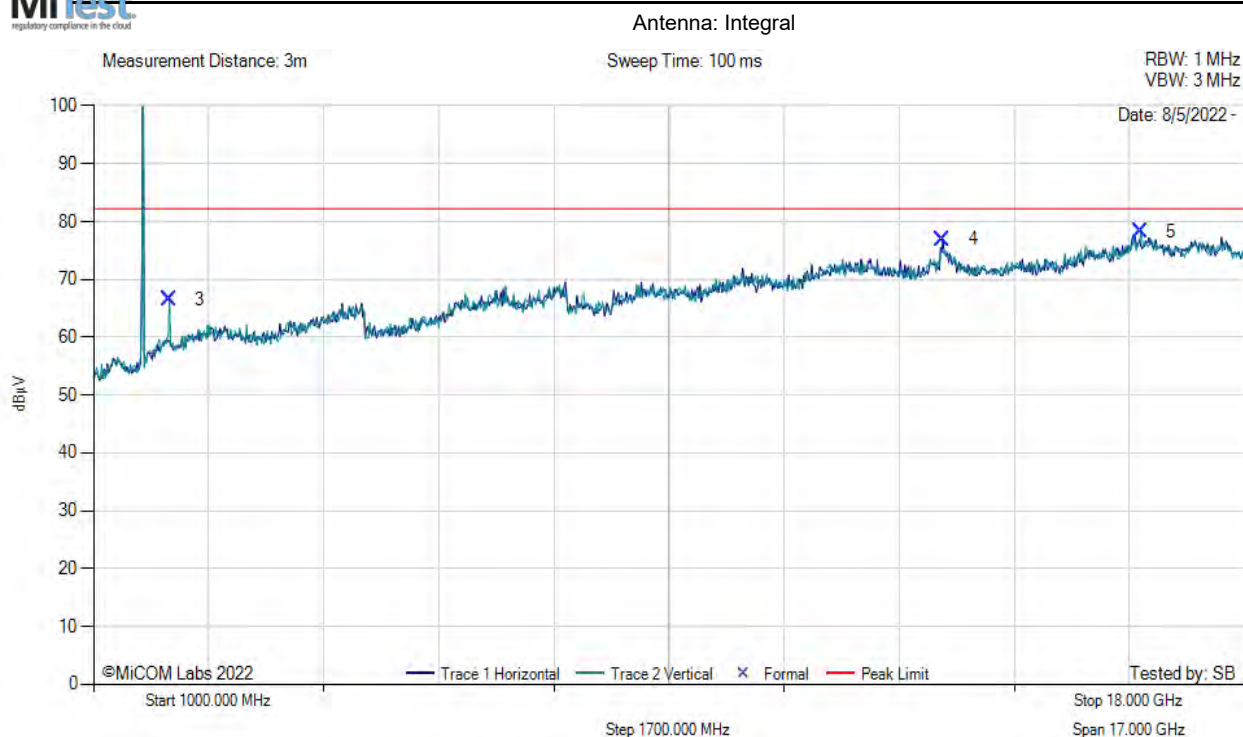

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1731.00	--	--	--	119.17	Fundamental	Horizontal	--	--	--	--	Pass
2	1731.00	--	--	--	115.54	Fundamental	Vertical	--	--	--	--	Pass
3	2122.00	32.93	1.85	31.74	66.52	MaxP	Vertical	151	239	82.2	-15.7	Pass
4	13546.00	32.64	5.47	38.79	76.90	MaxP	Horizontal	151	268	82.2	-5.3	Pass
5	16470.00	30.69	6.35	41.19	78.23	MaxP	Vertical	151	89	82.2	-4.0	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	2.46	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	1754.30	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

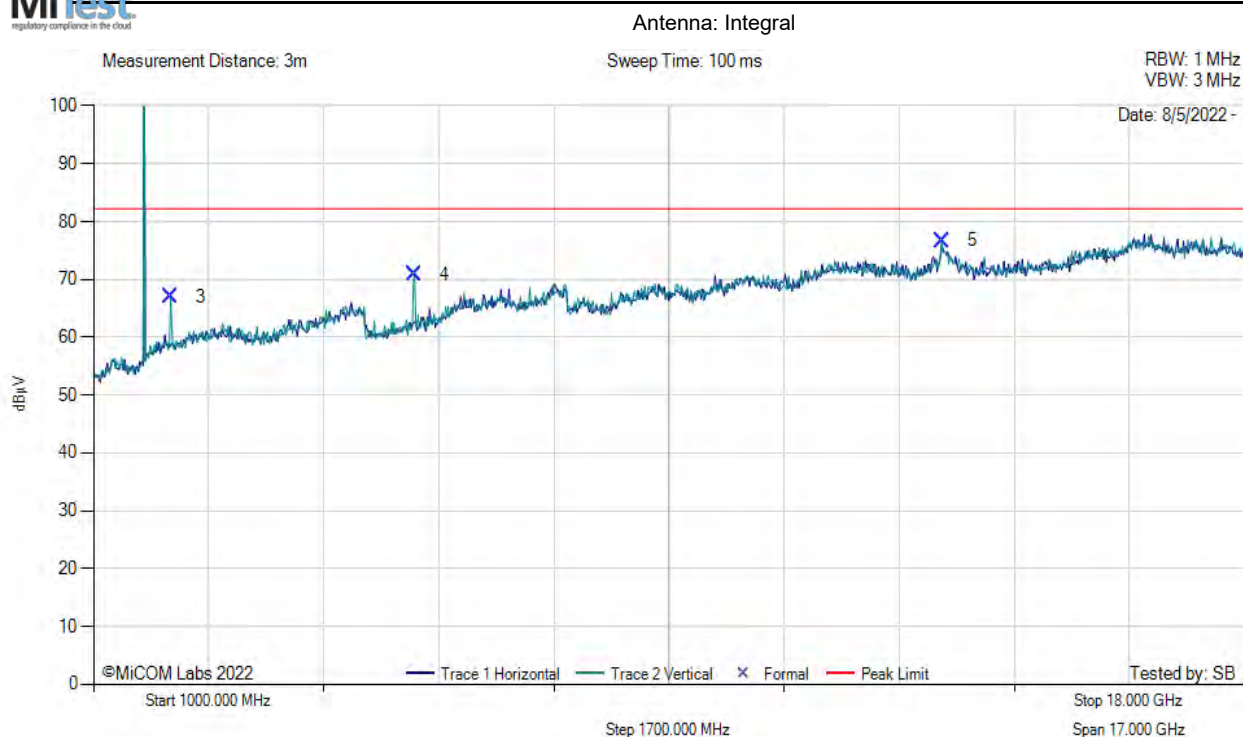

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1748.00	--	--	--	119.04	Fundamental	Vertical	--	--	--	--	Pass
2	1748.00	--	--	--	118.72	Fundamental	Horizontal	--	--	--	--	Pass
3	2139.00	33.50	1.89	31.59	66.98	MaxP	Vertical	151	210	82.2	-15.3	Pass
4	5743.00	33.28	3.17	34.36	70.81	MaxP	Vertical	151	210	82.2	-11.4	Pass
5	13529.00	32.60	5.28	38.82	76.70	MaxP	Vertical	151	152	82.2	-5.5	Pass

**Test Notes:** Max Power, Full RB

## Band 12: Radiated Transmitter Emissions

### FCC 27.53g: Emission limits for Miscellaneous Wireless equipment.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB.  $\sim -13$  dBm or 82.23 dBuV/m


#### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	699.7	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

#### Test Measurement Results



#### FCC Spurious 30 MHz to 1 GHz

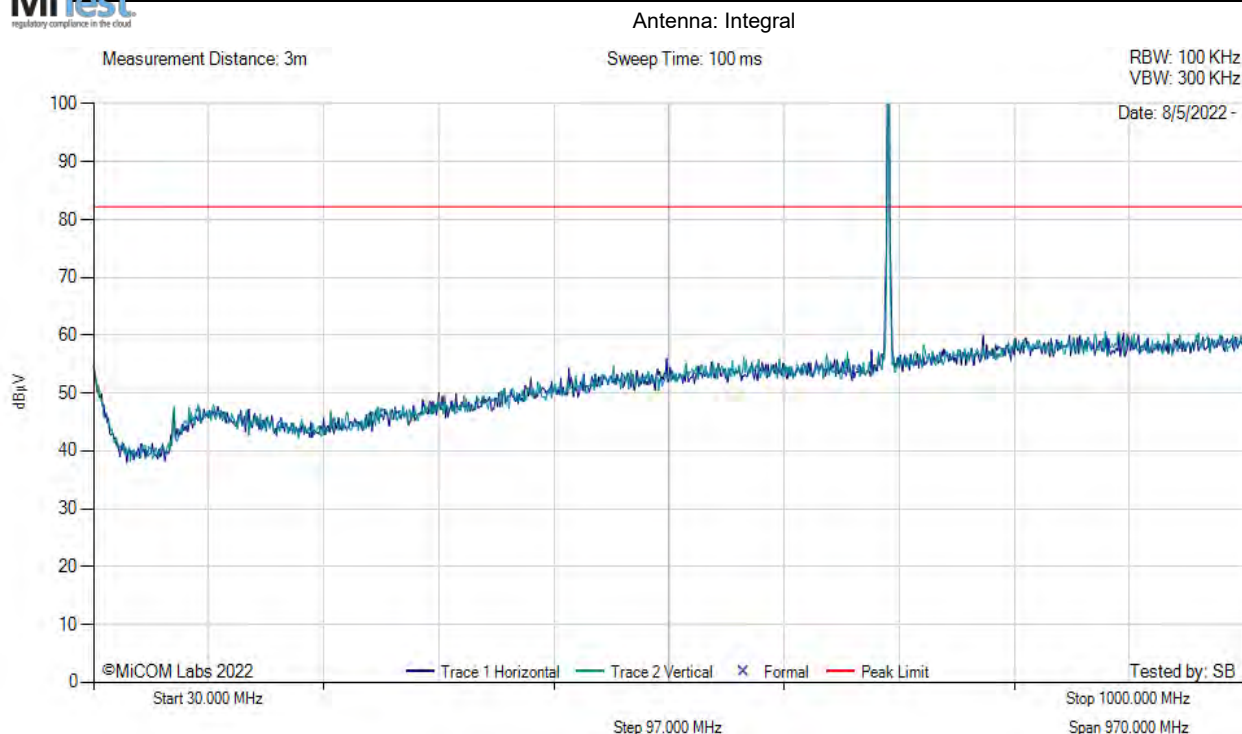

#### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBuV	Cable Loss dB	AF dB/m	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	699.30	--	--	--	109.62	Fundamental	Vertical	--	--	--	--	Pass
2	700.27	--	--	--	114.18	Fundamental	Horizontal	--	--	--	--	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	707.5	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 30 MHz to 1 GHz

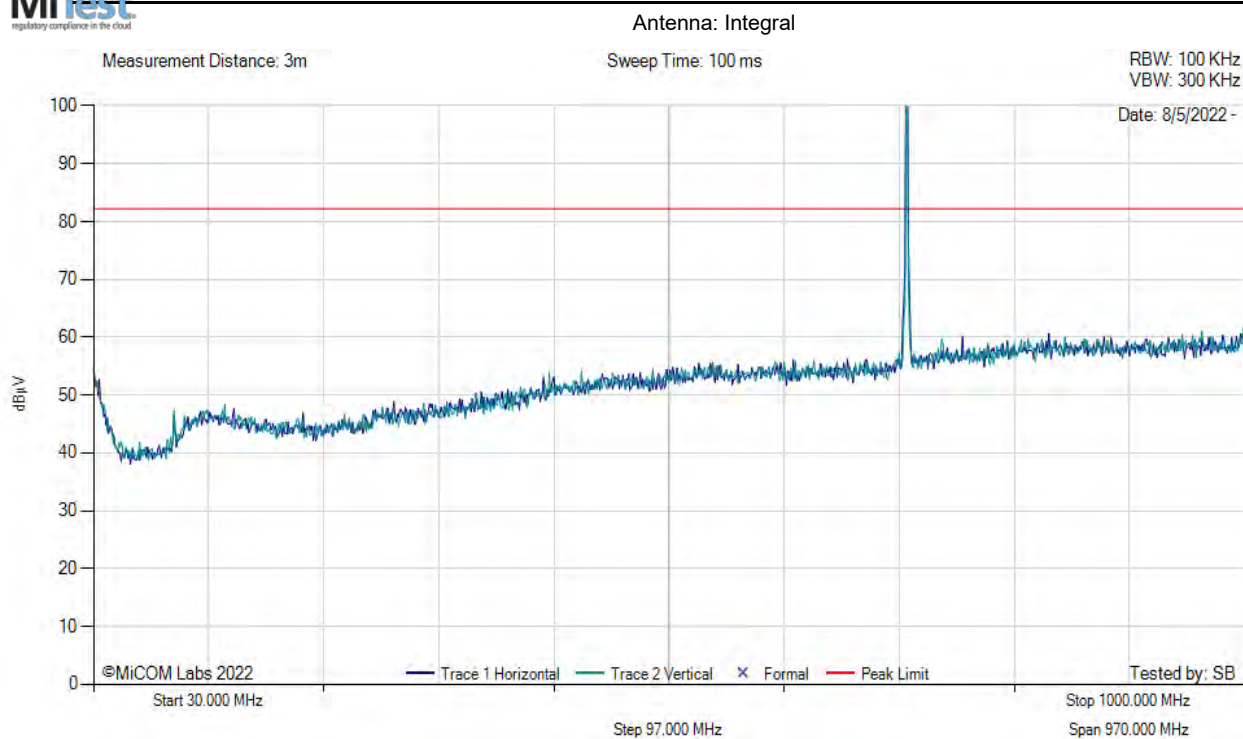

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	715.79	--	--	--	114.24	Fundamental	Horizontal	--	--	--	--	Pass
2	715.79	--	--	--	107.31	Fundamental	Vertical	--	--	--	--	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 30 MHz - 1 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	715.3	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 30 MHz to 1 GHz

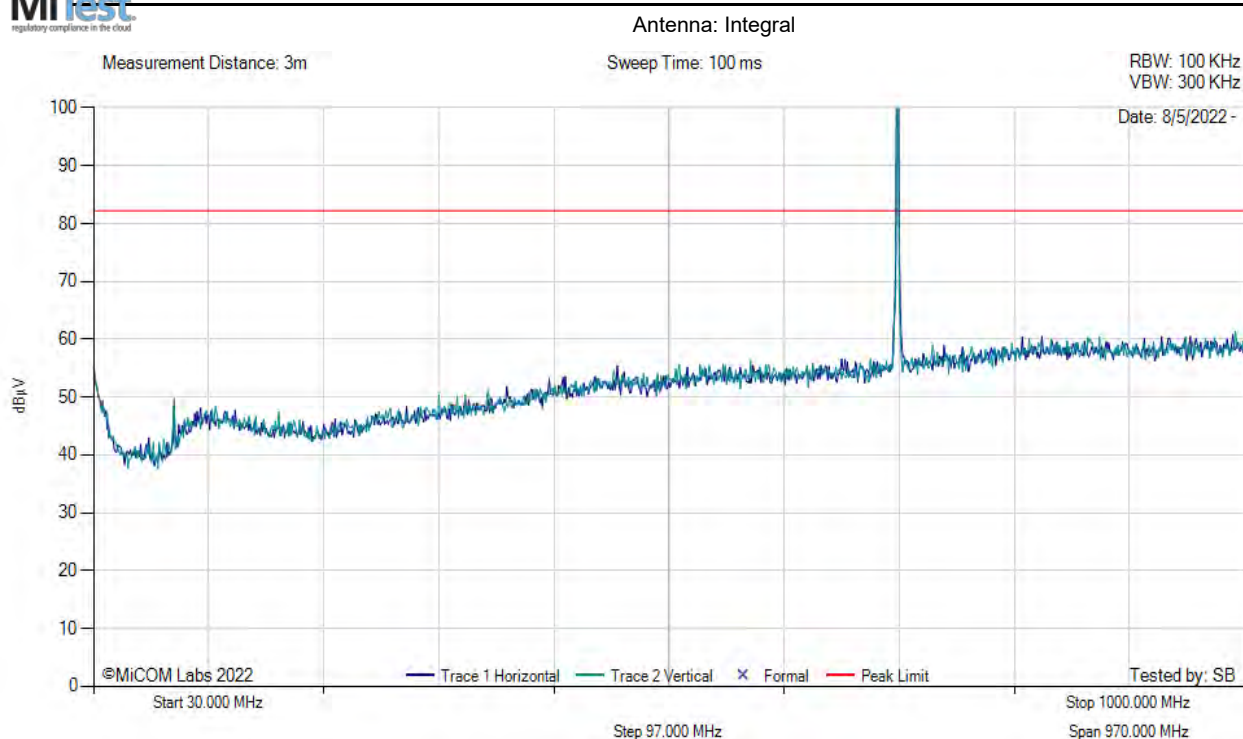

### 30.00 - 1000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	708.03	--	--	--	113.85	Fundamental	Horizontal	--	--	--	--	Pass
2	708.03	--	--	--	108.08	Fundamental	Vertical	--	--	--	--	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 1 GHz - 18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	699.7	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

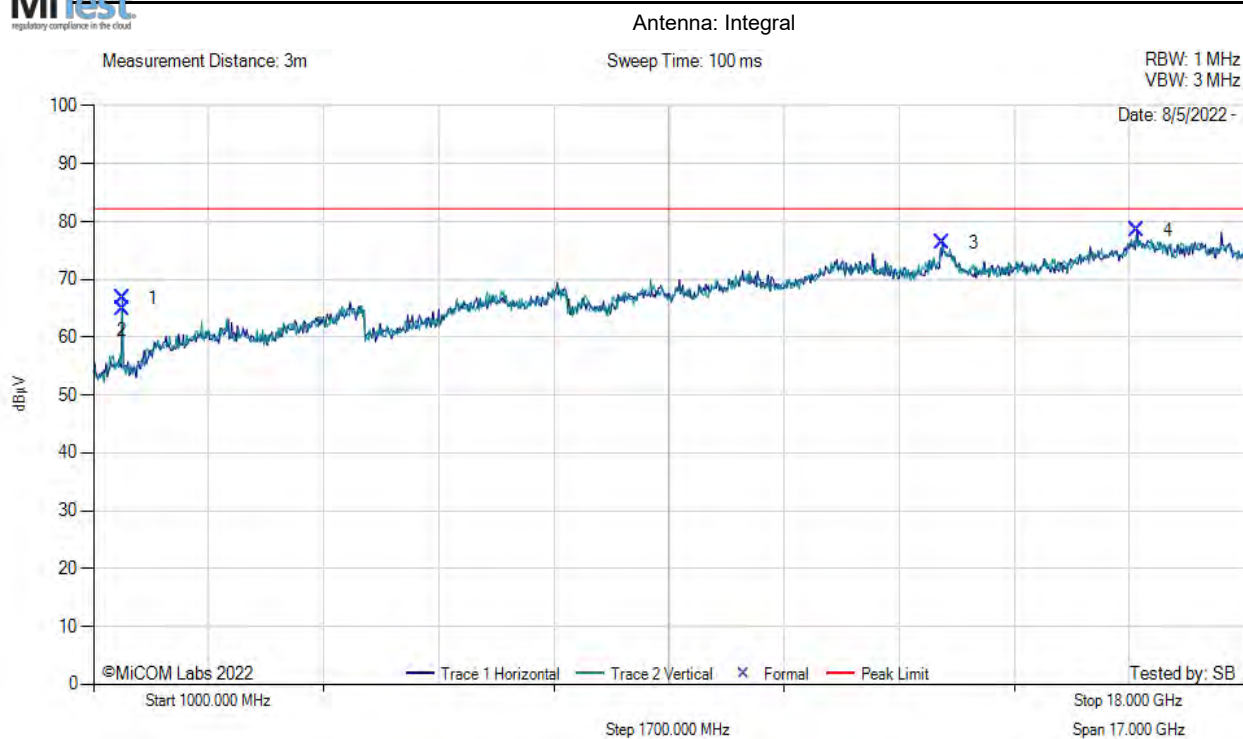

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1425.00	36.38	1.52	28.86	66.76	MaxP	Vertical	151	328	82.2	-15.5	Pass
2	1425.00	34.46	1.52	28.86	64.84	MaxP	Horizontal	151	330	82.2	-17.4	Pass
3	13546.00	32.11	5.47	38.79	76.37	MaxP	Horizontal	151	180	82.2	-5.9	Pass
4	16419.00	31.53	5.90	41.12	78.55	MaxP	Horizontal	151	208	82.2	-3.7	Pass

**Test Notes:** Max Power, Full RB




### Equipment Configuration for FCC SPURIOUS 1 GHz - 18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	707.5	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

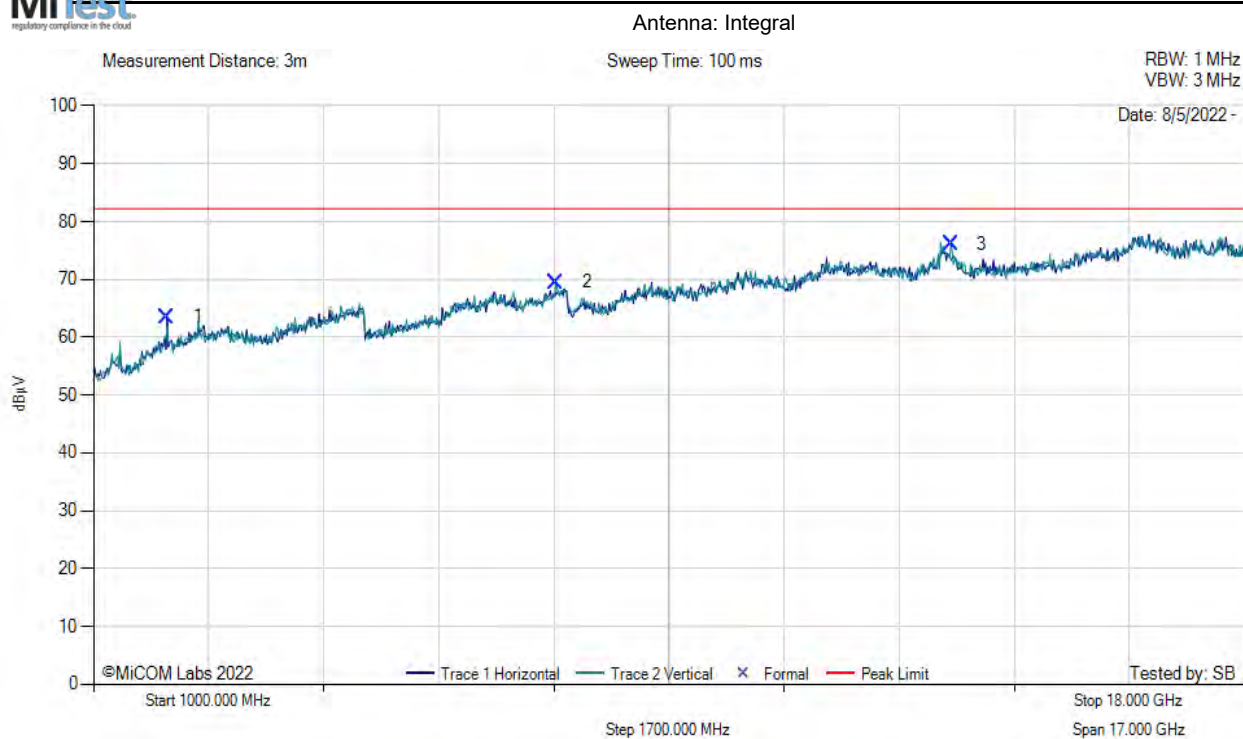

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2088.00	29.79	1.84	31.90	63.54	MaxP	Horizontal	151	330	82.2	-18.7	Pass
2	7834.00	29.74	3.81	36.00	69.55	MaxP	Vertical	151	89	82.2	-12.7	Pass
3	13665.00	32.11	5.29	38.65	76.05	MaxP	Vertical	151	89	82.2	-6.2	Pass

**Test Notes:** Max Power, Full RB


### Equipment Configuration for FCC SPURIOUS 1 GHz -18 GHz

<b>Antenna:</b>	Integral	<b>Variant:</b>	LTE
<b>Antenna Gain (dBi):</b>	-1.5	<b>Modulation:</b>	QPSK
<b>Beam Forming Gain (Y):</b>	Not Applicable	<b>Duty Cycle (%):</b>	99
<b>Channel Frequency (MHz):</b>	715.3	<b>Data Rate:</b>	Full RB
<b>Power Setting:</b>	Max	<b>Tested By:</b>	SB

### Test Measurement Results



### FCC Spurious 1 GHz -18 GHz

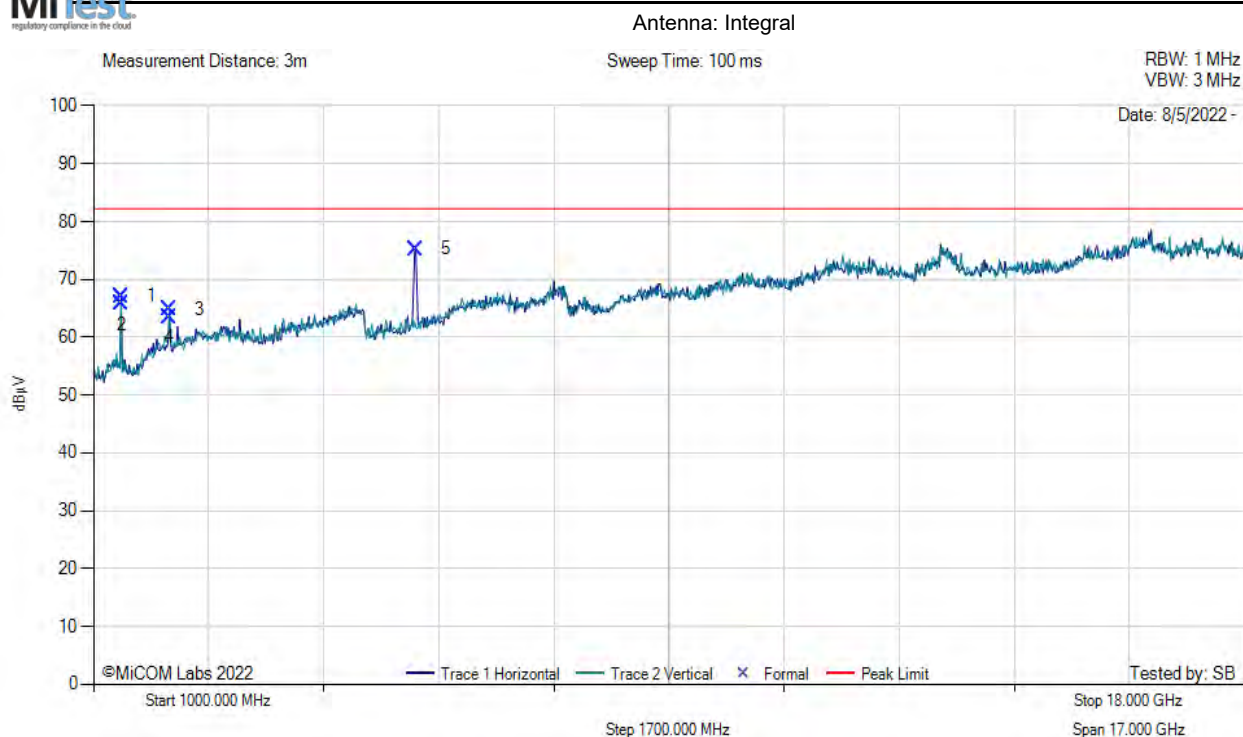

### 1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1408.00	36.66	1.52	28.97	67.15	MaxP	Horizontal	151	298	82.2	-15.1	Pass
2	1408.00	35.30	1.52	28.97	65.79	MaxP	Vertical	151	294	82.2	-16.4	Pass
3	2122.00	-31.23	1.85	31.74	64.82	MaxP	Vertical	151	335	82.2	-17.4	Pass
4	2122.00	29.94	1.85	31.74	63.53	MaxP	Horizontal	151	330	82.2	-18.7	Pass
5	5760.00	37.70	3.18	34.40	75.28	MaxP	Horizontal	151	270	82.2	-6.9	Pass

**Test Notes:** Max Power, Full RB



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)