

FCC ID: L2C0005T

COMPLIANCE TESTING
OF
DELCO J/ Z KEYLESS ENTRY TRANSMITER

- TEST REPORT 90017

Tests performed on 10 December, 1998

Prepared for:

Curt Kell

DELCO ELECTRONICS

OAK CREEK, WI

All results of this report relate only to the items that were tested.

This report is not to be reproduced, except in full, without written approval of L.S.Compliance, Inc.



Table of Contents

Section	Description	Page #
	Index	1
	Description of Measurement Facilities	2
	Report of Measurements	
1.2	Signature Page	3
1.3	Summary of Test Report	4
1.4	Introduction	5
1.5	Purpose	5
1.6	Radiated Emission Test Setup	5
1.7	Radiated Emission Test Procedure	6
1.8	Radiated Emission Test Equipment Utilized	7
1.9	Conducted Emission Measurements	7
1.10	Restricted Bands (Frequencies and Limits)	8
1.11	Photos taken during testing	9
1.12	Summary of Results and Conclusions	10
1.13	Test Equipment List	11
	Appendices	
A	Sample Calculations:	12
i.	Calculation of Radiated Emissions Limits	13
ii.	Duty Cycle Correction Factor Calculation	14
iii.	Occupied Bandwidth Calculations	15
B	Data Charts	16
C	Graphs	18

FCC ID: L2C0005T

DESCRIPTION OF MEASUREMENT FACILITIES

Site on File with the FCC

ID Number: 31040/SIT

1300F2

*“ The site referenced above has been found to comply with the test site criteria found in ANSI
C63.4-1992 and 47CFR Section 2.948.”*



SIGNATURE PAGE

Tests performed by:

Approved By:

1 Feb
1999

Kenneth L. Boston, EMC Lab Manager

Date

PE #31926

Registered Professional Engineer

(State of Wisconsin)

FCC ID: L2C0005T

1.3 SUMMARY OF TEST REPORT

MANUFACTURER: Delco Electronics
MODEL: J/Z
SERIAL: preproduction prototype
DESCRIPTION: KEYLESS ENTRY HANDHELD TRANSMITTER
FREQUENCY RANGE: TRANSMITTER; 315 MHz

The Delphi model J/Z RKE transmitter was found to **“meet”** the radiated emission specification of Title 47 CFR FCC, Part 15, subpart C. for an intentional radiator



1.4 INTRODUCTION

On December 10, 1998, a series of Radiated Emissions tests were performed on one sample model of the J/Z keyless entry transmitter, a small handheld key fob unit, which is designed to transmit a coded signal used to unlock an automobile door. These tests were performed using the test procedures outlined in ANSI C63.4-1992 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.231a,b for a periodic transmitter. These tests were performed by Kenneth L. Boston, PE, of L. S. Compliance, Inc. and witnessed by Curt Kell of Delphi, Inc.

1.5 PURPOSE

The above mentioned tests were performed in order to determine the compliance of the J/Z RKE tag with limits contained in various provisions of Title 47 CFR, FCC Part 15, including:

15.109 15.231b
15.205 15.231c
15.209

All radiated emissions tests were performed to measure the emissions in the frequency bands described by the above sections, and to determine whether said emissions are below the limits established by the above sections. These tests were performed in accordance with the procedure described in the American National Standard for methods of measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-1992). Another document used as reference for the EMI receiver specification was the International Special Committee on Radio Interference (CISPR) number 16-1 (1993).

1.6 RADIATED EMISSIONS TEST SETUP

The test sample was operated within the 3 meter Semi-Anechoic, FCC listed chamber located at L.S. Compliance in Cedarburg, WI. The sample was placed on an 80cm high wooden pedestal, which was centered on the flush-mounted 2m diameter metal turntable. The test sample was operated on its own [new] internal battery. The battery voltage at the beginning of the tests was measured to be 3.2 volts. The test sample was configured to run in a continuous transmit mode during the 15.231c and 15.231b measurements.

Please refer to Section 1.11 for pictures of the test setup.



1.7 RADIATED EMISSION TEST PROCEDURE

The fundamental and spurious (harmonic) emissions of the transmitter were tested for compliance to Title 47 CFR, FCC Part 15.231b limits for periodic devices. For the calculations used to determine the limits applicable for each of the two test samples (at their respective operating frequencies) refer to Appendix A. These limits are expressed in decibels (dB) above 1 microvolt per meter ($\mu\text{V}/\text{m}$). The samples were tested from the lowest frequency generated by the transmitter (without going below 9 kHz) to the 10th harmonic of the fundamental frequency generated by the device. The appropriate limits were also observed when the fundamental or spurious signals were located within any of the restricted bands as described in Part 15.205a. These frequencies, and their associated limits, are referenced in Section 1.10. The samples were placed on a nonconductive (wooden) pedestal in the 3 Meter chamber and the antenna mast was placed such that the antenna was 3m from the test object. A biconical antenna or tuned dipole was used to measure emissions from 30 to 200 MHz, a log periodic or tuned dipole was used to measure emissions from 200 to 1000 MHz, and a double ridged waveguide horn was used to measure emissions above 1 GHz. The test object was programmed to operate in continuous transmit, and the resultant signals were maximized by rotating the turntable 360 degrees, and by raising and lowering the antenna between 1 and 4 meters. The test object was also given several different orientations to determine the maximum signal levels, using both horizontal and vertical antenna polarities.

No significant emissions were found aside from the transmitter fundamental and several harmonics. The unit was scanned for emissions while in continuous transmit, over the range 30 to 3500 MHz to establish compliance with Part 15.209 and 15.231. No other spurious signals, other than the noise floor of the system at the band edges, could be found within 20 dB of the limits.

In addition to measuring the levels of radiated emissions, the occupied bandwidth of the transmitters were measured. In accordance with FCC Part 15.231c, the 20dB bandwidth of the transmitted signal should be within a window of 0.25% of the center carrier frequency. The calculation for this bandwidth can be found in Appendix A, which for this product is 787.5 kHz. The resolution bandwidth was set either to 120 kHz or to the closest available filter setting on the HP8546A EMI system that corresponded to 5% of the allowable bandwidth determined in the calculation mentioned above, without going below the resolution bandwidth of 10kHz, as dictated in ANSI C63.4-1992 section 13.1.7.

The samples were activated to transmit in a continuous mode and were placed on the aforementioned pedestal within the 3 meter chamber. The transmitted signal was received on a tuned dipole antenna and fed to the HP8546A EMI System, where the fundamental frequency was displayed, and a plot of the occupied bandwidth was produced. These plots are included in Appendix C.



FCC ID: L2C0005T

From the data supplied; and an indicated –20dBc bandwidth of 428 kHz, it can be seen that the test samples do indeed **“meet”** the bandwidth requirement established by FCC Part 15.231(c).



1.8 TEST EQUIPMENT UTILIZED FOR RADIATED EMISSIONS TEST

A list of the test equipment and antennas used for the tests can be found in Section 1.13, which includes the calibration information as well as the equipment description. All equipment is calibrated and used according to the user manuals supplied by the manufacturer. All antenna calibrations were performed at a N.I.S.T traceable site, and the resultant correction factors were entered into the Hewlett Packard 8546A EMI receiver software database. The connecting cables used were also measured for loss using a calibrated signal generator and the HP 8546A EMI receiver. The resulting loss factors were entered into the HP 8546A database. This allowed for automatic changes in the antenna correction factor, as well as cable loss or other corrections, to be added to the EMI receiver display while taking measurements. Thus, the resulting data taken from the HP 8546A is an actual reading and can be entered into the database as a corrected meter reading. When a reading is taken using the peak detector, a duty cycle correction factor can be applied for conversion to an average reading. This operation can be used when measuring periodic data transmission, under FCC part 15.231b, and Part 15.35c. The calculation for deriving this duty factor can be found in Appendix A. The resulting average reading was then compared to the appropriate limit in order to determine compliance. The HP 8546A EMI receiver was operated with a bandwidth of 120 kHz when receiving signals below 1 GHz, and with a bandwidth of 1 MHz when receiving signals above 1 GHz, in accordance with CISPR 16. Both the peak and Quasi-peak detector functions were used.

1.9 CONDUCTED EMISSION TEST

Due to the fact that this product operated on its own internal battery power, as opposed to using a power cord, it was not necessary to perform a test for Conducted Emissions.



FCC ID: L2C0005T

Manufacturer: Delco Electronics

Model: J / Z

Serial Number(s): pre-production prototype

1.10 - Restricted Bands affecting this product

Frequency (MHz)	Limit (μ V)	Limit (dB/ μ V / m)
322-335.4	200	46.0
399.9-410	200	46.0
608-614	200	46.0
960-1240	500	54.0
1300-1427	500	54.0
1435-1626.5	500	54.0
1645.5-1646.5	500	54.0
1660-1710	500	54.0
1718.8-1722.2	500	54.0
2200-2300	500	54.0
2310-2390	500	54.0
2483.5-2500	500	54.0
2655-2900	500	54.0

FCC ID: L2C0005T

1.11 – Photos taken during testing



View of the Delco J/Z transmitter during the Radiated Emissions tests. This view shows the orientation of the product where the maximum signal levels were present (horizontal polarity).



1.12 SUMMARY OF RESULTS AND CONCLUSIONS

Based on the procedures outlined in this report, and the test results included in appendices B and C, it can be determined that the model J/Z keyless entry transmitter does **“meet”** the emission requirements of Title 47 CFR, FCC Part 15 Subpart C for an intentional radiator.

The enclosed test results pertain to the samples of the test item listed, and only for the tests performed on the data sheets. Any subsequent modification or changes to the test items could invalidate the data contained herein, and could therefore invalidate the findings of this report.



FCC ID: L2C0005T**1.13 - Test Equipment**

Asset #	Manufacturer	Model #	Serial #	Description	Due Date
AA960003	EMCO	3121C	786	Dipole Set Antenna	7/14/99
AA960004	EMCO	3146	9512-4276	Log Periodic Antenna	9/12/99
AA960005	EMCO	3110B	9601/2280	Biconical Antenna	9/12/99
AA960007	EMCO	3115	99111-4198	Double Ridged Guide/Horn Antenna	7/20/99
EE960004	EMCO	2090	9607-1164	Mast/Ttable Controller	I.O
EE960013	HP	8546A	3617A00320	Receiver RF Section W/Display and RF filter section	8/12/99
EE960014	HP	85460A	3448A00296	Receiver RF Section Preselector	8/12/99



APPENDIX A:

SAMPLE CALCULATIONS

**FCC ID: L2C0005T**

Manufacturer: Delco electronics

Model: J / Z

Serial Number(s): prototype

**Calculation of Radiated Emissions limits for
FCC Part 15.231(b) (260-470 MHz)****FIELD STRENGTH OF FUNDAMENTAL FREQUENCIES:**

The calculation involves a linear interpolation of 3750 to 12500 $\mu\text{V}/\text{m}$ over 260-470 MHz,
Where field strength of the fundamental frequency (f_0) when, $260 \leq f_0 \leq 470$ MHz, can be
found by: $3750.0 + 41.667(f_0 - 260)$, where f_0 is in MHz.

FIELD STRENGTH OF SPURIOUS/HARMONIC FREQUENCIES:

The calculation involves a linear interpolation of 375 to 1250 $\mu\text{V}/\text{m}$ over 260 to 470 MHz,
Where field strength of the harmonic frequencies ($2f_0, 3f_0, \dots$), when $260 \leq f_0 \leq 470$ MHz, can be
found by: $375.0 + 4.1667(f_0 - 260)$, where f_0 is in MHz.

❖ Where $f_0 = 315$ MHzFundamental: $3750 + 41.667(315 - 260) = 6041.7 \mu\text{V}/\text{m}$ Harmonic: $375 + 4.1667(315 - 260) = 604.17 \mu\text{V}/\text{m}$

Frequency (MHz)	Fundamental limit ($\mu\text{V}/\text{m}$)	Fundamental limit (dB $\mu\text{V}/\text{m}$)	Harmonic limit ($\mu\text{V}/\text{m}$)	Harmonic limit (dB $\mu\text{V}/\text{m}$)
315	6041.7	75.62	604.17	55.62



FCC ID: L2C0005T

Manufacturer: Delco Electronics

Model: J/ Z

Serial Number(s): prototype

Duty Cycle Correction Factor Calculation

For a graphical presentation of the data bursts being transmitted from the transmitter, refer to Appendix C. for a zero span picture of the modulation burst from one representative unit. Plots are provided that show the repeating burst of data that occurs when a key is held down continuously, and also over a 100 millisecond (worst case) period and a 20 millisecond period, to display the individual pulses in detail. While activated, and using the identifier code of the maximum possible duration, the total On-time is 19.83 milliseconds and the total Off-time is 80.17 milliseconds. When the total On-time is computed over a 100 millisecond window, according to FCC Part 15.35(c), where the pulse duration exceeds 100 milliseconds, a total of 19.83 milliseconds is obtained. This results in a relaxation factor of 14.05, which is under the allowable cap of 20 dB, as stated in FCC Part 15.35(b)

$$\begin{aligned}\text{Relaxation Factor} &= 20 \log (.1983 / 100) \\ &= 14.05 \text{ dB}\end{aligned}$$

.



FCC ID: L2C0005T

Manufacturer: Delco Electronics

Model: J/Z

Serial Number(s):

Occupied Bandwidth Calculations

FCC Part 15.231(c) states that the bandwidth of the periodic device shall be no wider than 0.25% of the center frequency for devices operating between 70 and 900 MHz. Said bandwidth is determined at the

-20 dB reference to peak carrier points.

For 315 MHz, the 20 dB bandwidth is $0.0025 \times 315 = 787.5 \text{ kHz}$

Refer to Appendix C for the set of graphs that show the actual occupied bandwidth of the test sample.



APPENDIX B:

DATA CHARTS

**FCC ID: L2C0005T**

**Measurement of Electromagnetic Radiated Emission within 3 Meter FCC Listed
Chamber**

Frequency Range inspected: 30 to 3500 MHz

Date of Test:	<u>December 10,1998</u>	Manufacturer:	<u>Delco electronics</u>
Location:	<u>L.S. Compliance, Inc.</u>	Model No.:	<u>J/ Z</u>
	<u>W66 N220 Commerce Court</u>		
	<u>Cedarburg, WI 53012</u>		
Specifications:	<u>Title 47CFR, FCC Part 15.231b</u>	Serial No.:	<u>Pre-production</u>
Distance:	<u>3 meters</u>	Configuration:	<u>Active, continuous burst</u>
Equipment:	<u>HP 8546A EMI Receiver</u>	Detector(s)	<u>Peak</u>
	<u>EMCO 3115 Double Ridged</u>	Used:	
	<u>Waveguide</u>		
	<u>EMCO 3146A Log Periodic</u>		

The following table depicts the level of significant fundamental and harmonic emissions
found:

Higher order harmonics were found to be below the noise floor of the receiving system:

Frequency (MHz)	Antenna Polarity	Height (meters)	Azimuth (0° - 360°)	EMI Meter Reading (dB μV/ m)	Duty Cycle Correction (dB)	Corrected Reading (dB μV/ m)	15.231b Limit (dB μV/ m)	Margin (dB)
314.95	H	1.0	210	81.2	14.05	67.15	75.62	8.47
314.95	V	2.0	95	76.5	14.05	62.45	75.62	13.17
629.9	H	1.45	340	68.5	14.05	54.45	55.62	1.17
629.9	V	1.95	90	64.4	14.05	50.35	55.62	5.27
944.82	H	1.0	120	69.0	14.05	54.95	55.62	0.67
944.82	V	1.25	115	66.0	14.05	51.95	55.62	3.67
1259.75	H	1.17	260	62.6	14.05	48.55	55.62	7.07
1259.75	V	1.0	0	66.8	14.05	52.75	55.62	2.87
1574.71	H	1.35	90	60.2	14.05	46.15	54.00	7.85
1574.71	V	1.1	30	58.7	14.05	44.65	54.00	9.35

**FCC ID: L2C0005T**

1889.65	H	1.1	95	59.7	14.05	45.65	55.62	9.97
1889.65	V	1.2	160	58.6	14.05	44.55	55.62	11.07
2204.6	H	1.2	95	61.5	14.05	47.45	54.00	6.55
2204.6	V	1.05	140	61.4	14.05	47.35	54.00	6.65
2519.54	H	1.0	310	55.7	14.05	41.65	55.62	13.97
2519.54	V	1.2	30	54.2	14.05	40.15	55.62	15.47




APPENDIX C:

GRAPHS




FCC ID: L2C0005T

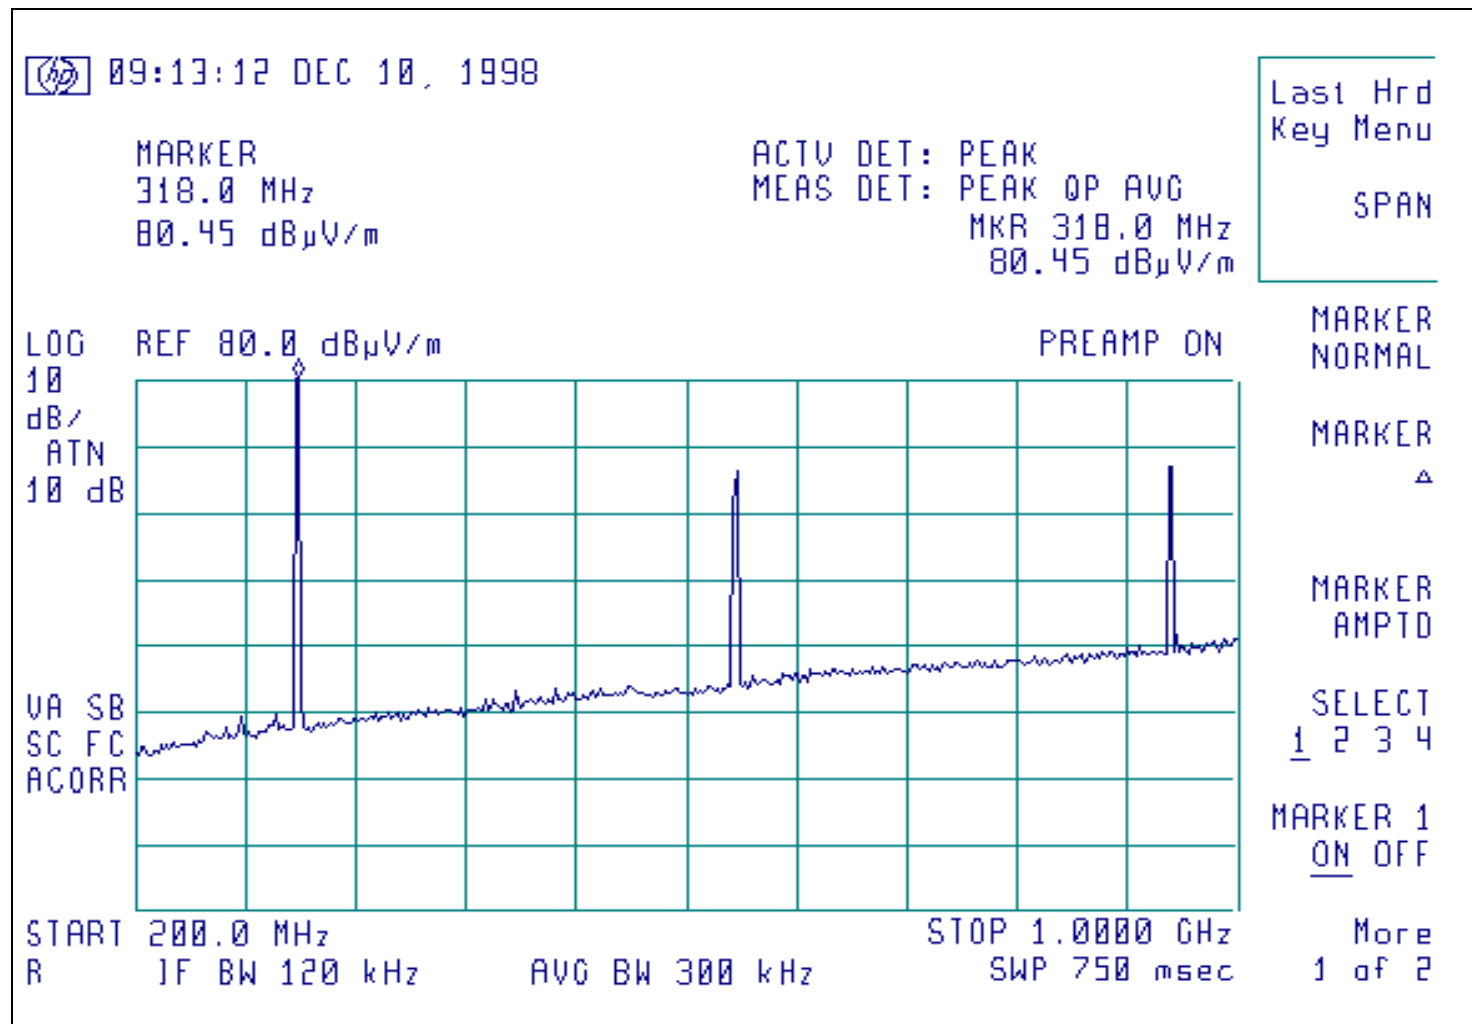315 MHz Key Fob Transmitter, emissions below 1 GHz, horizontal polarity



FCC ID: L2C0005T


315 MHz Key Fob Transmitter, emissions below 1 GHz, vertical polarity

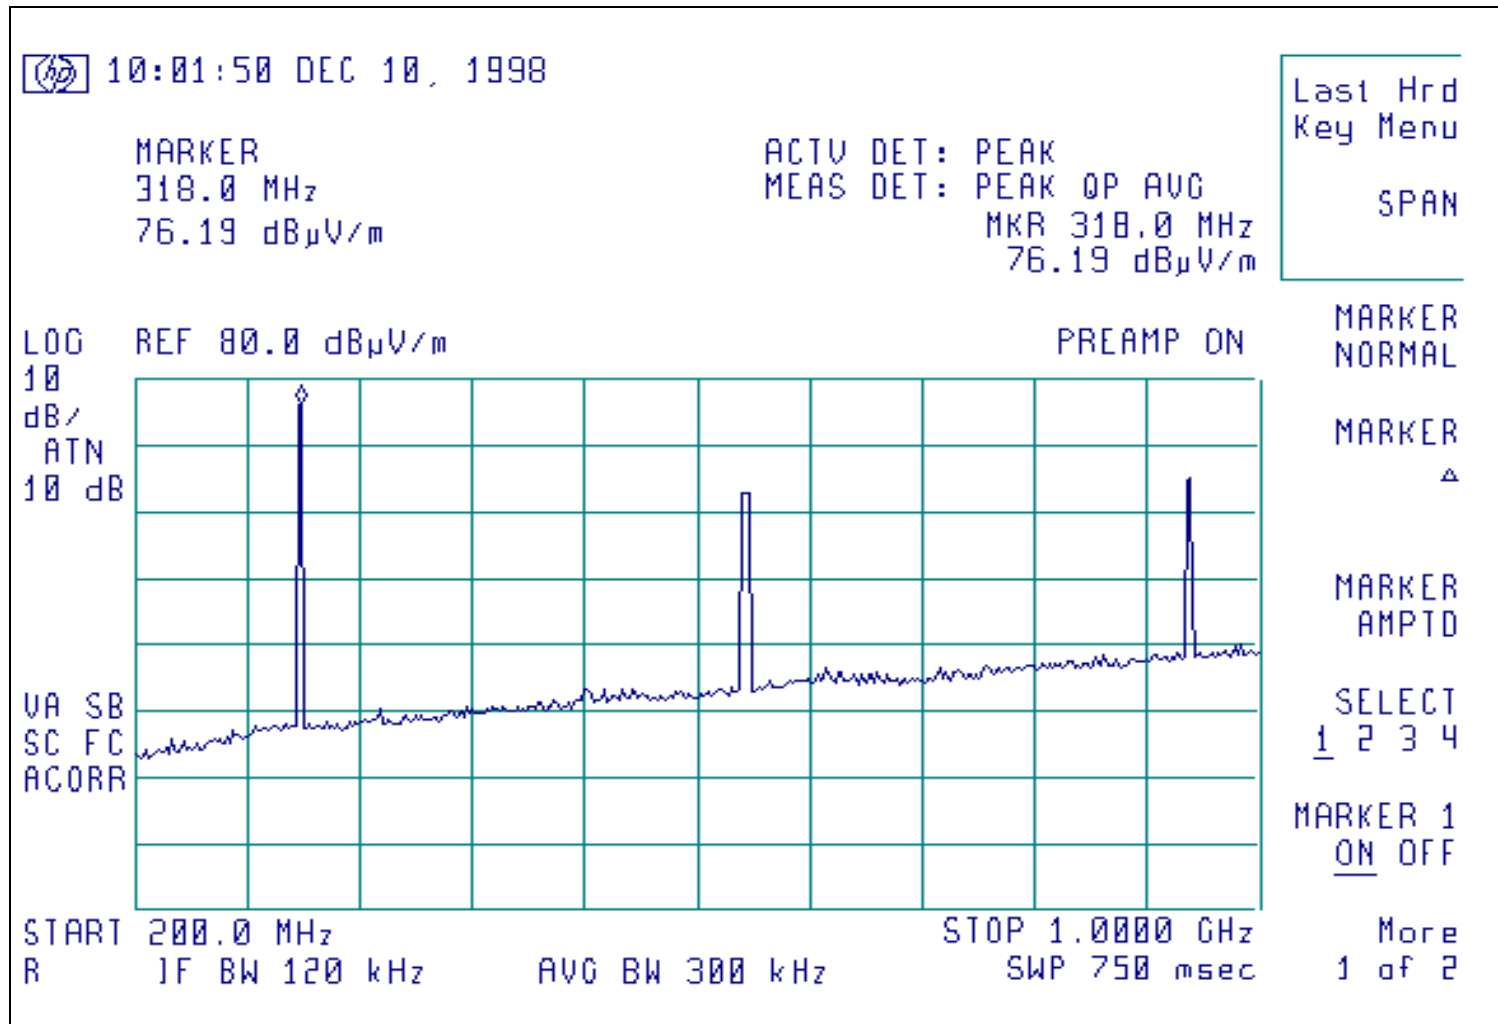



FCC ID: L2C0005T


315 MHz Transmitter, emissions above 1 GHz, horizontal polarity

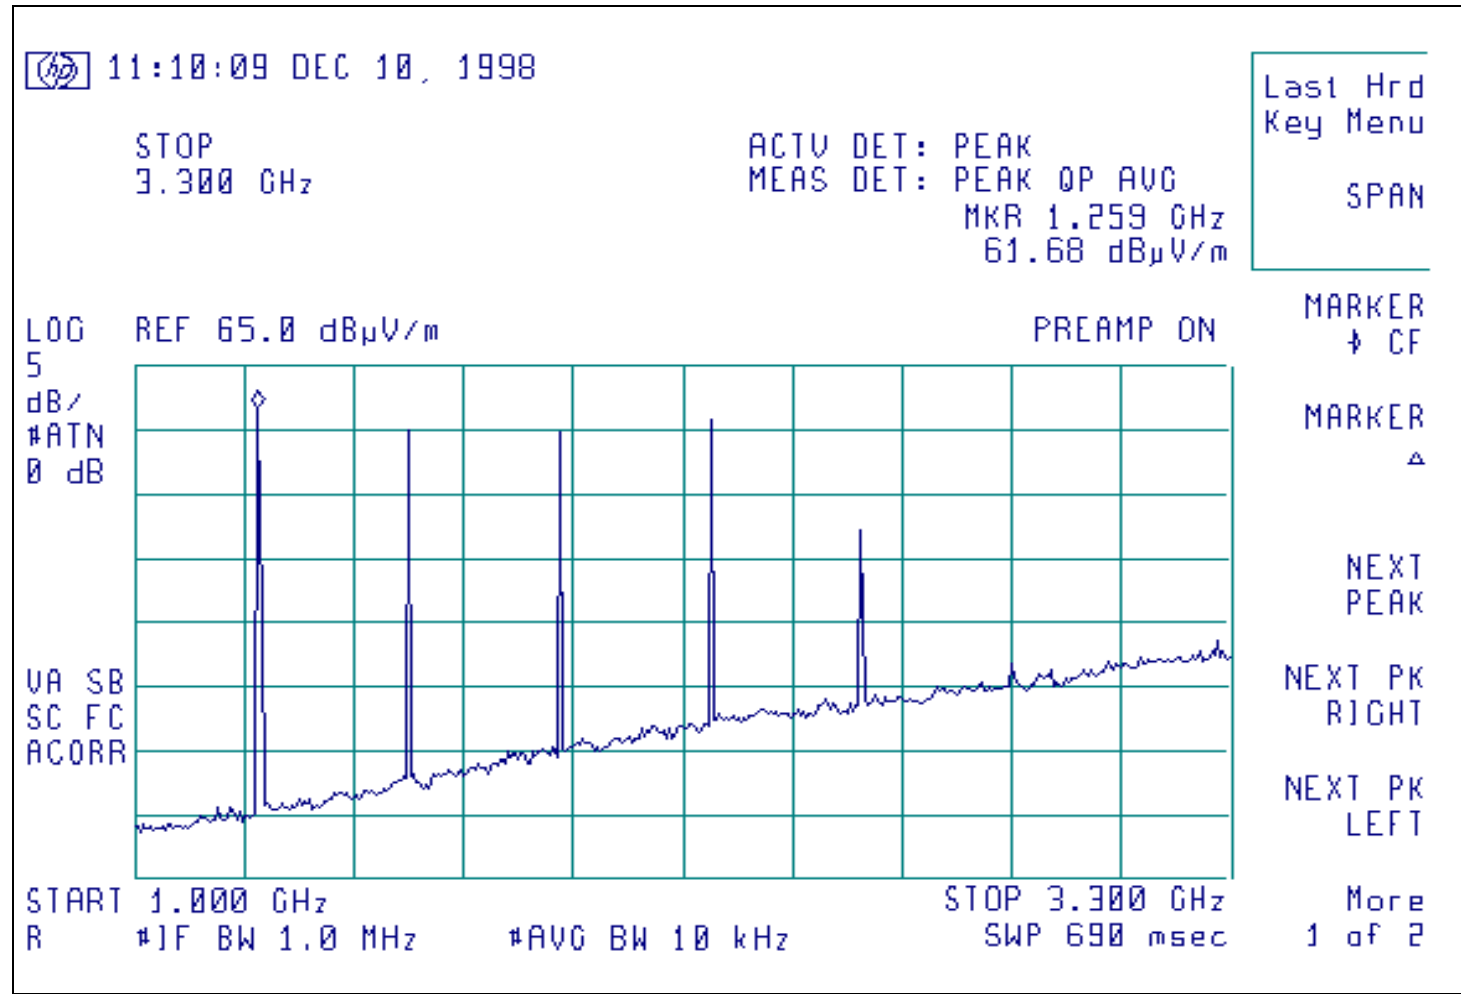



FCC ID: L2C0005T


315 MHz Key Fob Transmitter, vertical above 1 GHz

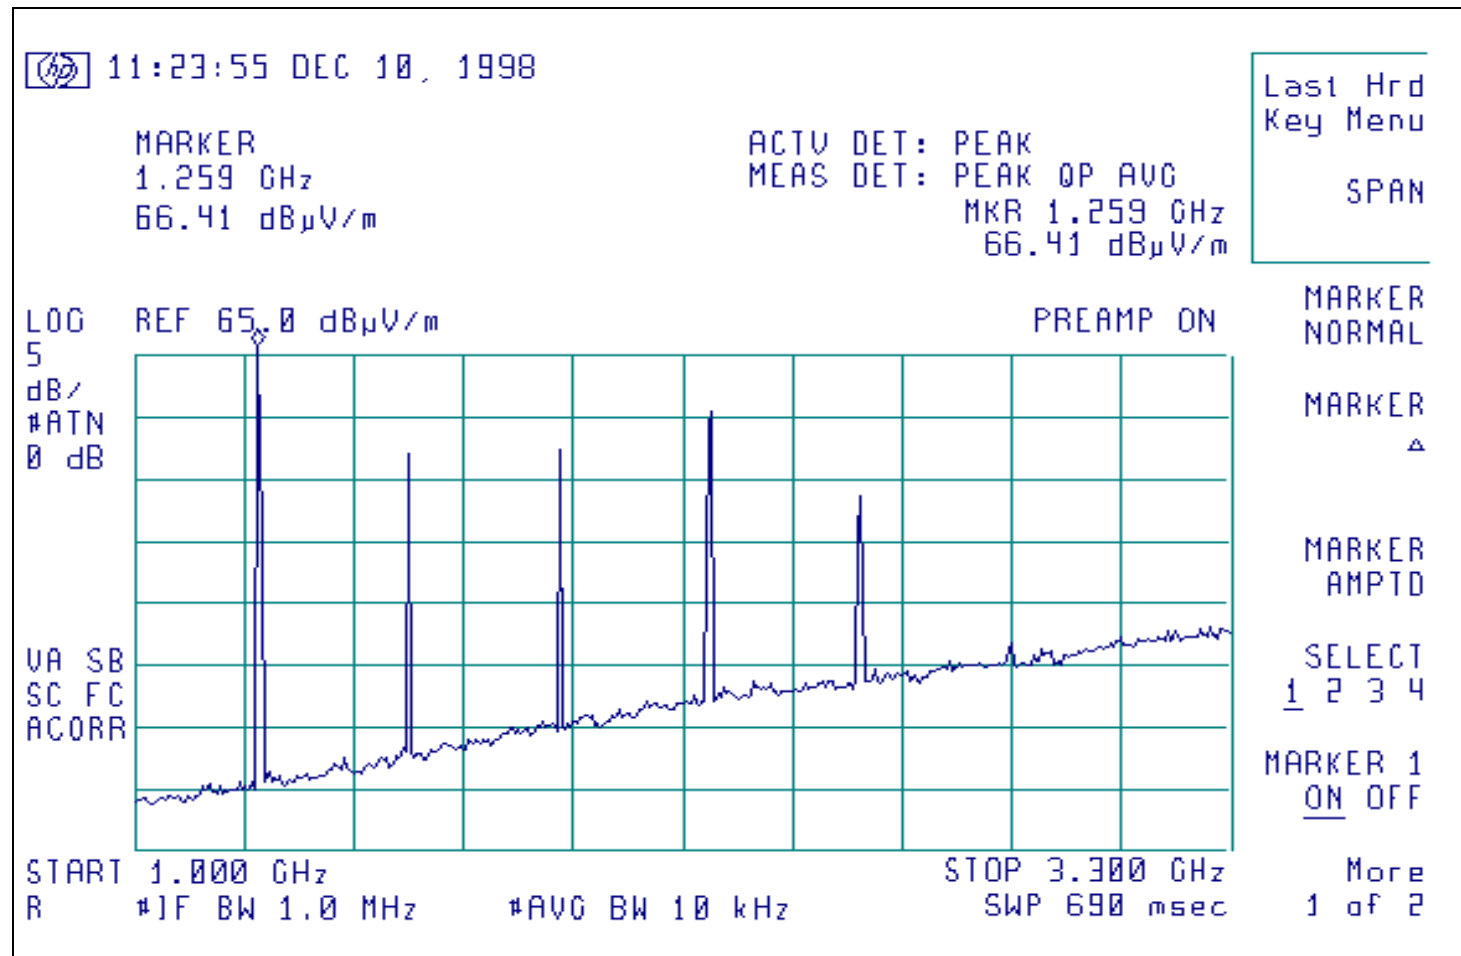



FCC ID: L2C0005T


315 MHz Transmitter, emissions below 1 GHZ, horizontal polarity

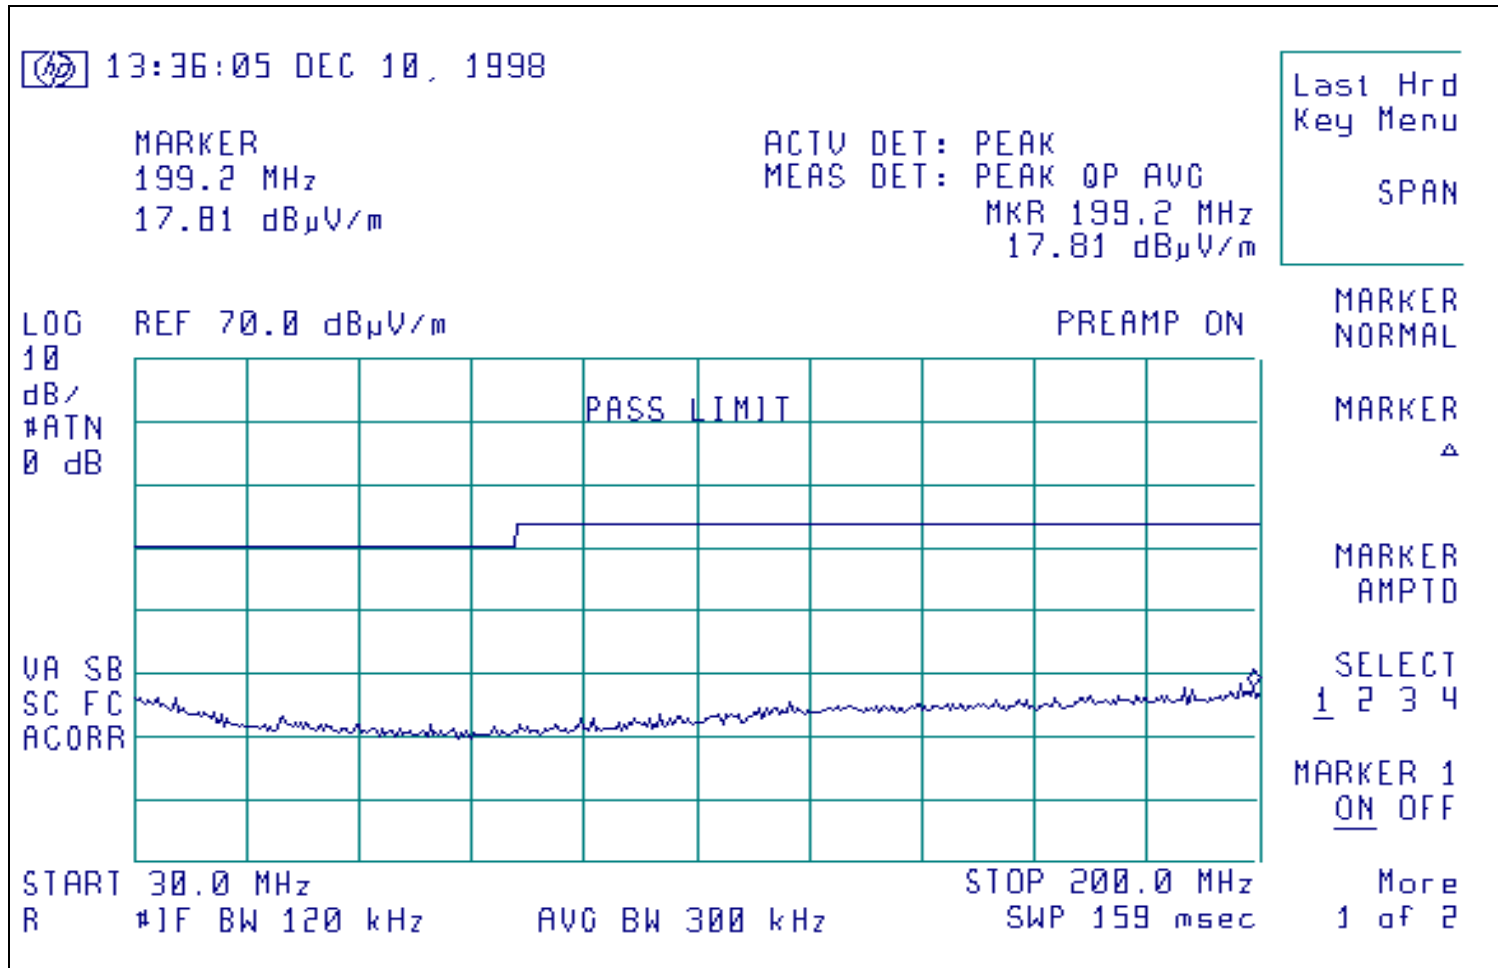




FCC ID: L2C0005T

315 MHz Transmitter, occupied bandwidth

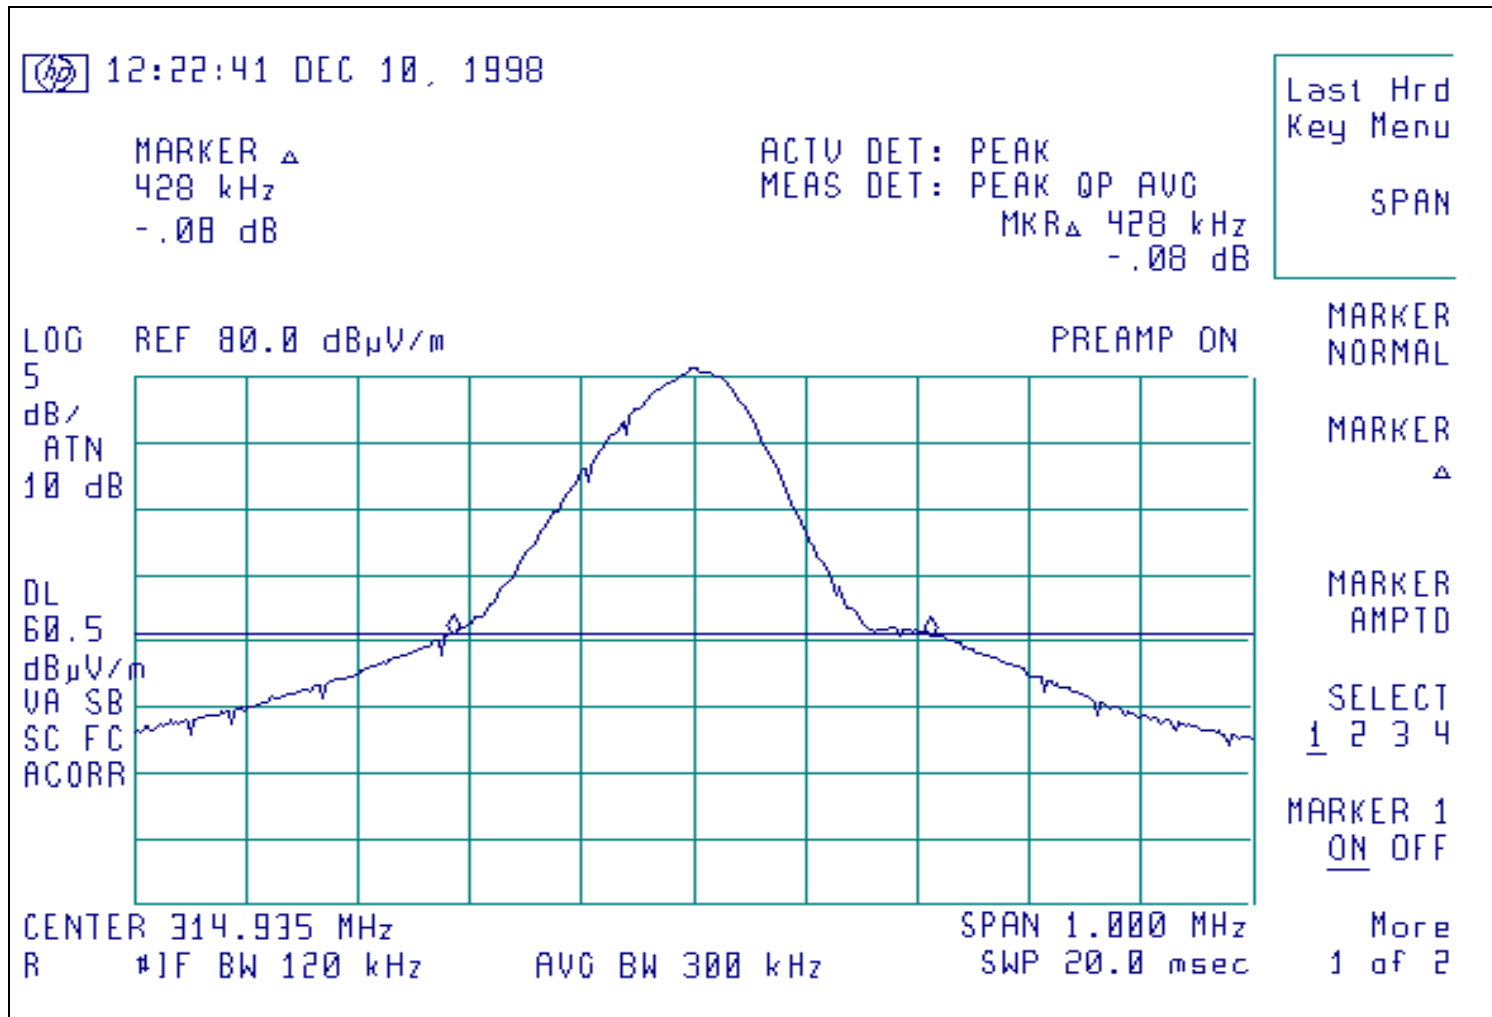




FCC ID: L2C0005T

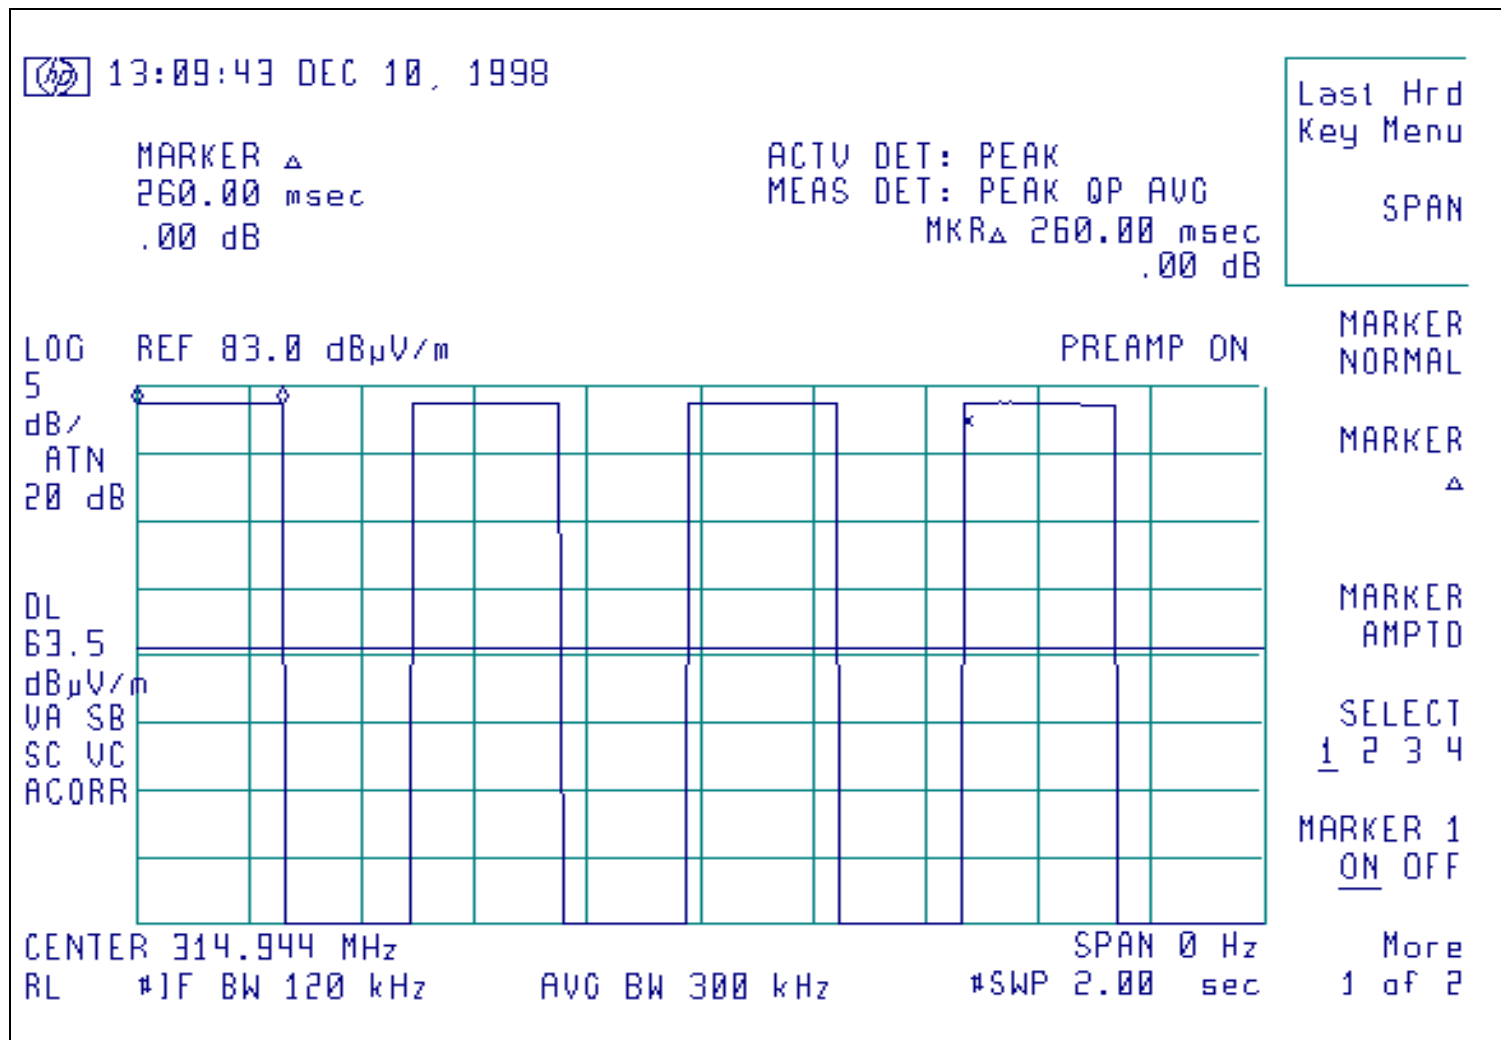315 MHz Transmitter duty cycle, showing repeating packets



FCC ID: L2C0005T

315 MHz Transmitter duty cycle, 100 millisecond period

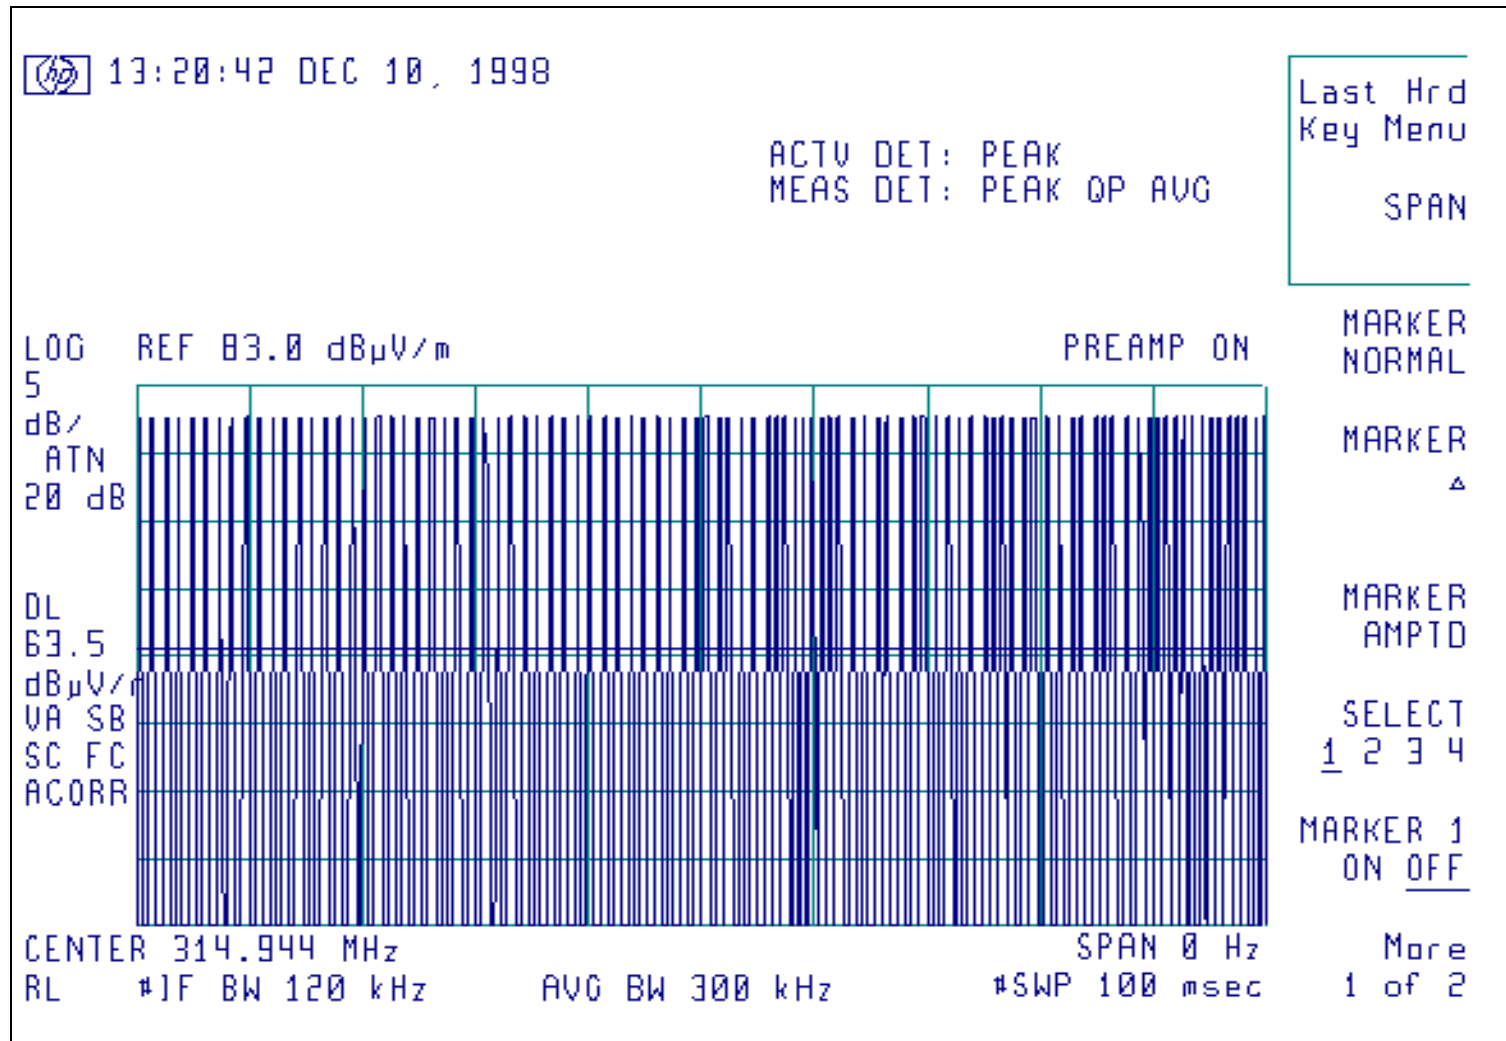



FCC ID: L2C0005T

315 MHz Transmitter duty cycle, 20 millisecond period

