

# TEST REPORT

Applicant Name: Shenzhen Neutop Optoelectronics Co., Ltd  
Address: 502, BLDG 4, Pingshan minQi Technology Park, No. 65 Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen China  
Report Number: 2401A63533E-RF-00C  
FCC ID: 2BEGB-YX07

## Test Standard (s)

FCC PART 15.407

## Sample Description

Product Type: Projector  
Model No.: D005  
Multiple Model(s) No.: D003, D004  
Trade Mark: N/A  
Date Received: 2024-12-04  
Issue Date: 2025-05-19

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Allen Bai

Allen Bai  
RF Engineer

Approved By:

Nancy Wang

Nancy Wang  
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>3</b>
<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>12</b>
<b>REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>14</b>
CONDUCTED EMISSIONS .....	14
UNDESIRABLE EMISSION.....	16
26 dB & 6dB EMISSION BANDWIDTH .....	20
CONDUCTED TRANSMITTER OUTPUT POWER.....	22
POWER SPECTRAL DENSITY .....	23
DUTY CYCLE .....	24
<b>ANTENNA REQUIREMENT .....</b>	<b>25</b>
<b>TEST DATA AND RESULTS .....</b>	<b>26</b>
CONDUCTED EMISSIONS .....	26
UNDESIRABLE EMISSION.....	29
RF CONDUCTED DATA .....	135
<b>RF EXPOSURE EVALUATION .....</b>	<b>136</b>
<b>EUT PHOTOGRAPHS.....</b>	<b>138</b>
<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>139</b>

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401A63533E-RF-00C	Original Report	2025-05-19

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>Product</b>	Projector
<b>Tested Model</b>	D005
<b>Multiple Model(s)</b>	D003, D004
<b>Frequency Range</b>	5150-5250MHz; 5725-5850MHz
<b>Mode</b>	802.11a/n20/n40/ac20/ac40
<b>Maximum Conducted Average Output Power</b>	5150-5250MHz: 12.51dBm; 5725-5850MHz: 19.96dBm
<b>Modulation Technique</b>	OFDM
<b>Antenna Specification<sup>#</sup></b>	5150-5250MHz :ANT0:4.22dBi,ANT1:1.98dBi 5725-5850MHz: ANT0:4.83dBi,ANT1:1.67dBi (provided by the applicant)
<b>Voltage Range</b>	DC 29V from adapter
<b>Sample serial number</b>	2VID-1 for Conducted and Radiated Emissions Test 2VID-7 for RF Conducted Test (Assigned by BACL, Shenzhen)
<b>Sample/EUT Status</b>	Good condition
<b>Adapter Information</b>	Model:SOY-2900380-410-B Input:100-240V~50/60Hz 2.5A Max Output:29.0V=3.8A 110.2W
Note: The Multiple models are electrically identical with the test model except for model name and colors. Please refer to the declaration letter <sup>#</sup> for more detail, which was provided by manufacturer.	

Antenna	Antenna Manufacture	Antenna Type	Input impedance( Ω )	Frequency Range(MHz)	Antenna Gain
5G ANT0	Shenzhen Neutop Optoelectronics Co., Ltd	FPC	50	5150-5250	4.22dBi
				5725-5850	4.83dBi
5G ANT1		FPC	50	5150-5250	1.98dBi
				5725-5850	1.67dBi

Note:The system supports 2T2R (CDD) modes at 802.11n/ac modes. Per KDB 662911 D01 Multiple Transmitter Output v02r01:

CDD Mode:

For power measurements:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$

directional gain=4.22dBi for 5150-5250 MHz

directional gain=4.83dBi for 5725-5850 MHz

For power spectral density (PSD) measurements:

Array Gain =  $10 \log(N_{ANT}/N_{ss})$  dB.

directional gain=4.22dBi+3dB=7.22 dBi for 5150-5250 MHz

directional gain=4.83dBi+3dB=7.83 dBi for 5725-5850 MHz

**Objective**

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The device support 802.11a/n ht20/n ht40/ac vht20/ac vht40, the 802.11 n ht20/n ht40 were reduced since the identical parameters with 802.11ac vht20 and vht40.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20 mode: channel 36, 40, 48 were tested;

For 802.11ac40 mode: channel 38, 46 were tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
/	/	165	5825

For 802.11a/ac20 mode: channel 149, 157, 165 were tested;

For 802.11ac40 mode: channel 151, 159 were tested.

### EUT Exercise Software

Exercise Software <sup>#</sup>	Secure CRT			
5150-5250 MHz Band				
Mode	Test Channels	Data rate	Power Level <sup>#</sup>	
			ANT 0	ANT 1
802.11a	Low	6Mbps	10	12
	Middle	6Mbps	10	12
	High	6Mbps	10	12
802.11ac vht20	Low	MCS0	9	9
	Middle	MCS0	9	9
	High	MCS0	9	9
802.11ac vht40	Low	MCS0	11	11
	High	MCS0	11	11

5725-5850 MHz Band				
Mode	Test Channels	Data rate	Power Level <sup>#</sup>	
			ANT 0	ANT 1
802.11a	Low	6Mbps	17	17
	Middle	6Mbps	17	17
	High	6Mbps	17	17
802.11ac vht20	Low	MCS0	17	17
	Middle	MCS0	17	17
	High	MCS0	17	17
802.11ac vht40	Low	MCS0	17	17
	High	MCS0	17	17

Note:

1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac modes.
3. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
OUPU	Receptacle	PDU-OP1606K	6971041358020
Vivo	Earphone	XE160	Unknown
Dell	Mouse	MS116t	Unknown
Dell	Notebook	Latitude 7280	B0CB5M2
Sandisk	USB disk	CZ73-64G	Unknown


### External I/O Cable

Cable Description	Length (m)	From Port	To
Shielded un-detachable DC cable	1.2	EUT	Adapter
Unshielded detachable AC cable	1.5	Adapter	LISN/Receptacle
Unshielded un-detachable earphone cable	1.0	EUT	Earphone
Unshielded un-detachable USB cable	1.5	EUT	Mouse
Unshielded detachable HDMI cable	2	EUT	Notebook




## Block Diagram of Test Setup


For Conducted Emissions:

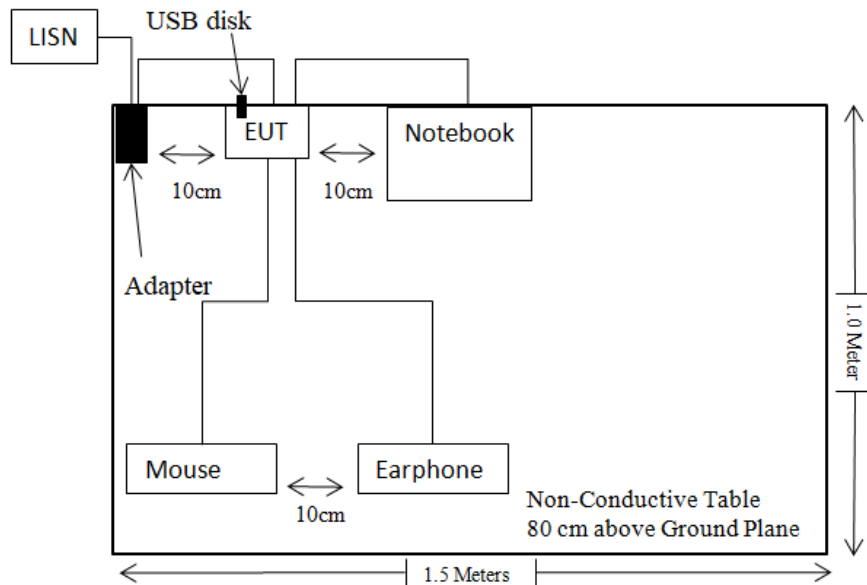

For Radiated Emissions below 1GHz:

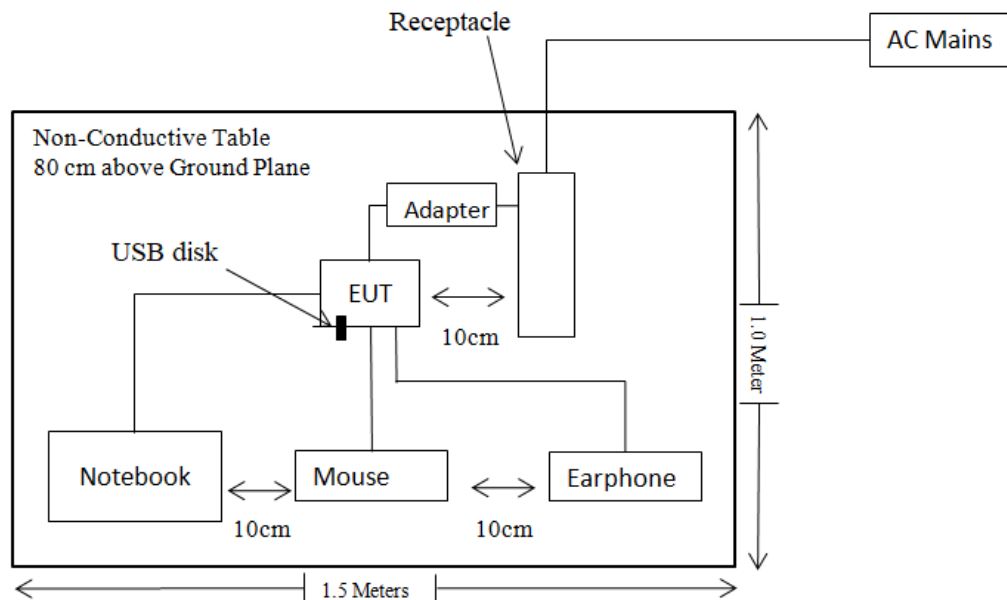

For Radiated Emissions above 1GHz:

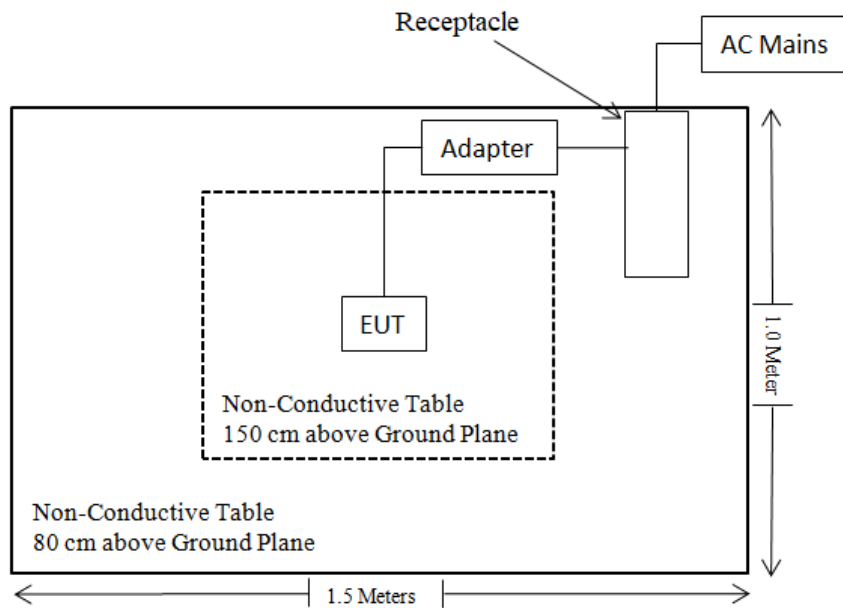

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Not Applicable
C63.10 §11.6	Duty Cycle	/
§15.247 (i), §1.1307 (b) (3) & §2.1091	Maximum Permissible Exposure(MPE)	Compliant

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is xx dBm $\leq$ 27dBm (500mW).

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


## REQUIREMENTS AND TEST PROCEDURES

### Conducted Emissions

#### Applicable Standard

FCC §15.207, §15.407(b) (6)

#### EUT Setup

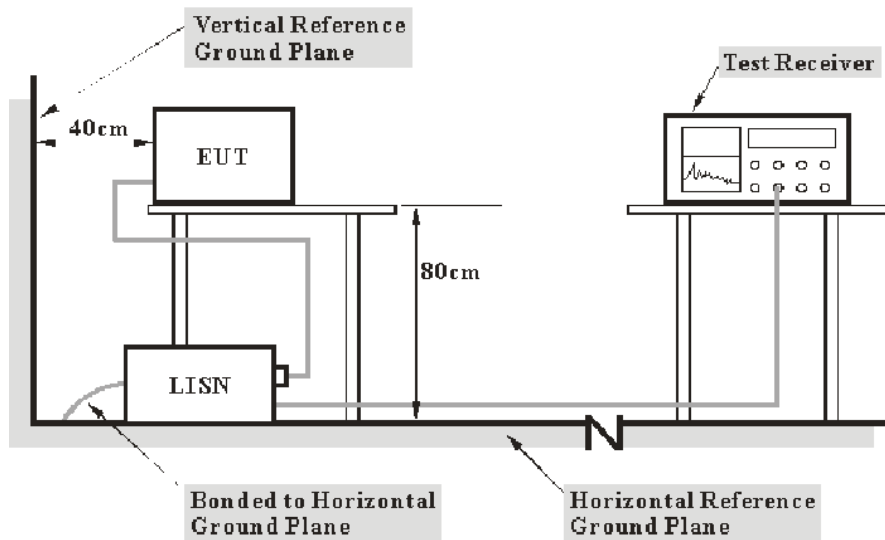

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

#### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

**Factor & Over Limit Calculation**

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

## Undesirable Emission

### Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

### EUT Setup

9 kHz-30MHz:

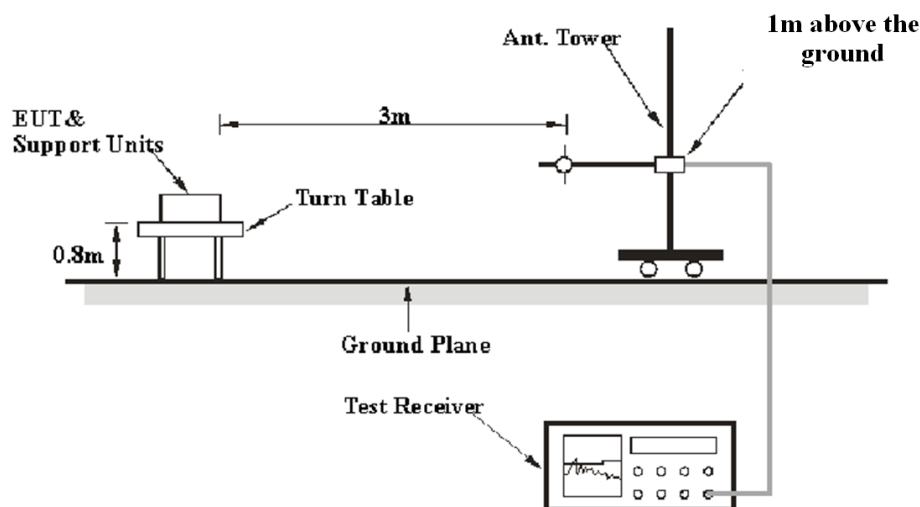

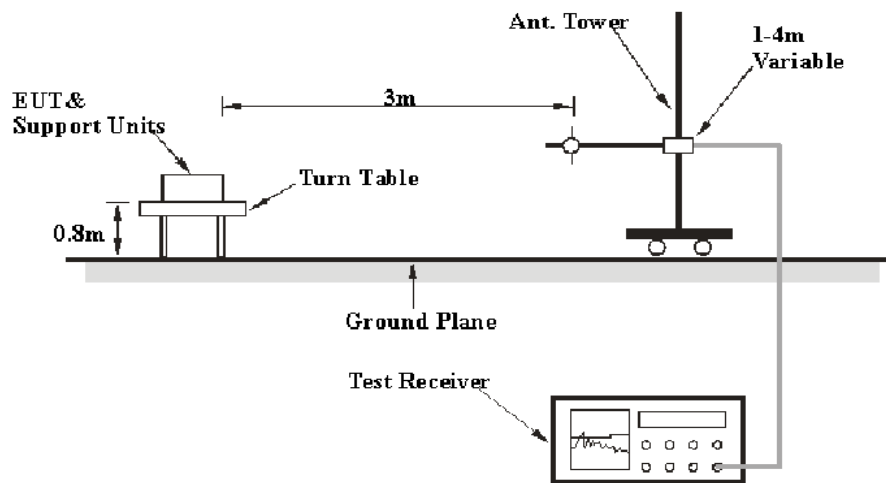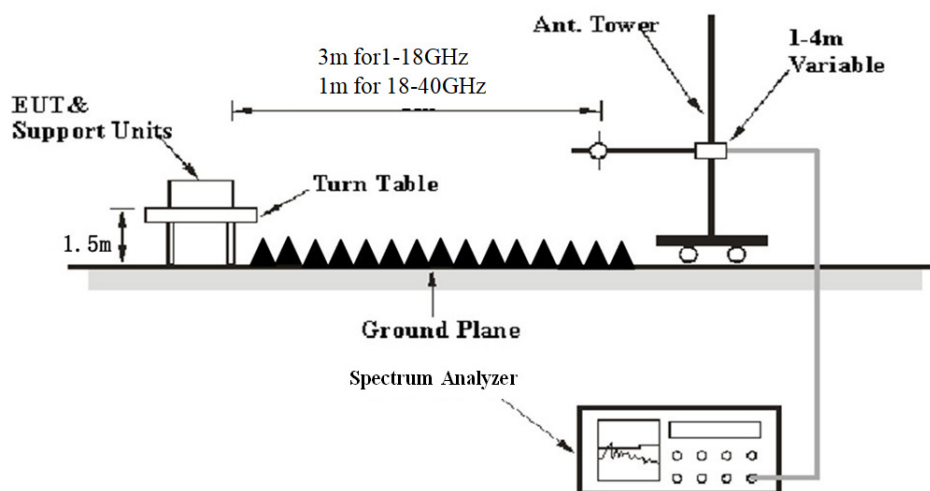

**30MHz-1GHz:****Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

### Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left( \frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB $\mu$ V/m
$E_{\text{Meas}}$	is the field strength of the emission at the measurement distance, in dB $\mu$ V/m
$d_{\text{Meas}}$	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is  $20 \cdot \log(1/3) = -9.5$  dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

### Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## 26 dB & 6dB Emission Bandwidth

### Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Procedure

According to KDB789033 D02 section II.C and section II.D

#### 1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


#### 3. 99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW/RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

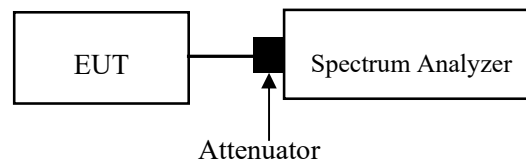

## Conducted Transmitter Output Power

### Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method PM-G should be applied

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

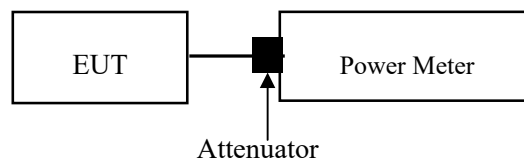

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

## Power Spectral Density

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle  $\geq 98\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle  $< 98\%$ , duty cycle variations exceed  $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

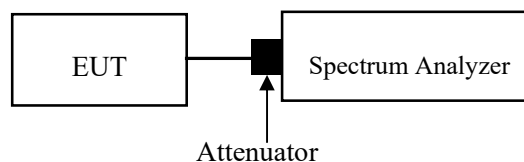

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


## Duty Cycle

### Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

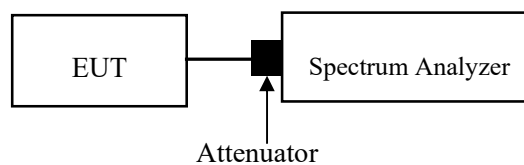



## **ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **Antenna Connector Construction**

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain<sup>#</sup> is ANT0:4.22dBi, ANT1:1.98dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result: Compliant**

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	21-26	Relative Humidity (%)	36-50
ATM Pressure (kPa)	101-103	Test engineer	Macy.shi
Test date	2024/12/31		
EUT operation mode	Transmitting(Maximum output power mode, Band4 802.11ac 40 Low Channel)		

## AC 120V 60 Hz, Line

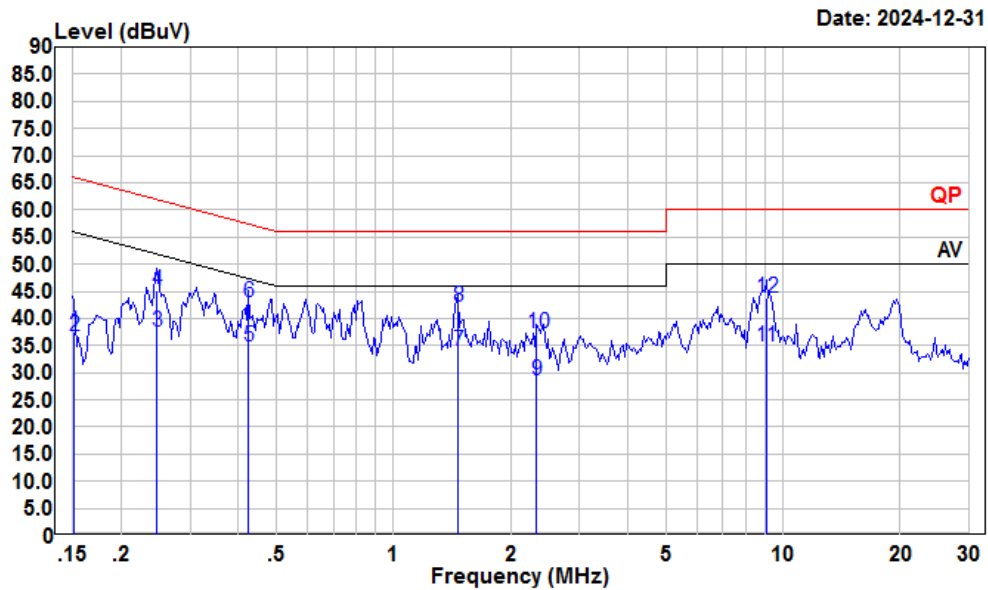

Condition: Line


Project : 2401A63533E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	17.11	37.64	10.40	10.13	55.91	-18.27	Average
2	0.152	16.17	36.70	10.40	10.13	65.91	-29.21	QP
3	0.247	17.11	37.54	10.35	10.08	51.86	-14.32	Average
4	0.247	24.59	45.02	10.35	10.08	61.86	-16.84	QP
5	0.424	14.58	34.93	10.24	10.11	47.37	-12.44	Average
6	0.424	22.72	43.07	10.24	10.11	57.37	-14.30	QP
7	1.464	13.50	34.10	10.44	10.16	46.00	-11.90	Average
8	1.464	21.50	42.10	10.44	10.16	56.00	-13.90	QP
9	2.334	8.19	28.69	10.32	10.18	46.00	-17.31	Average
10	2.334	16.88	37.38	10.32	10.18	56.00	-18.62	QP
11	9.059	14.50	34.87	10.17	10.20	50.00	-15.13	Average
12	9.059	23.37	43.74	10.17	10.20	60.00	-16.26	QP

## AC 120V 60 Hz, Neutral

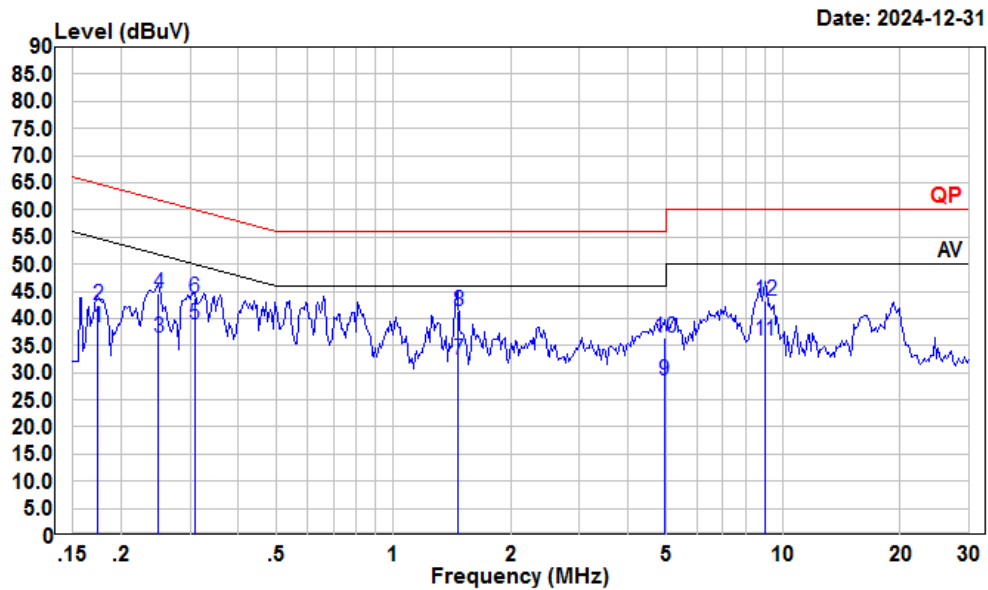

Condition: Neutral

Project : 2401A63533E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto


		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.174	17.75	38.26	10.41	10.10	54.77	-16.51	Average
2	0.174	21.98	42.49	10.41	10.10	64.77	-22.28	QP
3	0.249	15.71	36.44	10.65	10.08	51.78	-15.34	Average
4	0.249	23.75	44.48	10.65	10.08	61.78	-17.30	QP
5	0.308	18.12	38.92	10.69	10.11	50.02	-11.10	Average
6	0.308	23.01	43.81	10.69	10.11	60.02	-16.21	QP
7	1.464	12.06	32.41	10.19	10.16	46.00	-13.59	Average
8	1.464	20.88	41.23	10.19	10.16	56.00	-14.77	QP
9	4.952	8.02	28.60	10.40	10.18	46.00	-17.40	Average
10	4.952	15.77	36.35	10.40	10.18	56.00	-19.65	QP
11	8.964	15.11	35.85	10.54	10.20	50.00	-14.15	Average
12	8.964	22.52	43.26	10.54	10.20	60.00	-16.74	QP

**Undesirable Emission**

<b>Temperature (°C)</b>	23.5-24.2	<b>Relative Humidity (%)</b>	42.3-50.8
<b>ATM Pressure (kPa):</b>	101.4	<b>Test engineer:</b>	Anson Su & Zenos Qiao
<b>Test date:</b>	2024/12/24-2024/12/27		
<b>EUT operation mode:</b>	Below 1GHz: Transmitting(Maximum output power mode, Band4 802.11ac 40 Low Channel) Above 1GHz: Transmitting		
<b>Note:</b>	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 30MHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.		

Below 1GHz:


9kHz-150kHz

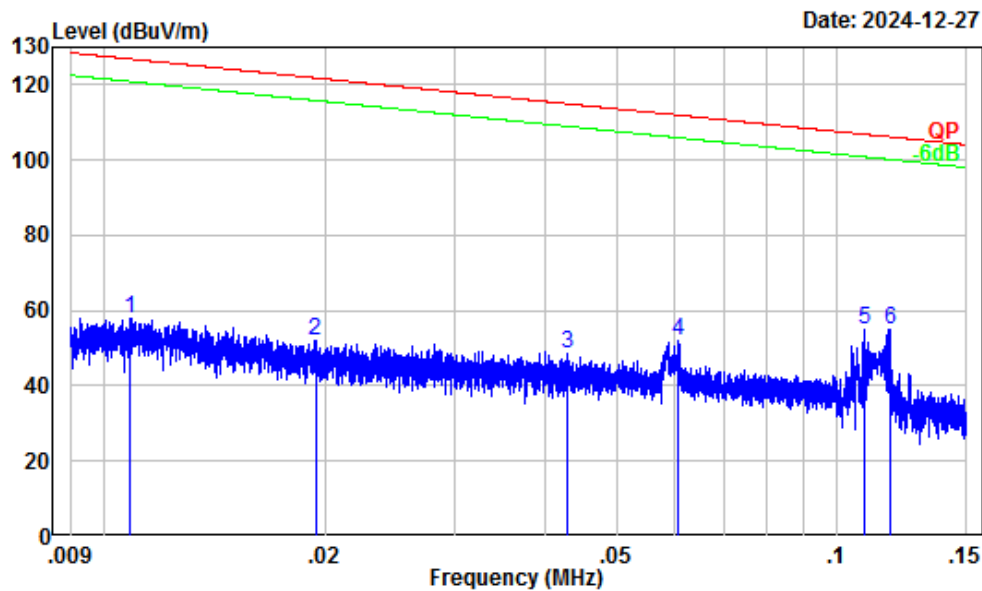

Site : Chamber A  
Condition : 3m  
Project Number: 2401A63533E-RF  
Test Mode : 5G WIFI Transmitting  
Setting PK RBW: 0.3KHz VBW:1KHz  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.14	25.92	58.06	126.90	-68.84	Peak
2	0.02	30.51	21.30	51.81	121.84	-70.03	Peak
3	0.04	27.15	21.64	48.79	114.96	-66.17	Peak
4	0.06	25.32	26.63	51.95	111.93	-59.98	Peak
5	0.11	21.46	33.70	55.16	106.85	-51.69	Peak
6	0.12	20.94	33.87	54.81	106.17	-51.36	Peak


## 150kHz-30MHz

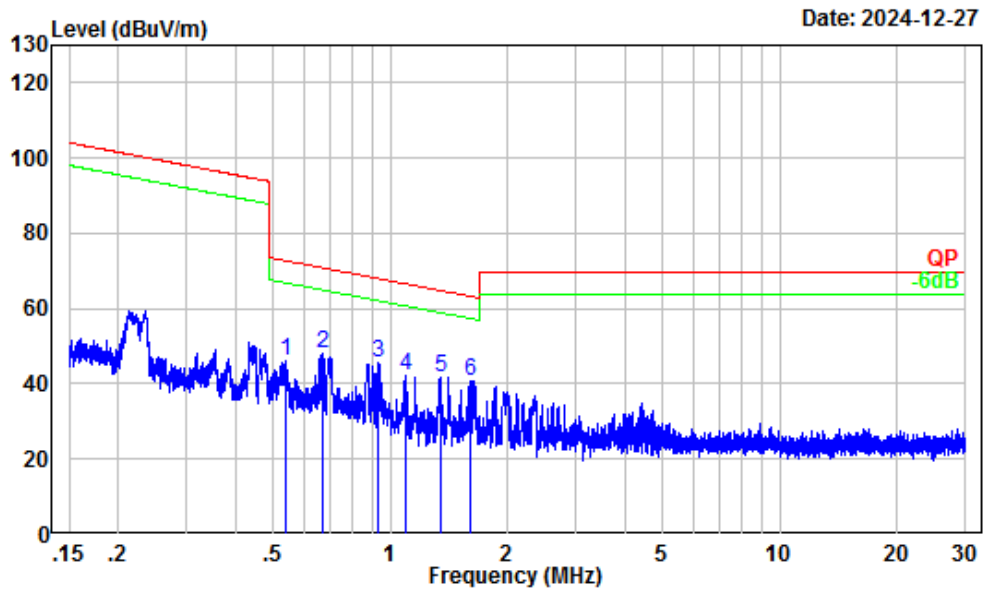

Site : Chamber A  
Condition : 3m  
Project Number: 2401A63533E-RF  
Test Mode : 5G WIFI Transmitting  
Setting PK RBW: 10KHz VBW:30KHz  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.54	5.91	40.24	46.15	72.94	-26.79	Peak
2	0.67	4.25	43.87	48.12	70.97	-22.85	Peak
3	0.93	1.74	43.80	45.54	68.13	-22.59	Peak
4	1.10	0.92	41.50	42.42	66.64	-24.22	Peak
5	1.34	0.24	41.47	41.71	64.86	-23.15	Peak
6	1.60	-0.48	41.31	40.83	63.30	-22.47	Peak

## 30MHz-1GHz\_Horizontal

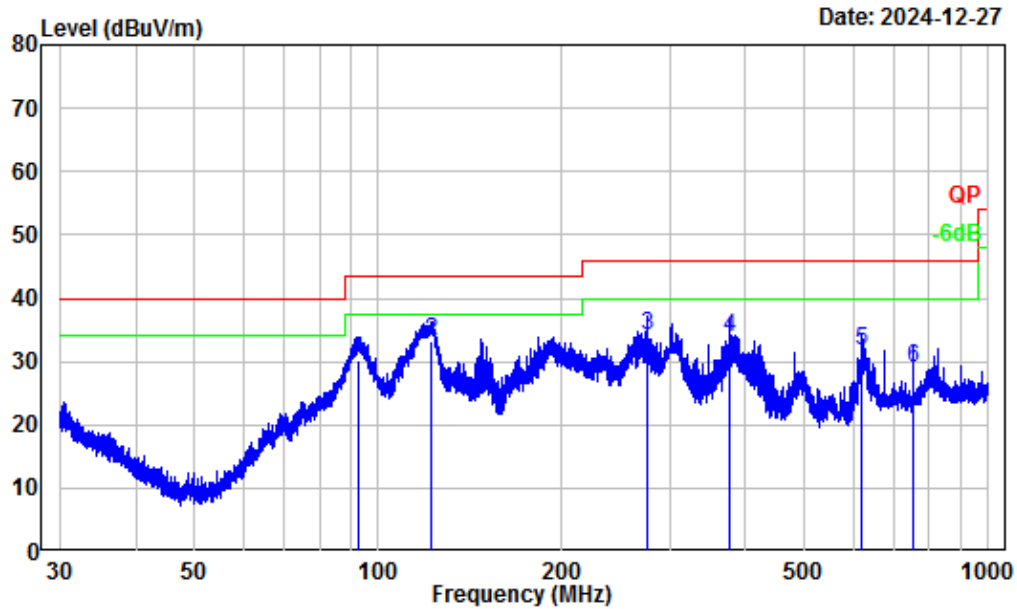


Site : Chamber A  
Condition : 3m Horizontal  
Project Number : 2401A63533E-RF  
Test Mode : 5G WIFI Transmitting  
Detector: Peak RBW/VBW: 100/300kHz  
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	92.50	-17.75	48.08	30.33	43.50	-13.17	QP
2	122.03	-11.24	44.42	33.18	43.50	-10.32	QP
3	276.12	-11.32	45.44	34.12	46.00	-11.88	QP
4	376.27	-9.25	43.20	33.95	46.00	-12.05	QP
5	620.17	-4.85	36.41	31.56	46.00	-14.44	QP
6	752.41	-2.83	31.95	29.12	46.00	-16.88	QP



## 30MHz-1GHz\_Vertical

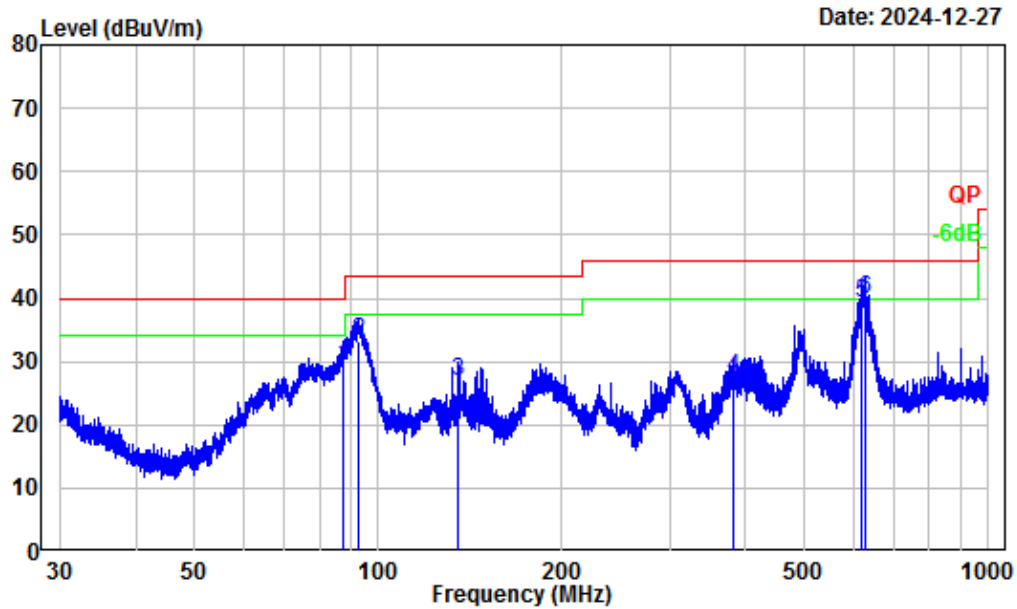

Site : Chamber A  
Condition : 3m Vertical  
Project Number : 2401A63533E-RF  
Test Mode : 5G WIFI Transmitting  
Detector: Peak RBW/VBW: 100/300kHz  
Tester : Anson Su

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Line	Limit	
			dBuV	dBuV/m	dBuV/m	dB
1	87.49	-18.08	47.30	29.22	40.00	-10.78 QP
2	92.67	-17.72	51.04	33.32	43.50	-10.18 QP
3	134.80	-11.48	38.27	26.79	43.50	-16.71 QP
4	381.75	-9.10	36.63	27.53	46.00	-18.47 QP
5	620.71	-4.83	44.20	39.37	46.00	-6.63 QP
6	630.31	-4.54	44.30	39.76	46.00	-6.24 QP

**Above 1GHz:****5150-5250 MHz**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a_ANT0							
Low Channel							
10360	55.89	PK	H	2.53	58.42	68.2	-9.78
10360	56.78	PK	V	2.53	59.31	68.2	-8.89
Middle Channel							
10400	55.66	PK	H	2.55	58.21	68.2	-9.99
10400	56.49	PK	V	2.55	59.04	68.2	-9.16
High Channel							
10480	55.57	PK	H	2.25	57.82	68.2	-10.38
10480	56.44	PK	V	2.25	58.69	68.2	-9.51
802.11a_ANT1							
Low Channel							
10360	55.12	PK	H	2.53	57.65	68.2	-10.55
10360	55.99	PK	V	2.53	58.52	68.2	-9.68
Middle Channel							
10400	54.56	PK	H	2.55	57.11	68.2	-11.09
10400	55.34	PK	V	2.55	57.89	68.2	-10.31
High Channel							
10480	53.87	PK	H	2.25	56.12	68.2	-12.08
10480	54.71	PK	V	2.25	56.96	68.2	-11.24
802.11ac20							
Low Channel							
10360	57.57	PK	H	2.53	60.10	68.2	-8.10
10360	58.46	PK	V	2.53	60.99	68.2	-7.21
Middle Channel							
10400	57.25	PK	H	2.55	59.8	68.2	-8.4
10400	58.08	PK	V	2.55	60.63	68.2	-7.57
High Channel							
10480	56.94	PK	H	2.25	59.19	68.2	-9.01
10480	57.79	PK	V	2.25	60.04	68.2	-8.16
802.11ac40							
Low Channel							
10380	54.52	PK	H	2.54	57.06	68.2	-11.14
10380	55.33	PK	V	2.54	57.87	68.2	-10.33
High Channel							
10460	54.15	PK	H	2.32	56.47	68.2	-11.73
10460	54.97	PK	V	2.32	57.29	68.2	-10.91

**5725-5850MHz**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a_ANT0							
Low Channel							
11490	51.06	PK	H	3.54	54.60	74	-19.40
11490	38.68	AV	H	3.54	42.22	54	-11.78
11490	52.29	PK	V	3.54	55.83	74	-18.17
11490	39.37	AV	V	3.54	42.91	54	-11.09
Middle Channel							
11570	52.97	PK	H	3.3	56.27	74	-17.73
11570	40.81	AV	H	3.3	44.11	54	-9.89
11570	54.20	PK	V	3.3	57.50	74	-16.50
11570	41.63	AV	V	3.3	44.93	54	-9.07
High Channel							
11650	55.02	PK	H	3.42	58.44	74	-15.56
11650	42.94	AV	H	3.42	46.36	54	-7.64
11650	56.25	PK	V	3.42	59.67	74	-14.33
11650	43.76	AV	V	3.42	47.18	54	-6.82
802.11a_ANT1							
Low Channel							
11490	51.72	PK	H	3.54	55.26	74	-18.74
11490	39.67	AV	H	3.54	43.21	54	-10.79
11490	52.99	PK	V	3.54	56.53	74	-17.47
11490	40.45	AV	V	3.54	43.99	54	-10.01
Middle Channel							
11570	53.05	PK	H	3.3	56.35	74	-17.65
11570	41.11	AV	H	3.3	44.41	54	-9.59
11570	54.32	PK	V	3.3	57.62	74	-16.38
11570	41.94	AV	V	3.3	45.24	54	-8.76
High Channel							
11650	54.43	PK	H	3.42	57.85	74	-16.15
11650	42.54	AV	H	3.42	45.96	54	-8.04
11650	55.61	PK	V	3.42	59.03	74	-14.97
11650	43.37	AV	V	3.42	46.79	54	-7.21

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11ac20							
Low Channel							
11490	52.18	PK	H	3.54	55.72	74	-18.28
11490	39.32	AV	H	3.54	42.86	54	-11.14
11490	53.56	PK	V	3.54	57.10	74	-16.90
11490	41.13	AV	V	3.54	44.67	54	-9.33
Middle Channel							
11570	54.57	PK	H	3.3	57.87	74	-16.13
11570	41.64	AV	H	3.3	44.94	54	-9.06
11570	55.98	PK	V	3.3	59.28	74	-14.72
11570	42.46	AV	V	3.3	45.76	54	-8.24
High Channel							
11650	57.15	PK	H	3.42	60.57	74	-13.43
11650	44.87	AV	H	3.42	48.29	54	-5.71
11650	58.69	PK	V	3.42	62.11	74	-11.89
11650	45.71	AV	V	3.42	49.13	54	-4.87
802.11ac40							
Low Channel							
11510	52.68	PK	H	3.53	56.21	74	-17.79
11510	40.46	AV	H	3.53	43.99	54	-10.01
11510	54.17	PK	V	3.53	57.70	74	-16.30
11510	41.29	AV	V	3.53	44.82	54	-9.18
High Channel							
11590	53.96	PK	H	3.21	57.17	74	-16.83
11590	43.34	AV	H	3.21	46.55	54	-7.45
11590	55.42	PK	V	3.21	58.63	74	-15.37
11590	44.15	AV	V	3.21	47.36	54	-6.64

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots:


Left Band edge\_Horizontal\_Peak\_802.11a\_ANT0

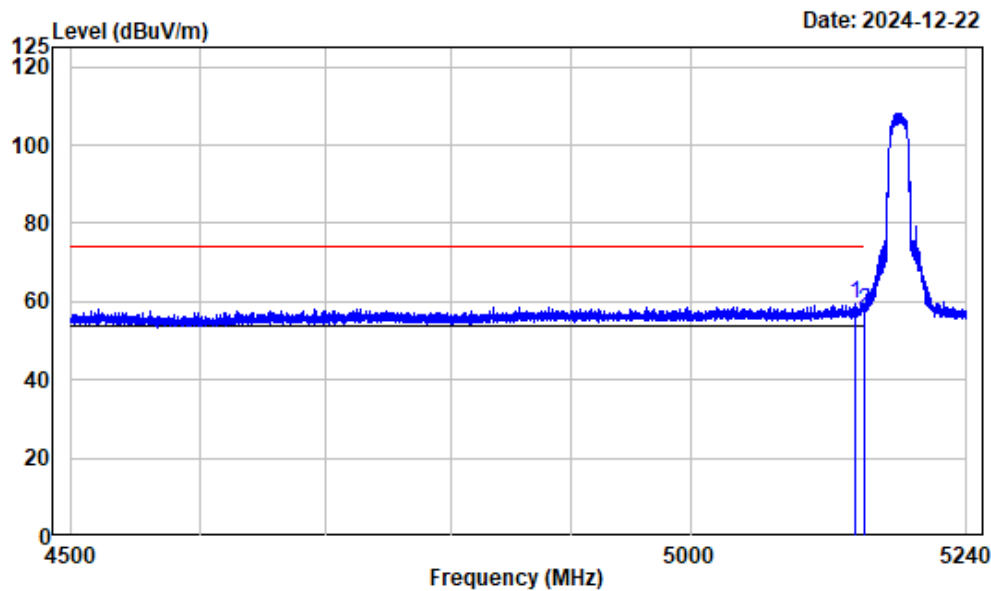

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5142.678	-7.46	67.09	59.63	74.00	-14.37 Peak
2	5150.000	-7.46	64.84	57.38	74.00	-16.62 Peak


Left Band edge\_Horizontal\_Average\_802.11a\_ANT0

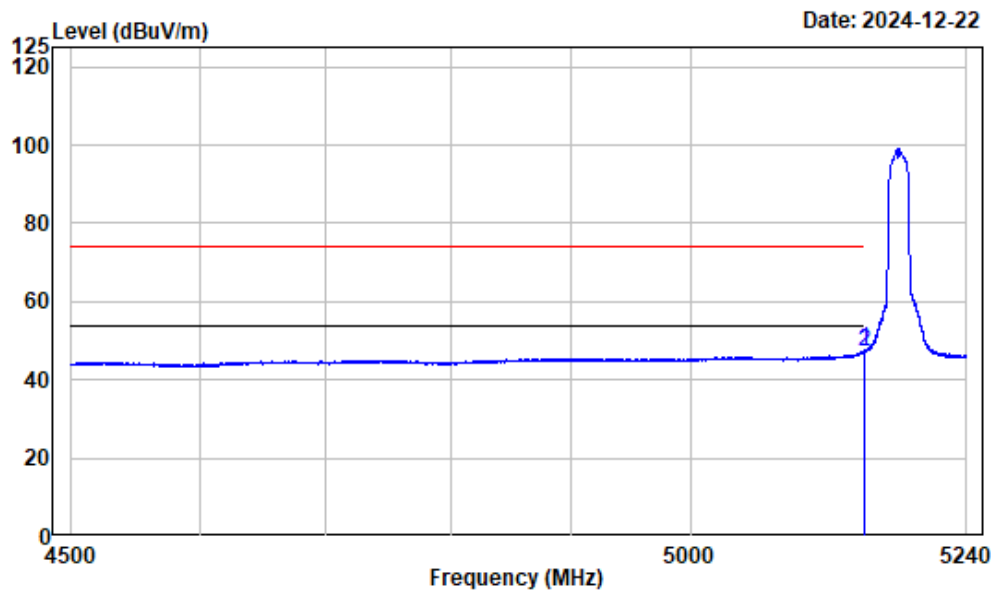

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.894	-7.46	55.25	47.79	54.00	-6.21 Average
2	5150.000	-7.46	54.66	47.20	54.00	-6.80 Average


Left Band edge\_Vertical\_Peak\_802.11a\_ANT0

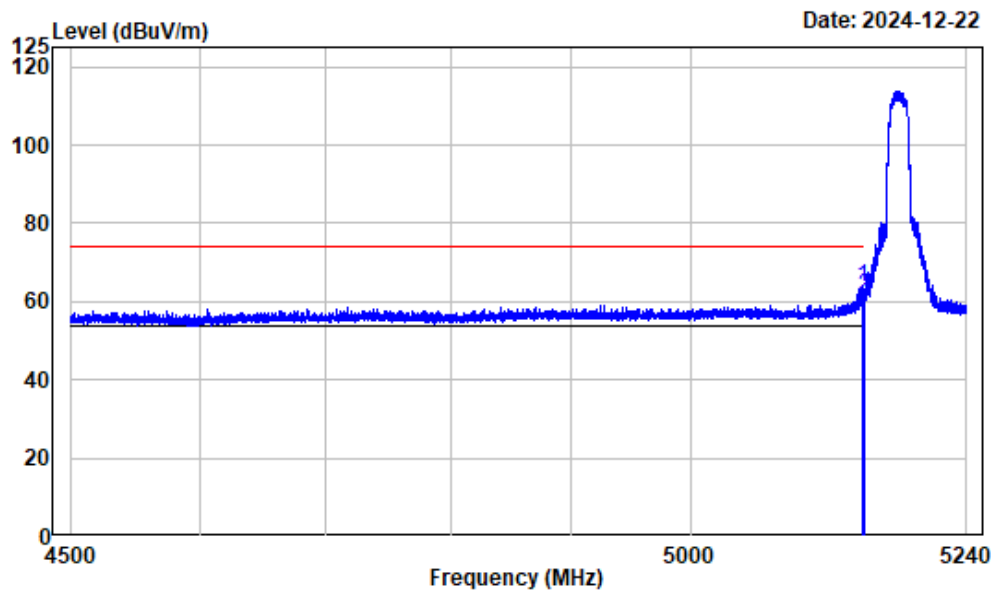

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.969	-7.46	71.32	63.86	74.00	-10.14 Peak
2	5150.000	-7.46	68.55	61.09	74.00	-12.91 Peak

Left Band edge\_Vertical\_Average\_802.11a\_ANT0

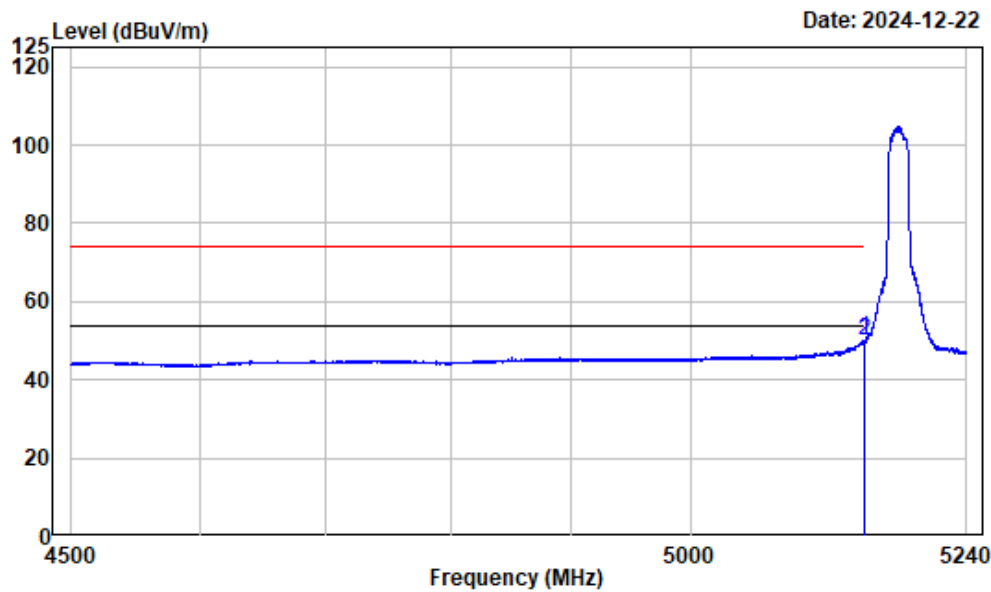


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.894	-7.46	57.87	50.41	54.00	-3.59 Average
2	5150.000	-7.46	57.33	49.87	54.00	-4.13 Average




Right Band edge\_Horizontal\_Peak\_802.11a\_ANT0

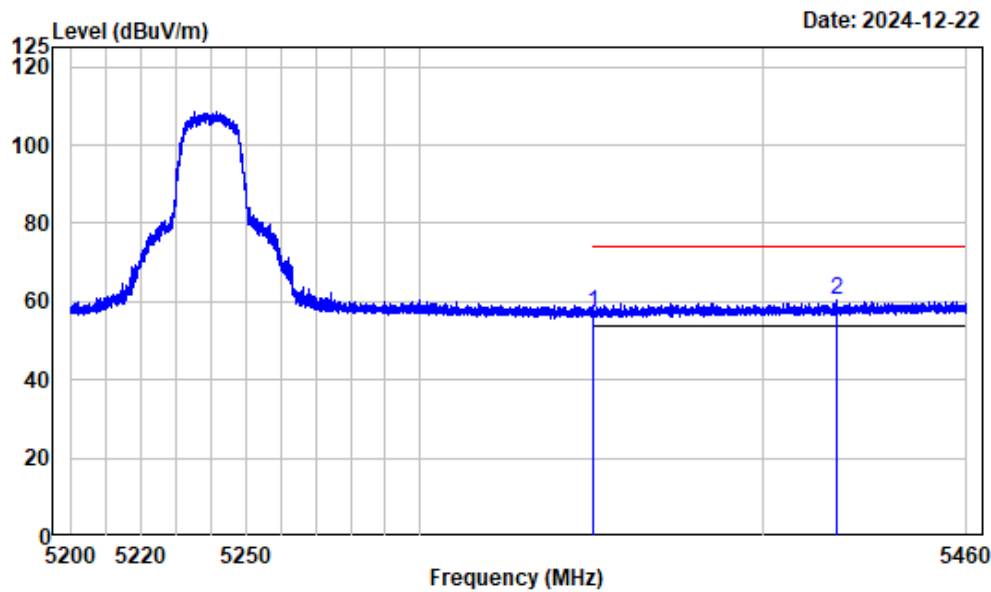

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.91	57.17	74.00	-16.83	Peak
2 5421.385	-6.48	66.67	60.19	74.00	-13.81	Peak


Right Band edge\_Horizontal\_Average\_802.11a\_ANT0

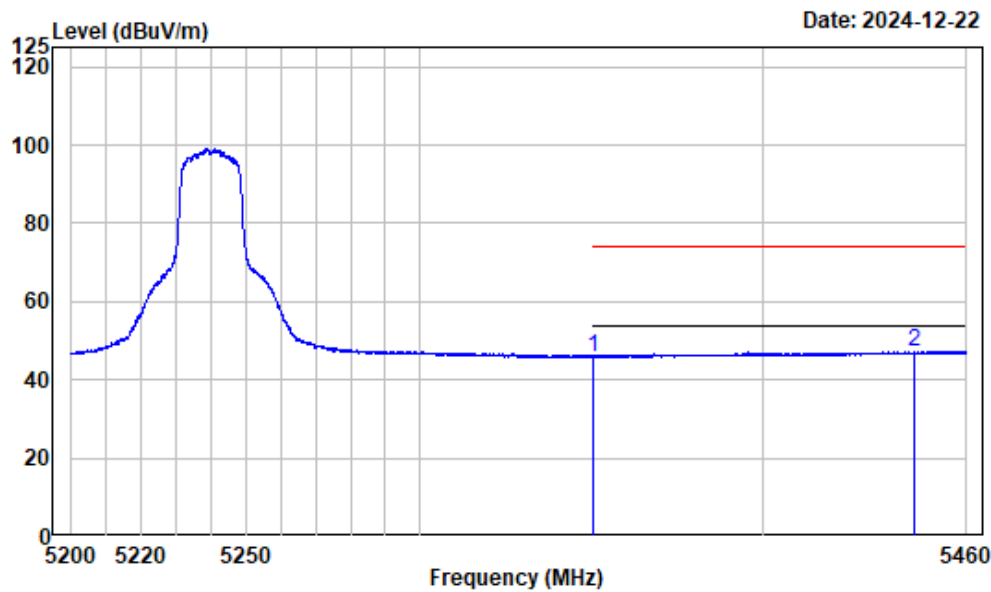

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.70	45.96	54.00	-8.04	Average
2 5444.463	-6.35	53.60	47.25	54.00	-6.75	Average


Right Band edge\_Vertical\_Peak\_802.11a\_ANT0

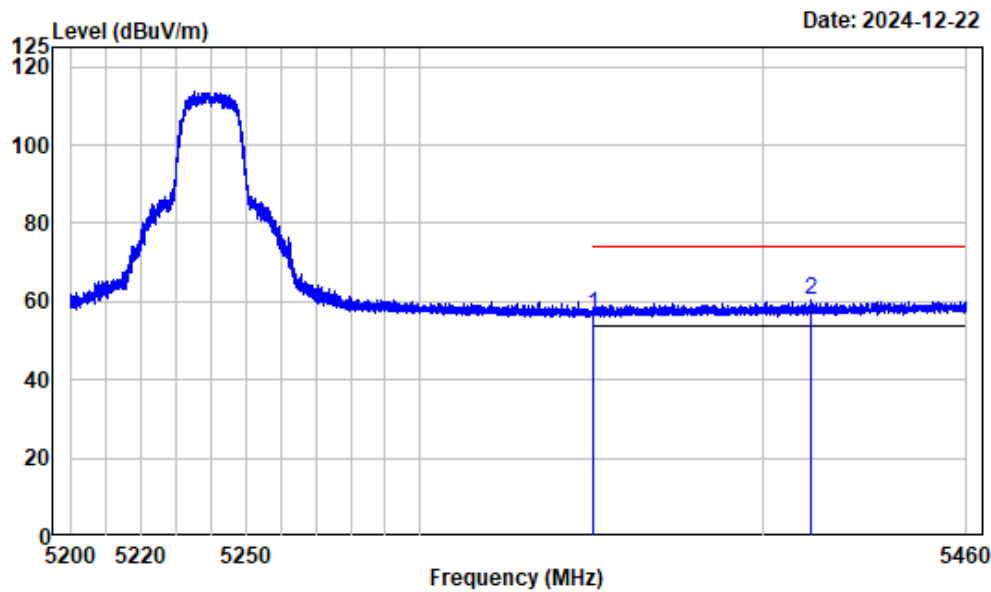

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.27	56.53	74.00	-17.47	Peak
2 5413.877	-6.51	66.72	60.21	74.00	-13.79	Peak


Right Band edge\_Vertical\_Average\_802.11a\_ANT0

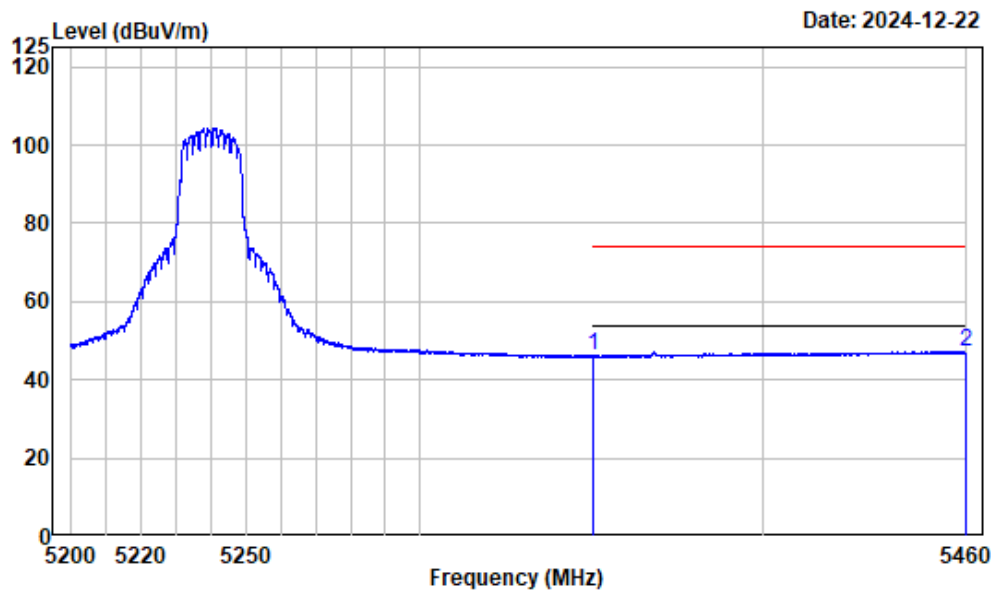

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.74	46.00	54.00	-8.00 Average
2	5459.805	-6.29	53.56	47.27	54.00	-6.73 Average


Left Band edge\_Horizontal\_Peak\_802.11a\_ANT1

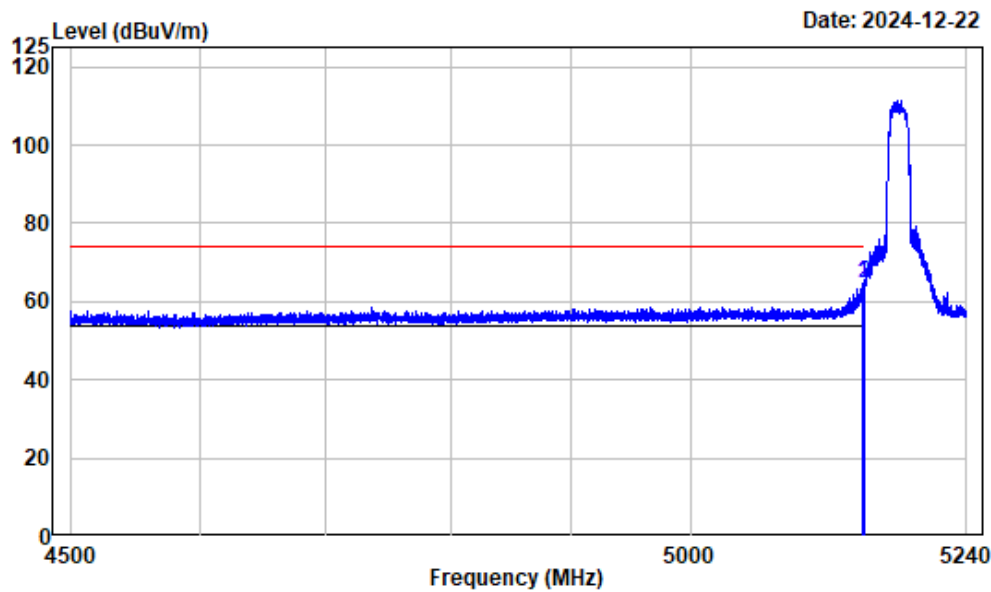

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.969	-7.46	72.31	64.85	74.00	-9.15 Peak
2	5150.000	-7.46	72.15	64.69	74.00	-9.31 Peak


Left Band edge\_Horizontal\_Average\_802.11a\_ANT1

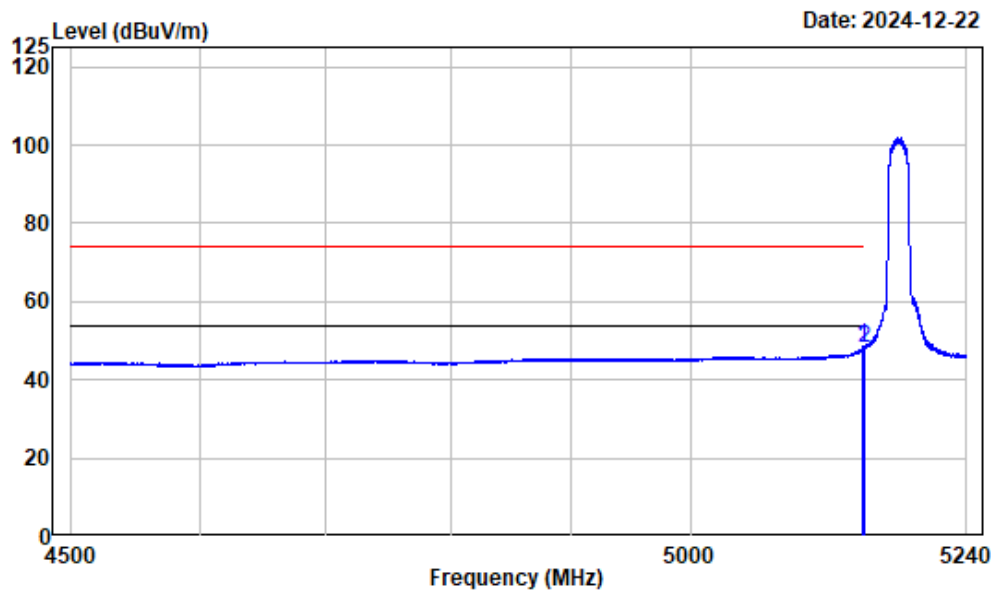

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.599	-7.46	55.84	48.38	54.00	-5.62 Average
2	5150.000	-7.46	55.80	48.34	54.00	-5.66 Average


Left Band edge\_Vertical\_Peak\_802.11a\_ANT1

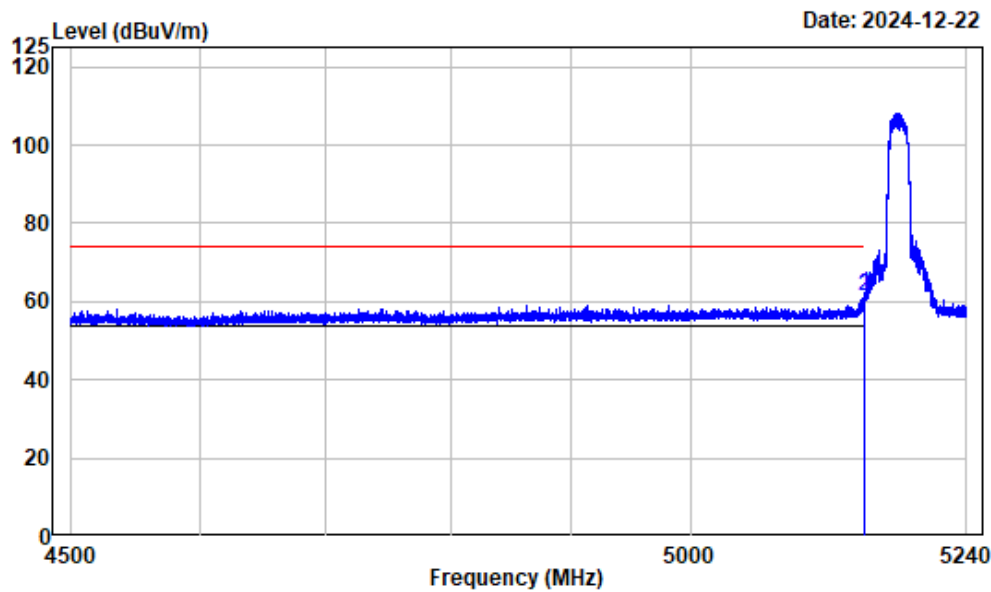

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.801	-7.46	69.10	61.64	74.00	-12.36 Peak
2	5150.000	-7.46	68.72	61.26	74.00	-12.74 Peak

Left Band edge\_Vertical\_Average\_802.11a\_ANT1

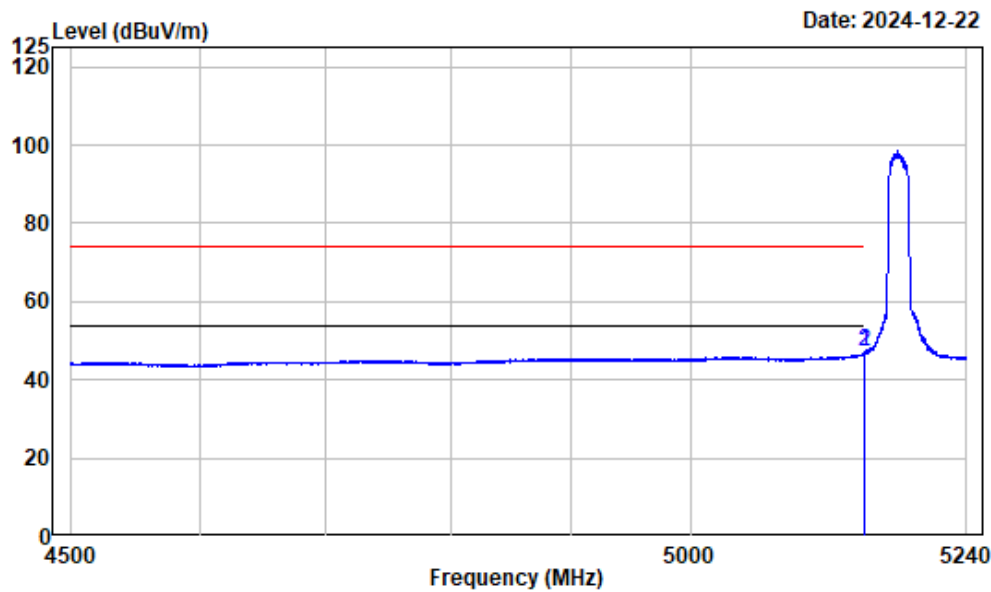


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.986	-7.46	54.67	47.21	54.00	-6.79 Average
2	5150.000	-7.46	54.55	47.09	54.00	-6.91 Average




Right Band edge\_Horizontal\_Peak\_802.11a\_ANT1

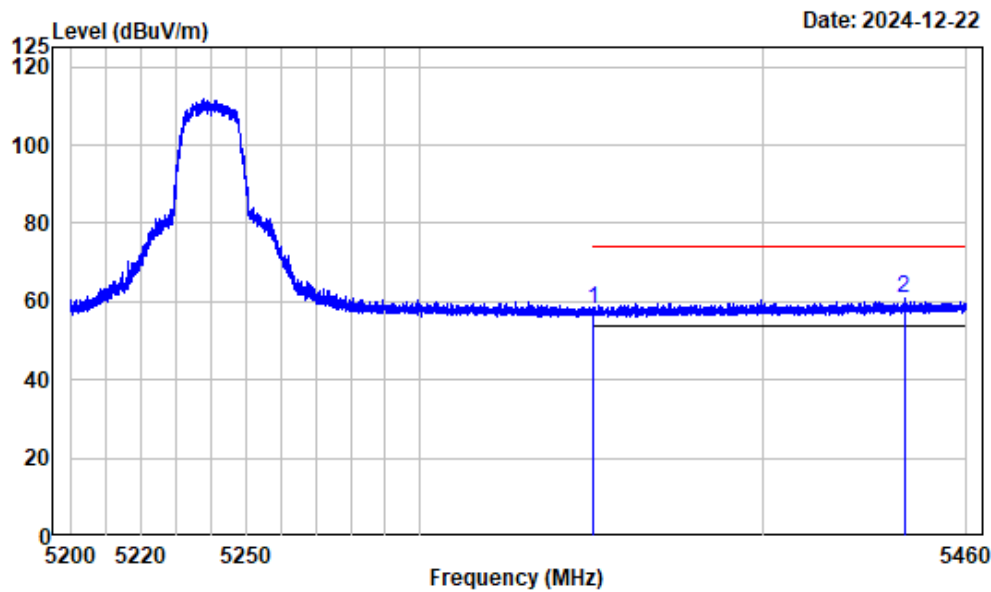

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.68	57.94	74.00	-16.06	Peak
2 5441.505	-6.38	67.01	60.63	74.00	-13.37	Peak


Right Band edge\_Horizontal\_Average\_802.11a\_ANT1

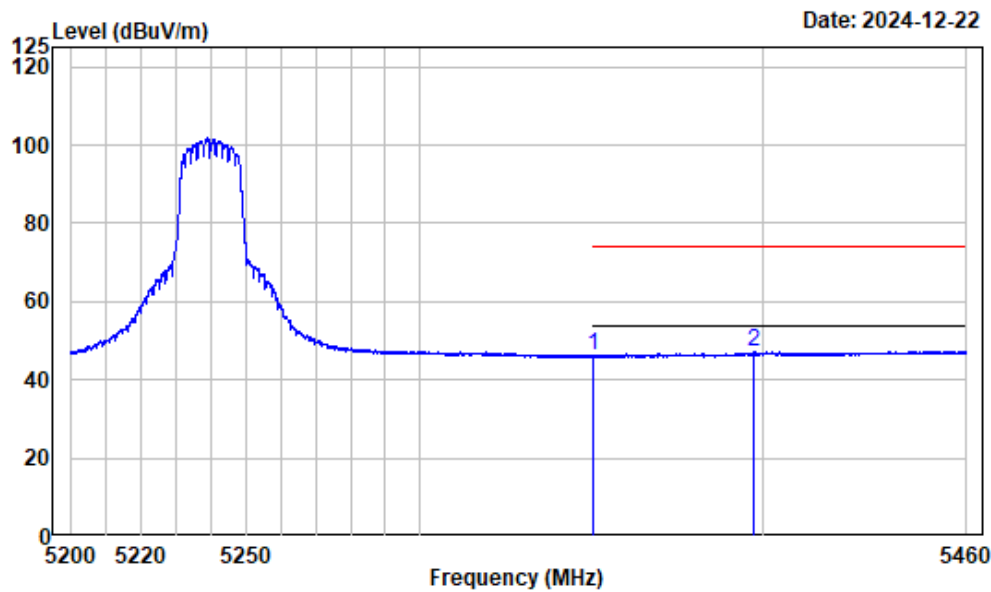

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.80	46.06	54.00	-7.94 Average
2	5397.300	-6.60	53.82	47.22	54.00	-6.78 Average


Right Band edge\_Veritical\_Peak\_802.11a\_ANT1

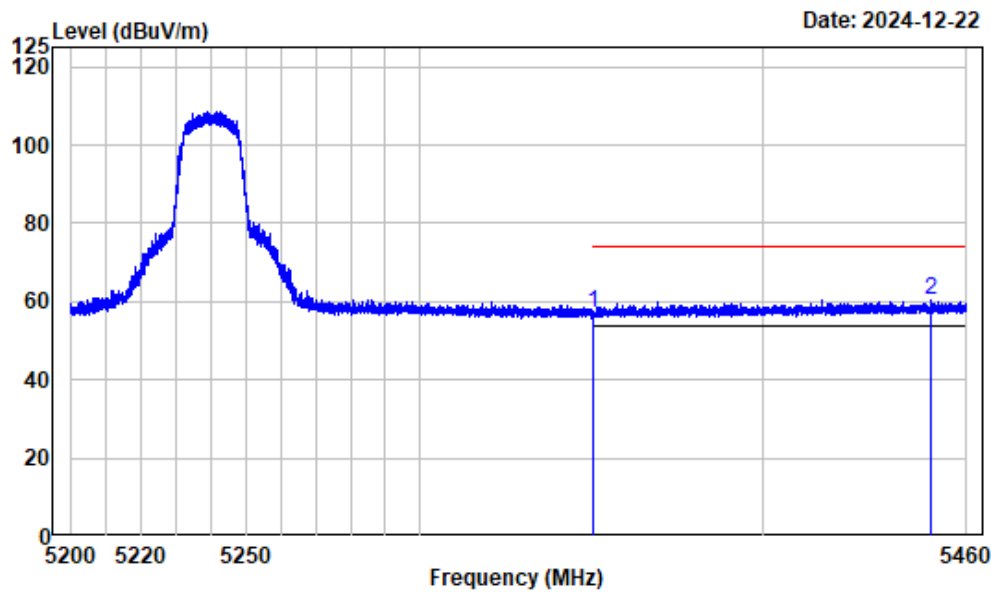

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.02	57.28	74.00	-16.72	Peak
2 5449.631	-6.33	66.59	60.26	74.00	-13.74	Peak


Right Band edge\_Vertical\_Average\_802.11a\_ANT1

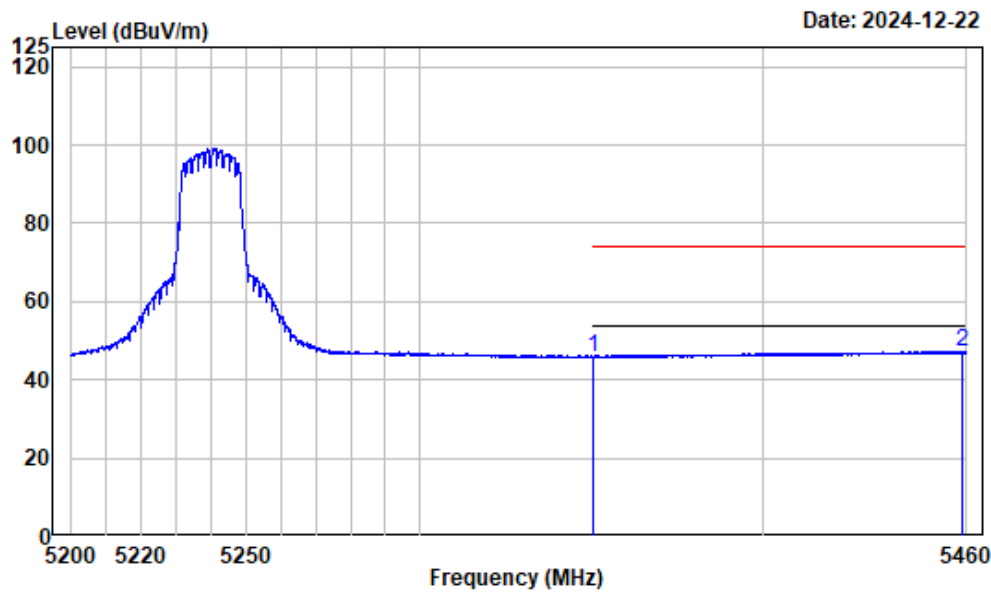

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	52.62	45.88	54.00	-8.12	Average
2 5458.603	-6.29	53.58	47.29	54.00	-6.71	Average


Left Band edge\_Horizontal\_Peak\_802.11ac VHT20

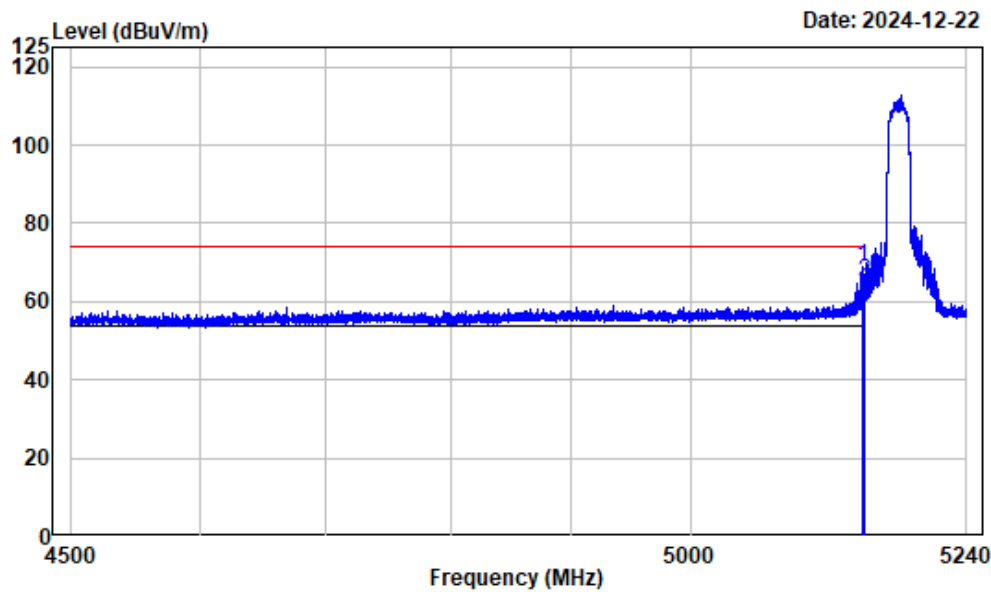

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.414	-7.46	76.26	68.80	74.00	-5.20 Peak
2	5150.000	-7.46	72.72	65.26	74.00	-8.74 Peak


Left Band edge\_Horizontal\_Average\_802.11ac VHT20

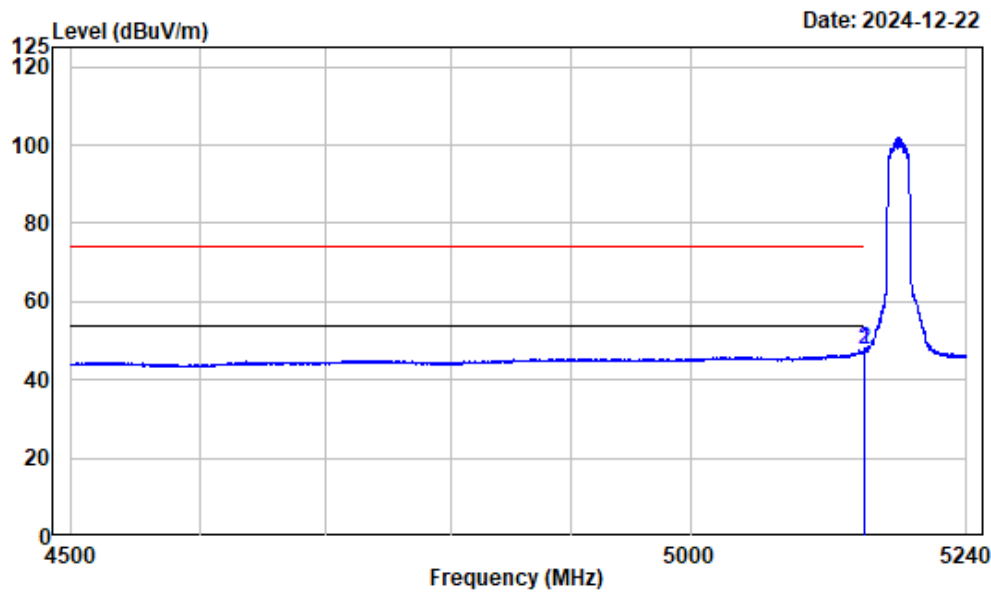

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.894	-7.46	55.29	47.83	54.00	-6.17 Average
2	5150.000	-7.46	55.24	47.78	54.00	-6.22 Average


Left Band edge\_Vertical\_Peak\_802.11ac VHT20

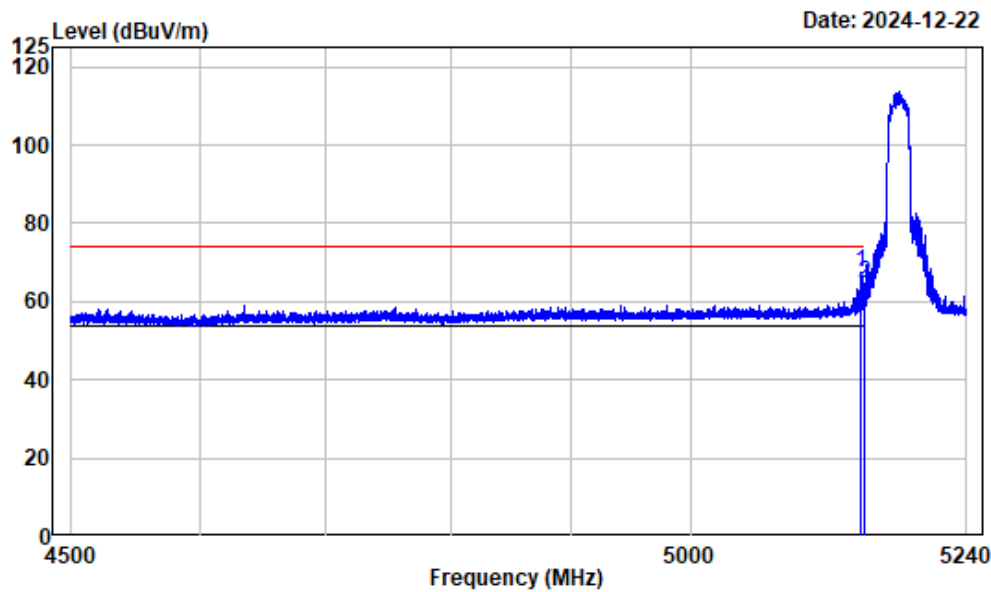

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.396	-7.46	75.07	67.61	74.00	-6.39 Peak
2	5150.000	-7.46	72.31	64.85	74.00	-9.15 Peak

Left Band edge\_Vertical\_Average\_802.11ac VHT20

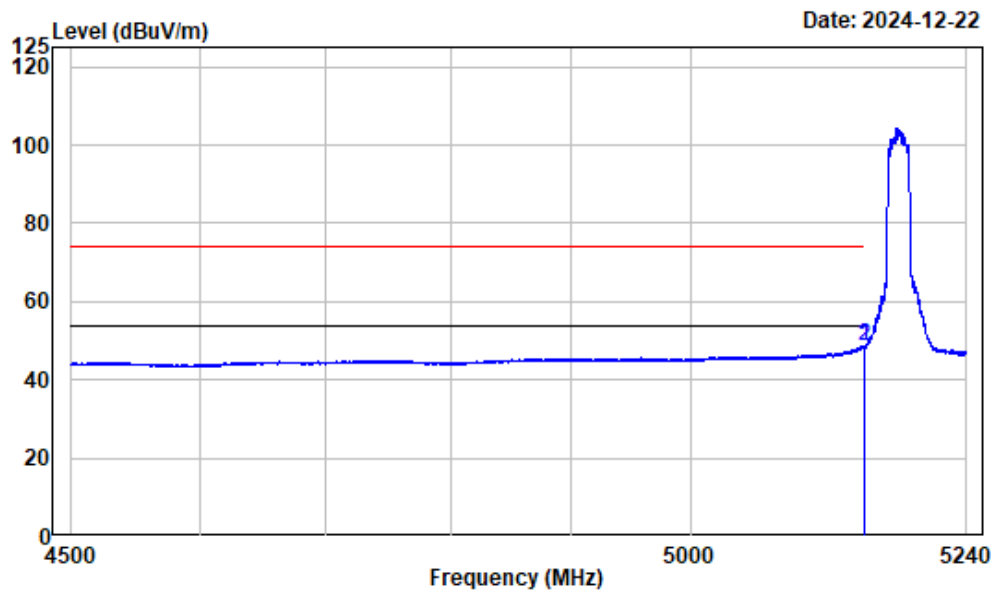


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.708	-7.46	56.16	48.70	54.00	-5.30 Average
2	5150.000	-7.46	56.13	48.67	54.00	-5.33 Average




Right Band edge\_Horizontal\_Peak\_802.11ac VHT20

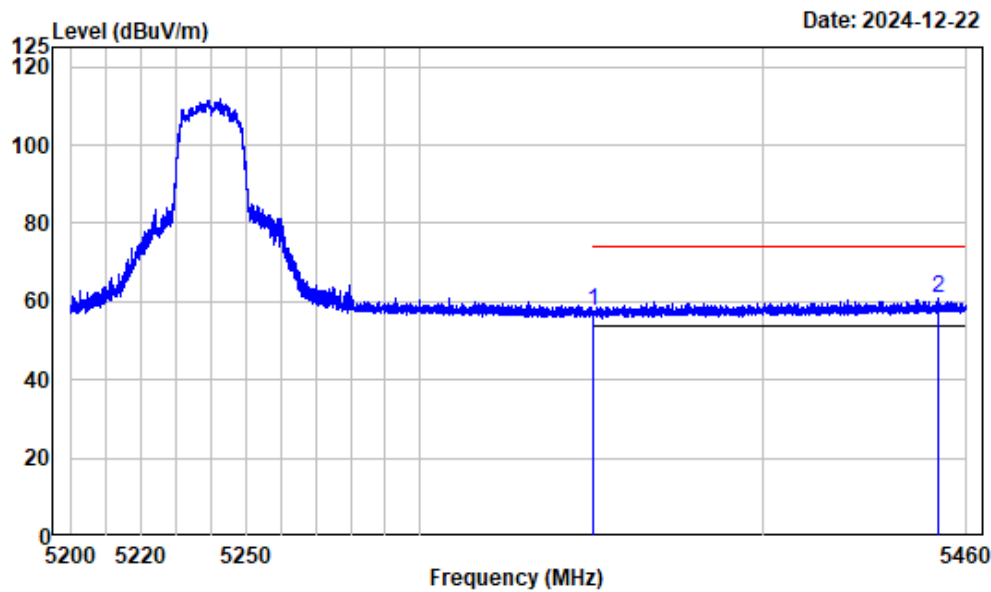

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.43	57.69	74.00	-16.31	Peak
2 5451.484	-6.32	67.26	60.94	74.00	-13.06	Peak


Right Band edge\_Horizontal\_Average\_802.11ac VHT20

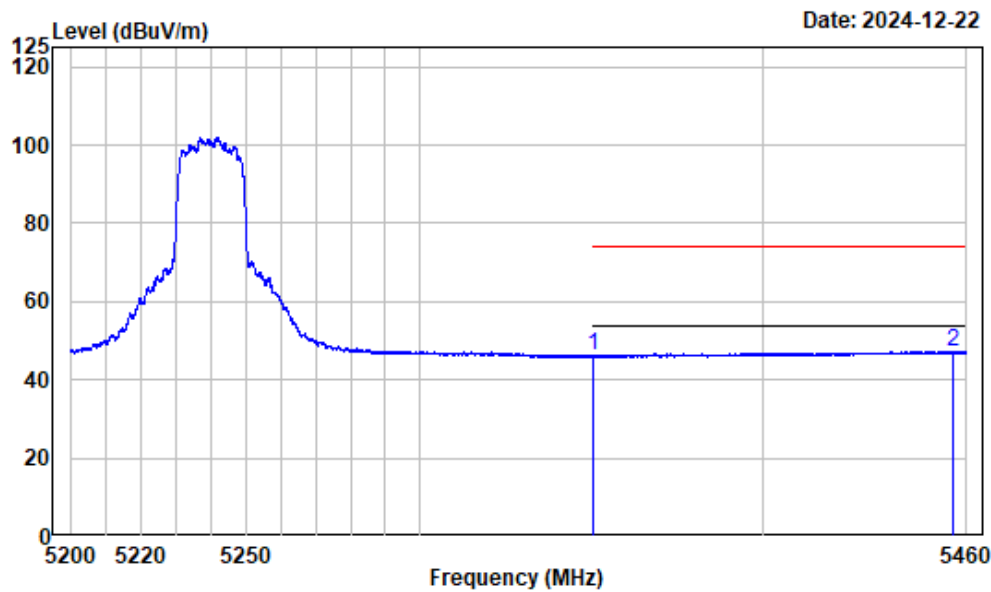

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.00	46.26	54.00	-7.74	Average
2 5455.774	-6.31	53.70	47.39	54.00	-6.61	Average


Right Band edge\_Vertical\_Peak\_802.11ac VHT20

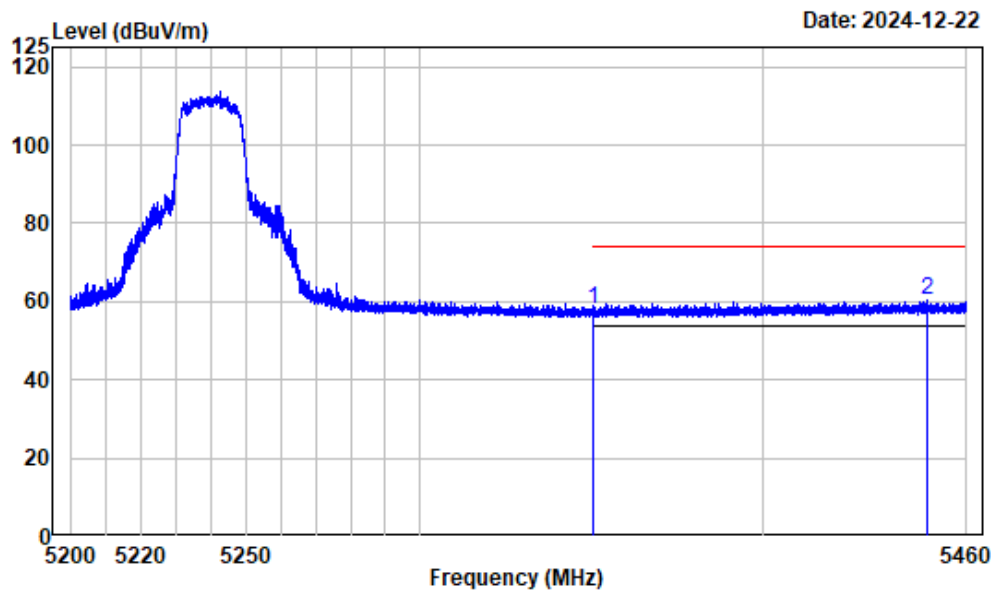

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.74	58.00	74.00	-16.00	Peak
2 5448.266	-6.33	66.92	60.59	74.00	-13.41	Peak


Right Band edge\_Vertical\_Average\_802.11ac VHT20

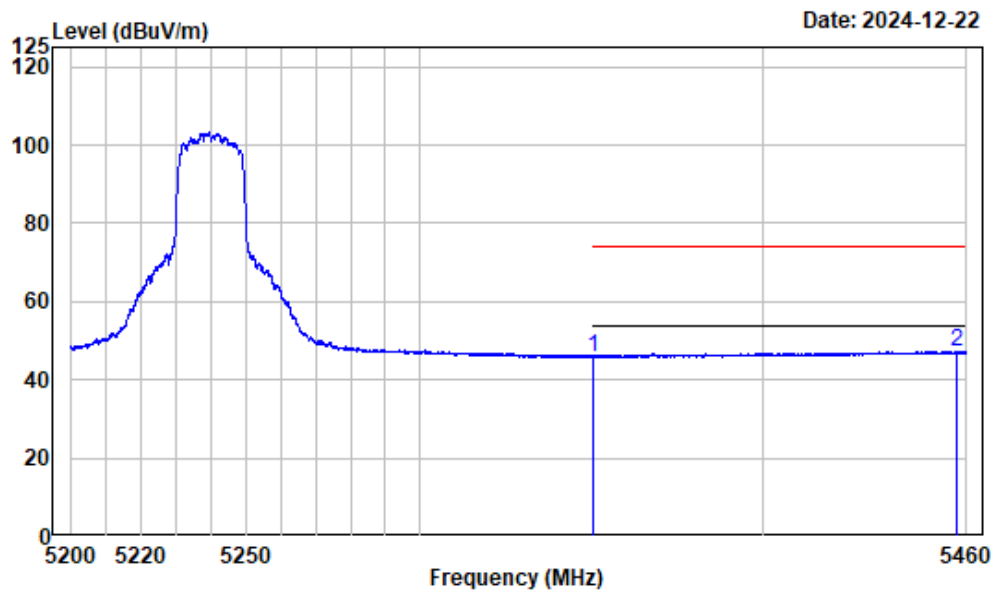

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5240

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.58	45.84	54.00	-8.16 Average
2	5457.237	-6.31	53.48	47.17	54.00	-6.83 Average


Left Band edge\_Horizontal\_Peak\_802.11ac VHT40

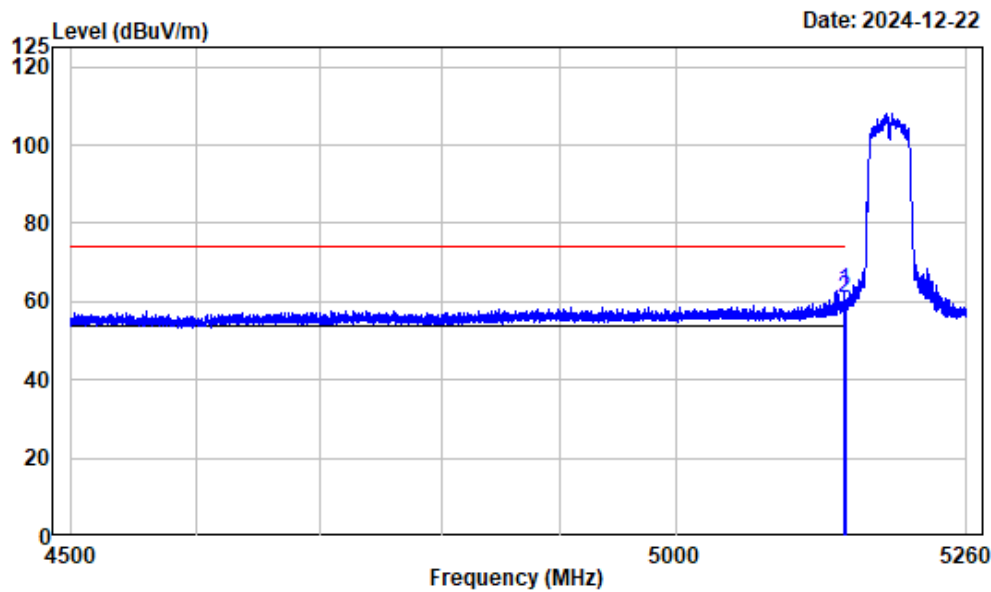

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.551	-7.46	70.26	62.80	74.00	-11.20 Peak
2	5150.000	-7.46	68.38	60.92	74.00	-13.08 Peak


Left Band edge\_Horizontal\_Average\_802.11ac VHT40

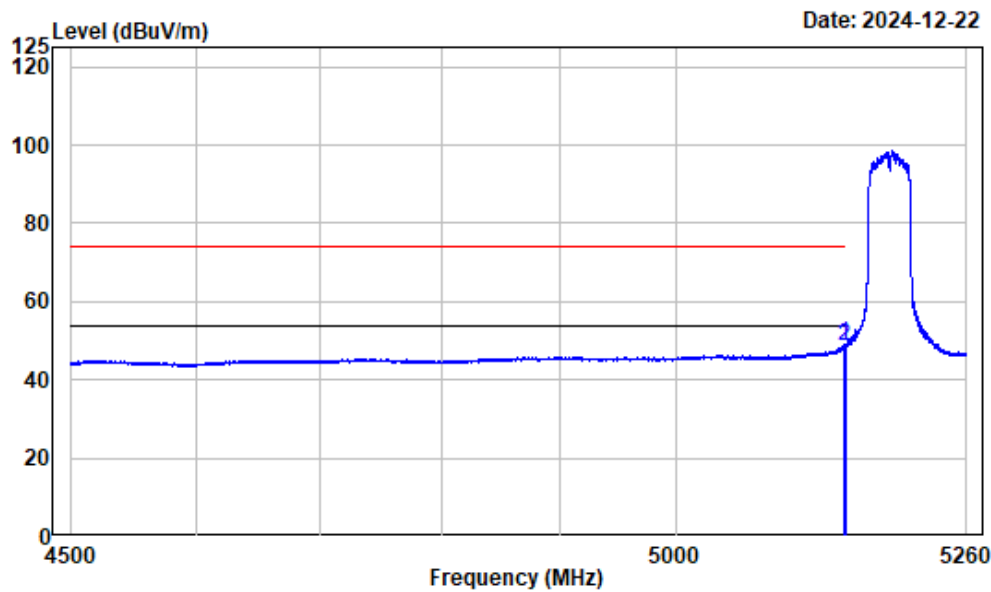

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.216	-7.46	56.71	49.25	54.00	-4.75 Average
2	5150.000	-7.46	56.09	48.63	54.00	-5.37 Average


Left Band edge\_Vertical\_Peak\_802.11ac VHT40

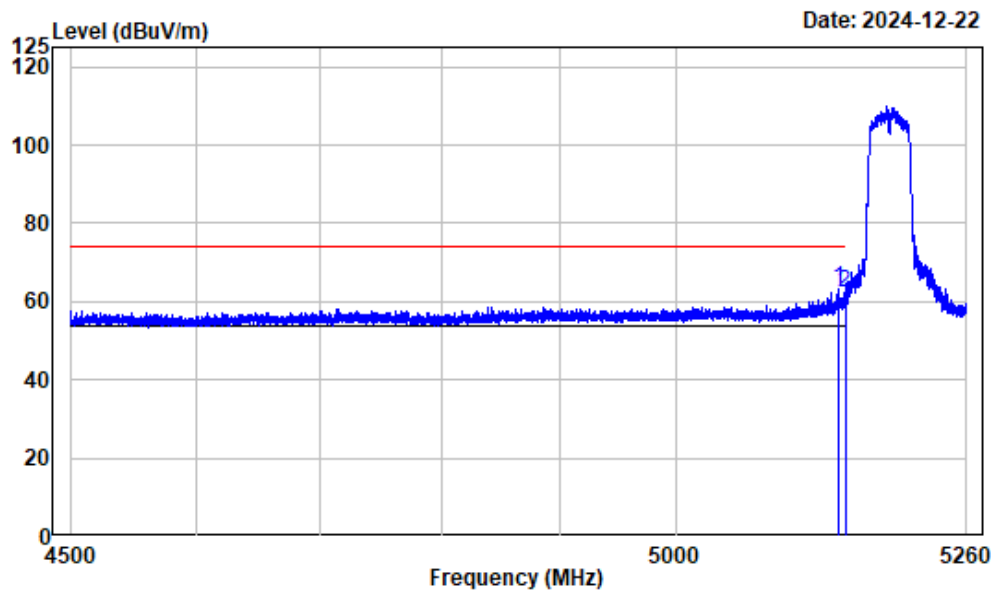

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.516	-7.46	70.80	63.34	74.00	-10.66 Peak
2	5150.000	-7.46	69.62	62.16	74.00	-11.84 Peak

Left Band edge\_Vertical\_Average\_802.11ac VHT40

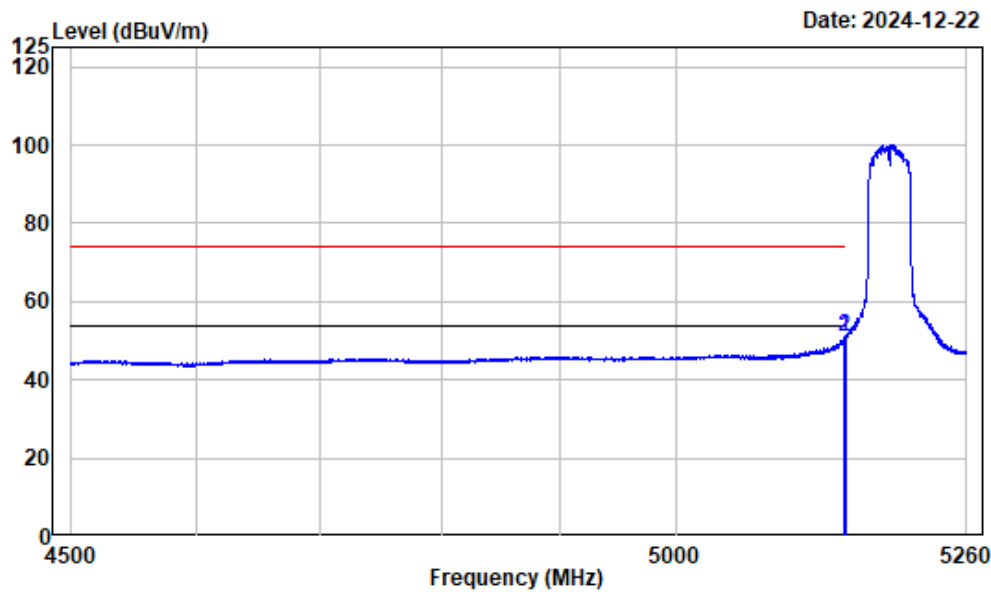


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.026	-7.46	58.37	50.91	54.00	-3.09 Average
2	5150.000	-7.46	58.30	50.84	54.00	-3.16 Average




Right Band edge\_Horizontal\_Peak\_802.11ac VHT40

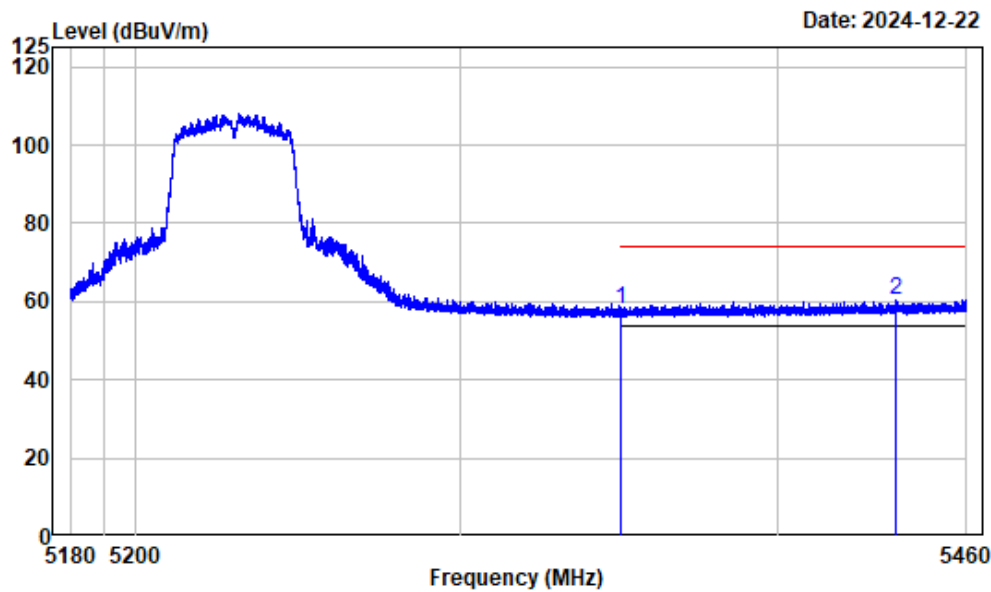

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.67	57.93	74.00	-16.07	Peak
2 5437.562	-6.38	66.86	60.48	74.00	-13.52	Peak


Right Band edge\_Horizontal\_Average\_802.11ac VHT40

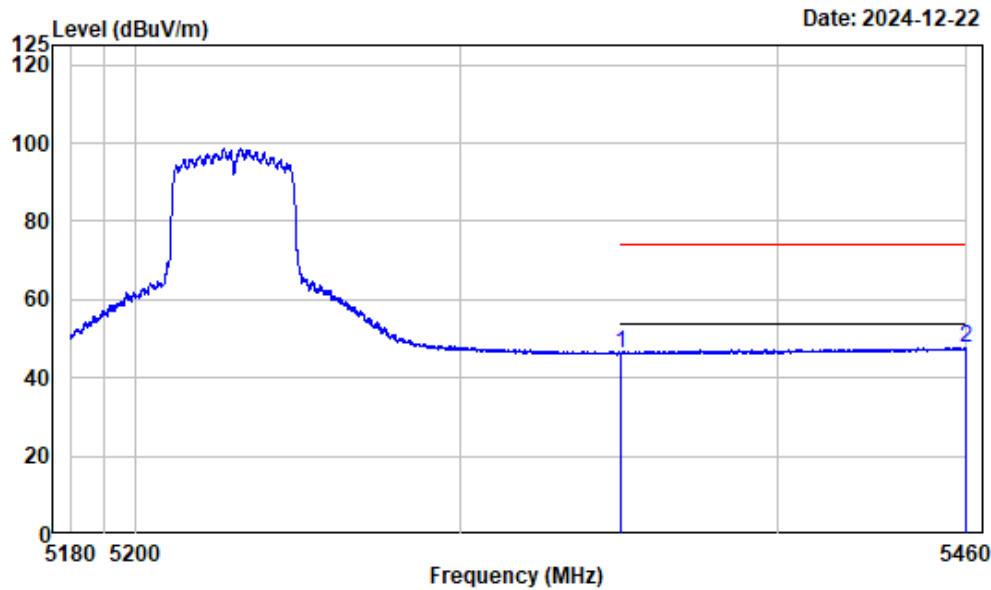

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	53.09	46.35	54.00	-7.65 Average
2	5459.930	-6.29	53.89	47.60	54.00	-6.40 Average


Right Band edge\_Vertical\_Peak\_802.11ac VHT40

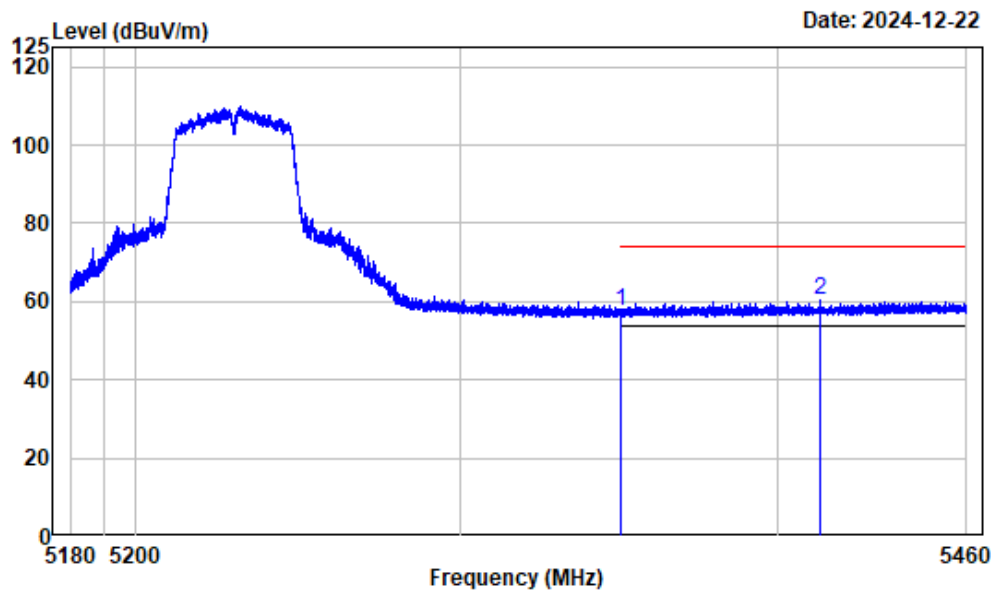

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	64.16	57.42	74.00	-16.58	Peak
2 5413.444	-6.51	66.71	60.20	74.00	-13.80	Peak


Right Band edge\_Vertical\_Average\_802.11ac VHT40

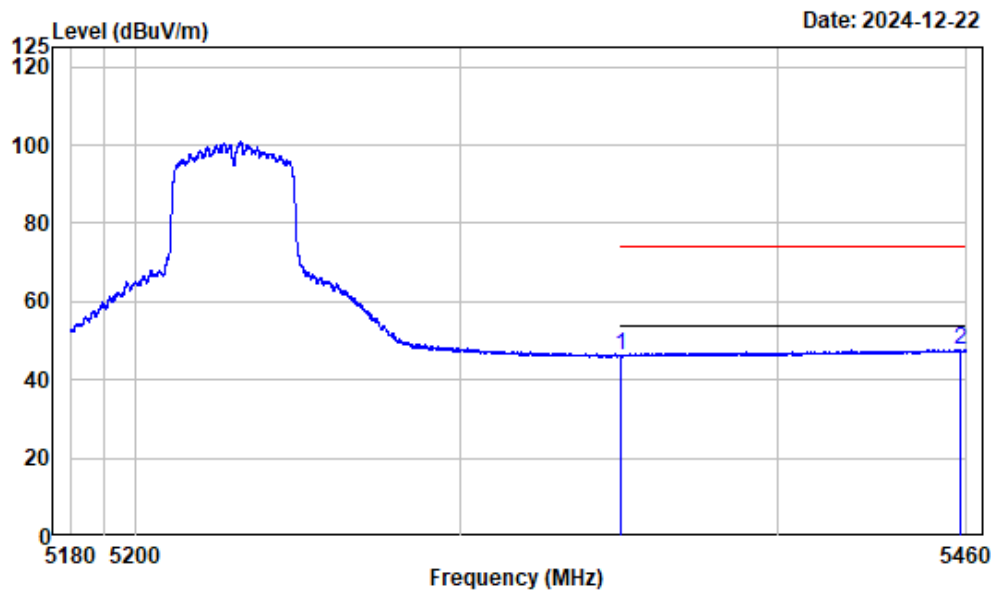

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5230

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	53.12	46.38	54.00	-7.62	Average
2 5458.040	-6.29	53.95	47.66	54.00	-6.34	Average


## Left Band edge\_Horizontal\_802.11a\_ANT0

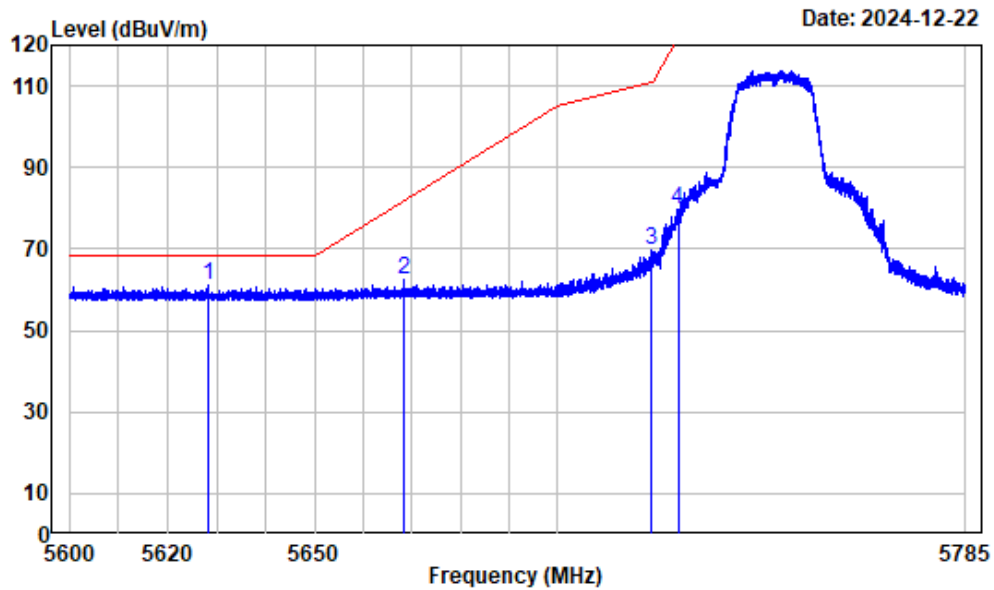

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5745

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5628.378	-6.01	67.06	61.05	68.20	-7.15 Peak
2	5668.505	-5.81	68.21	62.40	81.93	-19.53 Peak
3	5719.340	-5.54	75.10	69.56	110.62	-41.06 Peak
4	5725.006	-5.48	85.40	79.92	155.20	-75.28 Peak


## Left Band edge\_Vertical\_802.11a\_ANT0

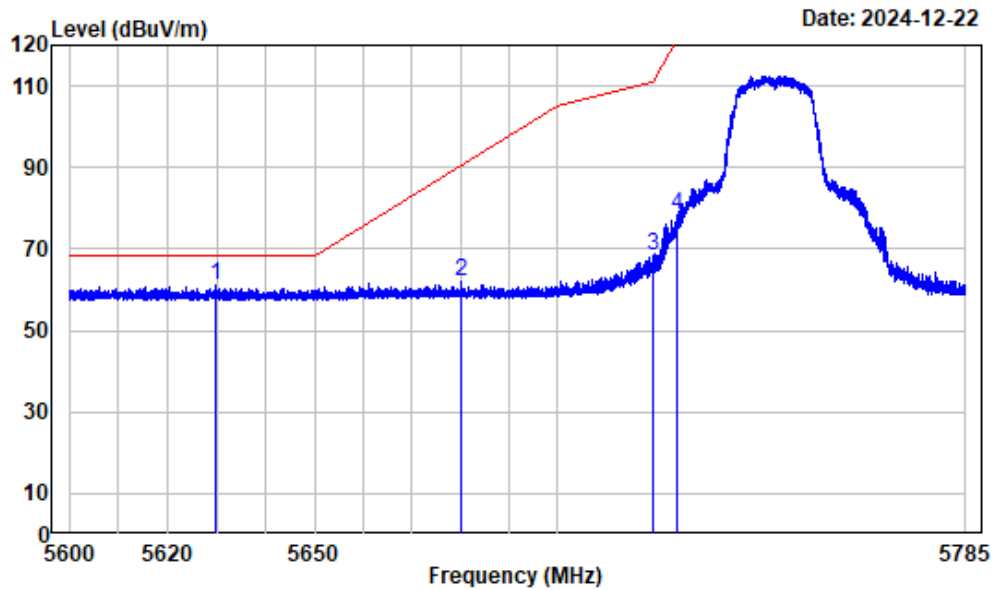

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5745

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5629.696	-6.00	66.96	60.96	68.20	-7.24	Peak
2	5680.022	-5.77	67.96	62.19	90.46	-28.27	Peak
3	5719.779	-5.54	73.75	68.21	110.74	-42.53	Peak
4	5724.891	-5.49	83.76	78.27	121.95	-43.68	Peak


## Right Band edge\_Horizontal\_802.11a\_ANT0

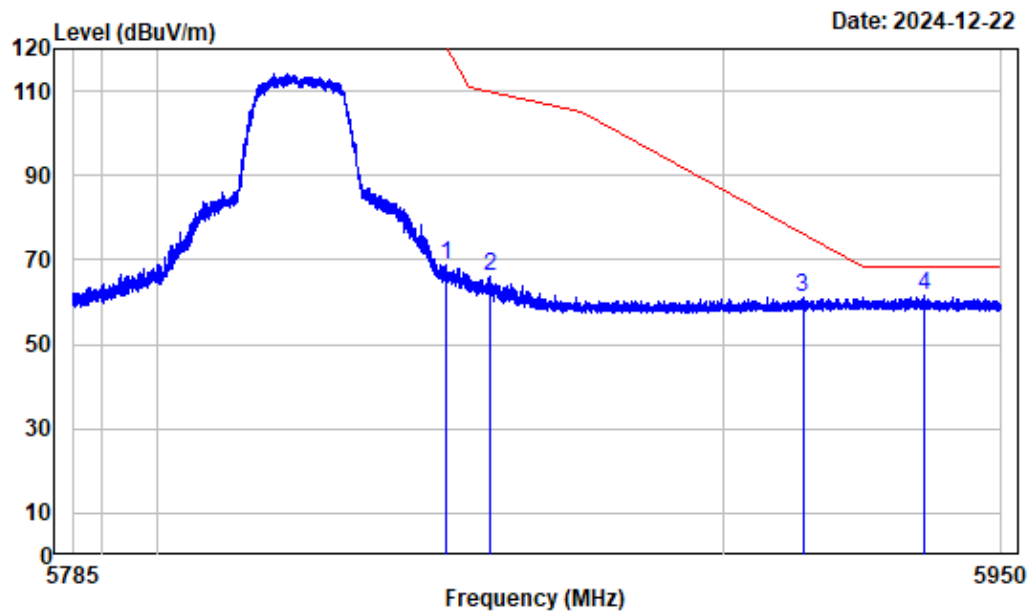

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.678	-4.68	73.47	68.79	120.65	-51.86	Peak
2	5858.537	-4.65	70.57	65.92	109.81	-43.89	Peak
3	5914.355	-4.46	65.76	61.30	76.05	-14.75	Peak
4	5936.221	-4.45	65.83	61.38	68.20	-6.82	Peak

## Right Band edge\_Vertical\_802.11a\_ANT0

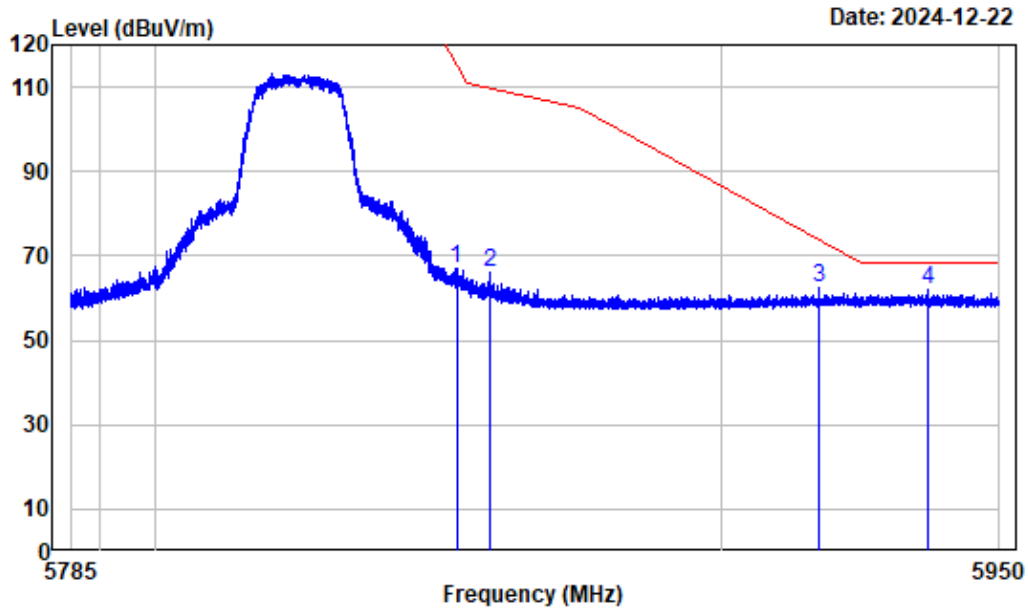


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

	Freq Factor		Read	Limit	Over	Remark
	Level	Level	Line	Limit	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5853.009	-4.66	71.88	67.22	115.34	-48.12 Peak
2	5858.806	-4.63	70.63	66.00	109.73	-43.73 Peak
3	5917.615	-4.45	66.73	62.28	73.65	-11.37 Peak
4	5937.314	-4.45	66.30	61.85	68.20	-6.35 Peak




Left Band edge\_Horizontal\_802.11a\_ANT1

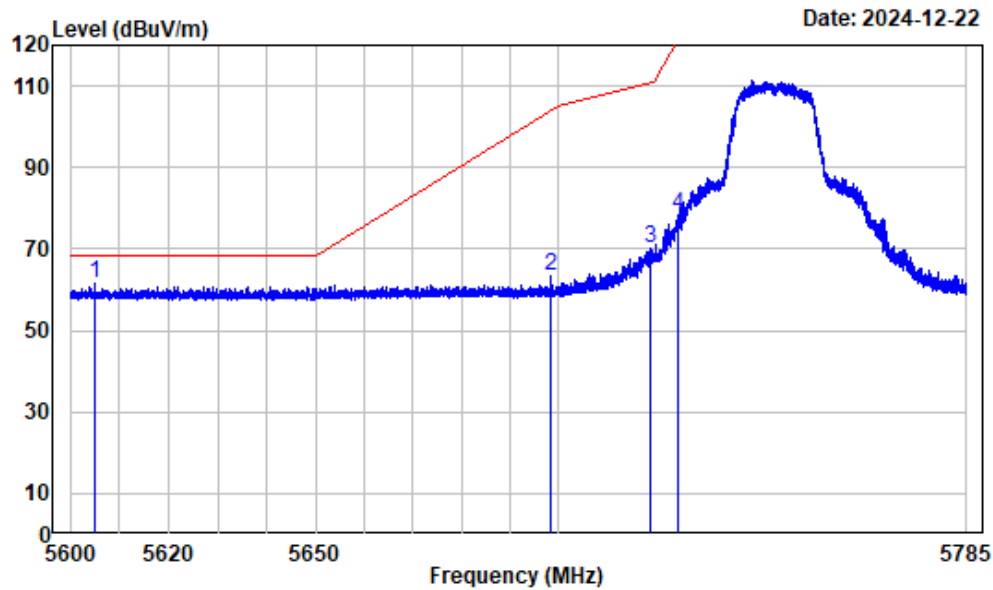

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5745

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5605.111	-6.17	67.56	61.39	68.20	-6.81	Peak
2	5698.594	-5.73	69.06	63.33	104.16	-40.83	Peak
3	5719.224	-5.54	75.52	69.98	110.58	-40.60	Peak
4	5724.821	-5.49	83.86	78.37	121.79	-43.42	Peak


## Left Band edge\_Vertical\_802.11a\_ANT1

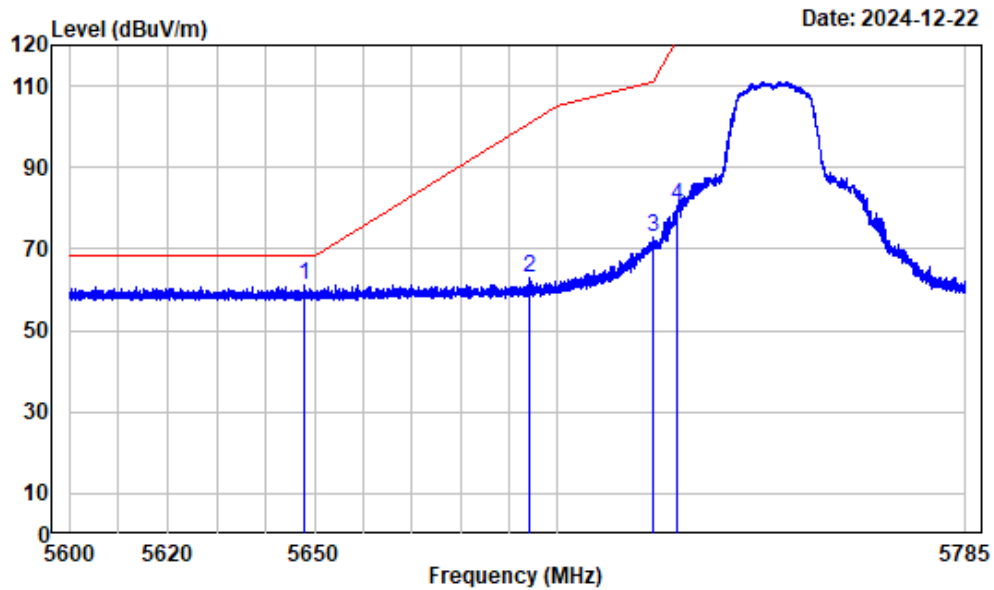

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5745

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5648.037	-5.89	66.91	61.02	68.20	-7.18 Peak
2	5694.107	-5.73	68.59	62.86	100.86	-38.00 Peak
3	5719.779	-5.54	78.48	72.94	110.74	-37.80 Peak
4	5724.914	-5.49	86.13	80.64	122.00	-41.36 Peak


## Right Band edge\_Horizontal\_802.11a\_ANT1

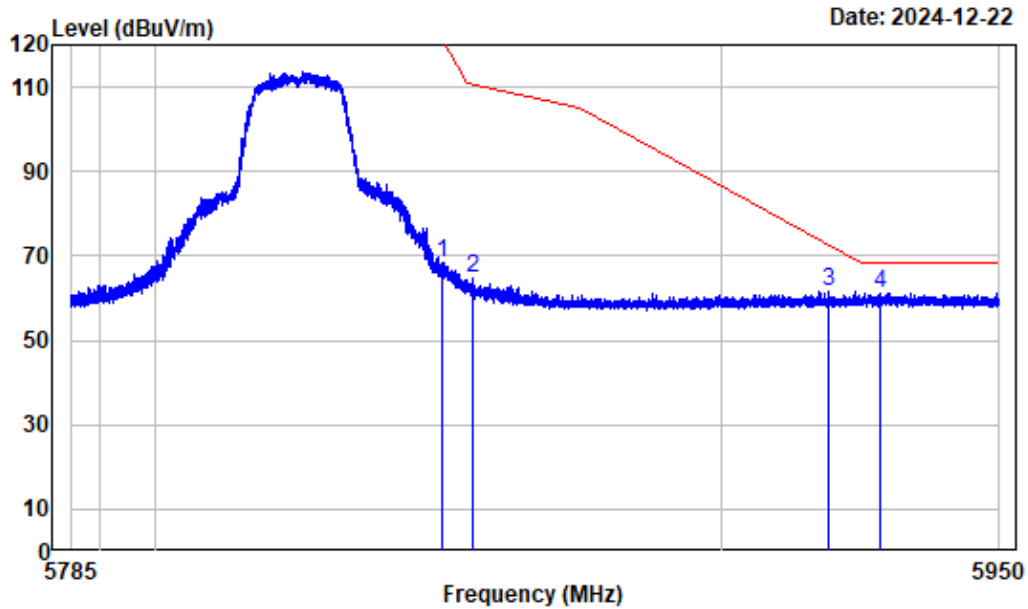

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.575	-4.68	73.04	68.36	120.89	-52.53	Peak
2	5855.979	-4.66	69.59	64.93	110.53	-45.60	Peak
3	5919.327	-4.45	66.17	61.72	72.38	-10.66	Peak
4	5928.547	-4.45	65.77	61.32	68.20	-6.88	Peak


## Right Band edge\_Vertical\_802.11a\_ANT1

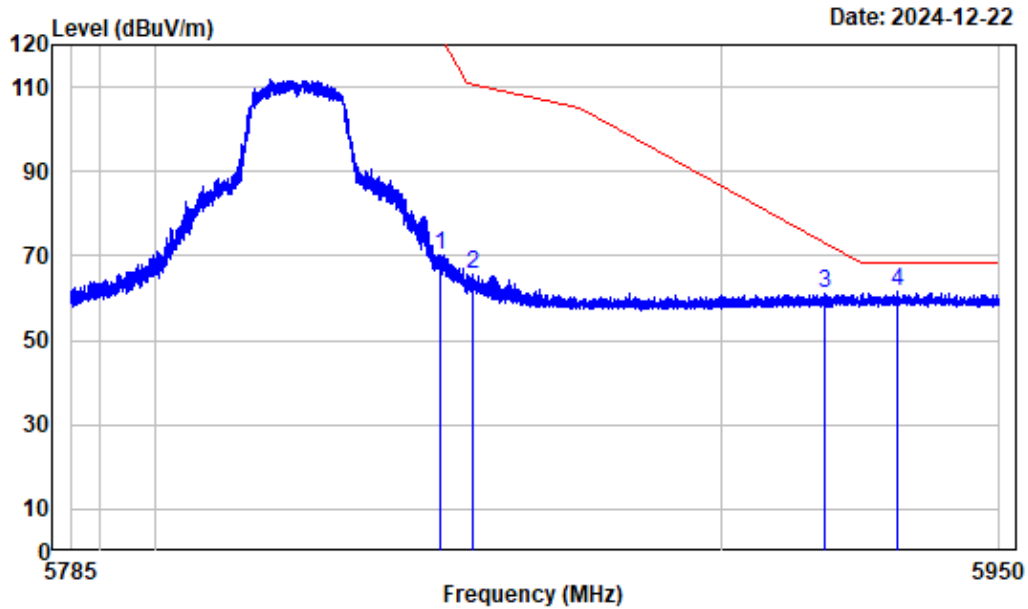

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5849.977	-4.68	74.85	70.17	155.20	-85.03 Peak
2	5855.835	-4.66	70.15	65.49	110.57	-45.08 Peak
3	5918.749	-4.45	65.69	61.24	72.81	-11.57 Peak
4	5931.662	-4.44	66.06	61.62	68.20	-6.58 Peak


## Left Band edge\_Horizontal\_802.11ac VHT20

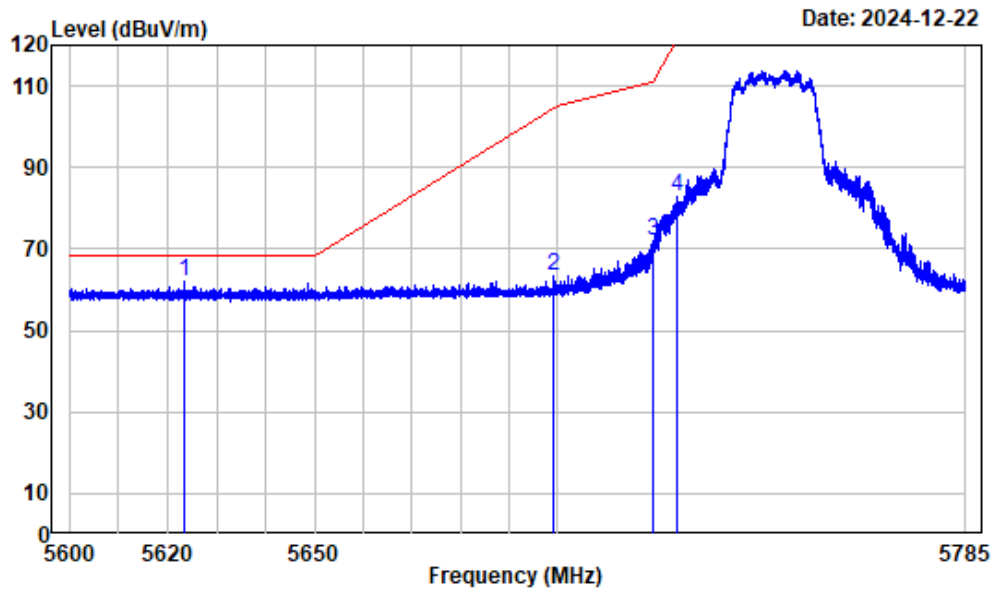

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5745

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5623.567	-6.05	67.96	61.91	68.20	-6.29 Peak
2	5699.334	-5.71	69.15	63.44	104.71	-41.27 Peak
3	5719.941	-5.53	77.70	72.17	110.78	-38.61 Peak
4	5724.659	-5.49	88.23	82.74	121.42	-38.68 Peak


## Left Band edge\_Vertical\_802.11ac VHT20

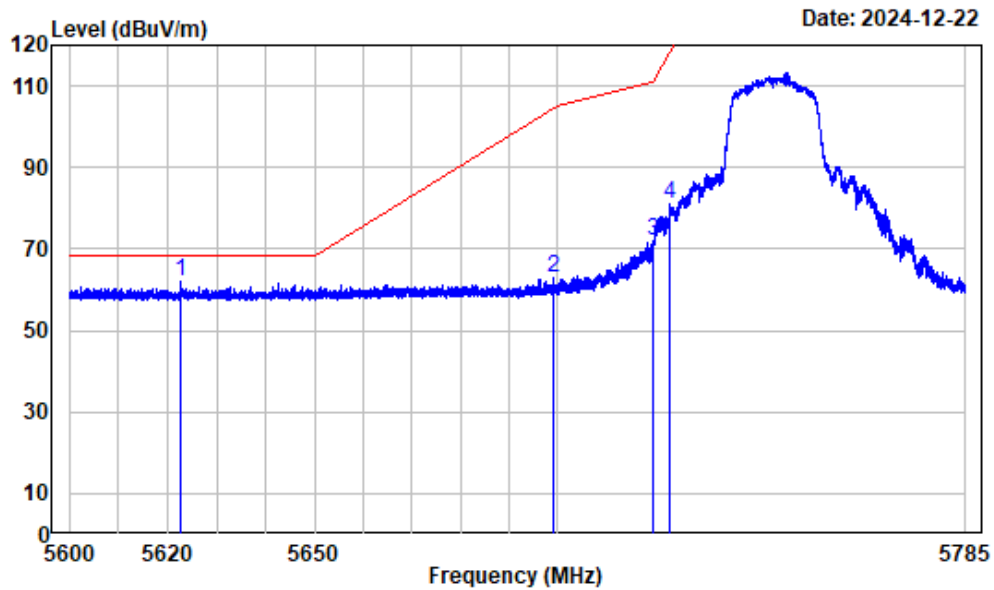

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5622.711	-6.05	67.95	61.90	68.20	-6.30	Peak
2	5699.172	-5.72	68.49	62.77	104.59	-41.82	Peak
3	5719.964	-5.53	77.39	71.86	110.79	-38.93	Peak
4	5723.457	-5.49	86.56	81.07	118.68	-37.61	Peak


## Right Band edge\_Horizontal\_802.11ac VHT20

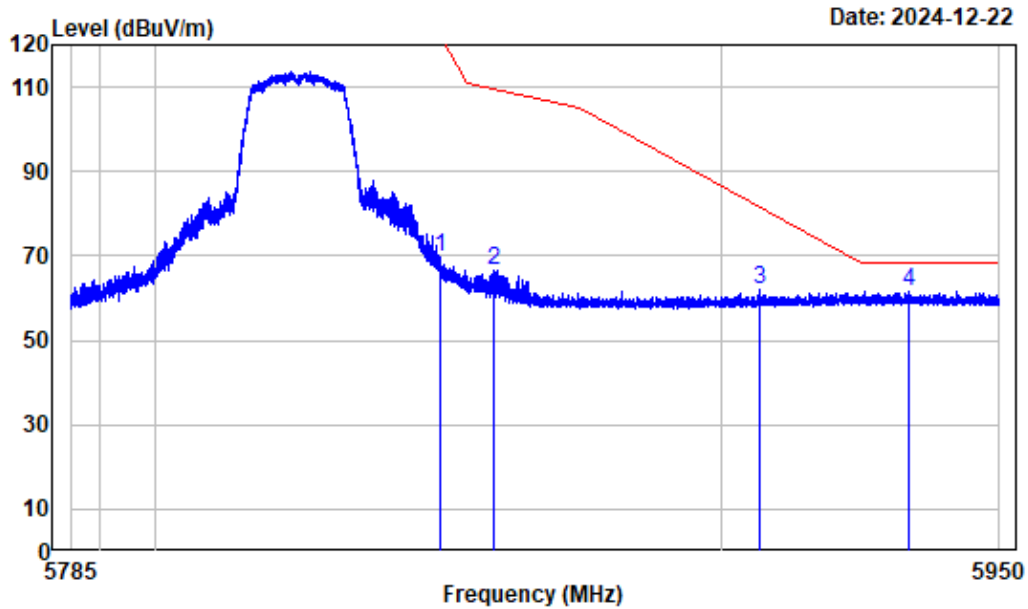

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5849.977	-4.68	74.58	69.90	155.20	-85.30	Peak
2	5859.775	-4.63	71.14	66.51	109.46	-42.95	Peak
3	5907.136	-4.45	66.36	61.91	81.38	-19.47	Peak
4	5933.581	-4.45	65.98	61.53	68.20	-6.67	Peak

## Right Band edge\_Vertical\_Peak\_802.11ac VHT20

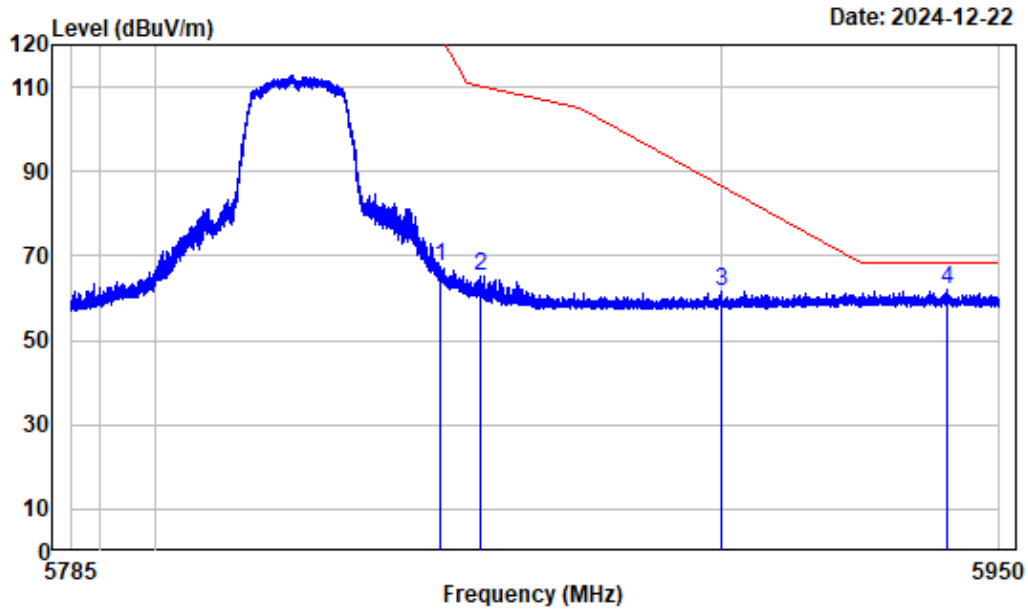


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

	Freq Factor		Read	Limit	Over	Remark
	Level	Level	Line	Limit	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5850.080	-4.68	72.08	67.40	122.02	-54.62 Peak
2	5857.155	-4.65	69.77	65.12	110.20	-45.08 Peak
3	5900.040	-4.46	66.14	61.68	86.63	-24.95 Peak
4	5940.470	-4.44	66.31	61.87	68.20	-6.33 Peak




## Left Band edge\_Horizontal\_802.11ac VHT40

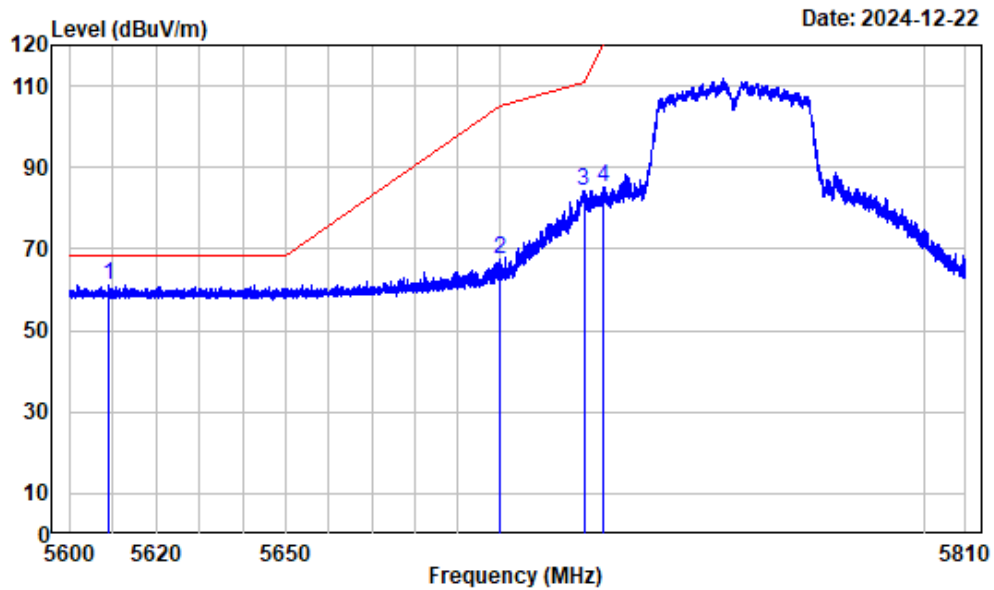

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5609.215	-6.15	67.23	61.08	68.20	-7.12	Peak
2	5699.789	-5.71	72.99	67.28	105.04	-37.76	Peak
3	5719.636	-5.54	89.90	84.36	110.70	-26.34	Peak
4	5724.152	-5.49	90.71	85.22	120.27	-35.05	Peak


## Left Band edge\_Vertical\_802.11ac VHT40

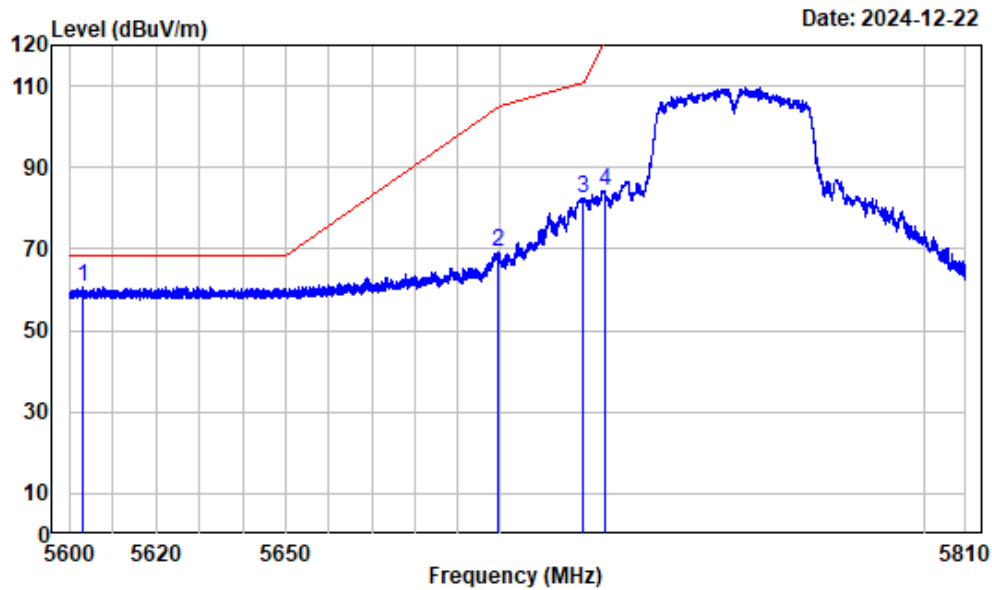

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5755

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5603.019	-6.20	67.07	60.87	68.20	-7.33 Peak
2	5699.421	-5.71	75.01	69.30	104.77	-35.47 Peak
3	5719.269	-5.54	88.15	82.61	110.60	-27.99 Peak
4	5724.493	-5.49	89.88	84.39	121.04	-36.65 Peak


## Right Band edge\_Horizontal\_802.11ac VHT40

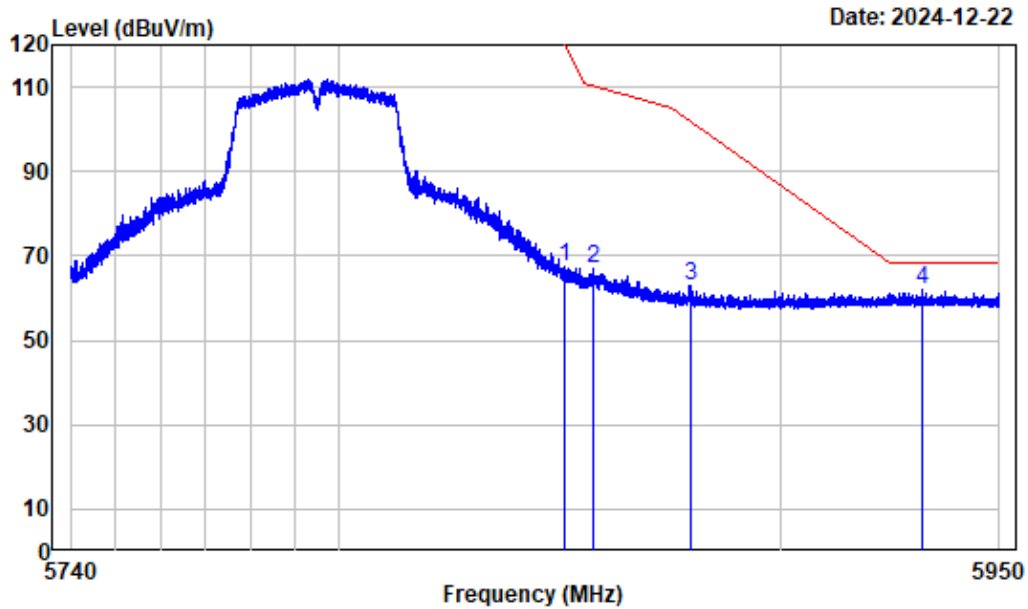

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5850.868	-4.68	71.97	67.29	120.22	-52.93 Peak
2	5857.273	-4.65	71.48	66.83	110.16	-43.33 Peak
3	5879.405	-4.55	67.53	62.98	101.93	-38.95 Peak
4	5932.358	-4.44	66.33	61.89	68.20	-6.31 Peak

Right Band edge\_Vertical\_Peak\_802.11ac VHT40

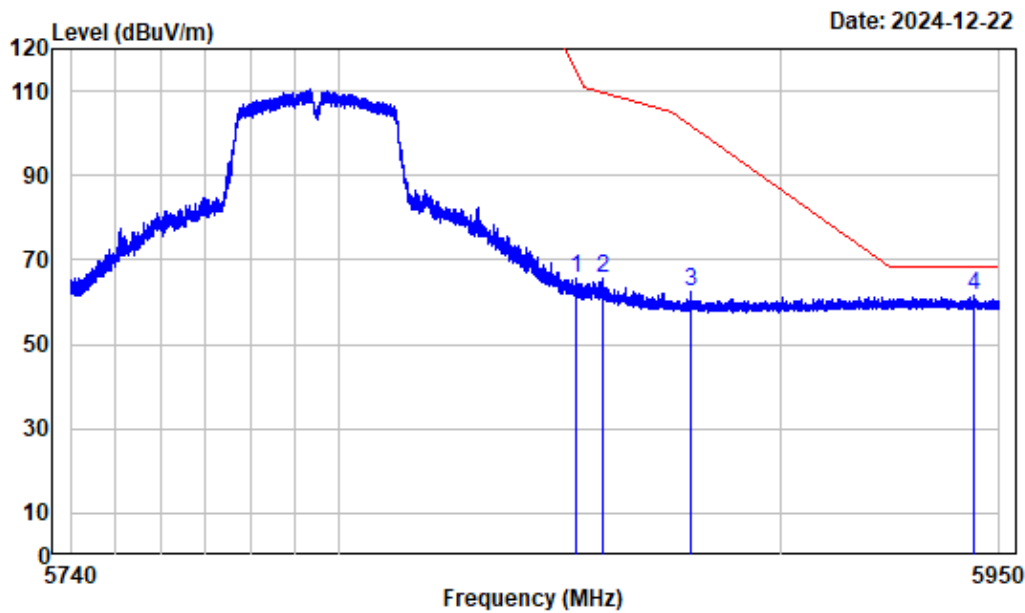


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

	Freq Factor		Read	Limit	Over	Remark
	Level	Level	Line	Limit	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5853.257	-4.66	70.10	65.44	114.77	-49.33 Peak
2	5859.453	-4.63	70.07	65.44	109.55	-44.11 Peak
3	5879.326	-4.55	67.08	62.53	101.99	-39.46 Peak
4	5944.303	-4.45	65.93	61.48	68.20	-6.72 Peak

1-18GHz (Listed with the worst harmonic margin test plot)


1-7GHz\_Horizontal\_802.11a\_ANT0

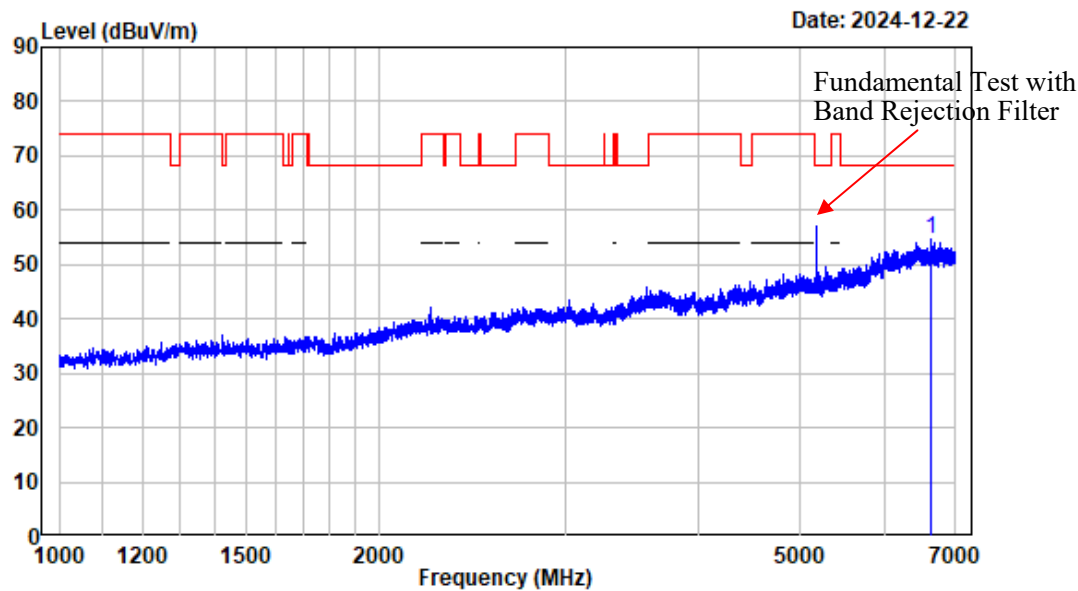

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6633.204	-3.00	57.65	54.65	68.20	-13.55	Peak


1-7GHz\_Vertical\_802.11a\_ANT0

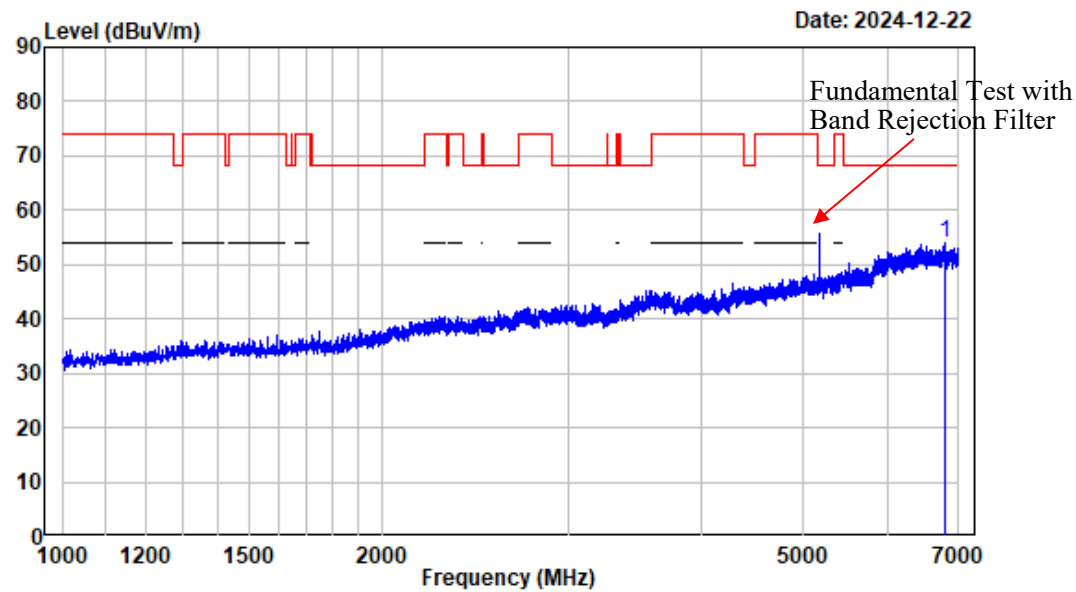

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6790.724	-3.33	57.44	54.11	68.20	-14.09	Peak


7-18GHz\_Horizontal\_Peak\_802.11a\_ANT0

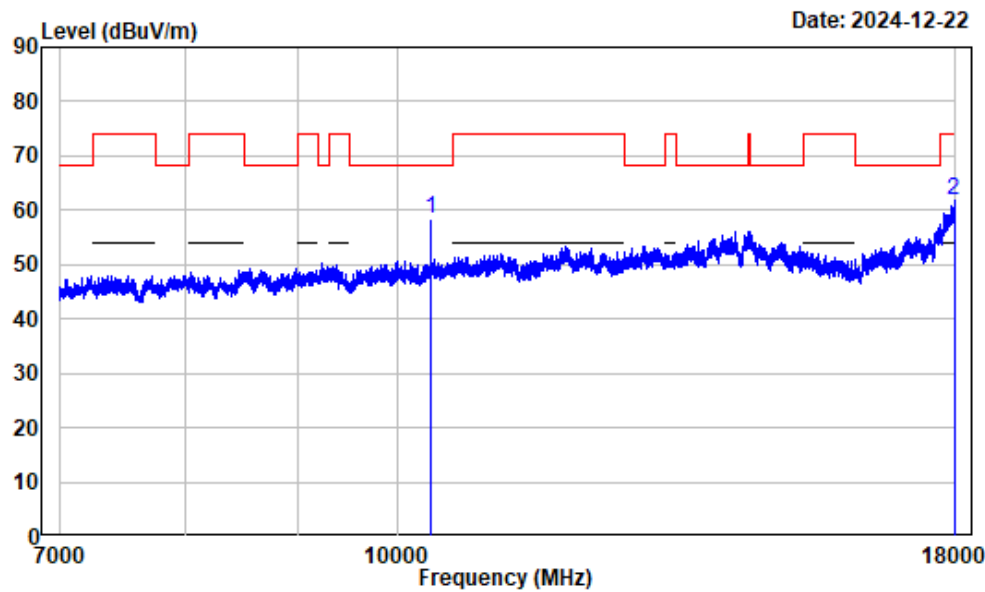

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	2.53	55.89	58.42	68.20	-9.78	Peak
2 17973.870	13.08	48.73	61.81	74.00	-12.19	Peak

7-18GHz\_Horizontal\_Average\_802.11a\_ANT0

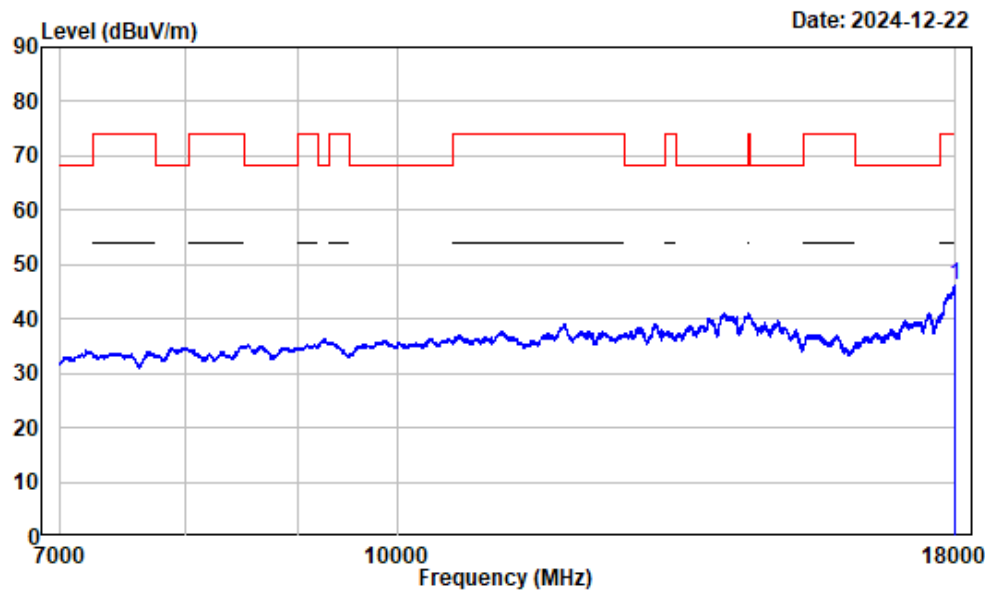


Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	13.17	33.14	46.31	54.00	-7.69	Average




7-18GHz\_Vertical\_Peak\_802.11a\_ANT0

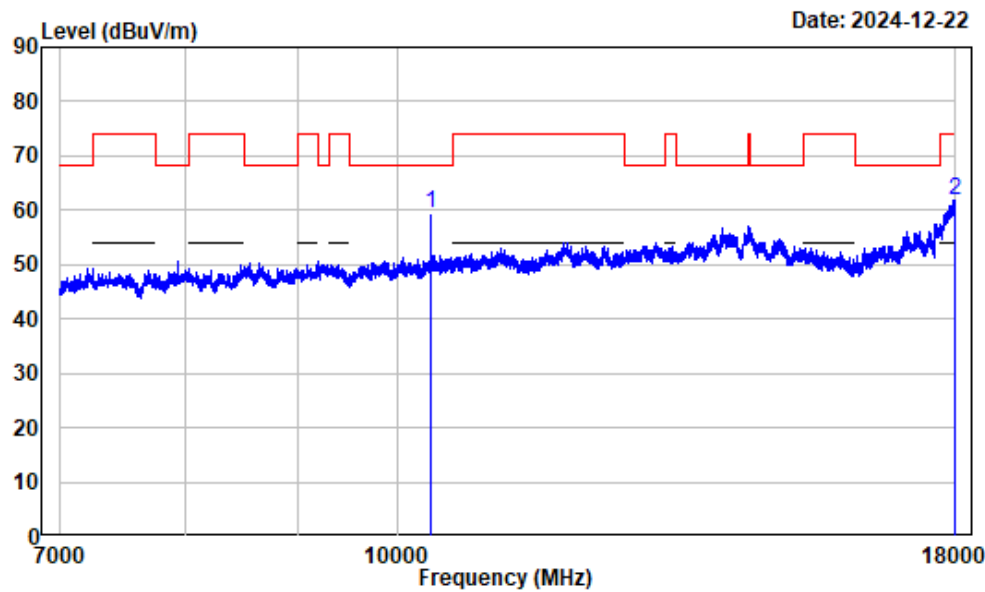

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	2.53	56.78	59.31	68.20	-8.89	Peak
2 17976.620	13.09	48.79	61.88	74.00	-12.12	Peak


7-18GHz\_Vertical\_Average\_802.11a\_ANT0

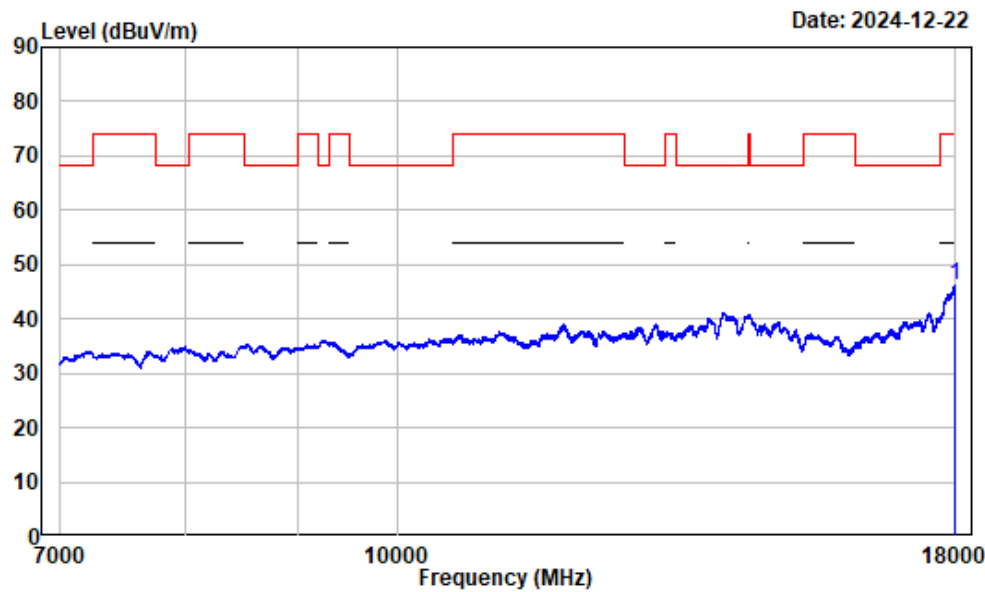

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT0-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17993.130	13.17	33.06	46.23	54.00	-7.77	Average


1-7GHz\_Horizontal\_802.11a\_ANT1

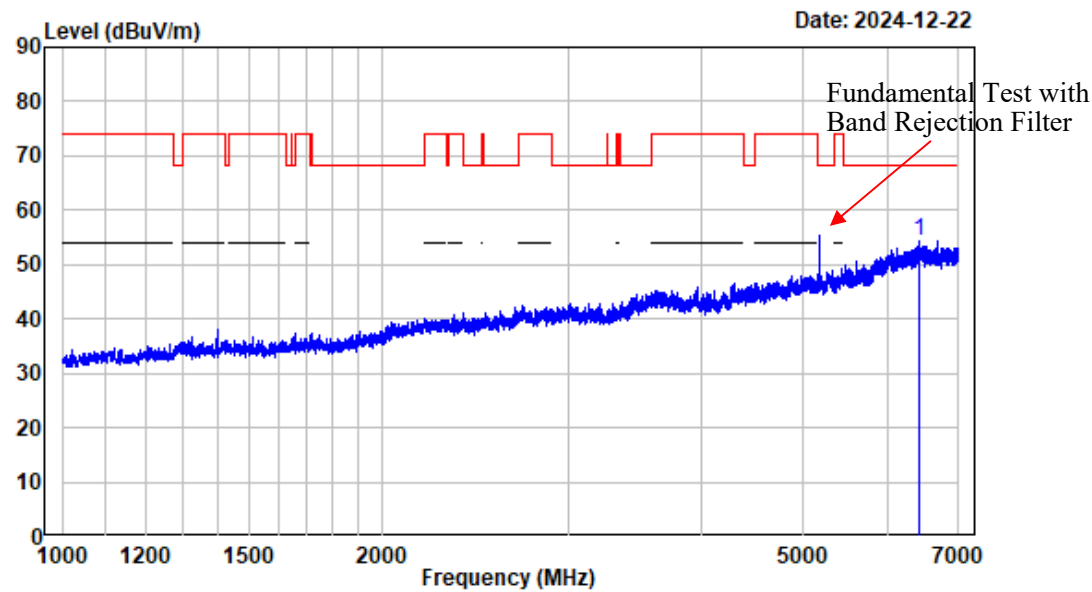

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6439.680	-2.87	57.24	54.37	68.20	-13.83	Peak


1-7GHz\_Vertical\_802.11a\_ANT1

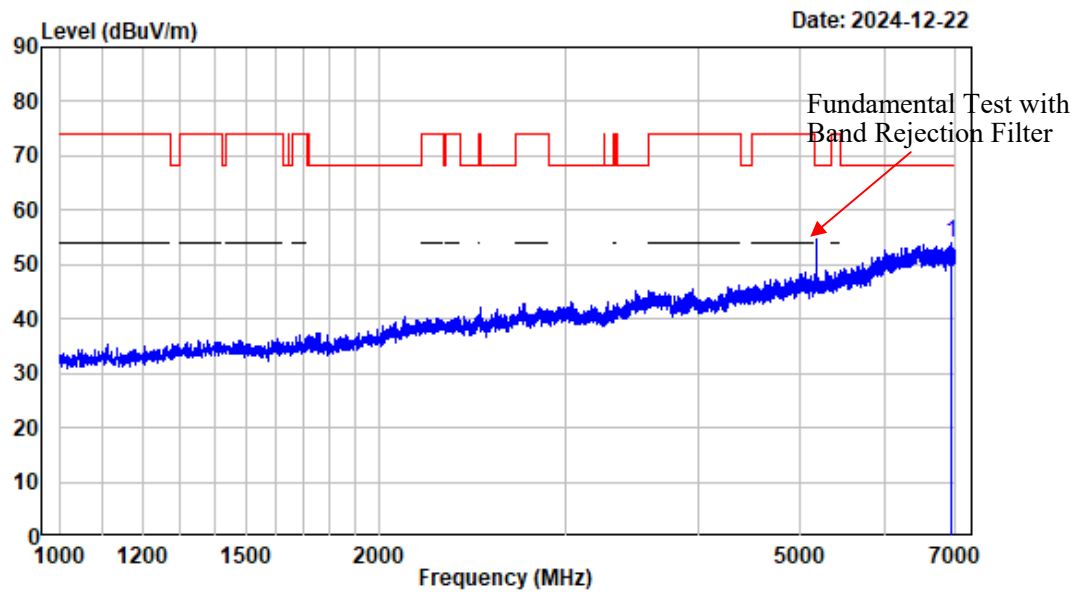

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6948.994	-2.70	56.69	53.99	68.20	-14.21	Peak


7-18GHz\_Horizontal\_Peak\_802.11a\_ANT1

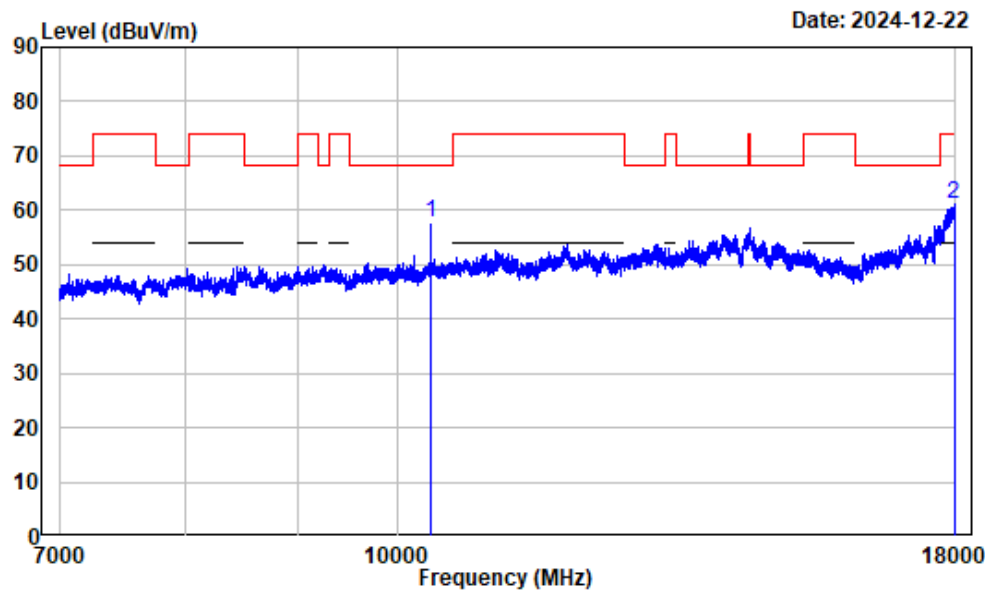

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	2.53	55.12	57.65	68.20	-10.55	Peak
2 17972.500	13.07	47.90	60.97	74.00	-13.03	Peak


7-18GHz\_Horizontal\_Average\_802.11a\_ANT1

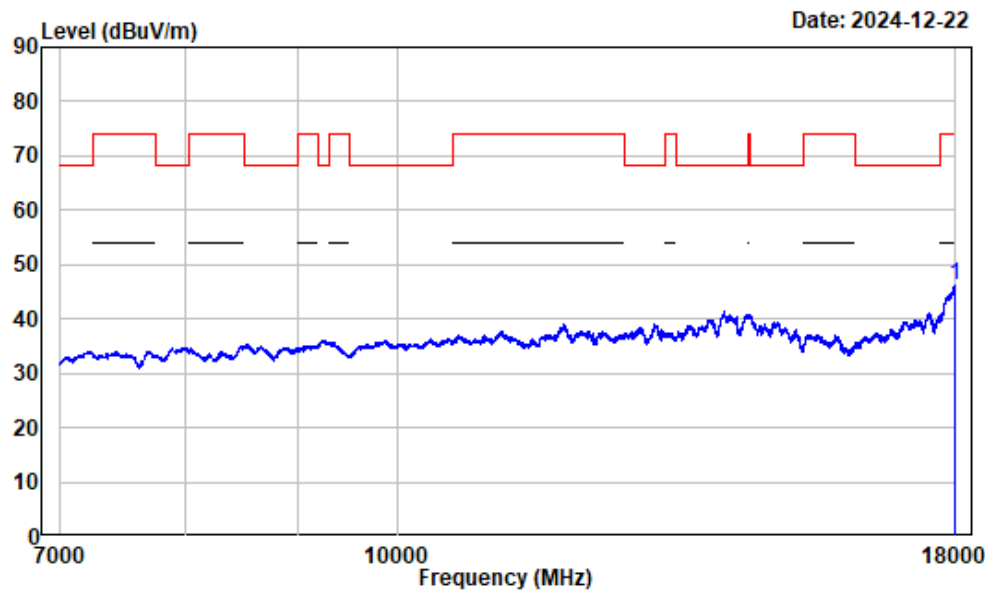

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17993.130	13.17	33.04	46.21	54.00	-7.79	Average


7-18GHz\_Vertical\_Peak\_802.11a\_ANT1

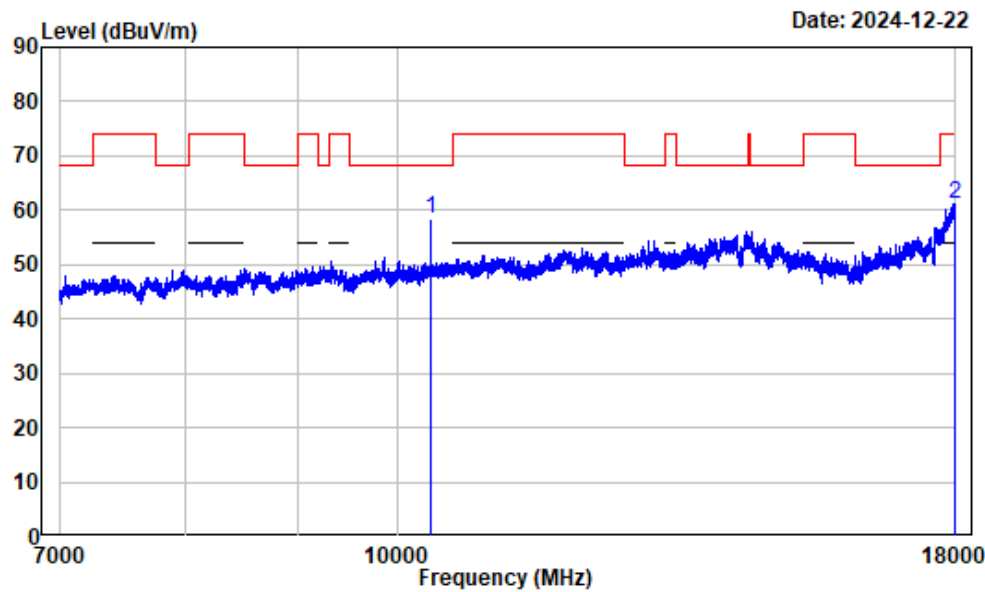

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	2.53	55.99	58.52	68.20	-9.68	Peak
2	17978.000	13.10	48.17	61.27	74.00	-12.73	Peak

7-18GHz\_Vertical\_Average\_802.11a\_ANT1

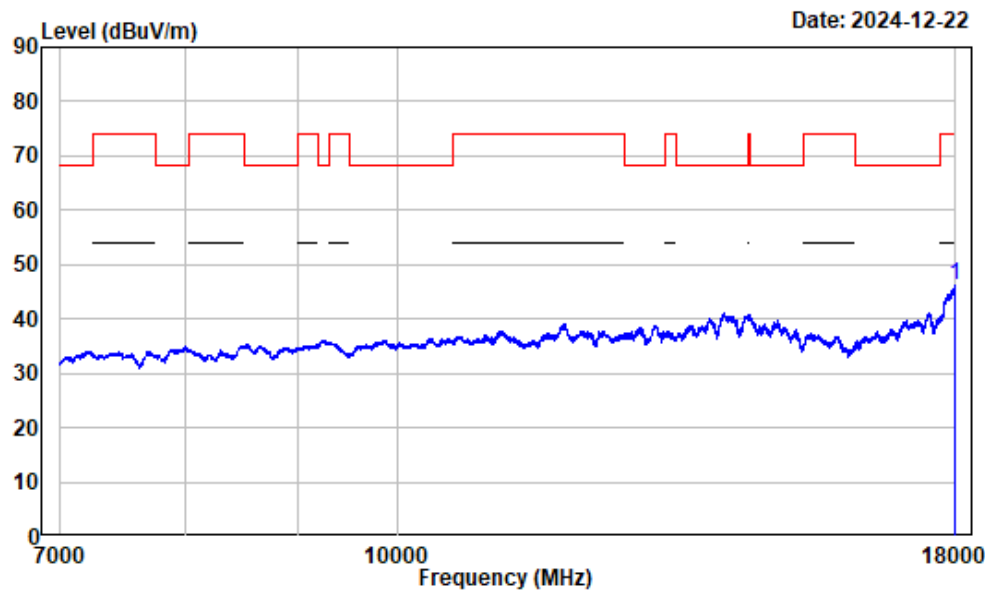


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-A\_ANT1-5180

Freq		Factor	Read Level		Limit	Over	Remark
			Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630		13.19	33.11	46.30	54.00	-7.70	Average




1-7GHz\_Horizontal\_802.11ac VHT20

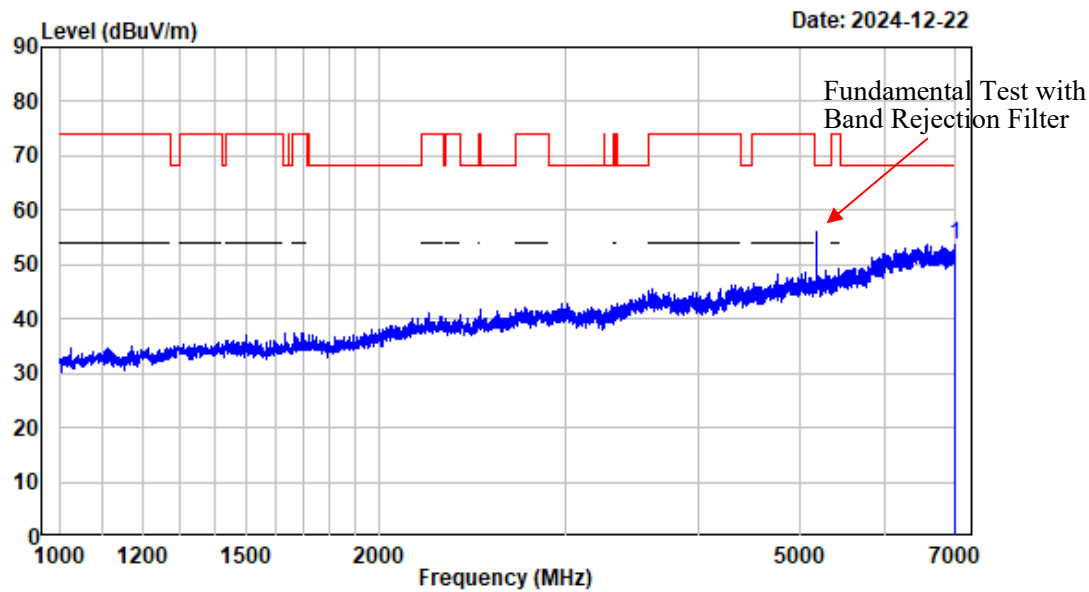

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6997.000	-2.94	56.70	53.76	68.20	-14.44	Peak


1-7GHz\_Vertical\_802.11ac VHT20

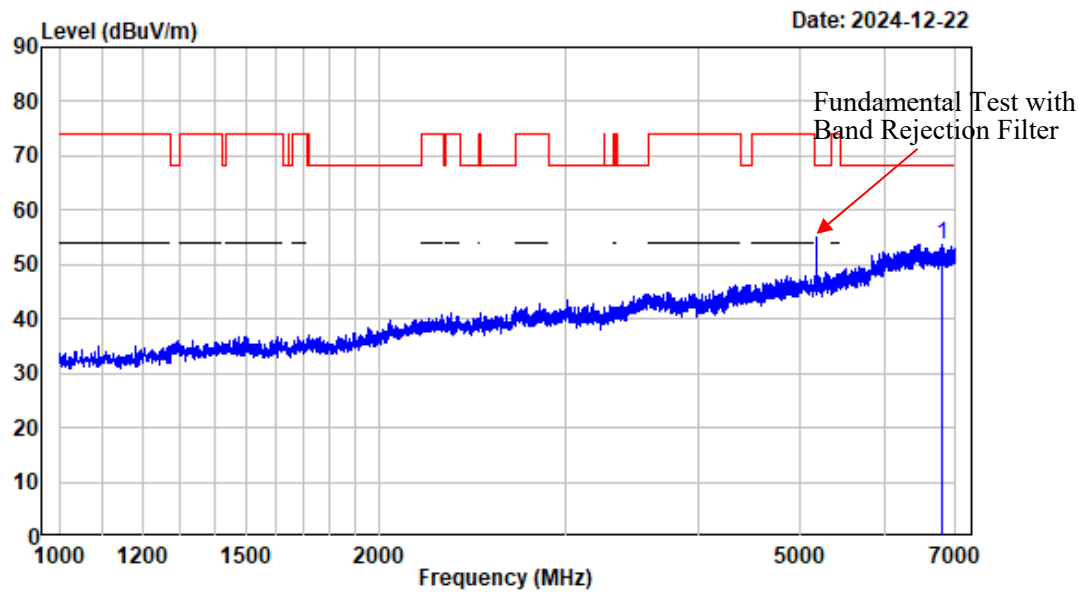

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6791.474	-3.33	57.12	53.79	68.20	-14.41	Peak


7-18GHz\_Horizontal\_Peak\_802.11ac VHT20

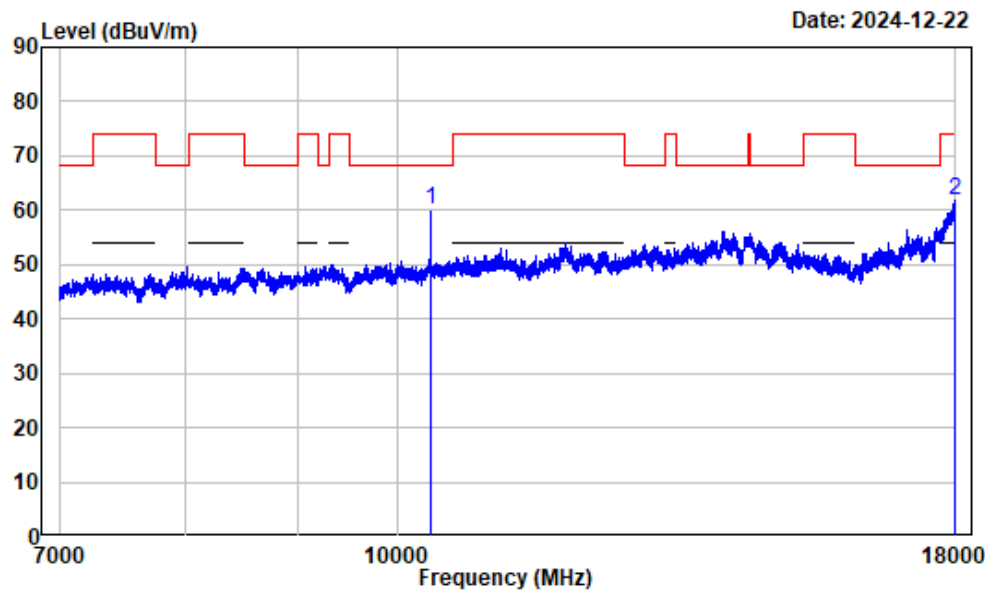

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	2.53	57.57	60.10	68.20	-8.10	Peak
2 17994.500	13.17	48.59	61.76	74.00	-12.24	Peak


7-18GHz\_Horizontal\_Average\_802.11ac VHT20

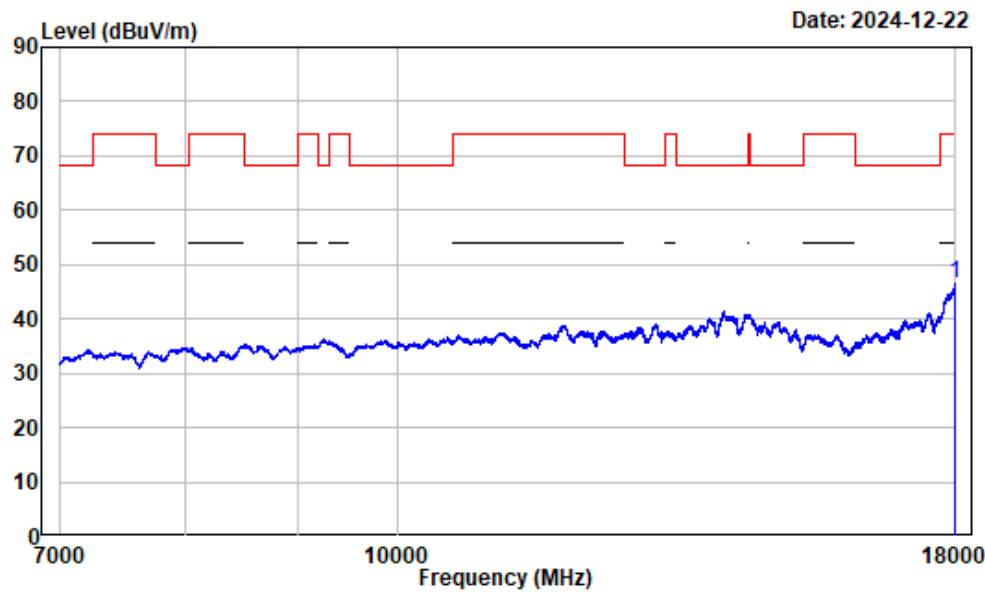

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.000	13.14	33.23	46.37	54.00	-7.63	Average


7-18GHz\_Vertical\_Peak\_802.11ac VHT20

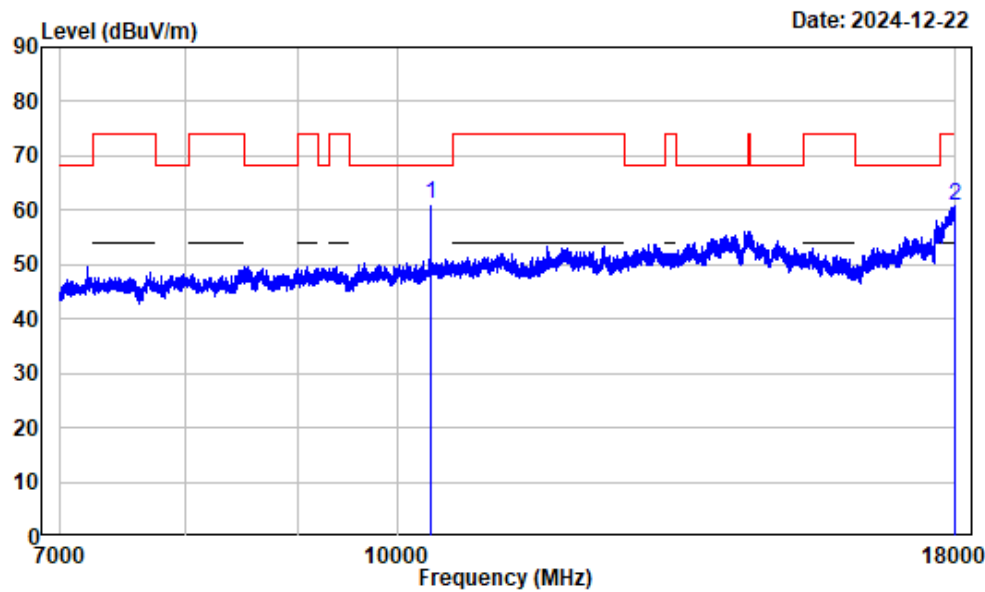

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	2.53	58.46	60.99	68.20	-7.21	Peak
2 17990.370	13.15	47.67	60.82	74.00	-13.18	Peak


7-18GHz\_Vertical\_Average\_802.11ac VHT20

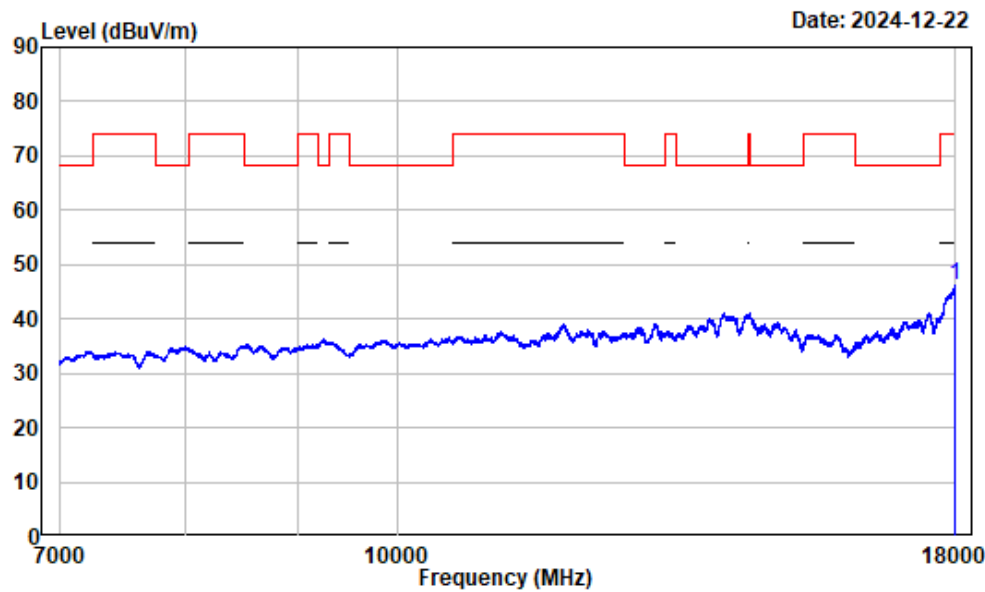

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17993.750	13.17	33.07	46.24	54.00	-7.76	Average


1-7GHz\_Horizontal\_802.11ac VHT40

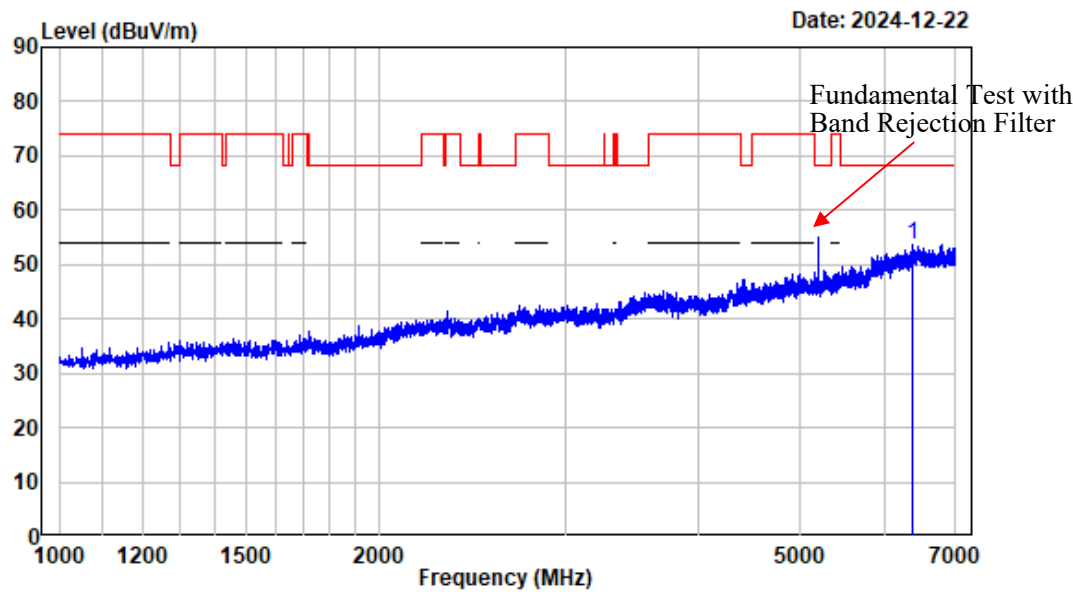

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

Freq		Factor	Read Level	Level	Limit	Over	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6364.670	-3.23	56.78	53.55	68.20	-14.65	Peak

1-7GHz\_Vertical\_802.11ac VHT40

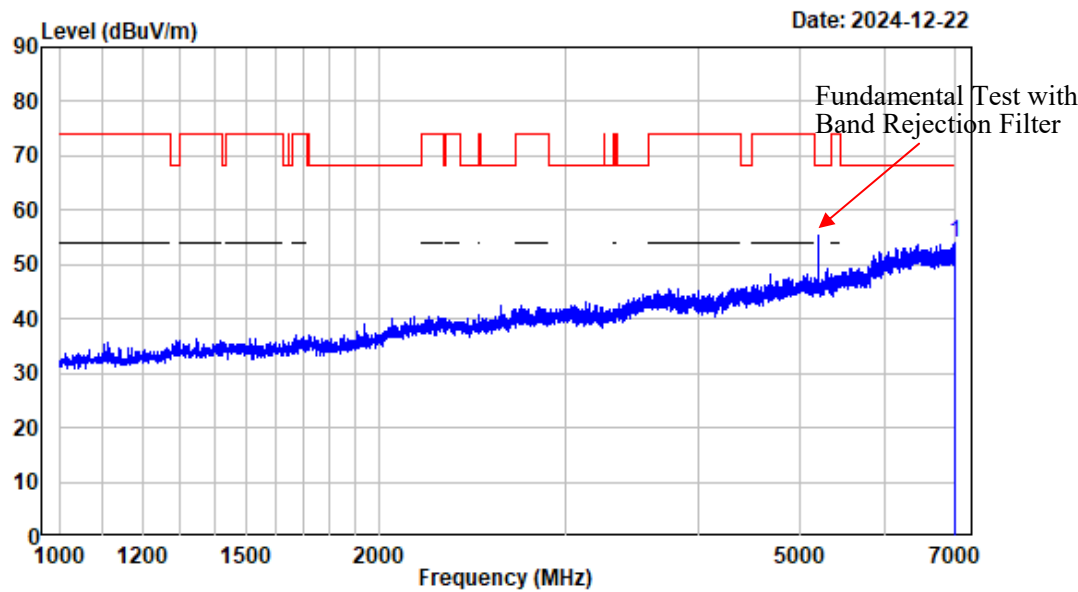


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6998.500	-2.94	56.91	53.97	68.20	-14.23	Peak




7-18GHz\_Horizontal\_Peak\_802.11ac VHT40

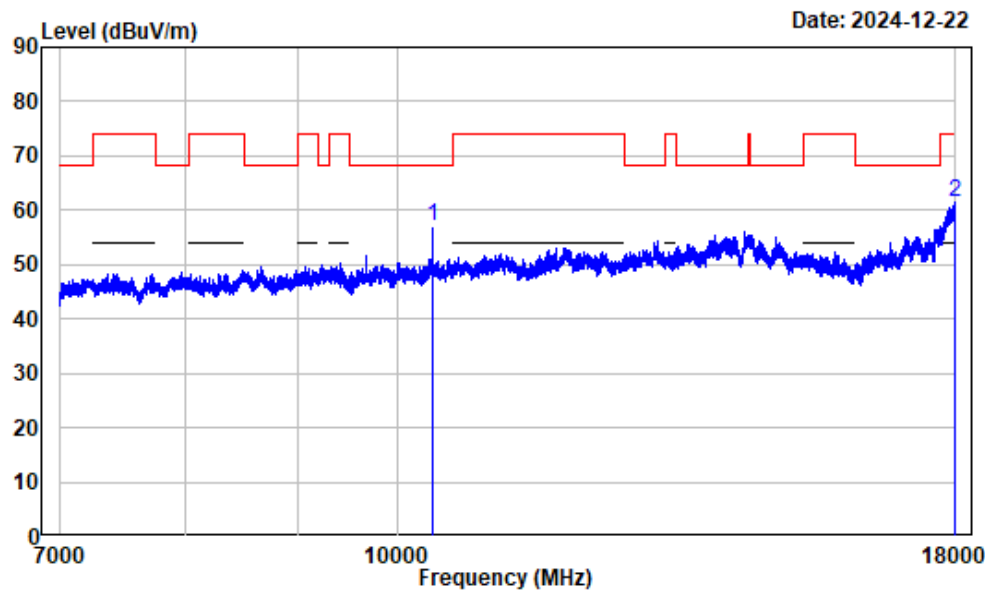

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	2.54	54.52	57.06	68.20	-11.14	Peak
2 17998.630	13.19	48.20	61.39	74.00	-12.61	Peak


7-18GHz\_Horizontal\_Average\_802.11ac VHT40

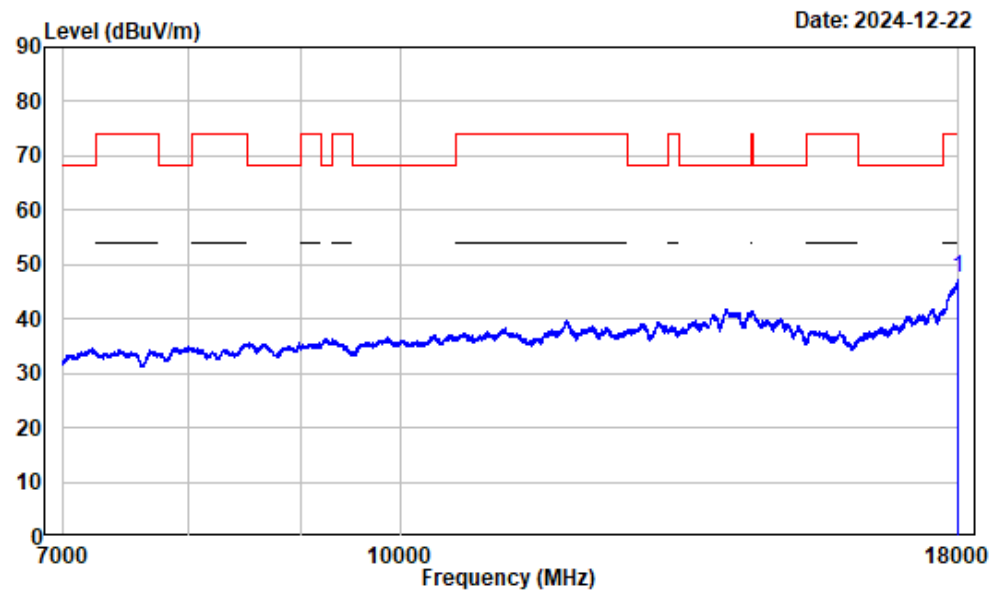

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630	13.19	34.28	47.47	54.00	-6.53	Average


7-18GHz\_Vertical\_Peak\_802.11ac VHT40

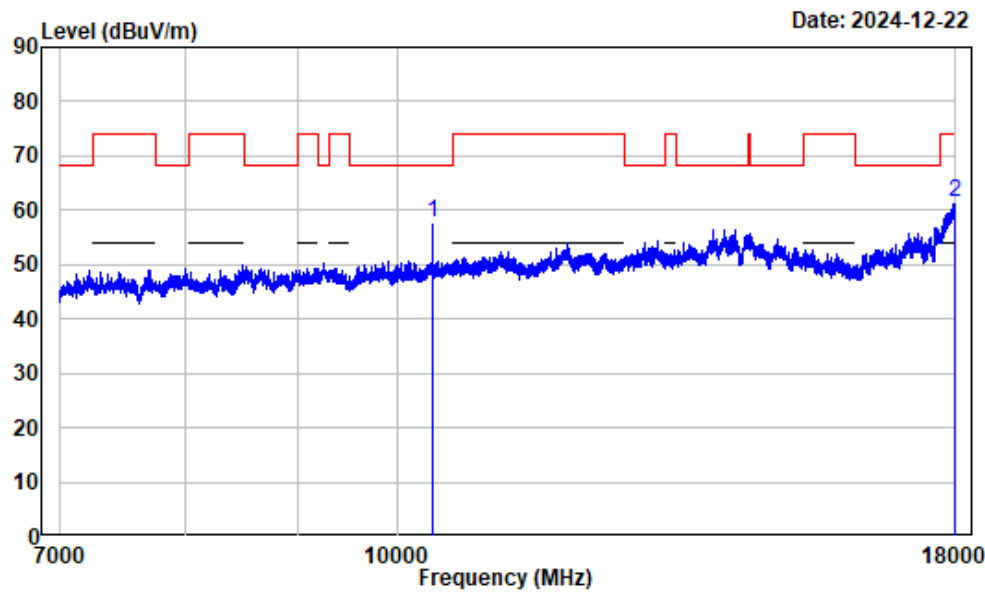

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	2.54	55.33	57.87	68.20	-10.33	Peak
2 17997.870	13.20	48.15	61.35	74.00	-12.65	Peak


7-18GHz\_Vertical\_Average\_802.11ac VHT40

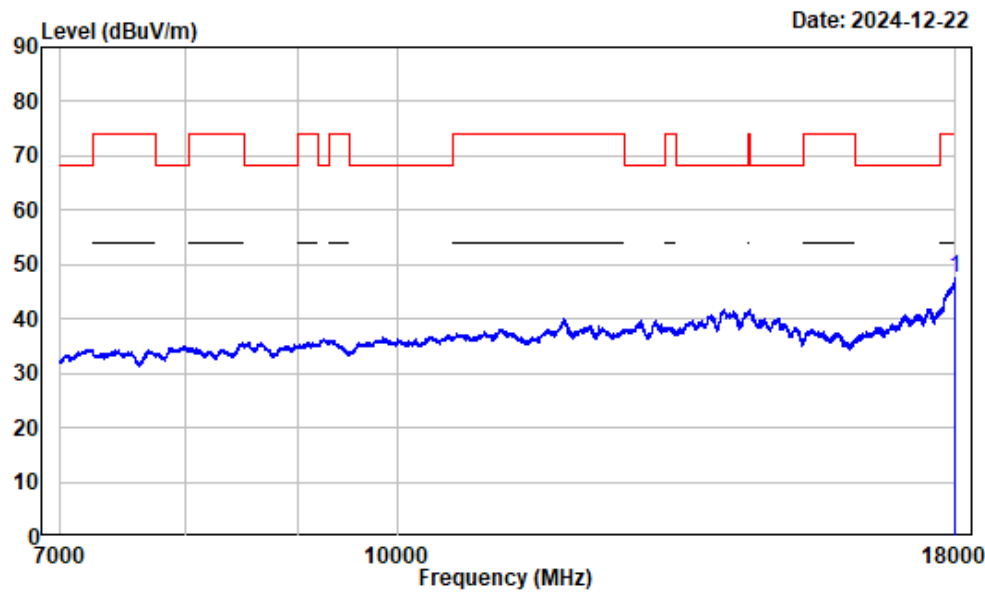

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.18	34.43	47.61	54.00	-6.39	Average


1-7GHz\_Horizontal\_802.11a\_ANT0

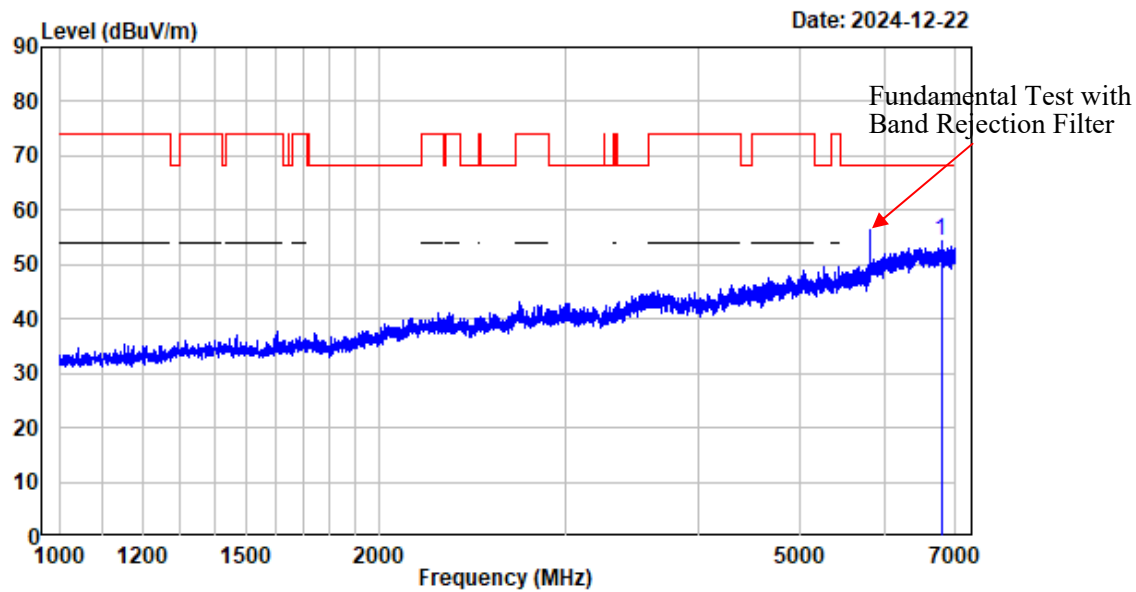

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6785.473	-3.31	57.49	54.18	68.20	-14.02	Peak


1-7GHz\_Vertical\_802.11a\_ANT0

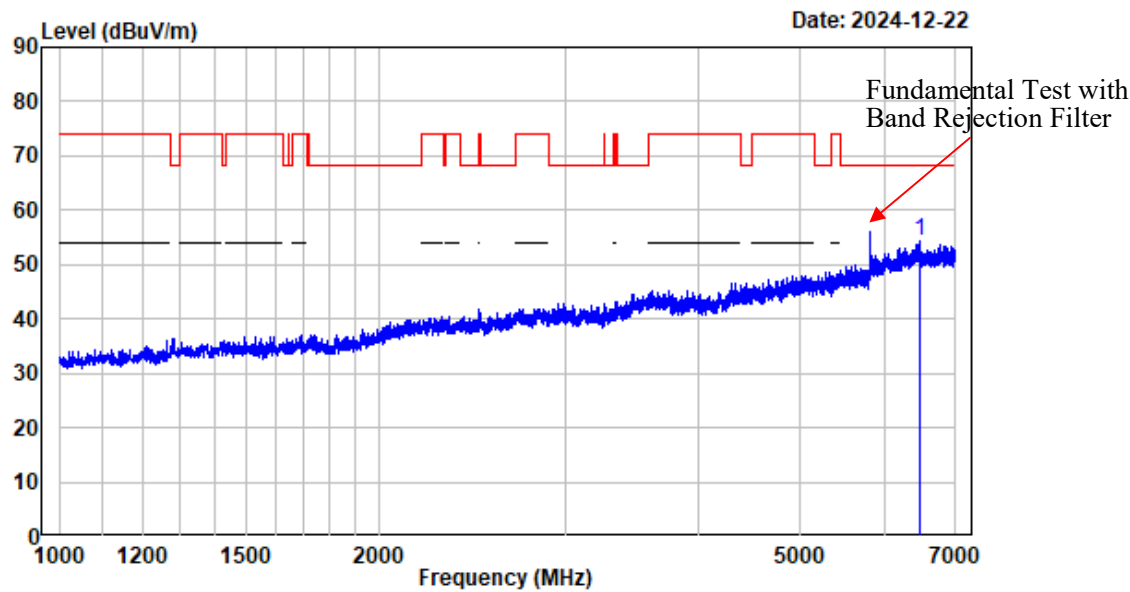

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6476.435	-2.92	57.28	54.36	68.20	-13.84	Peak


7-18GHz\_Horizontal\_Peak\_802.11a\_ANT0

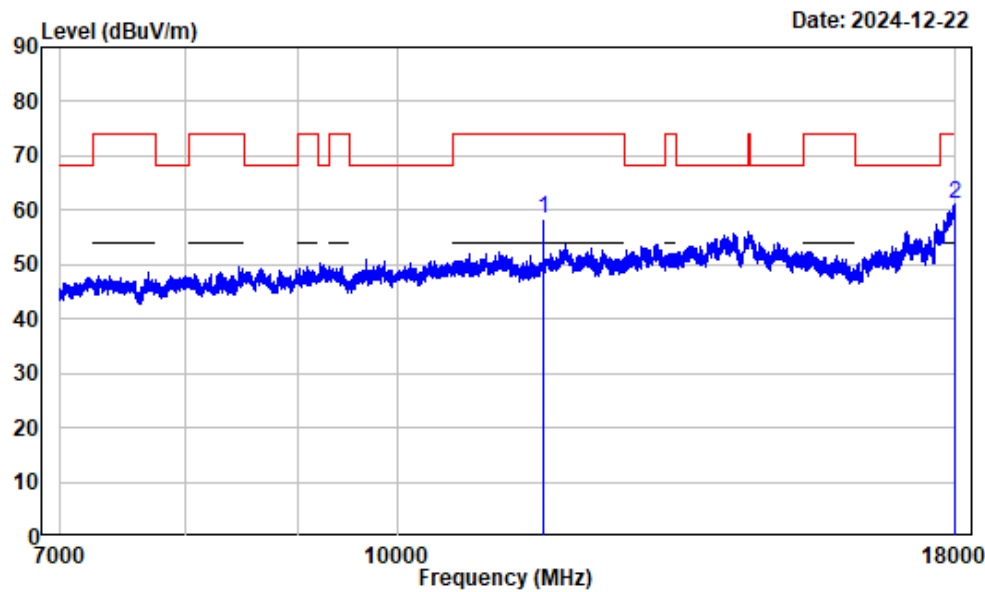

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	55.02	58.44	74.00	-15.56	Peak
2 17991.750	13.16	47.96	61.12	74.00	-12.88	Peak

7-18GHz\_Horizontal\_Average\_802.11a\_ANT0

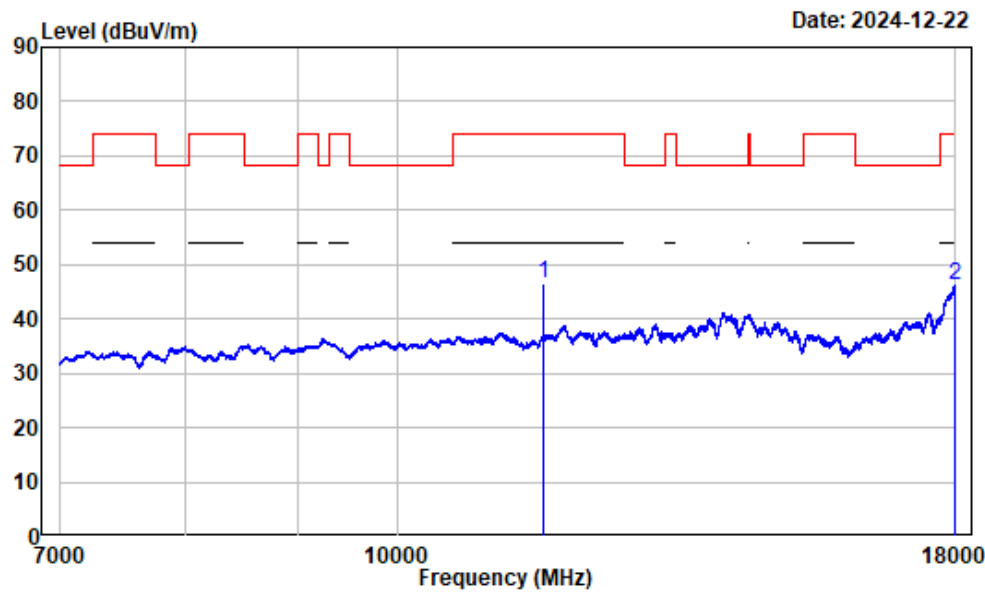


Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	42.94	46.36	54.00	-7.64	Average
2 17991.750	13.16	33.07	46.23	54.00	-7.77	Average




7-18GHz\_Vertical\_Peak\_802.11a\_ANT0

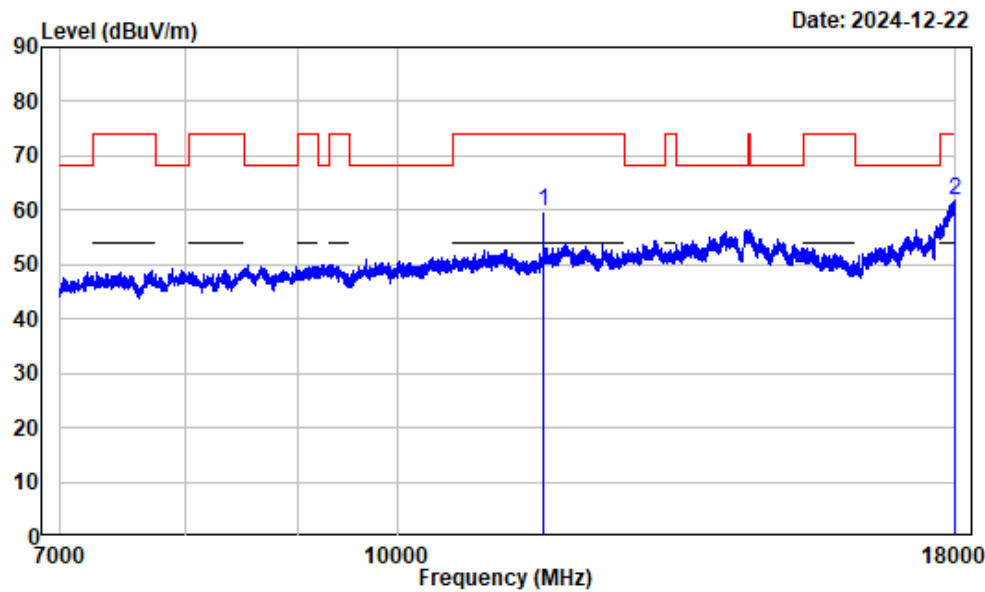

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	56.25	59.67	74.00	-14.33	Peak
2	17980.750	13.11	48.61	61.72	74.00	-12.28	Peak


7-18GHz\_Vertical\_Average\_802.11a\_ANT0

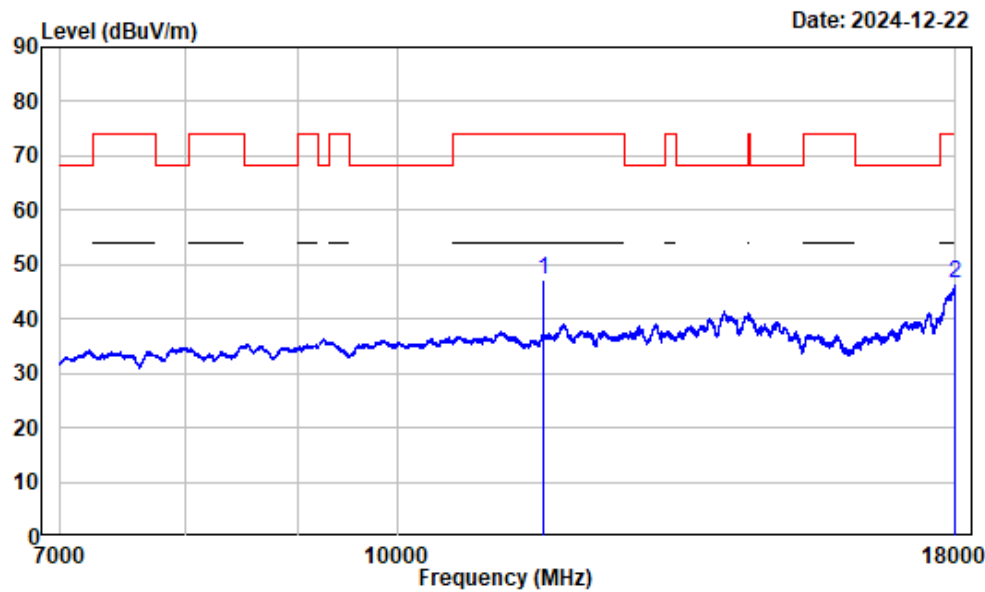

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT0-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	43.76	47.18	54.00	-6.82	Average
2 17998.630	13.19	33.22	46.41	54.00	-7.59	Average


1-7GHz\_Horizontal\_802.11a\_ANT1

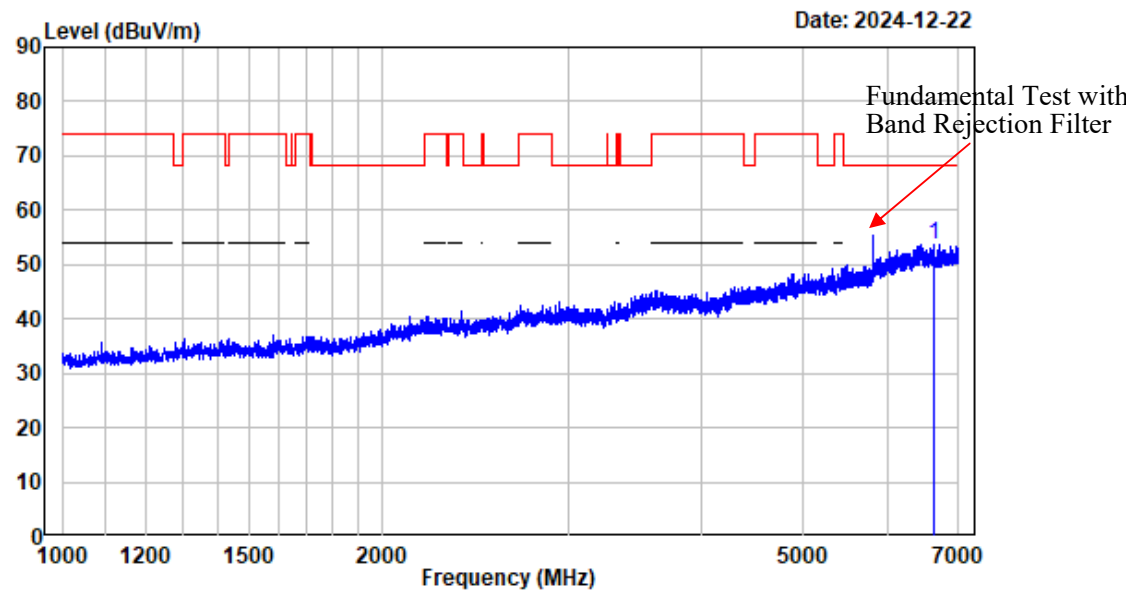

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6631.704	-3.02	56.81	53.79	68.20	-14.41	Peak


1-7GHz\_Vertical\_802.11a\_ANT1

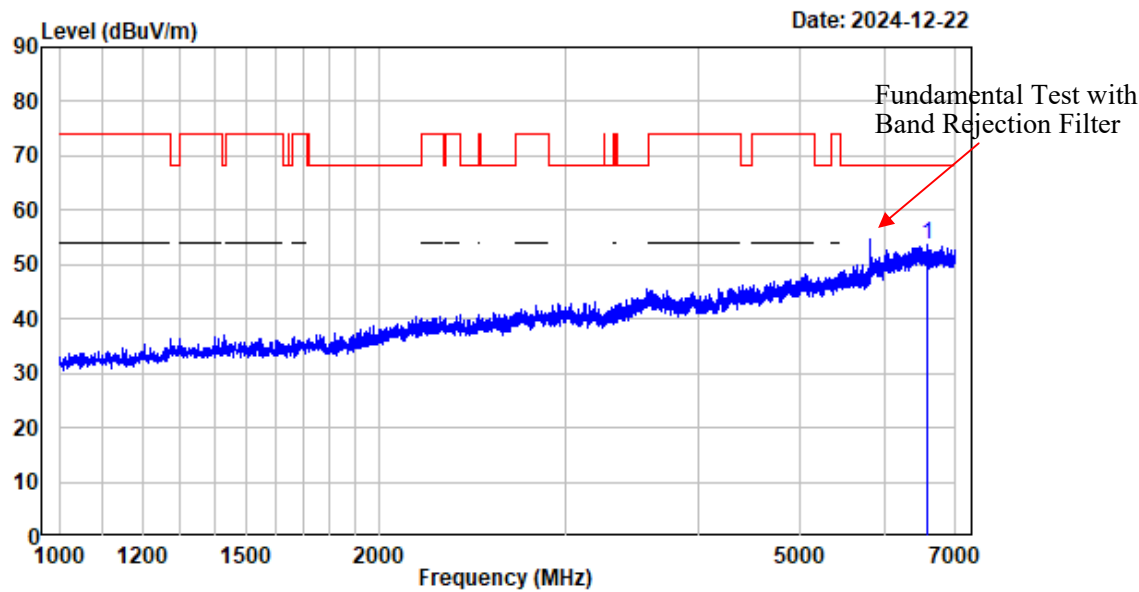

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6582.948	-3.10	56.59	53.49	68.20	-14.71	Peak


7-18GHz\_Horizontal\_Peak\_802.11a\_ANT1

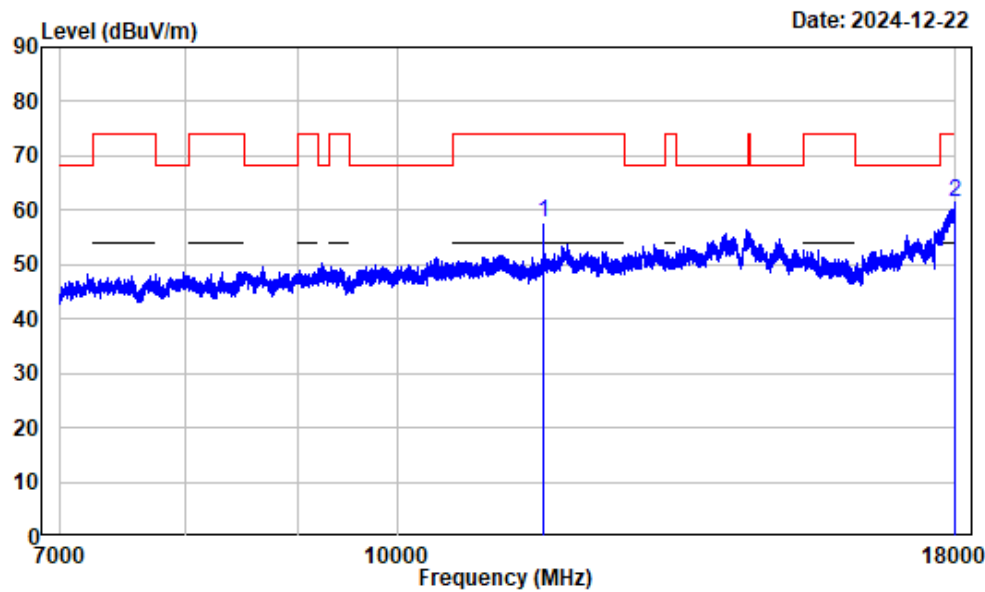

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	54.43	57.85	74.00	-16.15	Peak
2 17997.250	13.19	48.24	61.43	74.00	-12.57	Peak


7-18GHz\_Horizontal\_Average\_802.11a\_ANT1

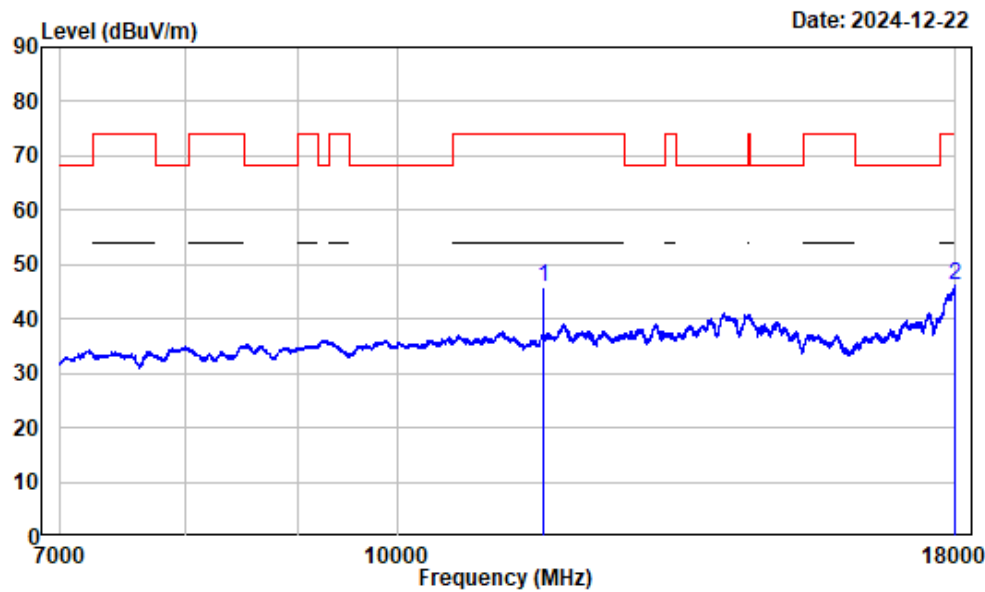

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	42.54	45.96	54.00	-8.04	Average
2 17997.570	13.19	32.94	46.13	54.00	-7.87	Average


7-18GHz\_Vertical\_Peak\_802.11a\_ANT1

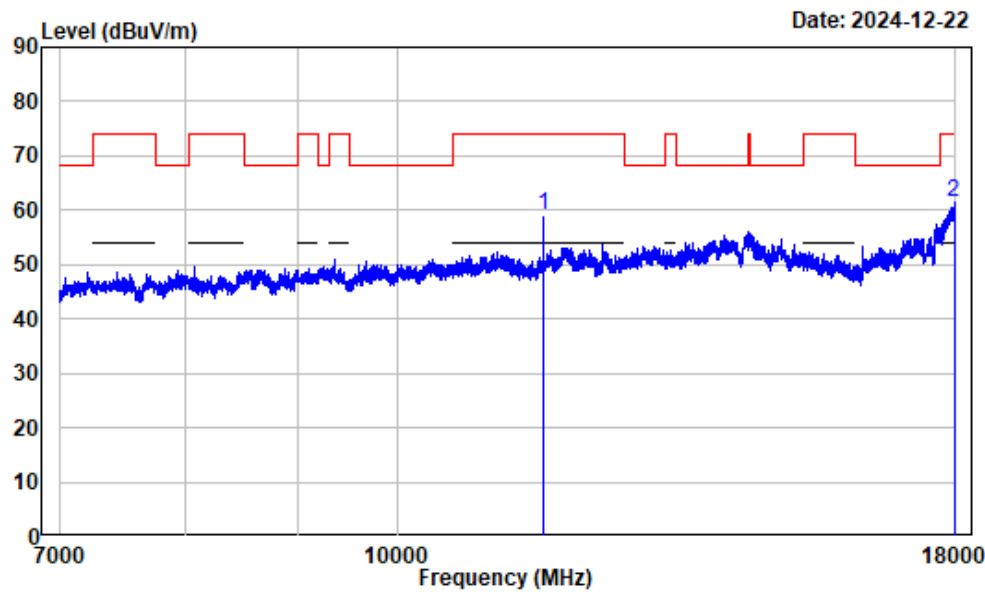

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	55.61	59.03	74.00	-14.97	Peak
2 17973.870	13.08	48.53	61.61	74.00	-12.39	Peak

7-18GHz\_Vertical\_Average\_802.11a\_ANT1

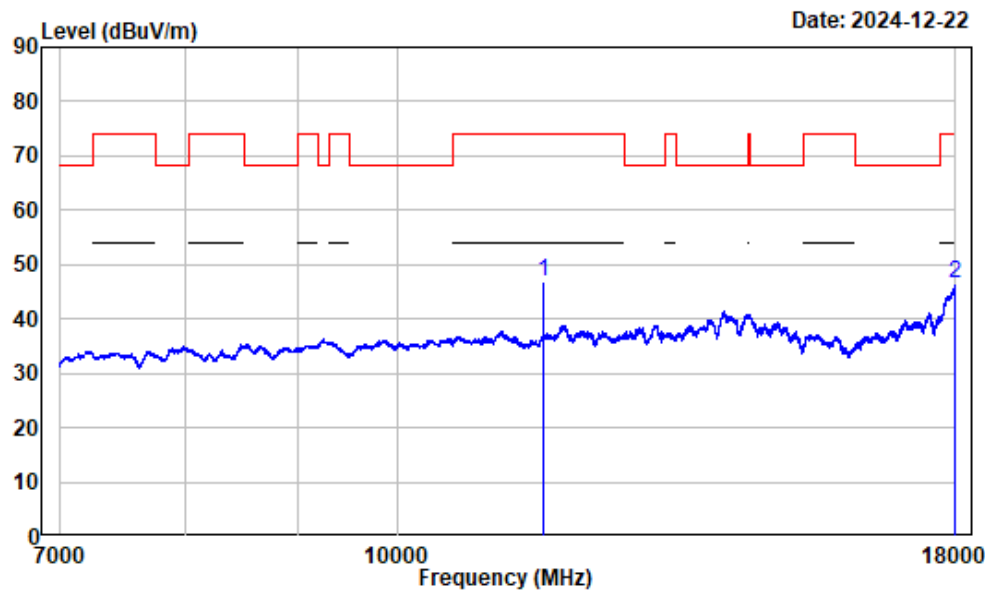


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-A\_ANT1-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	43.37	46.79	54.00	-7.21	Average
2 17995.880	13.18	33.22	46.40	54.00	-7.60	Average




1-7GHz\_Horizontal\_802.11ac VHT20

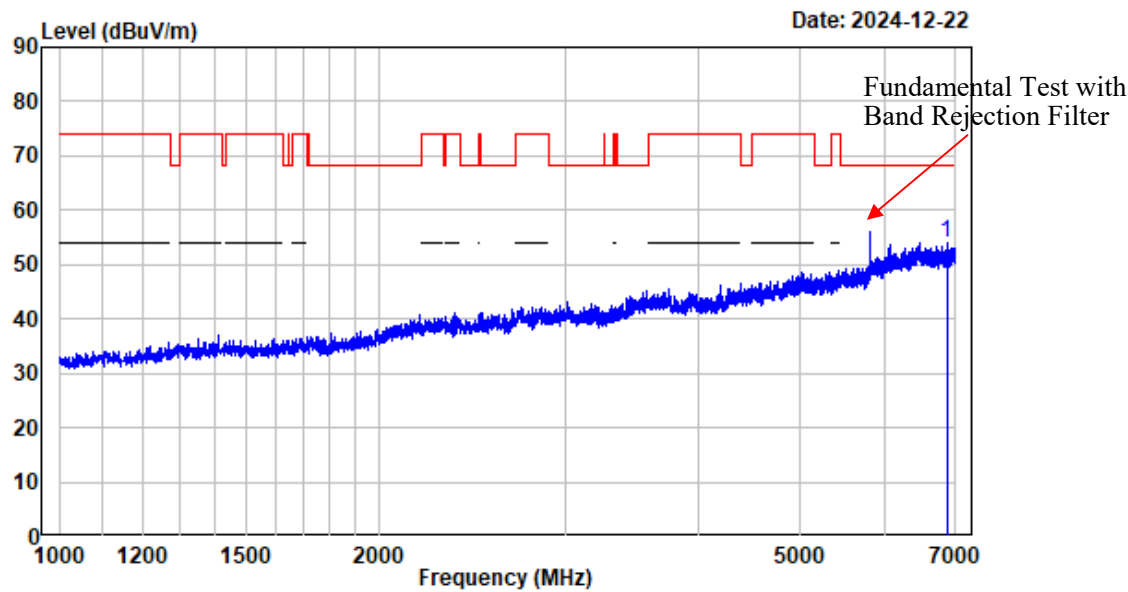

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6867.233	-3.11	57.27	54.16	68.20	-14.04	Peak


1-7GHz\_Vertical\_802.11ac VHT20

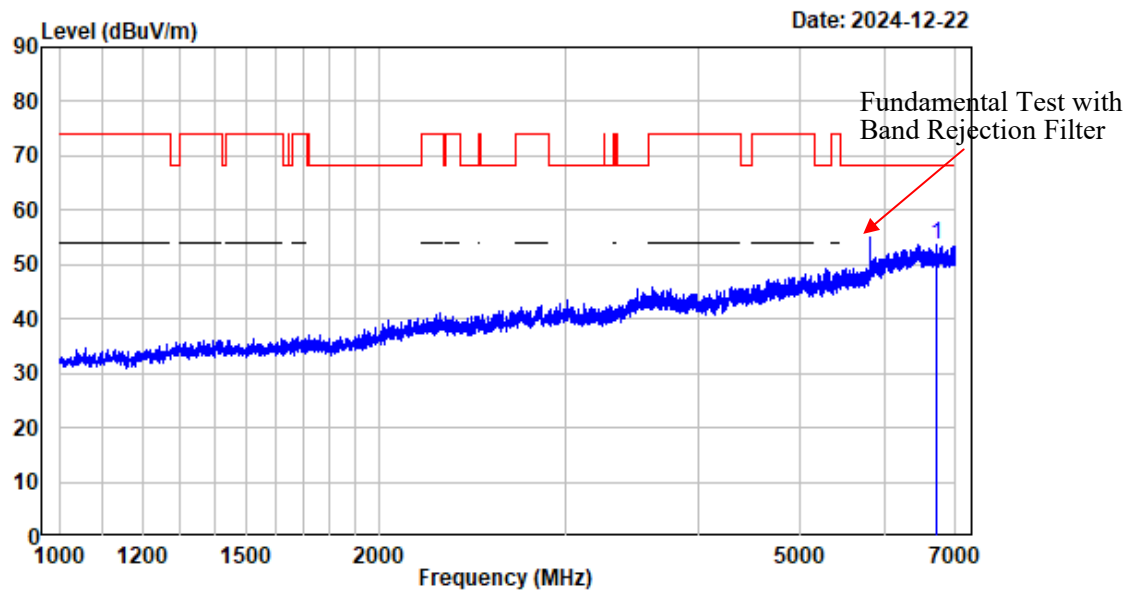

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6709.714	-3.33	57.06	53.73	68.20	-14.47	Peak


7-18GHz\_Horizontal\_Peak\_802.11ac VHT20

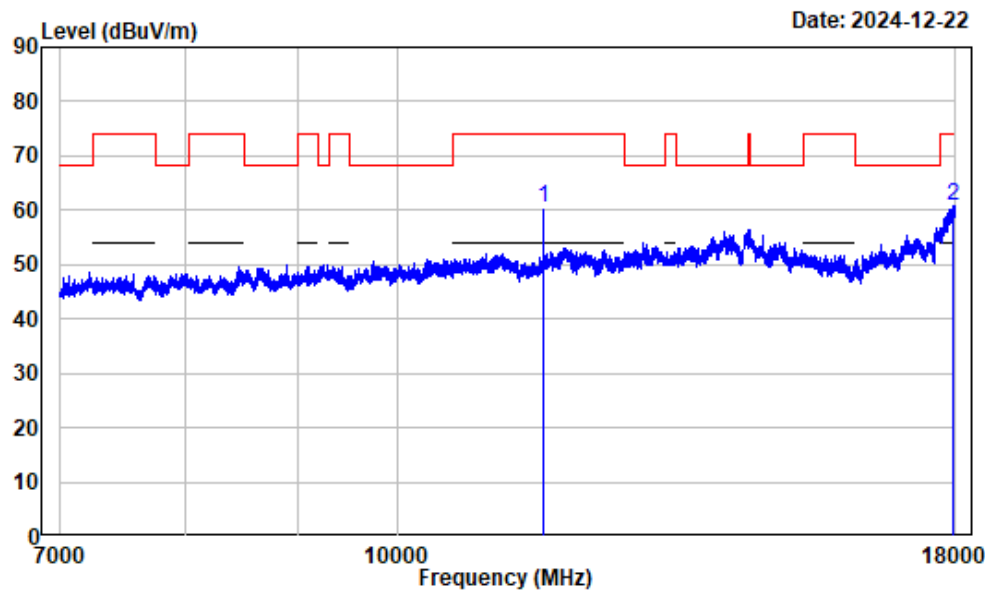

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	57.15	60.57	74.00	-13.43	Peak
2	17940.870	12.91	48.02	60.93	74.00	-13.07	Peak


7-18GHz\_Horizontal\_Average\_802.11ac VHT20

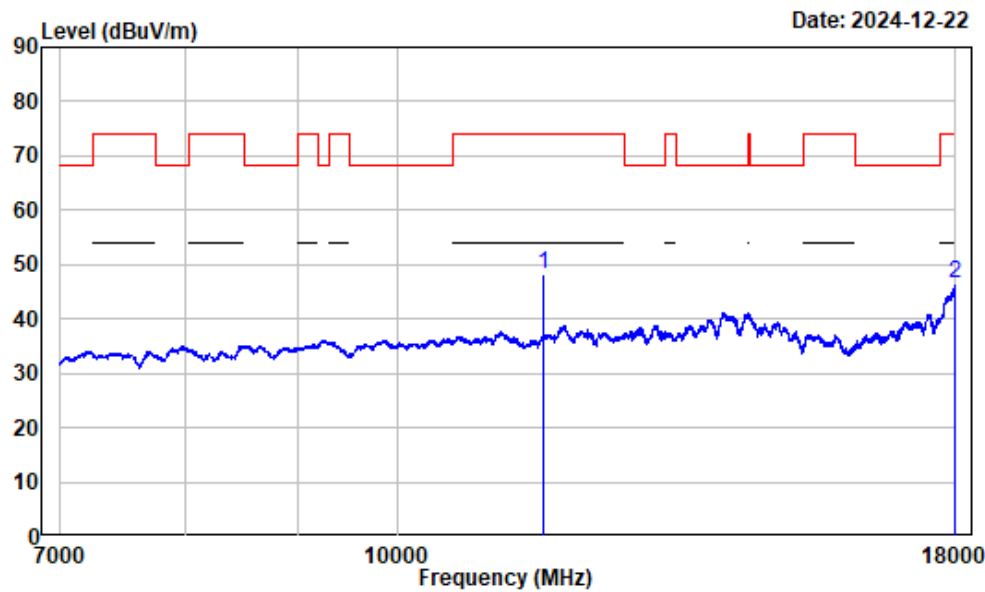

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	44.87	48.29	54.00	-5.71	Average
2 17996.650	13.19	33.26	46.45	54.00	-7.55	Average


7-18GHz\_Vertical\_Peak\_802.11ac VHT20

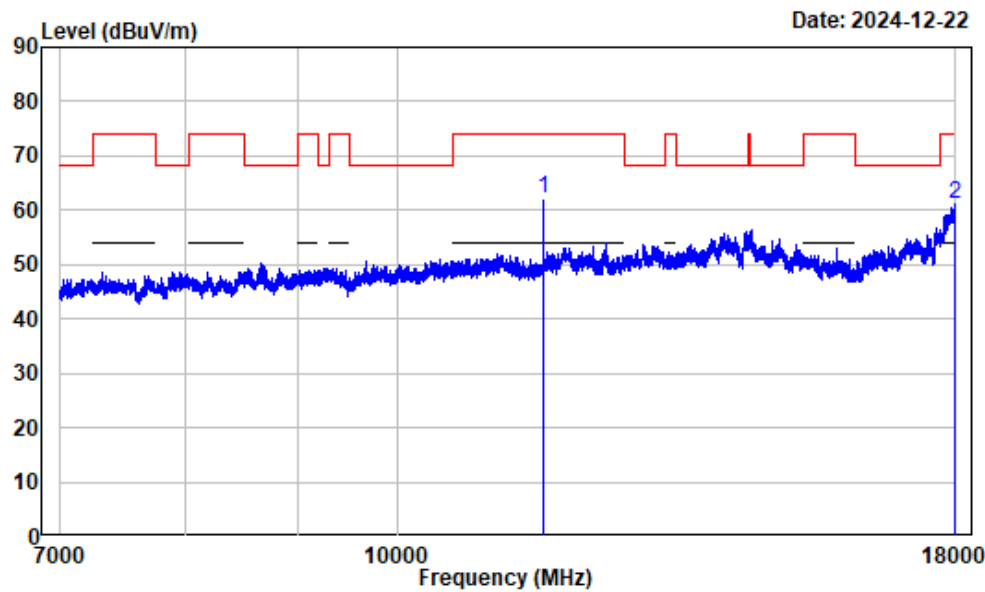

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	58.69	62.11	74.00	-11.89	Peak
2 17984.870	13.12	48.15	61.27	74.00	-12.73	Peak


7-18GHz\_Vertical\_Average\_802.11ac VHT20

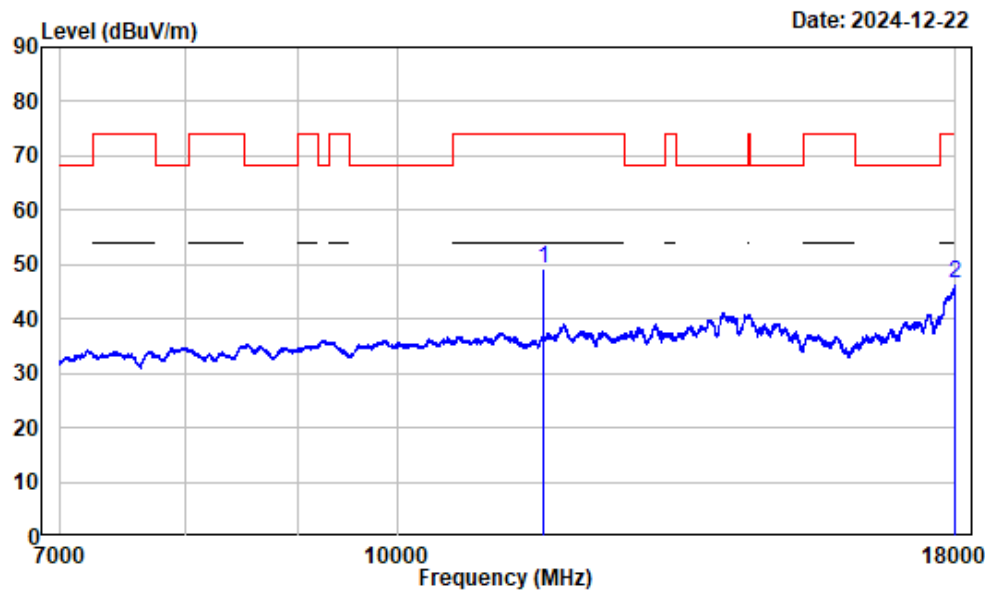

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	45.71	49.13	54.00	-4.87	Average
2 17994.500	13.17	33.40	46.57	54.00	-7.43	Average


1-7GHz\_Horizontal\_802.11ac VHT40

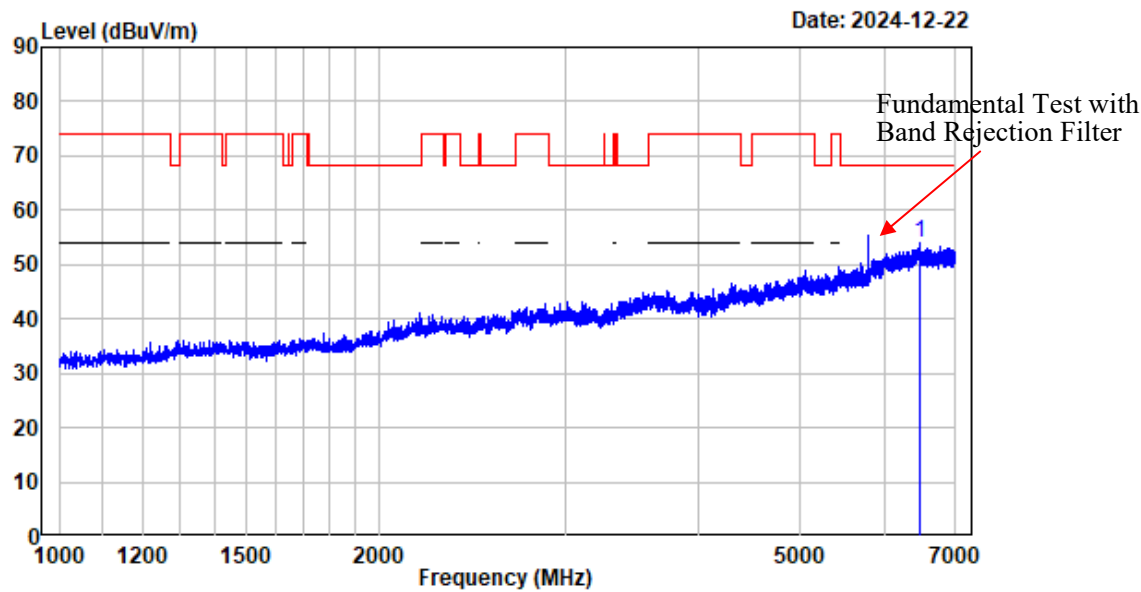

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6482.436	-2.92	56.97	54.05	68.20	-14.15 Peak

1-7GHz\_Vertical\_802.11ac VHT40

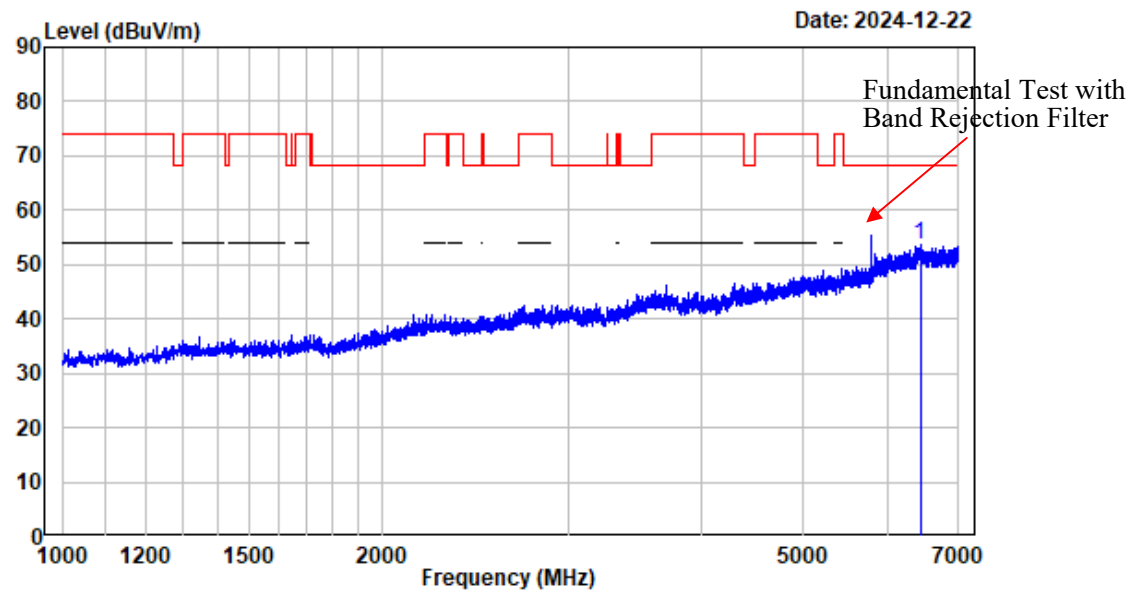


Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6441.180	-2.87	56.46	53.59	68.20	-14.61 Peak




7-18GHz\_Horizontal\_Peak\_802.11ac VHT40

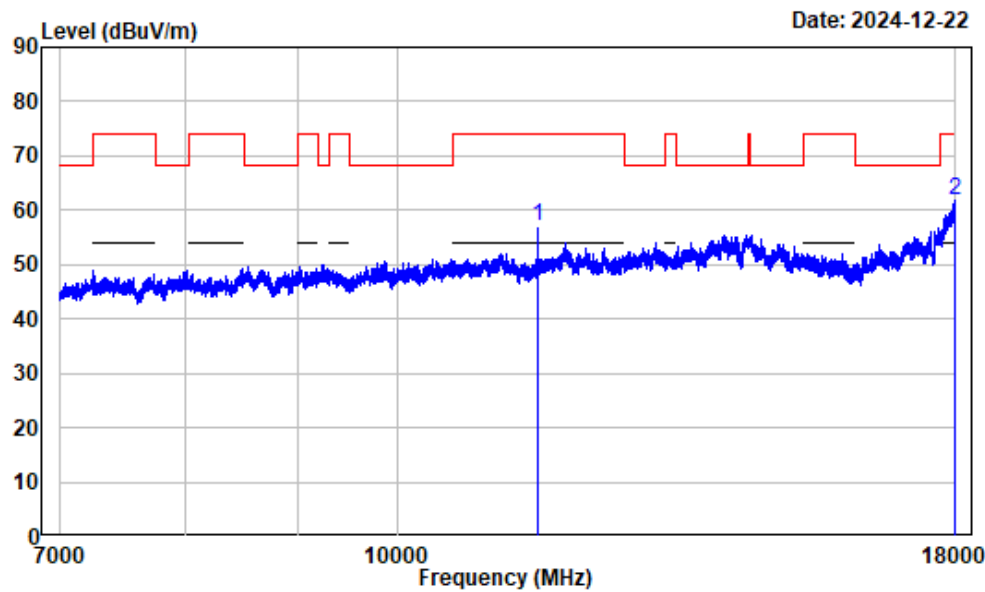

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	53.96	57.17	74.00	-16.83	Peak
2 17983.500	13.11	48.67	61.78	74.00	-12.22	Peak


7-18GHz\_Horizontal\_Average\_802.11ac VHT40

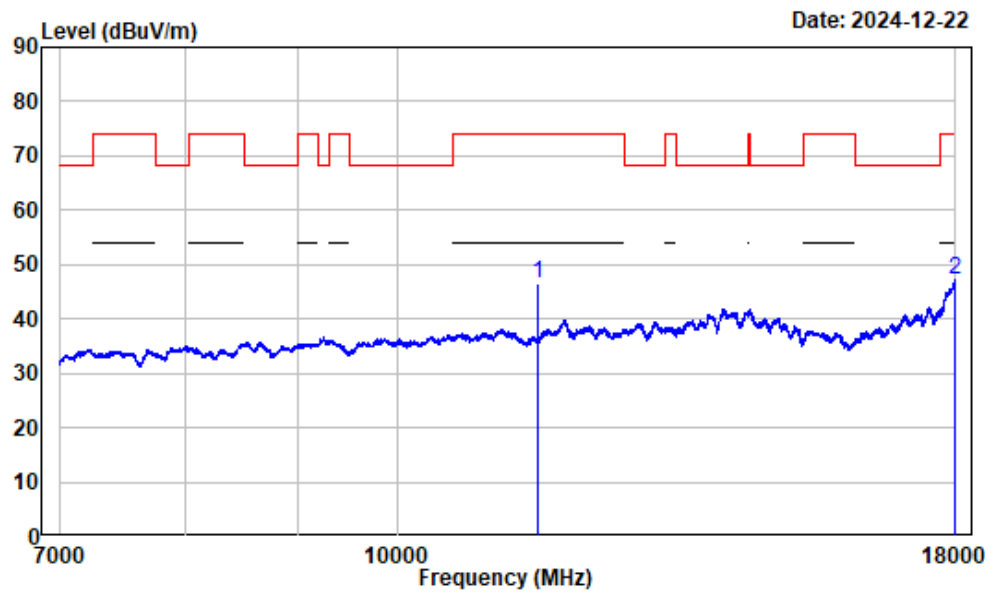

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	43.34	46.55	54.00	-7.45	Average
2 17995.580	13.18	34.10	47.28	54.00	-6.72	Average


7-18GHz\_Vertical\_Peak\_802.11ac VHT40

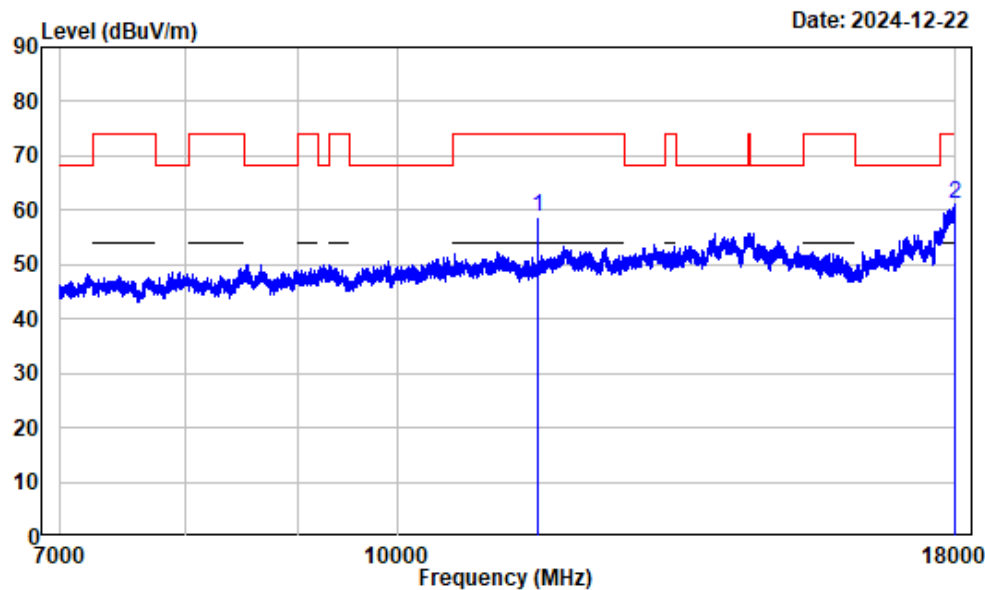

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	55.42	58.63	74.00	-15.37	Peak
2 17984.870	13.12	48.07	61.19	74.00	-12.81	Peak


7-18GHz\_Vertical\_Average\_802.11ac VHT40

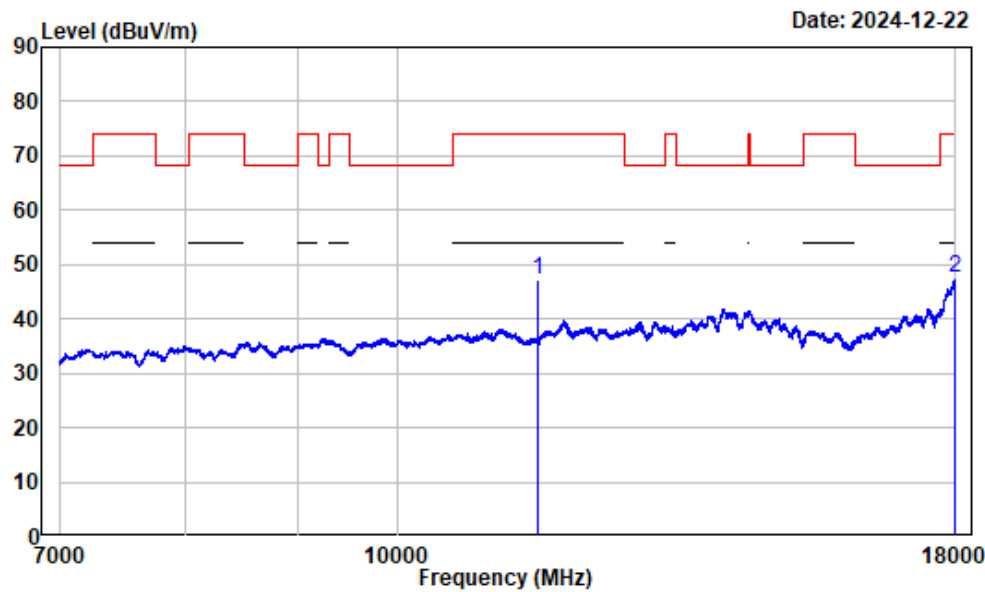

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak  
Note : 5GWiFi-Band4-AC40-5795

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	44.15	47.36	54.00	-6.64	Average
2 17993.860	13.17	34.25	47.42	54.00	-6.58	Average


18-40GHz\_Horizontal\_802.11ac VHT20

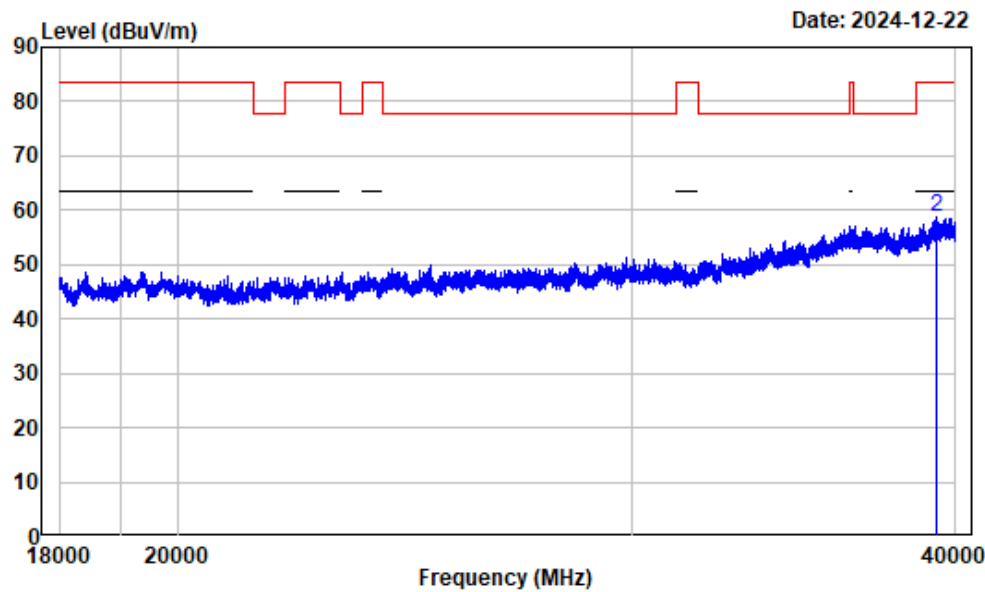

Condition : Horizontal  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39359.170	22.58	30.77	53.35	63.50	-10.15	Average
2	39359.170	22.58	36.19	58.77	83.50	-24.73	Peak

18-40GHz\_Vertical\_802.11ac VHT20

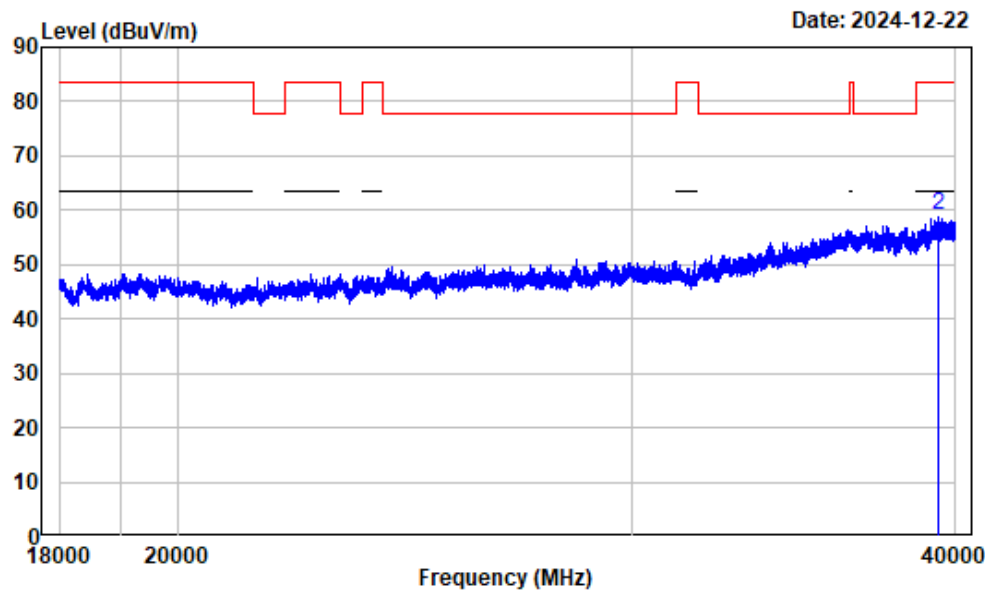

Condition : Vertical  
Project No. : 2401A63533E-RF  
Tester : Zenos Qiao  
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak  
: Average reading:RBW:1MHz VBW:1kHz Detector:Peak  
Note : 5GWiFi-Band4-AC20-5825

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39364.670	22.57	30.98	53.55	63.50	-9.95	Average
2	39364.670	22.57	36.45	59.02	83.50	-24.48	Peak

## **RF Conducted data**

Please refer to Annex "Appendix A" for detail test data.

## RF EXPOSURE EVALUATION

### MAXIMUM PERMISSIBLE EXPOSURE (MPE)

#### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

#### MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .

R is the minimum separation distance in meters

f = frequency in MHz

#### Result

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup> (dBm)	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBi)	(dBd)	(dBm)	(W)		
BLE	2402-2480	4	2.5	0.35	4.35	0.003	0.2	0.768
BT	2402-2480	7	2.5	0.35	7.35	0.005	0.2	0.768
2.4G WIFI	2412-2472	25.5	4.37	2.22	27.72	0.592	0.2	0.768
5G WIFI	5150-5250	13.0	4.22	2.07	15.07	0.032	0.2	0.768
	5725-5850	20	4.83	2.68	22.68	0.185	0.2	0.768



Note 1: The antenna gain and Conducted output power including Tune-up Tolerance was declared and provided by the manufacturer

Note 2: BT and 2.4G WIFI can be transmitted simultaneously. 2.4G WIFI and 5G WIFI should not be sent simultaneously.

The ratio=  $ERP_{2.4G\ Wi-Fi}/limit + ERP_{BT}/limit = 0.777 < 1$

**Result: Compliant**

## **EUT PHOTOGRAPHS**

---

Please refer to the attachment 2401A63533E-RF External photo and 2401A63533E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2401A63533E-RFB Test Setup photo.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***