



# FCC RADIO TEST REPORT

FCC ID : 2AFZZK11AG  
Equipment : Mobile Phone  
Brand Name : POCO  
Model Name : M2012K11AG  
Applicant : Xiaomi Communications Co., Ltd.  
#019, 9th Floor, Building 6, 33 Xi'erqi Middle  
Road, Haidian District, Beijing, China, 100085  
Manufacturer : Xiaomi Communications Co., Ltd.  
#019, 9th Floor, Building 6, 33 Xi'erqi Middle  
Road, Haidian District, Beijing, China, 100085  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 05, 2021 and testing was started from Jan. 08, 2021 and completed on Jan. 26, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                          | <b>3</b>  |
| <b>Summary of Test Result.....</b>                               | <b>4</b>  |
| <b>1 General Description.....</b>                                | <b>5</b>  |
| 1.1 Product Feature of Equipment Under Test.....                 | 5         |
| 1.2 Modification of EUT .....                                    | 5         |
| 1.3 Testing Location .....                                       | 6         |
| 1.4 Applicable Standards.....                                    | 6         |
| <b>2 Test Configuration of Equipment Under Test .....</b>        | <b>7</b>  |
| 2.1 Carrier Frequency Channel .....                              | 7         |
| 2.2 Test Mode.....                                               | 8         |
| 2.3 Connection Diagram of Test System.....                       | 9         |
| 2.4 Support Unit used in test configuration and system .....     | 9         |
| 2.5 EUT Operation Test Setup .....                               | 9         |
| 2.6 Measurement Results Explanation Example.....                 | 10        |
| <b>3 Test Result.....</b>                                        | <b>11</b> |
| 3.1 6dB and 99% Bandwidth Measurement .....                      | 11        |
| 3.2 Output Power Measurement.....                                | 20        |
| 3.3 Power Spectral Density Measurement .....                     | 21        |
| 3.4 Conducted Band Edges and Spurious Emission Measurement ..... | 30        |
| 3.5 Radiated Band Edges and Spurious Emission Measurement .....  | 39        |
| 3.6 AC Conducted Emission Measurement.....                       | 43        |
| 3.7 Antenna Requirements.....                                    | 45        |
| <b>4 List of Measuring Equipment .....</b>                       | <b>46</b> |
| <b>5 Uncertainty of Evaluation.....</b>                          | <b>47</b> |
| <b>Appendix A. Conducted Test Results</b>                        |           |
| <b>Appendix B. AC Conducted Emission Test Result</b>             |           |
| <b>Appendix C. Radiated Spurious Emission</b>                    |           |
| <b>Appendix D. Radiated Spurious Emission Plots</b>              |           |
| <b>Appendix E. Duty Cycle Plots</b>                              |           |
| <b>Appendix F. Setup Photographs</b>                             |           |



## History of this test report

| Report No. | Version | Description             | Issued Date   |
|------------|---------|-------------------------|---------------|
| FR110409B  | 01      | Initial issue of report | Feb. 08, 2021 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## Summary of Test Result

| Report Clause | Ref Std. Clause       | Test Items                                 | Result (PASS/FAIL) | Remark                                    |
|---------------|-----------------------|--------------------------------------------|--------------------|-------------------------------------------|
| 3.1           | 15.247(a)(2)          | 6dB Bandwidth                              | Pass               | -                                         |
| 3.1           | 2.1049                | 99% Occupied Bandwidth                     | Reporting only     | -                                         |
| 3.2           | 15.247(b)(3)          | Output Power                               | Pass               | -                                         |
| 3.3           | 15.247(e)             | Power Spectral Density                     | Pass               | -                                         |
| 3.4           | 15.247(d)             | Conducted Band Edges and Spurious Emission | Pass               | -                                         |
| 3.5           | 15.247(d)             | Radiated Band Edges and Spurious Emission  | Pass               | Under limit<br>4.99 dB at<br>2496.080 MHz |
| 3.6           | 15.207                | AC Conducted Emission                      | Pass               | Under limit<br>15.79 dB at<br>0.503 MHz   |
| 3.7           | 15.203 &<br>15.247(b) | Antenna Requirement                        | Pass               | -                                         |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Amy Chen**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, and GNSS.

| Product Specification subjective to this standard |                                                                                                                                                                                                                                                                                                                                                                                        |                                       |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Sample 1                                          | EUT with Battery 1                                                                                                                                                                                                                                                                                                                                                                     |                                       |
| Sample 2                                          | EUT with Battery 2                                                                                                                                                                                                                                                                                                                                                                     |                                       |
| Antenna Type                                      | <b>WWAN:</b> PIFA Antenna<br><b>WLAN 5GHz:</b><br><Ant. 11>: PIFA Antenna<br><Ant. 6>: PIFA Antenna<br><b>WLAN 2.4GHz:</b><br><Ant. 11>: PIFA Antenna<br><Ant. 7>: PIFA Antenna<br><b>Bluetooth:</b><br><Ant. 11>: PIFA Antenna<br><Ant. 7>: PIFA Antenna<br><b>GPS / Glonass / BDS / Galileo:</b><br><L1 Ant.>: PIFA Antenna<br><L5 Ant.>: PIFA Antenna<br><b>NFC:</b> Planar Antenna |                                       |
| Antenna information                               |                                                                                                                                                                                                                                                                                                                                                                                        |                                       |
| 2400 MHz ~ 2483.5 MHz                             | Peak Gain (dBi)                                                                                                                                                                                                                                                                                                                                                                        | Ant. 11: -3.1 dBi<br>Ant. 7: -3.4 dBi |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Location

|                           |                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory                                                   |
| <b>Test Site Location</b> | No.52, Huaya 1st Rd., Guishan Dist.,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                               |
|                           | TH05-HY, CO05-HY                                                                                                      |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

|                           |                                                                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory                                                                       |
| <b>Test Site Location</b> | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,<br>Taoyuan City, Taiwan (R.O.C.)<br>TEL: +886-3-327-0868<br>FAX: +886-3-327-0855 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                   |
|                           | 03CH16-HY                                                                                                                                 |

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

| Frequency Band  | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|-----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 0       | 2402           | 21      | 2444           |
|                 | 1       | 2404           | 22      | 2446           |
|                 | 2       | 2406           | 23      | 2448           |
|                 | 3       | 2408           | 24      | 2450           |
|                 | 4       | 2410           | 25      | 2452           |
|                 | 5       | 2412           | 26      | 2454           |
|                 | 6       | 2414           | 27      | 2456           |
|                 | 7       | 2416           | 28      | 2458           |
|                 | 8       | 2418           | 29      | 2460           |
|                 | 9       | 2420           | 30      | 2462           |
|                 | 10      | 2422           | 31      | 2464           |
|                 | 11      | 2424           | 32      | 2466           |
|                 | 12      | 2426           | 33      | 2468           |
|                 | 13      | 2428           | 34      | 2470           |
|                 | 14      | 2430           | 35      | 2472           |
|                 | 15      | 2432           | 36      | 2474           |
|                 | 16      | 2434           | 37      | 2476           |
|                 | 17      | 2436           | 38      | 2478           |
|                 | 18      | 2438           | 39      | 2480           |
|                 | 19      | 2440           | -       | -              |
|                 | 20      | 2442           | -       | -              |

## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases                                                    |                                                                                                       |
|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Test Item                                                                      | Data Rate / Modulation                                                                                |
| <b>Conducted Test Cases</b>                                                    | Bluetooth – LE / GFSK                                                                                 |
|                                                                                | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps                                                              |
|                                                                                | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps                                                              |
|                                                                                | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps                                                              |
|                                                                                | Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps                                                              |
|                                                                                | Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps                                                              |
|                                                                                | Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps                                                              |
| <b>Radiated Test Cases</b>                                                     | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps                                                              |
|                                                                                | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps                                                              |
|                                                                                | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps                                                              |
|                                                                                | Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps                                                              |
|                                                                                | Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps                                                              |
|                                                                                | Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps                                                              |
| <b>AC Conducted Emission</b>                                                   | Mode 1: Bluetooth Link + WLAN (2.4GHz) Link + MPEG 4 + USB Cable (Charging from Adapter) for Sample 1 |
| <b>Remark:</b> For Radiated Test Cases, the tests were performed with Sample 1 |                                                                                                       |



## 2.3 Connection Diagram of Test System

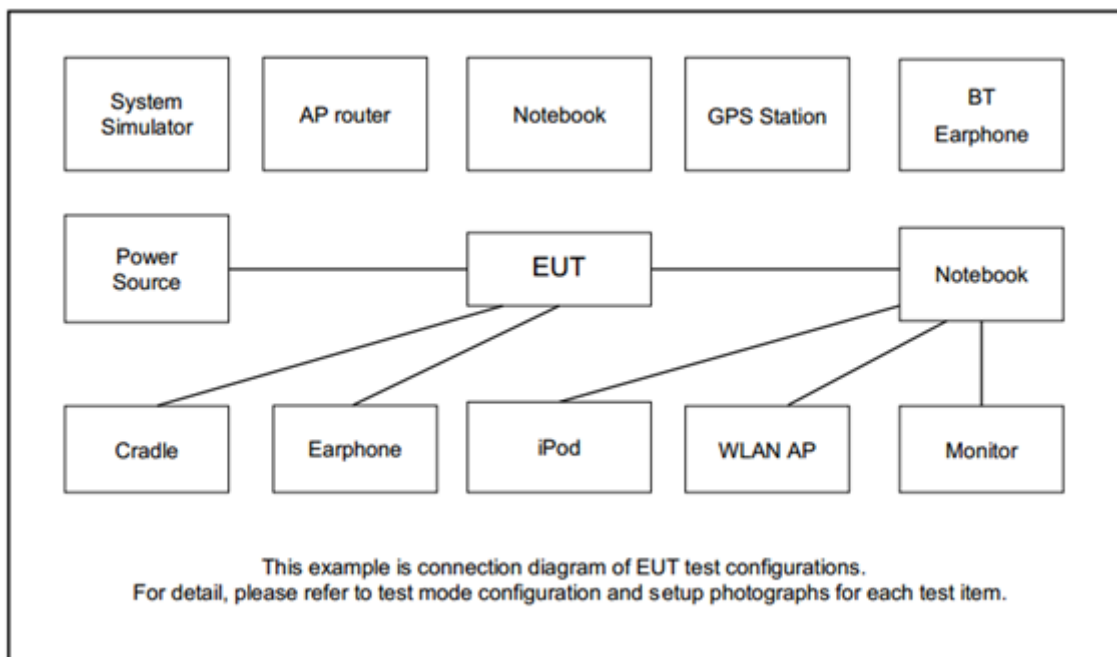

## 2.4 Support Unit used in test configuration and system

| Item | Equipment          | Brand Name    | Model Name    | FCC ID      | Data Cable | Power Cord                                                 |
|------|--------------------|---------------|---------------|-------------|------------|------------------------------------------------------------|
| 1.   | Bluetooth Earphone | Sony Ericsson | MW600         | PY7DDA-2029 | N/A        | N/A                                                        |
| 2.   | WLAN AP            | ASUS          | RT-AC66U      | MSQ-RTAC66U | N/A        | Unshielded, 1.8 m                                          |
| 3.   | Notebook           | Dell          | Latitude 3400 | FCC DoC     | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |

## 2.5 EUT Operation Test Setup

The RF test items, make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

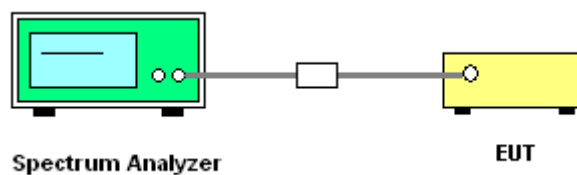




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<Ant. 11>

<1Mbps>

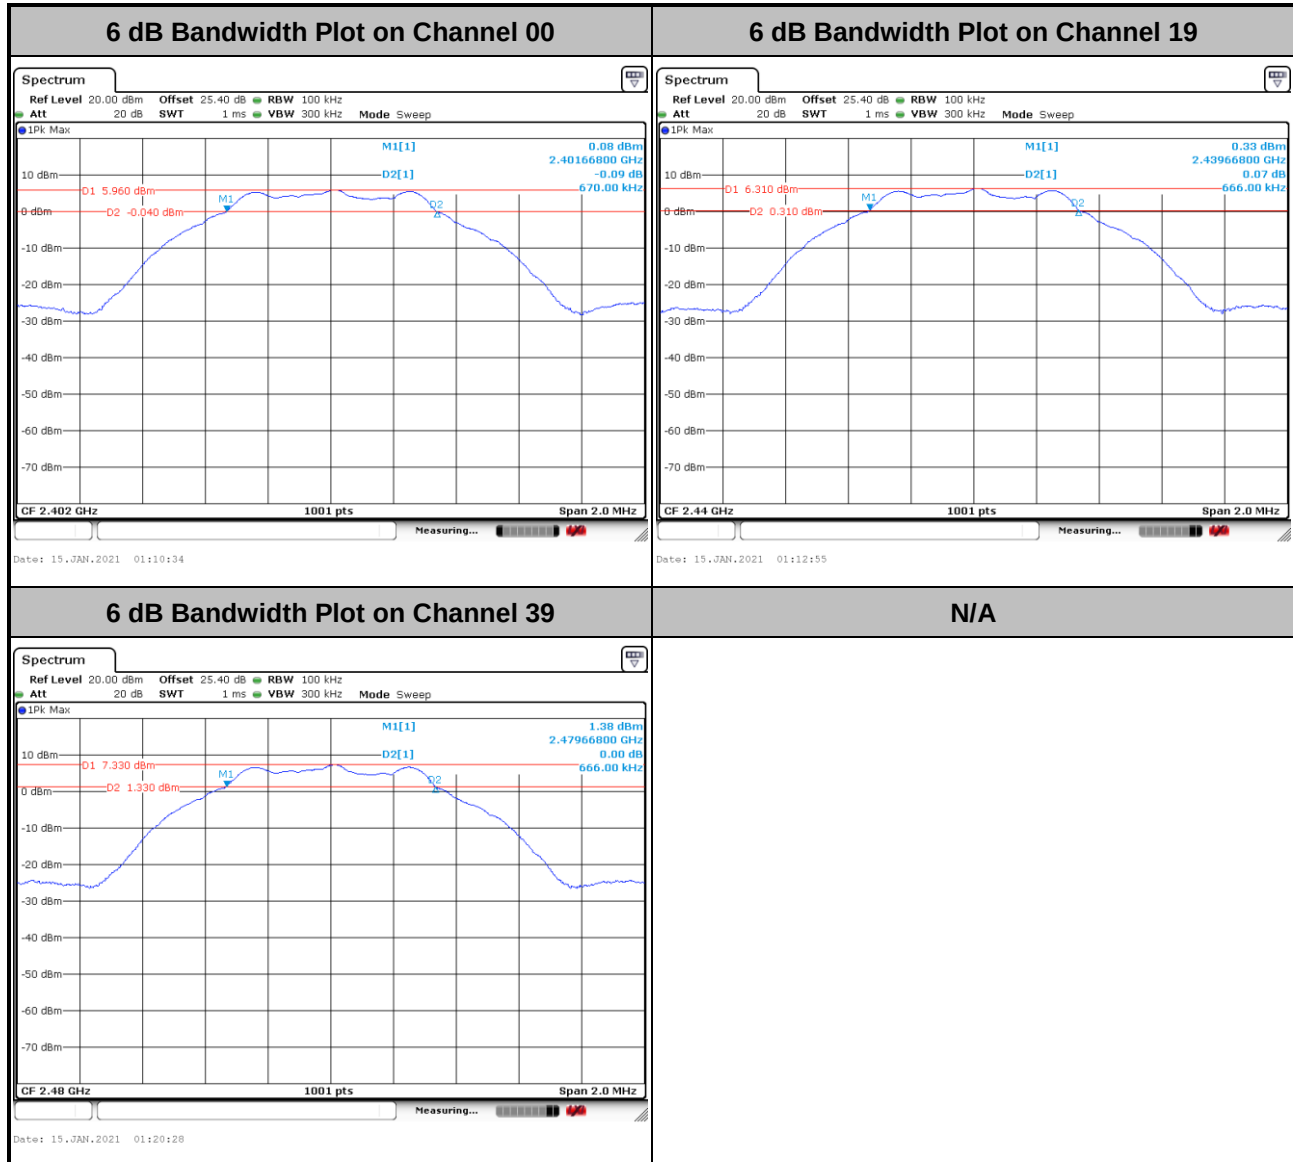




&lt;2Mbps&gt;

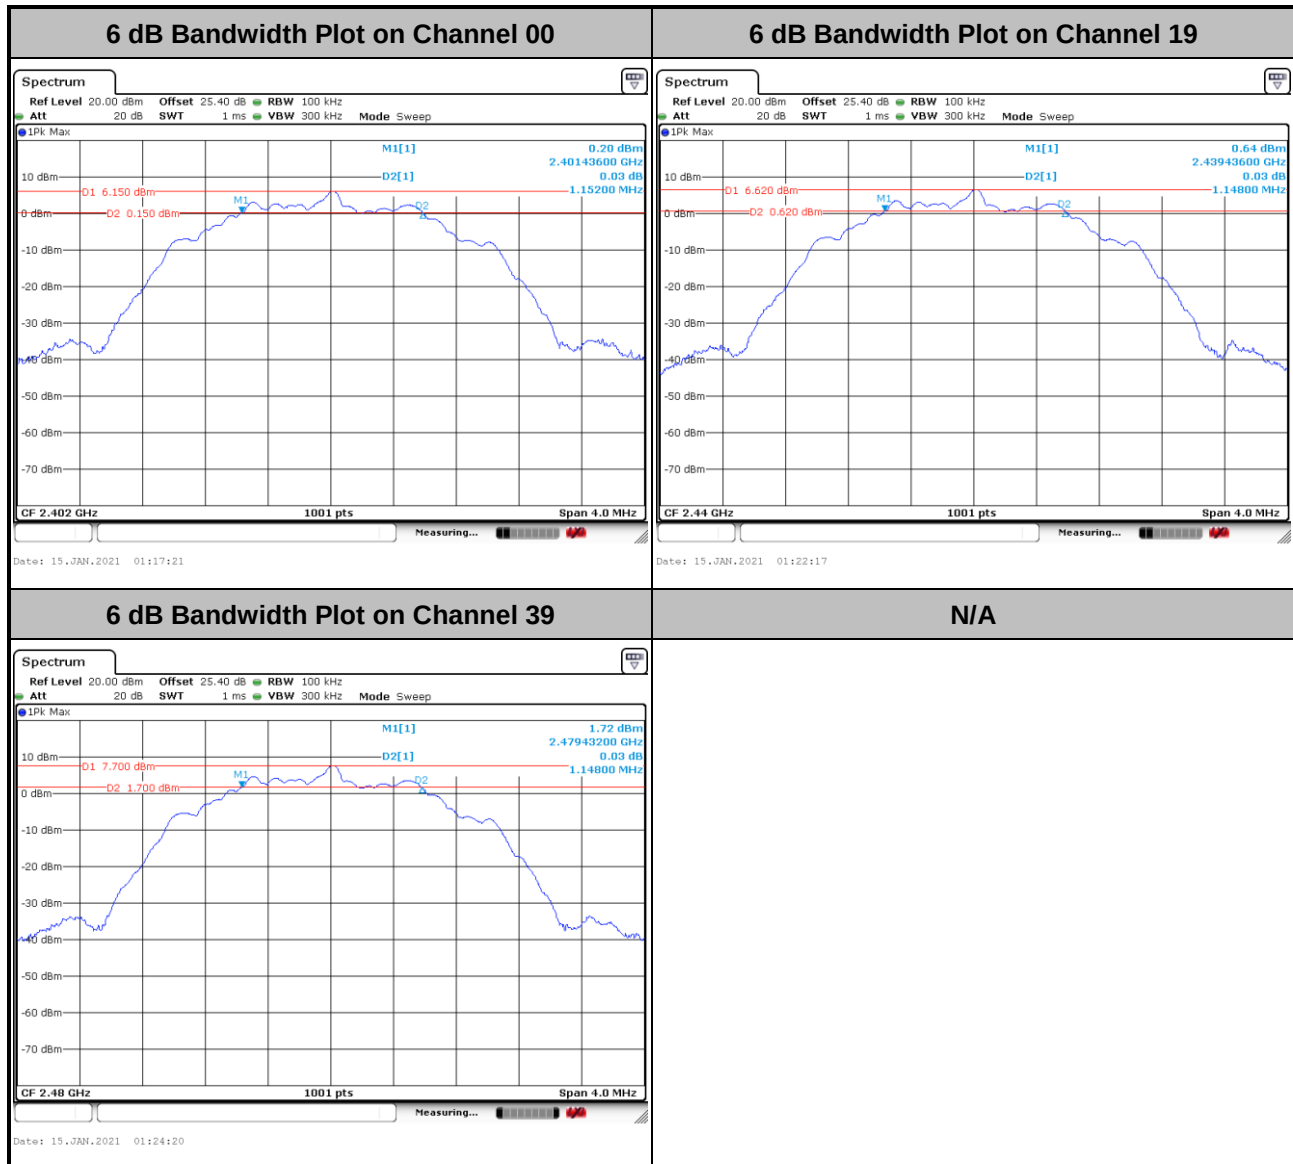




&lt;Ant. 7&gt;

&lt;1Mbps&gt;

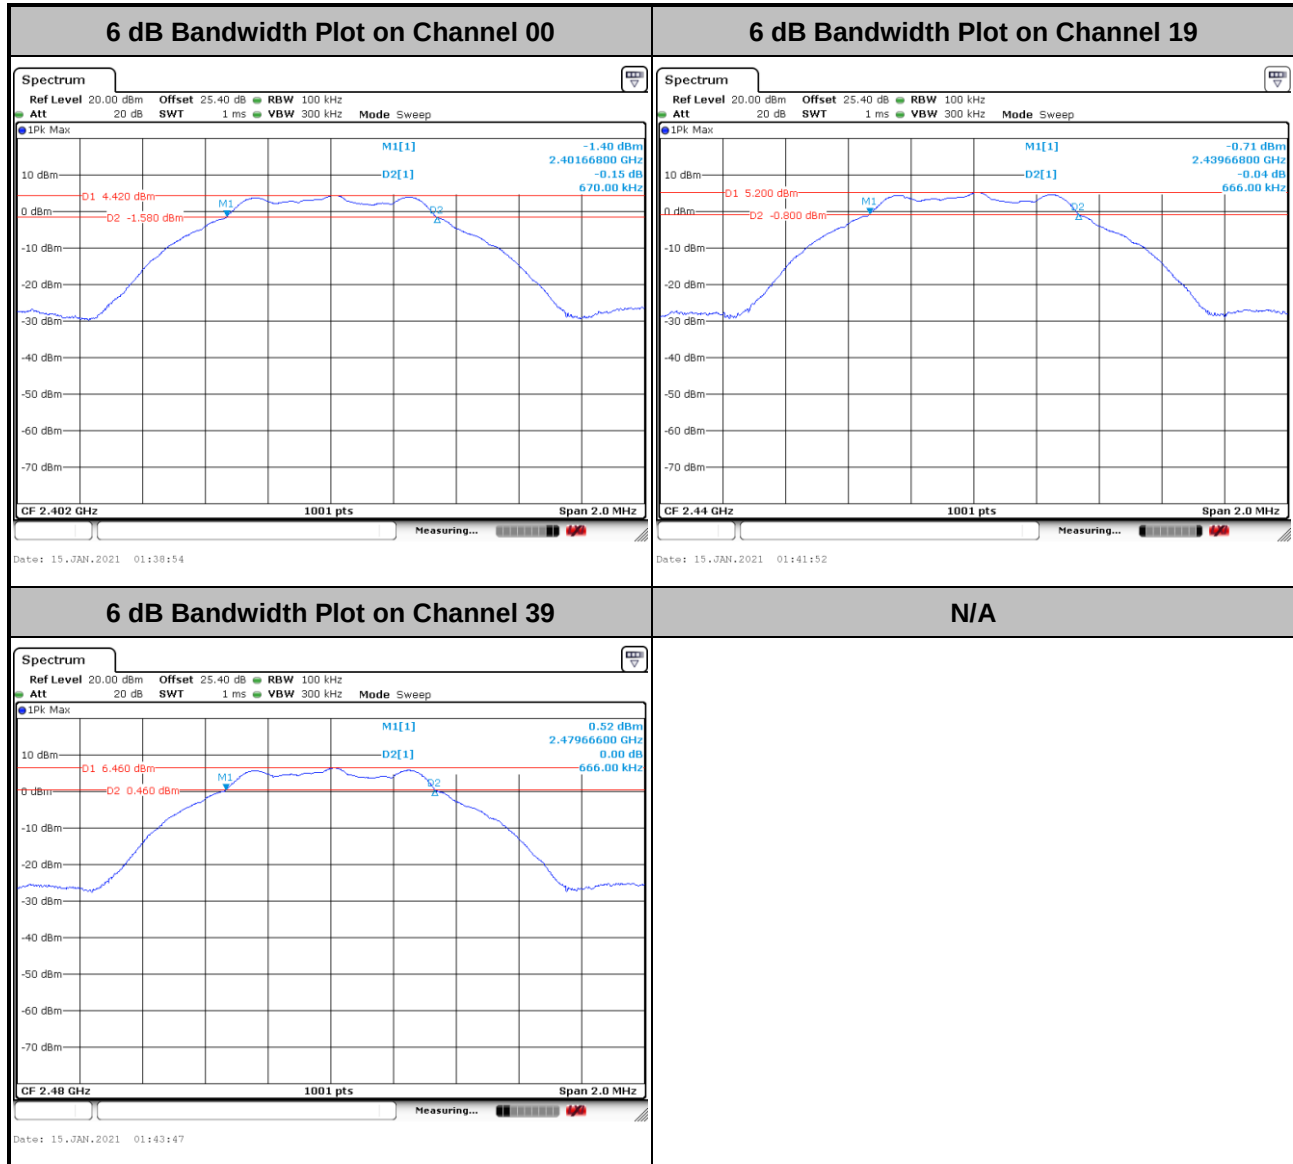



&lt;2Mbps&gt;

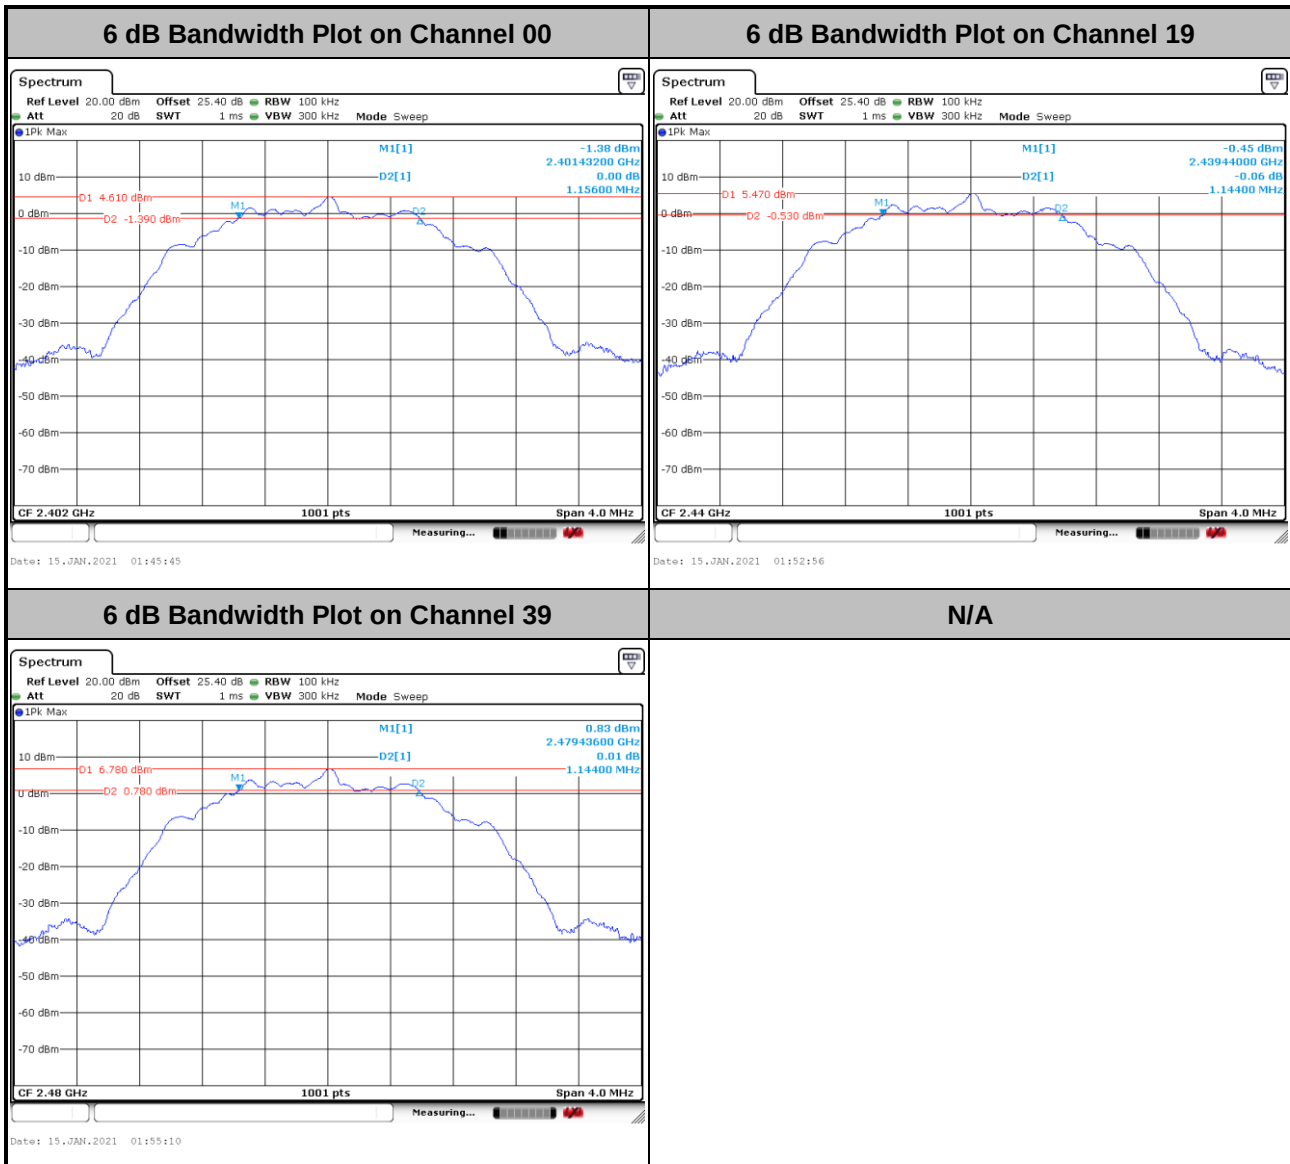




## 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

&lt;Ant. 11&gt;


&lt;1Mbps&gt;

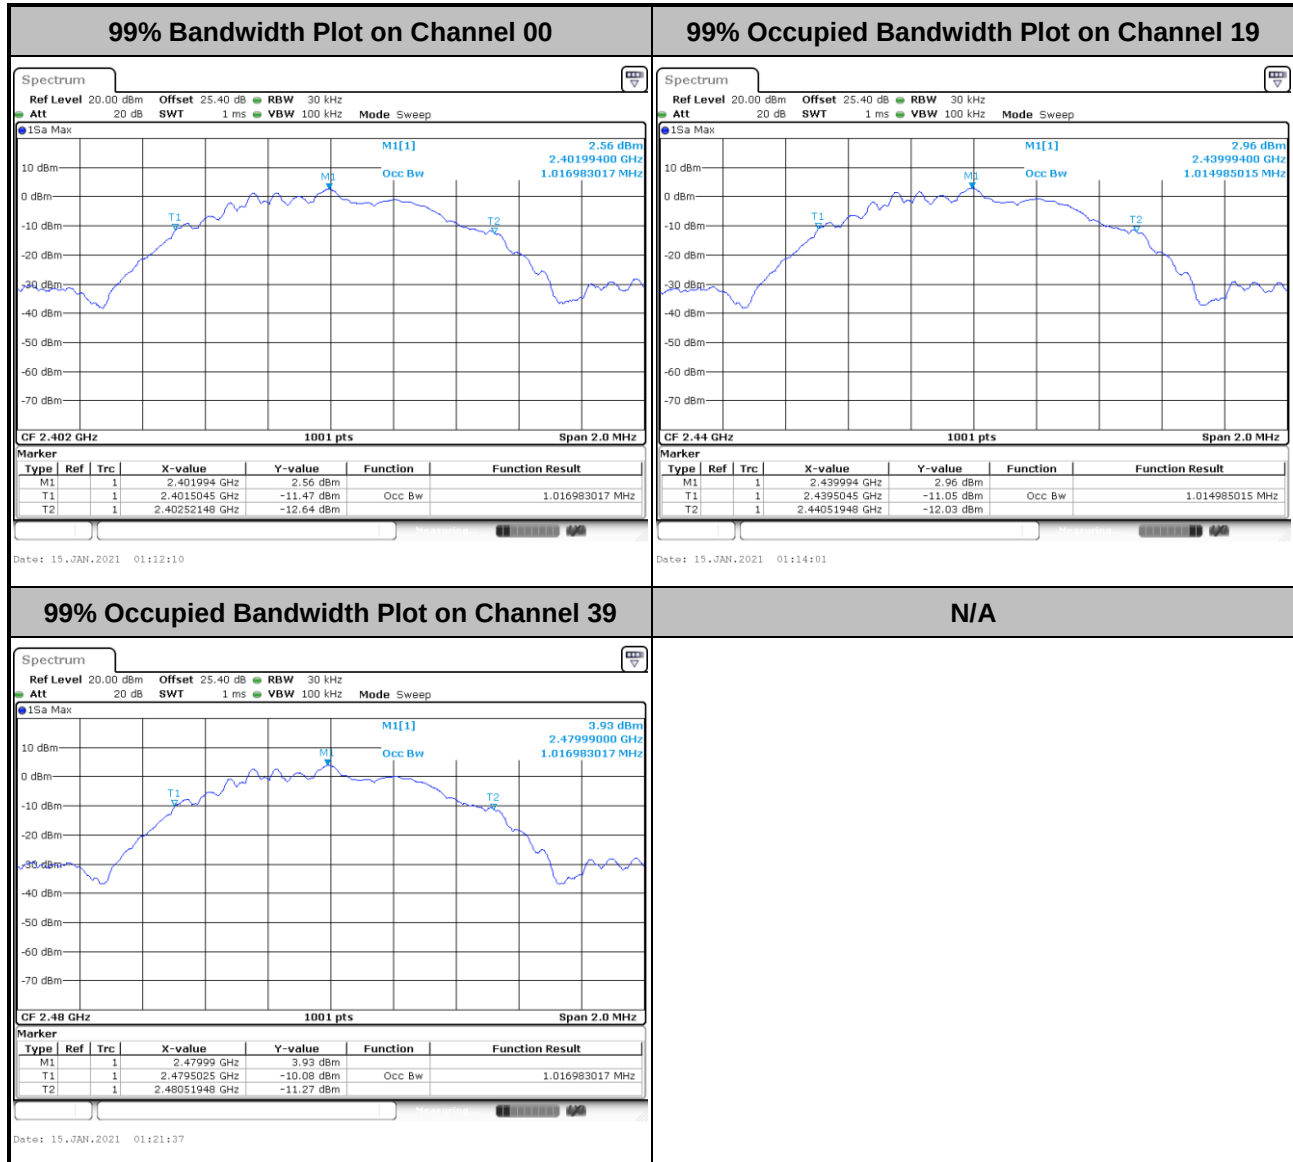





&lt;2Mbps&gt;

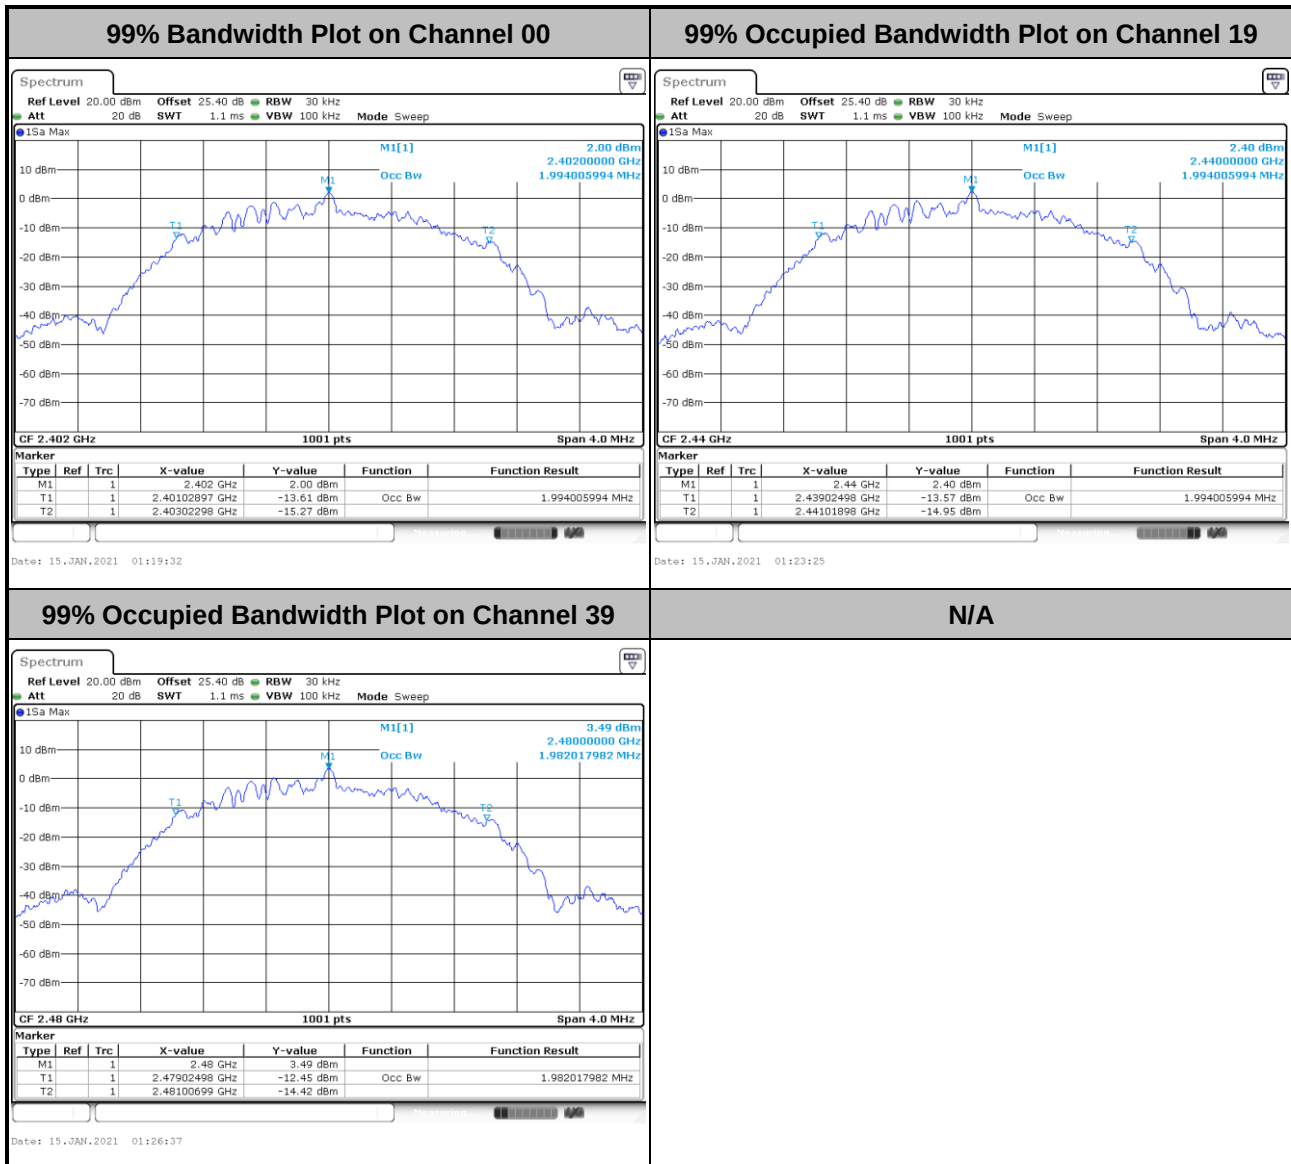





&lt;Ant. 7&gt;

&lt;1Mbps&gt;


## 99% Bandwidth Plot on Channel 00

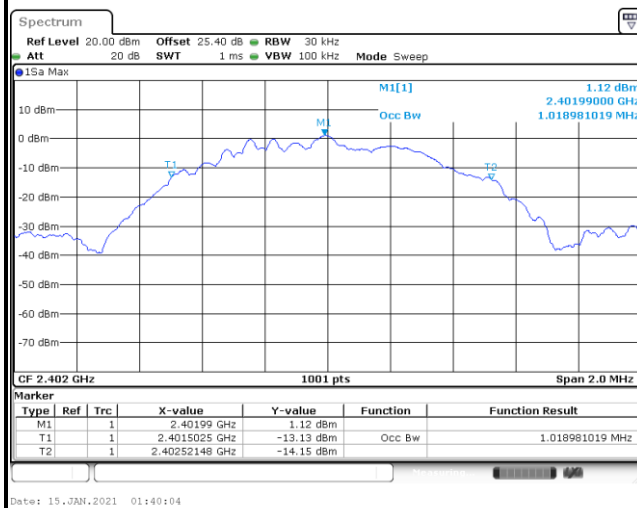

## 99% Occupied Bandwidth Plot on Channel 19

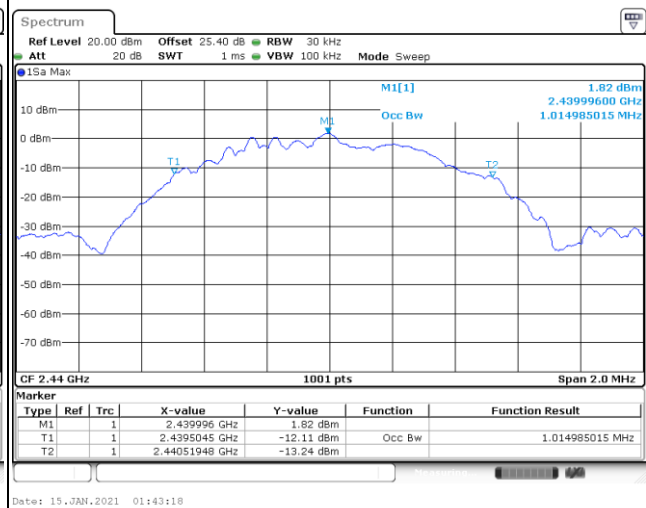


## 99% Occupied Bandwidth Plot on Channel 39

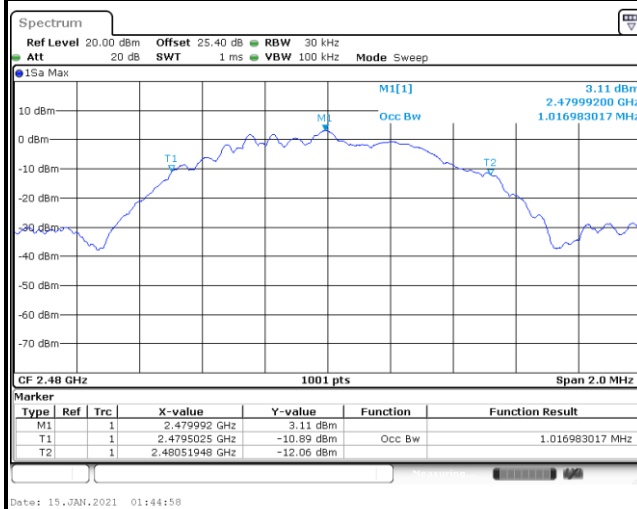

N/A



&lt;2Mbps&gt;

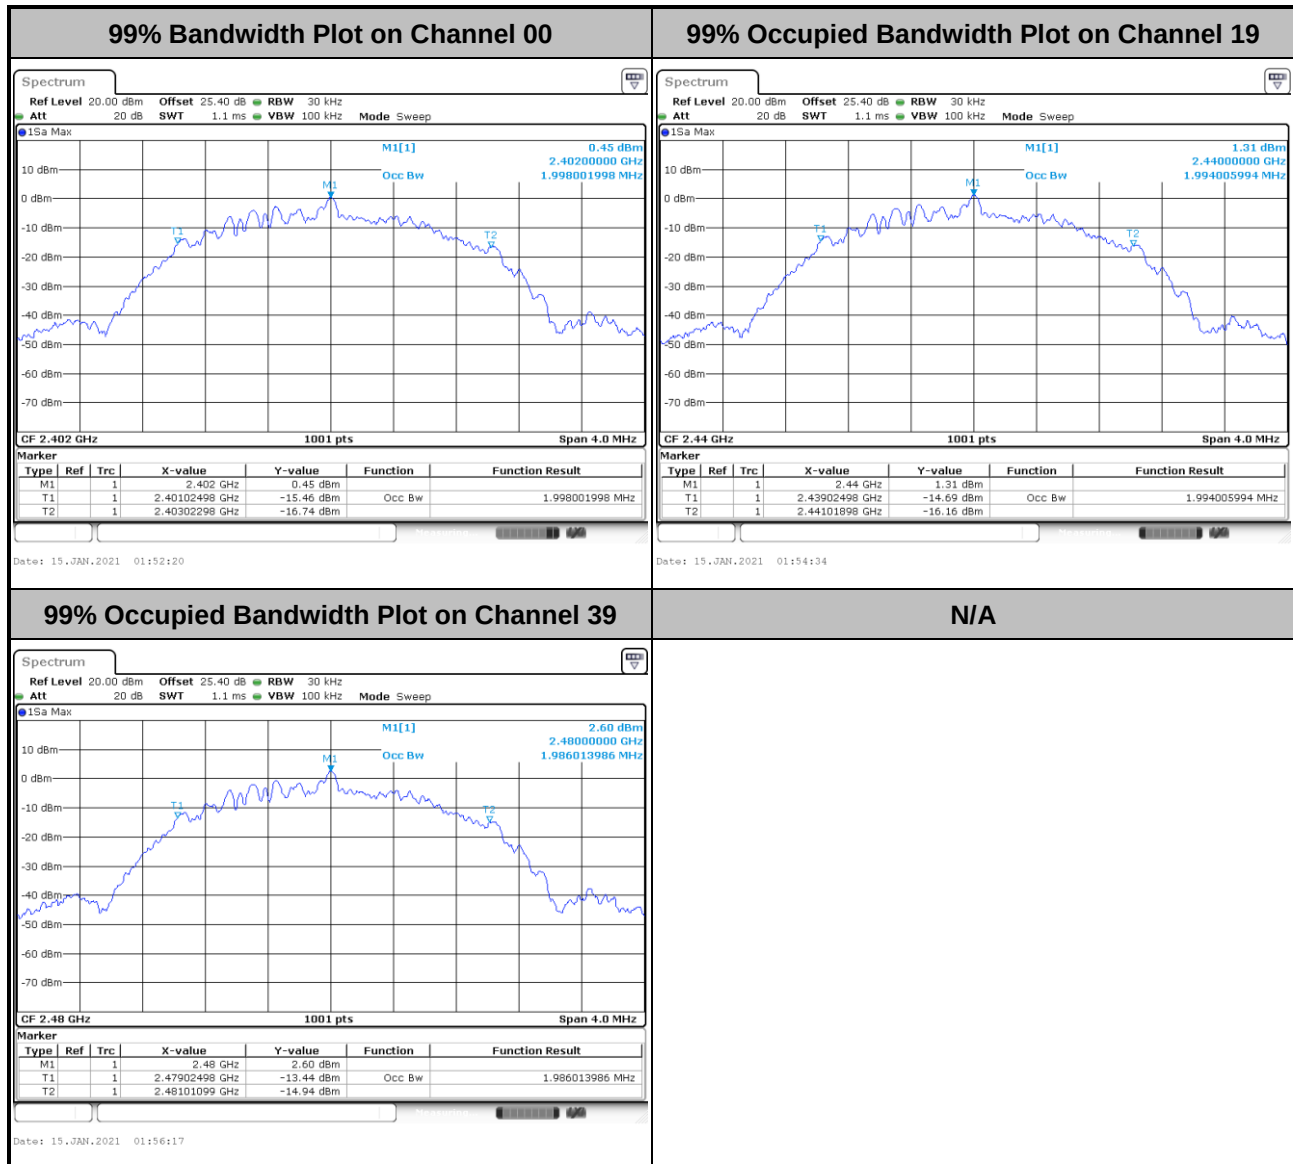

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

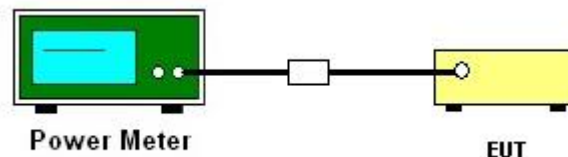

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

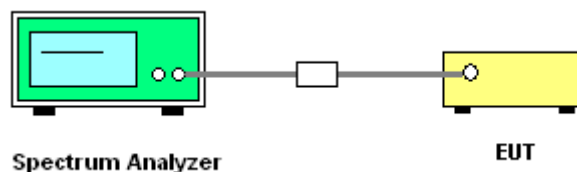

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



## 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


&lt;Ant. 11&gt;

&lt;1Mbps&gt;

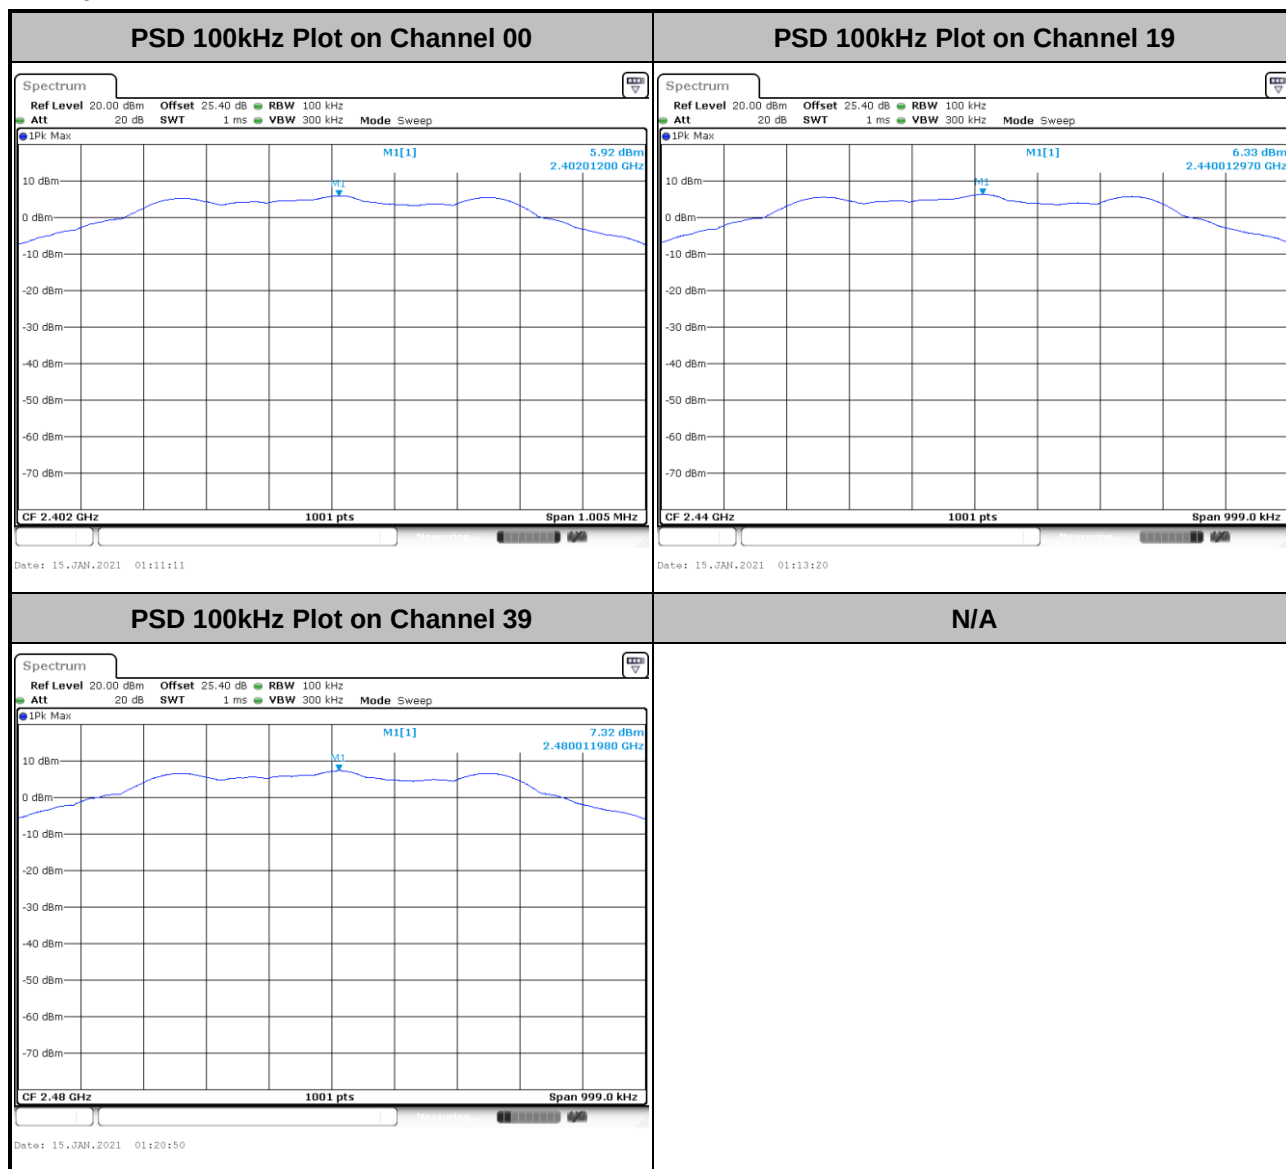



&lt;2Mbps&gt;

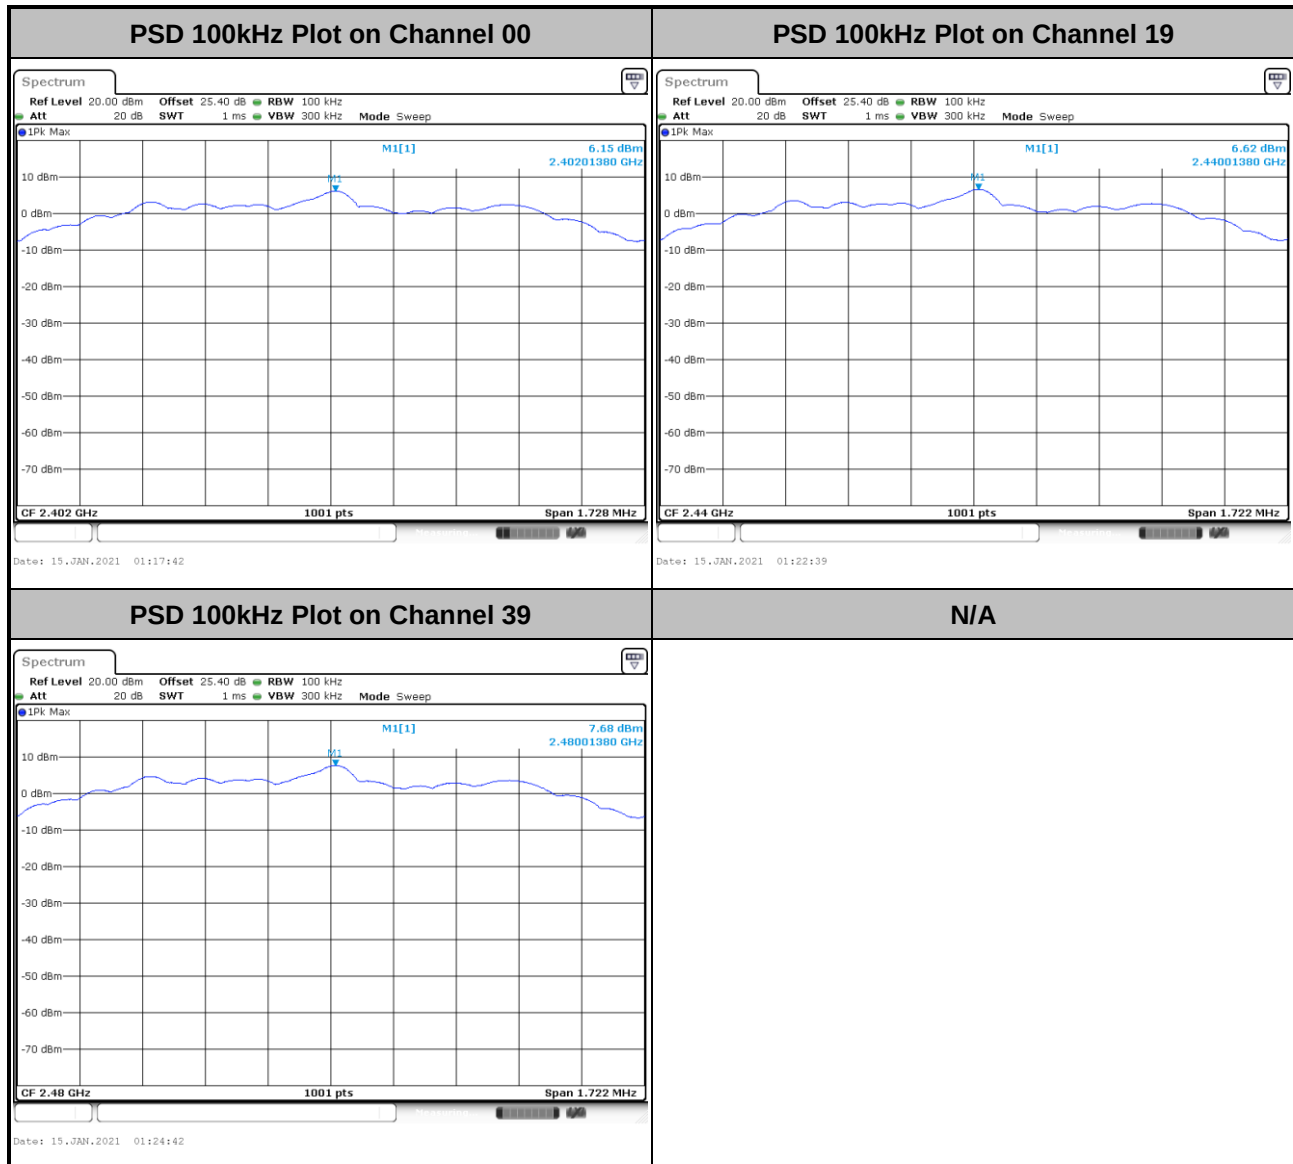





&lt;Ant. 7&gt;

&lt;1Mbps&gt;


PSD 100kHz Plot on Channel 00

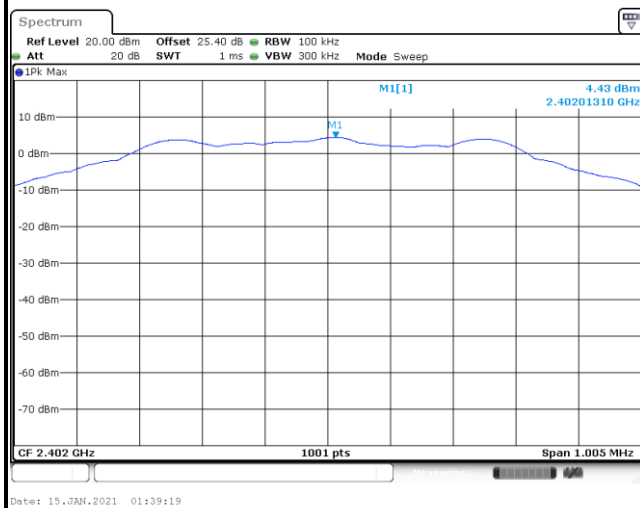

PSD 100kHz Plot on Channel 19

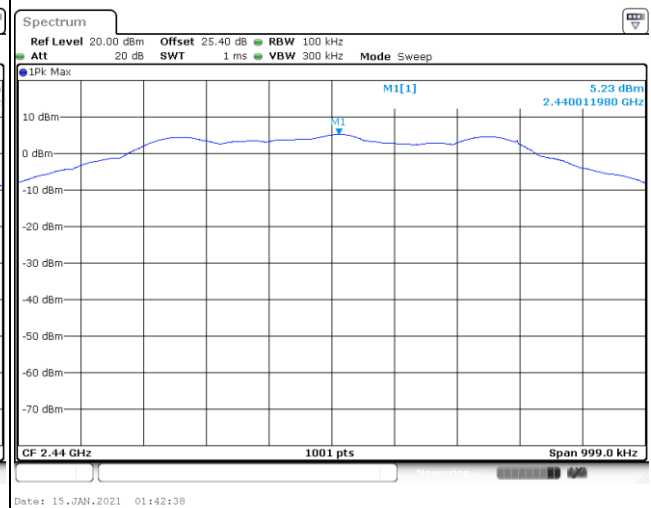

PSD 100kHz Plot on Channel 39

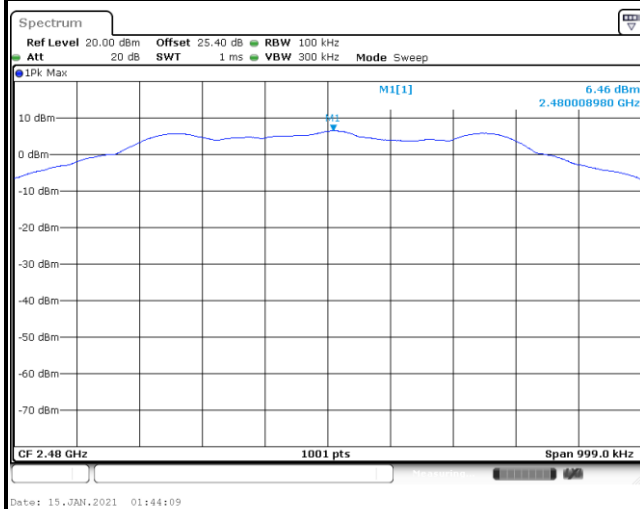


N/A





&lt;2Mbps&gt;

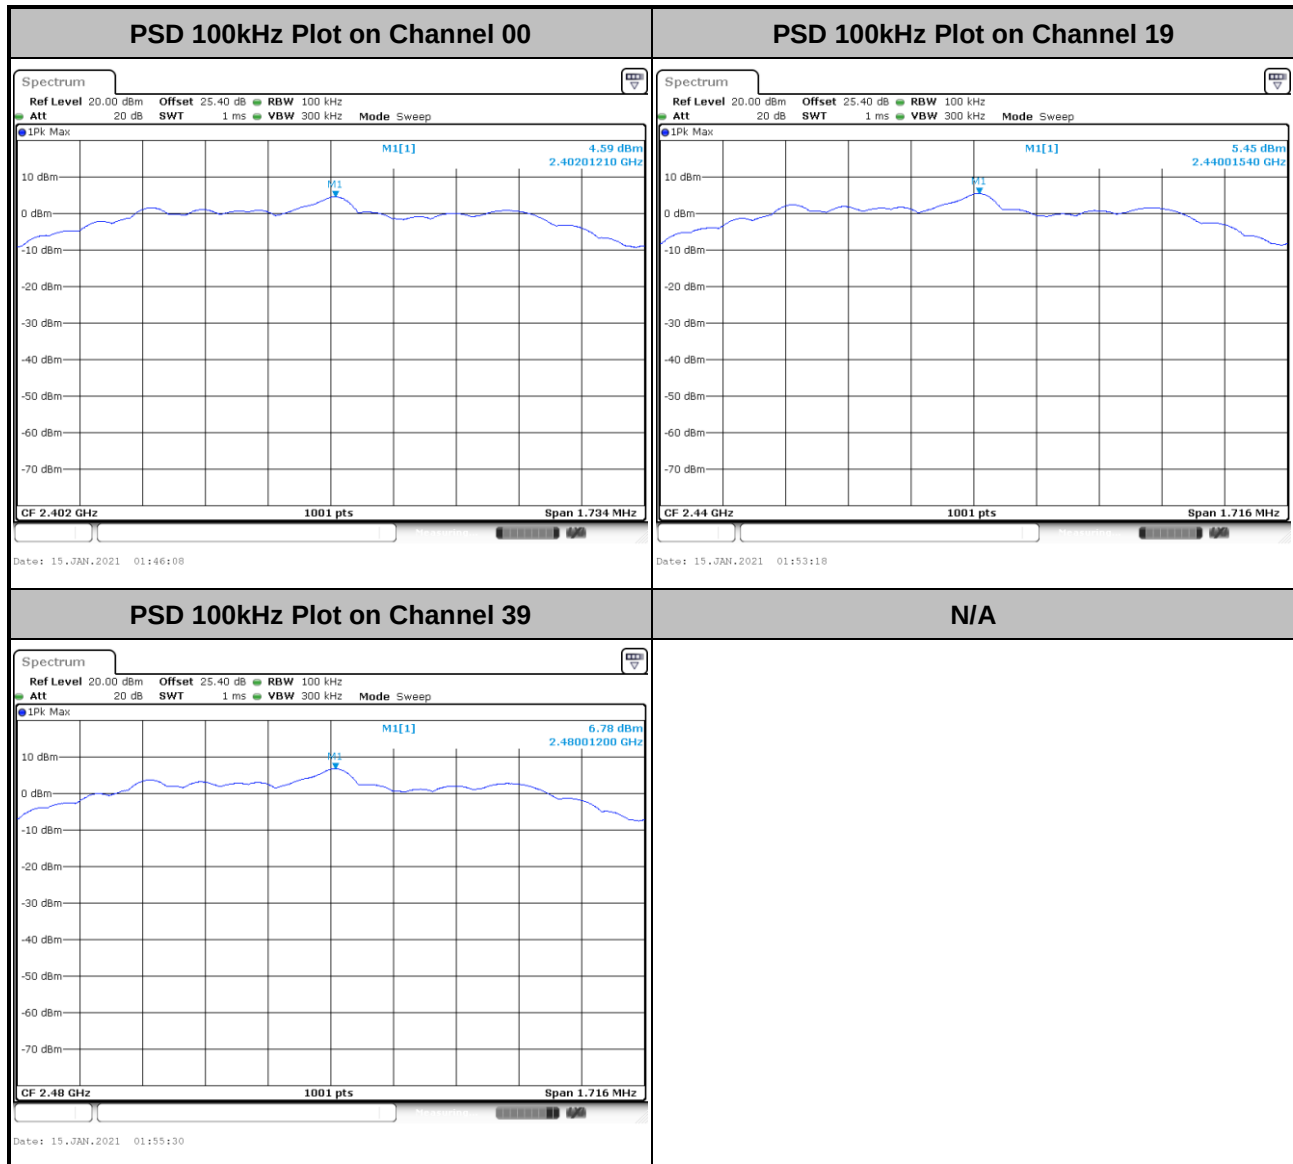




## 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


&lt;Ant. 11&gt;

&lt;1Mbps&gt;

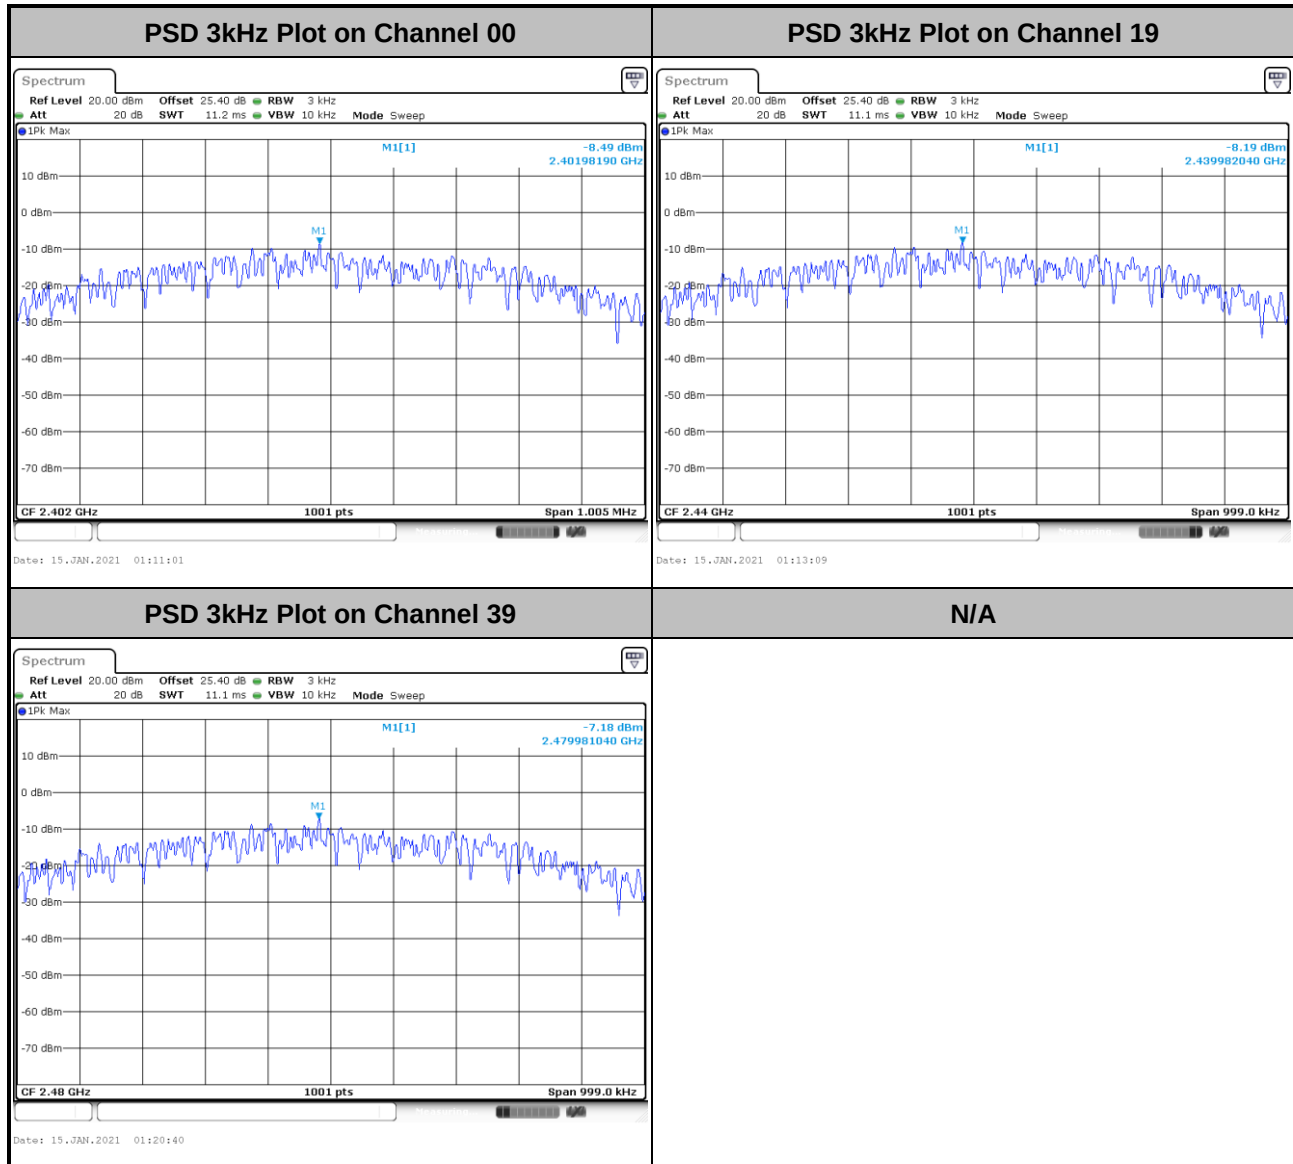




<2Mbps>

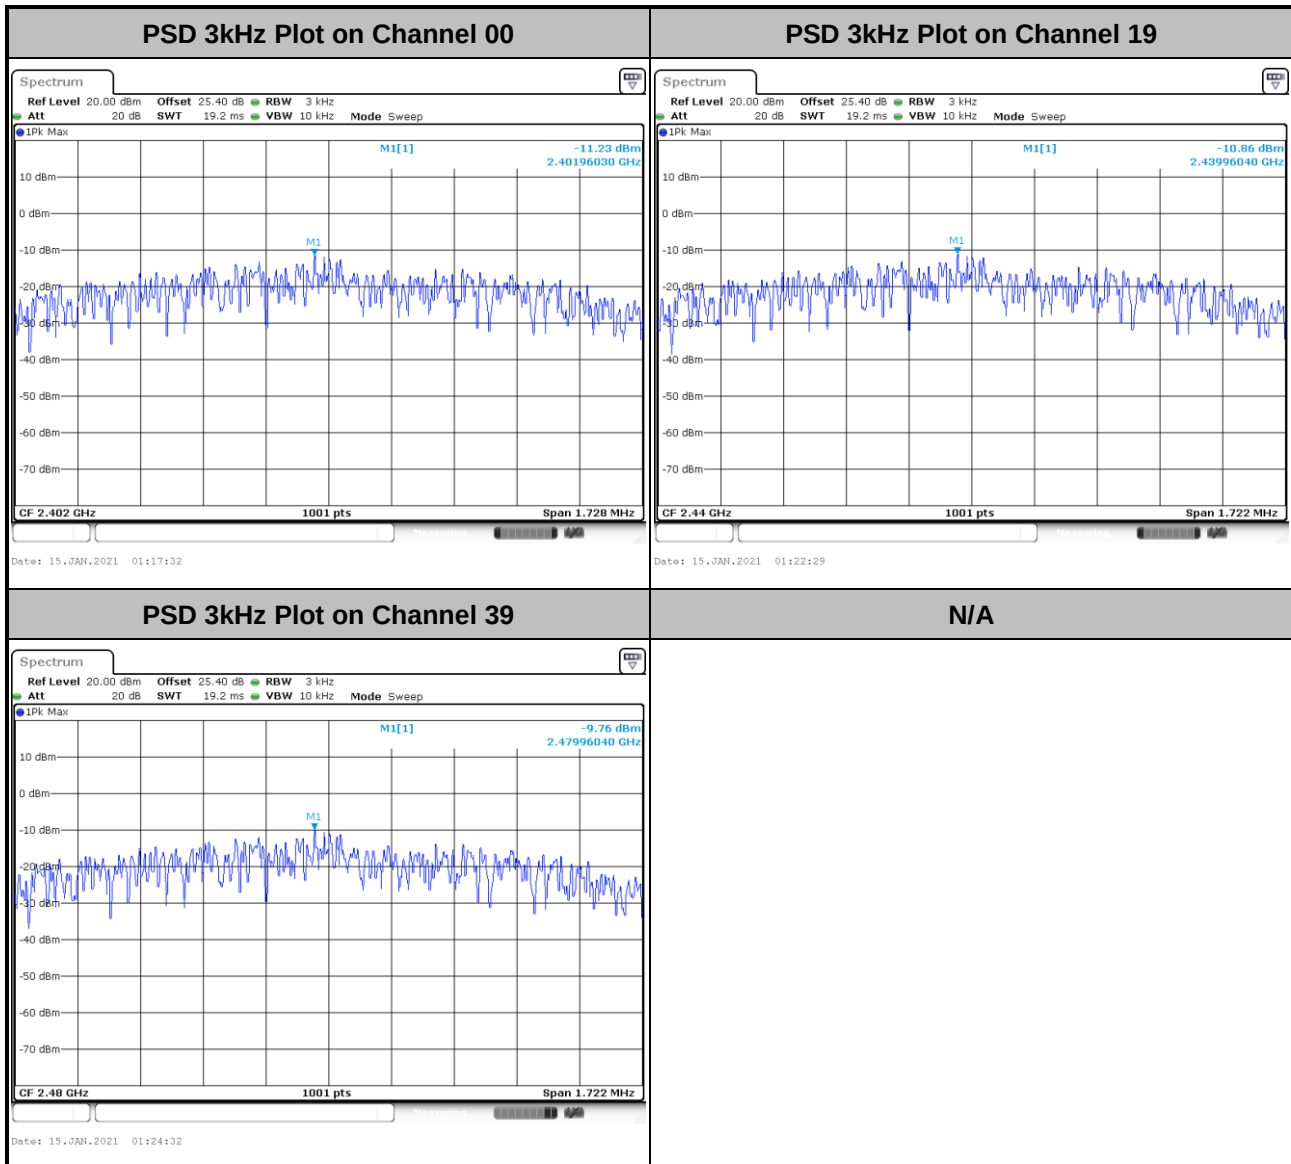




&lt;Ant. 7&gt;

&lt;1Mbps&gt;

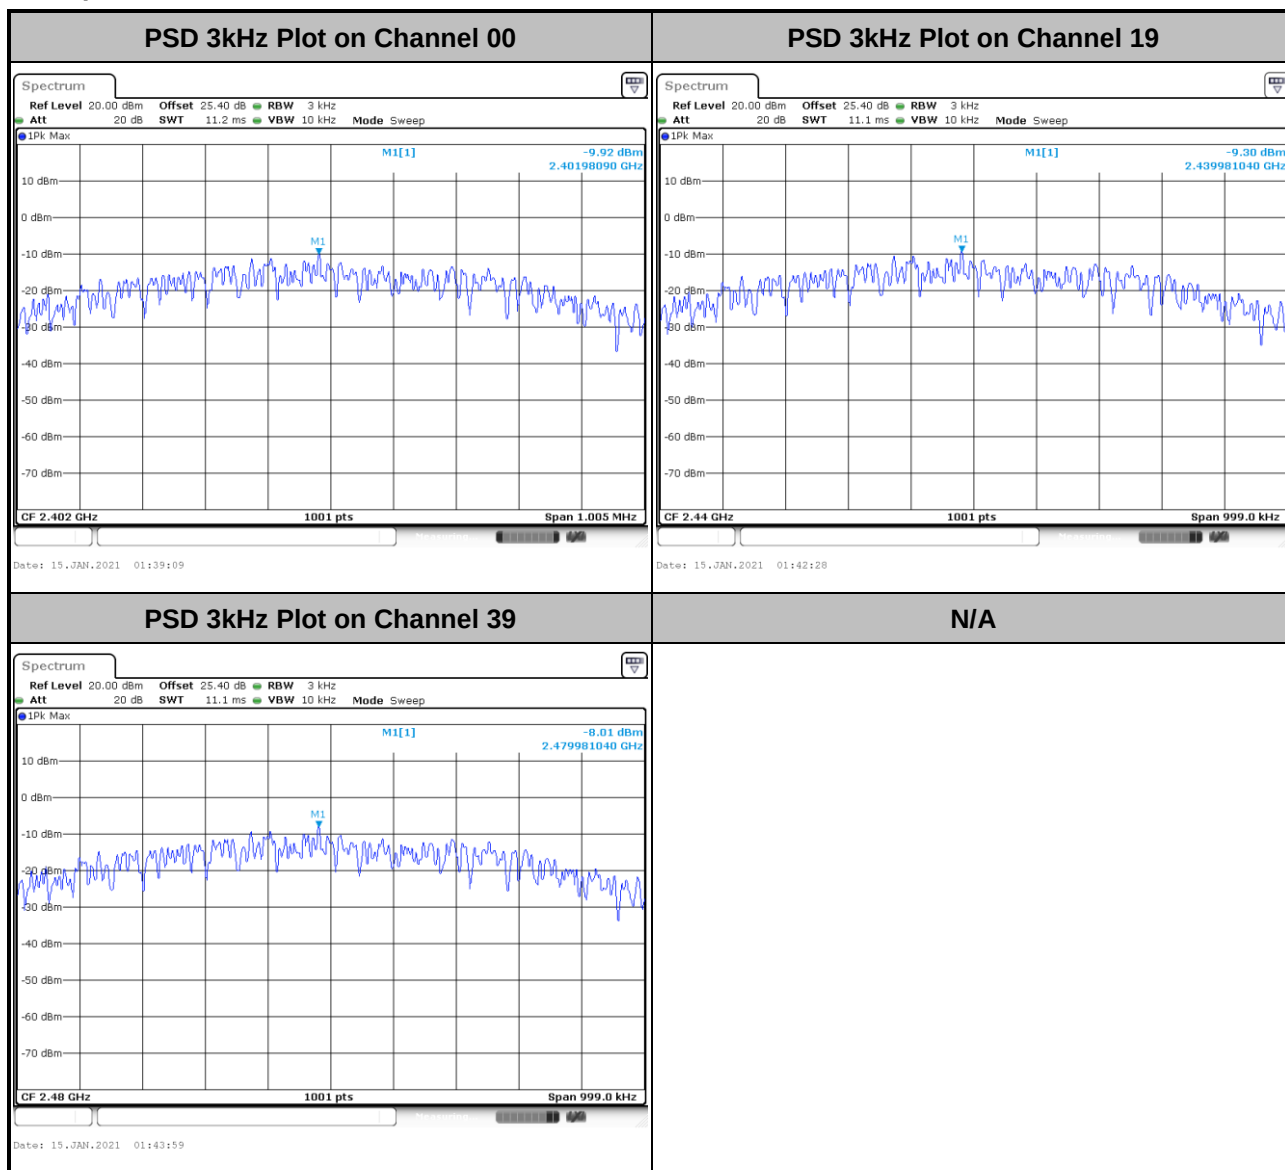



<2Mbps>

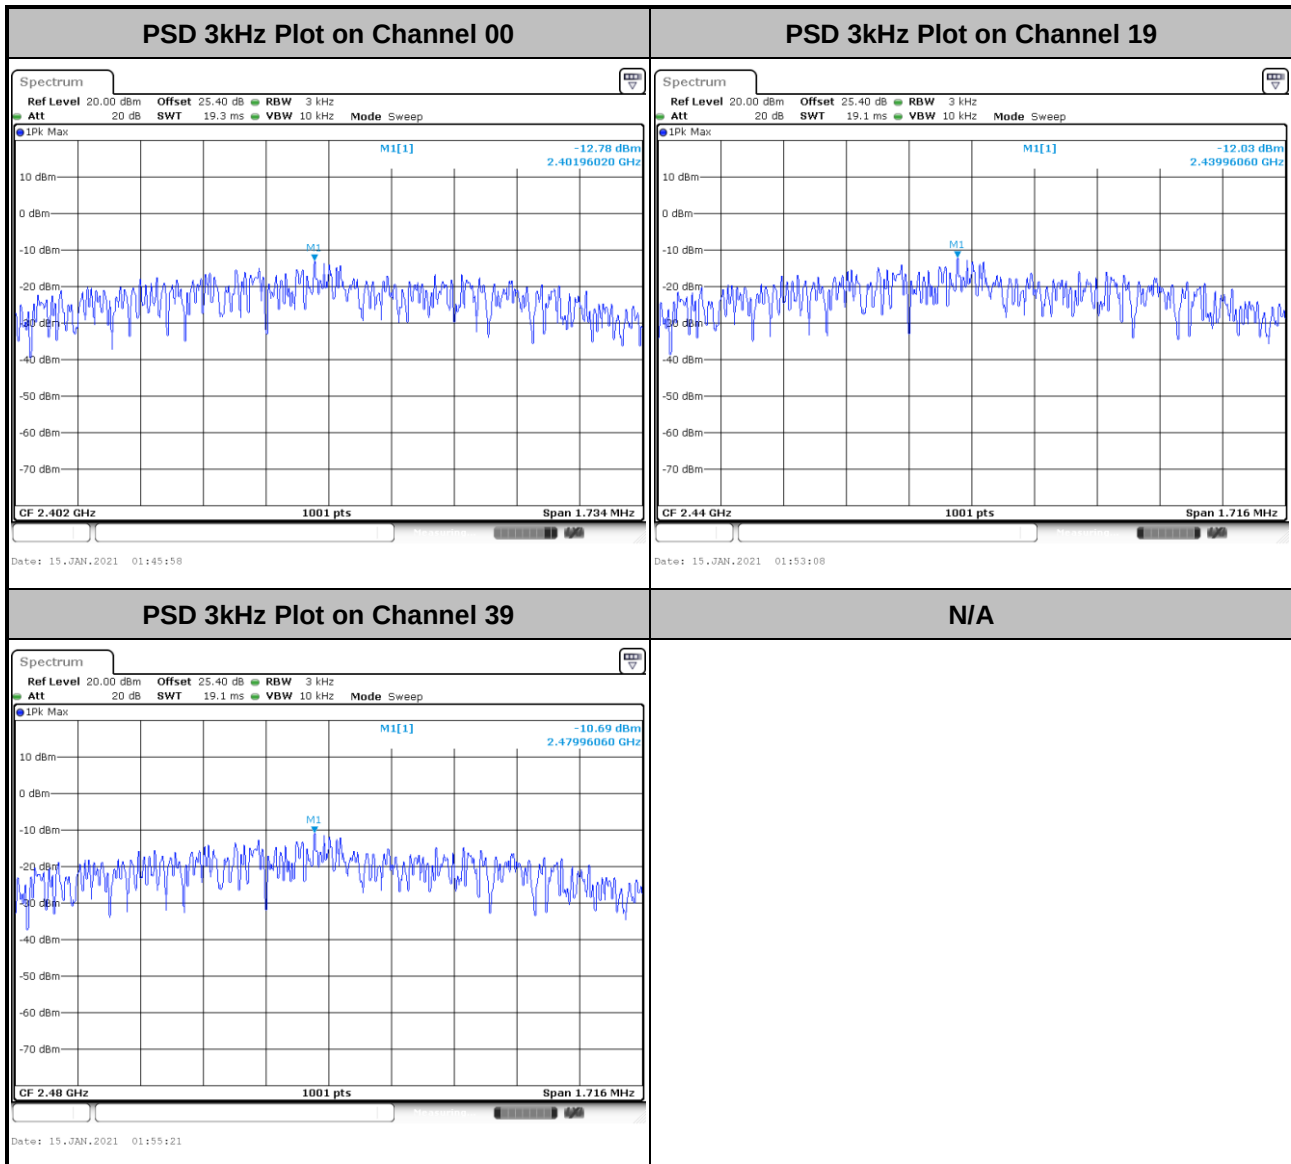

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

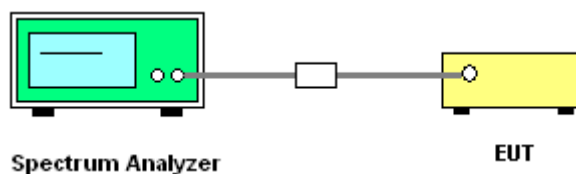





### 3.4.5 Test Result of Conducted Band Edges Plots

&lt;Ant. 11&gt;

&lt;1Mbps&gt;

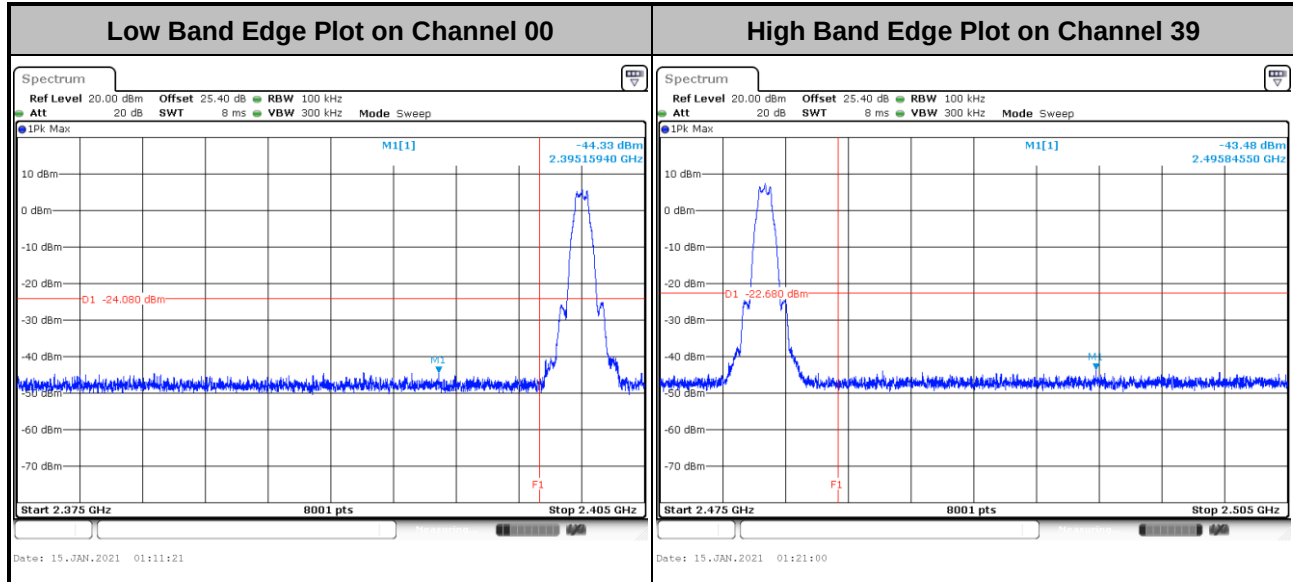


&lt;2Mbps&gt;

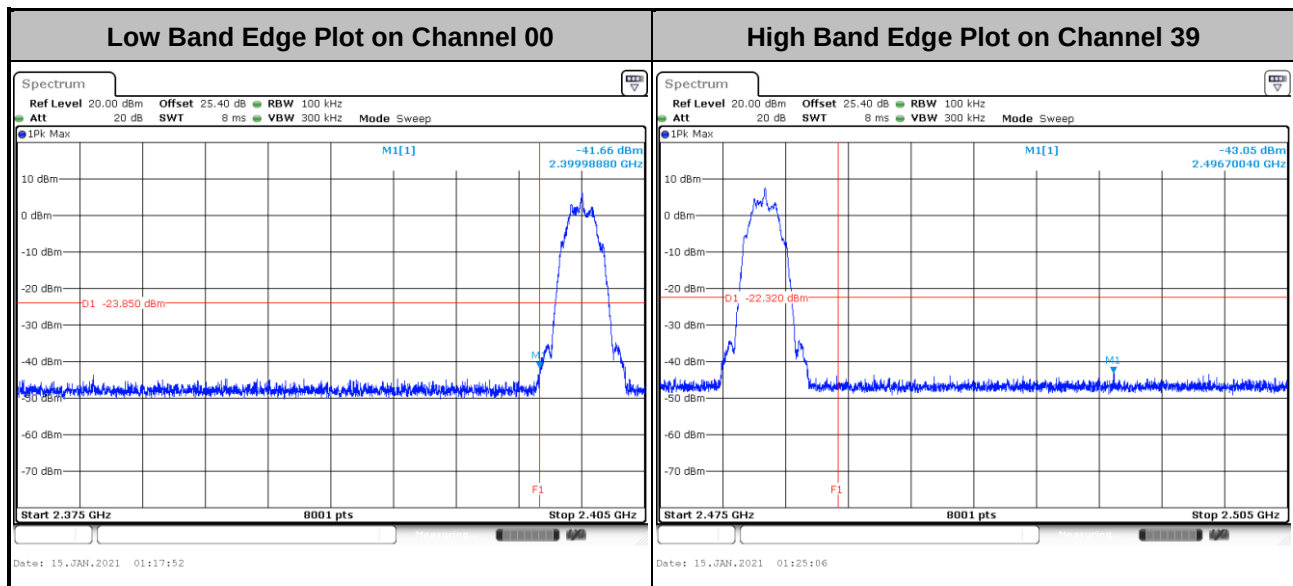




&lt;Ant. 7&gt;

&lt;1Mbps&gt;

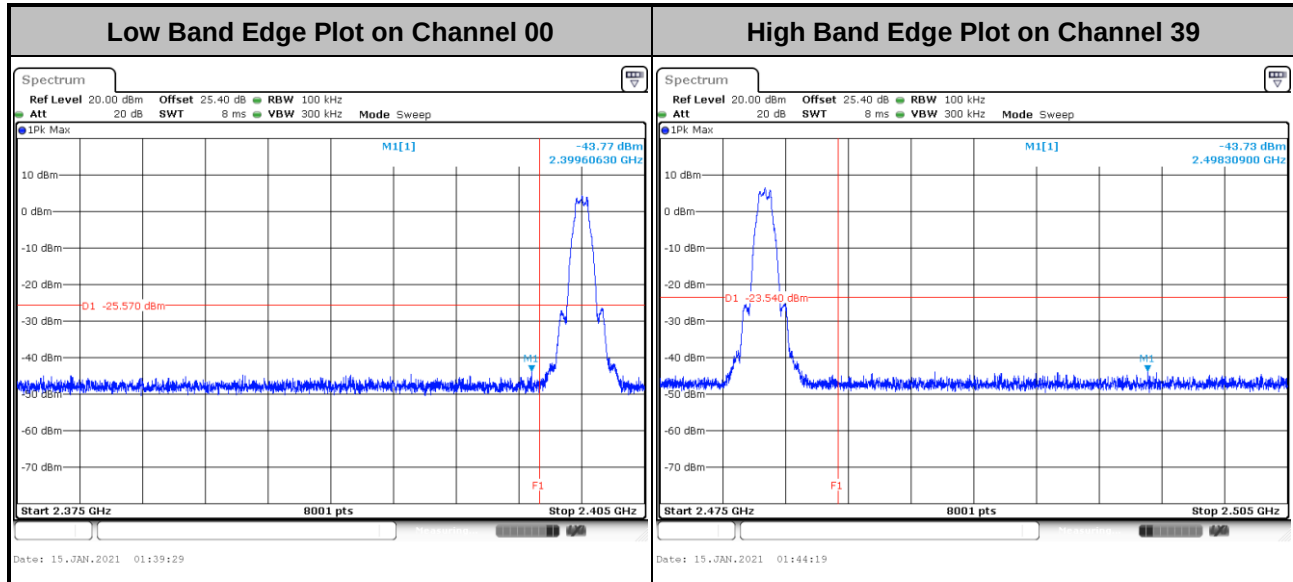

&lt;2Mbps&gt;

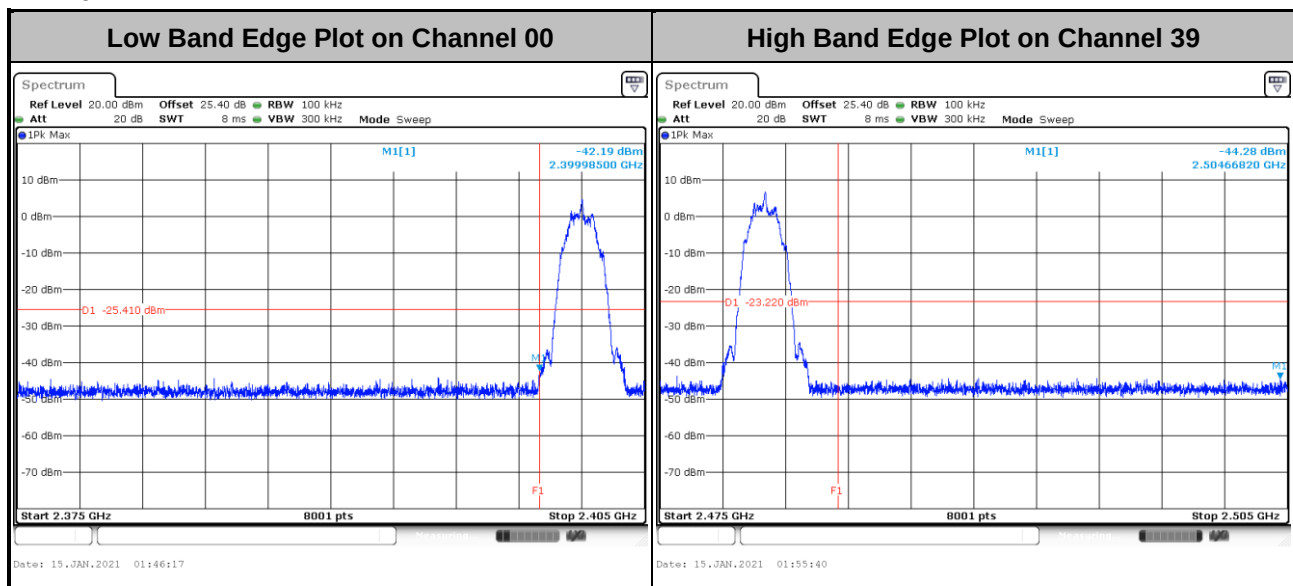






### 3.4.6 Test Result of Conducted Spurious Emission Plots



<Ant. 11>





<1Mbps>

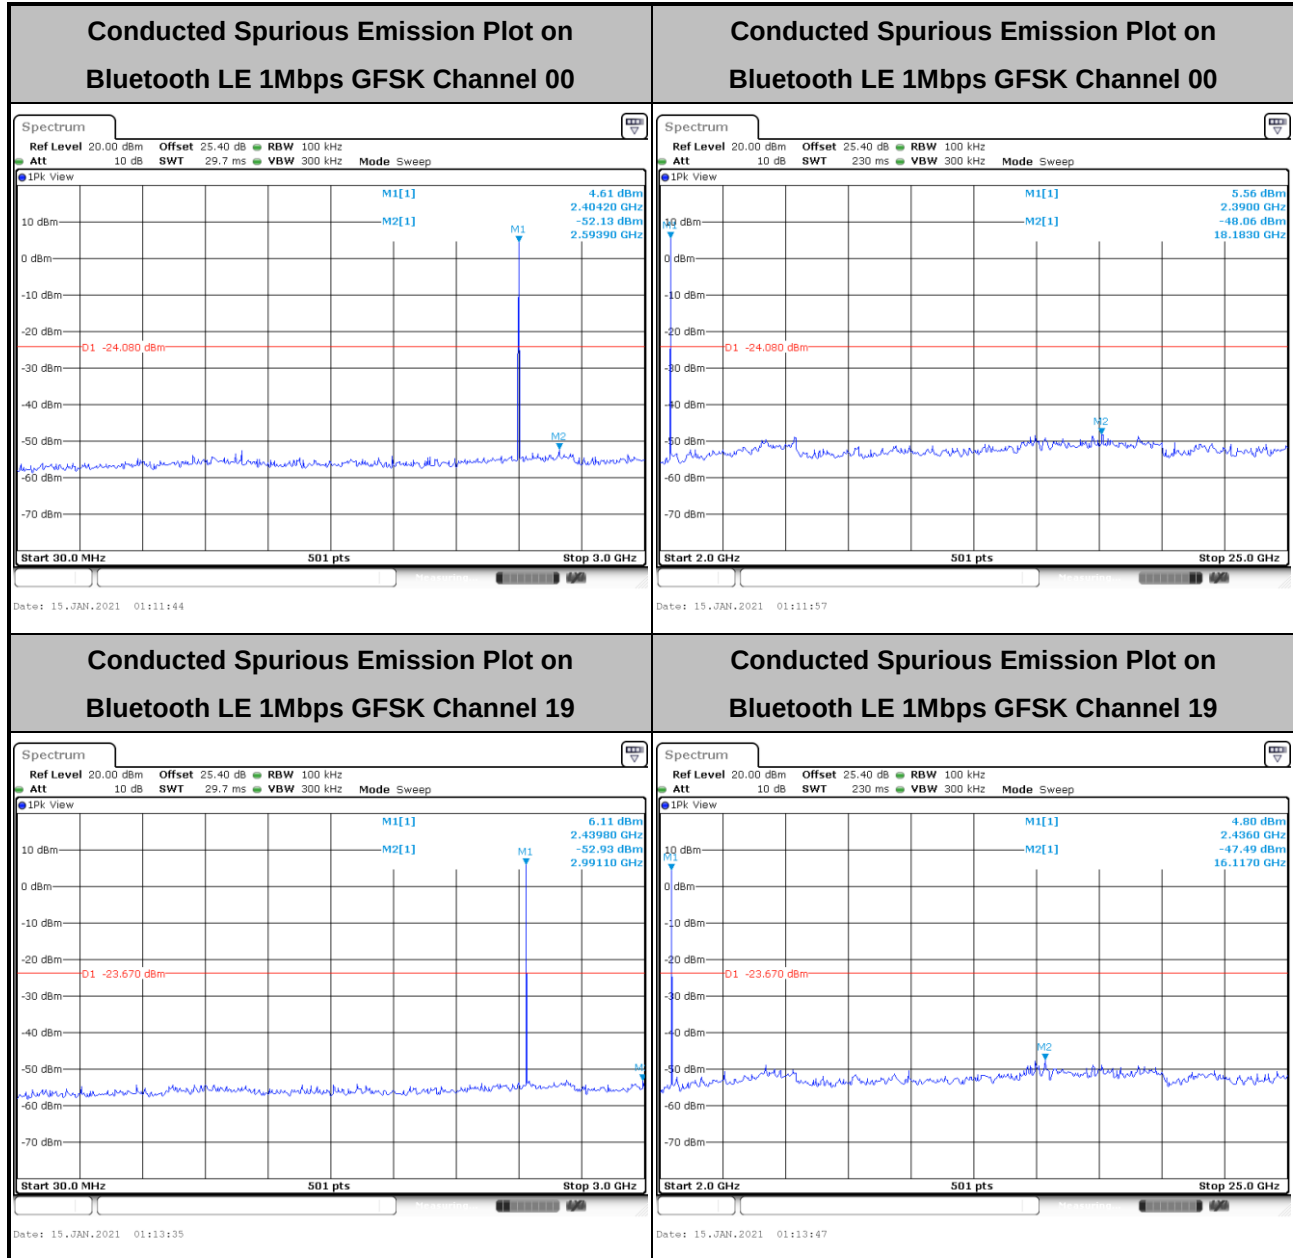

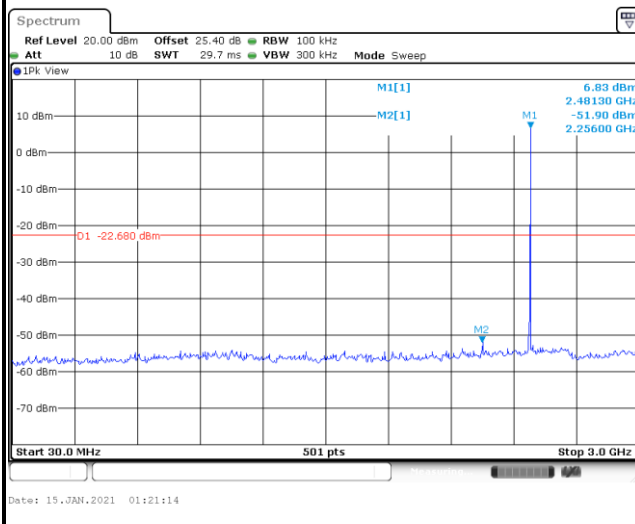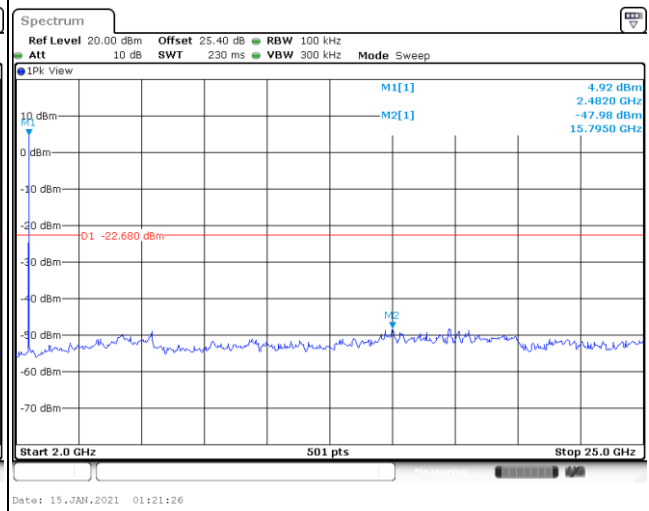**Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 39****Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 39**

## &lt;2Mbps&gt;



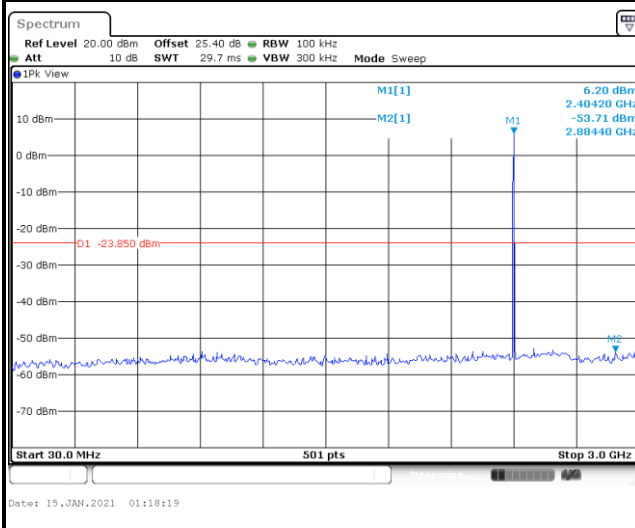
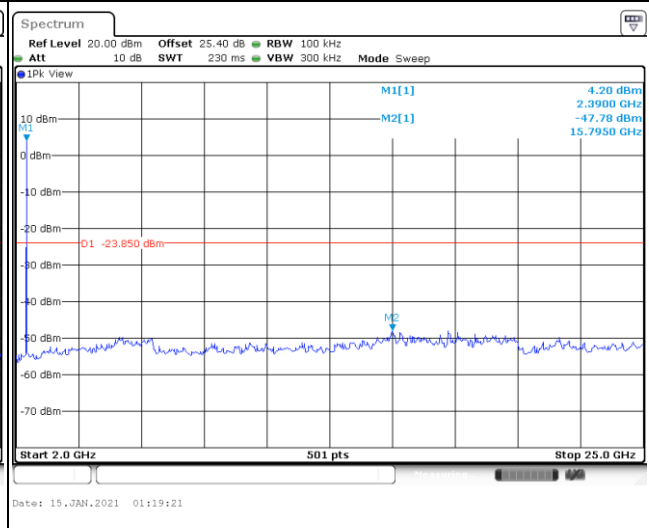
**Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 00**

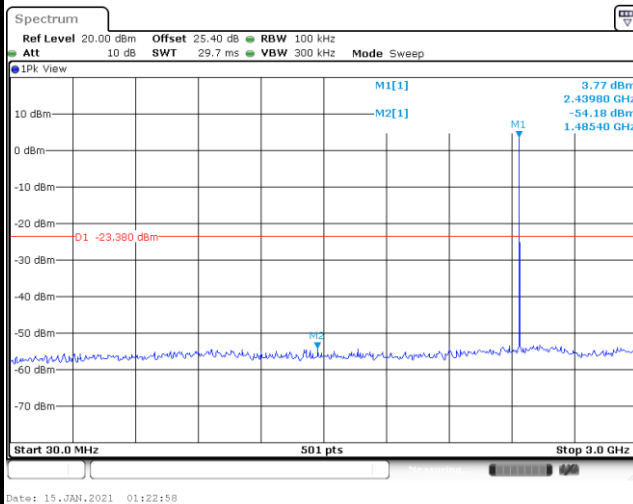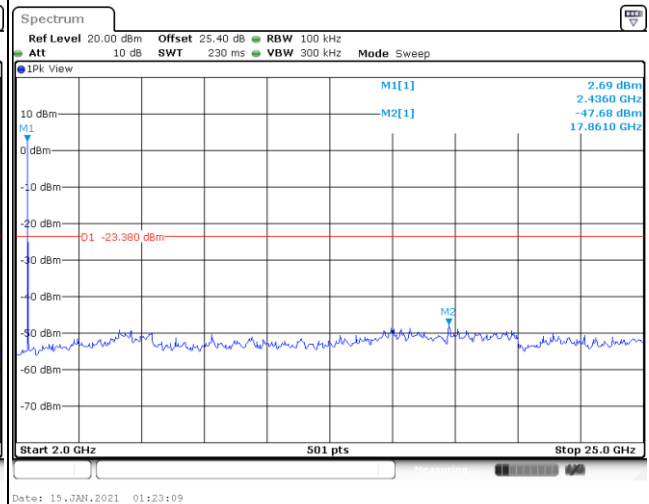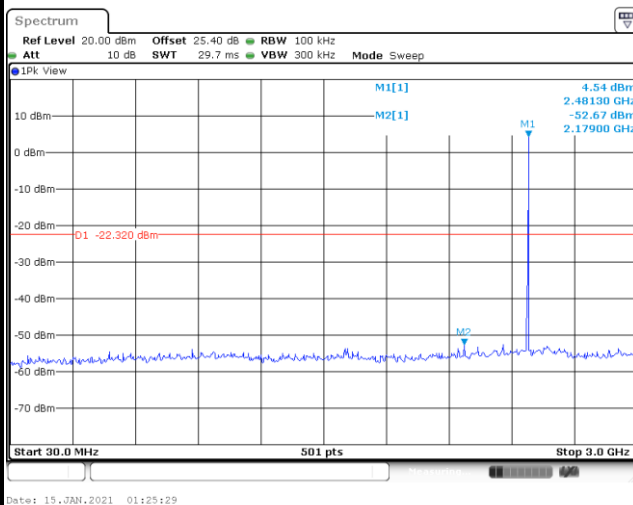
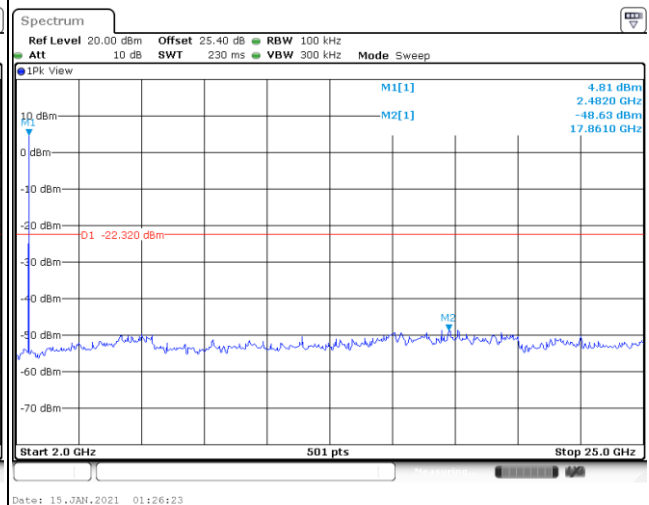
**Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 39****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 39**





&lt;Ant. 7&gt;





&lt;1Mbps&gt;

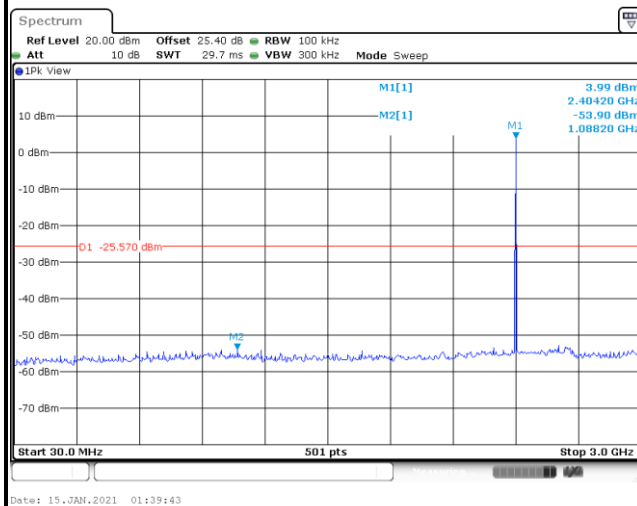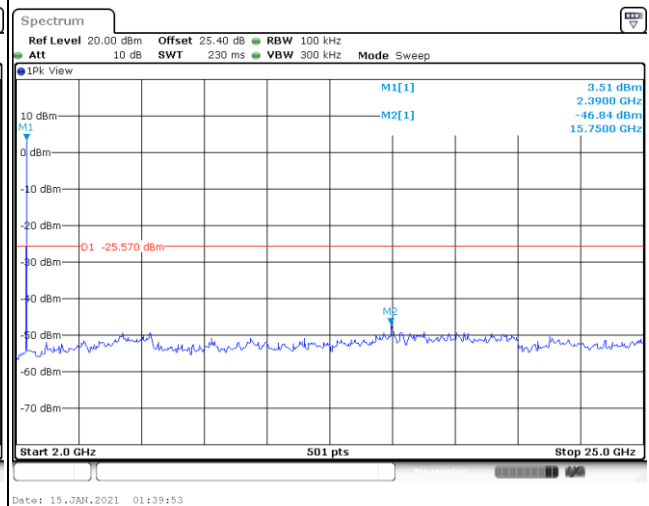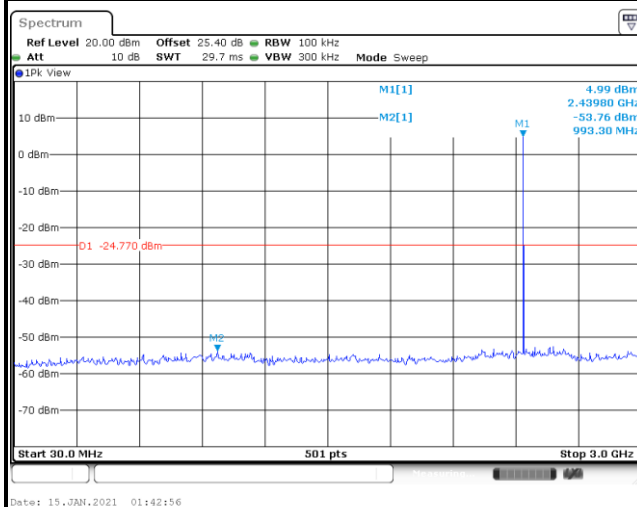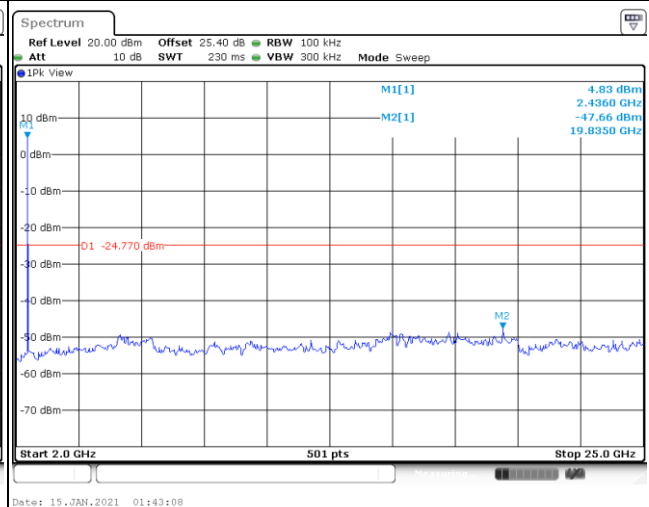**Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 00****Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 00****Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 19****Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 19**

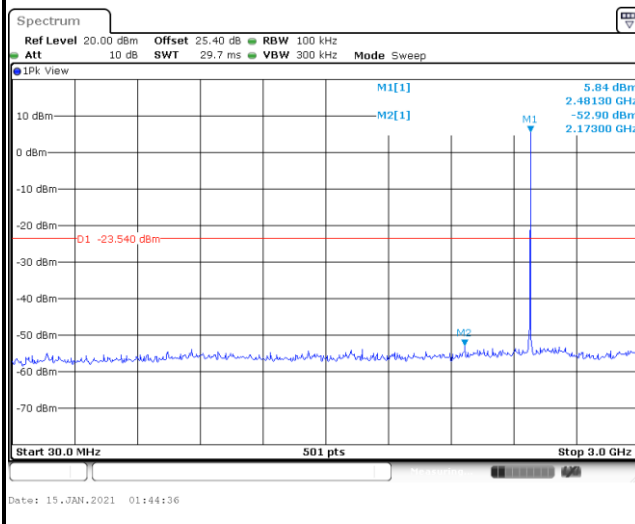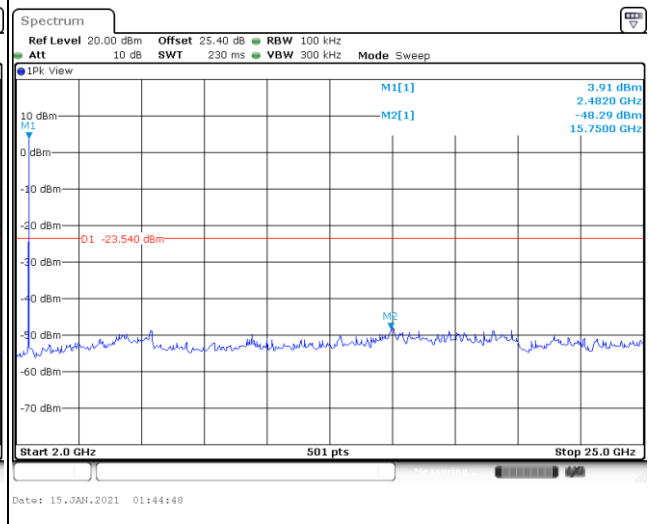**Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 39****Conducted Spurious Emission Plot on  
Bluetooth LE 1Mbps GFSK Channel 39**

## &lt;2Mbps&gt;

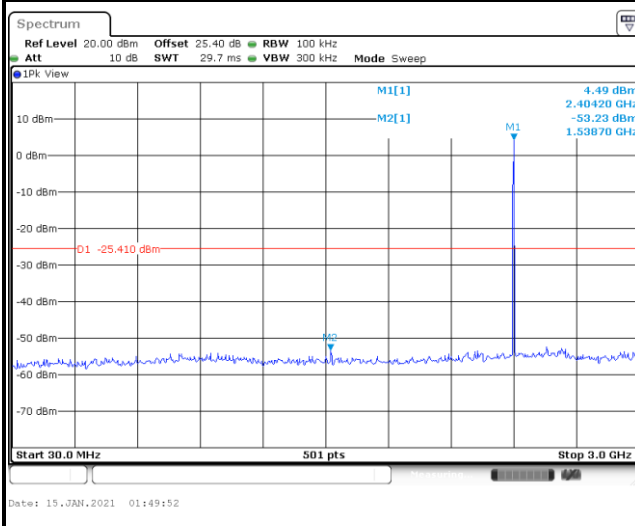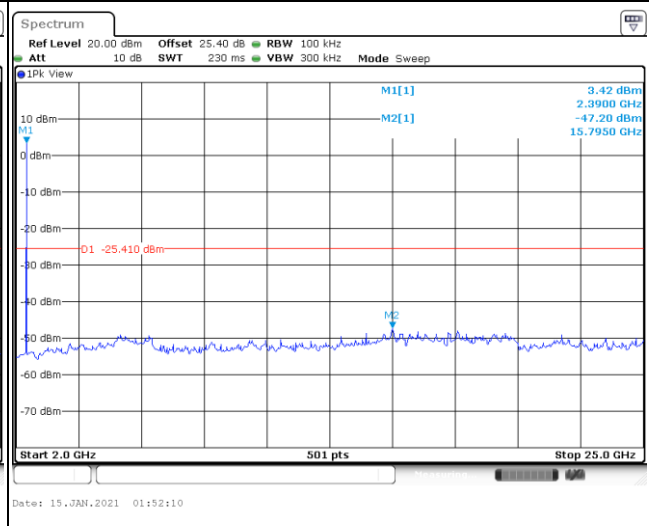**Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 00**

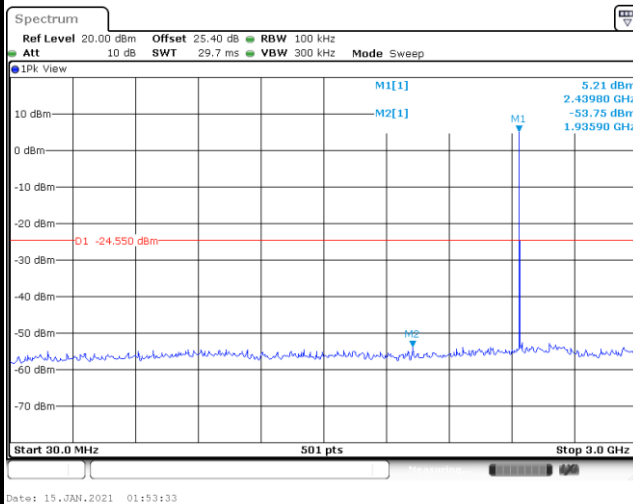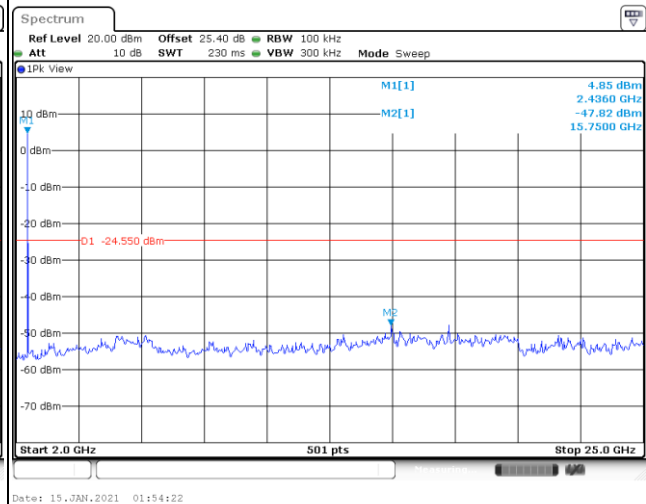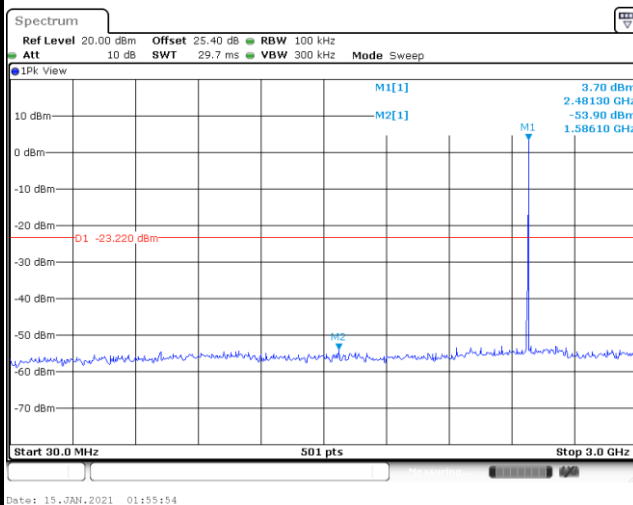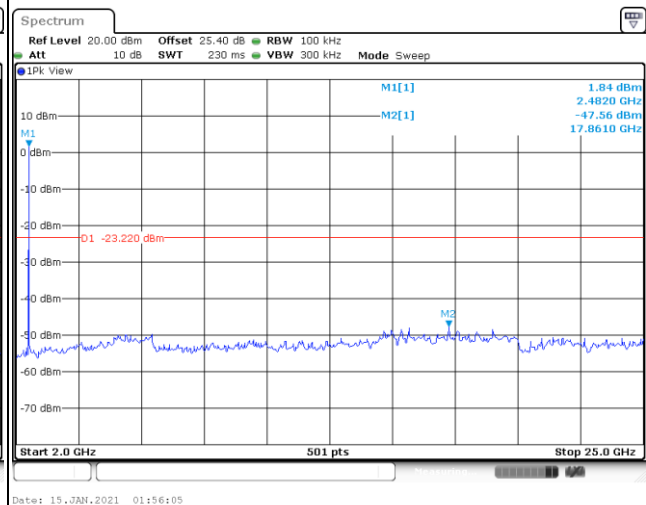**Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 39****Conducted Spurious Emission Plot on  
Bluetooth LE 2Mbps GFSK Channel 39**

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated test below 30MHz

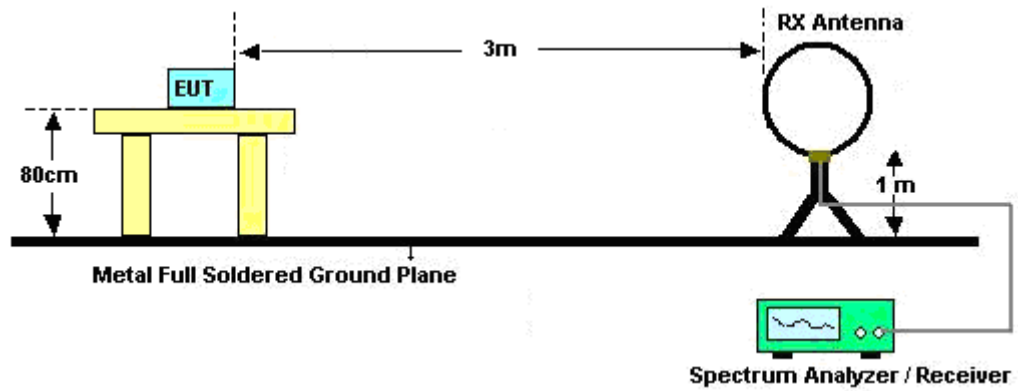


For radiated test from 30MHz to 1GHz

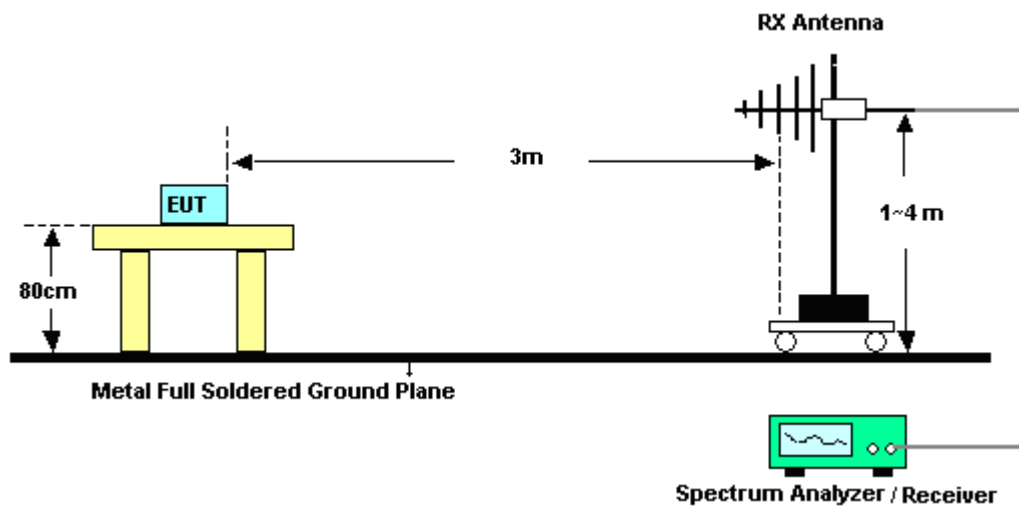

For radiated test from 1GHz to 18GHz

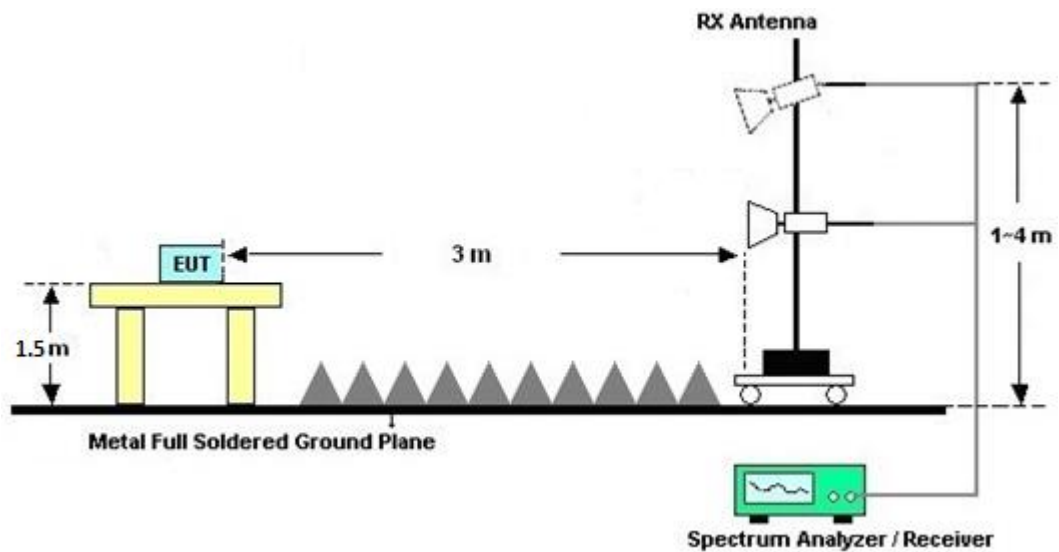

For radiated test above 18GHz

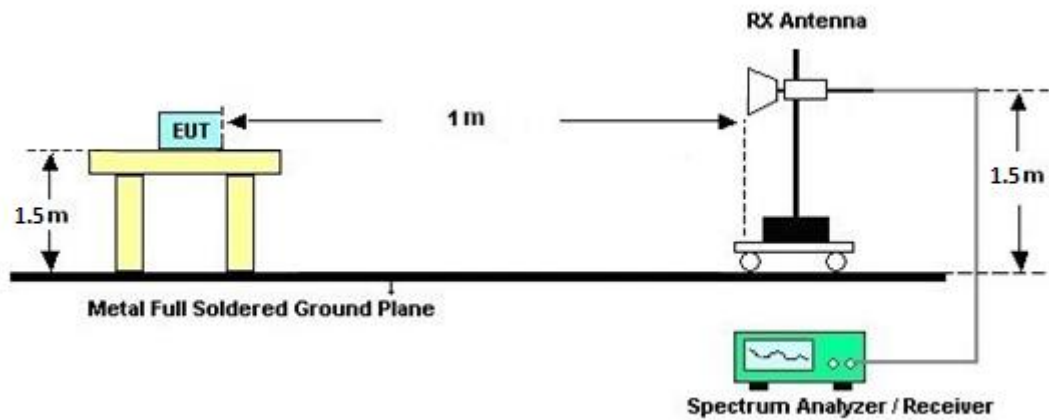

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

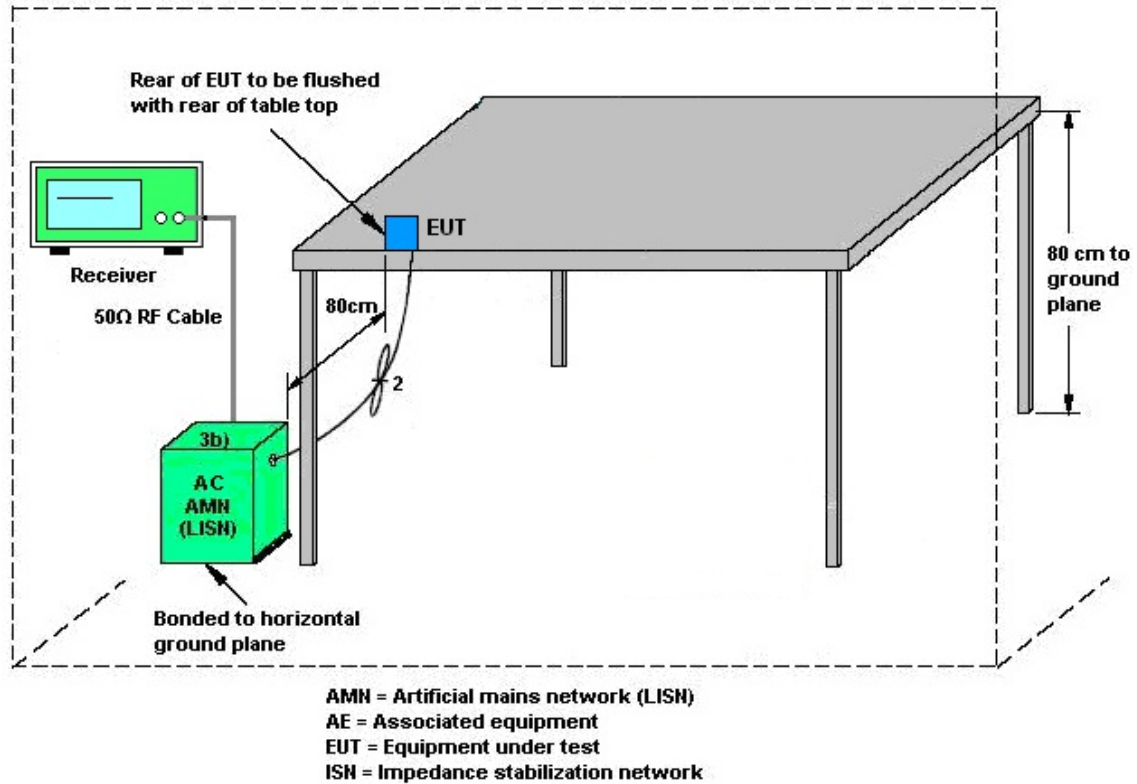

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

| Instrument               | Brand Name         | Model No.                         | Serial No.             | Characteristics                  | Calibration Date | Test Date                       | Due Date      | Remark                   |
|--------------------------|--------------------|-----------------------------------|------------------------|----------------------------------|------------------|---------------------------------|---------------|--------------------------|
| Loop Antenna             | Rohde & Schwarz    | HFH2-Z2                           | 100488                 | 9 kHz~30 MHz                     | Jul. 14, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Jul. 13, 2021 | Radiation<br>(03CH16-HY) |
| Bilog Antenna            | TESEQ              | CBL 6111D &<br>00802N1D01N<br>-06 | 47020 & 06             | 30MHz to 1GHz                    | Oct. 11, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Oct. 10, 2021 | Radiation<br>(03CH16-HY) |
| Amplifier                | SONOMA             | 310N                              | 371607                 | 9kHz~1G                          | Sep. 30, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Sep. 29, 2021 | Radiation<br>(03CH16-HY) |
| Horn Antenna             | SCHWARZBE<br>CK    | BBHA 9120 D                       | 9120D-1522             | 1G~18GHz                         | Sep. 29, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Sep. 28, 2021 | Radiation<br>(03CH16-HY) |
| Amplifier                | EMCI               | EMC051845S<br>E                   | 980729                 | 1-18GHz                          | Jul. 10, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Jul. 09, 2021 | Radiation<br>(03CH16-HY) |
| SHF-EHF<br>Horn Antenna  | SCHWARZBE<br>CK    | BBHA 9170                         | BBHA9170576            | 18GHz ~40GHz                     | May 22, 2010     | Jan. 13, 2021~<br>Jan. 26, 2021 | May 21, 2021  | Radiation<br>(03CH16-HY) |
| Preamplifier             | Keysight           | 83017A                            | MY53270264             | 1GHz~26.5GHz                     | Dec. 10, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Dec. 09, 2021 | Radiation<br>(03CH16-HY) |
| EMI Test<br>Receiver     | Keysight           | N9038A(MXE)                       | MY57290111             | 3Hz~26.5GHz                      | Dec. 11, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Dec. 10, 2021 | Radiation<br>(03CH16-HY) |
| RF Cable                 | HUBER +<br>SUHNER  | SUCOFLEX<br>104                   | MY11680/4PE            | NA                               | Aug. 29, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Aug. 28, 2021 | Radiation<br>(03CH16-HY) |
| RF Cable                 | HUBER +<br>SUHNER  | SUCOFLEX<br>104                   | MY11688/4PE            | NA                               | Aug. 29, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Aug. 28, 2021 | Radiation<br>(03CH16-HY) |
| RF Cable                 | HUBER +<br>SUHNER  | SUCOFLEX<br>102                   | EC-A5-300-575<br>7     | NA                               | Aug. 29, 2020    | Jan. 13, 2021~<br>Jan. 26, 2021 | Aug. 28, 2021 | Radiation<br>(03CH16-HY) |
| Software                 | Audix              | E3<br>6.2009-8-24                 | RK-001136              | N/A                              | N/A              | Jan. 13, 2021~<br>Jan. 26, 2021 | N/A           | Radiation<br>(03CH16-HY) |
| Controller               | ChainTek           | 3000-1                            | N/A                    | Control Turn<br>table & Ant Mast | N/A              | Jan. 13, 2021~<br>Jan. 26, 2021 | N/A           | Radiation<br>(03CH16-HY) |
| Antenna Mast             | ChainTek           | MBS-520-1                         | N/A                    | 1m~4m                            | N/A              | Jan. 13, 2021~<br>Jan. 26, 2021 | N/A           | Radiation<br>(03CH16-HY) |
| Turn Table               | ChainTek           | T-200-S-1                         | N/A                    | 0~360 Degree                     | N/A              | Jan. 13, 2021~<br>Jan. 26, 2021 | N/A           | Radiation<br>(03CH16-HY) |
| AC Power<br>Source       | ChainTek           | APC-1000W                         | N/A                    | N/A                              | N/A              | Jan. 22, 2021                   | N/A           | Conduction<br>(CO05-HY)  |
| EMI Test<br>Receiver     | Rohde &<br>Schwarz | ESR3                              | 102317                 | 9kHz~3.6GHz                      | Sep. 11, 2020    | Jan. 22, 2021                   | Sep. 10, 2021 | Conduction<br>(CO05-HY)  |
| Hygrometer               | Testo              | 608-H1                            | 34913912               | N/A                              | Nov. 18, 2020    | Jan. 22, 2021                   | Nov. 17, 2021 | Conduction<br>(CO05-HY)  |
| LISN                     | Rohde &<br>Schwarz | ENV216                            | 100081                 | 9kHz~30MHz                       | Nov. 16, 2020    | Jan. 22, 2021                   | Nov. 15, 2021 | Conduction<br>(CO05-HY)  |
| Software                 | Rohde &<br>Schwarz | EMC32 V10.30                      | N/A                    | N/A                              | N/A              | Jan. 22, 2021                   | N/A           | Conduction<br>(CO05-HY)  |
| LISN Cable               | MVE                | RG-400                            | 260260                 | N/A                              | Dec. 31, 2020    | Jan. 22, 2021                   | Dec. 30, 2021 | Conduction<br>(CO05-HY)  |
| Pulse Limiter            | SCHWARZBE<br>CK    | ESHVTS<br>9561-F N3-Z2            | 109561-F<br>N003730851 | 9kHz~200MHz                      | Nov. 02, 2020    | Jan. 22, 2021                   | Nov. 01, 2021 | Conduction<br>(CO05-HY)  |
| Hygrometer               | Testo              | 608-H1                            | 34893241               | N/A                              | Mar. 02, 2020    | Jan. 08, 2021~<br>Jan. 19, 2021 | Mar. 01, 2021 | Conducted<br>(TH05-HY)   |
| Power Sensor             | DARE               | RPR3006W                          | 16I00054SNO1<br>0      | 10MHz~6GHz                       | Dec. 09, 2020    | Jan. 08, 2021~<br>Jan. 19, 2021 | Dec. 08, 2021 | Conducted<br>(TH05-HY)   |
| Signal<br>Analyzer       | Rohde &<br>Schwarz | FSV40                             | 101566                 | 10Hz ~ 40GHz                     | Jul. 22, 2020    | Jan. 08, 2021~<br>Jan. 19, 2021 | Jul. 21, 2021 | Conducted<br>(TH05-HY)   |
| Switch Box &<br>RF Cable | EM<br>Electronics  | EMSW18SE                          | SW200302               | N/A                              | Mar. 17, 2020    | Jan. 08, 2021~<br>Jan. 19, 2021 | Mar. 16, 2021 | Conducted<br>(TH05-HY)   |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.3 |
|-------------------------------------------------------------------------|-----|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.5 |
|-------------------------------------------------------------------------|-----|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 6.3 |
|-------------------------------------------------------------------------|-----|

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.7 |
|-------------------------------------------------------------------------|-----|

**Appendix A. Test Result of Conducted Test Items**

|                |                       |                    |       |    |
|----------------|-----------------------|--------------------|-------|----|
| Test Engineer: | Rebecca LI / Hank Hsu | Temperature:       | 21~25 | °C |
| Test Date:     | 2021/1/8~2021/1/19    | Relative Humidity: | 51~54 | %  |

&lt;Ant. 11&gt;

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE  | 1Mbps     | 1   | 0   | 2402        | 1.016                 | 0.670        | 0.50               | Pass      |
| BLE  | 1Mbps     | 1   | 19  | 2440        | 1.014                 | 0.666        | 0.50               | Pass      |
| BLE  | 1Mbps     | 1   | 39  | 2480        | 1.016                 | 0.666        | 0.50               | Pass      |

**TEST RESULTS DATA**  
**Average Power Table**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE  | 1Mbps     | 1   | 0   | 2402        | 7.80                          | 30.00                       | -3.10    | 4.70             | 36.00                  | Pass       |
| BLE  | 1Mbps     | 1   | 19  | 2440        | 8.00                          | 30.00                       | -3.10    | 4.90             | 36.00                  | Pass       |
| BLE  | 1Mbps     | 1   | 39  | 2480        | 8.70                          | 30.00                       | -3.10    | 5.60             | 36.00                  | Pass       |

**TEST RESULTS DATA**  
**Peak Power Density**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE  | 1Mbps     | 1   | 0   | 2402        | 5.92                   | -8.49                | -3.10    | 8.00                       | Pass      |
| BLE  | 1Mbps     | 1   | 19  | 2440        | 6.33                   | -8.19                | -3.10    | 8.00                       | Pass      |
| BLE  | 1Mbps     | 1   | 39  | 2480        | 7.32                   | -7.18                | -3.10    | 8.00                       | Pass      |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE  | 2Mbps     | 1   | 0   | 2402        | 1.994                 | 1.152        | 0.50               | Pass      |
| BLE  | 2Mbps     | 1   | 19  | 2440        | 1.994                 | 1.148        | 0.50               | Pass      |
| BLE  | 2Mbps     | 1   | 39  | 2480        | 1.982                 | 1.148        | 0.50               | Pass      |

**TEST RESULTS DATA**  
**Average Power Table**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|-------------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE  | 2Mbps     | 1   | 0   | 2402        | 8.00                          | 30.00                       | -3.10    | 4.90             | 36.00                  | Pass       |
| BLE  | 2Mbps     | 1   | 19  | 2440        | 8.30                          | 30.00                       | -3.10    | 5.20             | 36.00                  | Pass       |
| BLE  | 2Mbps     | 1   | 39  | 2480        | 9.00                          | 30.00                       | -3.10    | 5.90             | 36.00                  | Pass       |

**TEST RESULTS DATA**  
**Peak Power Density**

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE  | 2Mbps     | 1   | 0   | 2402        | 6.15                   | -11.23               | -3.10    | 8.00                       | Pass      |
| BLE  | 2Mbps     | 1   | 19  | 2440        | 6.62                   | -10.86               | -3.10    | 8.00                       | Pass      |
| BLE  | 2Mbps     | 1   | 39  | 2480        | 7.68                   | -9.76                | -3.10    | 8.00                       | Pass      |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.