

Testing Tomorrow's Technology

Report of

**Title 47 CFR Part 95 Subpart J,
Multi User Radio Services (MURS) and
TIA-603-E (2016) Land Mobile FM or PM- Communications Equipment
Measurement and Performance Standard**

For the

Radio Systems Corporation

Invisible Fence Brand Smart Doorman 2.0

Model: RAC00-17202

FCC ID: KE3-3003679


Issue Date: October 30, 2020

Test Dates: October 19, 20 & 22, 2020

UST Project No.: 20-0276

Total Number of Pages Contained in this Report: 20

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

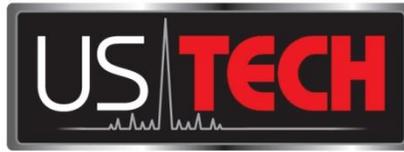

Testing Tomorrow's Technology

I, George Yang, certify that I am authorized to sign for the test facility and that all of the statements in this report and in the exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: 

Name: George Yang

Title: Laboratory Manager

Date: October 30, 2020



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. US Tech's NVLAP accreditation does not allow product endorsement by NVLAP or any agency of the U.S. Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	5
1.1	Product Description	5
1.2	Related Submittal(s)/Grant(s).....	5
1.3	Test Methodology.....	6
1.4	Test Facility	6
1.4.1	Radiated Emissions Test Site (Shielded Semi Anechoic EMC Chamber) ...	6
1.5	Test Equipment.....	8
1.6	Modifications to EUT	8
2	Output Power.....	12
2.1	Maximum Transmitter Power (FCC 2.1046 & 95.2767)	12
2.1.1	Maximum Power Allowed	12
2.1.2	Measured Fundamental Signal.....	13
3	Emissions Bandwidth (Part 95.2773(a))	14
3.1	Maximum Authorized Bandwidth.....	14
4	MURS Unwanted Radiation Emissions(CFR 95.2779).....	15
4.1	Test Method	15
4.2	FCC Limits	15
4.3	Test Results	15
5	Field Strength of Spurious Radiation, (FCC 2.1051 & 95.2779(b)(2)).....	17
5.1	Test Method	17
5.2	FCC Limits	17
5.3	Test Results	18
6	Frequency Stability (CFR 2.1055, 95.2765)	19
6.1	Test Method	19
6.2	FCC Limits	19
6.3	Test Results	20

List of Figures

<u>Figure</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Radiated Emissions Disturbance Measurement Facility Diagram	7
Figure 2.	EUT Test Configuration – Radiated Emissions	9
Figure 3.	EUT Test Configuration - AC Power Line Conducted Emissions	10
Figure 4.	Bandwidth Measurement	14
Figure 5.	Emission Mask	16

List of Tables

<u>Table Title</u>	<u>Page</u>
Table 1. Test Instruments.....	8
Table 2. EUT and Peripherals	11
Table 3. Antennas	11
Table 4. Maximum Output Power	13
Table 5. Field Strength of Spurious Radiation.....	18
Table 6. Frequency Deviation/Stability	20

1 General Information

1.1 Product Description

The Equipment under Test (EUT) is the Radio Systems, Invisible Fence Brand Smart Doorman 2.0, Model RAC00-17202. The system is made up of two parts. The Electronic Module part number: RAC00-17202 and the doorframe part number RAC00-17200. Together they make up the Smart Door. The door is designed to allow the pet access to go outside when needed without assistance. It contains an electro-mechanical automatic pet door and coil transmitter (contained within the Electronic Module) that can serve as both an appliance proximity transmitter and as an avoidance transmitter. The unit is installed at the desired pet door location. The EUT may operate at one of the following fundamental frequencies: 15kHz, 20kHz, or 25kHz. For this test the EUT was programmed for 25 kHz. Magnetic field detection range for a compatible receiver is also controllable and may be set from 1.5 to 2.5 feet in one-half foot increments.

The EUT also utilizes the MURS band for data communications between units. The MURS transceiver is predominantly off. This unit communicates with a central data collection point at a very low duty cycle. It includes an internal loop antenna for MURS communications. Example use cases of the MURS channel are to report the internal battery level, a pet's entry or exit, alarms, and read/write the operating parameters of the coil transmitter. Typical line of sight communication range between a Doorman Host and a central data collection unit is 500 feet. The EUT may be powered by either a rechargeable 4.2V Li-Ion battery or AC/DC power supply.

This report conveys test results related to the MURS transceiver. The Low Frequency, Low Power Transmitter has been tested and evaluated in a separate test report.

Rated Maximum Output Power: +16.0 dBm
Measured Output Power (ERP): +2.2 dBm
Modulation type: GFSK
Data Rate: 3.6 kbps
Frequency Deviation: 1.428 kHz

1.2 Related Submittal(s)/Grant(s)

The EUT is subject to the following authorizations:

- a) Certification under section 15.207/209 as a Low Power Transmitter General Field Limits (9 kHz-30 MHz)
- b) SDoC under section 15 Subpart B as an Unintentional Radiator device.

1.3 Test Methodology

These measurements were conducted in accordance with the requirements of Title 47 CFR Part 95, Subpart E and TIA-603-E (2016). All measurements are in terms of peak values unless stated otherwise. The measurement system video bandwidth was set to at least three times that of the resolution bandwidth to prevent the introduction of amplitude smoothing throughout the evaluation process. If interconnecting cables are part of the measurement setup then they were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1.

1.4 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA, 30004. This site has been fully described and registered with the FCC under registration number US5301. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1. US Tech is an accredited laboratory under the National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code: 200162-0.

The shielded semi anechoic EMC Chamber and the conducted disturbance measurement facilities used to collect the radiated and conducted emissions data are located at 3505 Francis Circle, Alpharetta, GA (USA). These test sites meet the requirements given in ANSI C63.4:2014.

1.4.1 Radiated Emissions Test Site (Shielded Semi Anechoic EMC Chamber)

The radiated emissions disturbance measurement facility consists of an 8.5 m long by 5.5 m wide and 5.6 m high shielded semi anechoic EMC Chamber. The chamber is lined with ferrite core and RF absorbers. The quiet zone is 2.0 m.

The test facility layout is shown in the figure below. A remotely controlled 2.0 m diameter flush-mounted turntable is provided for rotating (through at least 360 degrees) the EUT. A non-conductive table, 1.5 m long by 1.0 m wide by 0.8 m high is used in conjunction with the turntable for tabletop equipment. Electrical service for the EUT is provided through openings at the center of the turntable.

Provision for receiving antenna power and data wires is provided by junction boxes placed at the perimeter of the chamber. The receive antenna mast is remotely controlled and can be varied in height from 1 m to 4 m.

Power and data cables for the radiated disturbance measurement facility are run through PVC tubing under the raised floor or are laid directly upon the ground plane.

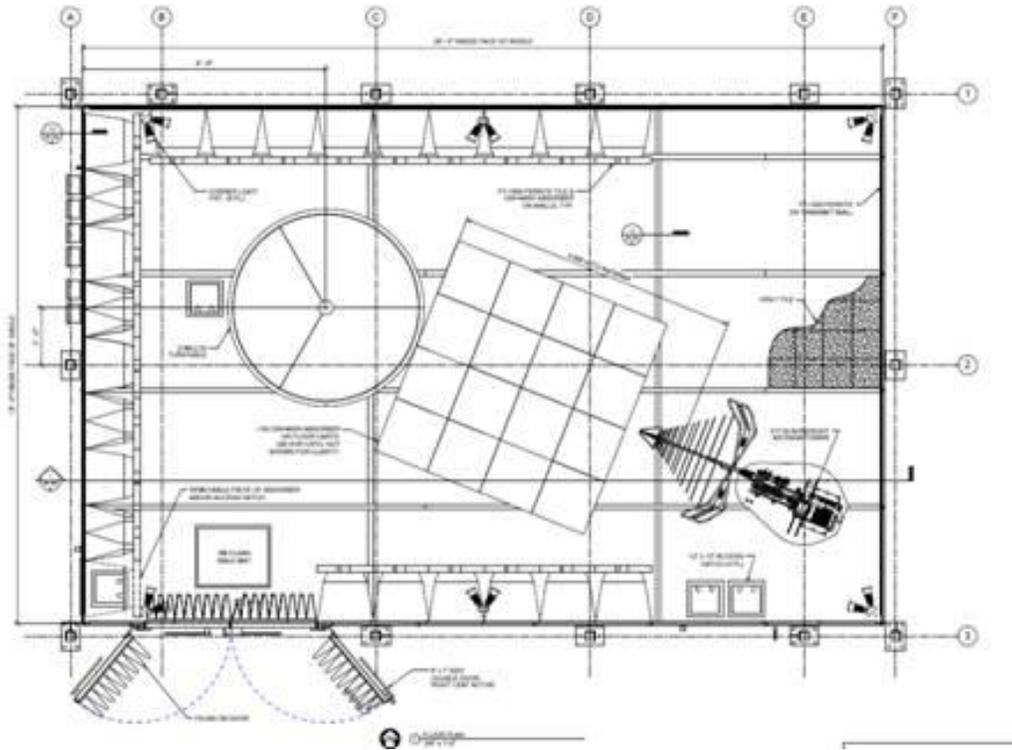


Figure 1. Radiated Emissions Disturbance Measurement Facility Diagram

1.5 Test Equipment

A list of test equipment used for these measurements is found in Table 1 below.

Table 1. Test Instruments

INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	9/2/2022 2 yr. Cal
LOOP ANTENNA	6502	EMCO	9810-3246	4/06/2022 2 yr
BICONICAL ANTENNA	3110B	EMCO	9306-1708	6/27/2021 2 yr. Cal
LOG PERIODIC ANTENNA	3146	EMCO	9110-3236	8/22/2021 2 yr. Cal
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr.
PRE-AMPLIFIER	8449B	HEWLETT-PACKARD	3008A00480	5/13/2021
PRE-AMPLIFIER	8447D	HEWLETT-PACKARD	1937A02980	5/13/2021
Temperature Chamber	SM16/ DR4500A	THERMOTRON/ HONEYWELL	17095	3/27/2021 2 yr.

Note: The calibration interval of the above test instruments is 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

1.6 Modifications to EUT

No modifications were necessary to bring the EUT into compliance with FCC Part 95.

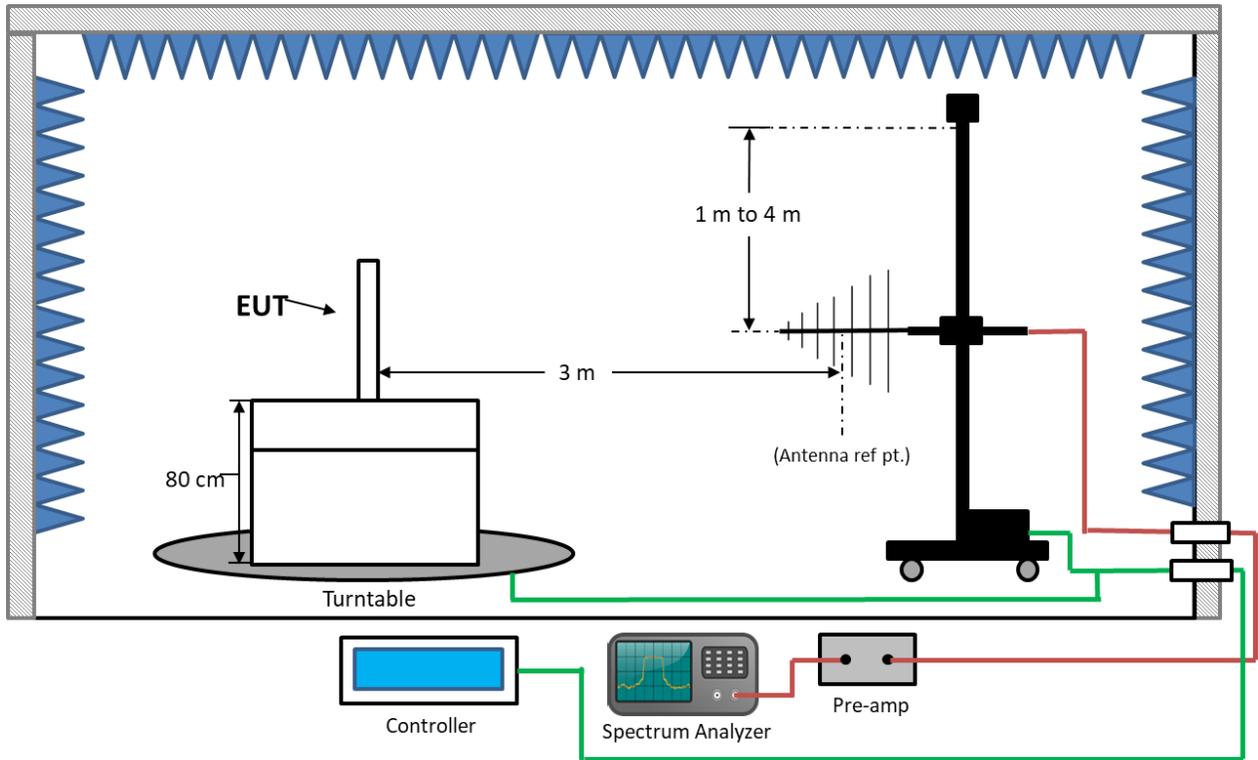


Figure 2. EUT Test Configuration – Radiated Emissions

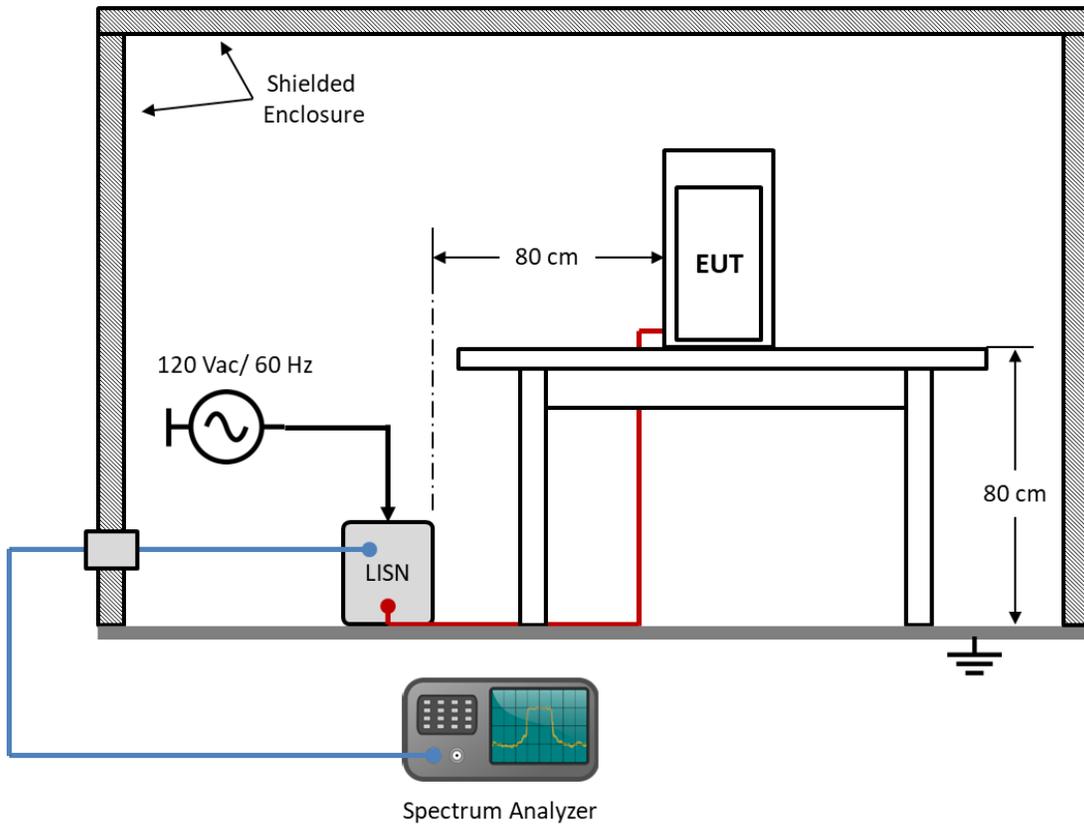


Figure 3. EUT Test Configuration - AC Power Line Conducted Emissions

Table 2. EUT and Peripherals

EUT/ MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/ IC ID	CABLES P/D
Doorman 2.0 Radio Systems	RAC00-17202	Engineering sample	FCC ID: KE3-3003679	P U
PERIPHERAL/ MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/ IC ID	CABLES P/D
Plug In AC/DC Adapter/ Radio Systems Corp	650-249-6	Engineering Sample	N/A	P U
Li-Ion Battery Radio Systems Corp	610-3901	Engineering Sample	N/A	N/A

P = Power; D = Data U = Unshielded

Table 3. Antennas

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	PART NUMBER	GAIN dB_i	TYPE OF CONNECTOR
Antenna	Radio Systems Corp	Internal Loop	Integral loop	-19.0	PCB Trace

2 Output Power

2.1 Maximum Transmitter Power (FCC 2.1046 & 95.2767)

On the test site, the EUT was placed on top of a non-conductive table, 80 cm above the floor for measurements below 1 GHz and 150 cm above the floor for measurements > 1 GHz. The EUT was also evaluated in three orthogonal positions to determine the worst case position. The front of the EUT faced the measurement antenna located 3 meters away. Each signal measured was maximized by raising and lowering the receive antenna between 1 and 4 meters in height while monitoring the ever changing spectrum analyzer display (with channel A in the Clear-Write mode and channel B in the Max-Hold mode) for the largest signal visible. That exact antenna height where the signal was maximized was recorded for reproducibility purposes. Also, the EUT was rotated about its Y-axis while monitoring the Spectrum Analyzer display for maximum. The EUT azimuth was recorded for reproducibility purposes. The EUT was measured when both maxima were simultaneously satisfied.

The maximum power was measured using the radiated method. The EUT was setup to transmit a continuous signal with >98% duty cycle. The receiver and video bandwidth on the spectrum analyzer was maximized and the span was sufficiently large enough to capture the peak emissions. The peak measurement of the signal was recorded.

2.1.1 Maximum Power Allowed

The maximum power allowed is 2 Watts (or 33dBm) per FCC 95.2767.

US Tech Test Report:
 Report Number:
 Issue Date:
 Customer:
 Model:
 FCC ID:

FCC Part 95
 20-0276
 October 30, 2020
 Radio Systems Corporation
 RAC00-17202
 KE3-3003679

2.1.2 Measured Fundamental Signal

The maximum output power of the EUT as measured below is 0.002 W.

2.2 dBm into 50 ohm measurement system= 0.002 W < 2 Watts
 Antenna gain= -19.0 dBi (from Theory of Op)

The EUT was determined to comply with the Maximum Allowed Power.

Table 4. Maximum Output Power


Frequency MHz	Maximum RX Reading (Units A)	Recreated Reading During Substitution (Using Same Units A) - Ideally 0	Difference Column A - B	TX Cable Loss (dB)	TX Gain (dB)	RF Power into TX antenna (dBm) (SG Value-CL)	RF Power into substitution TX antenna (dBm)	Limit (dBm)	Margin Below Limit (dB)
151.82	81.31	81.34	-0.03	-0.45	0.9	1.8	2.22	33.0	30.78

Sample Calculation at 151.82 MHz:

SG Power into TX antenna	1.8 (dBm)
+ TX Gain	0.9 (dB)
+ Difference between recreated and actual	-0.03 (dB)
+ TX Cable loss	-0.45 (dB)
<hr/>	
RF Power into TX Antenna	2.22 (dBm)
Limit	33.00 (dBm)
RF Power into TX Antenna	2.22 (dBm)
<hr/>	
Margin	30.78 (dB)

Test Date: October 20, 2020

Tested By

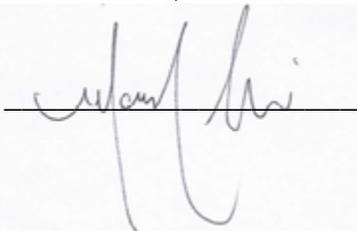Signature: 

Name: Mark Afroozi

3 Emissions Bandwidth (Part 95.2773(a))

The EUT was modulated by its own internal sources. The Bandwidth of the Fundamental was measured using a spectrum analyzer, as shown below. A RBW that was > 1% of the authorized bandwidth was used to measure the EUT's bandwidth.

Using the Emission Bandwidth measurement technique of ANSI C63.10-2009 as a guide, the measurement of the Emission Bandwidth is found to be 5.0329 kHz.

3.1 Maximum Authorized Bandwidth

The maximum authorized Bandwidth per 95.2773 (a) = 11.25 kHz. The EUT was found to comply with the Maximum Authorized Bandwidth since 6.1277 kHz < 11.25 kHz.

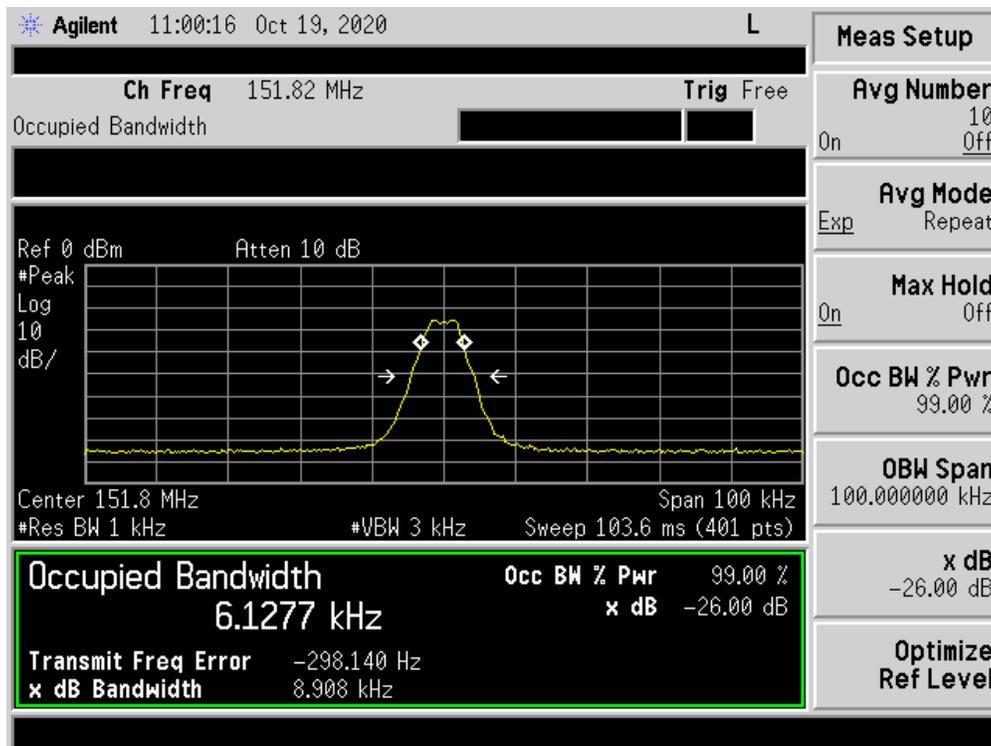



Figure 4. Bandwidth Measurement

Test Date: October 19, 2020

Tested By:

Signature: 

Name: Mark Afroozi

4 MURS Unwanted Radiation Emissions(CFR 95.2779)

This requirement is from 47 CFR Part 2, Subpart J, Sections 1053 and 95.2779(b). The power of each unwanted emission shall be less than the transmitter power as specified in paragraph 5.2 below.

4.1 Test Method

These emissions were measured on the Spectrum Analyzer using the radiated method.

4.2 FCC Limits

Per CFR Part 95.2779(b), the power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:

- (1) $7.27(f_d - 2.88 \text{ kHz})$ dB on any frequency removed from the channel center frequency by a displacement frequency (f_d in kHz) that is more than 5.625 kHz, but not more than 12.5 kHz.
- (2) $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation, on any frequency removed from the channel center frequency by more than 12.5 kHz.

4.3 Test Results

The EUT is designed to operate at 151.8200 MHz and is assumed not to be using any audio low pass filter circuits, therefore only Emissions Mask 1 was applied.

The measured emissions comply with the specified mask as shown below.

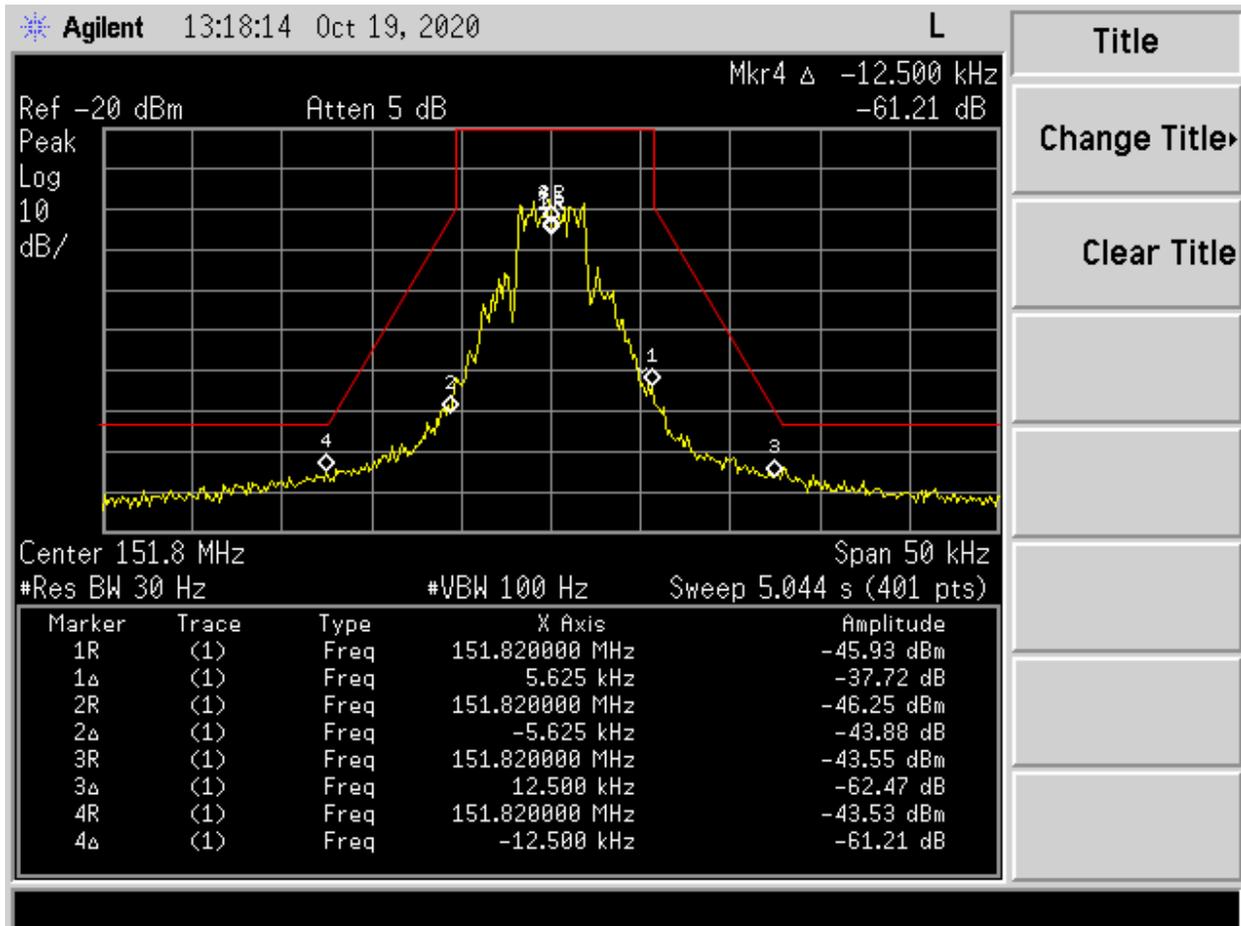


Figure 5. Emission Mask

Test Date: October 19, 2020

Tested By
 Signature:

Name: Mark Afroozi

5 Field Strength of Spurious Radiation, (FCC 2.1051 & 95.2779(b)(2))

5.1 Test Method

Spurious emissions were evaluated by the substitution method from 30 MHz to 1.0 GHz at a EUT to antenna distance of 3 meters. The EUT was tested in the far field. Measurements for 30 to 1000 MHz were made with the analyzer's bandwidth set to 120 kHz. Measurements above 1000 MHz were made with analyzer's bandwidth set to 1 MHz and 3 MHz. Since the EUT is part of a portable configuration, the EUT was rotated through the three orthogonal planes to produce the highest emissions relative to the limits. Results are shown in the Table below.

5.2 FCC Limits

The limit is determined using the following information: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz, the limit will be at least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.

$$\begin{aligned}\text{Measured ERP Power} &= 0.002 \text{ Watts} = 2.2 \text{ dBm} \\ \text{Attenuation Calculation} &= 50 + 10\log(0.002) = 23.01 \\ \text{Power Limit} &= 2.2 \text{ dBm} - 23.01 = -20.81 \text{ dBm}\end{aligned}$$

5.3 Test Results

Table 5. Field Strength of Spurious Radiation


Frequency MHz	Maximum RX Reading (Units A)	Recreated Reading During Substitution (Using Same Units A) - Ideally 0	Difference Column A - B	TX Cable Loss (dB)	TX Gain (dB)	RF Power into TX antenna (dBm) (SG Value-CL)	RF Power into substitution TX antenna (dBm)	Limit (dBm)	Margin Below Limit (dB)
303.64	58.22	58.32	-0.10	-0.64	5.0	-50.3	-46.04	-20.81	25.23
455.46	56.34	56.40	-0.06	-0.81	6.5	-56.2	-50.57	-20.81	29.76
607.27	58.51	58.47	0.04	-0.93	6.5	-52.6	-46.99	-20.81	26.18
759.10	52.38	52.22	0.16	-1.06	7.0	-56.2	-50.10	-20.81	29.29
910.92	52.42	52.53	-0.11	-1.20	6.5	-53.7	-48.51	-20.81	27.70
1062.30	57.74	57.92	-0.18	-2.14	4.8	-55.8	-53.35	-20.81	32.54
1214.50	54.30	54.56	-0.26	-2.14	5.5	-62.0	-58.90	-20.81	38.09
1366.70	65.68	65.80	-0.12	-2.14	5.8	-43.7	-40.16	-20.81	19.35
1518.50	56.14	56.30	-0.16	-2.63	6.8	-55.8	-51.80	-20.81	30.99
1671.00	56.18	56.21	-0.03	-2.63	6.7	-52.0	-48.00	-20.81	27.19
1821.70	56.22	56.09	0.13	-2.63	6.8	-50.0	-45.66	-20.81	24.85

Sample Calculation at 303.64 MHz:

SG Power Into TX Antenna	-50.30 (dBm)
+ TX Gain	5.00 (dB)
+Difference between recreated and actual	-0.10 (dB)
+TX Cable Loss	-0.64 (dB)
<hr/>	
RF Power Into Substitution TX Antenna	-46.04 (dBm)
Limit	-20.81 (dBm)
RF Power into Substitution TX Antenna	-46.04(dBm)
<hr/>	
Margin	25.23 (dB)

Test Date: October 20, 2020

Tested By:

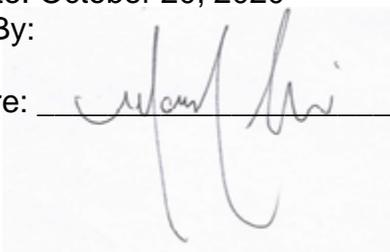Signature: 

Name: Mark Afroozi

6 Frequency Stability (CFR 2.1055, 95.2765)

6.1 Test Method

The EUT was tested in the Thermotron Environmental Chamber. The humidity was tested to a relative value of no more than 50%. The temperature was varied between -30°C to +50°C in 10° increments. All measurements were referenced back to the frequency measured at +20°C. At each set point the temperature was allowed to stabilize for no less than 30 minutes before measurements were recorded and the temperature changed.

6.2 FCC Limits

Per CFR 95.2765 (a)(b), MURS transmitters must maintain a frequency stability of 2.0 ppm, or 5.0 ppm if designed to operate with a 6.25 kHz bandwidth. Since this EUT was measured to have a bandwidth of 6.1277 kHz the limit applied was 5.0 ppm.

6.3 Test Results

Table 6. Frequency Deviation/Stability

Temperature (°C)	Measured Frequency (MHz)	Allocated Frequency (MHz)	Deviation (ppm)	Limit (ppm)
-30	151.820250	151.820125	0.82334276	5.00
-20	151.820125	151.820125	0	5.00
-10	151.820125	151.820125	0	5.00
0	151.820125	151.820125	0	5.00
10	151.820125	151.820125	0	5.00
20 (low voltage)	151.820125	151.820000	0	5.00
20 (nominal voltage)	151.820125	151.820125	0	5.00
20 (high voltage)	151.820125	151.820125	0	5.00
30	151.820125	151.820125	0	5.00
40	151.820125	151.820125	0	5.00
50	151.820125	151.820125	0	5.00


Actual TX Frequency was: 151.820125 MHz

Sample Calculation at -30°C:

$$\text{Deviation} = \frac{151.820250 - 151.820125}{151.820125} = 0.823343 \text{ ppm} < 5.00 \text{ ppm}$$

Test Date: October 22, 2020

Tested By:

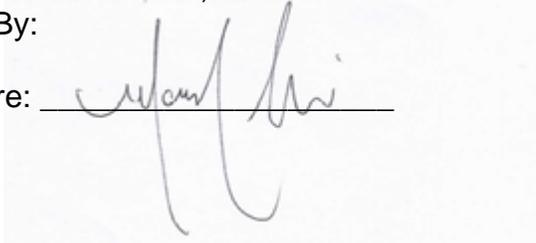Signature: 

Name: Mark Afroozi