



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 1**

CERTIFICATION TEST REPORT

FOR

MEDIA STREAMING DEVICE with BLE, 2.4GHz and 5GHz WLAN Radios

MODEL NUMBER: RUX-J42

**FCC ID: A4RRUX-J42
IC ID: 10395A-RUXJ42**

REPORT NUMBER: 15U20918-E1

ISSUE DATE: JULY 22, 2015

Prepared for

GOOGLE

**1600 AMPHITHEATRE PARKWAY
MOUNTAIN VIEW, CA 94043, U.S.A.**

Prepared by

UL VERIFICATION SERVICES INC.

**47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.**

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	7/22/15	Initial Issue	F. de Anda

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. SOFTWARE AND FIRMWARE	9
5.5. WORST-CASE CONFIGURATION AND MODE	9
5.6. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	13
7. MEASUREMENT METHODS	14
8. ANTENNA PORT TEST RESULTS	15
8.1. ON TIME AND DUTY CYCLE	15
8.2. 802.11b MODE IN THE 2.4 GHz BAND ANTENNA 1	18
8.2.1. 6 dB BANDWIDTH	18
8.2.2. 99% BANDWIDTH	21
8.2.3. OUTPUT POWER	24
8.2.4. POWER SPECTRAL DENSITY	26
8.2.5. OUT-OF-BAND EMISSIONS	29
8.3. 802.11b MODE IN THE 2.4 GHz BAND ANTENNA 2	33
8.3.1. 6 dB BANDWIDTH	33
8.3.2. 99% BANDWIDTH	36
8.3.3. OUTPUT POWER	39
8.3.4. POWER SPECTRAL DENSITY	41
8.3.5. OUT-OF-BAND EMISSIONS	44
8.4. 802.11g MODE IN THE 2.4 GHz BAND ANTENNA 1	48
8.4.1. 6 dB BANDWIDTH	48
8.4.2. 99% BANDWIDTH	51
8.4.3. OUTPUT POWER	54

8.4.4.	POWER SPECTRAL DENSITY	56
8.4.5.	OUT-OF-BAND EMISSIONS	59
8.5.	<i>802.11g MODE IN THE 2.4 GHz BAND ANTENNA 2</i>	<i>63</i>
8.5.1.	6 dB BANDWIDTH.....	63
8.5.2.	99% BANDWIDTH.....	66
8.5.3.	OUTPUT POWER	69
8.5.4.	POWER SPECTRAL DENSITY	71
8.5.5.	OUT-OF-BAND EMISSIONS	74
8.6.	<i>802.11n HT20 MODE IN THE 2.4 GHz BAND ANTENNA 1</i>	<i>78</i>
8.6.1.	6 dB BANDWIDTH.....	78
8.6.2.	99% BANDWIDTH.....	81
8.6.3.	OUTPUT POWER	84
8.6.4.	POWER SPECTRAL DENSITY	86
8.6.5.	OUT-OF-BAND EMISSIONS	89
8.7.	<i>802.11n HT20 MODE IN THE 2.4 GHz BAND ANTENNA 2</i>	<i>93</i>
8.7.1.	6 dB BANDWIDTH.....	93
8.7.2.	99% BANDWIDTH.....	96
8.7.3.	OUTPUT POWER	99
8.7.4.	POWER SPECTRAL DENSITY	101
8.7.5.	OUT-OF-BAND EMISSIONS	104
8.8.	<i>802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 1</i>	<i>108</i>
8.8.1.	6 dB BANDWIDTH.....	108
8.8.2.	99% BANDWIDTH.....	111
8.8.3.	OUTPUT POWER	114
8.8.4.	POWER SPECTRAL DENSITY	116
8.8.5.	OUT-OF-BAND EMISSIONS	119
8.9.	<i>802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 2</i>	<i>123</i>
8.9.1.	6 dB BANDWIDTH.....	123
8.9.2.	99% BANDWIDTH.....	126
8.9.3.	OUTPUT POWER	129
8.9.4.	POWER SPECTRAL DENSITY	131
8.9.5.	OUT-OF-BAND EMISSIONS	134
9.	RADIATED TEST RESULTS.....	138
9.1.	<i>LIMITS AND PROCEDURE</i>	<i>138</i>
9.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	<i>139</i>
9.2.1.	TX ABOVE 1 GHz 802.11b IN THE 2.4 GHz BAND ANTENNA 1	139
9.2.2.	TX ABOVE 1 GHz 802.11b IN THE 2.4 GHz BAND ANTENNA 2	149
9.2.3.	TX ABOVE 1 GHz 802.11g IN THE 2.4 GHz BAND ANTENNA 1	159
9.2.4.	TX ABOVE 1 GHz 802.11g IN THE 2.4 GHz BAND ANTENNA 2	169
9.2.5.	TX ABOVE 1 GHz 802.11n HT20 IN THE 2.4 GHz BAND ANTENNA 1	179
9.2.6.	TX ABOVE 1 GHz 802.11n HT20 IN THE 2.4 GHz BAND ANTENNA 2	189
9.2.7.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 1	199
9.2.8.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 2	209
9.3.	<i>WORST-CASE BELOW 1 GHz.....</i>	<i>219</i>
9.4.	<i>WORST-CASE ABOVE 18GHz</i>	<i>221</i>
10.	AC POWER LINE CONDUCTED EMISSIONS	222

11. SETUP PHOTOS227

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: GOOGLE
1600 AMPHITHEATRE PARKWAY
MOUNTAIN VIEW, CA 94043, U.S.A.

EUT DESCRIPTION: MEDIA STREAMING DEVICE WITH BLE, 2.4GHZ AND 5GHZ
WLAN RADIOS

MODEL: RUX-J42

SERIAL NUMBER: DVT 1(RADIATED) & 5512103ZZBJB (CONDUCTED)

DATE TESTED: June 09 – July 13, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



FRANCISCO DE ANDA
PROJECT LEAD
UL Verification Services Inc.

Tested By:



CHRIS XIONG
EMC ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009 for FCC and ANSI C63.10-2013 for IC, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-247 Issue 1.

Testing for radiated emissions above 1GHz was performed with the EUT elevated at 1.5m instead of 0.8m. 1.5m is the required height in ANSI C63.10:2013 as referenced by RSS GEN issue 4. This test height has been permitted by FCC as discussed in FCC/TCB conference call in December 2014.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Media Streaming Device with BLE, 2.4GHz and 5GHz WLAN Radios.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	17.02	50.35
2412 - 2462	802.11g	14.92	31.05
2412 - 2462	802.11n HT20	13.84	24.21
2422 - 2452	802.11n HT40	11.27	13.40

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes PCB antennas, with a maximum gain of 3.0dBi for antenna 1 and 3.1dBi for antenna 2.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 15.2.7.09.

The test utility software used during testing was Labtool ver. 2.0.0.71

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Lenovo	ADLX65NCC2A	11545N0263Z1Z5994AH GRO	N/A
AC Adapter	Google	S005BBU0500100	Proto 1	N/A
Laptop	Lenovo	E440	PF-074E9W 15/01	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	Barrel	unshielded	0.8	
2	USB	1	USB	unshielded	1.5	Power cable
3	USB	1	USB	unshielded	2.5	
4	USB	1	Micro USB	unshielded	0.2	Y-cable


TEST SETUP

The EUT is connected to a host laptop via USB, test software exercised the radio.

SETUP DIAGRAM FOR RADIATED and AC LC TESTS

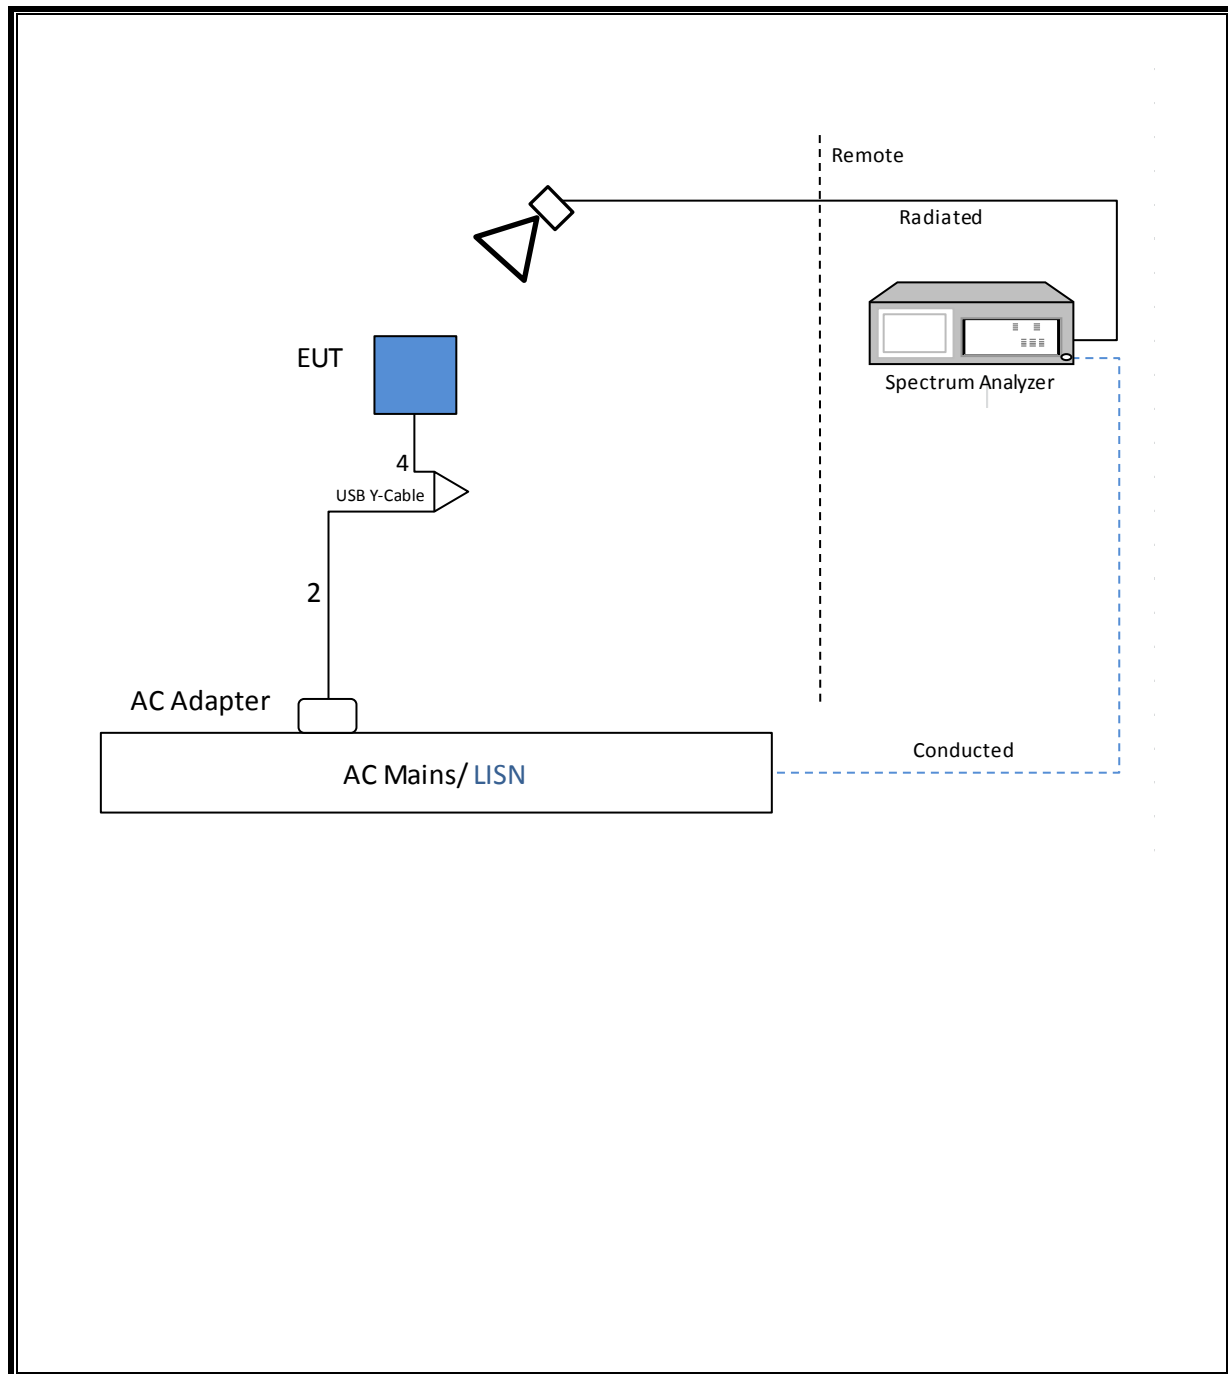

SETUP DIAGRAM FOR CONDUCTED TESTS

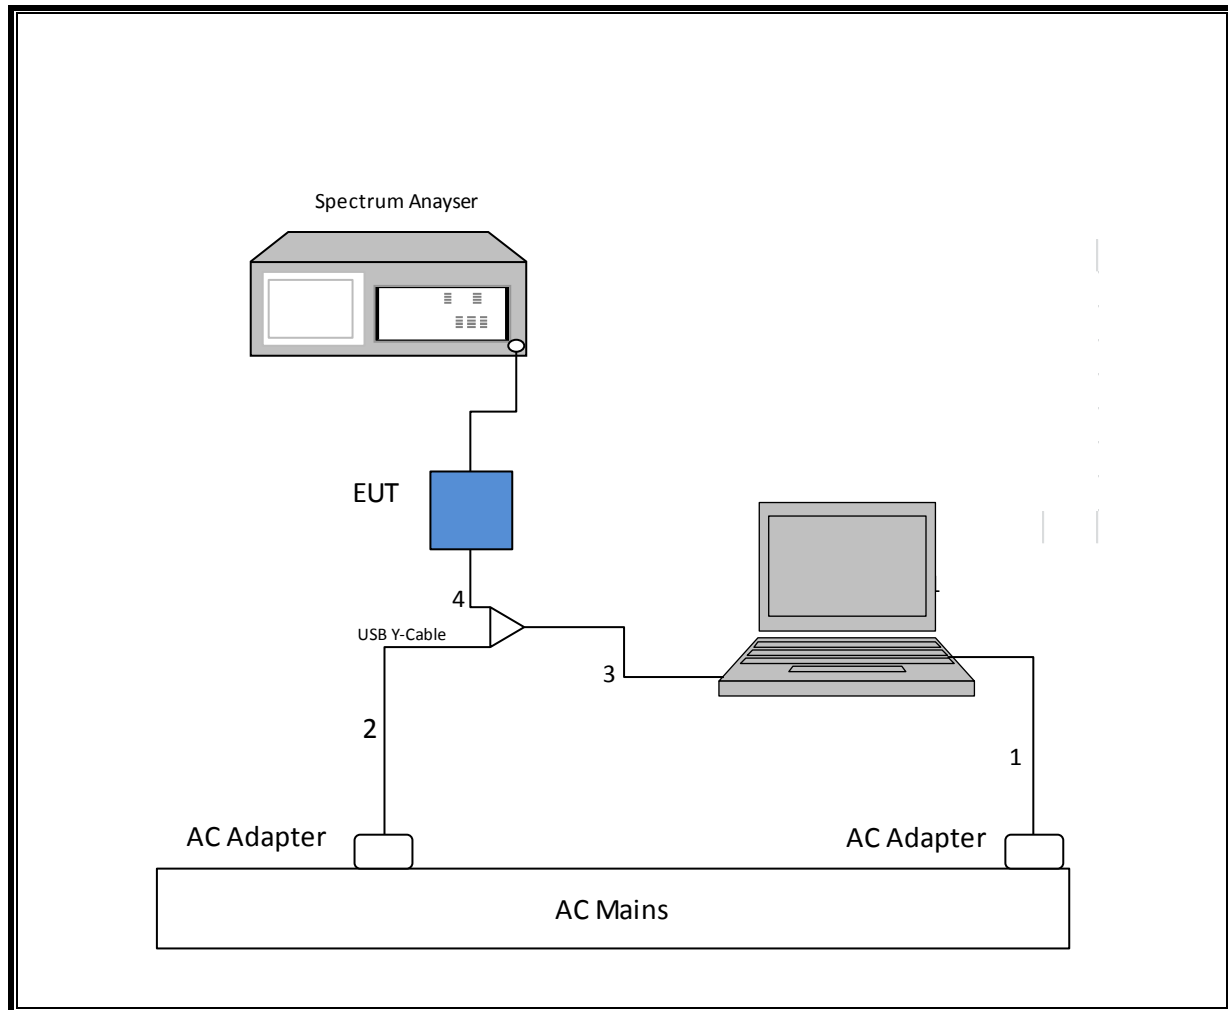

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014	
Conducted Software	UL	UL EMC	Ver 2.2, March 31, 2015	
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	341	02/20/16
Antenna, Horn 1-18GHz	ETS Lindgren	3117	120	03/26/16
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	122	02/13/16
Amplifier, 10KHz to 1GHz,	Sonoma	310N	173	06/09/16
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800 -25-S-42	742	01/31/16
Amplifier, 26 - 40GHz	Miteq	NSP4000-SP2	88	4/7/2016
Filter, HPF 3.0GHz	Micro-Tronics	HPM17543	427	01/31/16
Filter, LPF 5.0GHz	Micro-Tronics	LPS17541	421	1/31/2016
Filter, HPF 6GHz HPF	Micro-Tronics	HPS17542	425	1/31/2016
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	89	12/17/15
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	404	04/13/16
Spectrum Analyzer, 40 GHz	Agilent	8564E	106	08/06/15
LISN, 30MHz	FCC	50/250-25-2	24	01/16/16
Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	341	02/20/16
UL EMC Software	UL	UL EMC	Rev 9.5.03	
Antenna Port Software	UL	UL RF	Ver 2.2	

7. MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r02, Section 8.1.

Output Power: KDB 558074 D01 v03r02, Section 9.2.2.2.

Power Spectral Density: KDB 558074 D01 v03r02, Section 10.3.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r02, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r02, Section 12.1.

Band-edge: KDB 558074 D01 v03r02, Section 13.2.

8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.



ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX	100.000	100.00	1.000	100.00%	0.00	0.010
802.11g 1TX	100.000	100.00	1.000	100.00%	0.00	0.010
802.11n HT20 1TX	100.000	100.00	1.000	100.00%	0.00	0.010
802.11n HT40 1TX	4.751	4.801	0.990	98.96%	0.00	0.010

DUTY CYCLE PLOTS

2.4 GHz BAND

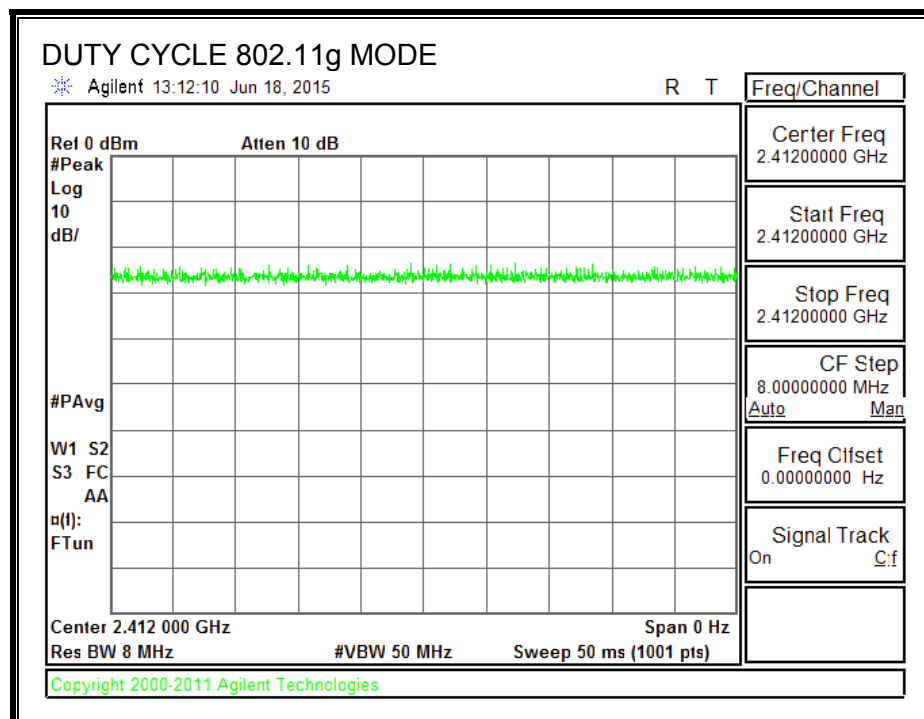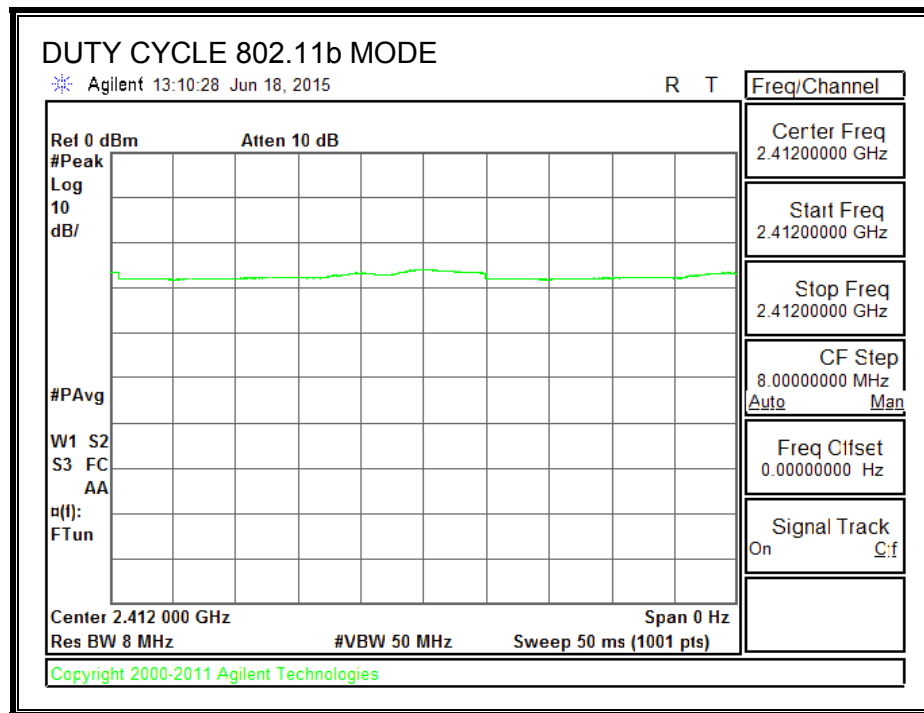

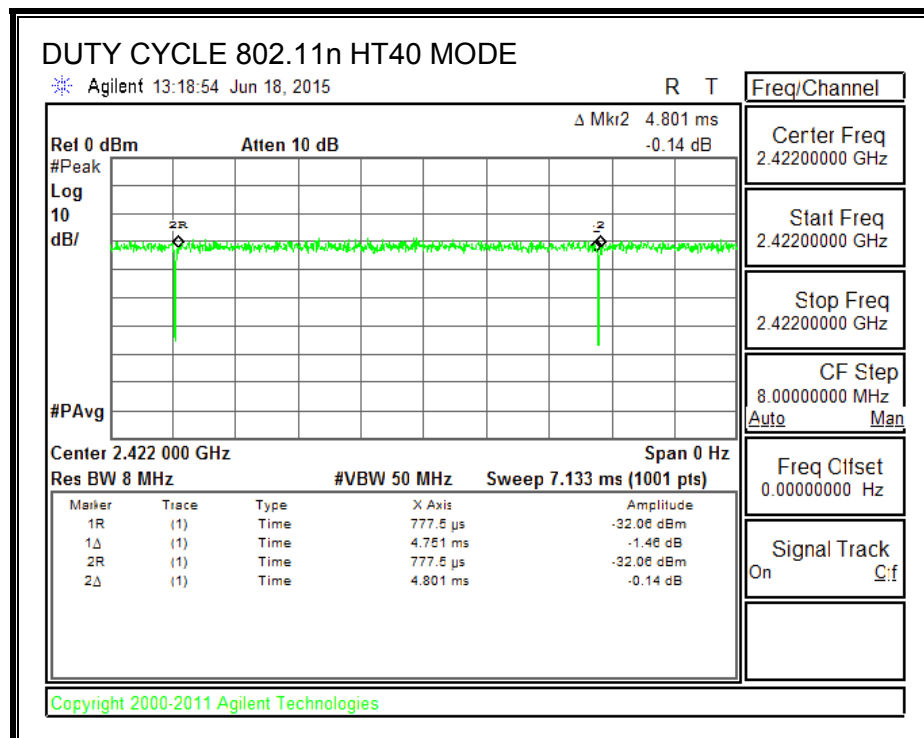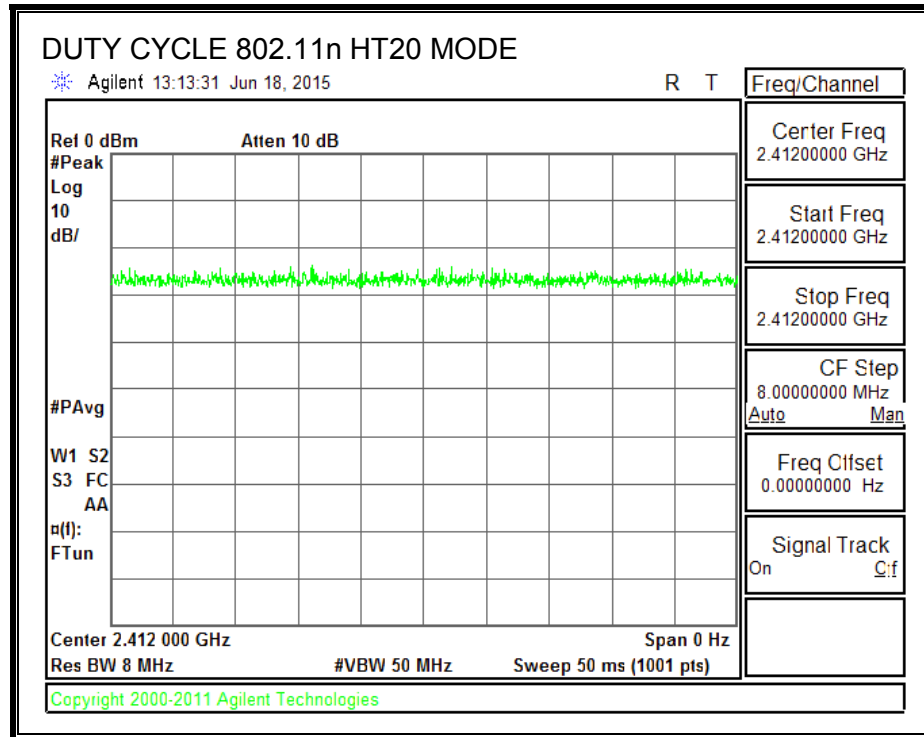

8.2. 802.11b MODE IN THE 2.4 GHz BAND ANTENNA 1

8.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	10.080	0.5
Mid	2437	10.048	0.5
High	2462	10.080	0.5

6 dB BANDWIDTH

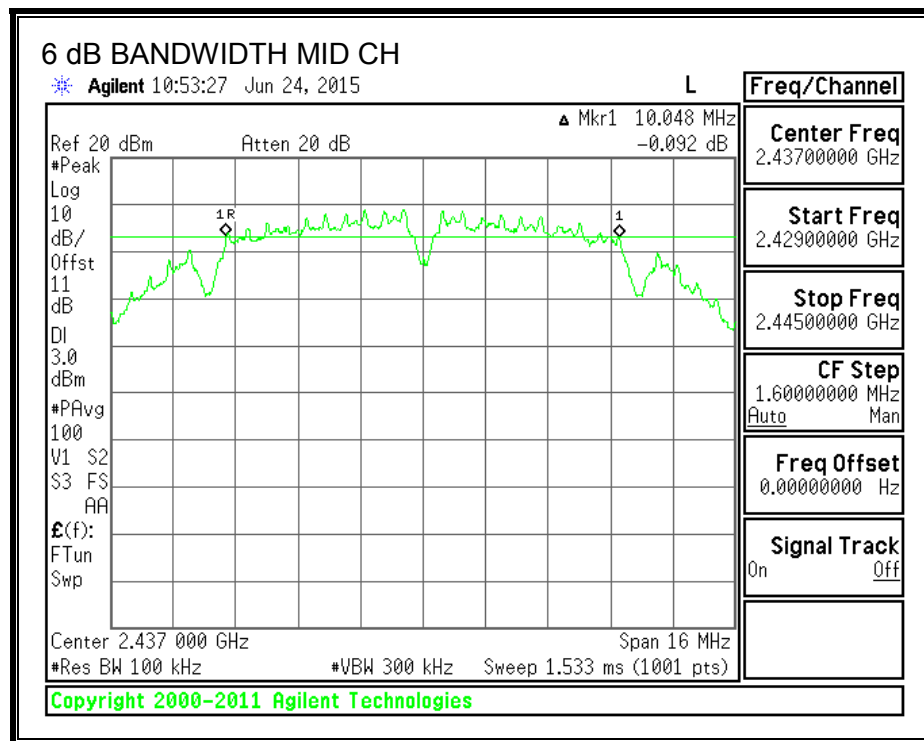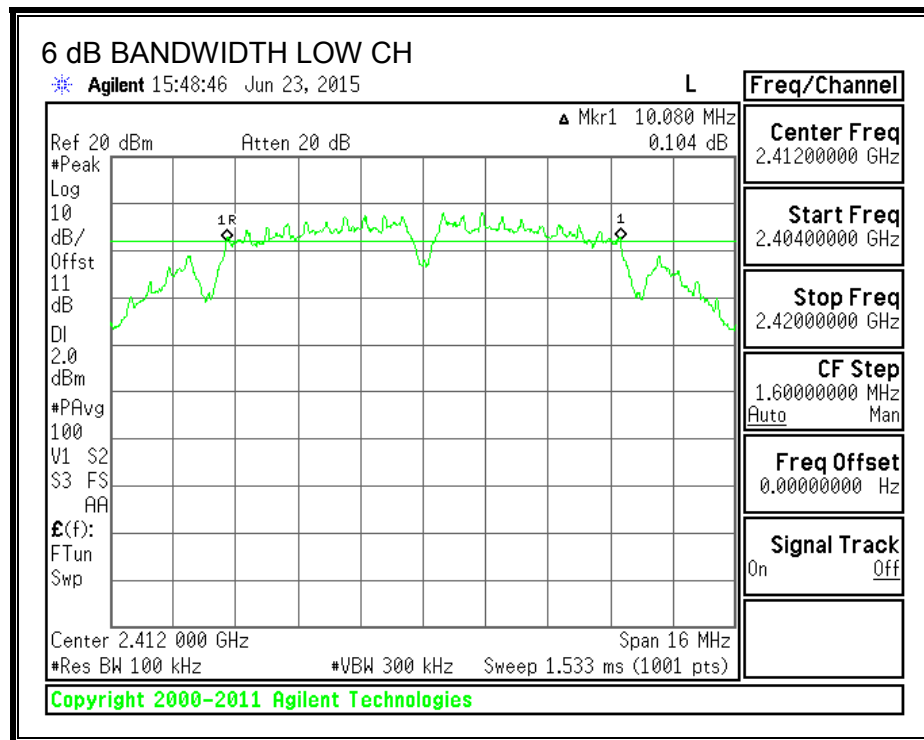

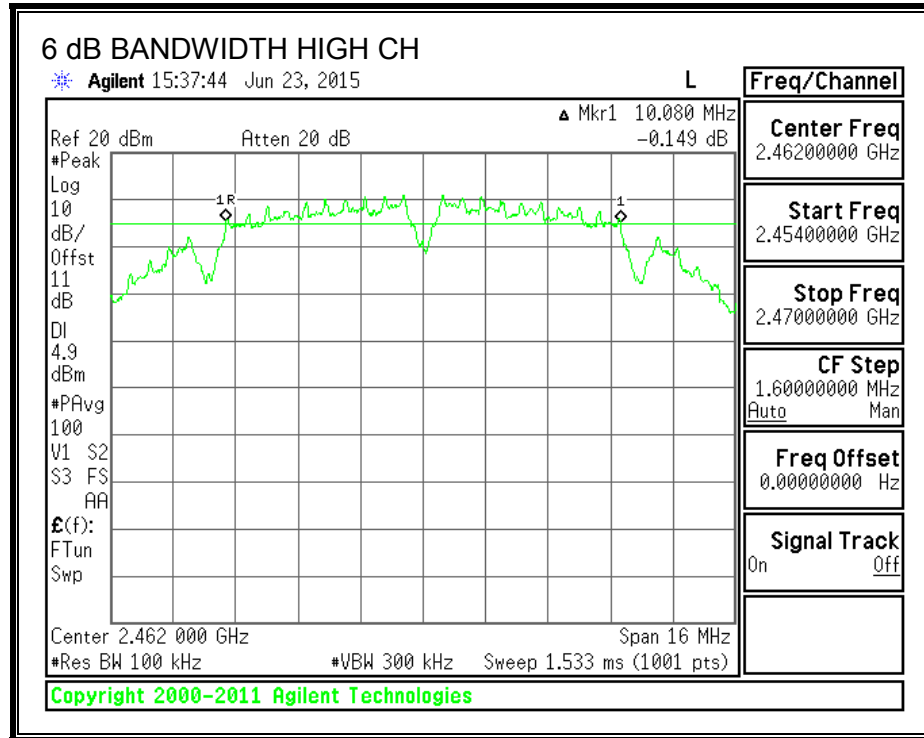

8.2.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.1169
Mid	2437	13.2754
High	2462	13.4103

99% BANDWIDTH

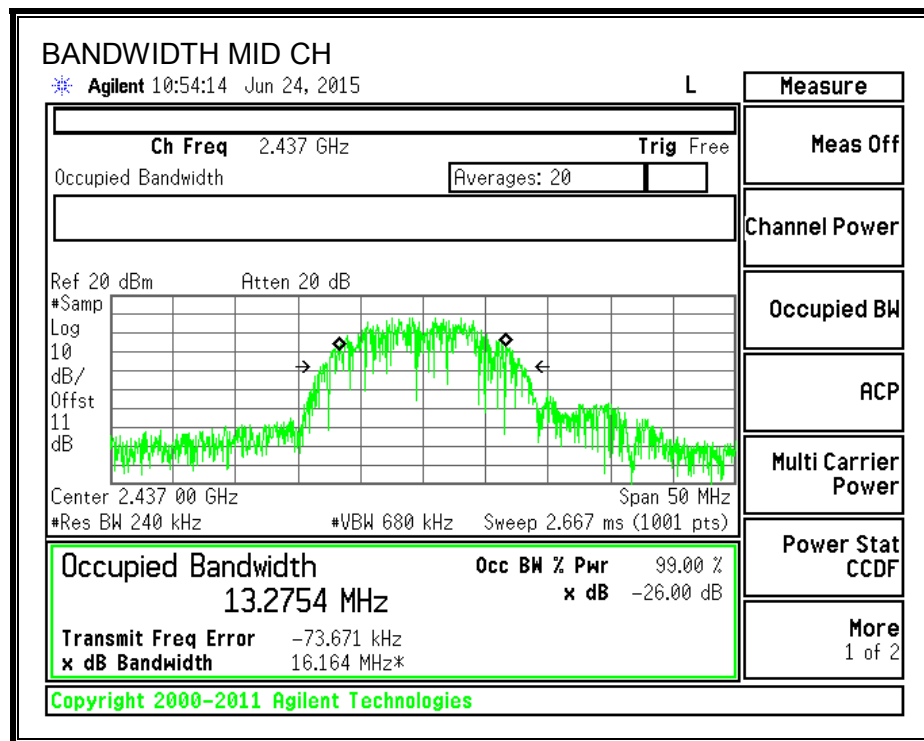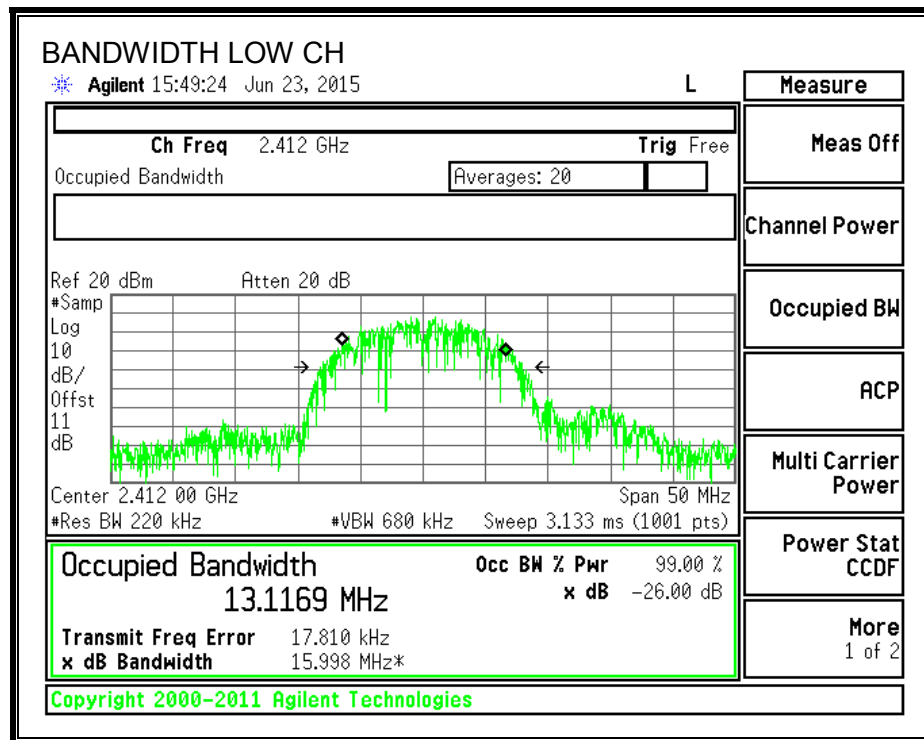

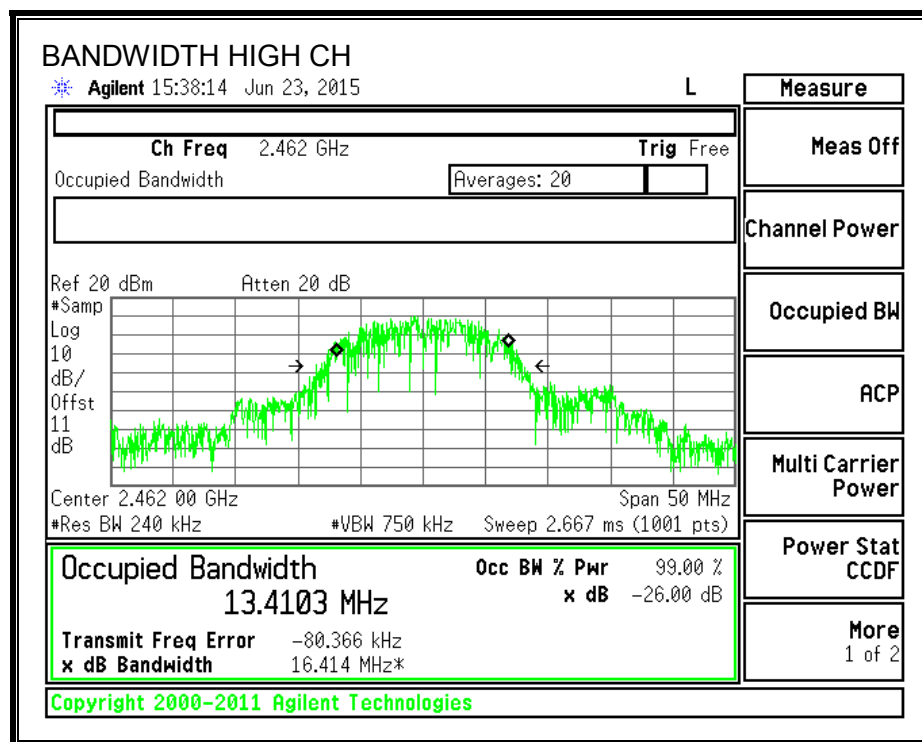

8.2.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.00	30.00	30	36	30.00
Mid	2437	3.00	30.00	30	36	30.00
High	2462	3.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	16.35	16.35	30.00	-13.65
Mid	2437	17.02	17.02	30.00	-12.98
High	2462	17	17.00	30.00	-13.00

8.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.13	8.0	-13.1
Mid	2437	-4.26	8.0	-12.3
High	2462	-4.17	8.0	-12.2

PSD, Antenna 1

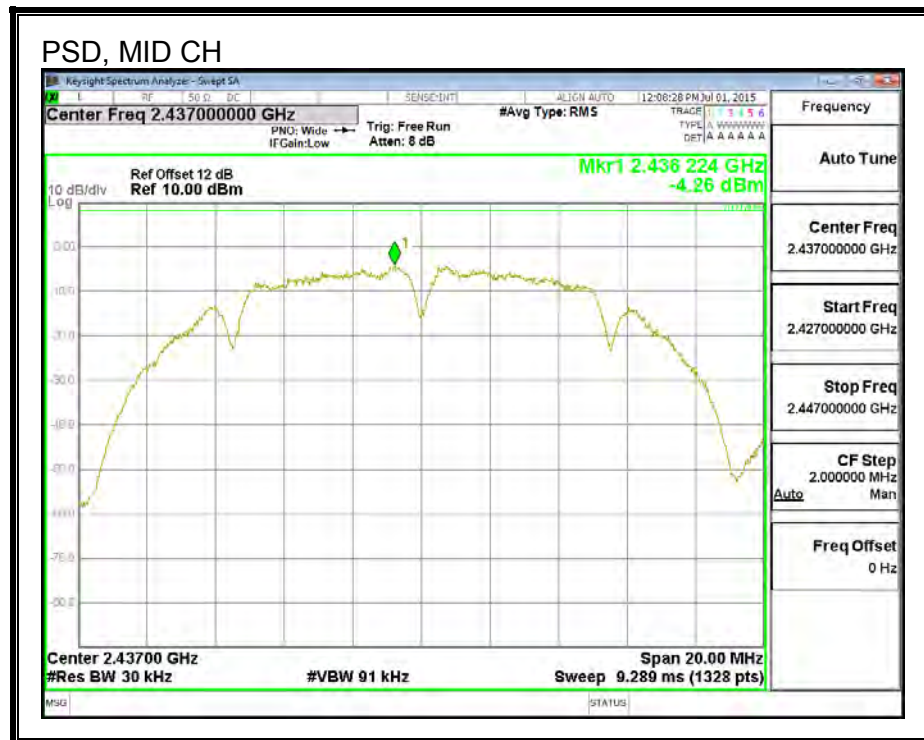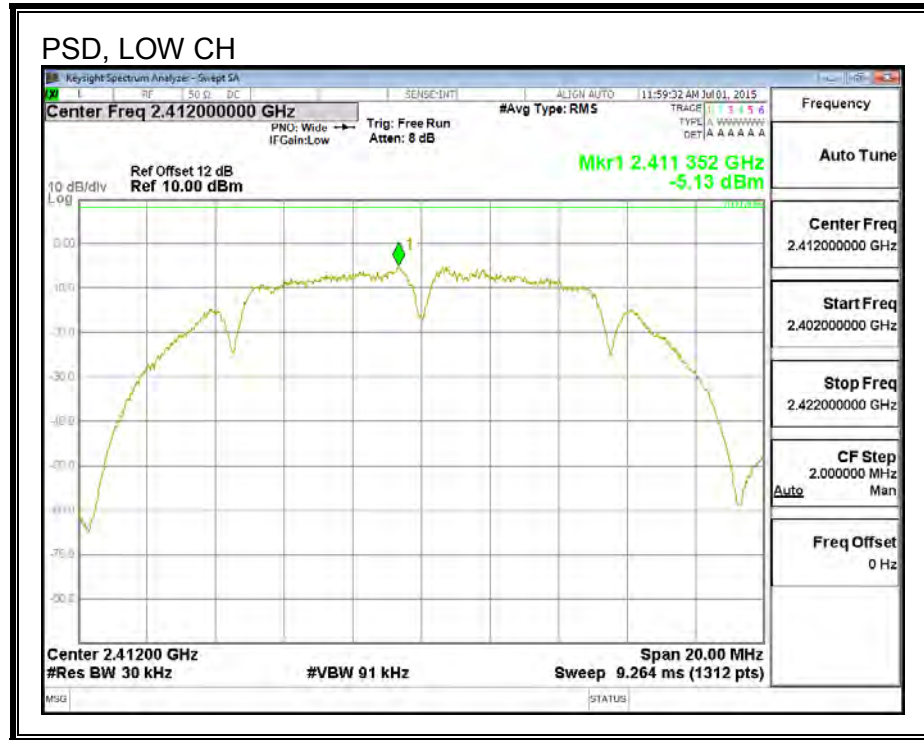

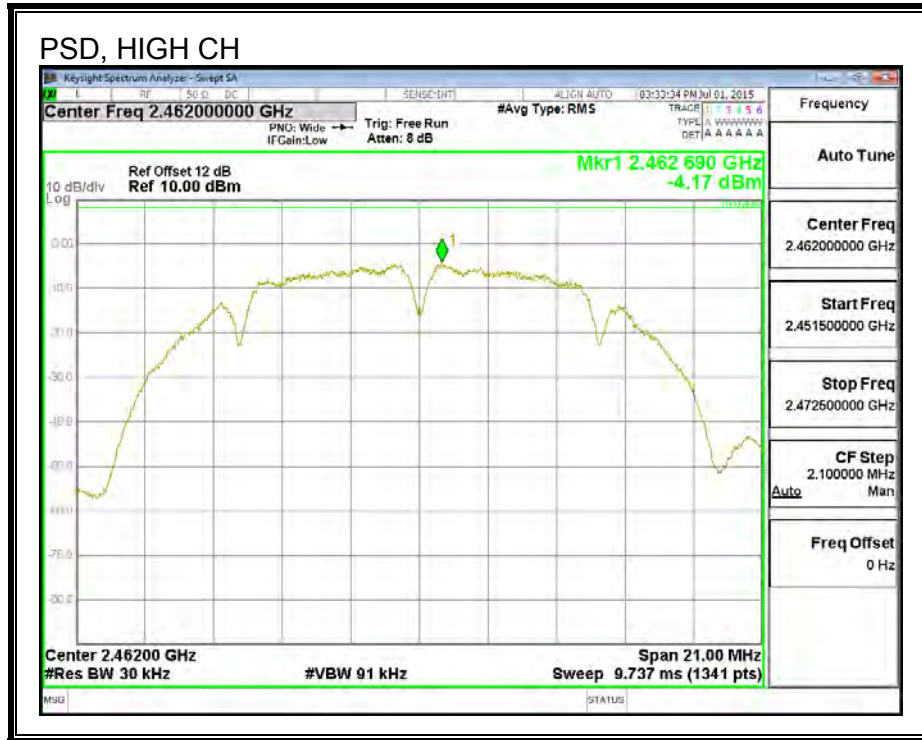

8.2.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

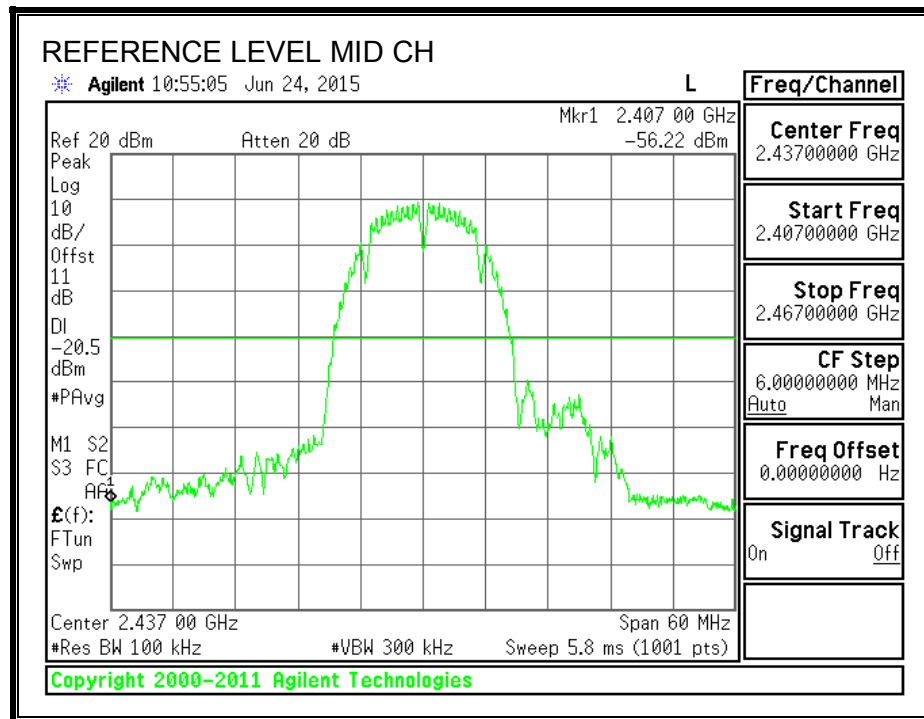


LOW CHANNEL BANDEDGE


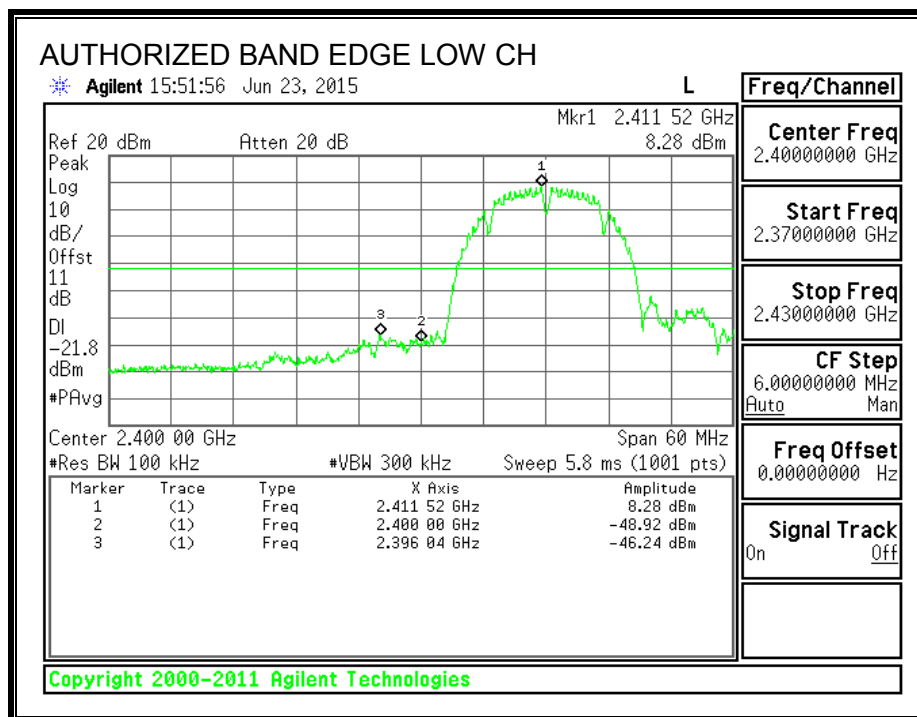


HIGH CHANNEL BANDEDGE

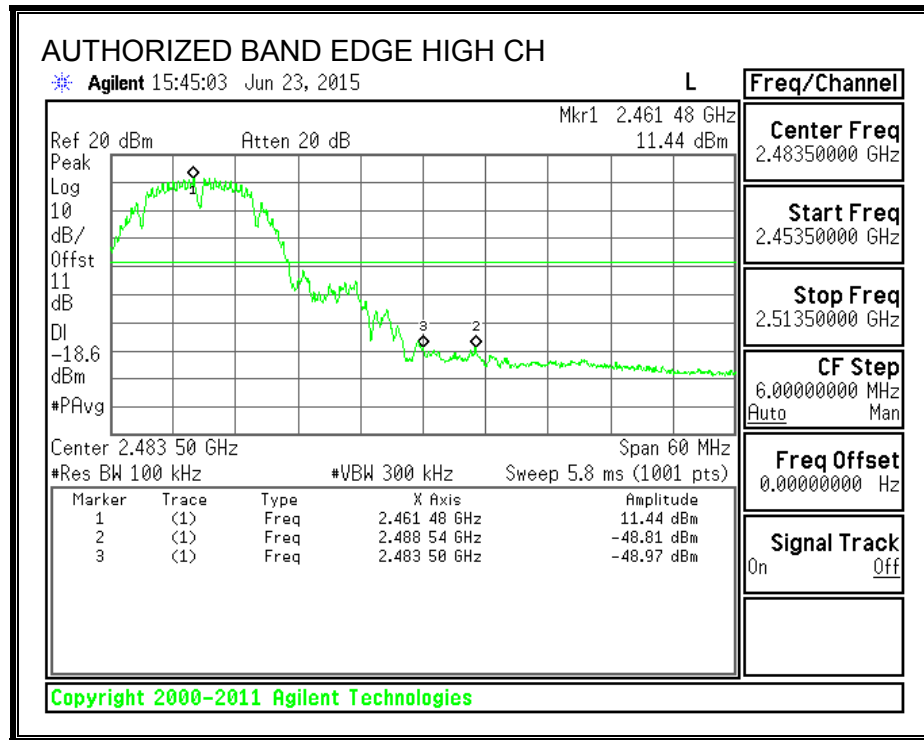

OUT-OF-BAND EMISSIONS

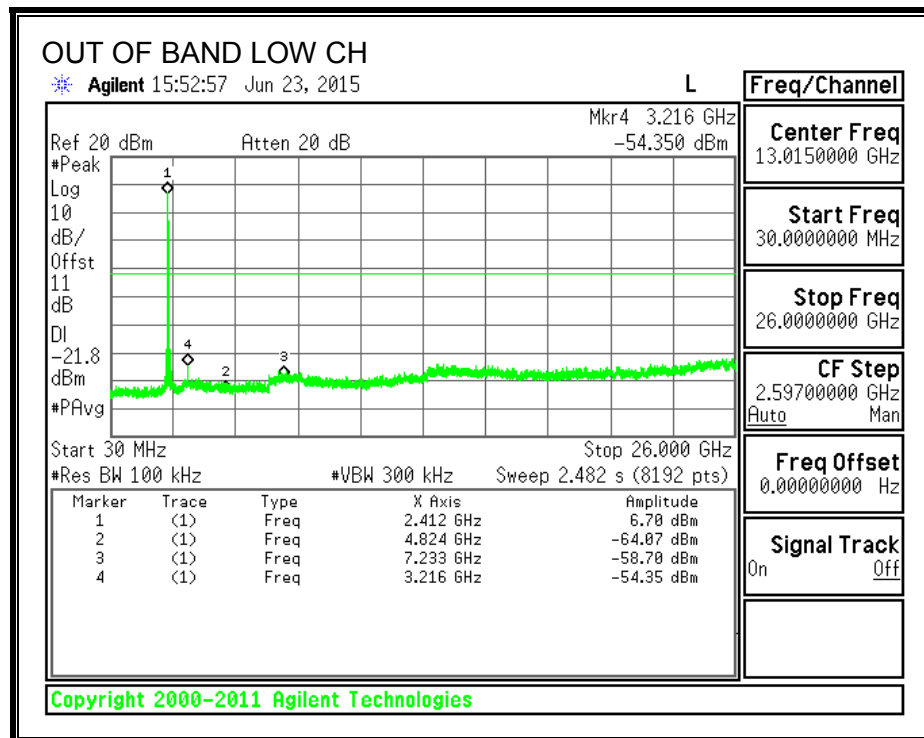

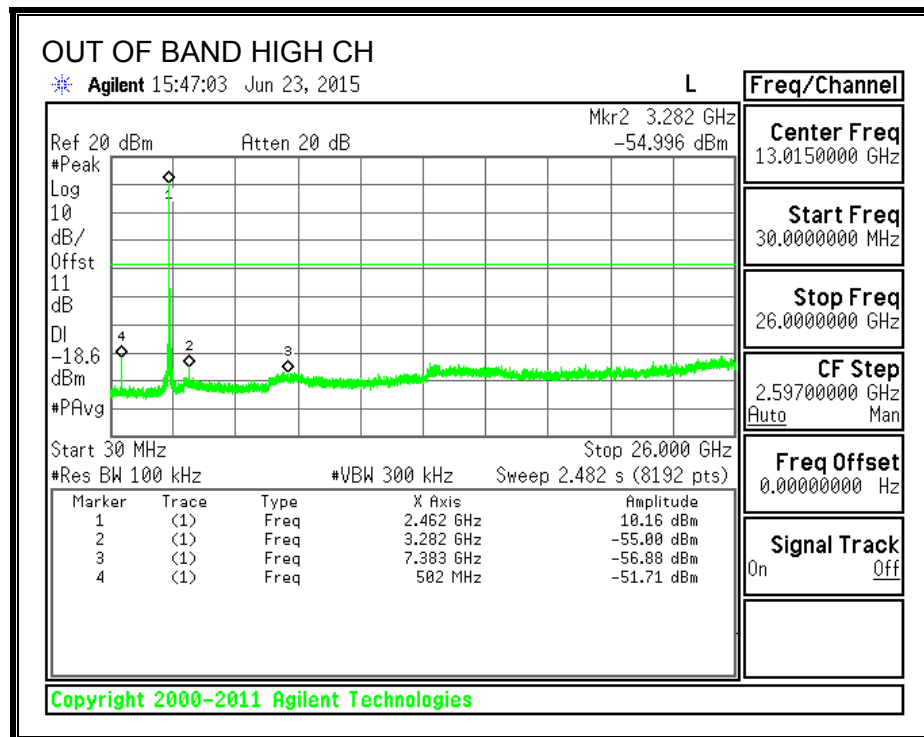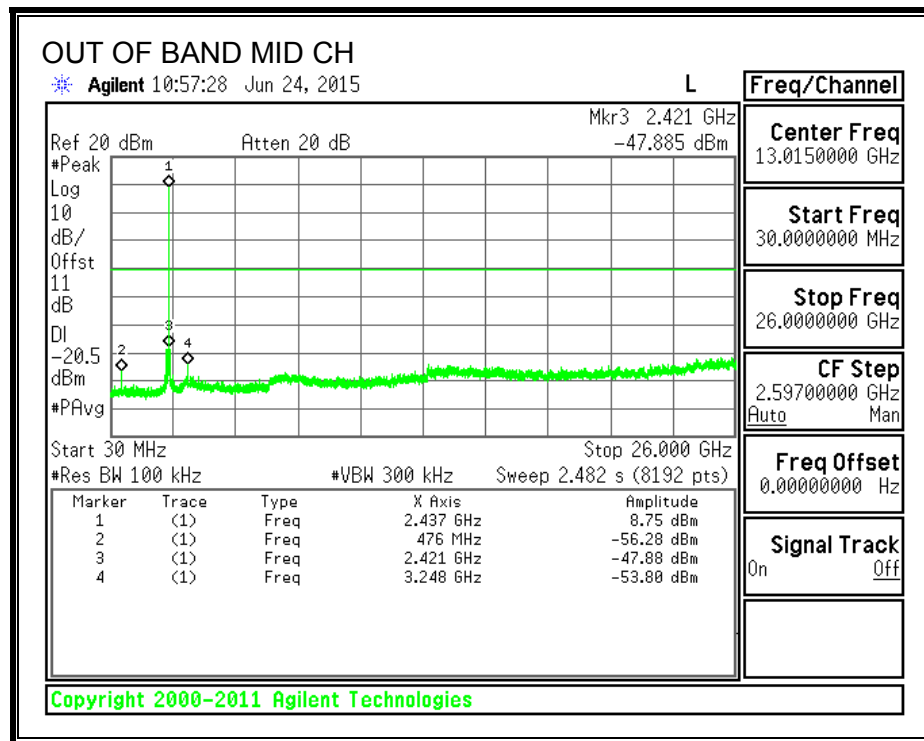

8.3. 802.11b MODE IN THE 2.4 GHz BAND ANTENNA 2

8.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	10.064	0.5
Mid	2437	10.048	0.5
High	2462	10.080	0.5

6 dB BANDWIDTH

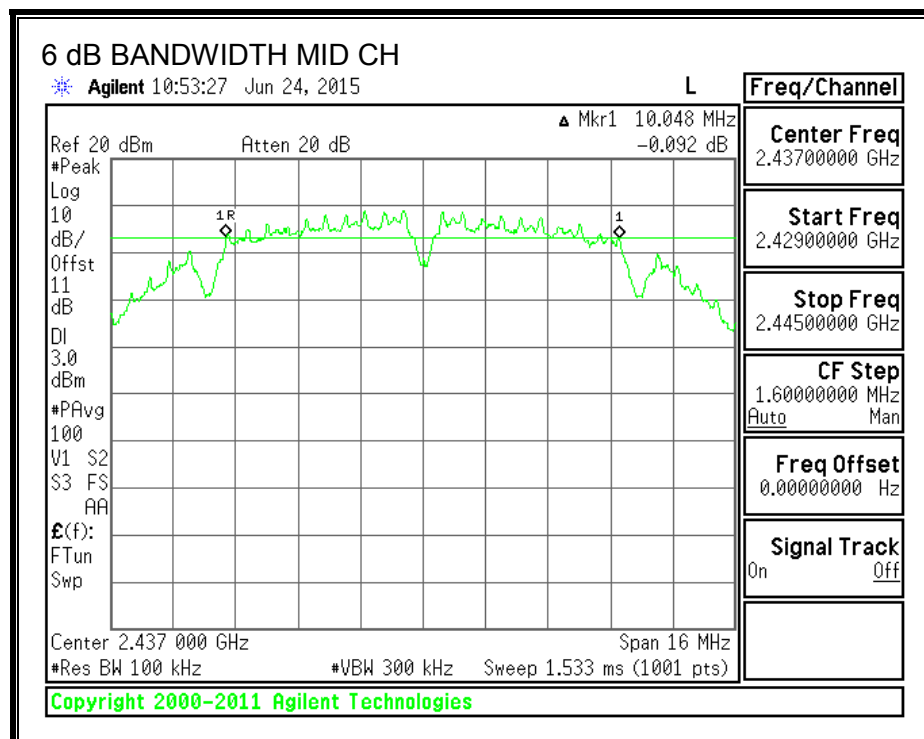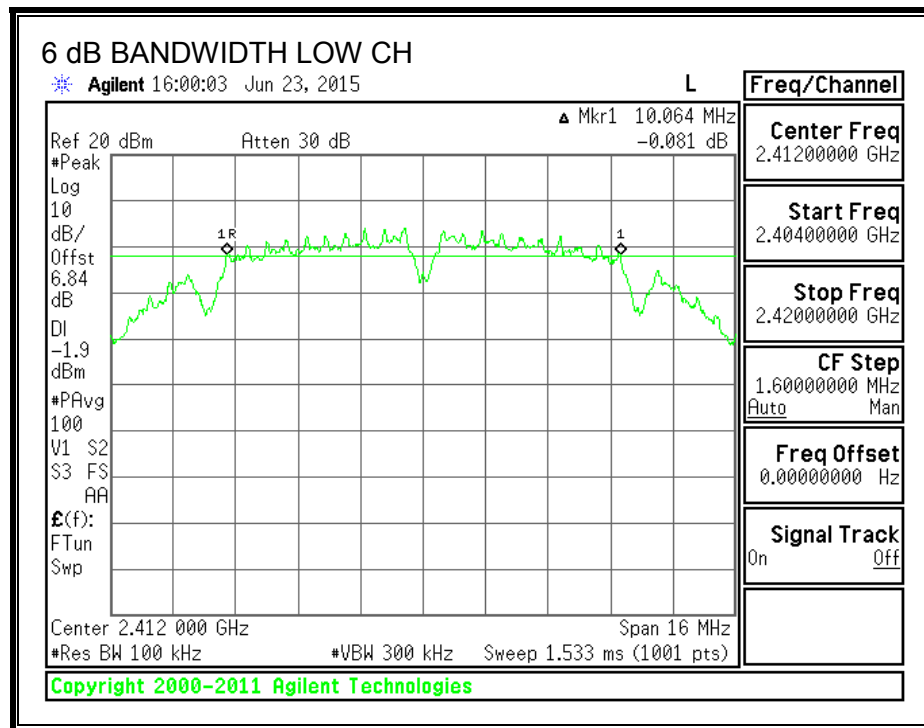

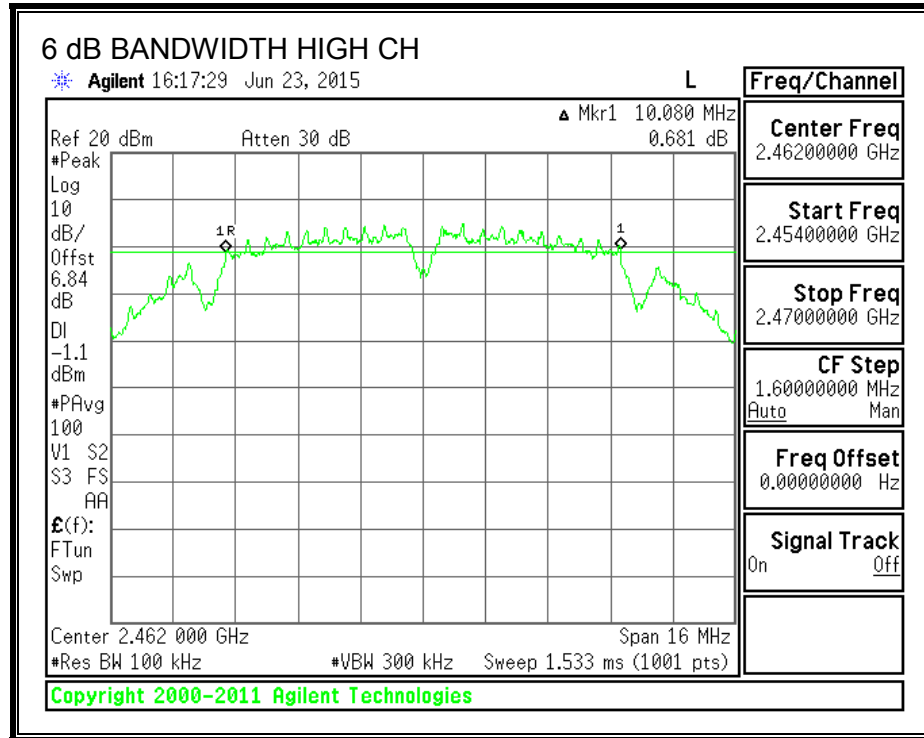

8.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.2355
Mid	2437	13.2754
High	2462	13.2301

99% BANDWIDTH

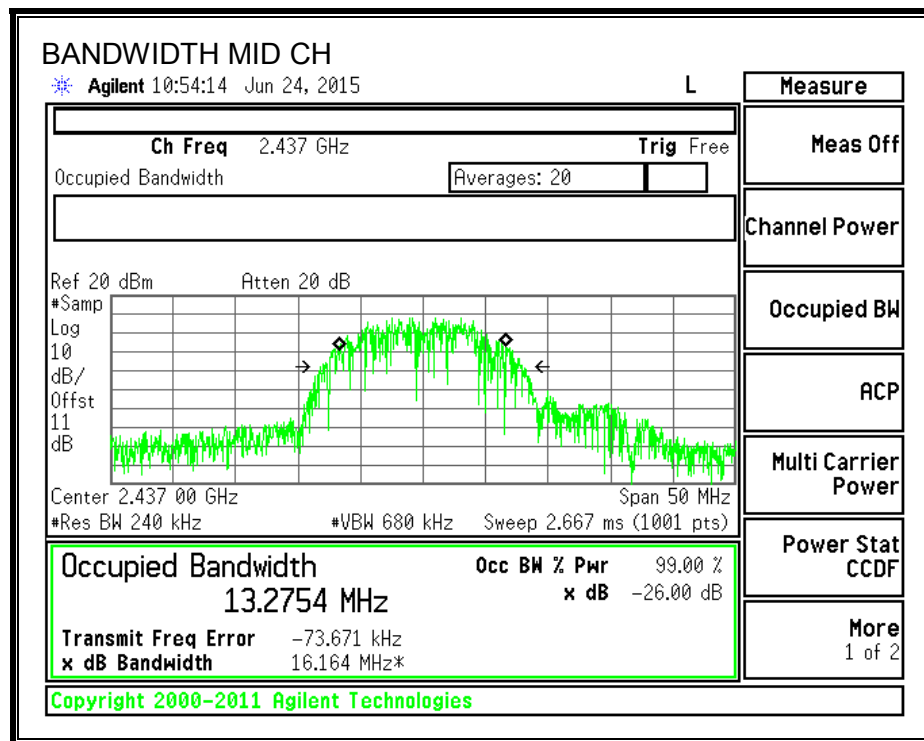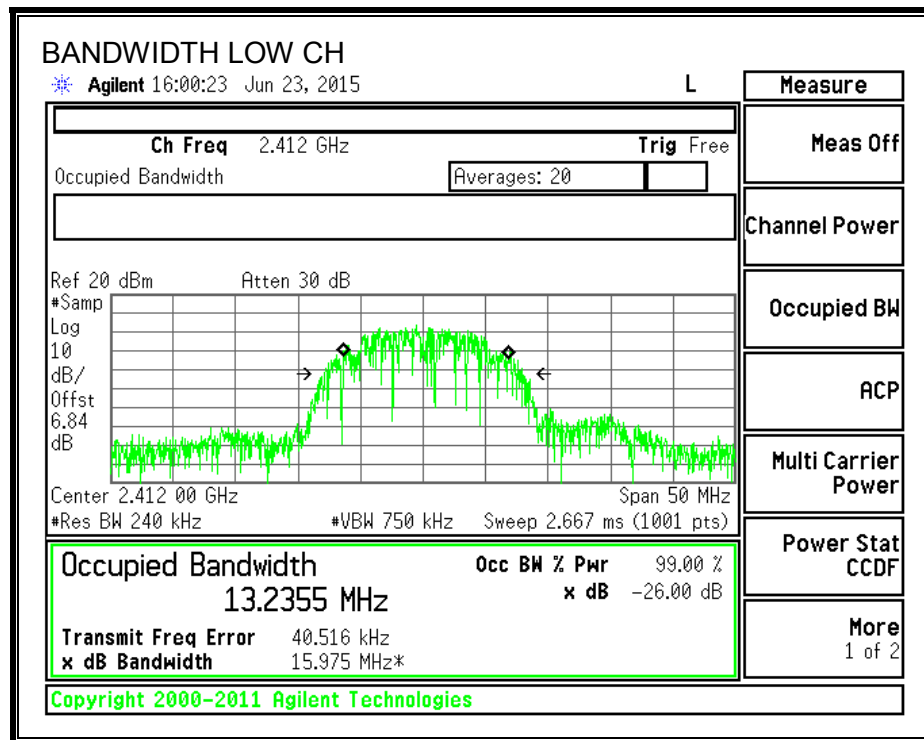

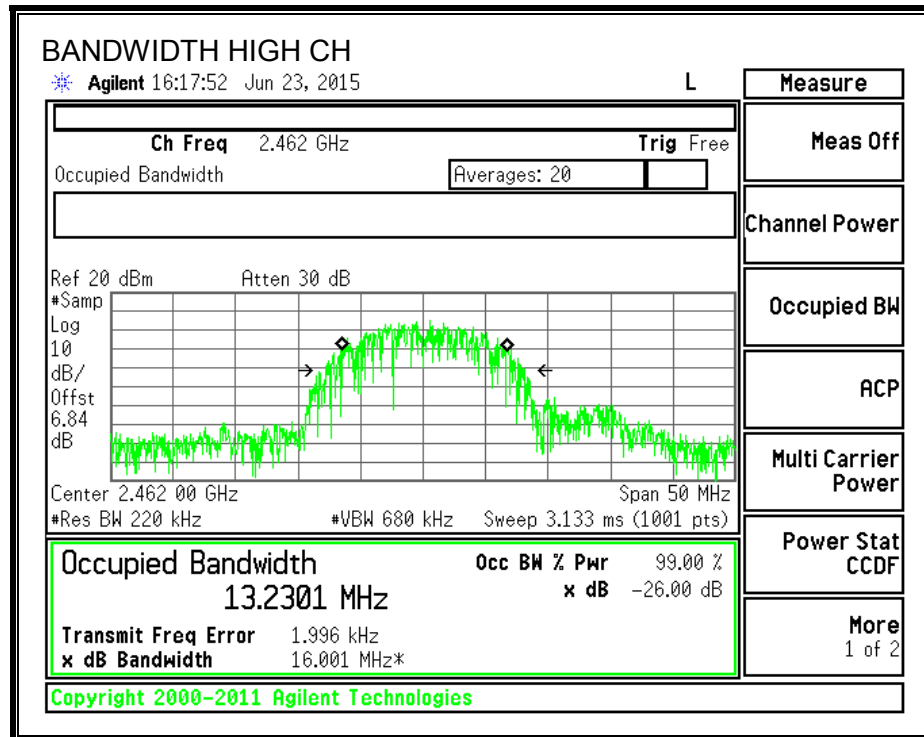

8.3.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.10	30.00	30	36	30.00
Mid	2437	3.10	30.00	30	36	30.00
High	2462	3.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.74	14.74	30.00	-15.26
Mid	2437	15.48	15.48	30.00	-14.52
High	2462	15.44	15.44	30.00	-14.56

8.3.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.90	8.0	-14.9
Mid	2437	-5.91	8.0	-13.9
High	2462	-6.38	8.0	-14.4

PSD, Antenna 2

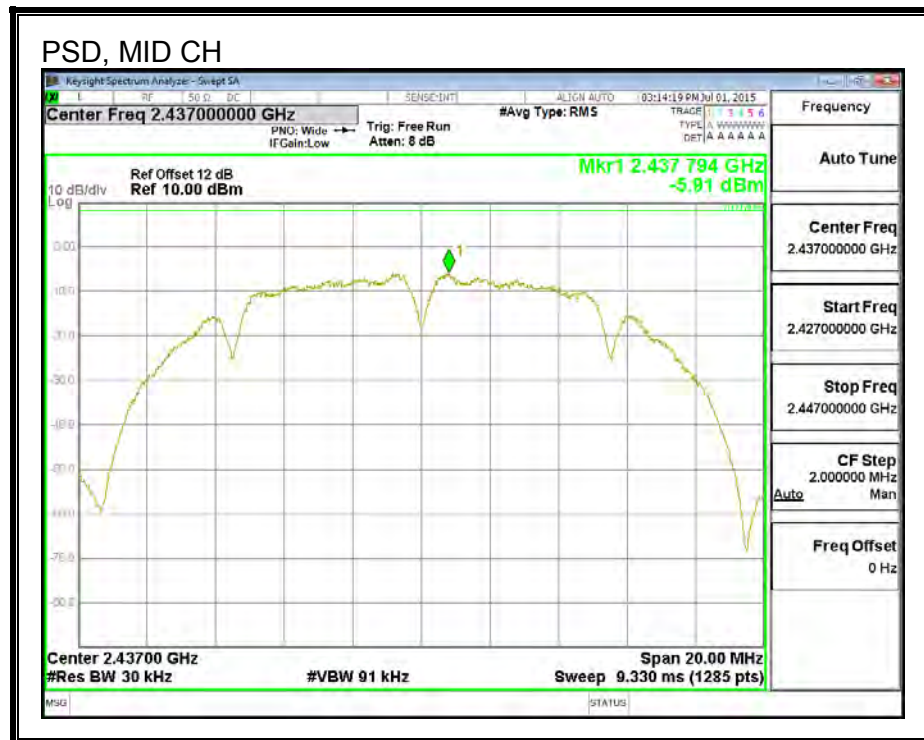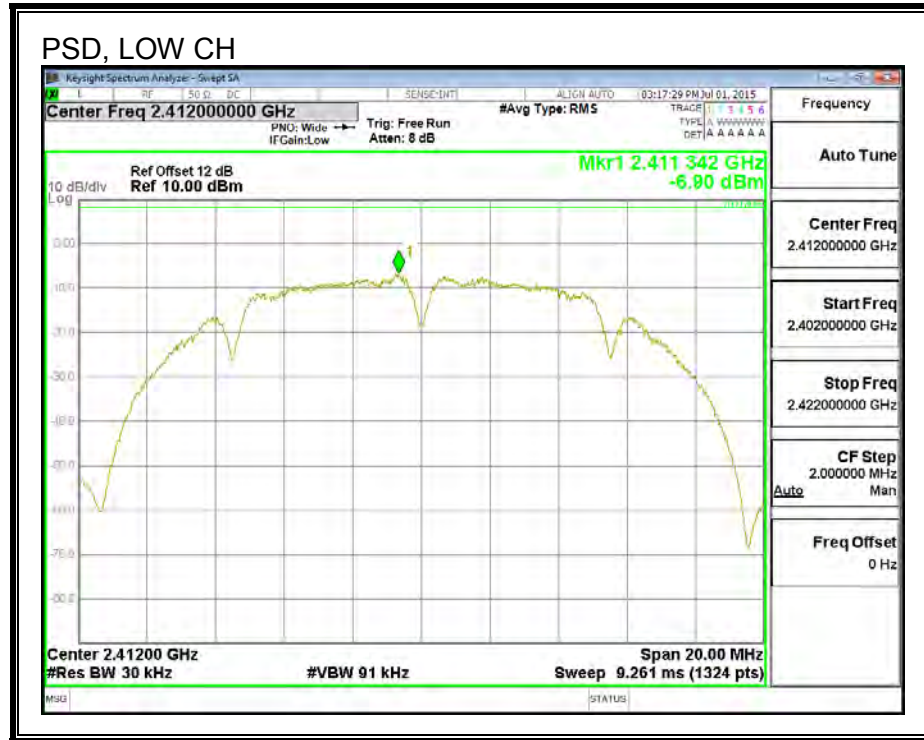

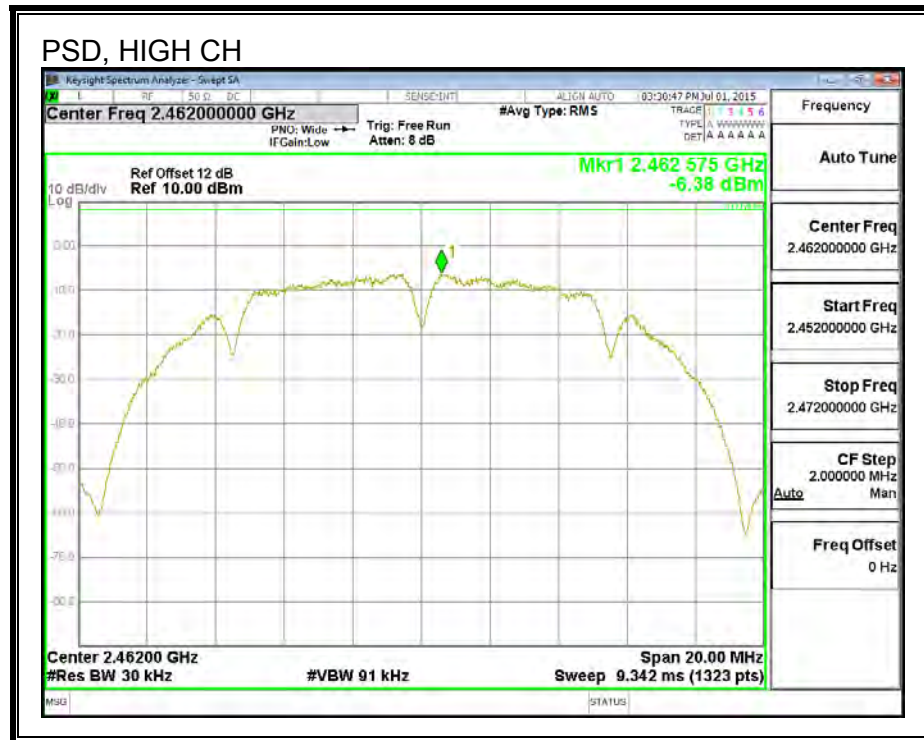

8.3.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

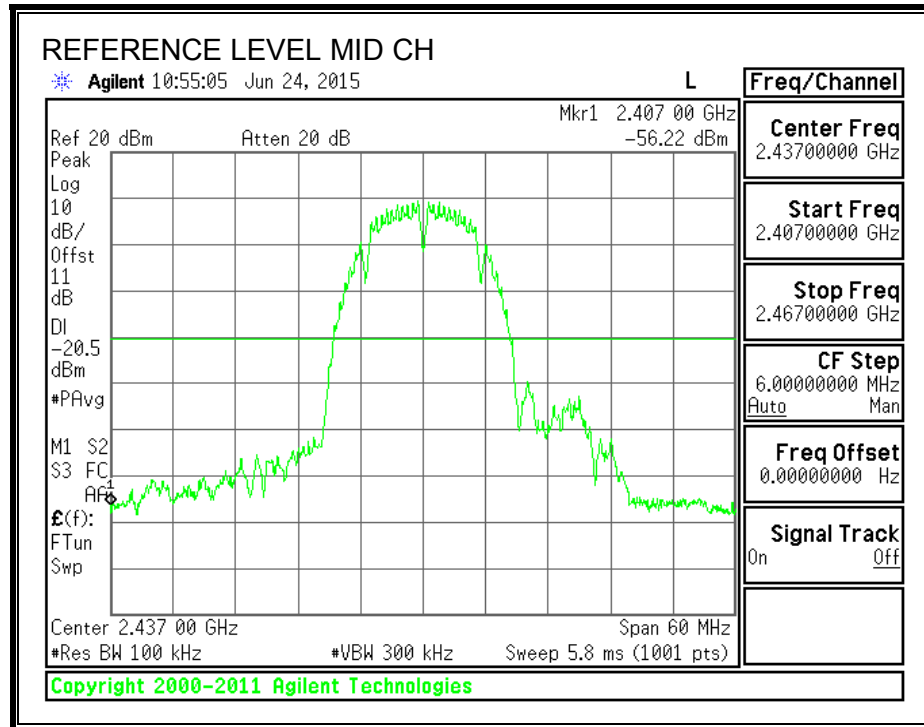


LOW CHANNEL BANDEDGE


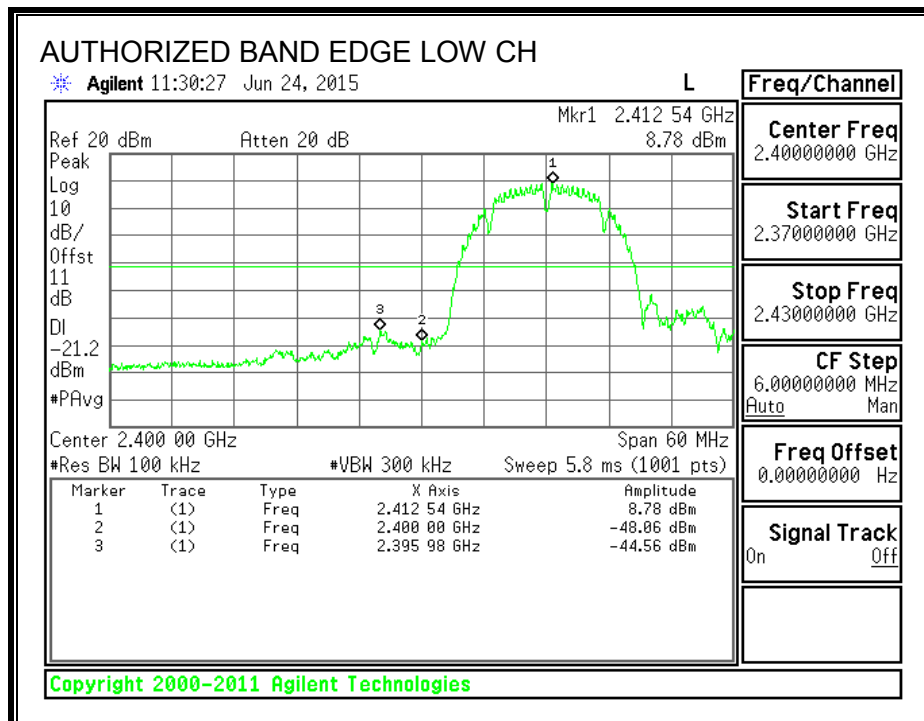


HIGH CHANNEL BANDEDGE

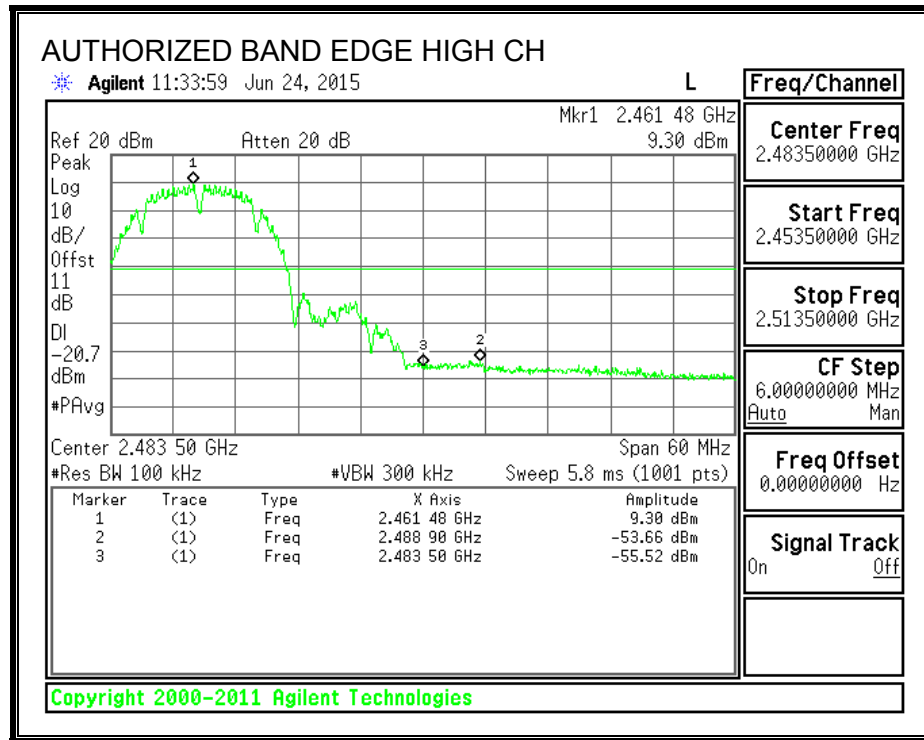

OUT-OF-BAND EMISSIONS

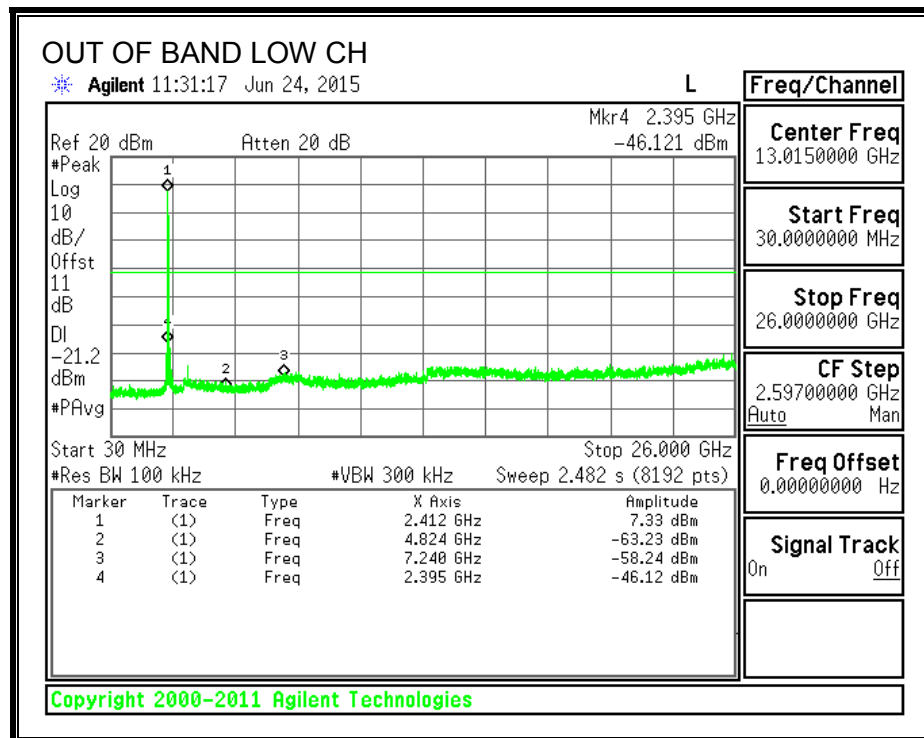

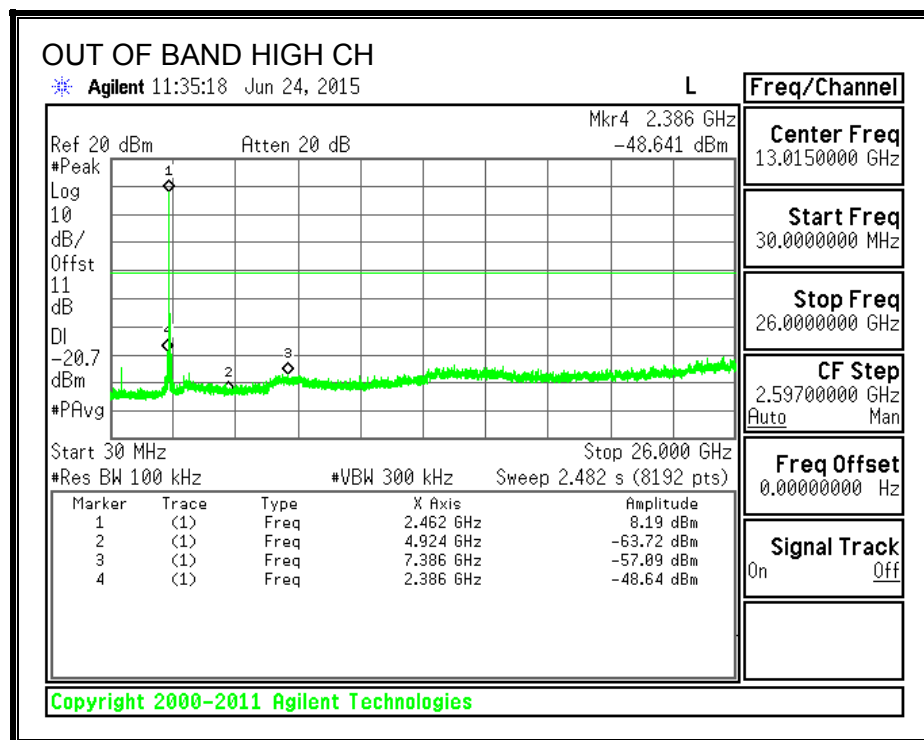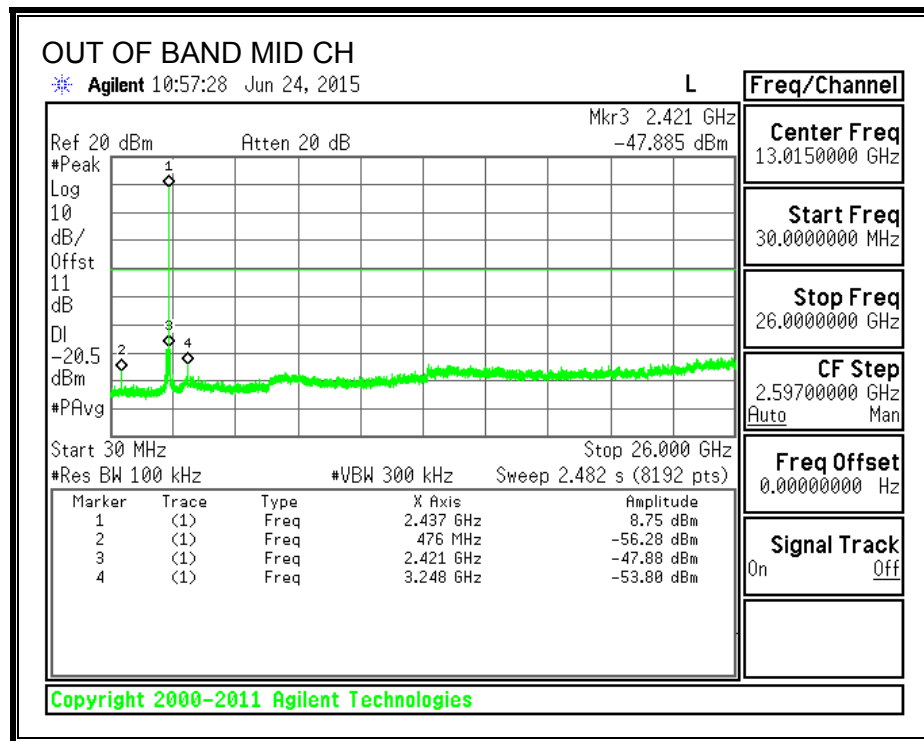

8.4. 802.11g MODE IN THE 2.4 GHz BAND ANTENNA 1

8.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.375	0.5
Mid	2437	16.450	0.5
High	2462	16.350	0.5

6 dB BANDWIDTH

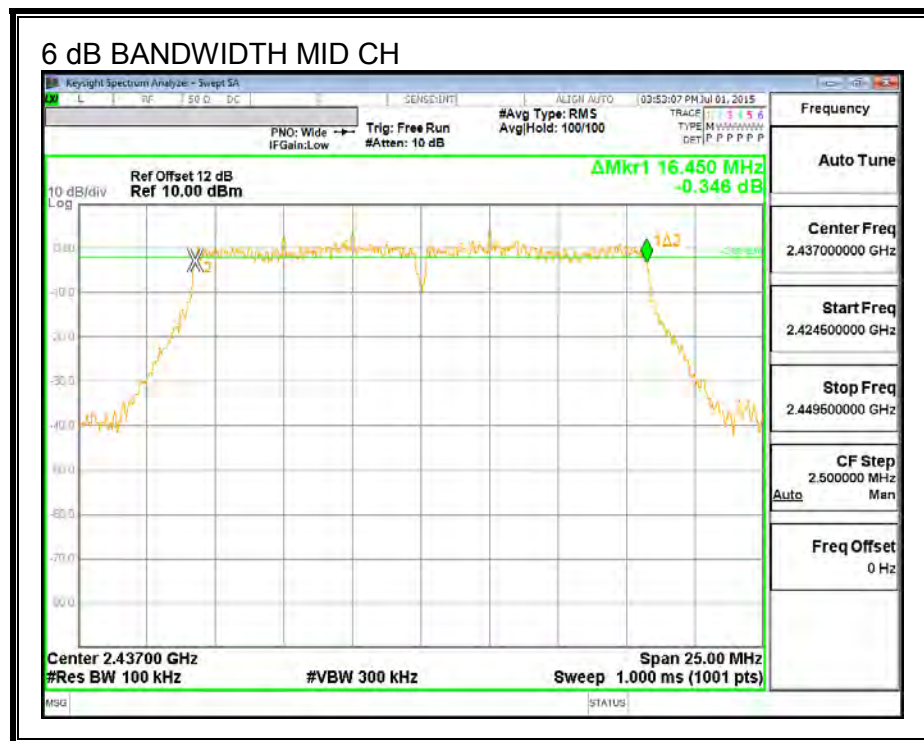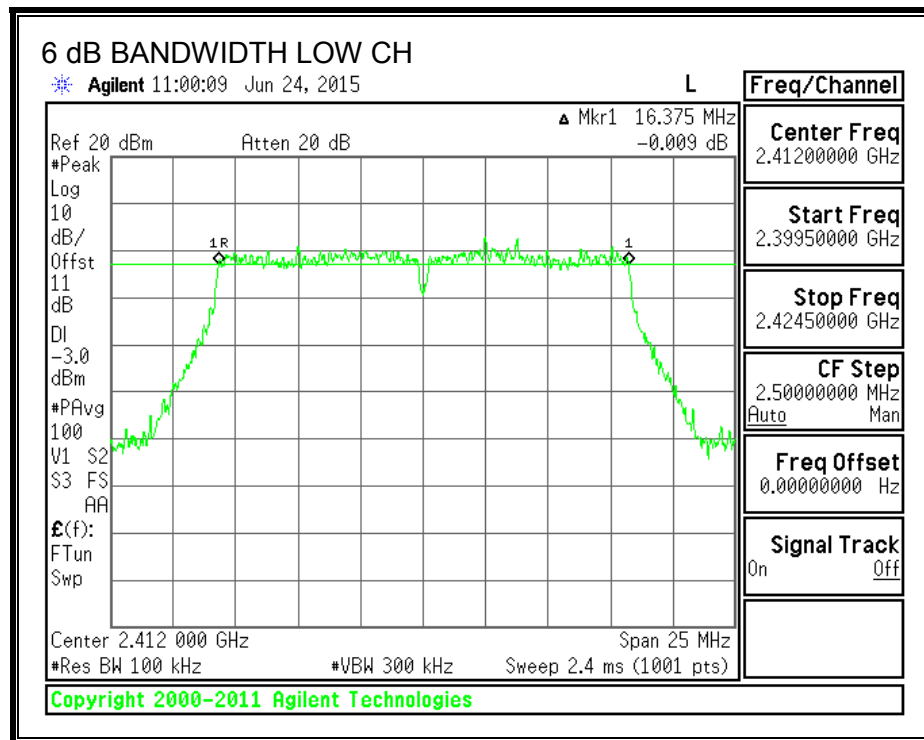

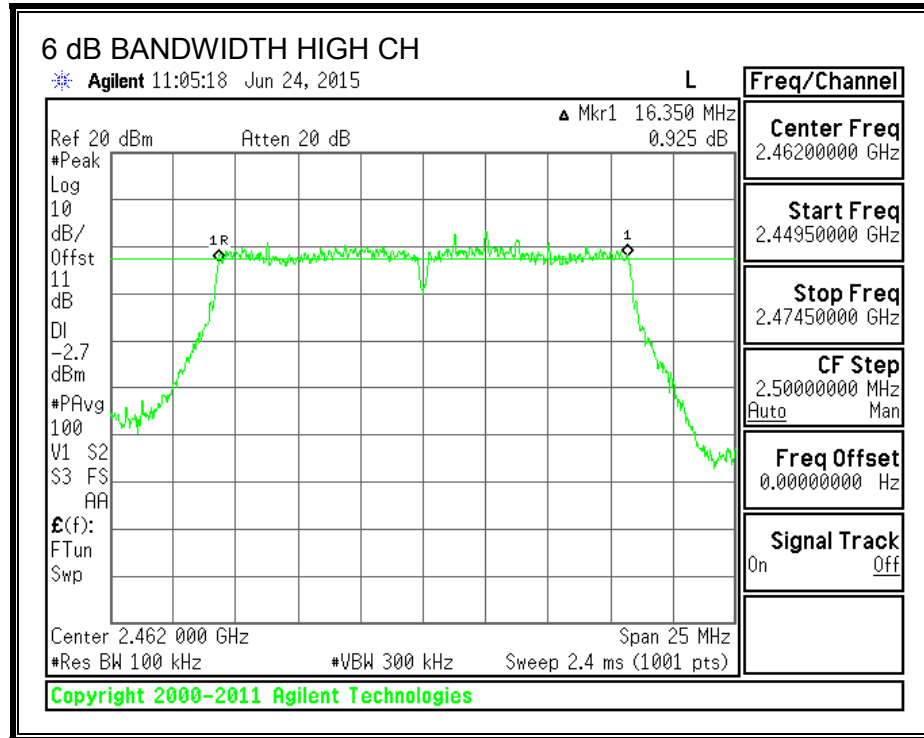

8.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4954
Mid	2437	16.5920
High	2462	16.4844

99% BANDWIDTH

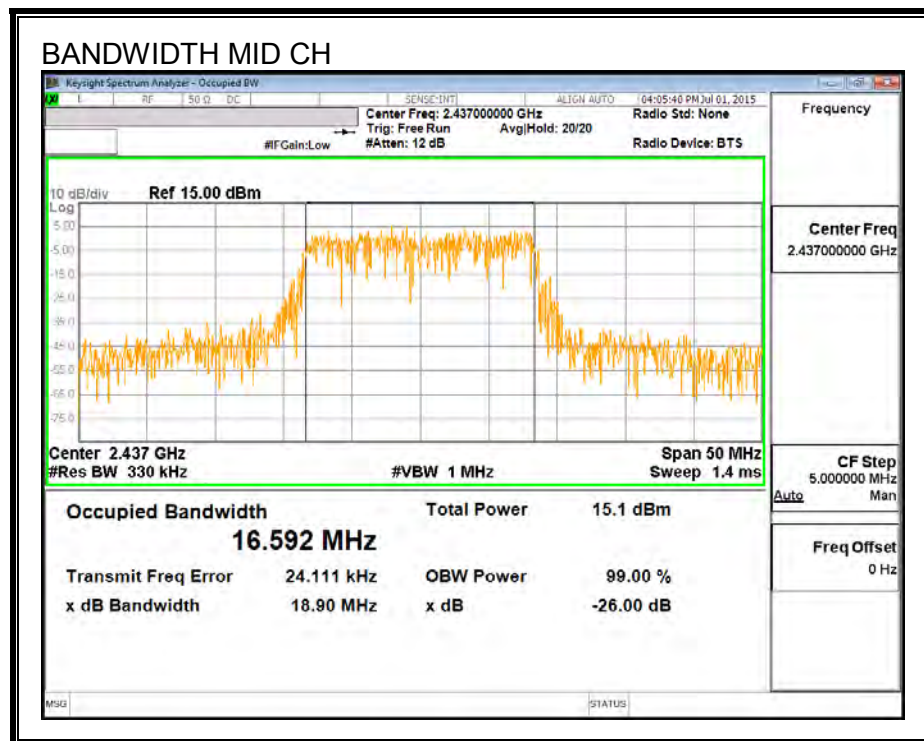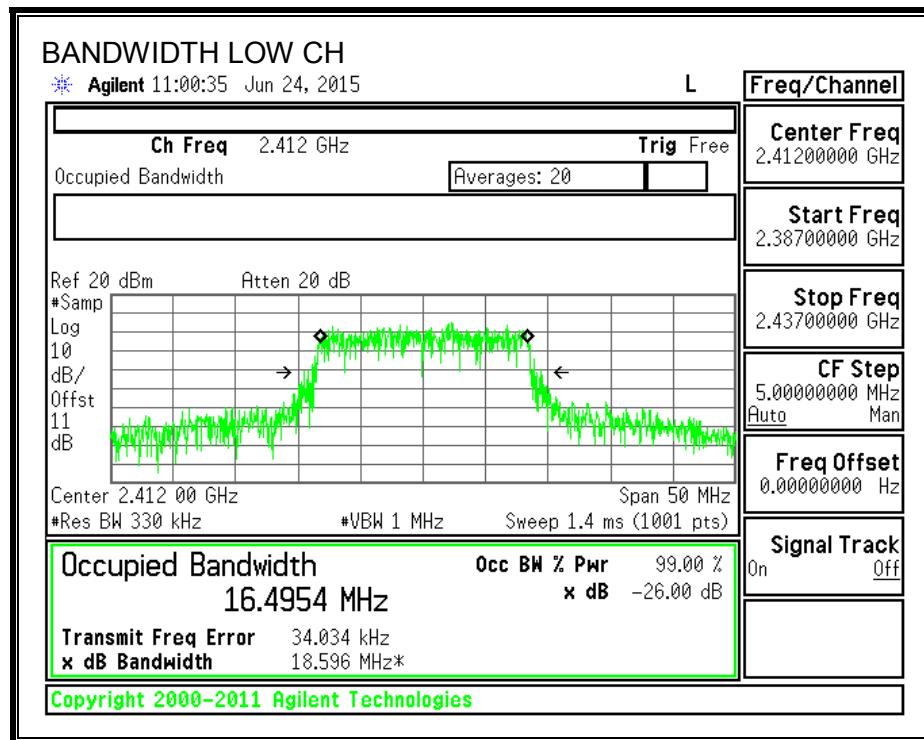

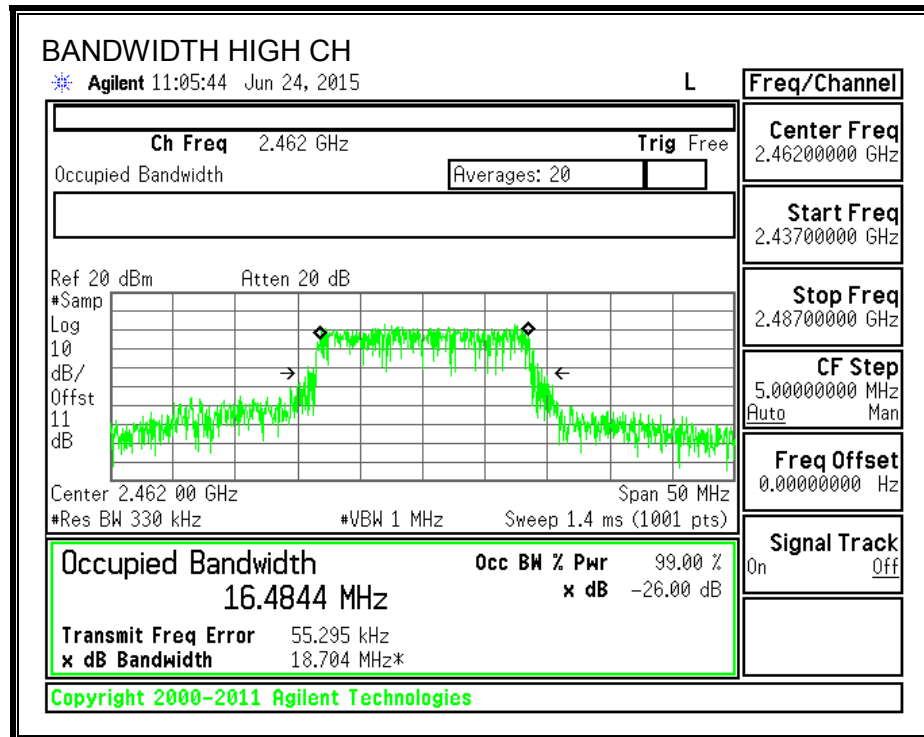

8.4.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.00	30.00	30	36	30.00
Mid	2437	3.00	30.00	30	36	30.00
High	2462	3.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	12.53	12.53	30.00	-17.47
Mid	2437	14.37	14.37	30.00	-15.63
High	2462	12.91	12.91	30.00	-17.09

8.4.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.43	8.0	-18.4
Mid	2437	-8.39	8.0	-16.4
High	2462	-10.65	8.0	-18.7

PSD, Antenna 1

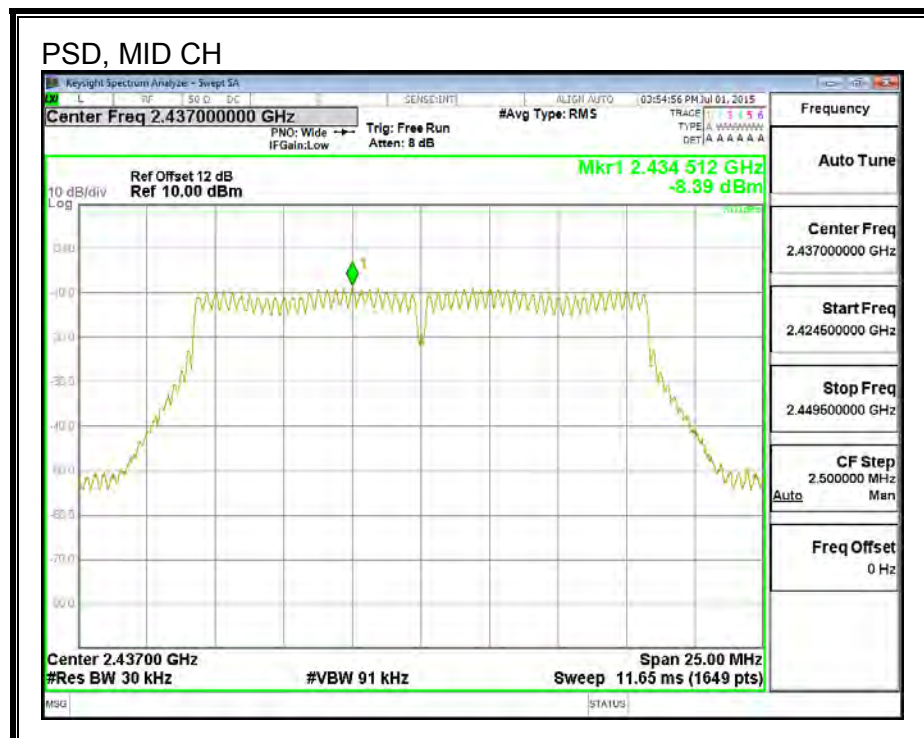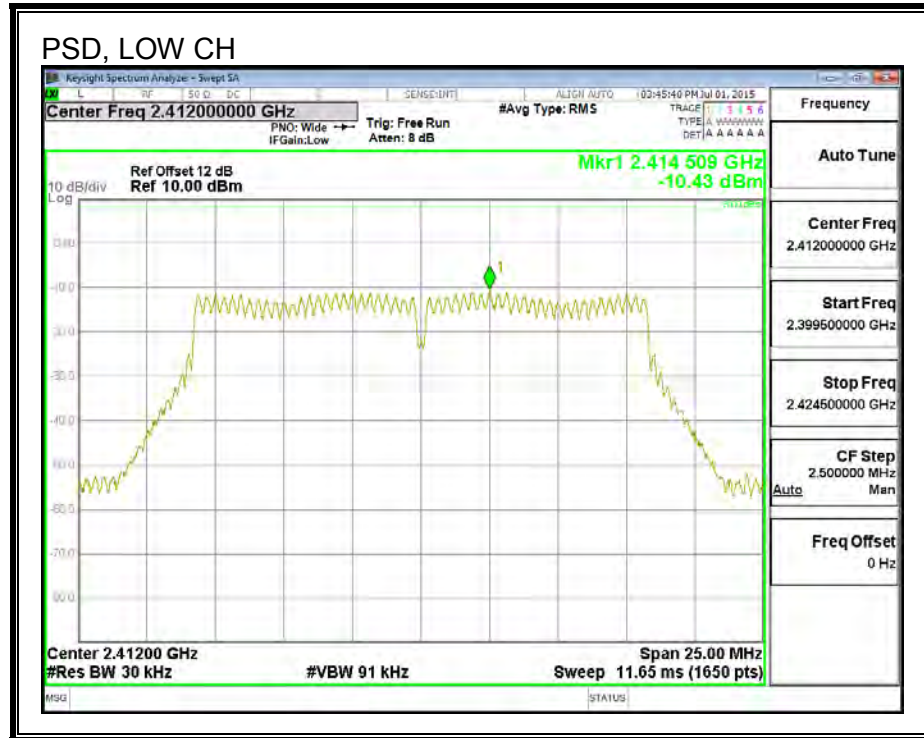

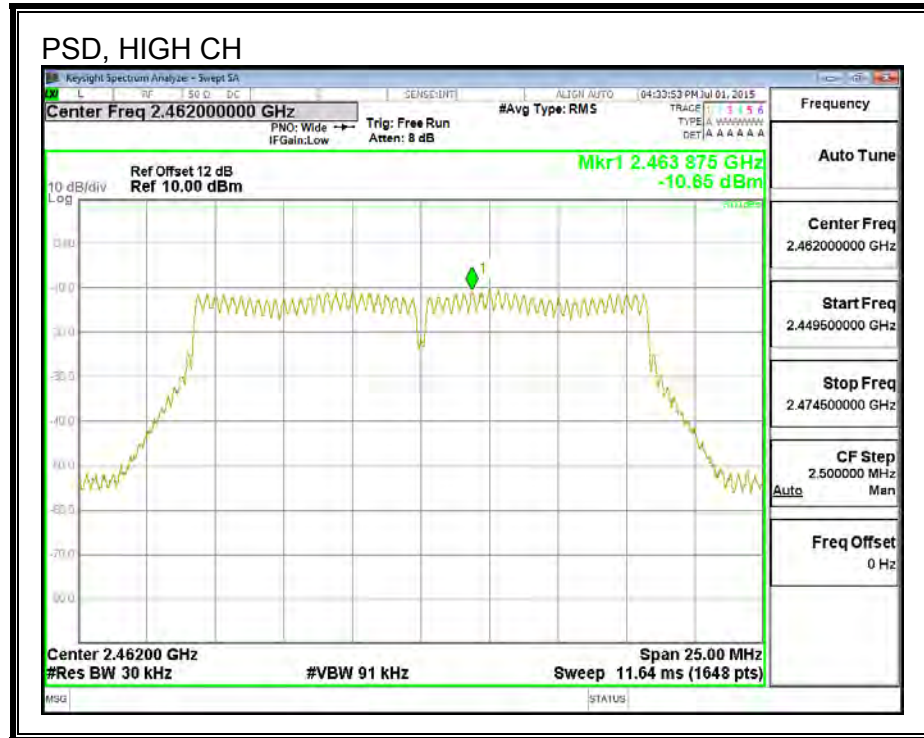

8.4.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

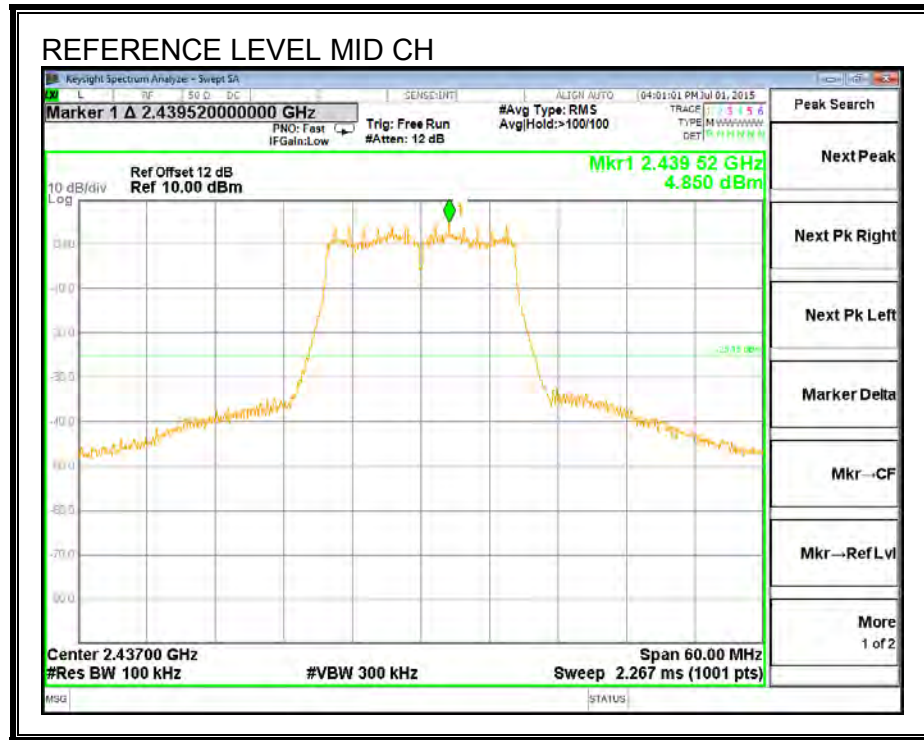


LOW CHANNEL BANDEDGE

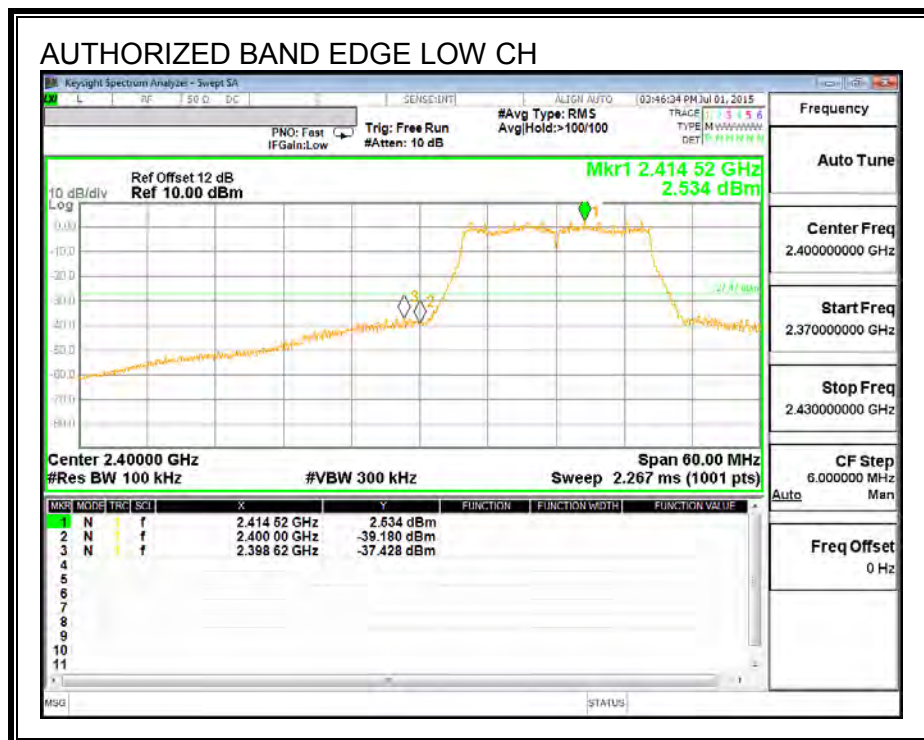


HIGH CHANNEL BANDEDGE

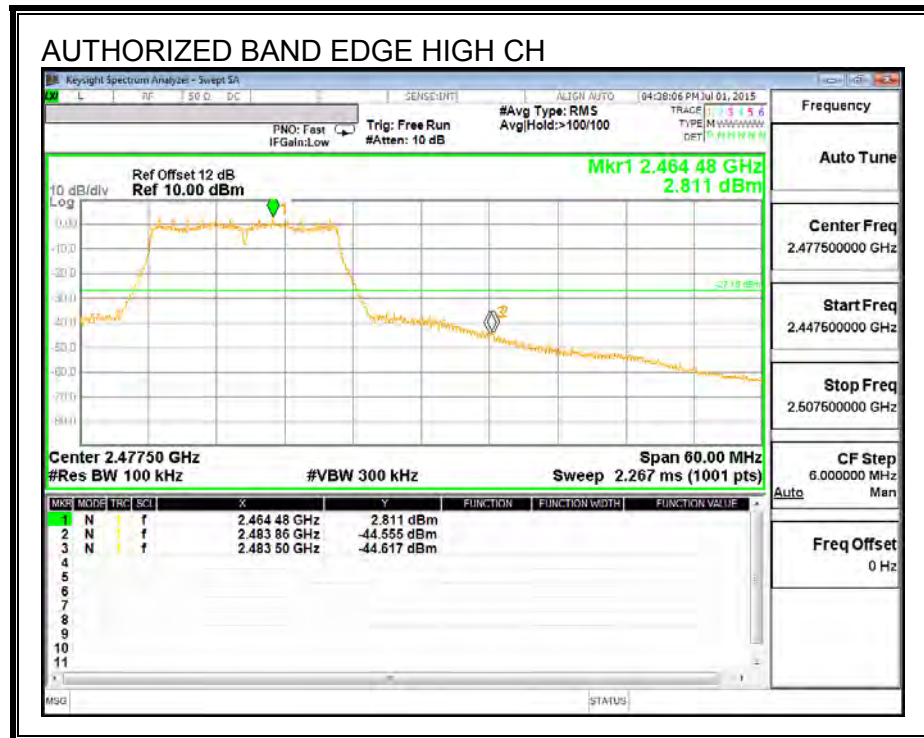


OUT-OF-BAND EMISSIONS

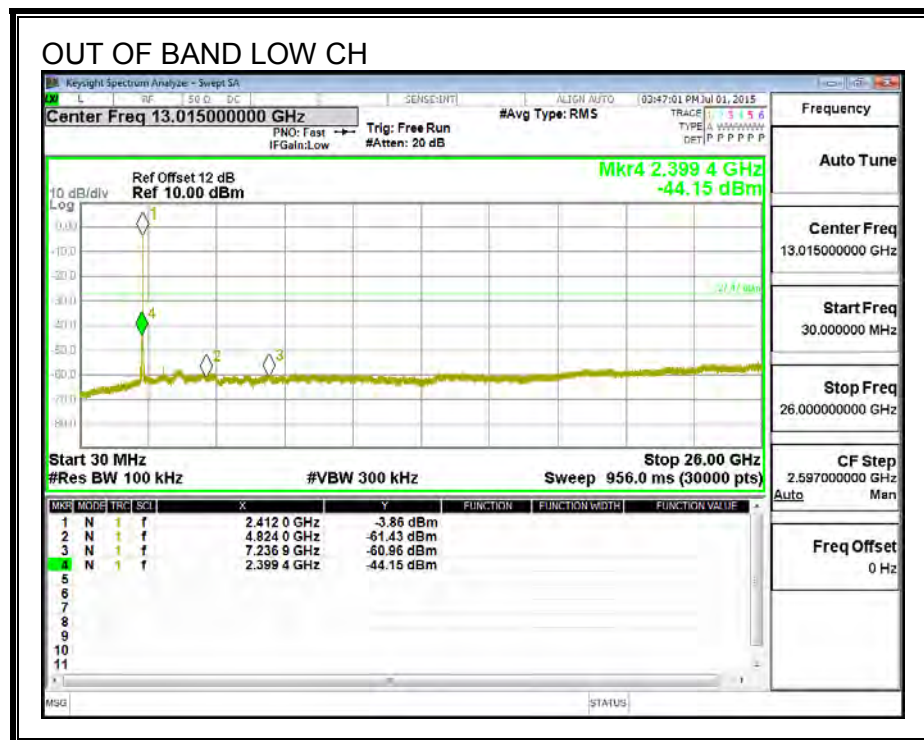

OUT OF BAND MID CH

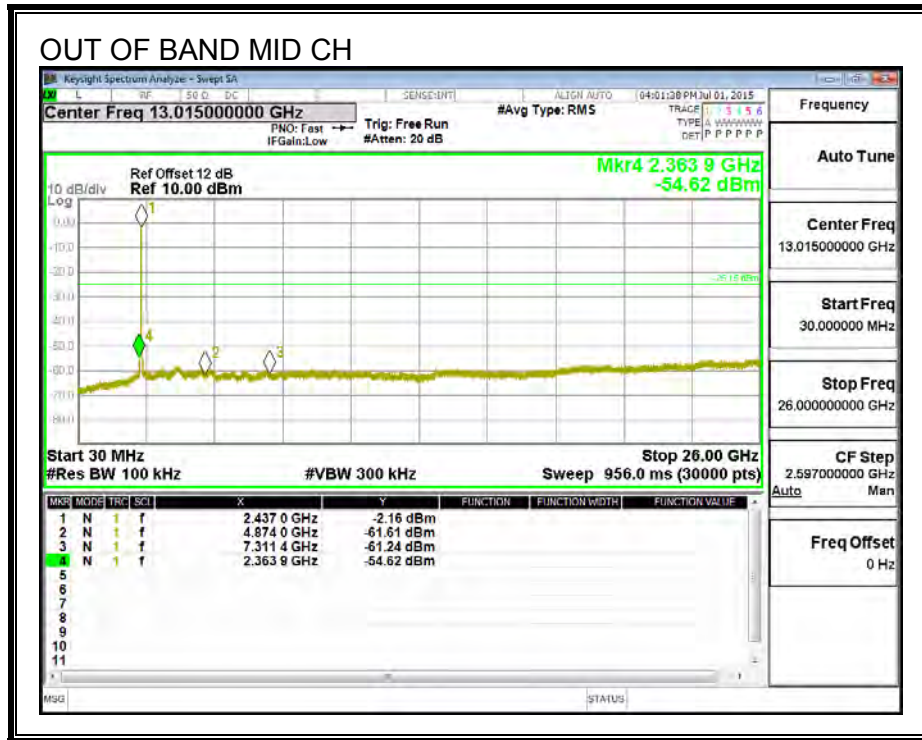

OUT OF BAND HIGH CH

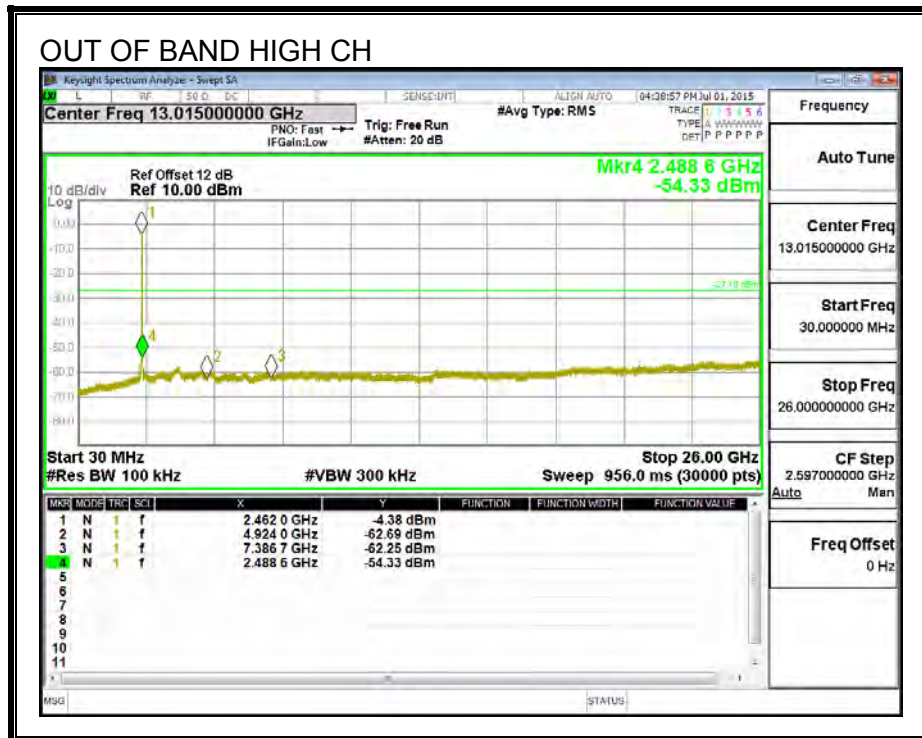

8.5. 802.11g MODE IN THE 2.4 GHz BAND ANTENNA 2

8.5.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.450	0.5
Mid	2437	16.550	0.5
High	2462	16.425	0.5

6 dB BANDWIDTH

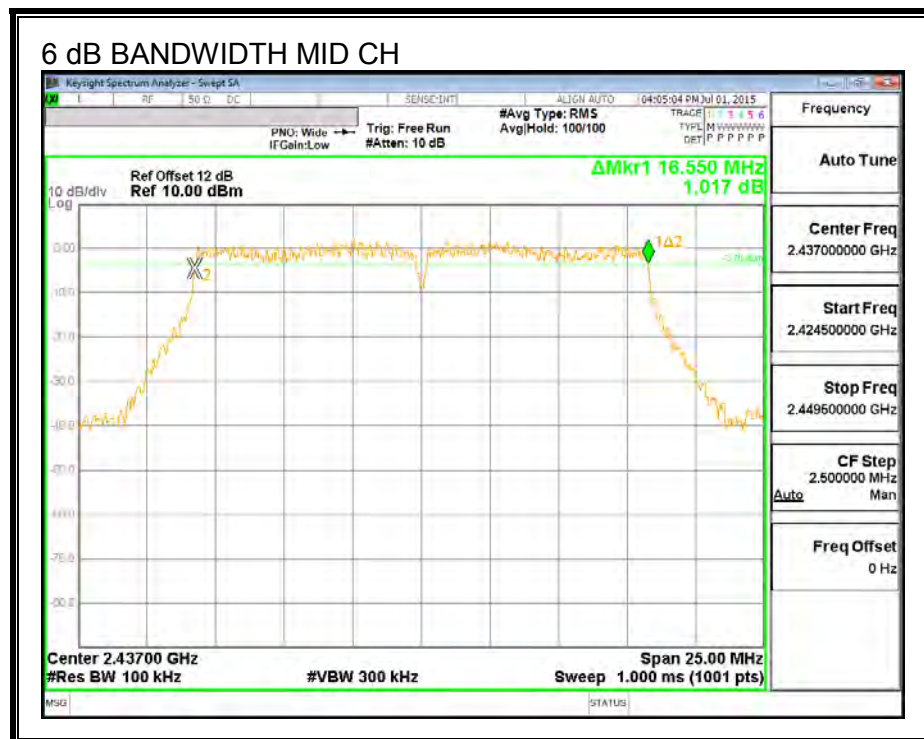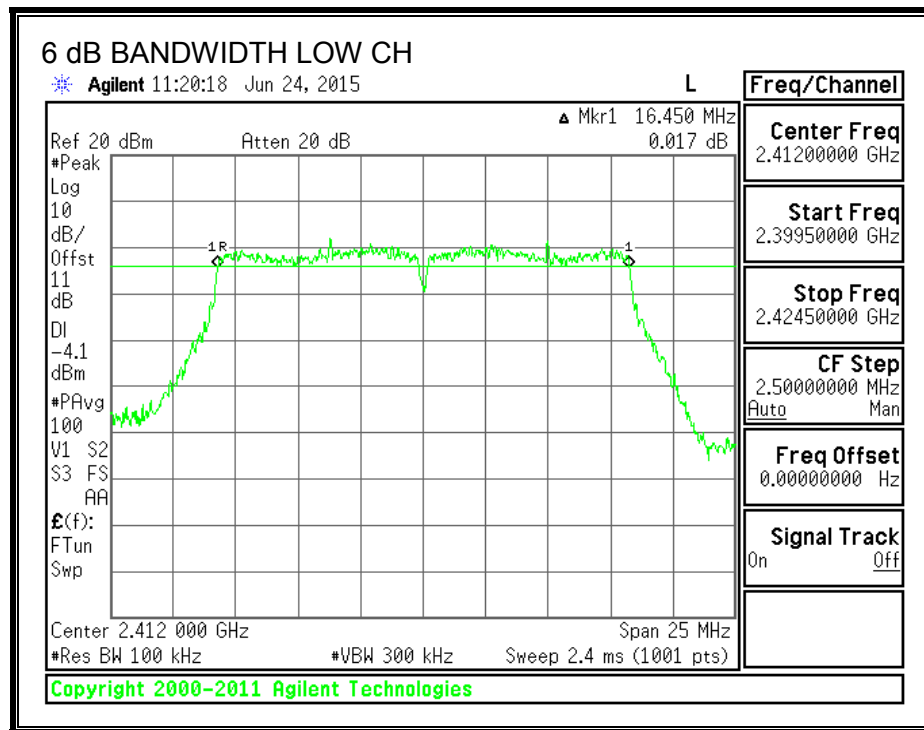

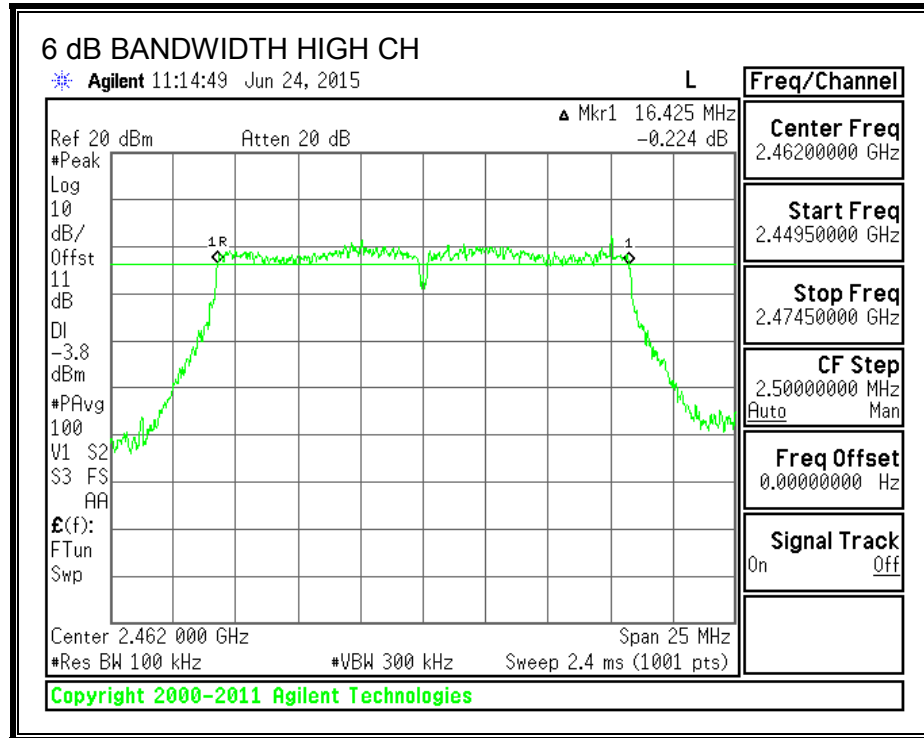

8.5.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4906
Mid	2437	16.5500
High	2462	16.5251

99% BANDWIDTH

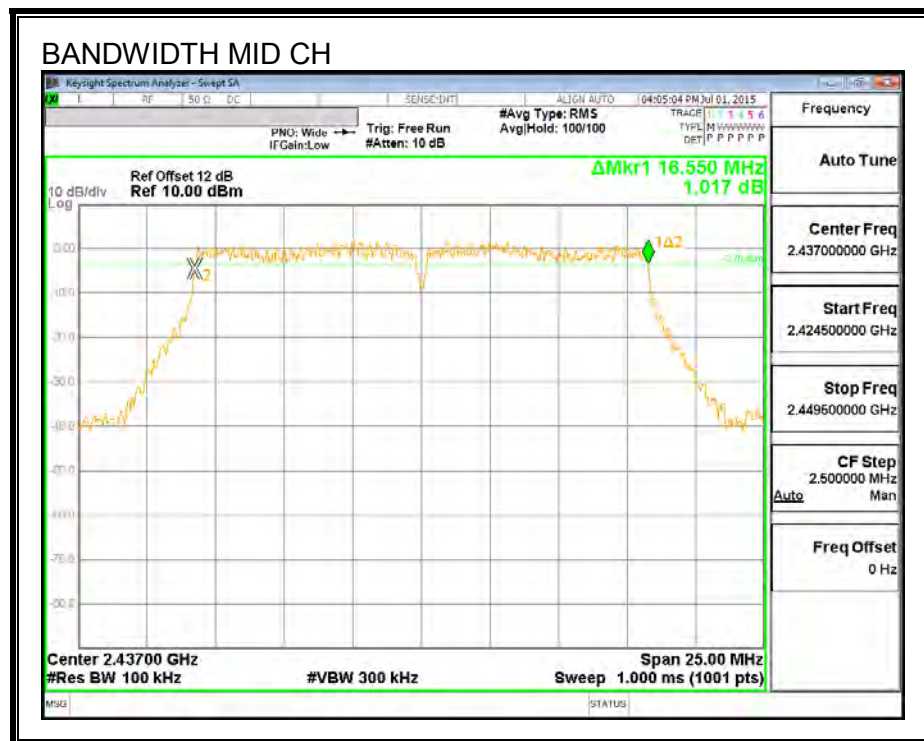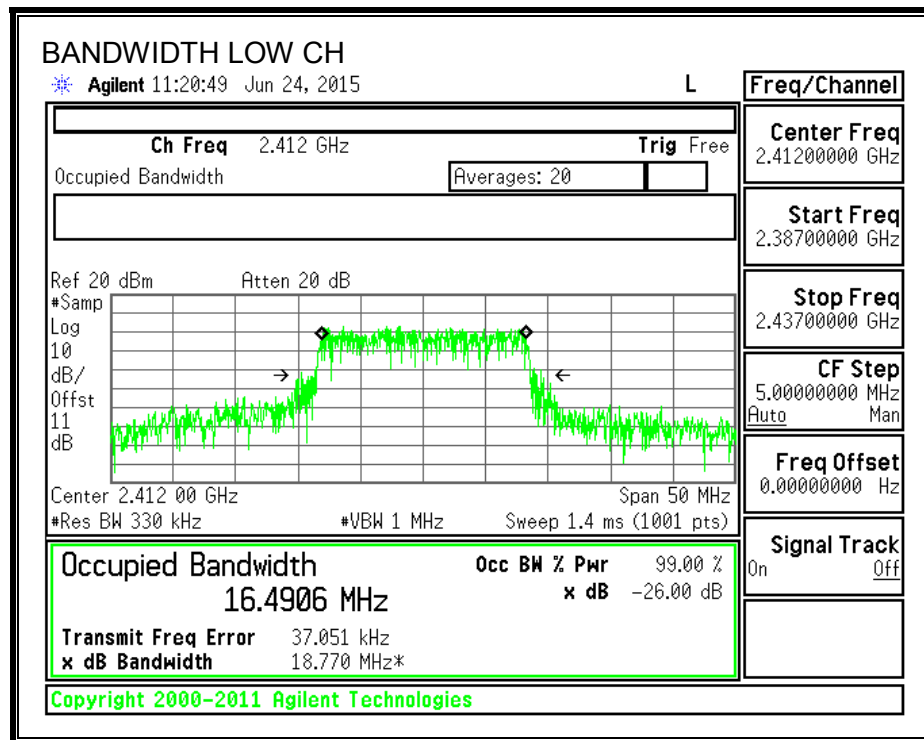

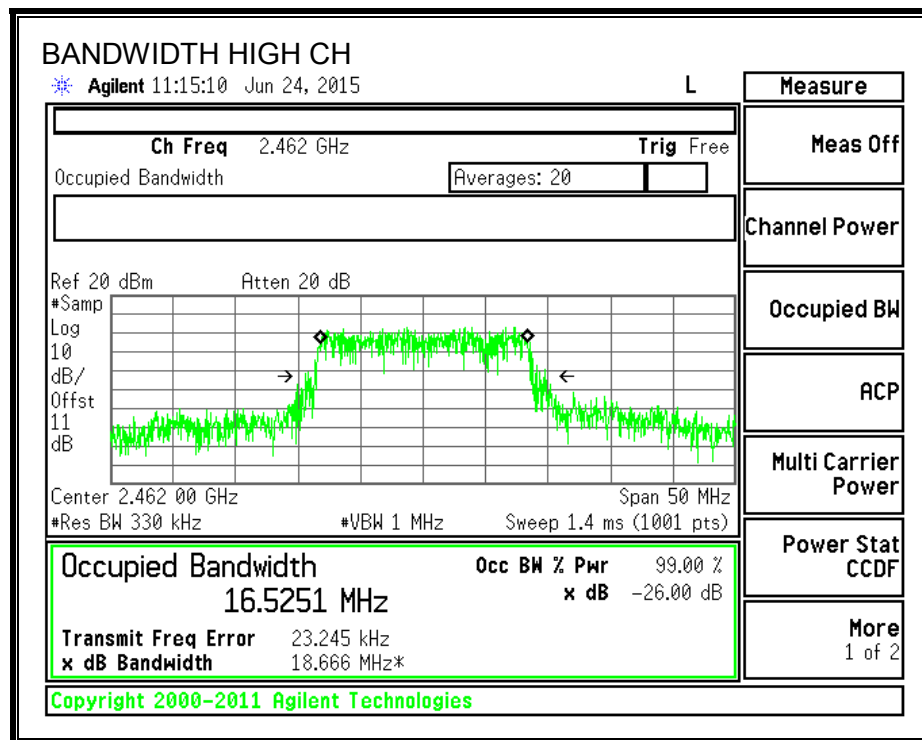

8.5.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.10	30.00	30	36	30.00
Mid	2437	3.10	30.00	30	36	30.00
High	2462	3.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	12.90	12.90	30.00	-17.10
Mid	2437	14.92	14.92	30.00	-15.08
High	2462	12.03	12.03	30.00	-17.97

8.5.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.23	8.0	-18.2
Mid	2437	-8.89	8.0	-16.9
High	2462	-11.71	8.0	-19.7

PSD, Antenna 2

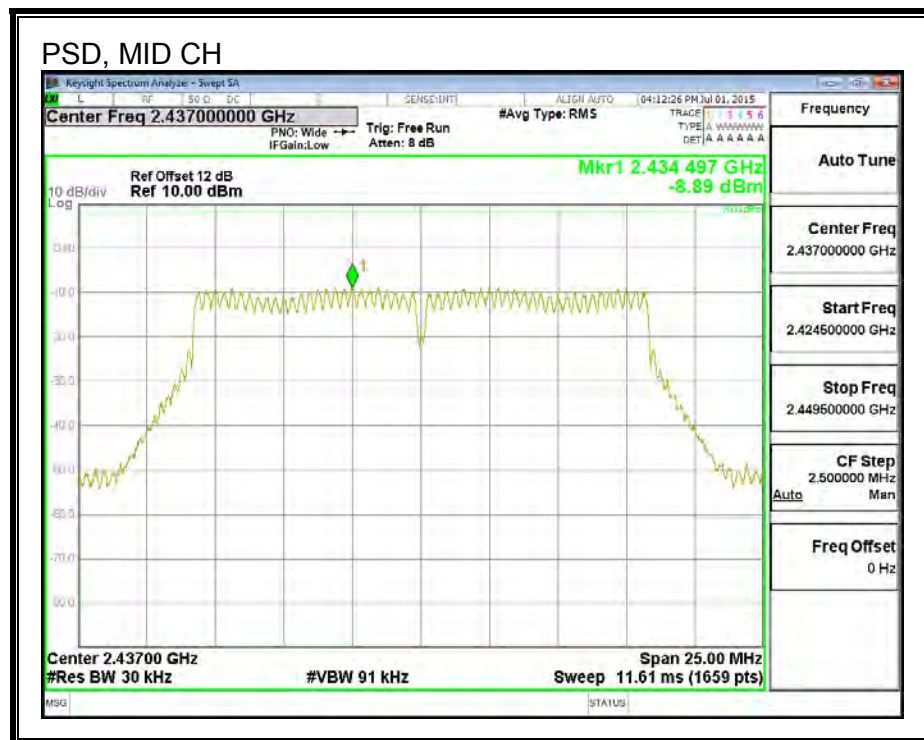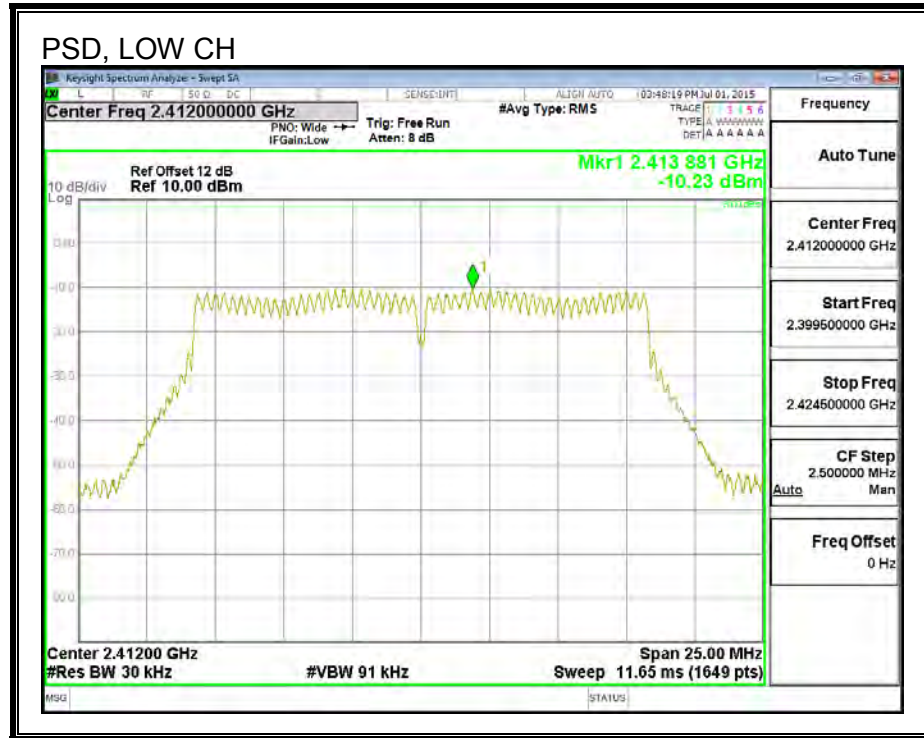

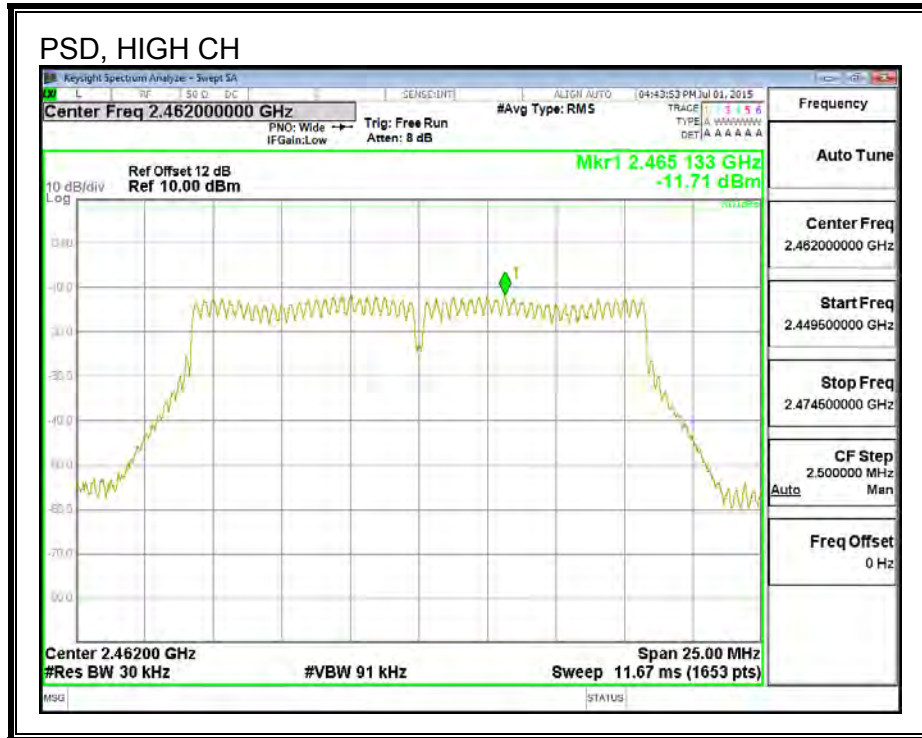

8.5.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

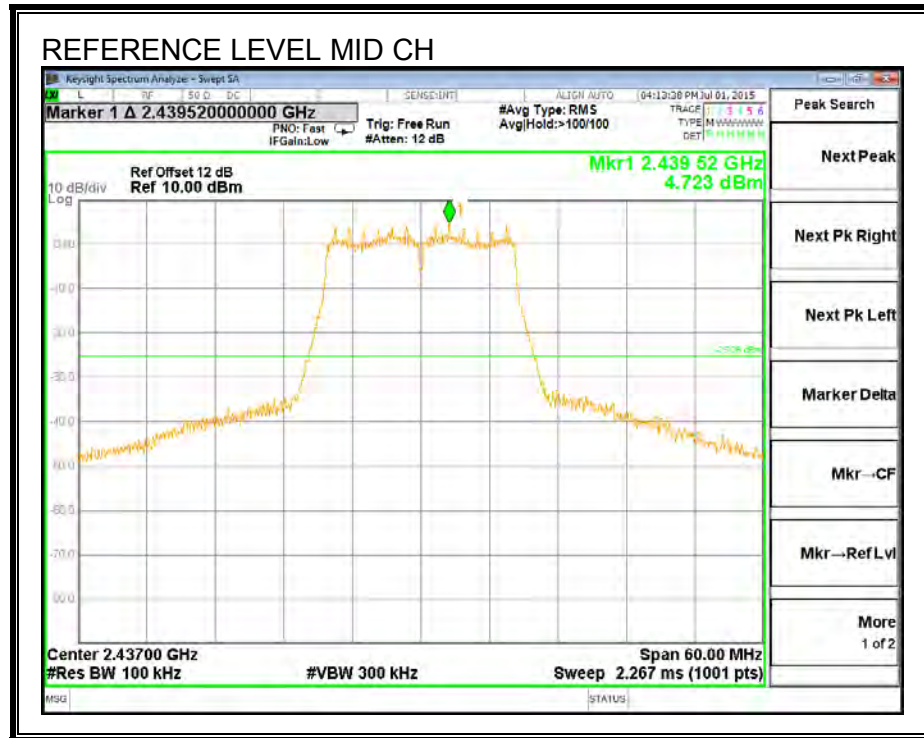


LOW CHANNEL BANDEDGE


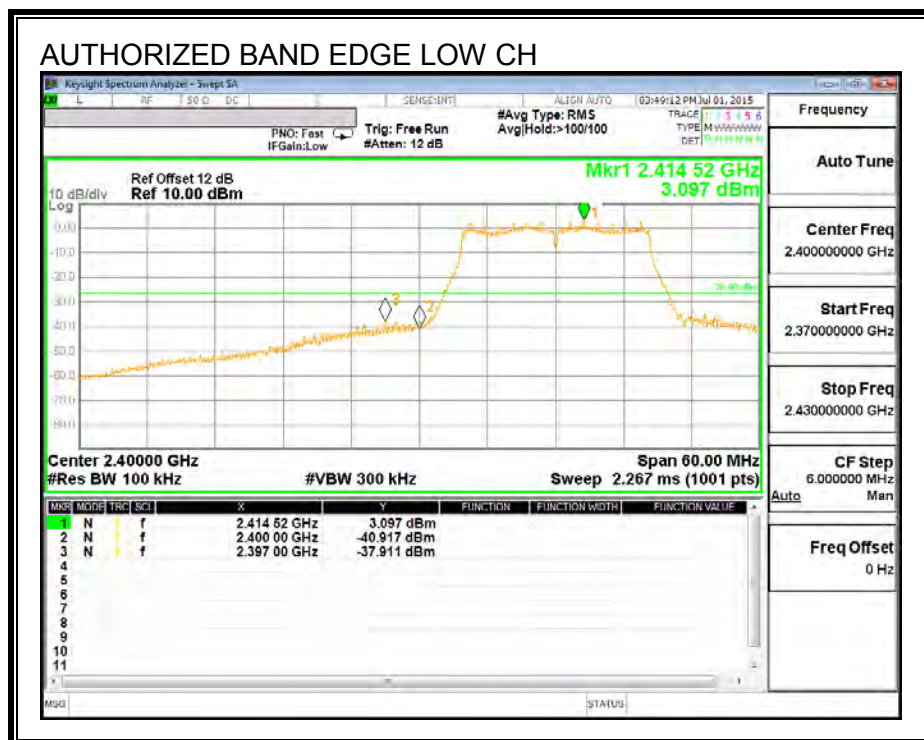


HIGH CHANNEL BANDEDGE

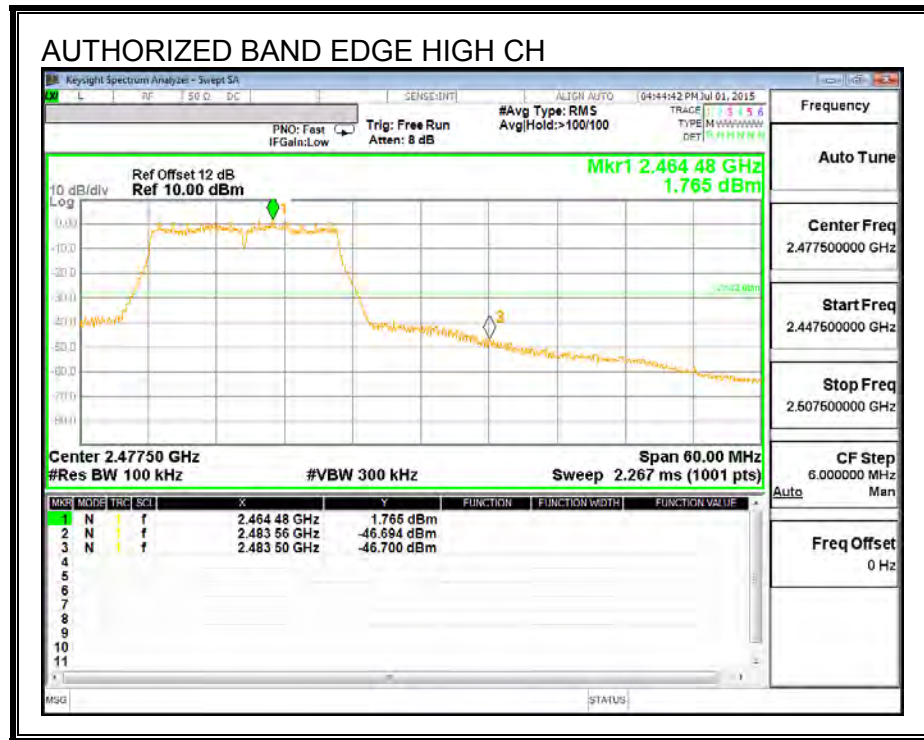

OUT-OF-BAND EMISSIONS

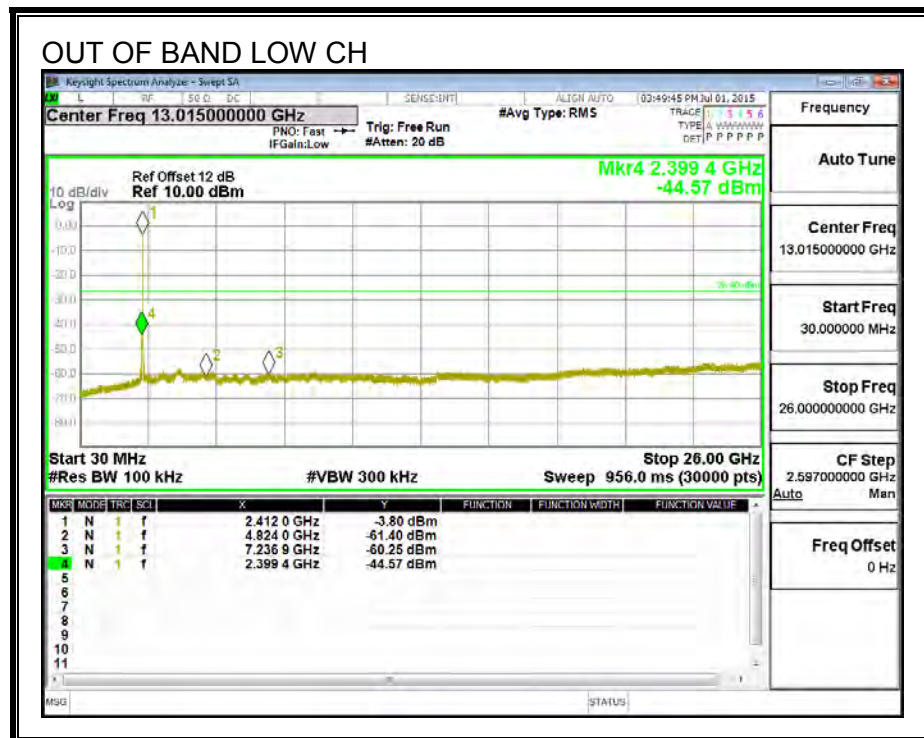

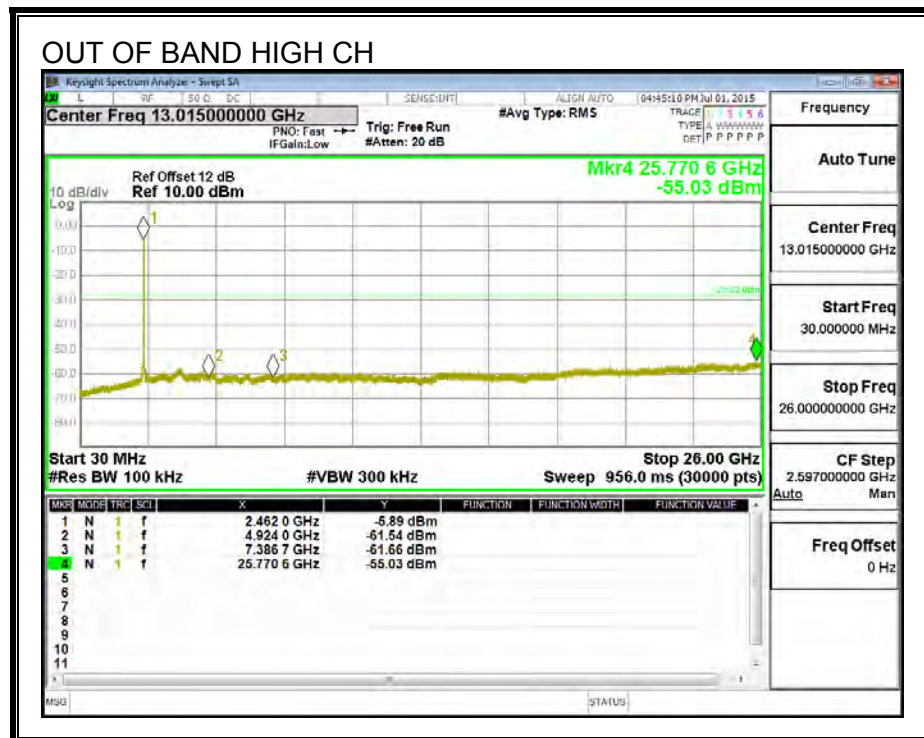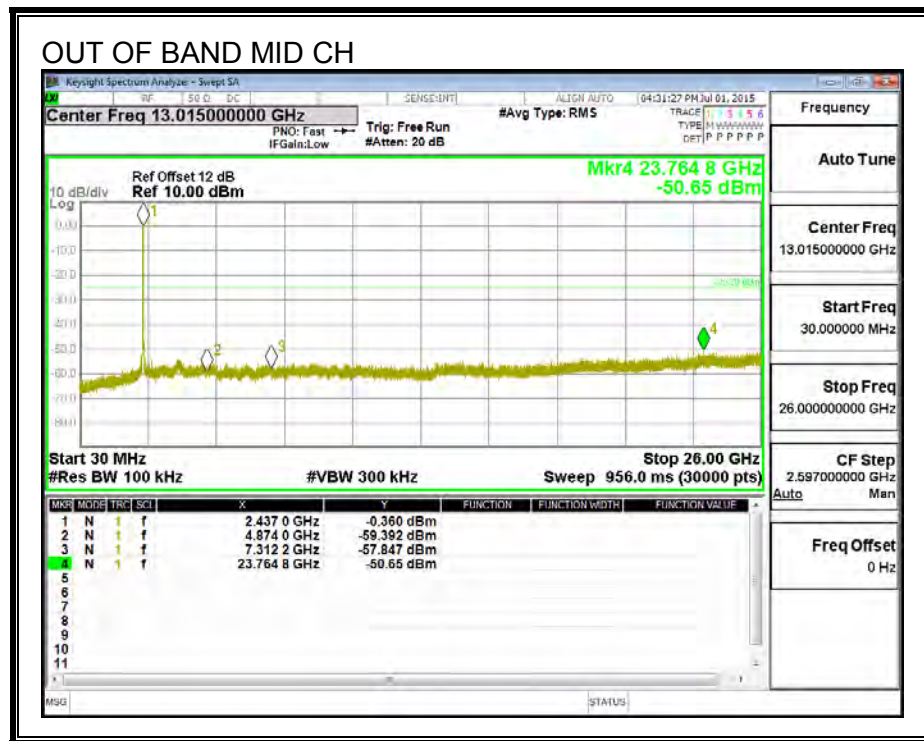

8.6. 802.11n HT20 MODE IN THE 2.4 GHz BAND ANTENNA 1

8.6.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.712	0.5
Mid	2437	17.685	0.5
High	2462	17.550	0.5

6 dB BANDWIDTH

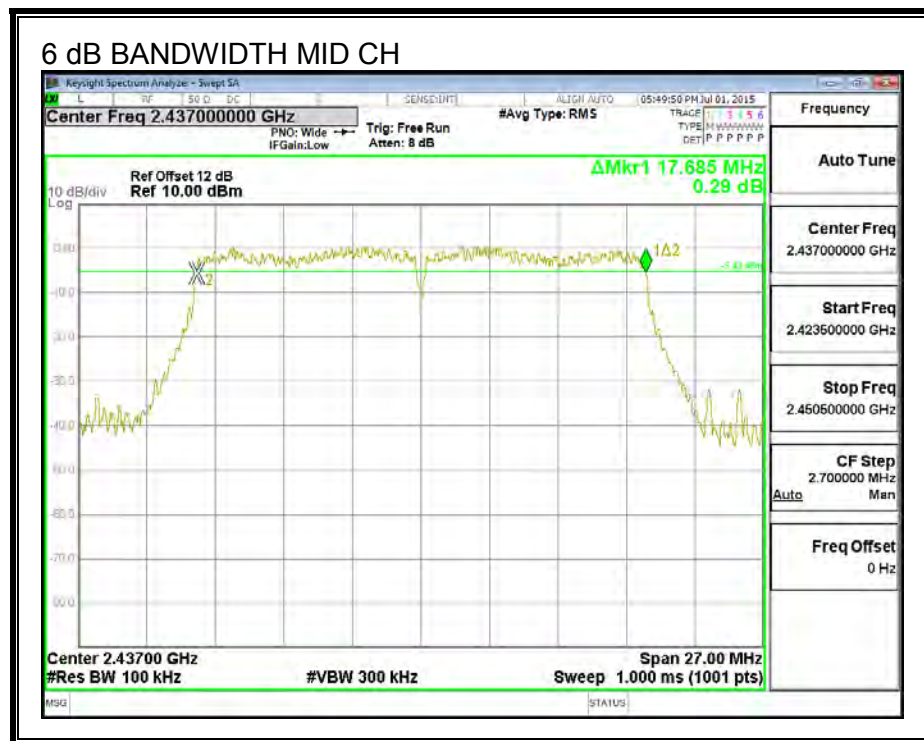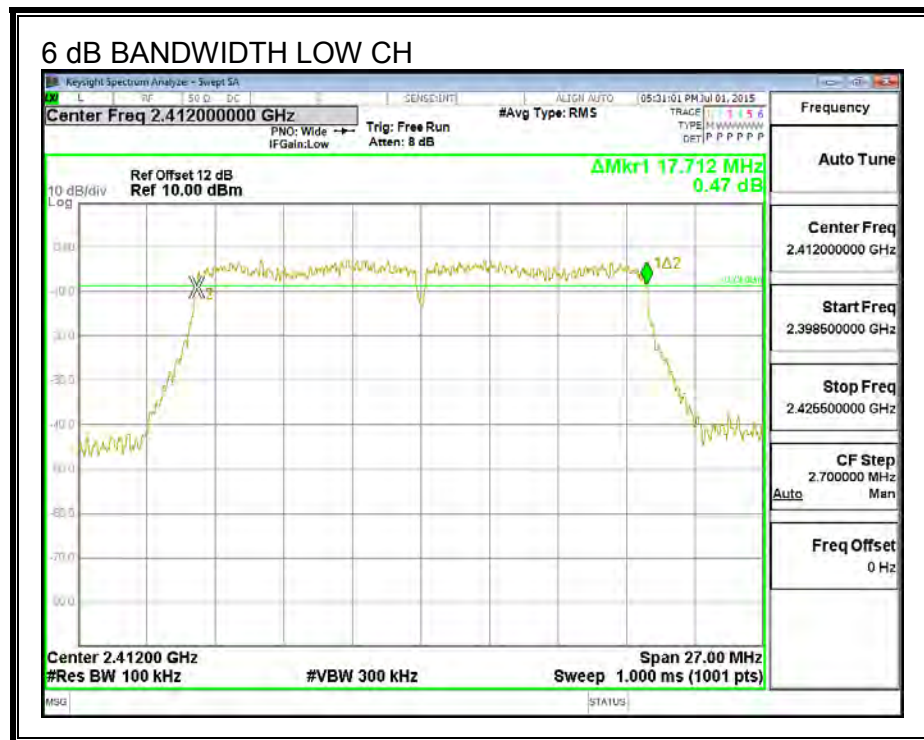

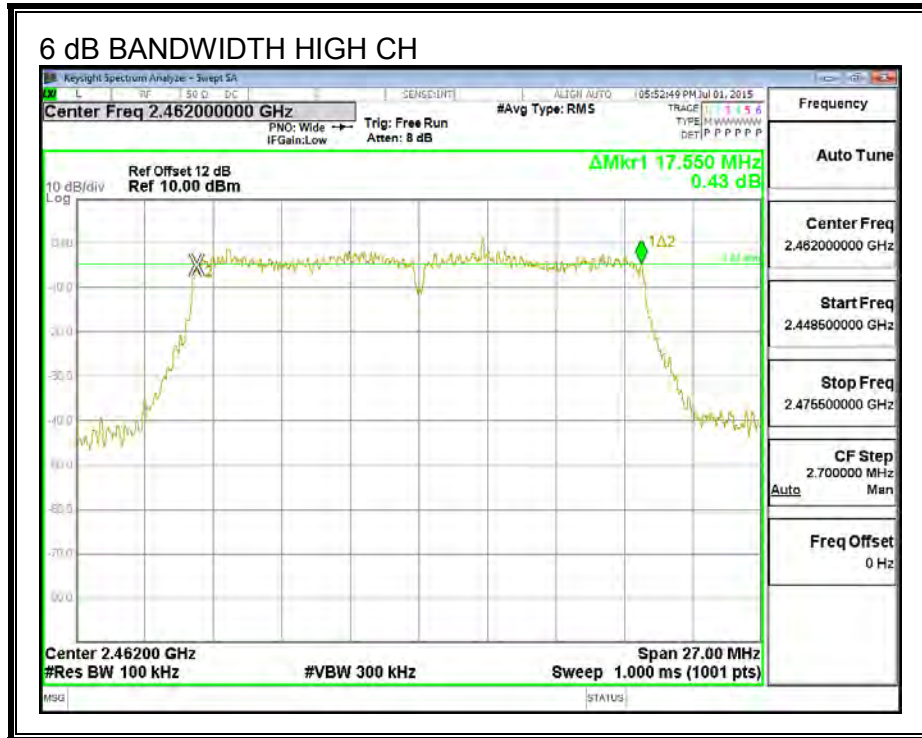

8.6.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.6380
Mid	2437	17.6590
High	2462	17.7310

99% BANDWIDTH

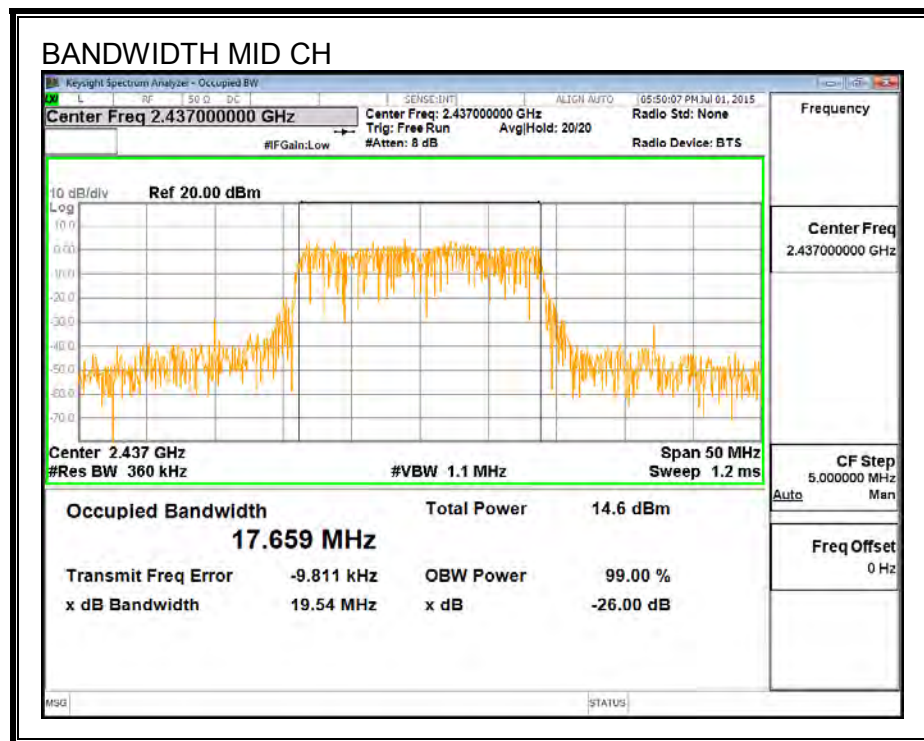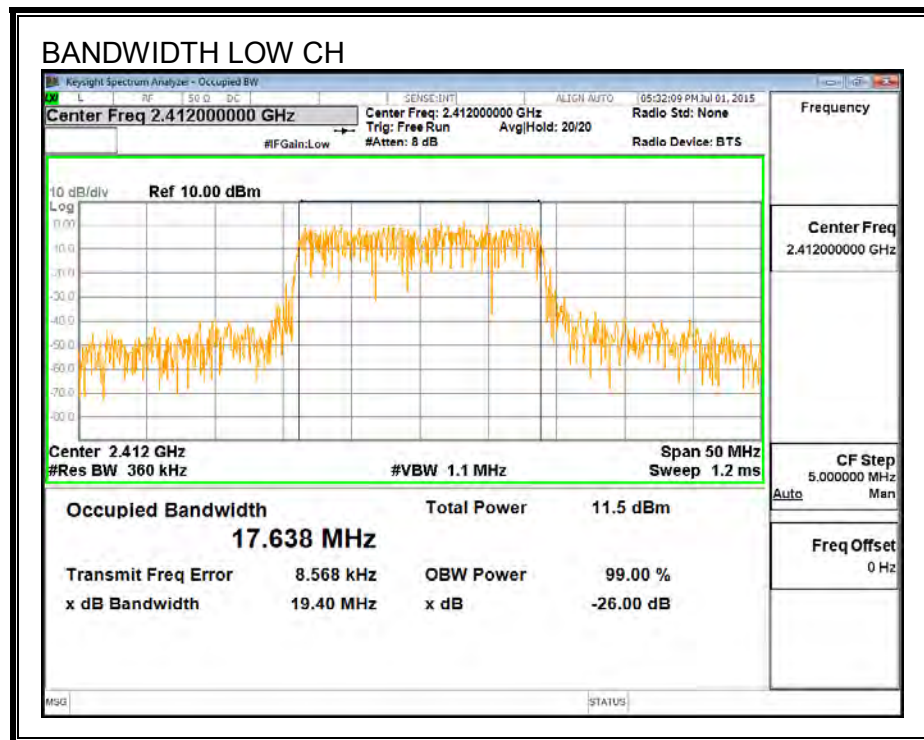

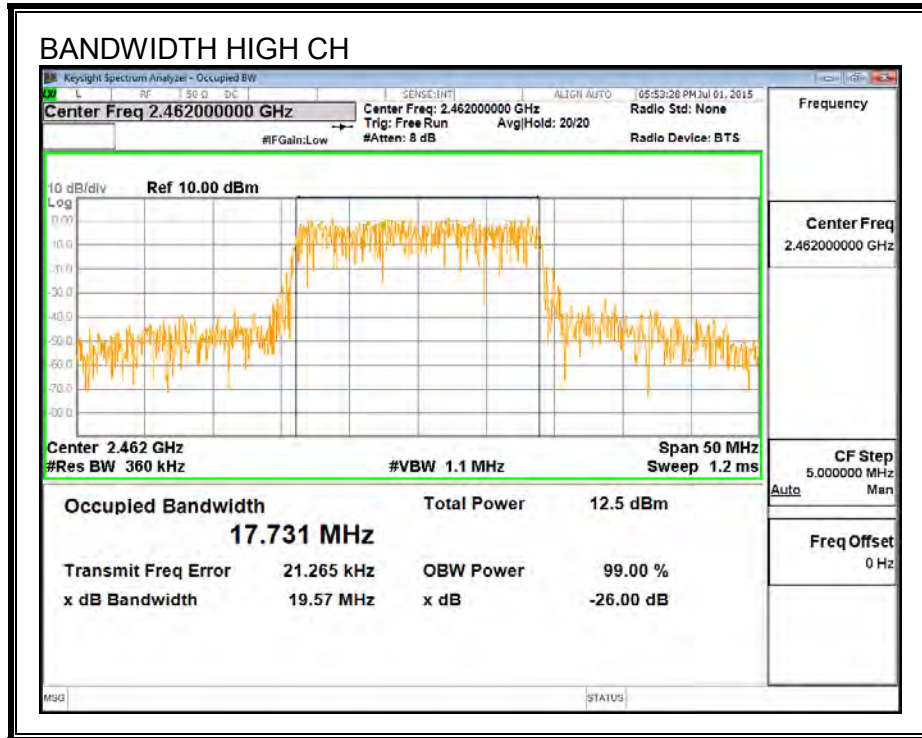

8.6.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.00	30.00	30	36	30.00
Mid	2437	3.00	30.00	30	36	30.00
High	2462	3.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	10.77	10.77	30.00	-19.23
Mid	2437	13.77	13.77	30.00	-16.23
High	2462	11.34	11.34	30.00	-18.66

8.6.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-13.04	8.0	-21.0
Mid	2437	-9.53	8.0	-17.5
High	2462	-11.68	8.0	-19.7

PSD, Antenna 1

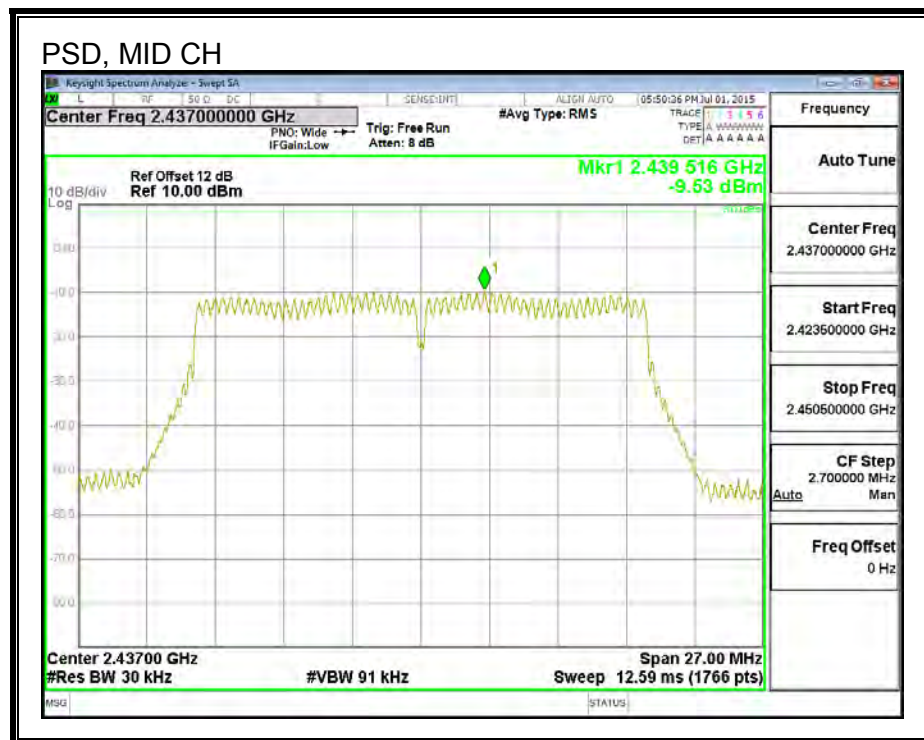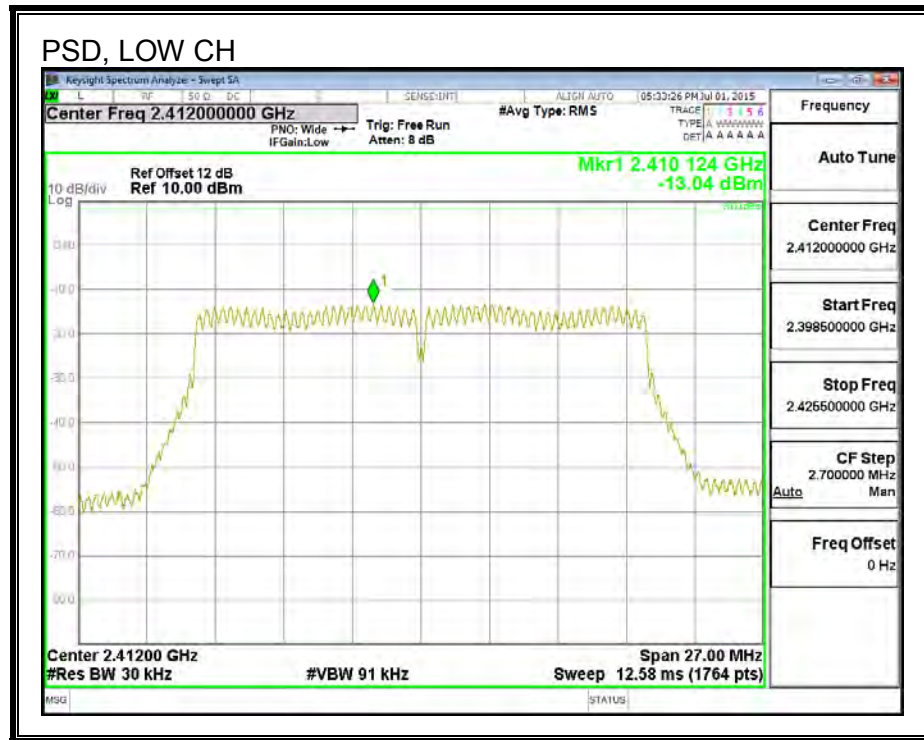

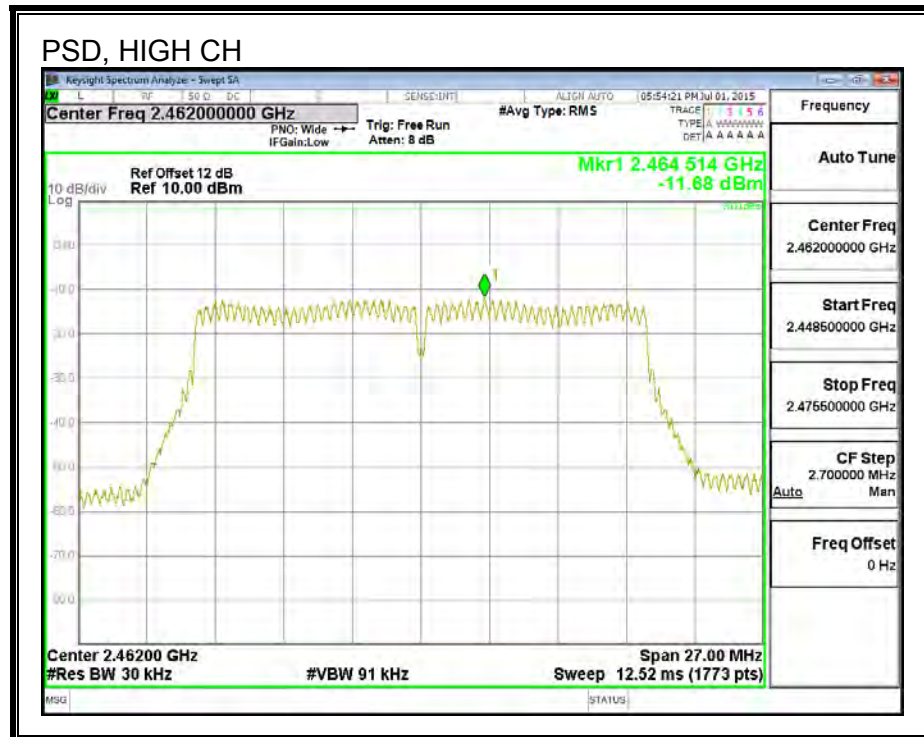

8.6.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

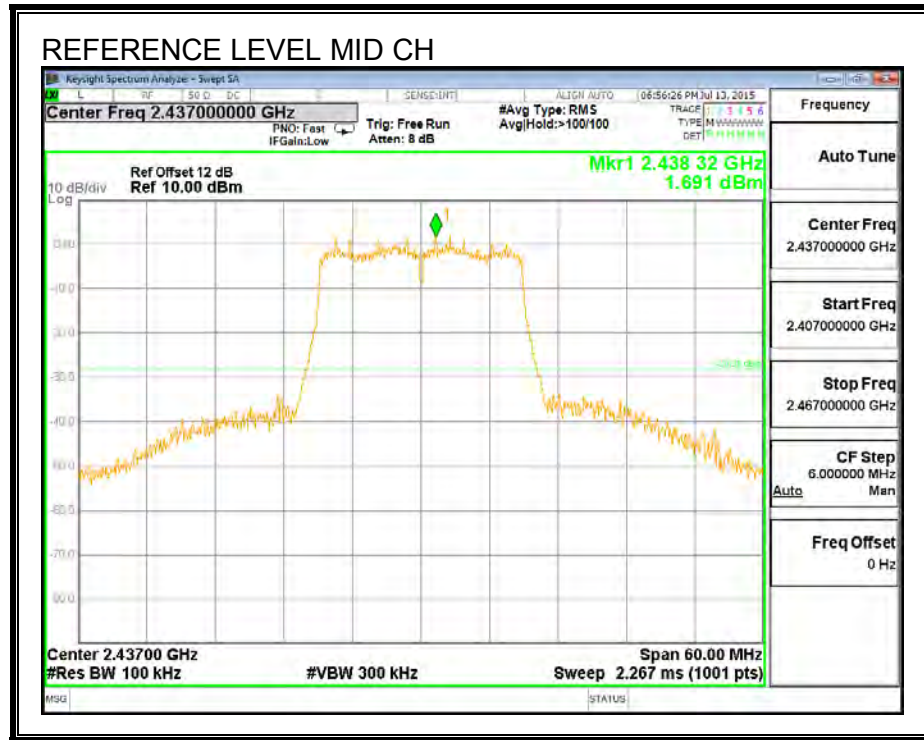


LOW CHANNEL BANDEDGE


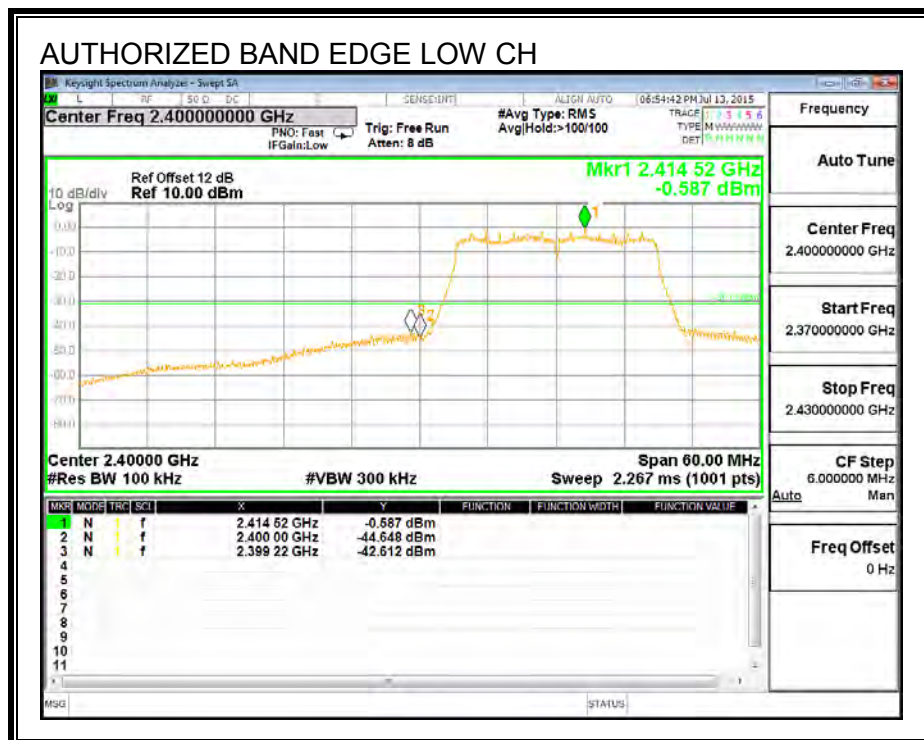


HIGH CHANNEL BANDEDGE

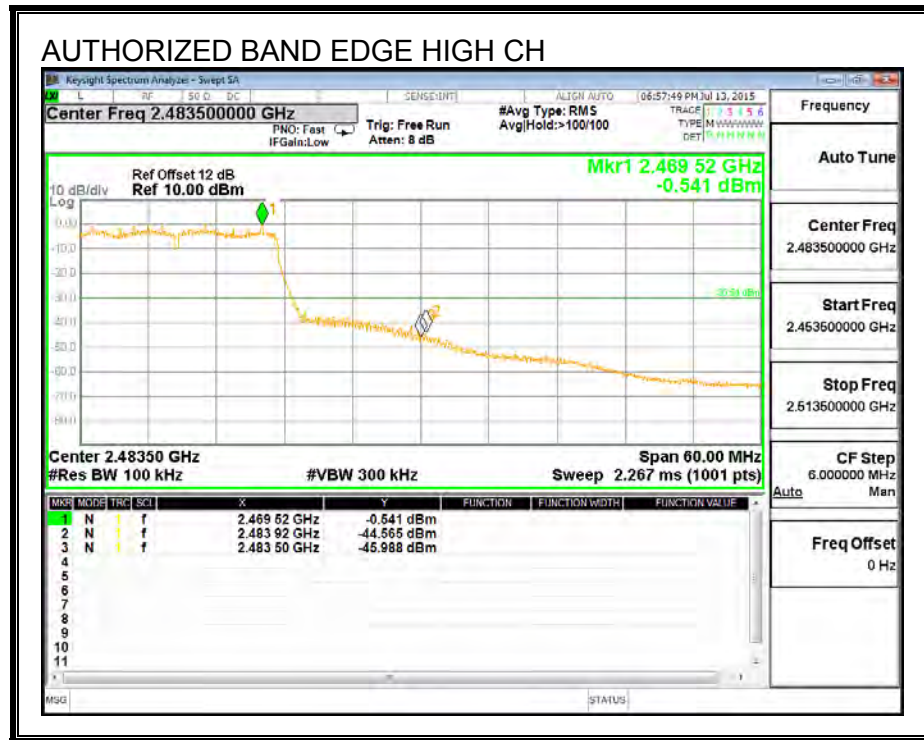

OUT-OF-BAND EMISSIONS

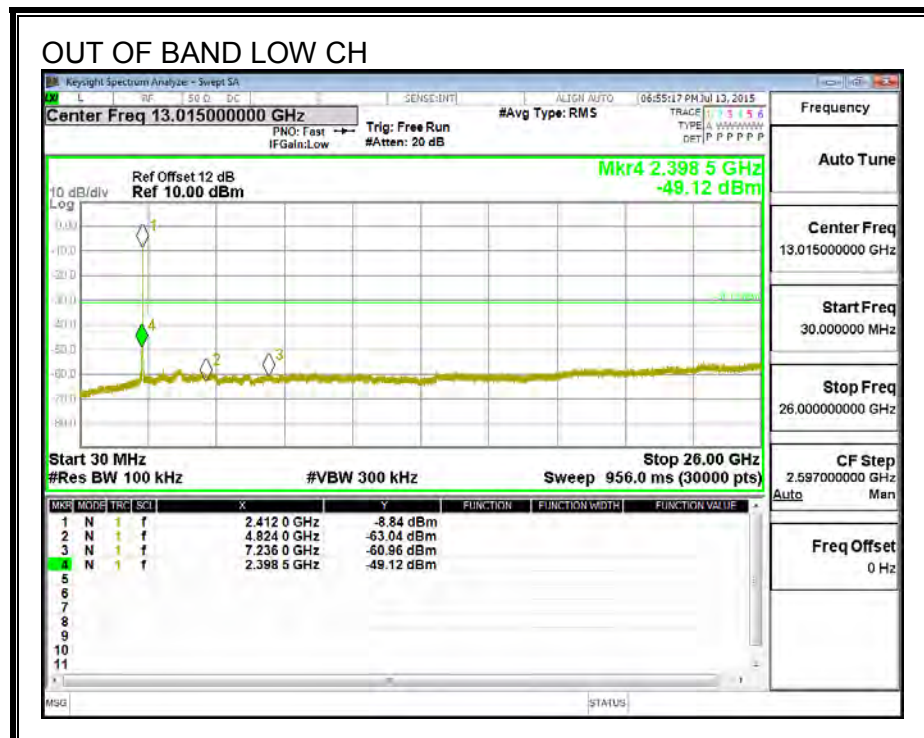

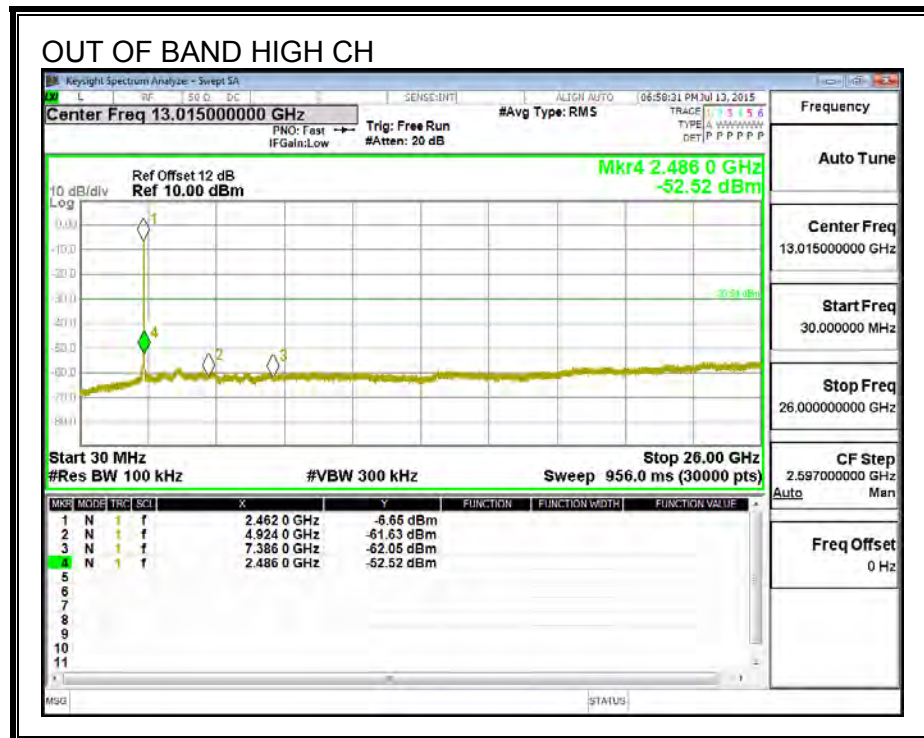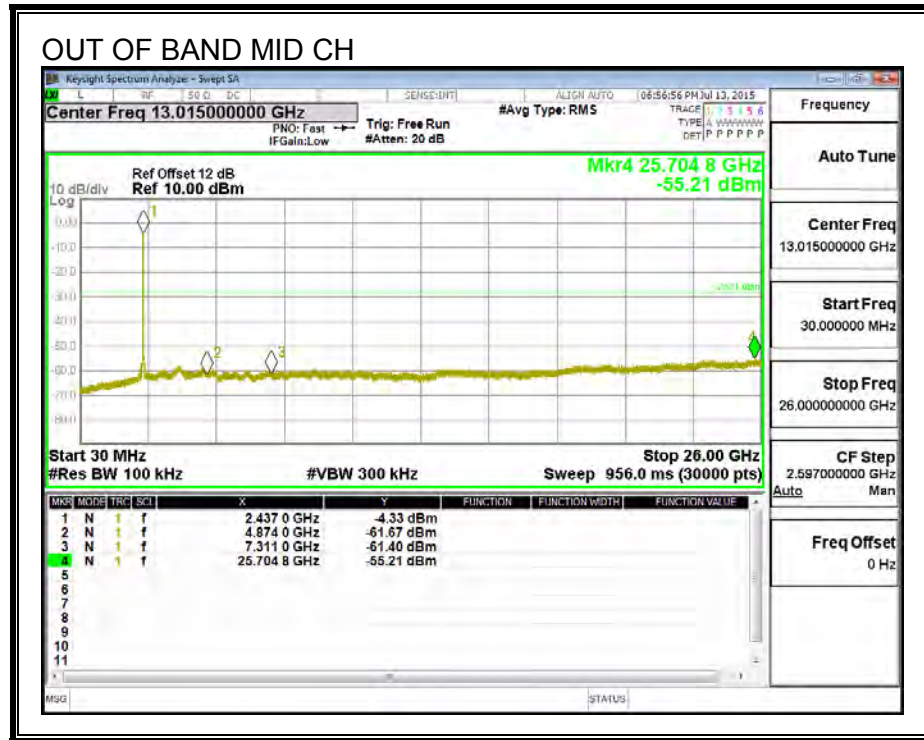

8.7. 802.11n HT20 MODE IN THE 2.4 GHz BAND ANTENNA 2

8.7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.712	0.5
Mid	2437	17.658	0.5
High	2462	17.658	0.5

6 dB BANDWIDTH

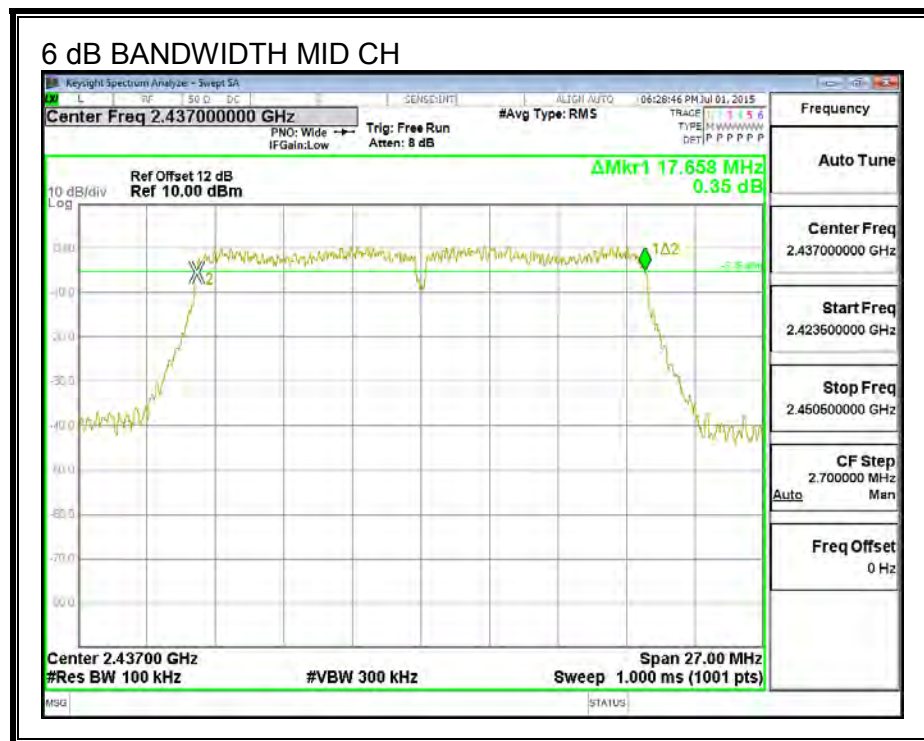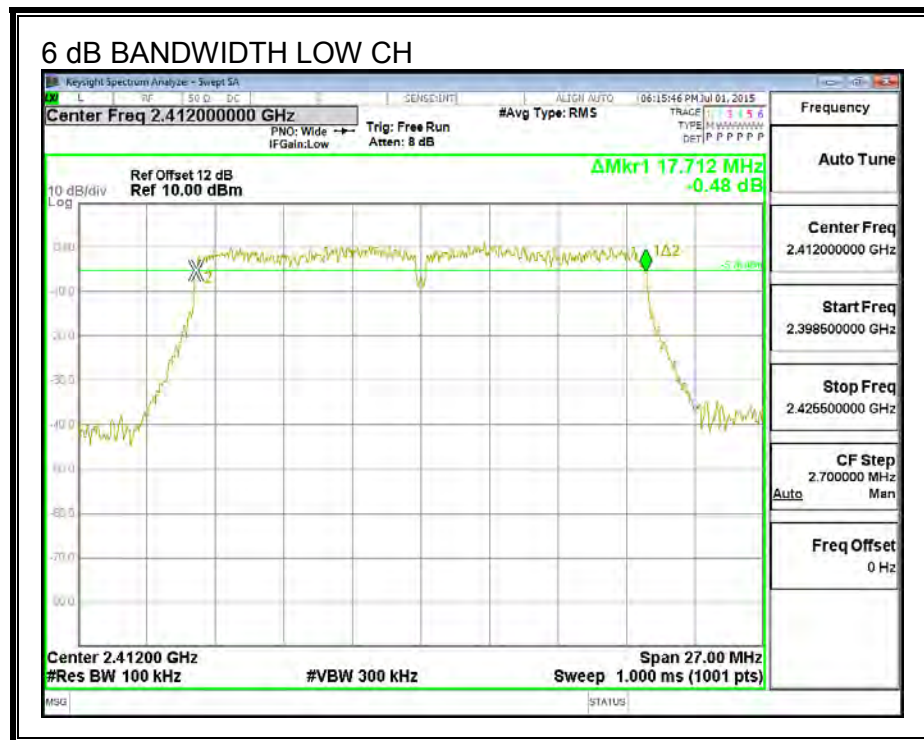

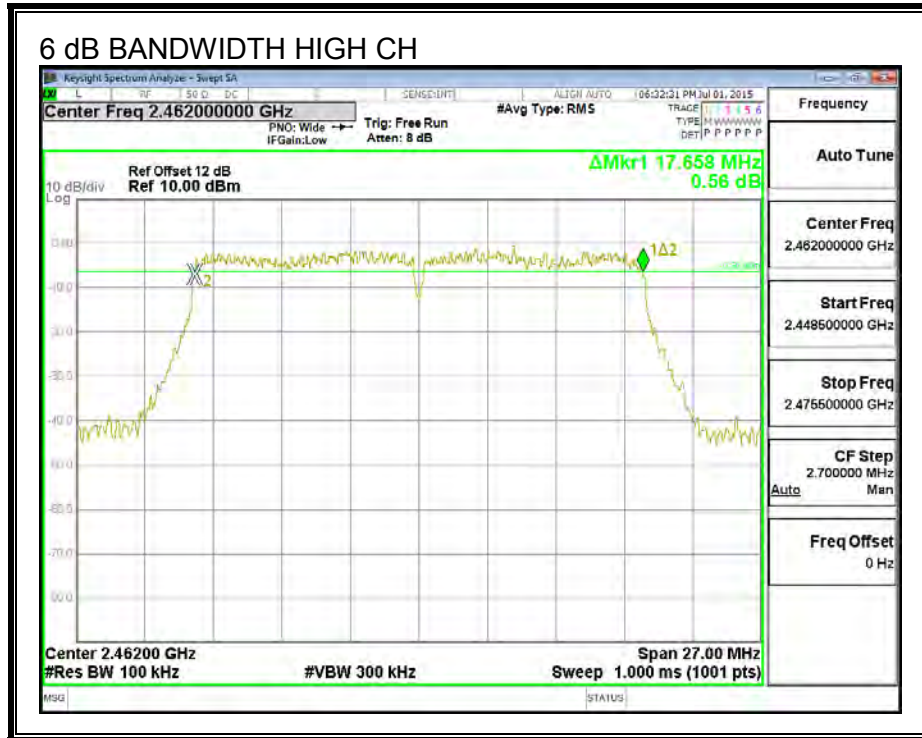

8.7.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.6240
Mid	2437	17.6700
High	2462	17.6490

99% BANDWIDTH

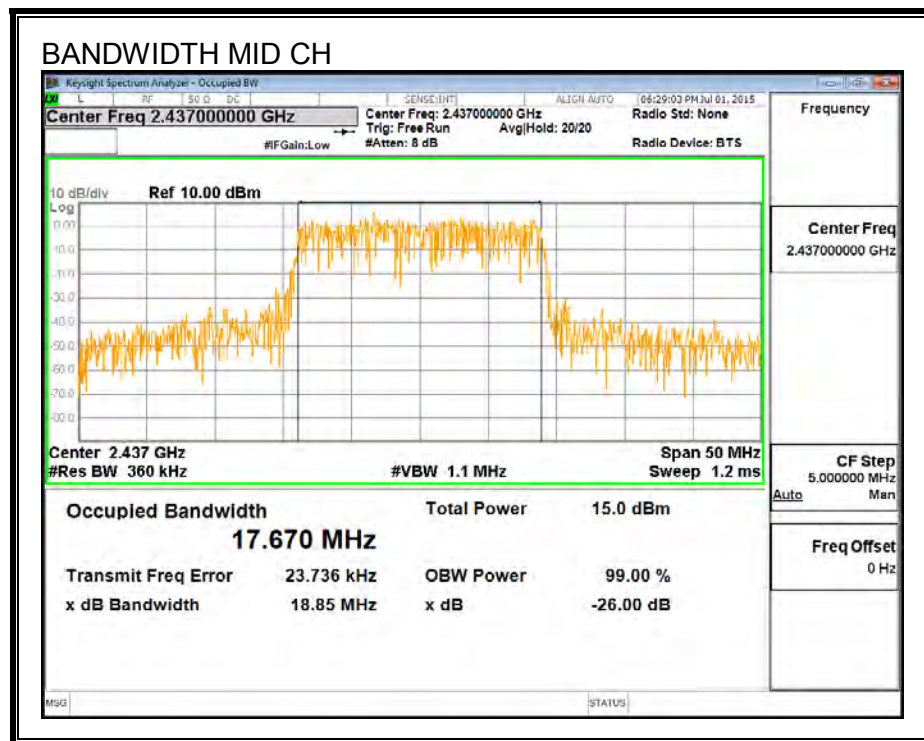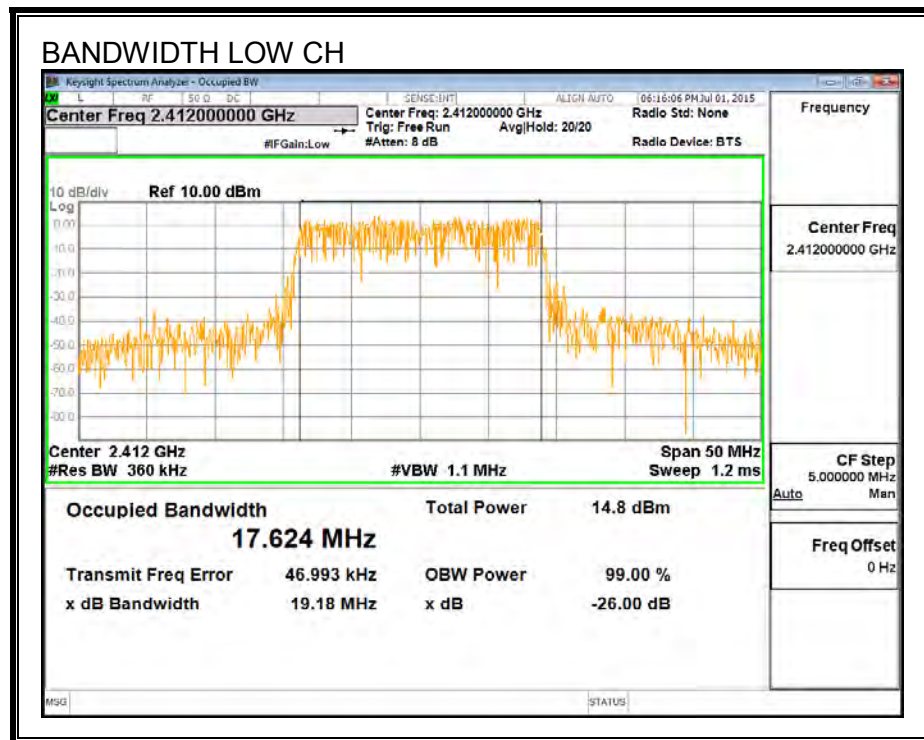

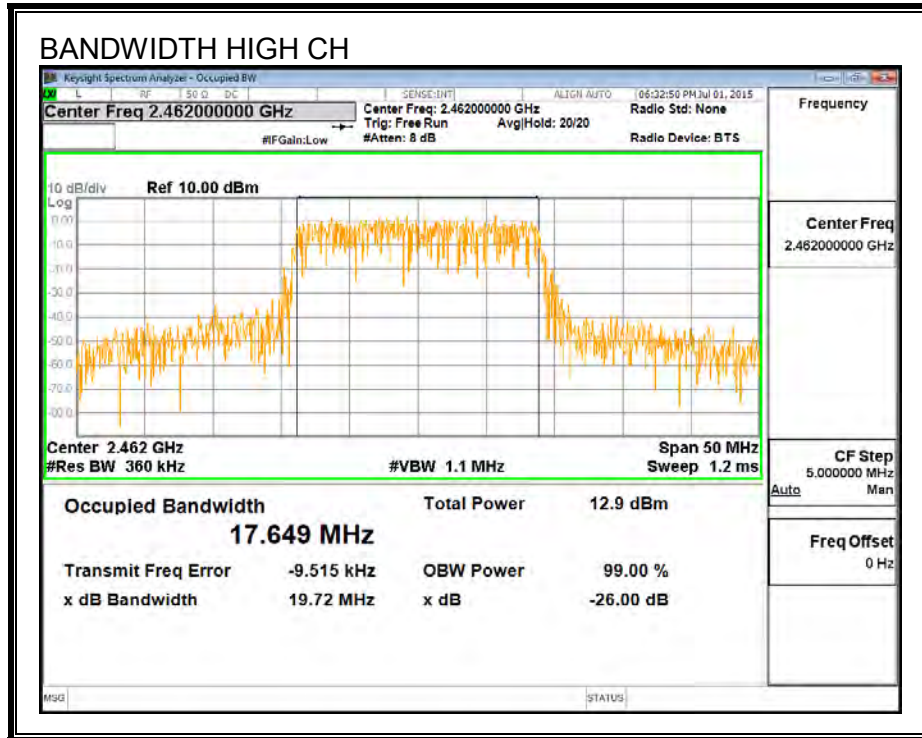

8.7.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	3.10	30.00	30	36	30.00
Mid	2437	3.10	30.00	30	36	30.00
High	2462	3.10	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	13.81	13.81	30.00	-16.19
Mid	2437	13.84	13.84	30.00	-16.16
High	2462	11.74	11.74	30.00	-18.26

8.7.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-9.62	8.0	-17.6
Mid	2437	-9.61	8.0	-17.6
High	2462	-11.83	8.0	-19.8

PSD, Antenna 2

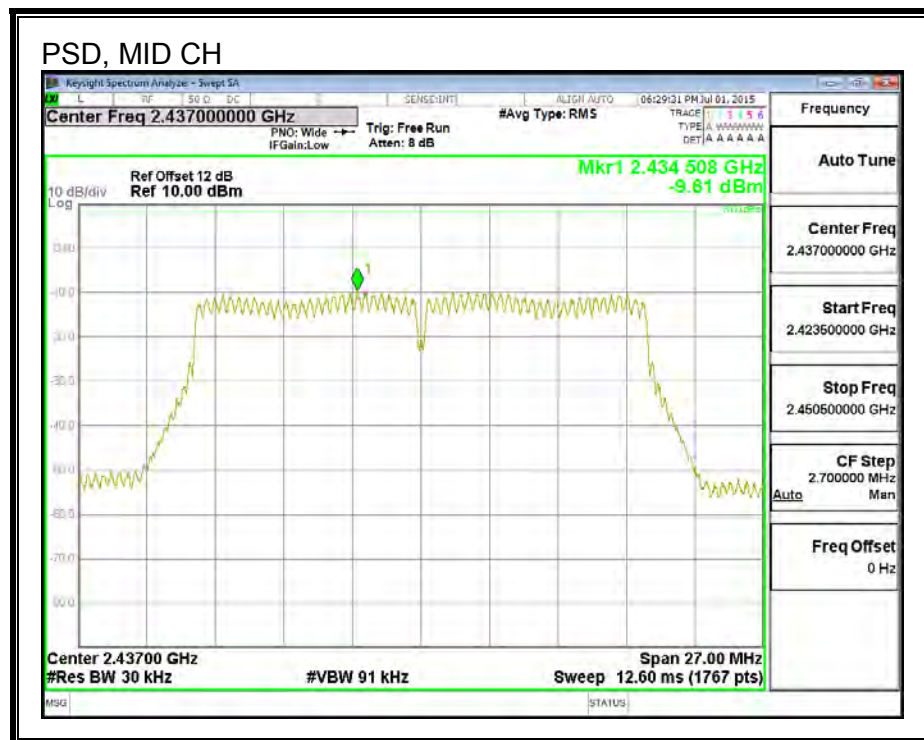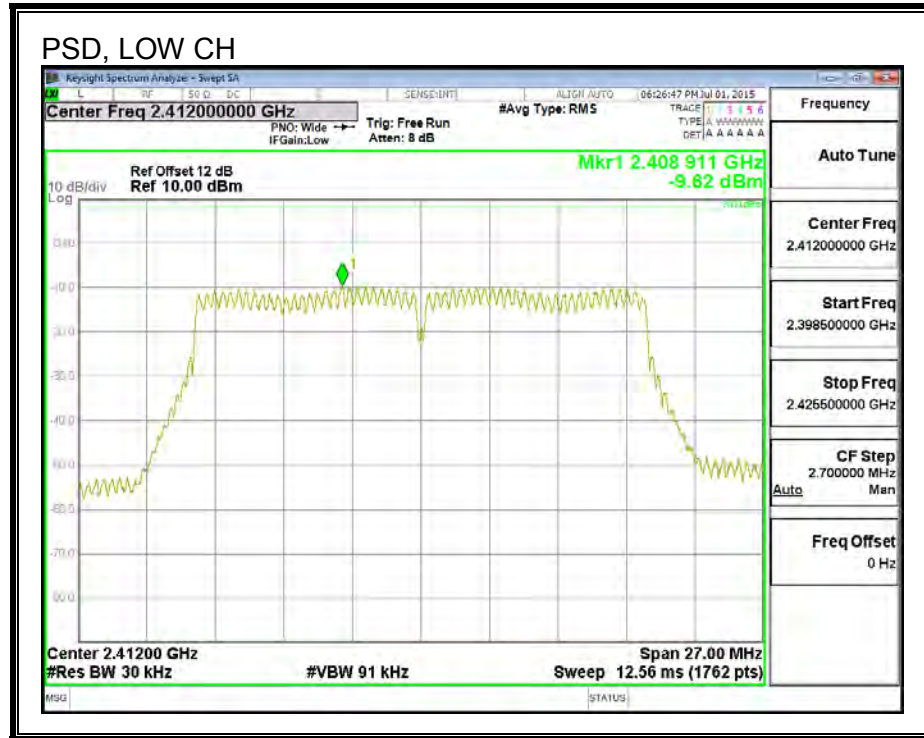

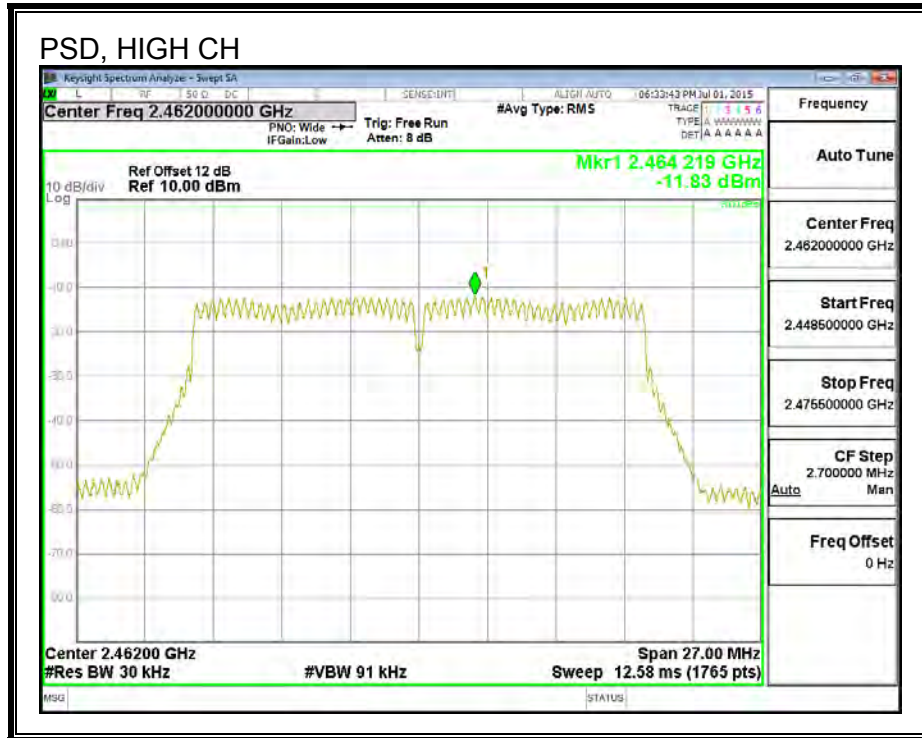

8.7.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

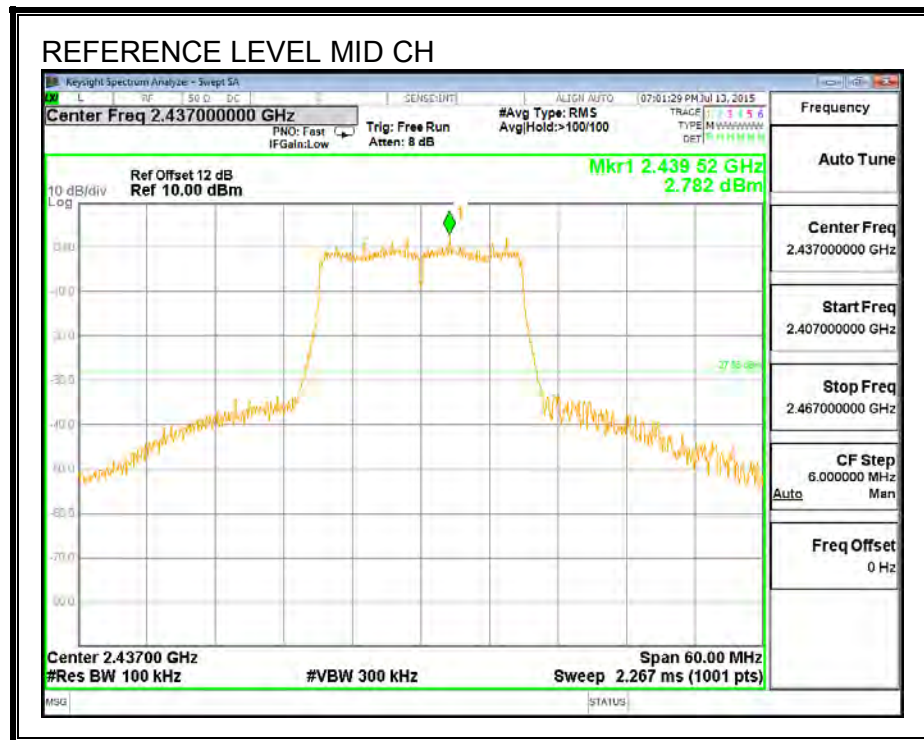


LOW CHANNEL BANDEDGE


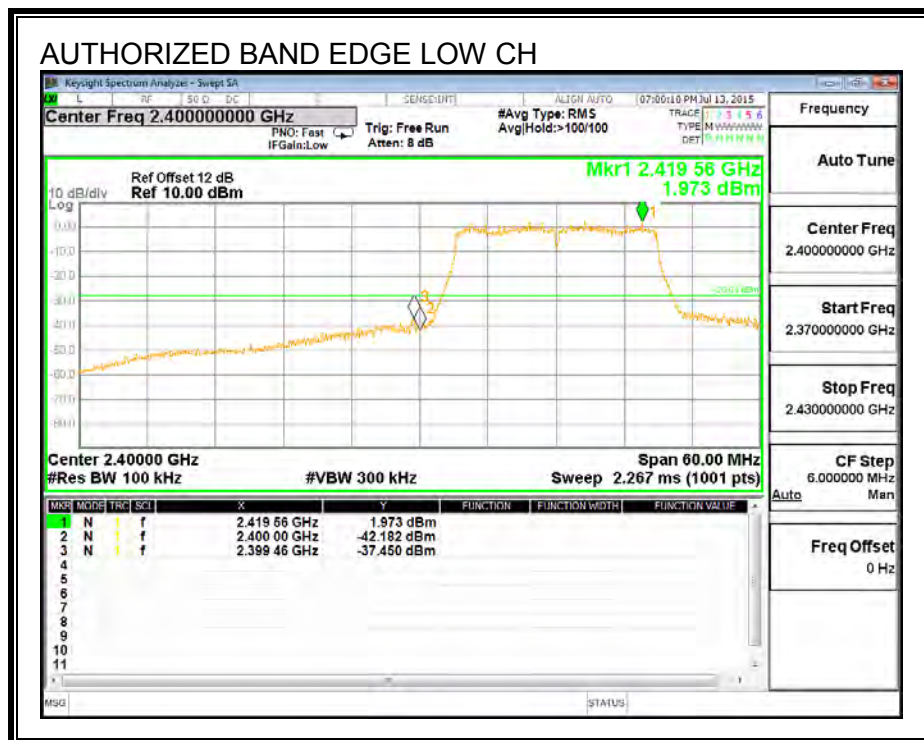


HIGH CHANNEL BANDEDGE

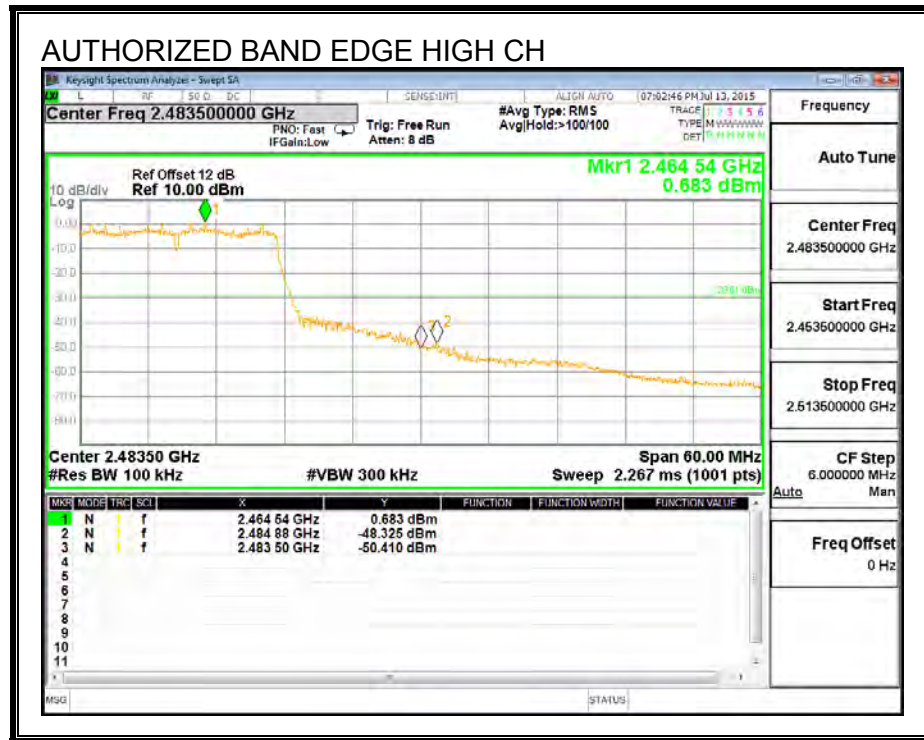

OUT-OF-BAND EMISSIONS

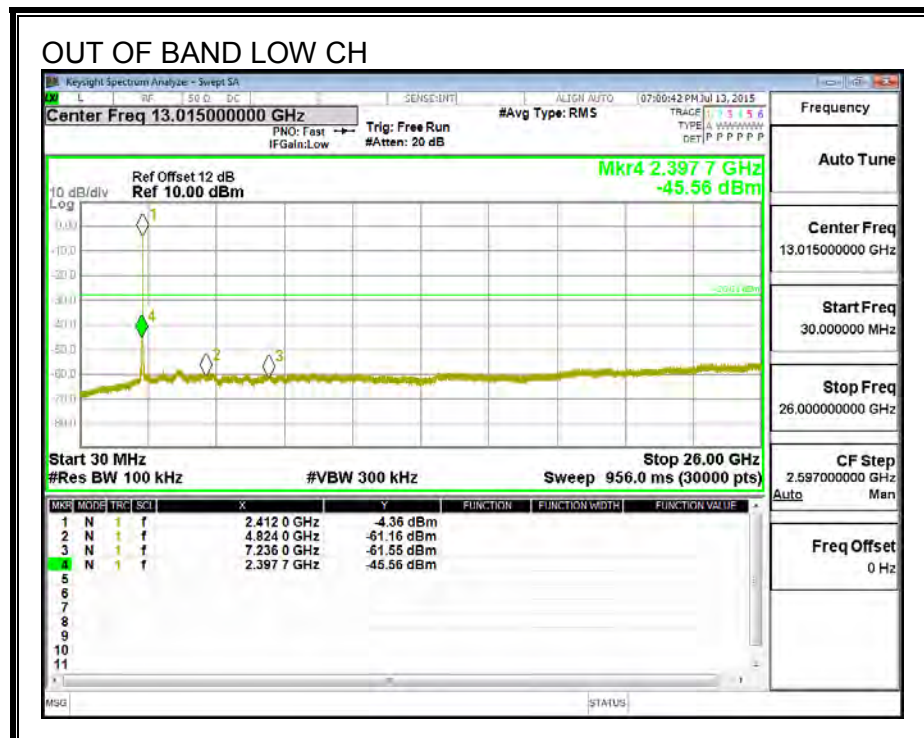

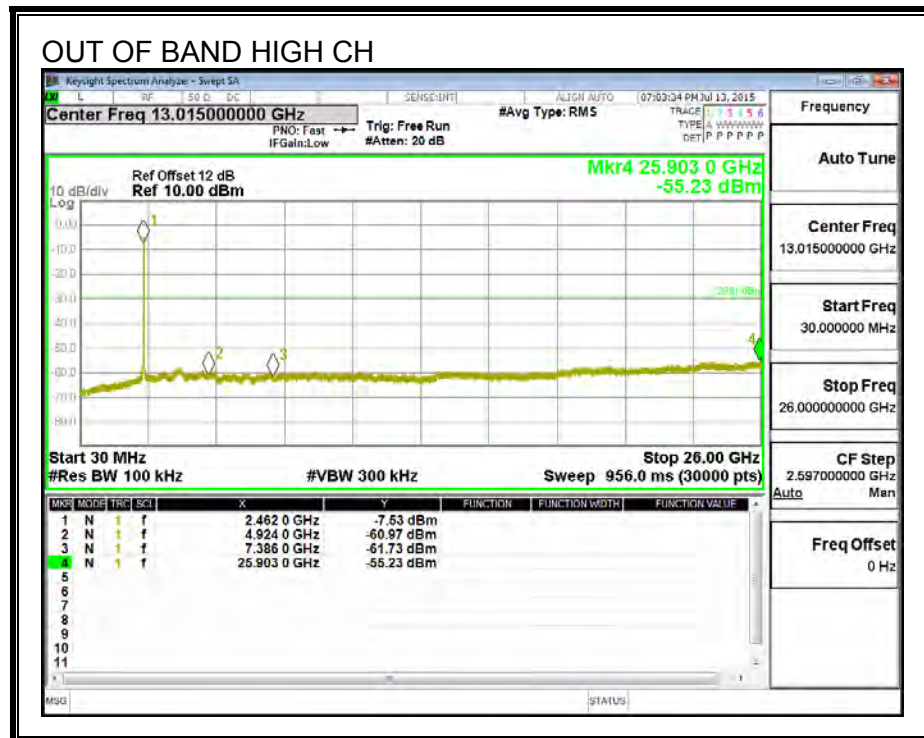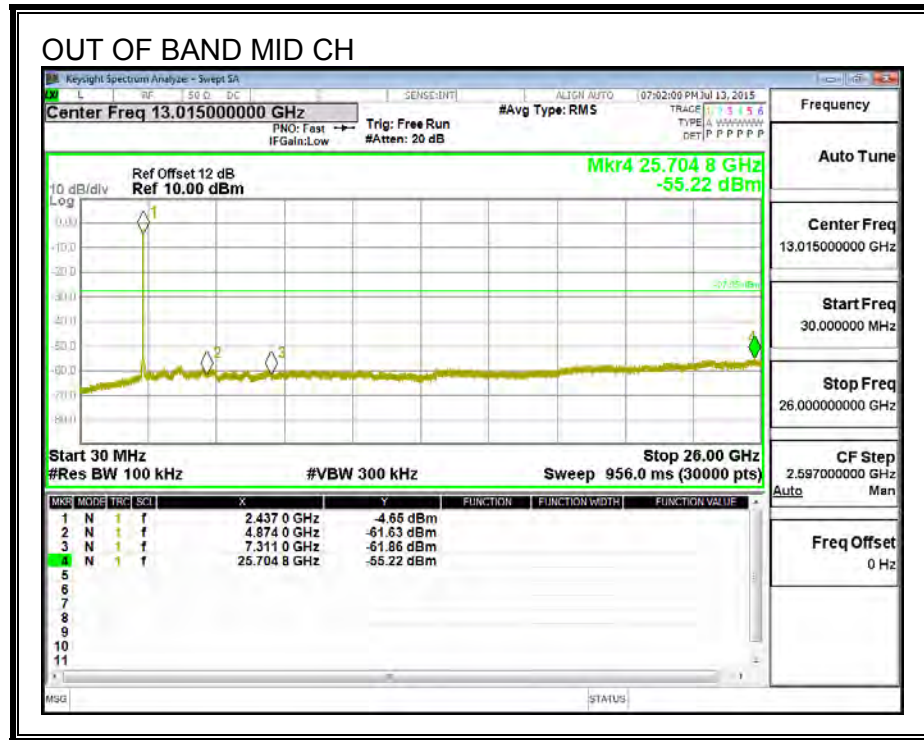

8.8. 802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 1

8.8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2422	35.370	0.5
Mid	2437	36.025	0.5
High	2452	36.300	0.5

6 dB BANDWIDTH

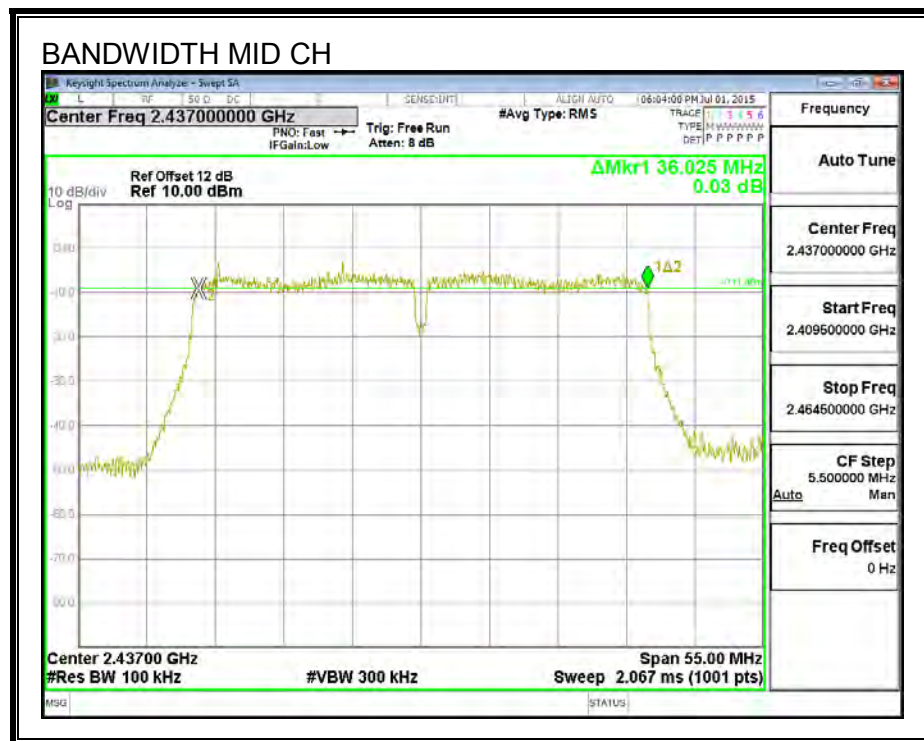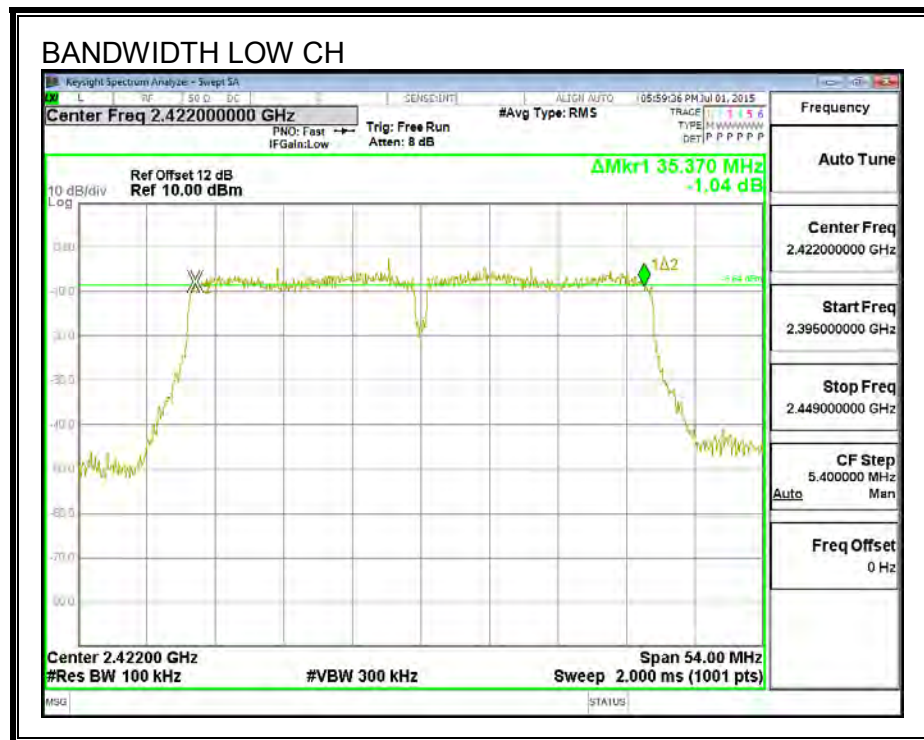

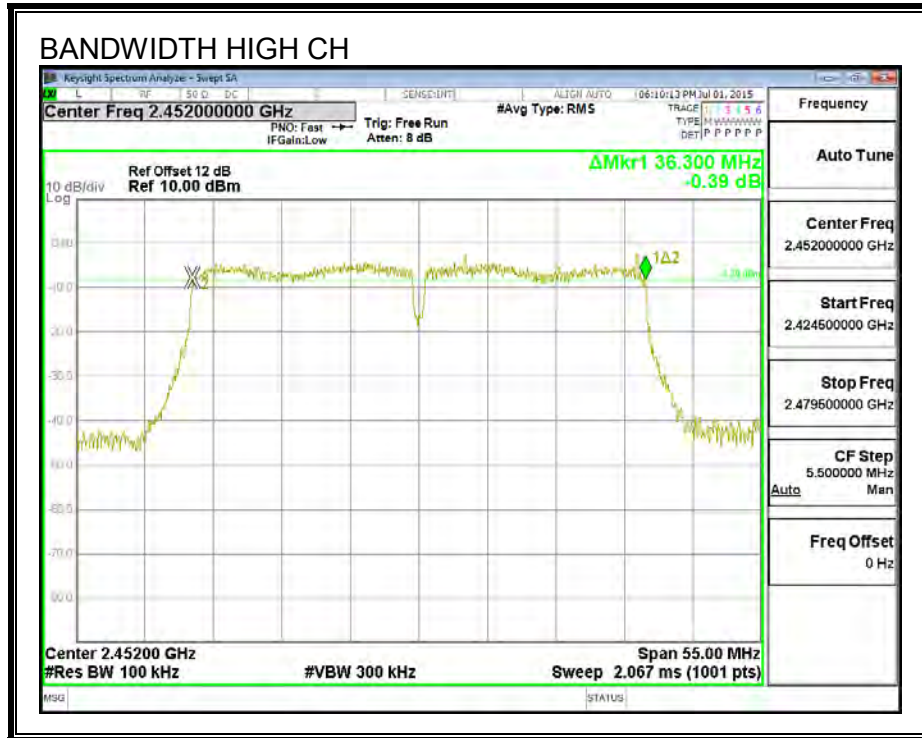

8.8.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	36.2520
Mid	2437	36.1930
High	2452	36.1370

99% BANDWIDTH

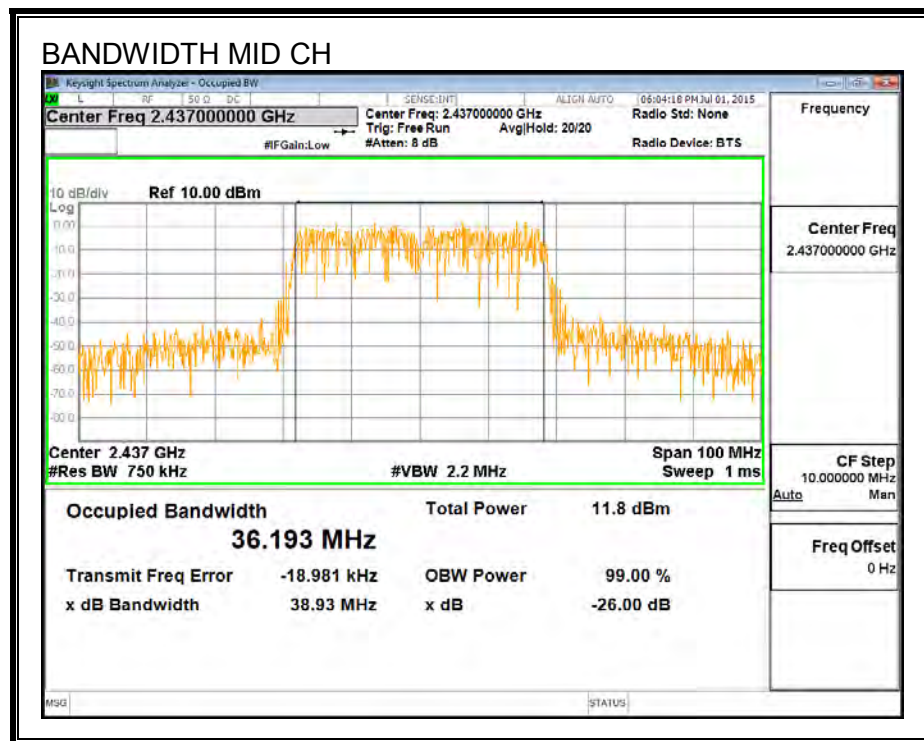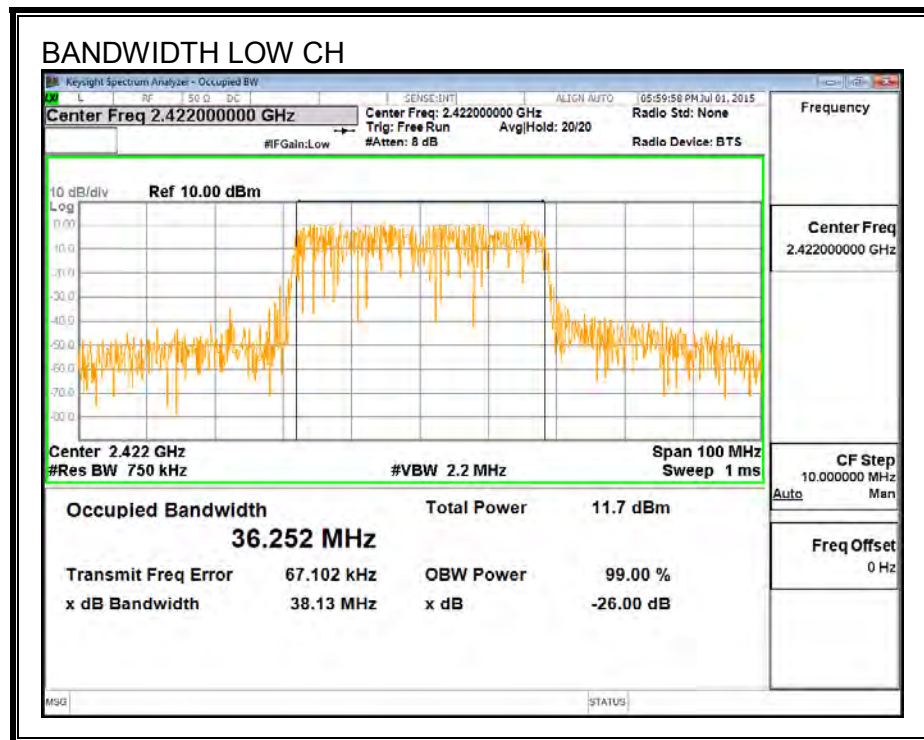

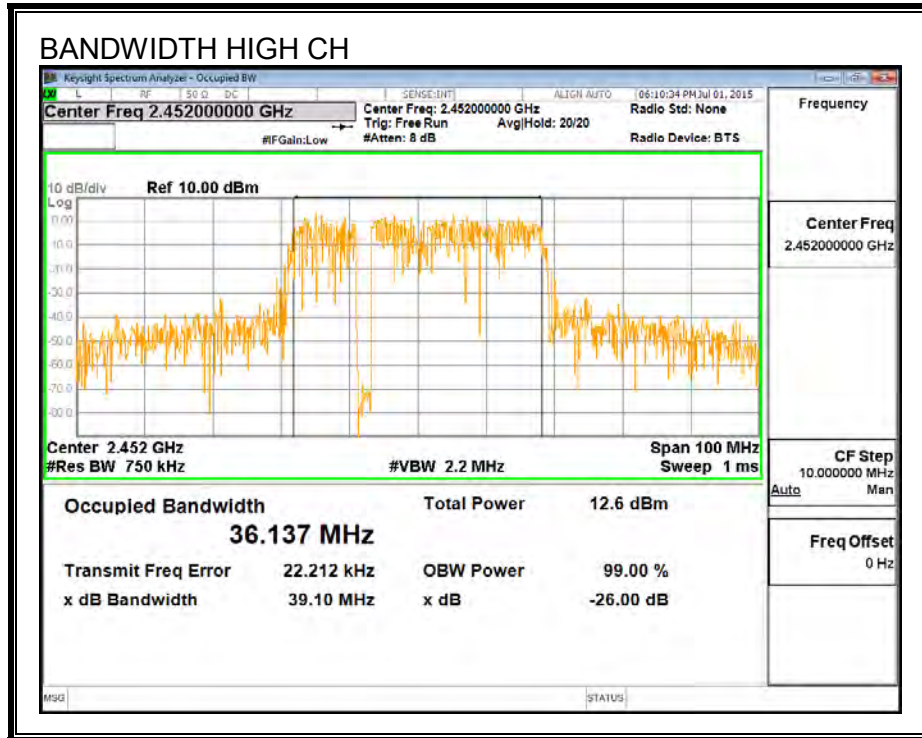

8.8.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2422	3.00	30.00	30	36	30.00
Mid	2437	3.00	30.00	30	36	30.00
High	2452	3.00	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2422	10.06	10.06	30.00	-19.94
Mid	2437	10.28	10.28	30.00	-19.72
High	2452	11.27	11.27	30.00	-18.73

8.8.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.


RESULTS

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Total Corr'd PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2422	-16.10	-16.10	8.0	-24.1
Mid	2437	-15.82	-15.82	8.0	-23.8
High	2452	-14.90	-14.90	8.0	-22.9

PSD, Antenna 1

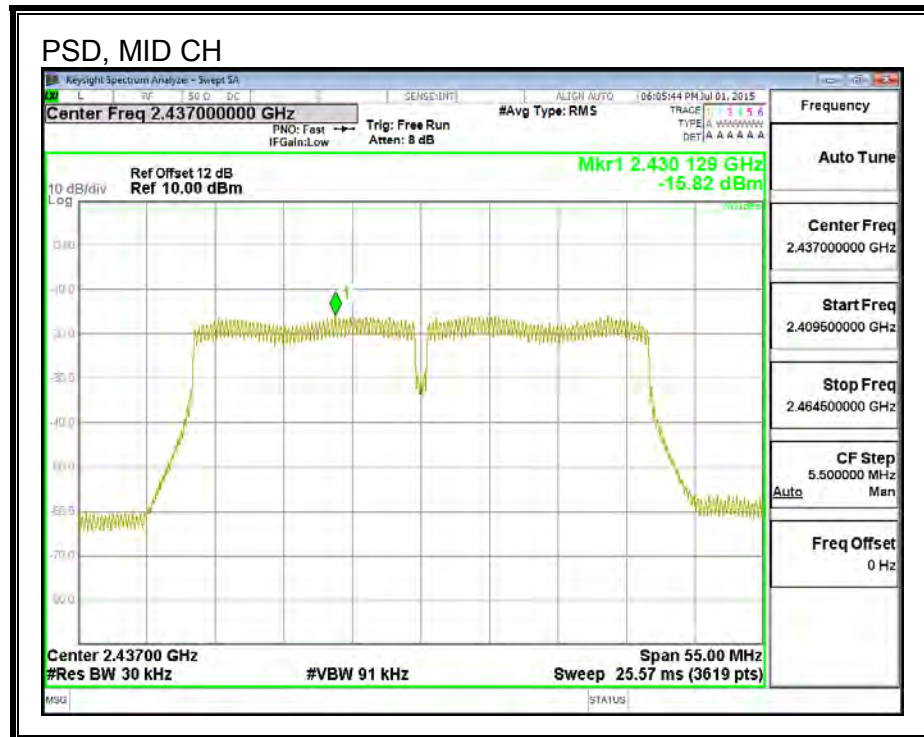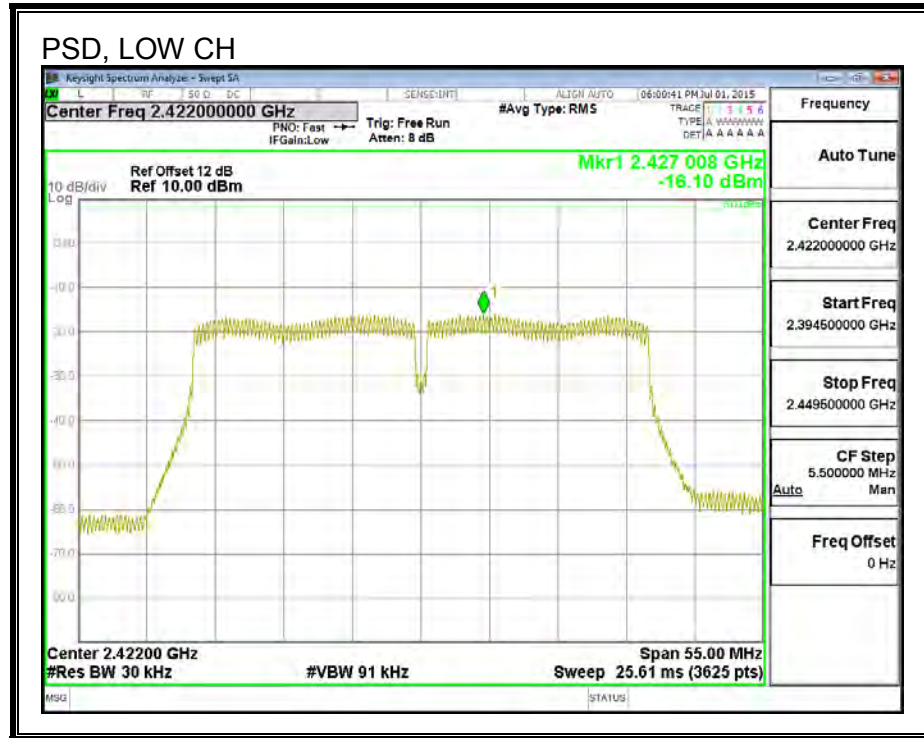

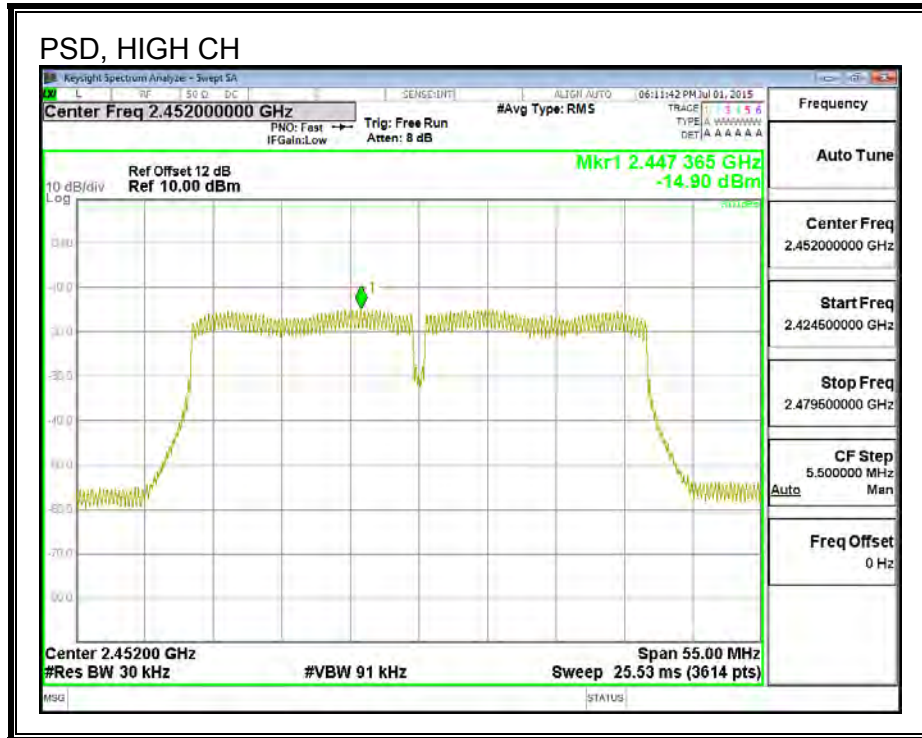

8.8.5. OUT-OF-BAND EMISSIONS

LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

RESULTS


IN-BAND REFERENCE LEVEL

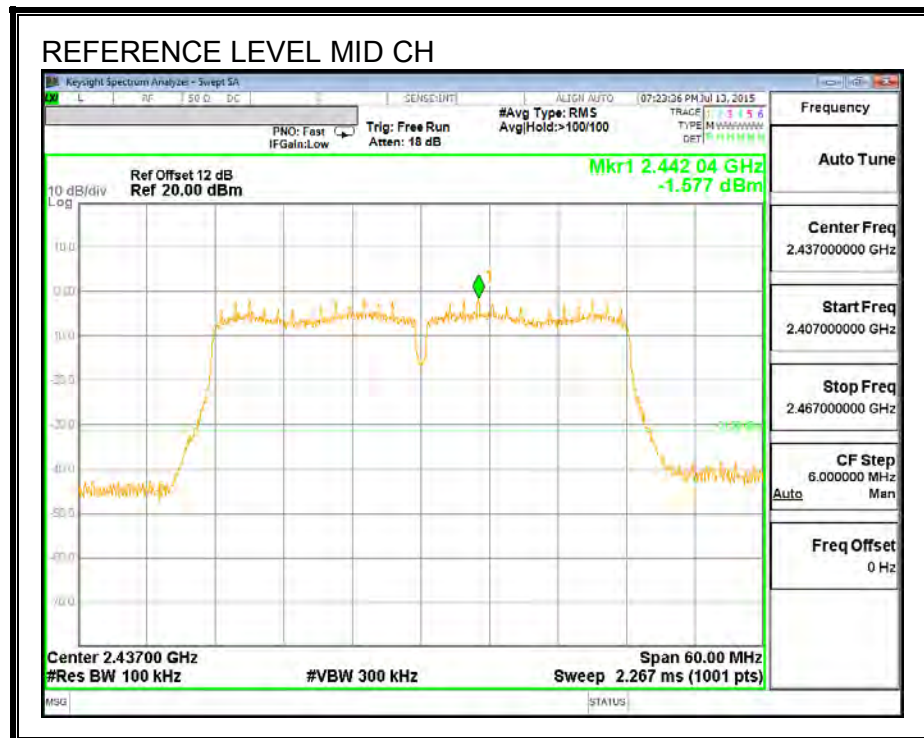


LOW CHANNEL BANDEDGE

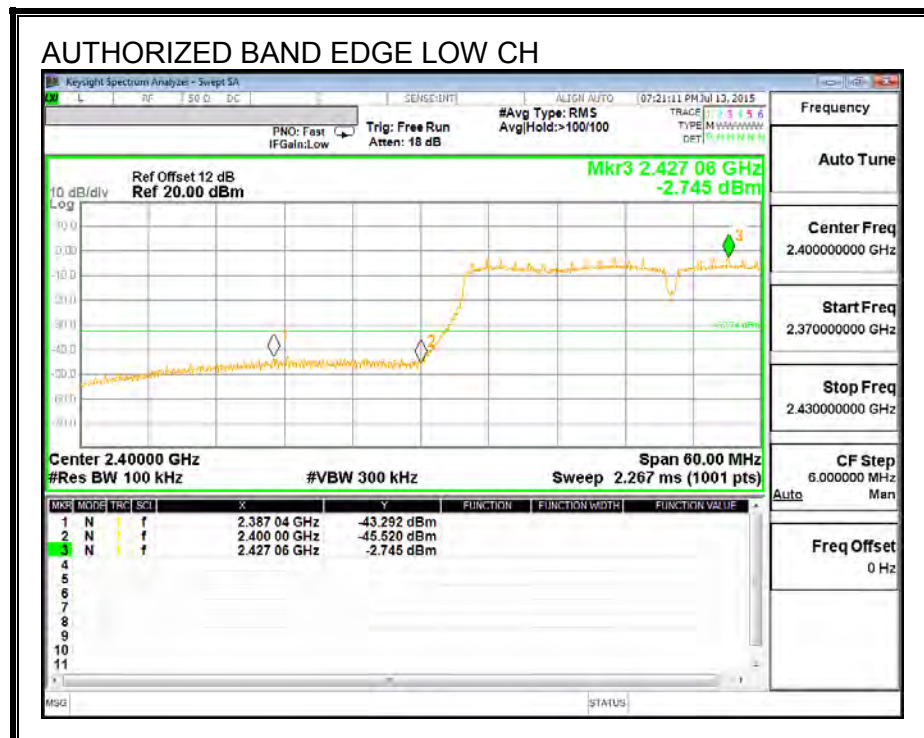


HIGH CHANNEL BANDEDGE

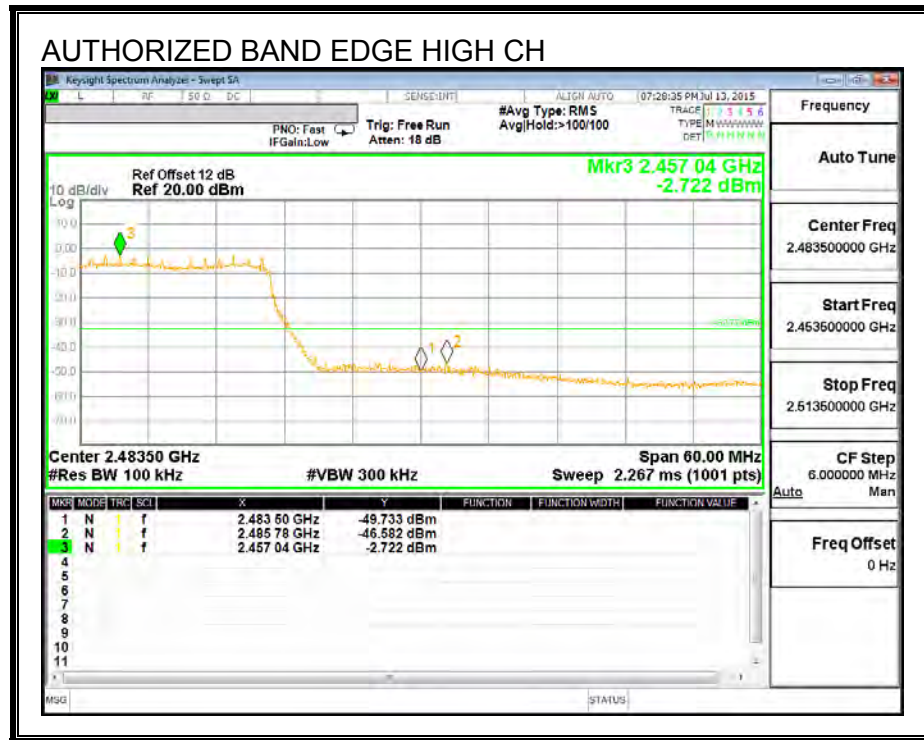


OUT-OF-BAND EMISSIONS

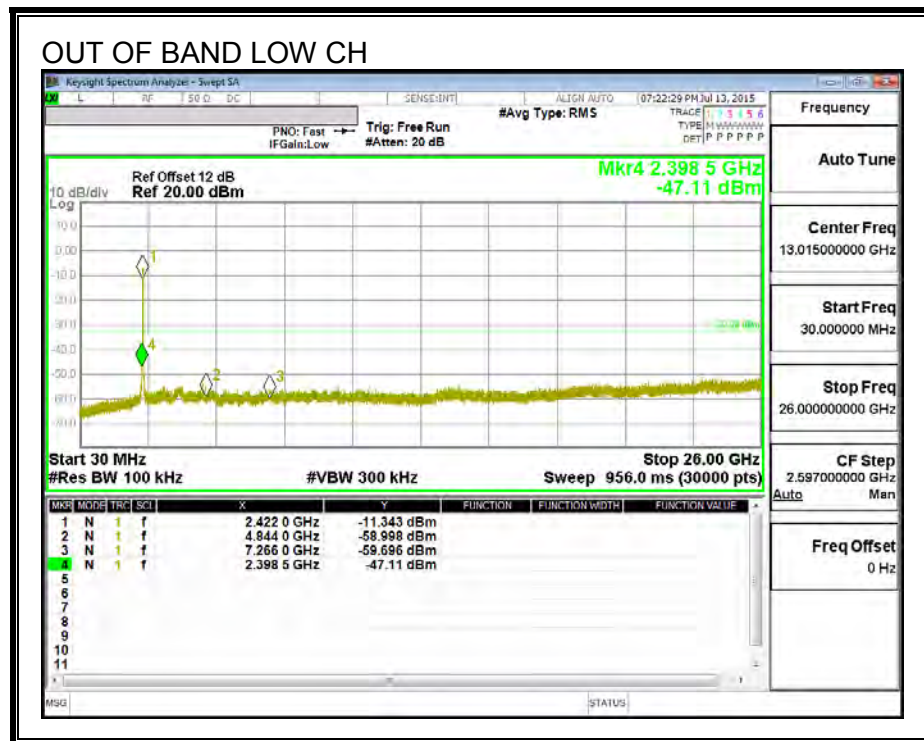

OUT OF BAND MID CH

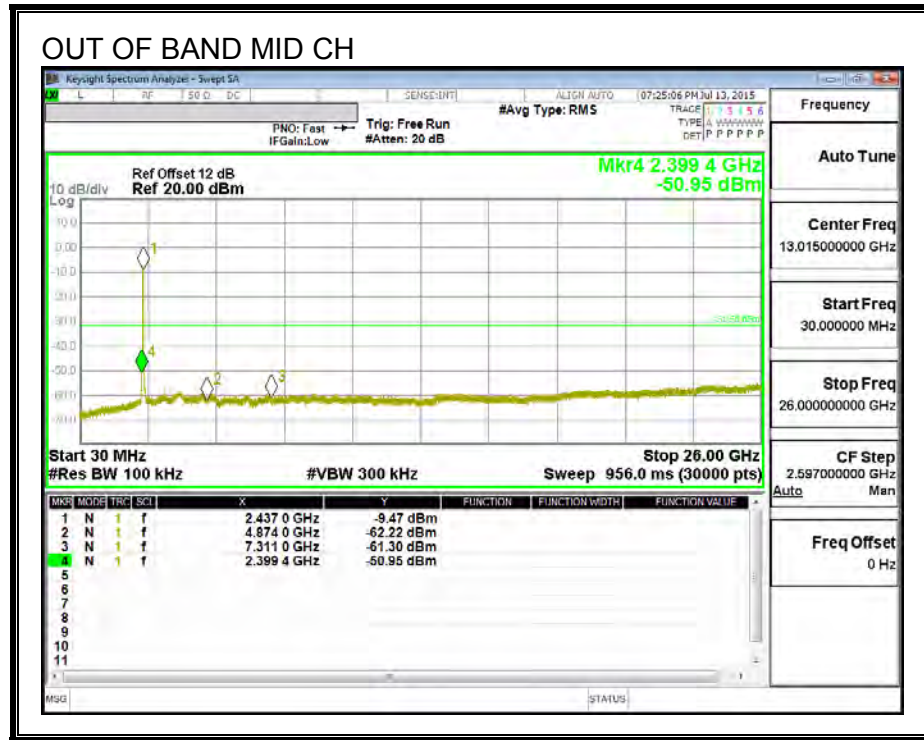

OUT OF BAND HIGH CH

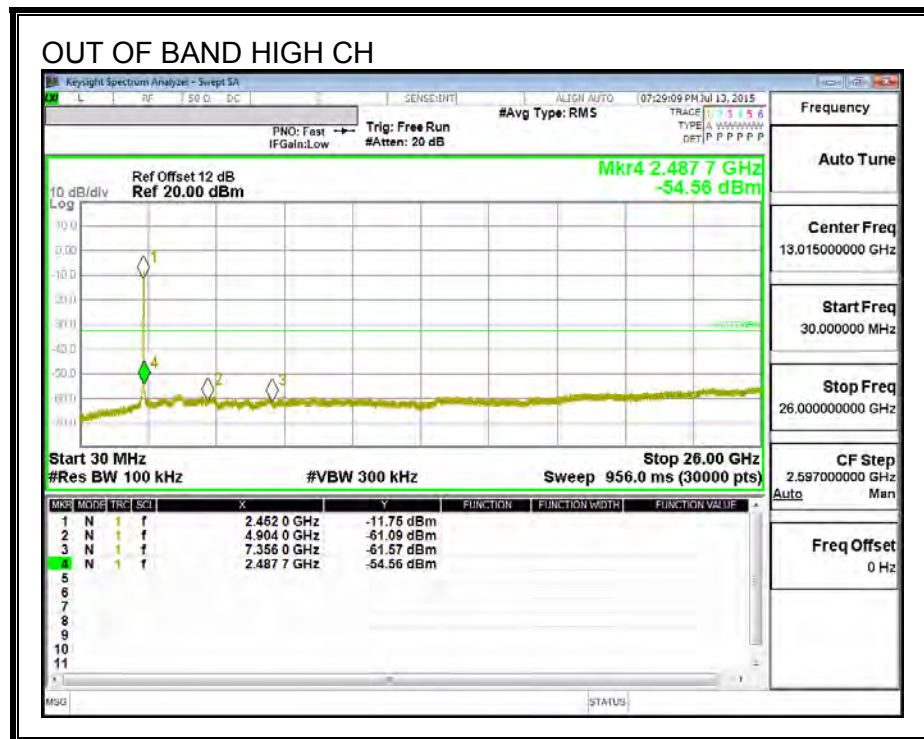

8.9. 802.11n HT40 MODE IN THE 2.4 GHz BAND ANTENNA 2

8.9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2422	36.355	0.5
Mid	2437	36.355	0.5
High	2452	36.300	0.5

6 dB BANDWIDTH

