

Report No.: HR/2020/C000402

Page: 1 of 89

# **FCC TEST REPORT**

**Application No.:** HR/2020/C0004

Applicant: Honor Device Co., Ltd.

**Address of Applicant** Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China

Manufacturer: Honor Device Co., Ltd.

Address of Manufacturer Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China

**Smart Watch EUT Description:** KAN-B39 Model No.:

2AYGCKAN-B39 FCC ID:

**HONOR** Trade Mark:

47 CFR FCC Part 2, Subpart J Standards:

47 CFR Part 15, Subpart C

Date of Receipt: 2020/12/12

Date of Test: 2020/12/12 to 2020/12/24

Date of Issue: 2021/2/22

Test Result: PASS \*

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang Wireless Laboratory Manager





Report No.: HR/2020/C000402

Page: 2 of 89

#### **Version** 1

Revision Record						
Version	Remark					
01		2020-12-24		Original		
02		2021-2-22		Comment Revised		

Authorized for issue by:		
Tested By	Mike Mu  (Mike Hu) /Project Engineer	
Checked By	David Chen  (David Chen) /Reviewer	





Report No.: HR/2020/C000402

3 of 89 Page:

#### 2 **Test Summary**

Test Item	Test Requirement	Test Method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 (2013)	Clause 4.3	PASS
Conducted Peak Output Power	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.4	PASS
20dB Emission Bandwidth & 99% Occupied Bandwidth	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.5	PASS
Carrier Frequencies Separation	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.6	PASS
Hopping Channel Number	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.7	PASS
Dwell Time	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 4.8	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.9	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 4.10	PASS
Radiated Spurious emissions	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	Clause 4.11	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	Clause 4.12	PASS





Report No.: HR/2020/C000402

Page: 4 of 89

### **Contents**

1	Vers	sion		2
2	Test	t Sumn	nary	3
3	Gen	eral In	formation	6
	3.1	De	etails of Client	6
	3.2	Te	st Location	6
	3.3	Te	st Facility	7
	3.4	Ge	eneral Description of EUT	8
	3.5	Te	st Environment	9
	3.6	De	escription of Support Units	9
4	Test	t result	s and Measurement Data	10
	4.1	An	tenna Requirement	10
	4.2	Ot	her requirements Frequency Hopping Spread Spectrum System Ho	pping
	Sec	quence	)	11
		4.2.1	Test Requirement:	11
		4.2.2	Conclusion	11
	4.3	AC	Power Line Conducted Emissions	13
	4.4	Co	onducted Output Power	17
		4.4.1	Test Results	18
		4.4.2	Test Plots	19
	4.5	20	dB Emission Bandwidth & 99% Occupied Bandwidth	28
		4.5.1	Test Results	28
		4.5.2	Test Plots	29
	4.6	Ca	arrier Frequencies Separationy	39
		4.6.1	Test Results	40
		4.6.2	Test Plots	41
	4.7	Ho	pping Channel Number	43
		4.7.1	Test Results	43
		4.7.2	Test Plots	44
	4.8	Dv	vell Time	46
		4.8.1	Test Results	47
		4.8.2	Test Plots	48
	4.9	Ba	and-edge for RF Conducted Emissions	53





Report No.:	HR/2020/C000402
-------------	-----------------

Page:	5 of 89

	4.9.1 Test Plots	54
	4.10 Spurious RF Conducted Emissions	61
	4.10.1 Test Plots	62
	4.11 Radiated Spurious Emissions	68
	4.11.1 Transmitter Emission above 1GHz	71
	4.12 Restricted bands around fundamental frequency	79
	4.12.1 Test Plots	81
	4.12.1	81
5	Measurement Uncertainty (95% confidence levels, k=2)	85
6	Equipment List	86
7	Photographs - EUT Constructional Details	89





Report No.: HR/2020/C000402

6 of 89 Page:

#### 3 **General Information**

### 3.1 Details of Client

Applicant:	Honor Device Co., Ltd.
Address of Applicant	Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China
Manufacturer:	Honor Device Co., Ltd.
Address of Manufacturer	Shum Yip Sky Park, No. 8089, Hongli West Road, Shenzhen, Guangdong, China

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057





Report No.: HR/2020/C000402

7 of 89 Page:

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.





Report No.: HR/2020/C000402

8 of 89 Page:

## 3.4 General Description of EUT

EUT Description:	Smart Watch
Model No.:	KAN-B39
Trade Mark:	HONOR
Hardware Version:	Ajc8ac
Software Version:	10.1.2.52SP1
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 0 to 39.
Bluetooth version:	Bluetooth V5.1 LE
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	□ Portable Device, □ Module
Antenna Type:	☐ External, ☑ Integrated
Antenna Gain:	-5.2dBi
Power Supply	☐ AC/DC Adapter; ☐ Battery ☐ PoE:; ☐ Other:

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: HR/2020/C000402

9 of 89 Page:

16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

#### Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH39)	2441MHz
The Highest channel(CH78)	2480MHz

#### 3.5 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	101.30 KPa	

## 3.6 Description of Support Units

The EUT has been tested independent unit.





Report No.: HR/2020/C000402

10 of 89 Page:

### **Test results and Measurement Data**

### 4.1 Antenna Requirement

47 CFR Part 15C Section 15.203 /247(c) Standard requirement:

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -5.2dBi.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, \*\*Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: HR/2020/C000402

Page: 11 of 89

# 4.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

### 4.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

#### 4.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- > Number of shift register stages: 9
- > Length of pseudo-random sequence: 29 -1 = 511 bits
- > Longest sequence of zeros: 8 (non-inverted signal)


Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com

中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: HR/2020/C000402

Page: 12 of 89

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the RF system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, \*\*Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: HR/2020/C000402

13 of 89 Page:

### 4.3 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2013			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Frequency range (MHz)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the log	arithm of the frequency.		
Test Procedure:	The mains terminal coroom.	listurbance voltage test was	conducted in a shielded	
	<ul> <li>room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ul>			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck-Rigas.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: HR/2020/C000402

14 of 89 Page:

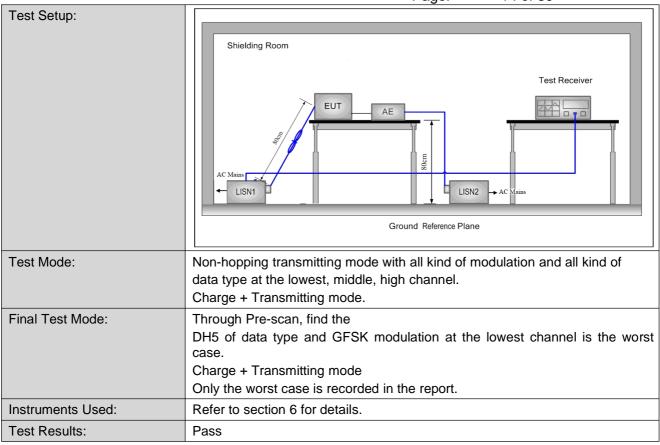



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excense parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention:\*\*To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, \*\*Totalogne in the content of the cont

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房



Report No.: HR/2020/C000402


15 of 89 Page:

#### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

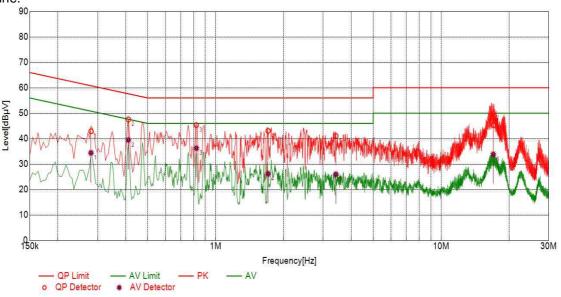

#### **Test Graph**

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dΒμV]	QP Margin [dB]	AV Value [dBµV]	ΑV Limit [dBμV]	AV Margin [dB]	Туре
1	0.2804	10.10	42.91	60.80	17.89	34.41	50.80	16.39	L
2	0.4110	10.10	47.57	57.63	10.06	39.47	47.63	8.16	L
3	0.8218	10.10	45.34	56.00	10.66	36.23	46.00	9.77	L
4	1.7091	10.10	43.04	56.00	12.96	26.21	46.00	19.79	L
5	3.4159	10.10	41.05	56.00	14.95	25.98	46.00	20.02	L
6	17.0238	10.11	45.26	60.00	14.74	33.85	50.00	16.15	L



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*To except the authenticity of testing inspection report & certificate. Descet tours at telephone: (86-755) 8397 1443, \*\*Attention:\*Tourise the content of the content of the content of the such unless otherwise stated the results at the phone: (86-755) 8397 1443, \*\*Tourise of the content of the

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594


sgs.china@sgs.com



Report No.: HR/2020/C000402

Page: 16 of 89



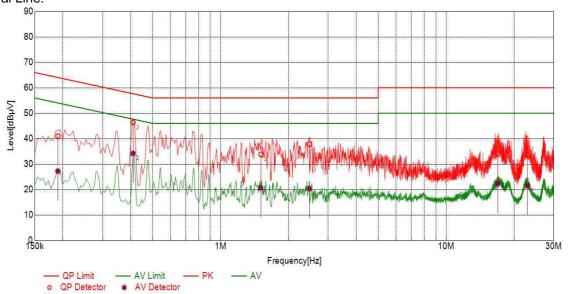

#### **Test Graph**

Final	Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	ΑV Limit [dBμV]	AV Margin [dB]	Туре
1	0.1901	10.10	41.00	64.03	23.03	27.21	54.03	26.82	N
2	0.4097	10.10	46.35	57.65	11.30	34.20	47.65	13.45	N
3	1.5080	10.10	33.81	56.00	22.19	20.59	46.00	25.41	N
4	2.4776	10.10	37.82	56.00	18.18	20.30	46.00	25.70	N
5	16.9305	10.11	33.96	60.00	26.04	22.39	50.00	27.61	N
6	22.9583	10.11	33.41	60.00	26.59	21.58	50.00	28.42	N

#### Remarks:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clients instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing inspection report & certificate, be passe contact us at telephone. (86-755) 8307 1443.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: HR/2020/C000402

17 of 89 Page:

## 4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.5		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6 for details		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.		
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.		
Limit:	(20.97dBm) 125mW		
Test Results:	Pass		





Report No.: HR/2020/C000402

18 of 89 Page:

#### 4.4.1 **Test Results**

#### Measurement Data of Peak Power

Measurement Data of Peak Power:						
GFSK mode						
Test Channel	Peak Output Power (dBm)	Peak Output Power (dBm) Limit (dBm)				
Lowest	11.03	20.97	Pass			
Middle	11.30	20.97	Pass			
Highest	11.25	20.97	Pass			
	π/4DQP	SK mode				
Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	10.19	20.97	Pass			
Middle	10.11	20.97	Pass			
Highest	10.25	20.97	Pass			
	8DPSI	K mode				
Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	10.22	20.97	Pass			
Middle	10.15	20.97	Pass			
Highest	10.31	20.97	Pass			






Report No.: HR/2020/C000402

19 of 89 Page:

#### 4.4.2 **Test Plots**

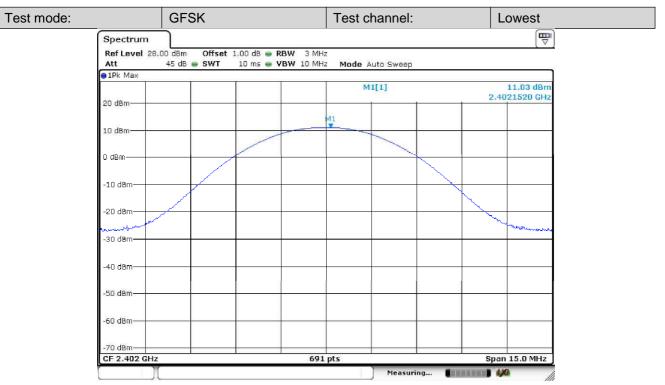


Date: 24 DEC 2020 09:07:22





Report No.: HR/2020/C000402

Page: 20 of 89

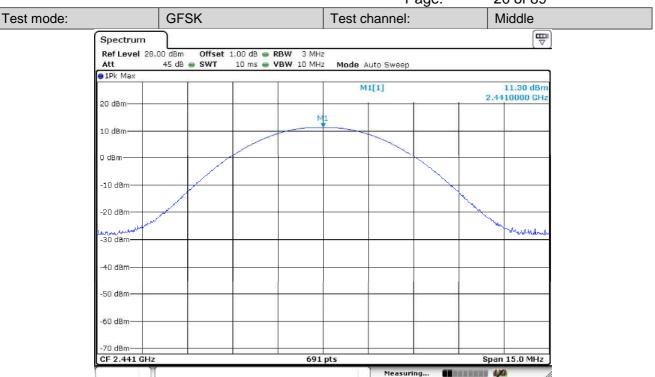


Date: 24.DEC.2020 09:10:20





Report No.: HR/2020/C000402

Page: 21 of 89

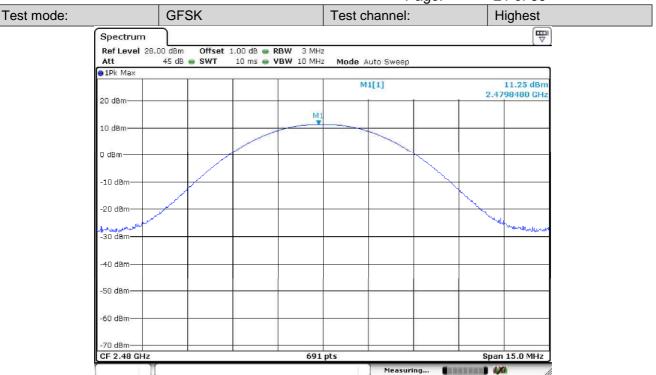


Date: 24.DEC.2020 09:11:31





Report No.: HR/2020/C000402

Page: 22 of 89

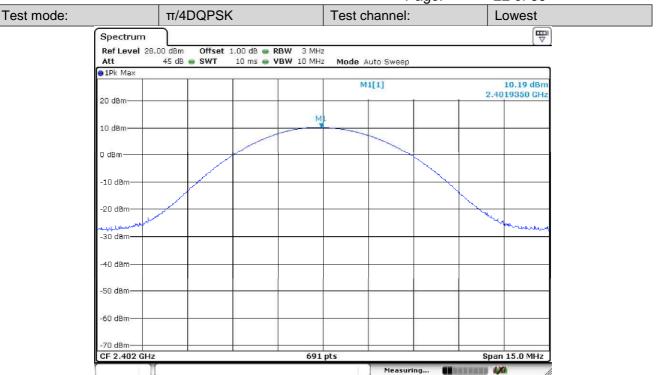


Date: 24.DEC.2020 09:12:57





Report No.: HR/2020/C000402

Page: 23 of 89

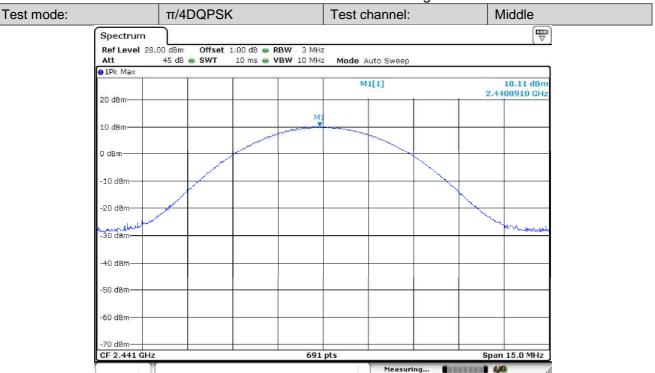


Date: 24.DEC.2020 09:15:53





Report No.: HR/2020/C000402

Page: 24 of 89

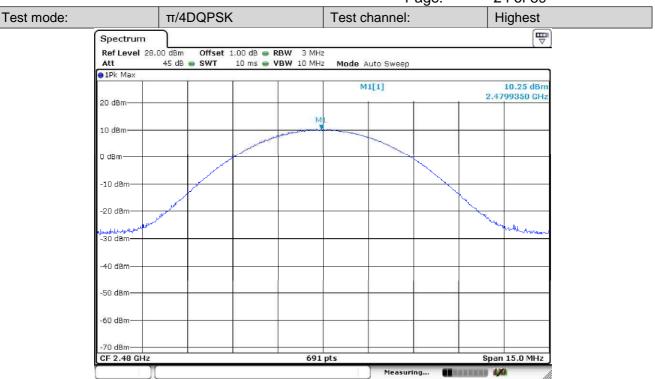


Date: 24.DEC.2020 09:16:26





Report No.: HR/2020/C000402

Page: 25 of 89

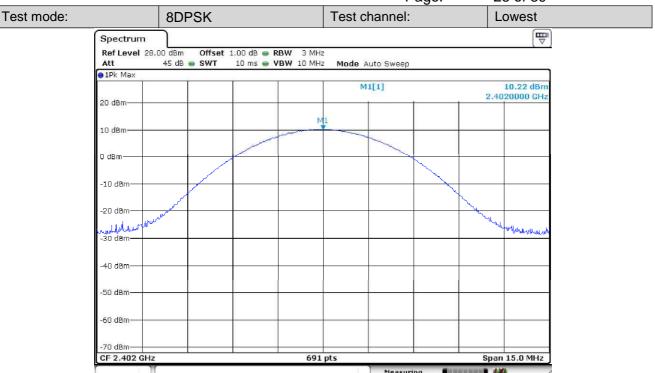


Date: 24 DEC 2020, 09:16:58





Report No.: HR/2020/C000402

Page: 26 of 89

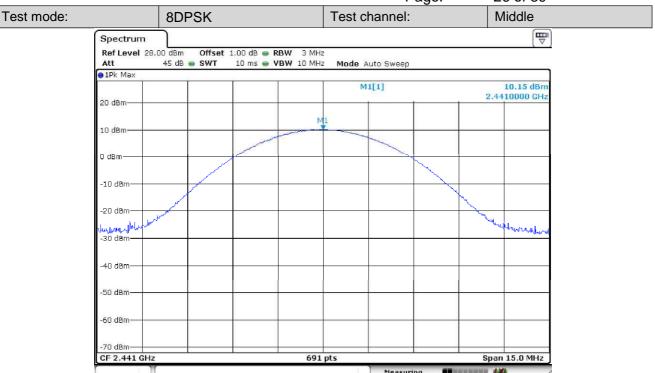


Date: 24 DEC 2020, 09:17:43





Report No.: HR/2020/C000402

Page: 27 of 89

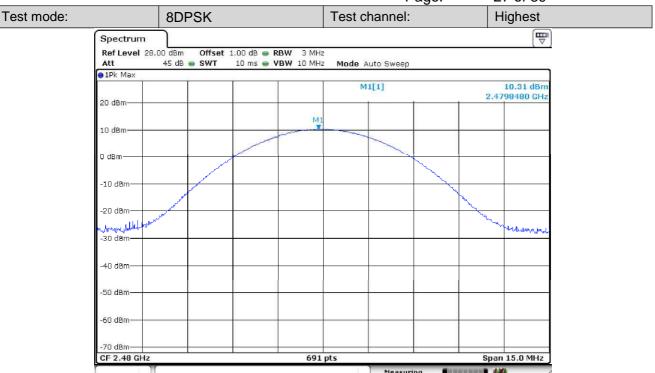

Date: 24.DEC.2020 09:18:56






Report No.: HR/2020/C000402

28 of 89 Page:

## 4.5 20dB Emission Bandwidth & 99% Occupied Bandwidth

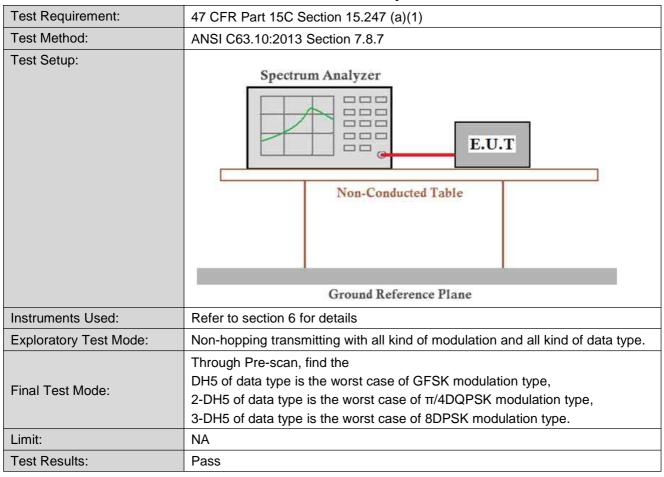

#### **Test Results** 4.5.1

Mode	Test Channel	99% Occupied Bandwidth (KHz)	20dB Emission Bandwidth (KHz)	Result
	Lowest	859.6	955.1	Pass
GFSK	Middle	859.6	955.1	Pass
	Highest	855.3	955.1	Pass
	Lowest	1159.2	1276.4	Pass
π/4DQPSK	Middle	1159.2	1276.4	Pass
	Highest	1159.2	1280.8	Pass
	Lowest	1163.5	1280.8	Pass
8DPSK	Middle	1167.9	1285.1	Pass
	Highest	1163.5	1285.1	Pass






Report No.: HR/2020/C000402

29 of 89 Page:

#### 4.5.2 **Test Plots**

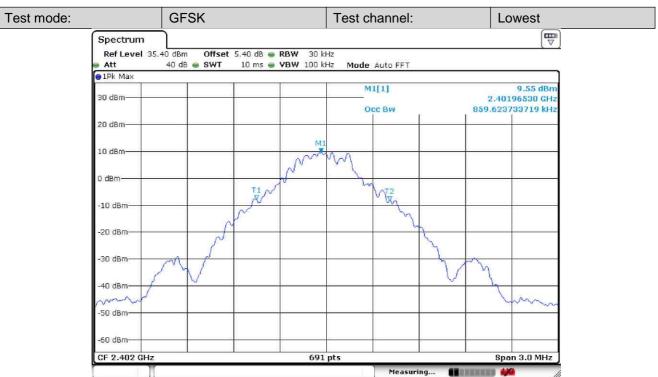


Date: 16.DEC.2020 09:37:48





Report No.: HR/2020/C000402

30 of 89 Page:

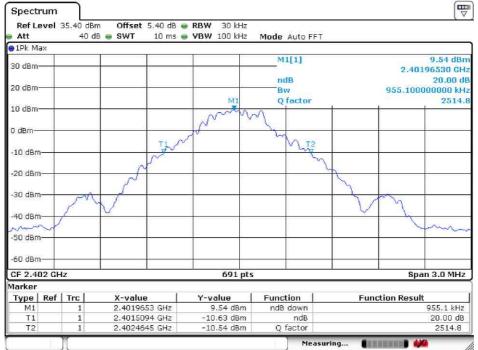


Date: 16.DEC.2020 09:37:56





Report No.: HR/2020/C000402

31 of 89 Page:

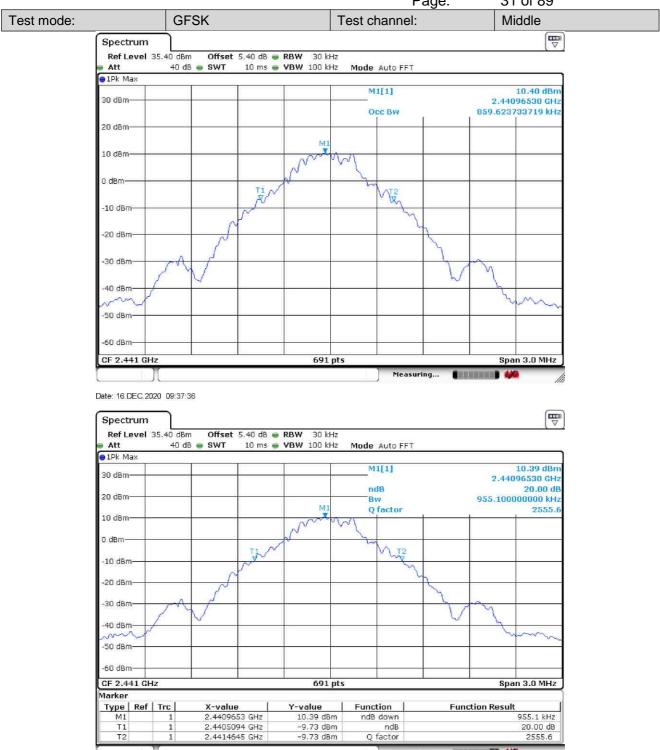


Date: 16 DEC 2020 09:37:28





Report No.: HR/2020/C000402

32 of 89 Page:

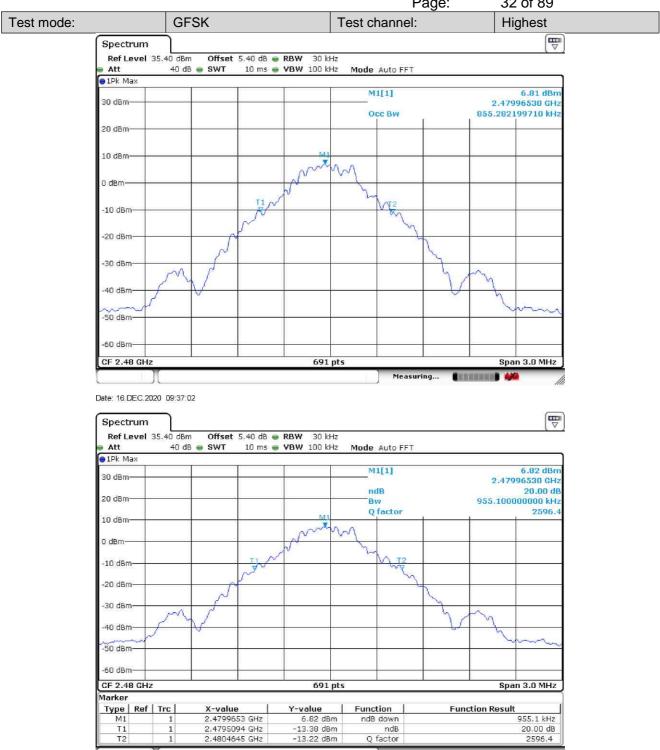


Date: 16.DEC.2020 09:37:13





Report No.: HR/2020/C000402

33 of 89 Page:

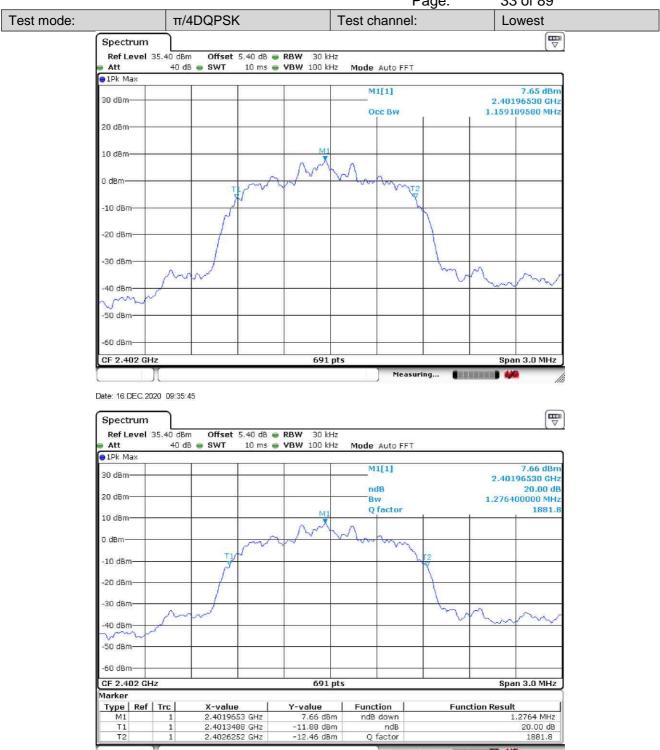


Date: 16.DEC.2020 09:35:37





Report No.: HR/2020/C000402

34 of 89 Page:

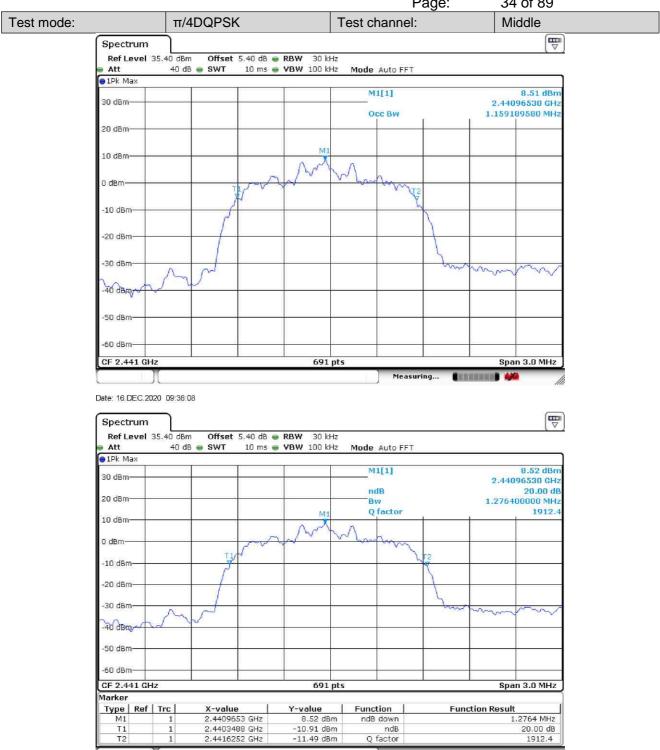

Date: 16.DEC.2020 09:36:16





Report No.: HR/2020/C000402

35 of 89 Page:




Date: 16 DEC 2020 09:36:28





Report No.: HR/2020/C000402

Page: 36 of 89

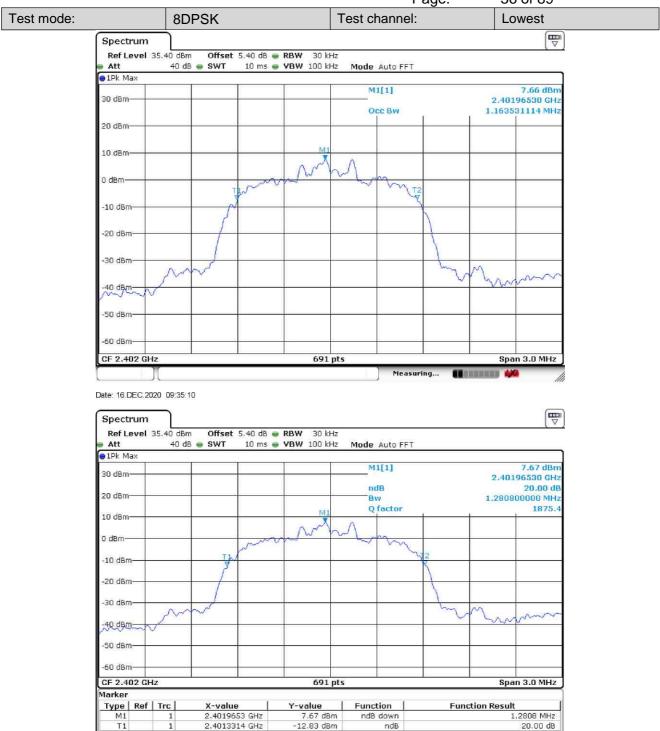

Date: 16.DEC.2020 09:35:22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

Q factor

Measuring...

1875.4


-12.20 dBm

2,4026122 GHz



Report No.: HR/2020/C000402

37 of 89 Page:

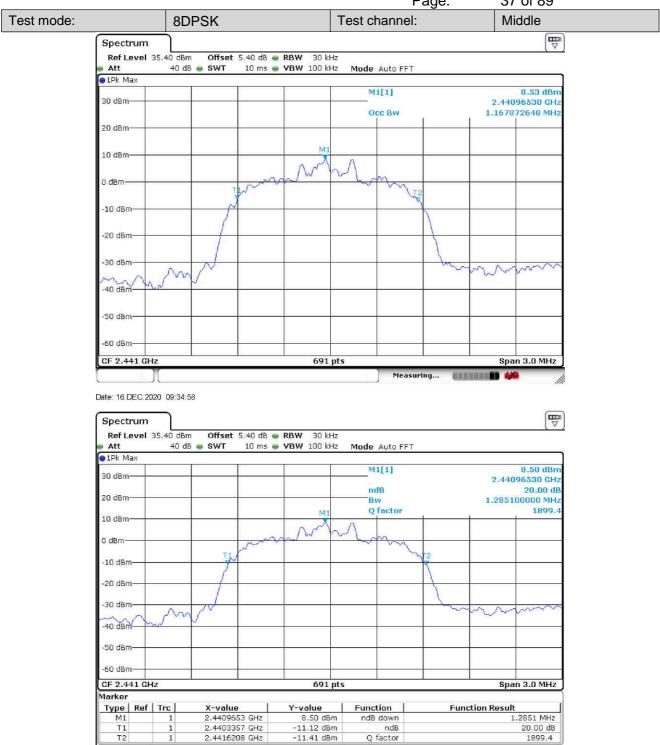

Date: 16.DEC.2020 09:34:50



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

Measuring...



Report No.: HR/2020/C000402

38 of 89 Page:

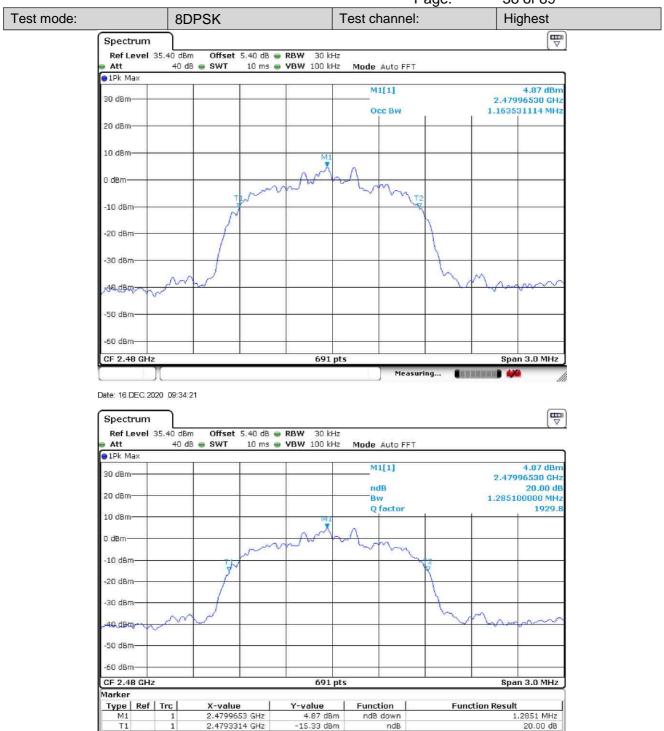

Date: 16.DEC.2020 09:34:37



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

Q factor

Measuring...

-15.04 dBm

2,4806165 GHz

1929.8



Report No.: HR/2020/C000402

Page: 39 of 89

### 4.6 Carrier Frequencies Separationy

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2013 Section 7.8.2				
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane				
Test Instruments:	Refer to section 6 for details				
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.				
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.				
Limit:	2/3 of the 20dB bandwidth				
	Remark: the transmission power is less than 0.125W.				
Test Results:	Pass				





Report No.: HR/2020/C000402

40 of 89 Page:

#### 4.6.1 **Test Results**

GFSK mode							
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result				
Middle	1003	636.7	PASS				
	π/4DQPSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result				
Middle	1003	853.9	PASS				
	8DPSF	K mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result				
Middle	1003	856.7	PASS				

Remark: According to section 6.4.

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	955.1	636.7
π/4DQPSK	1280.8	853.9
8DPSK	1285.1	856.7






Report No.: HR/2020/C000402

Page: 41 of 89

### 4.6.2 Test Plots

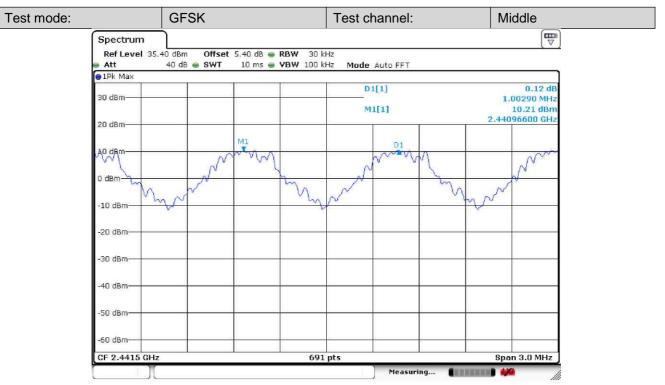


Date: 16.DEC.2020 09:51:57






Report No.: HR/2020/C000402

42 of 89 Page:

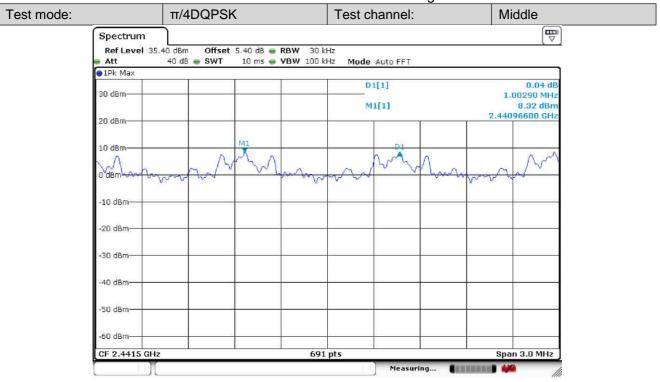

Date: 16.DEC.2020 09:52:29

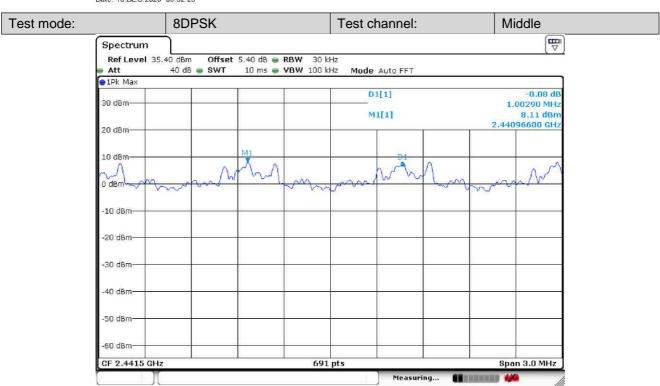

Date: 16.DEC.2020 09:52:45






Report No.: HR/2020/C000402

43 of 89 Page:

### 4.7 Hopping Channel Number

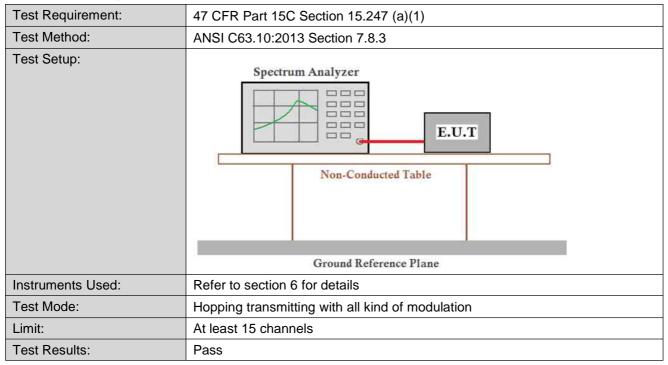

#### 4.7.1 **Test Results**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15






Report No.: HR/2020/C000402

Page: 44 of 89

### 4.7.2 Test Plots

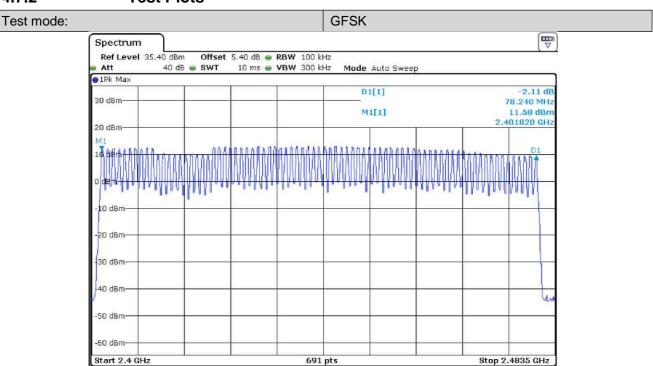


Date: 16.DEC.2020 09:56:22






Report No.: HR/2020/C000402

45 of 89 Page:

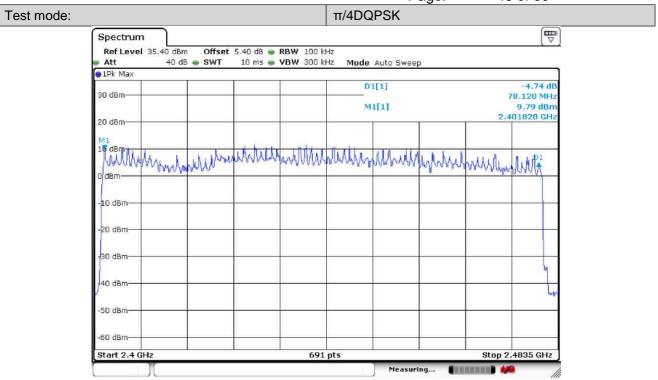

Date: 16 DEC 2020 09:55:22

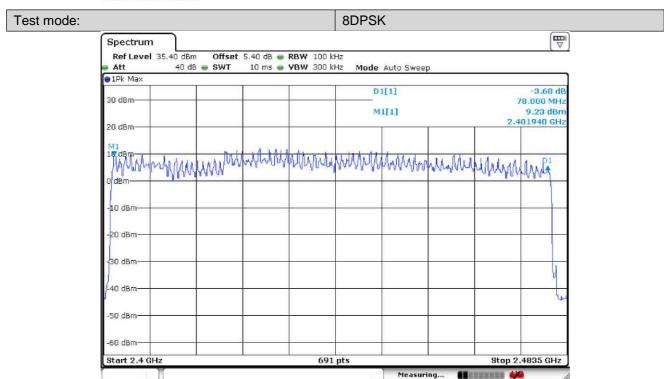

Date: 16 DEC 2020 09:54:37





Report No.: HR/2020/C000402

Page: 46 of 89

### 4.8 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2013 Section 7.8.4				
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane				
Instruments Used:	Refer to section 6 for details				
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.				
Limit:	0.4 Second				
Test Results:	Pass				





Report No.: HR/2020/C000402

47 of 89 Page:

#### **Test Results** 4.8.1

Operation Modes	On time (ms) on one channel
DH1	0.382
DH3	1.655
DH5	2.899
2-DH1	0.392
2-DH3	1.651
2-DH5	2.906
3-DH1	0.391
3-DH2	1.659
3-DH5	2.928

### **Bluetooth Time of Occupancy Calculation**

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s, since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of 1600/6=266.67 hops/slot

400ms x 79 Channel = 31.6 s (Time of Occupancy Limit)

Worst case BT has 266.67 hops/second (for 1x/EDR modes with 3-DH5 operation)

266.67 hops/second/79 channels=3.38 hops/second (# of hops/second on one channel)

3.38 hops/second/channel\*31.6seconds=106.67 hops (#hops over a 31.6 second period)

106.67 hops \*2.928 ms/channel =312.33 ms(worst case dwell time for one channel in 1x/EDR

### modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800hops/s, AFH mode also uses 6 slots so the Bluetooth transmitter hops at a rate of 800/6=133.3 hops/s/slot

400ms x 20 Channel = 8 s (Time of Occupancy Limit)

Worst case BT has 133.3 hops/second/slot (for AFH mode with 3-DH5 operation)

133.3 hops/second/20 channels=6.67 hops/second (#hops/second on one channel)

6.67 hops/second \*8seconds=53.34 hops (#hops over a 8 seconds period)

53.34 hops x2.928 ms/channel=156.18 ms(worst case dwell time for one channel in AFH mode)






Report No.: HR/2020/C000402

Page: 48 of 89

### 4.8.2 Test Plots

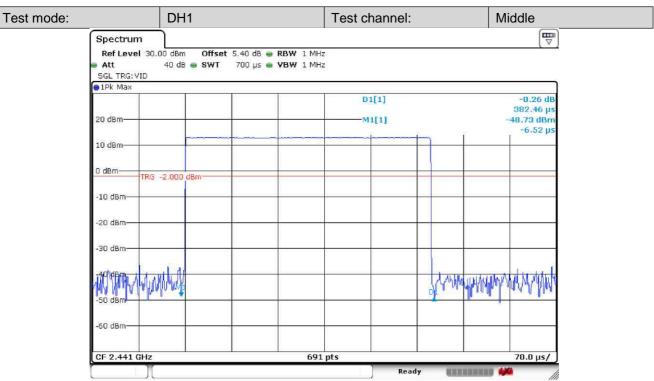


Date: 16.DEC.2020 09:59:41






Report No.: HR/2020/C000402

49 of 89 Page:

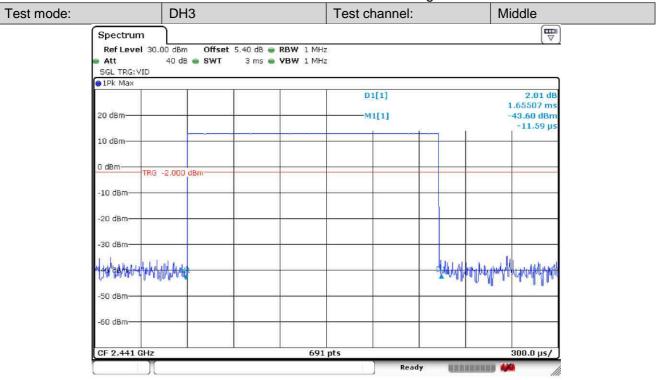

Date: 16 DEC 2020 09:59:21

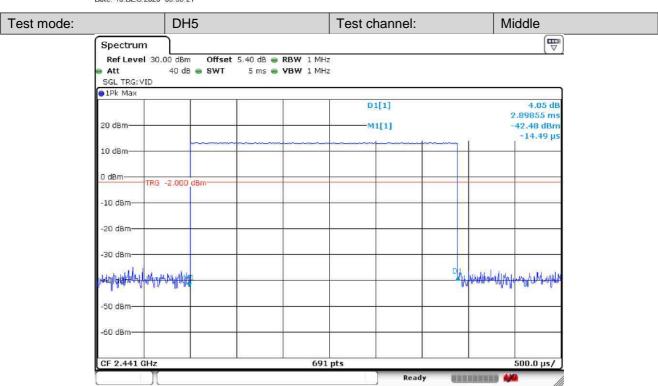

Date: 16.DEC.2020 09:57:12



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




Report No.: HR/2020/C000402

Page: 50 of 89

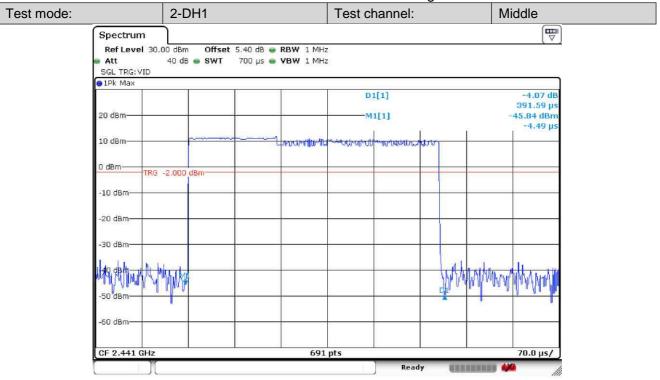

Date: 16.DEC.2020 10:00:03

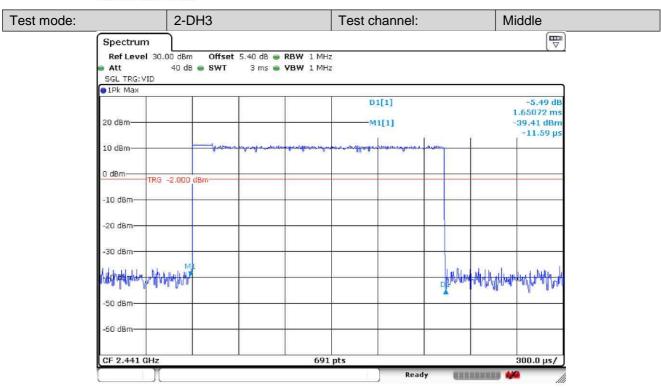


Date: 16.DEC.2020 09:59:02






Report No.: HR/2020/C000402

51 of 89 Page:

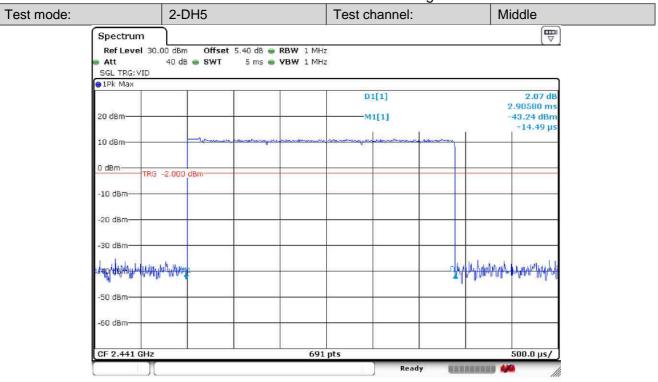

Date: 16 DEC 2020 09:57:39

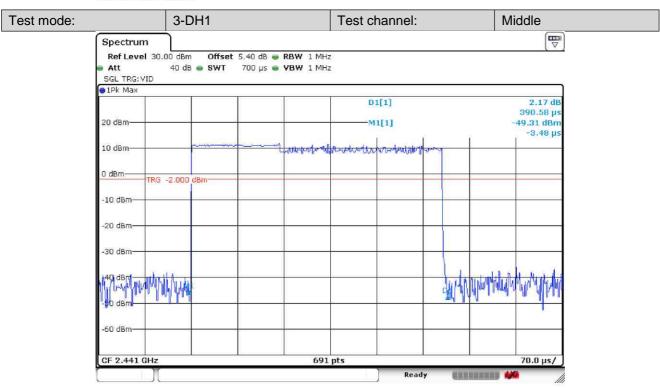

Date: 16 DEC 2020 10:00:20



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




Report No.: HR/2020/C000402

52 of 89 Page:

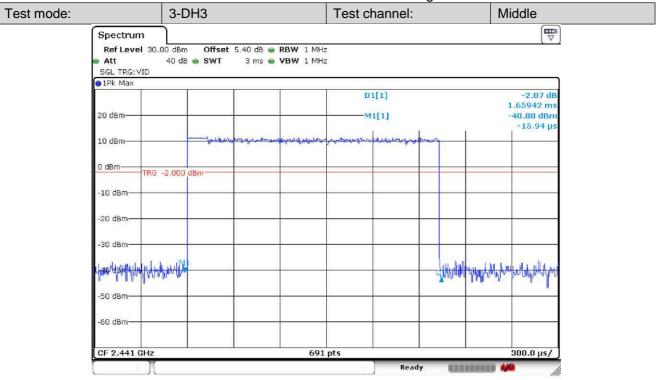

Date: 16 DEC 2020 09:58:46

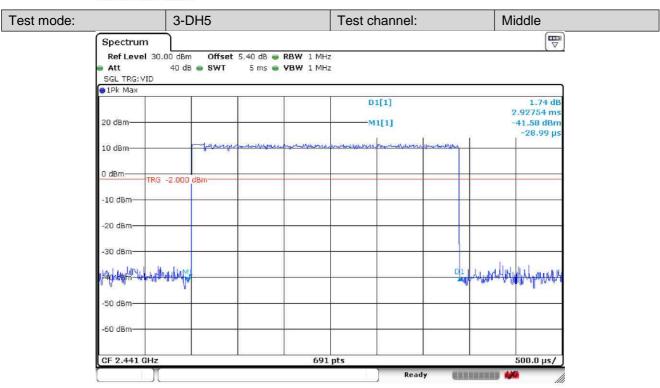

Date: 16.DEC.2020 09:57:59



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: HR/2020/C000402

53 of 89 Page:

### 4.9 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013 Section 7.8.6				
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane				
Instruments Used:	Refer to section 6 for details				
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type.				
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Results:	Pass				






Report No.: HR/2020/C000402

54 of 89 Page:

#### 4.9.1 **Test Plots**

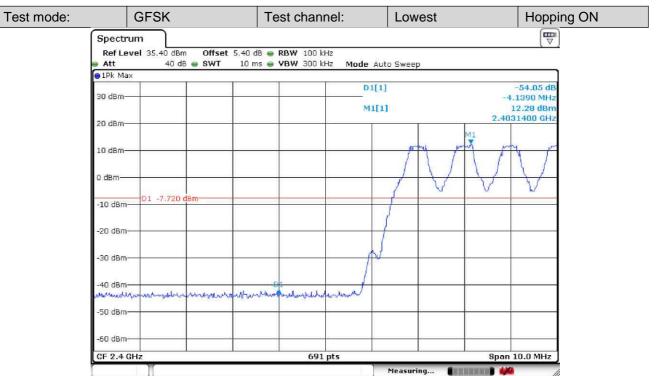


Date: 16 DEC 2020 09:51:20






Report No.: HR/2020/C000402

55 of 89 Page:

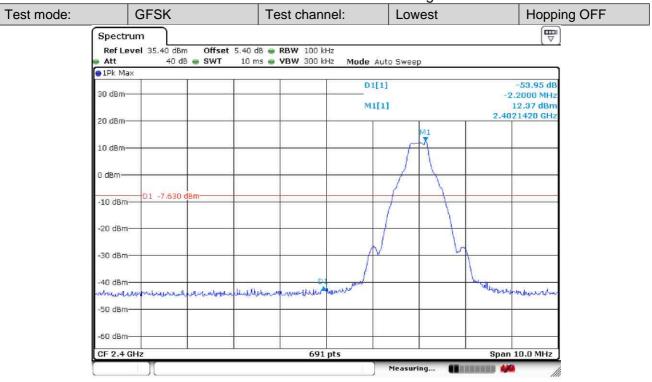

Date: 16.DEC.2020 09:38:29

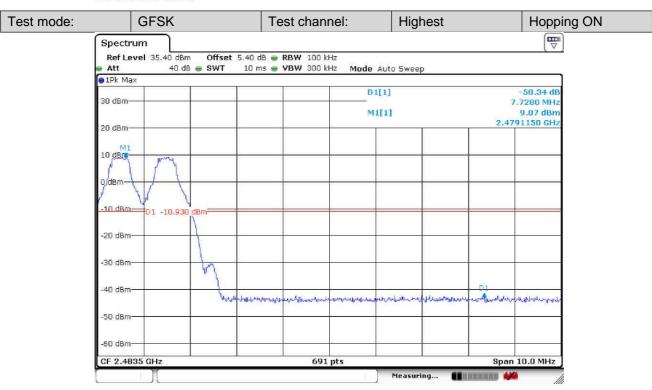


Date: 16 DEC 2020 09:50:20






Report No.: HR/2020/C000402

56 of 89 Page:

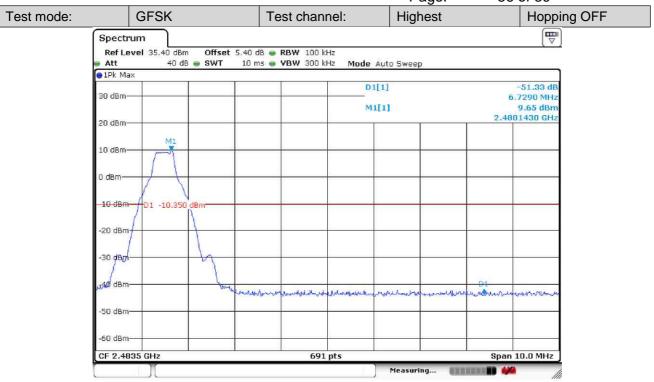

Date: 16.DEC.2020 09:39:43

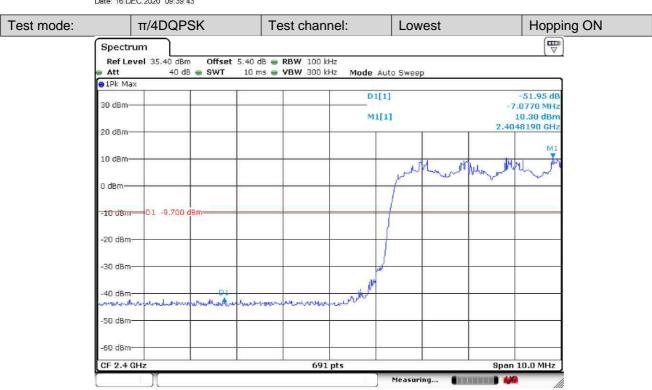


Date: 16 DEC 2020 09:48:31






Report No.: HR/2020/C000402

57 of 89 Page:

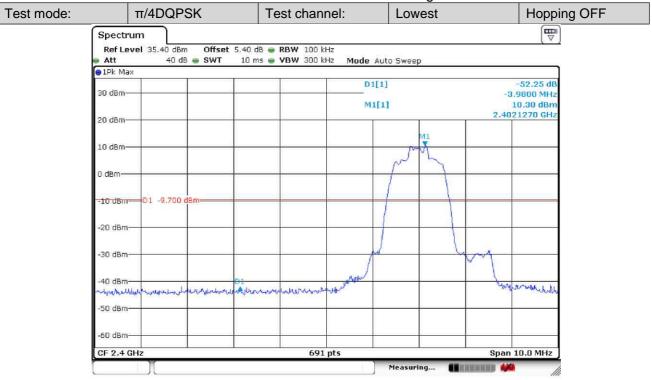

Date: 16.DEC.2020 09:43:14

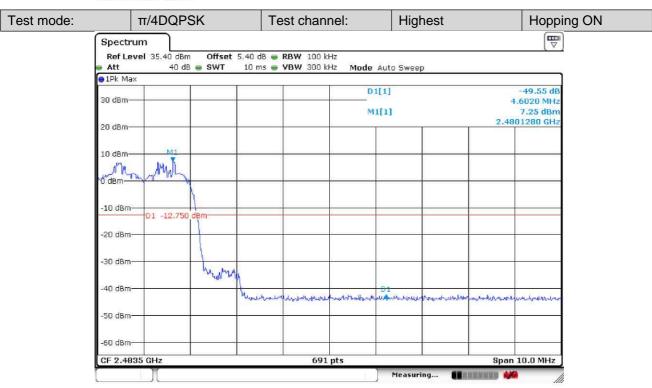


Date: 16 DEC 2020 09:49:31






Report No.: HR/2020/C000402

58 of 89 Page:

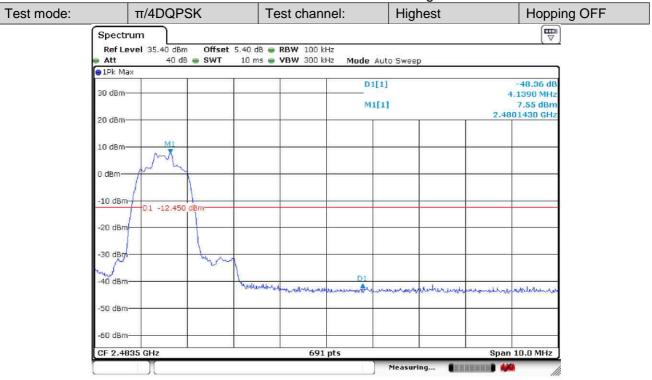

Date: 16.DEC.2020 09:42:22

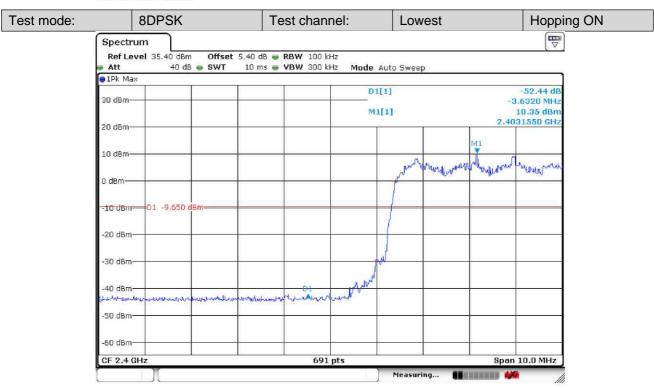

Date: 16.DEC.2020 09:47:07



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




Report No.: HR/2020/C000402

59 of 89 Page:

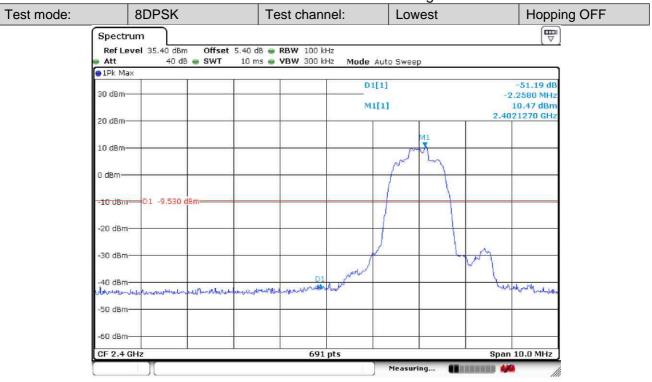

Date: 16.DEC.2020 09:44:07

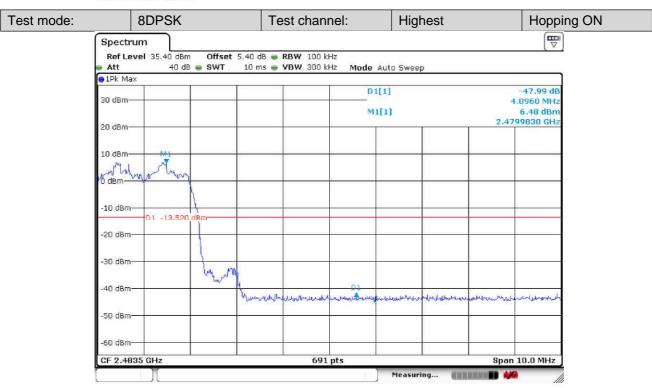


Date: 16.DEC.2020 09:46:09





Report No.: HR/2020/C000402

60 of 89 Page:

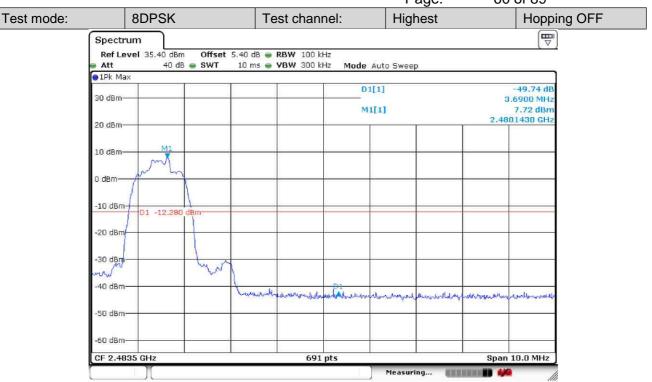

Date: 16.DEC.2020 09:44:53





Report No.: HR/2020/C000402

Page: 61 of 89

### **4.10 Spurious RF Conducted Emissions**

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2013 Section 7.8.8				
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane				
Instruments Used:	Refer to section 6 for details				
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.				
Final Test Mode:	Through Pre-scan, find the  DH5 of data type is the worst case of GFSK modulation type,  2-DH5 of data type is the worst case of π/4DQPSK modulation type,  3-DH5 of data type is the worst case of 8DPSK modulation type.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test Results:	Pass				






Report No.: HR/2020/C000402

62 of 89 Page:

#### **Test Plots** 4.10.1

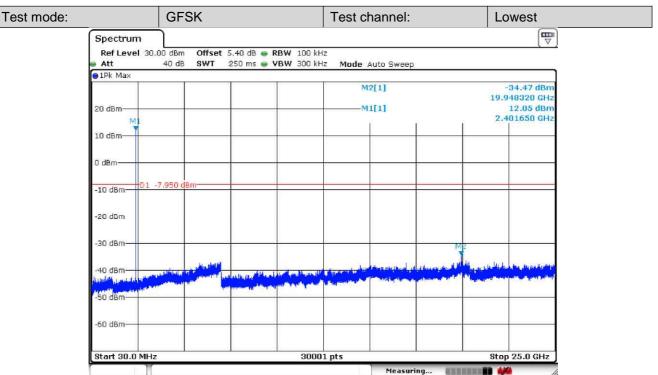


Date: 16 DEC 2020 10:15:57






Report No.: HR/2020/C000402

63 of 89 Page:

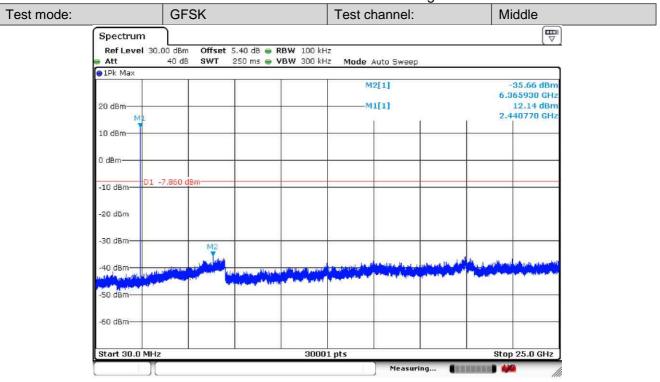

Date: 16.DEC.2020 10:17:10

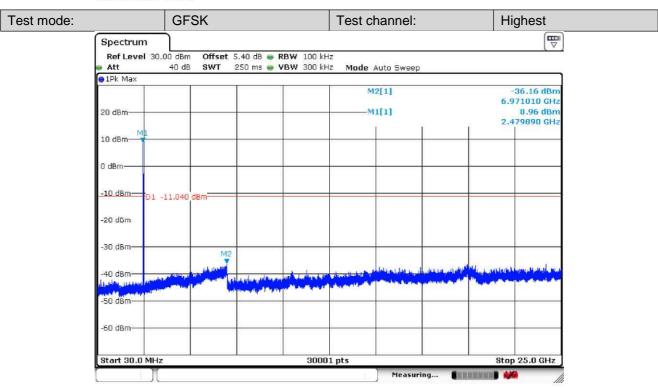


Date: 16 DEC 2020 10:17:48






Report No.: HR/2020/C000402

64 of 89 Page:

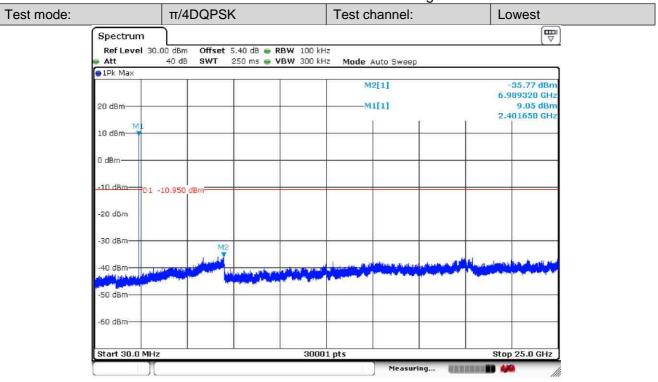

Date: 16.DEC.2020 10:20:54

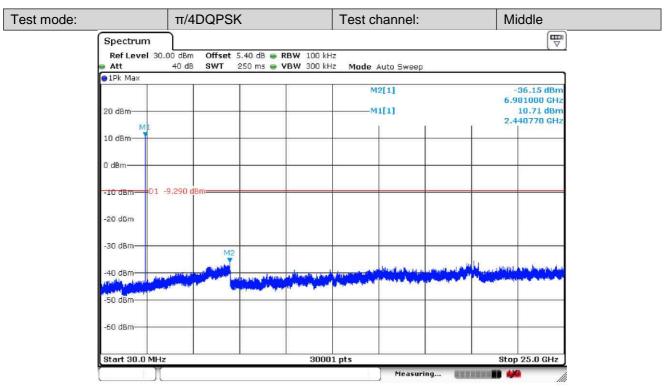

Date: 16 DEC 2020 10:19:37



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgety or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




Report No.: HR/2020/C000402

Page: 65 of 89

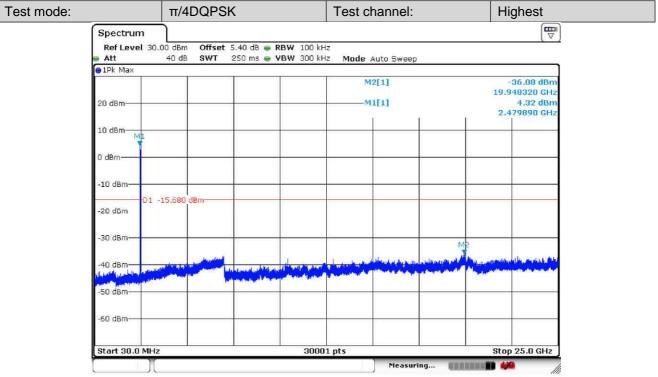

Date: 16.DEC.2020 10:18:48

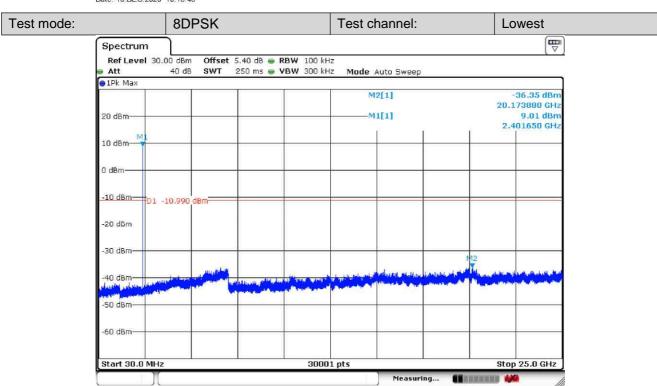


Date: 16.DEC.2020 10:22:14






Report No.: HR/2020/C000402

66 of 89 Page:

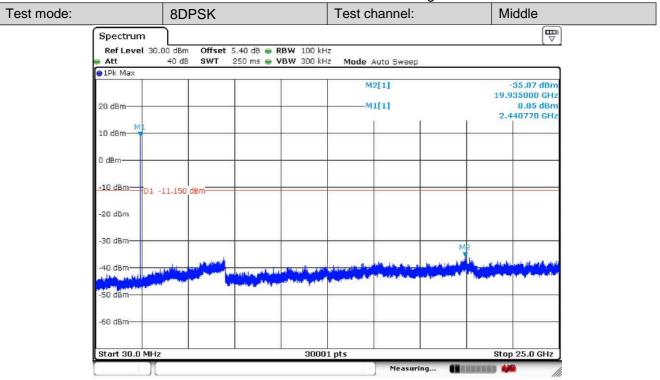

Date: 16.DEC.2020 10:22:54

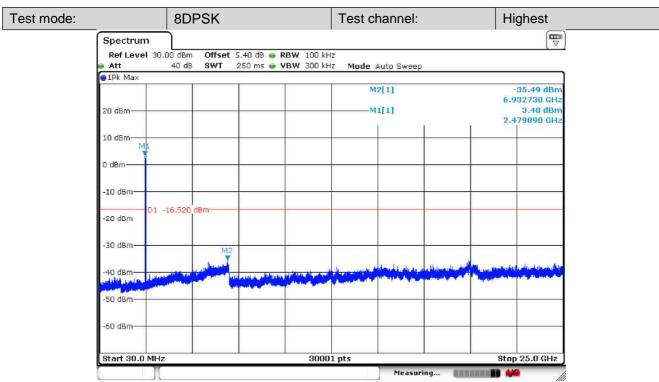

Date: 16 DEC 2020 10:24:08





Report No.: HR/2020/C000402

67 of 89 Page:

### Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.





Report No.: HR/2020/C000402

68 of 89 Page:

### 4.11 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 :2013 Section 11.12						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
	Above IGHZ	Peak	1MHz	10Hz	Average		
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30		
	1.705MHz-30MHz	30	-	-	30		
	30MHz-88MHz	100	40.0	Quasi-peak	3		
	88MHz-216MHz	150	43.5	Quasi-peak	3		
	216MHz-960MHz	200	46.0	Quasi-peak	3		
	960MHz-1GHz	500	54.0	Quasi-peak	3		
	Above 1GHz	500	54.0	Average	3		
	Remark: 15.35(b),Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						






Report No.: HR/2020/C000402

69 of 89 Page:

### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

### Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. Use the following spectrum analyzer settings:
  - Span shall wide enough to fully capture the emission being (1) measured:
  - (2)Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz; VBW ≥ RBW; Sweep = auto;
    - Detector function = peak; Trace = max hold for peak
  - For average measurement: use duty cycle correction factor (3)method per 15.35(c).





Report No.: HR/2020/C000402

70 of 89 Page:

	Duty and On time (400 millioner de		
	Duty cycle = On time/100 milliseconds		
	On time = N 1 *L 1 +N 2 *L 2 ++N n-1 *LN n-1 +N n *L n		
	Where N 1 is number of type 1 pulses, L 1 is length of type 1 pulses, etc.		
	Average Emission Level = Peak Emission Level + 20*log(Duty cycle)		
	f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.		
	g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.		
	h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.		
	i. Test the EUT in the lowest channel, the middle channel ,the Highest channel.		
	j. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.		
	k. Repeat above procedures until all frequencies measured was complete.		
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type		
	Charge + Transmitting mode.		
	Through Pre-scan, find the		
	DH5 of data type and GFSK modulation is the worst case.		
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode		
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.		
	Only the worst case is recorded in the report.		
Instruments Used:	Refer to section 6 for details		
Test Results:	Pass		






Report No.: HR/2020/C000402

71 of 89 Page:

#### 4.11.1 **Transmitter Emission below 1GHz**

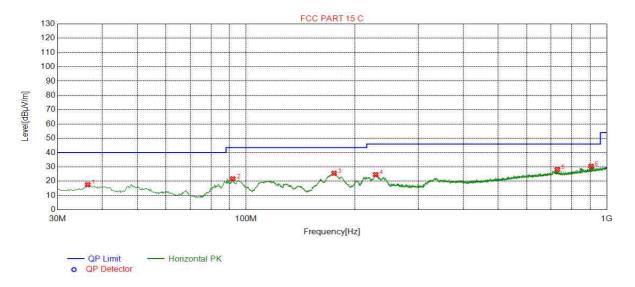

**Suspected List** 


Suspected List								
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
INO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	36.4033	17.56	-29.51	40.00	22.44	200	265	Horizontal
2	91.8984	21.69	-33.40	43.50	21.81	200	262	Horizontal
3	175.335	25.52	-33.64	43.50	17.98	100	216	Horizontal
4	228.695	24.58	-30.45	46.00	21.42	100	225	Horizontal
5	729.509	28.15	-18.81	46.00	17.85	200	256	Horizontal
6	905.115	30.42	-15.97	46.00	15.58	100	222	Horizontal





Report No.: HR/2020/C000402

Page: 72 of 89

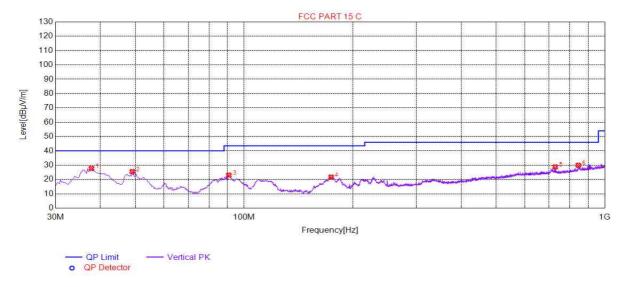

Suspected List

Suspe	JIEU LISI							
Suspected List								
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Folanty
1	37.7616	27.73	-29.07	40.00	12.27	100	14	Vertical
2	49.0158	25.54	-30.37	40.00	14.46	200	343	Vertical
3	90.7341	23.07	-33.59	43.50	20.43	100	89	Vertical
4	174.364	21.69	-33.71	43.50	21.81	100	328	Vertical
5	728.733	28.81	-18.83	46.00	17.19	100	351	Vertical
6	844.963	29.93	-16.97	46.00	16.07	200	195	Vertical






Report No.: HR/2020/C000402

73 of 89 Page:

#### 4.11.2 **Transmitter Emission above 1GHz** 4.11.2.1 GFSK\_Channel 0

#### **Test Graph**

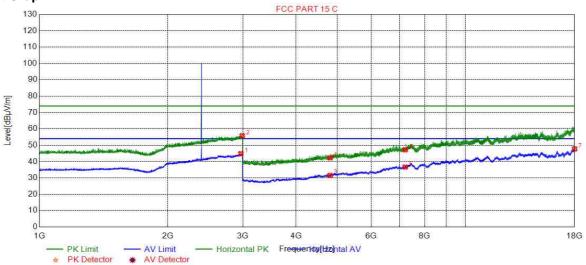

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2968.492	44.87	54.00	9.13	150	14	Horizontal			
2	2990.497	55.85	74.00	18.15	150	281	Horizontal			
3	4804.000	31.56	54.00	22.44	150	31	Horizontal			
4	4804.000	42.26	74.00	31.74	150	100	Horizontal			
5	7206.000	47.20	74.00	26.80	150	322	Horizontal			
6	7206.000	36.64	54.00	17.36	150	48	Horizontal			
7	17998.49	47.79	54.00	6.21	150	14	Horizontal			

**Final Data List** 






Report No.: HR/2020/C000402

Page: 74 of 89

## 4.11.2.2 GFSK\_Channel 0

#### **Test Graph**

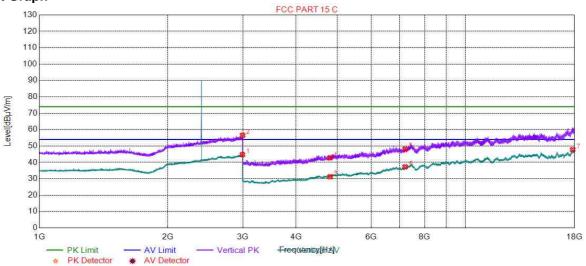

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2992.998	44.76	54.00	9.24	150	169	Vertical			
2	2995.999	56.56	74.00	17.44	150	310	Vertical			
3	4804.000	31.25	54.00	22.75	150	4	Vertical			
4	4804.000	42.80	74.00	31.20	150	312	Vertical			
5	7206.000	48.16	74.00	25.84	150	90	Vertical			
6	7206.000	37.30	54.00	16.70	150	346	Vertical			
7	17808.74	47.76	54.00	6.24	150	346	Vertical			






Report No.: HR/2020/C000402

Page: 75 of 89

## 4.11.2.3 GFSK\_Channel 39

#### **Test Graph**

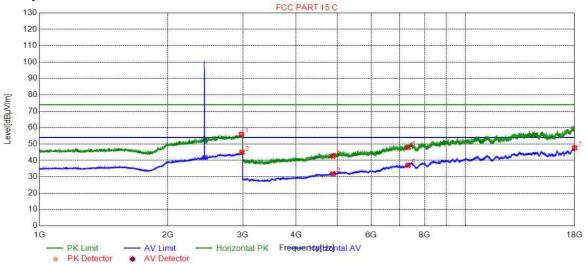

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2978.994	55.93	74.00	18.07	150	108	Horizontal			
2	2986.996	44.98	54.00	9.02	150	358	Horizontal			
3	4882.000	31.83	54.00	22.17	150	270	Horizontal			
4	4882.000	42.58	74.00	31.42	150	270	Horizontal			
5	7323.000	37.08	54.00	16.92	150	219	Horizontal			
6	7323.000	48.03	74.00	25.97	150	339	Horizontal			
7	18000.00	47.63	54.00	6.37	150	65	Horizontal			






Report No.: HR/2020/C000402

Page: 76 of 89

## 4.11.2.4 GFSK\_Channel 39

#### **Test Graph**

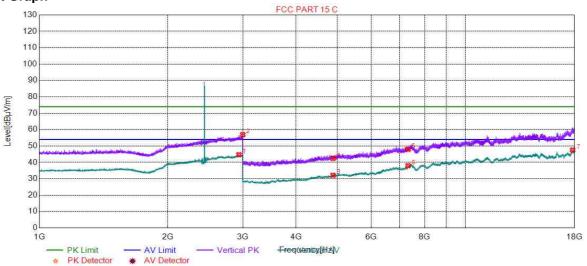

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2937.484	44.73	54.00	9.27	150	53	Vertical			
2	2997.999	56.91	74.00	17.09	150	268	Vertical			
3	4882.000	32.14	54.00	21.86	150	244	Vertical			
4	4882.000	42.41	74.00	31.59	150	158	Vertical			
5	7323.000	47.96	74.00	26.04	150	90	Vertical			
6	7323.000	38.01	54.00	15.99	150	346	Vertical			
7	17803.49	47.51	54.00	6.49	150	107	Vertical			






Report No.: HR/2020/C000402

Page: 77 of 89

## 4.11.2.5 GFSK\_Channel 78

### **Test Graph**

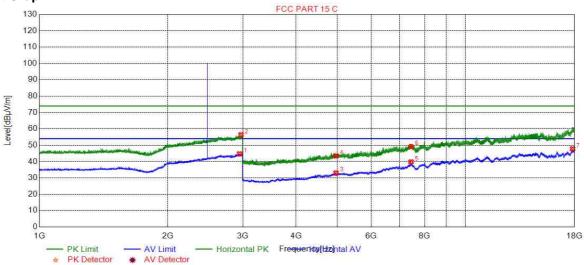

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2949.487	44.76	54.00	9.24	150	222	Horizontal			
2	2970.992	56.41	74.00	17.59	150	44	Horizontal			
3	4960.000	33.08	54.00	20.92	150	184	Horizontal			
4	4960.000	43.42	74.00	30.58	150	304	Horizontal			
5	7440.000	39.81	54.00	14.19	150	355	Horizontal			
6	7440.000	49.06	74.00	24.94	150	270	Horizontal			
7	17799.74	47.83	54.00	6.17	150	253	Horizontal			

**Final Data List** 






Report No.: HR/2020/C000402

78 of 89 Page:

### 4.11.2.6 GFSK Channel 78

#### **Test Graph**

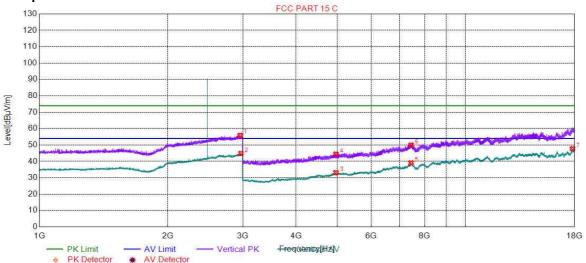

#### Suspected List

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2955.989	55.89	74.00	18.11	150	108	Vertical			
2	2969.492	44.88	54.00	9.12	150	139	Vertical			
3	4960.000	33.18	54.00	20.82	150	176	Vertical			
4	4960.000	44.51	74.00	29.49	150	125	Vertical			
5	7440.000	39.12	54.00	14.88	150	5	Vertical			
6	7440.000	50.02	74.00	23.98	150	90	Vertical			
7	17790.73	47.75	54.00	6.25	150	312	Vertical			

#### **Final Data List**

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.






Report No.: HR/2020/C000402

Page: 79 of 89

## 4.12Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205					
Test Method:	ANSI C63.10: 2013						
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Cham	ber)				
Limit:	Frequency	Limit (dBuV/m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak				
	88MHz-216MHz	43.5	Quasi-peak				
	216MHz-960MHz	46.0	Quasi-peak				
	960MHz-1GHz	54.0	Quasi-peak				
	Above 1GHz	54.0	Average Value				
Above 1GHZ 74.0 Peak Value							
Test Setup:							






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz





Report No.: HR/2020/C000402

80 of 89 Page:

	1 age. 00 01 05
Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	h. Test the EUT in the lowest channel, the Highest channel
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Peak Measurements Above 1000 MHz
	• RBW = 1 MHz
	• VBW ≥ 3 MHz
	Detector = Peak
	Sweep time = auto
	Trace mode = max hold
	Average Measurements Above 1000MHz
	• RBW = 1 MHz
	VBW = 10 Hz, when duty cycle is no less than 98 percent.
	VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum
	transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
	Non-hopping transmitting mode with all kind of modulation and all kind of
Exploratory Test Mode:	data type
	Charge + Transmitting mode.
Fig. 1 To at Mar. 1	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode,
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass





Report No.: HR/2020/C000402


Page: 81 of 89

#### 4.12.1 **Test Plots**

## 4.12.1.1 Worst Case Mode (GFSK(DH5))

#### 4.12.1.2 GFSK\_Channel 0

#### **Test Graph**

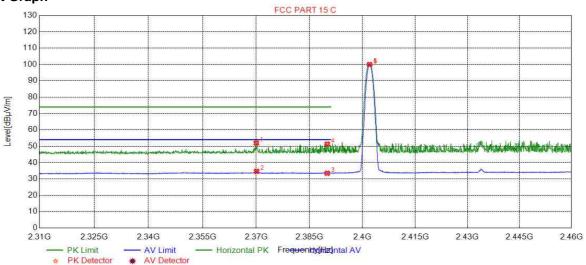

## **Suspected List**

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2370.030	51.93	74.00	22.07	150	67	Horizontal			
2	2370.105	34.67	54.00	19.33	150	59	Horizontal			
3	2390.000	33.49	54.00	20.51	150	289	Horizontal			
4	2390.000	51.30	74.00	22.70	150	59	Horizontal			
5	2402.000	100.00	0.00	-100.00	150	59	Horizontal			
6	2402.000	99.90	0.00	-99.90	150	59	Horizontal			

**Final Data List** 






Report No.: HR/2020/C000402

Page: 82 of 89

## 4.12.1.3 GFSK\_Channel 0

#### **Test Graph**

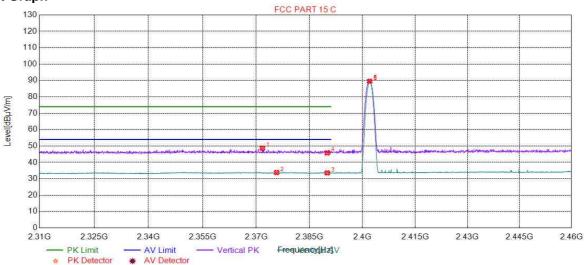

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2371.755	48.66	74.00	25.34	150	90	Vertical			
2	2375.732	33.82	54.00	20.18	150	312	Vertical			
3	2390.000	33.58	54.00	20.42	150	29	Vertical			
4	2390.000	45.79	74.00	28.21	150	316	Vertical			
5	2402.000	89.52	0.00	-89.52	150	216	Vertical			
6	2402.000	89.23	0.00	-89.23	150	250	Vertical			






Report No.: HR/2020/C000402

Page: 83 of 89

## 4.12.1.4 GFSK\_Channel 78

#### **Test Graph**

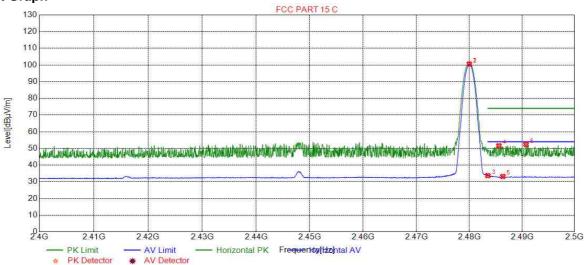

**Suspected List** 

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2480.000	100.62	0.00	-100.62	150	55	Horizontal			
2	2480.000	100.52	0.00	-100.52	150	55	Horizontal			
3	2483.500	33.72	54.00	20.28	150	47	Horizontal			
4	2485.592	51.63	74.00	22.37	150	70	Horizontal			
5	2486.343	33.24	54.00	20.76	150	297	Horizontal			
6	2490.745	52.43	74.00	21.57	150	47	Horizontal			






Report No.: HR/2020/C000402

84 of 89 Page:

## 4.12.1.5 GFSK\_Channel 78

#### **Test Graph**

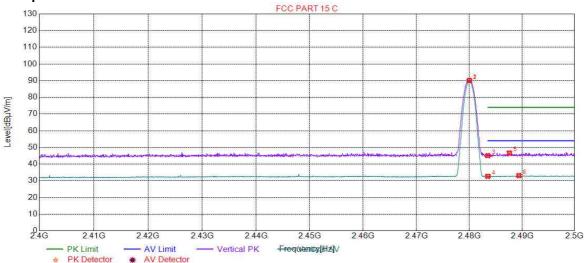

#### **Suspected List**

Suspe	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2480.000	90.10	0.00	-90.10	150	357	Vertical			
2	2480.000	89.99	0.00	-89.99	150	258	Vertical			
3	2483.500	45.09	74.00	28.91	150	308	Vertical			
4	2483.500	32.70	54.00	21.30	150	62	Vertical			
5	2487.593	46.67	74.00	27.33	150	277	Vertical			
6	2489.394	33.15	54.00	20.85	150	181	Vertical			

#### **Final Data List**

#### Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor All Modes have been tested, but only the worst case data displayed in this report.





Report No.: HR/2020/C000402

Page: 85 of 89

#### 5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Radiated Spurious emission test	±4.5dB (30MHz-1GHz)
4		±4.8dB (1GHz-25GHz)
5	Conduct emission test	±3.12 dB(9KHz- 30MHz)
6	Temperature test	±1°C
7	Humidity test	±3%
8	DC and low frequency voltages	±0.5%





Report No.: HR/2020/C000402

86 of 89 Page:

**Equipment List** 

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
rest Equipment				(yyyy-mm-dd	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2020/5/10	2023/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2020/7/14	2021/7/14
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2020/4/1	2021/3/31
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2020/6/12	2021/6/11
2 Line ISN	Fischer Custom Communications Inc	FCC-TLISN-T2- 02	EMC0122	2020/2/11	2021/2/10
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2020/3/2	2021/3/1

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
rest Equipment				(yyyy-mm-dd	(yyyy-mm-dd)
DC Power Supply	Agilent Technologie Inc	66311B	W009-09	2020/7/15	2021/7/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2020/1/3	2021/1/2
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/7/14	2021/7/14
Temperature Chamber	GIANT FORCE	ICT-150-40-CP- AR	W027-03	2020/10/27	2021/10/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/14





Report No.: HR/2020/C000402

87 of 89 Page.

RE in Chamber					
	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
Test Equipment				(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Measurement Software	AUDIX	e3V8.2014-6-2	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologie Inc	N9010A	SEM004-09	2020/3/12	2021/3/11
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26
Horn Antenna (0.8- 18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Pre-amplifier(0.1-1.3GHz	HP	8447D	SEM005-02	2020/7/14	2021/7/14
Low Noise Amplifier(100MHz- 18GHz)	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2020/9/3	2021/9/2
Horn Antenna (15- 40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2023/10/16
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2020/3/2	2021/3/1
Band filter	N/A	N/A	SEM023-01	N/A	N/A
		RE in Chamb	er		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
Tost Equipment	Wanulacturer	Woder No.		(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020/8/5	2023/8/4
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2020/6/12	2021/6/11
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologie	N9038A	SEM004-05	2020/7/14	2021/7/14
BiConiLog Antenna (26 3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2020/6/27	2023/6/26
Pre-amplifier (0.1- 1.3GHz)	Agilent Technologie	8447D	SEM005-01	2020/3/2	2021/3/1





Report No.: HR/2020/C000402

Page: 88 of 89

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. Date (yyyy mm-dd)	Cal. Due date (yyyy-mm-dd)
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30
EMI Test Receiver (9k- 7GHz)	Rohde & Schwarz	ESR	SEM004-03	2020/3/2	2021/3/1
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2020/3/15	2022/3/14
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2020/3/12	2021/3/11
Loop Antenna (9kHz- 30MHz)	ETS-Lindgren	6502	SEM003-08	2020/8/22	2023/8/21
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2020/6/12	2021/6/11





Report No.: HR/2020/C000402

Page: 89 of 89

#### 7 **Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of Set-Up for HR/2020/C0004.

The End

