


Page 52 of 131

Puw test Plot





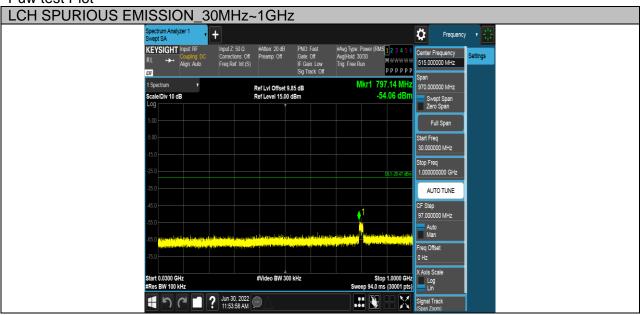

Page 53 of 131

Test Mode	Channel	Verdict
11G	MCH	PASS

Pref test Plot





Page 54 of 131

Puw test Plot







Page 55 of 131

Test Mode	Channel	Verdict
11G	HCH	PASS

Pref test Plot





Page 56 of 131

Puw test Plot







Page 57 of 131

Test Mode	Channel	Verdict
11N HT20	LCH	PASS

Pref test Plot





Page 58 of 131

Puw test Plot







Page 59 of 131

Test Mode	Channel	Verdict
11N HT20	MCH	PASS

Pref test Plot





Page 60 of 131

Puw test Plot







Page 61 of 131

Test Mode	Channel	Verdict
11N HT20	HCH	PASS

Pref test Plot





Page 62 of 131

Puw test Plot







REPORT No.: 4790446015-3 Page 63 of 131

7.7. RADIATED TEST RESULTS

7.7.1.LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13 (Transmitter)

Radiation Disturbance Test Limit for ISED(9KHz-1GHz)

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz	
Frequency (MHz)	Field strength (μV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



Page 64 of 131

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (9KHz-1GHz)

Frequency	Field Strength	Measurement Distance
(MHz)	(microvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Page 65 of 131

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
Frequency (Miriz)	Peak	Average
Above 1000	74	54

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			


Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ²Above 38.6c



Page 66 of 131

TEST SETUP AND PROCEDURE

Below 30MHz

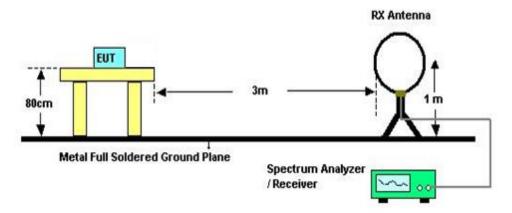

The setting of the spectrum analyser


RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
- 6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Form-ULID-008536-9 V1.0

Page 67 of 131

Below 1G

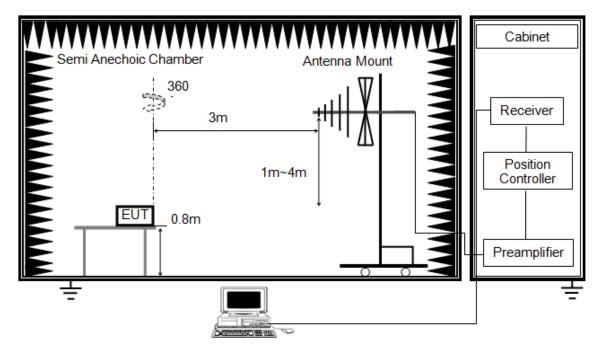


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

Form-ULID-008536-9 V1.0

ABOVE 1G

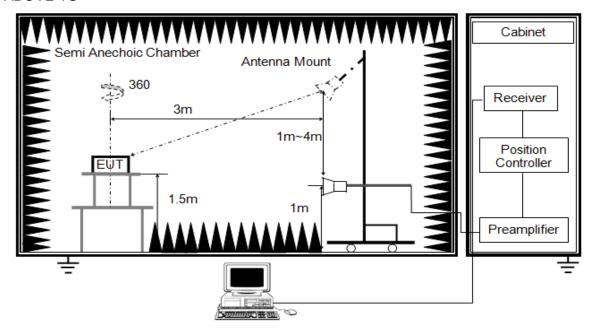


The setting of the spectrum analyser

RBW	1M
IVBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold


- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 1.5m above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth ≥1/T but not less than the setting list in section 7.2 when use peak detector, max hold to be run for at least [50*(1/Duty Cycle)] traces for average measurements. For the Duty Cycle need to refer the results in section 7.2.
- 7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Form-ULID-008536-9 V1.0





X axis, Y axis, Z axis positions:



Note: For all radiated test, the EUT can only working in Z axis.

7.7.2. RESTRICTED BANDEDGE

TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests
Relative Humidity	59.6%
Atmospheric Pressure:	100.4kPa
Temperature	23.1°C

Test Result Table


Test Mode	Channel	Puw(dBm)	Verdict
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11B	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11G	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11N HT20	HCH	<limit< td=""><td>PASS</td></limit<>	PASS



Page 70 of 131

Test Graphs:

Test Mode	Channel	Polarization	Verdict	
11B	LCH	Horizontal	PASS	

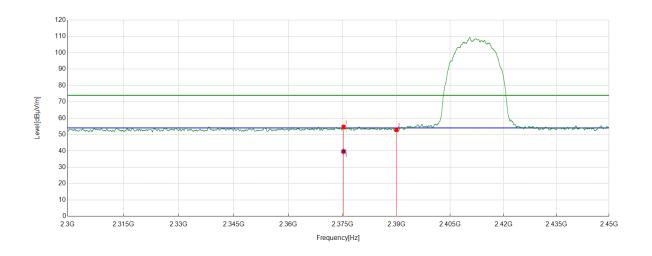


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Ī	1	2375.2907	43.28	11.30	54.58	74.00	-19.42	peak
	ı	23/3.290/	28.35	11.30	39.65	54.00	-14.35	average
Ī	2	2390	41.57	11.25	52.82	74.00	-21.18	peak

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 71 of 131

Test Mode	Channel	Polarization	Verdict	
11B	LCH	Vertical	PASS	

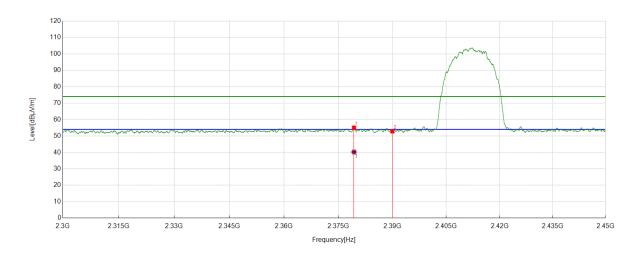


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
4	2379.3224	43.73	11.32	55.05	74.00	-18.95	peak
'	23/9.3224	28.94	11.32	40.26	54.00	-13.74	average
2	2390	41.59	11.25	52.84	74.00	-21.16	peak

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

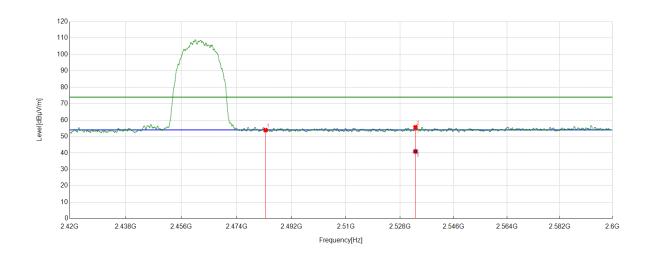


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	1	2483.5	42.61	11.28	53.89	74.00	-20.11	peak
Ī	2	2533.1891	43.74	11.87	55.61	74.00	-18.39	peak
	2	2000.1091	29.04	11.87	40.91	54.00	-13.09	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




REPORT No.: 4790446015-3 Page 73 of 131

Test Mode	Channel	Polarization	Verdict	
11B	HCH	Vertical	PASS	

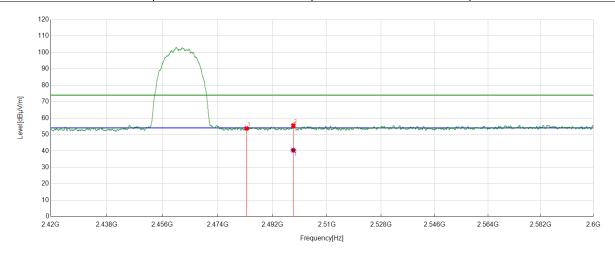


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	1	2483.5	42.43	11.28	53.71	74.00	-20.29	peak
Ī	2	2498.8724	44.00	11.46	55.46	74.00	-18.54	peak
	2	2490.0724	28.96	11.46	40.42	54.00	-13.58	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel Polarization		Verdict	
11G	LCH	Horizontal	PASS	

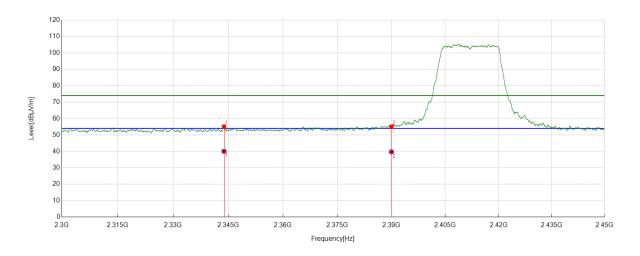


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
4	2343.8805	43.90	11.13	55.03	74.00	-18.97	peak
'	2343.0003	28.96	11.13	40.09	54.00	-13.91	average
2	2390	43.75	11.25	55.00	74.00	-19.00	peak
	2390	28.51	11.25	39.76	54.00	-14.24	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 75 of 131

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

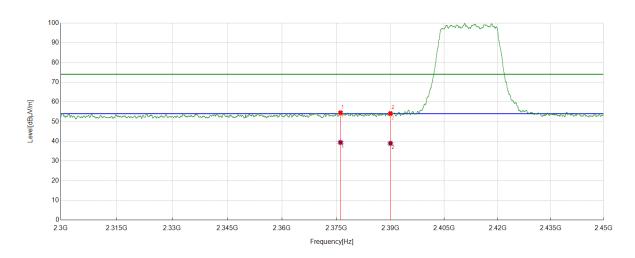


N	lo.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	1	2376.1533	43.23	11.30	54.53	74.00	-19.47	peak
	ı	2370.1333	28.11	11.30	39.41	54.00	-14.59	average
	2	2200	42.91	11.25	54.16	74.00	-19.84	peak
	2	2390	27.72	11.25	38.97	54.00	-15.03	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

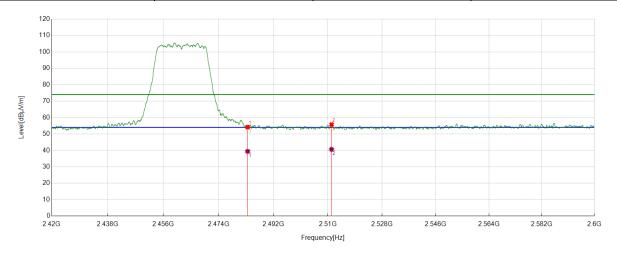


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	1	2483.5	42.93	11.28	54.21	74.00	-19.79	peak
	ı	2403.3	28.17	11.28	39.45	54.00	-14.55	average
Γ	2	2511.2039	44.23	11.50	55.73	74.00	-18.27	peak
	۷	2011.2039	29.16	11.50	40.66	54.00	-13.34	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




Page 77 of 131

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

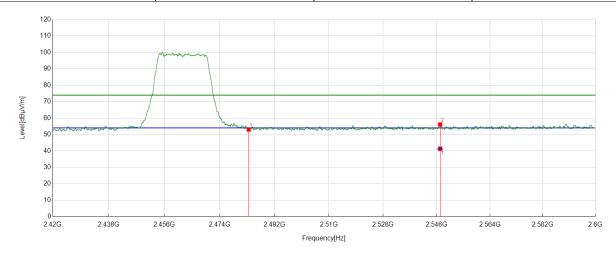


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	1	2483.5	41.73	11.28	53.01	74.00	-20.99	peak
Ī	2	2547.1634	44.27	11.82	56.09	74.00	-17.91	peak
	2	2047.1034	29.50	11.82	41.32	54.00	-12.68	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

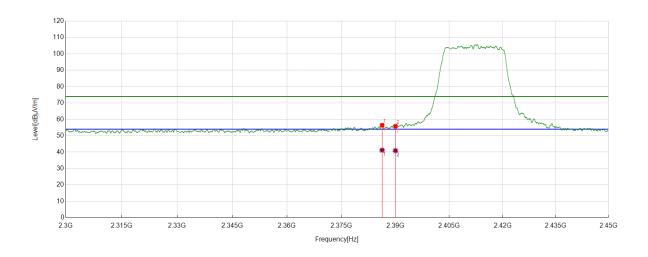


	No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Ī	1	2206 2002	45.16	11.28	56.44	74.00	-17.56	peak
	ı	2386.2983	29.94	11.28	41.22	54.00	-12.78	average
ſ	2	2200	44.56	11.25	55.81	74.00	-18.19	peak
	2 2	2390	29.69	11.25	40.94	54.00	-13.06	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 79 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

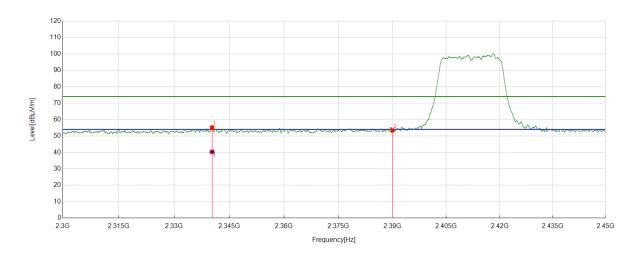


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
4	2340.355	44.03	11.12	55.15	74.00	-18.85	peak
ı	2340.333	29.21	11.12	40.33	54.00	-13.67	average
2	2390	42.19	11.25	53.44	74.00	-20.56	peak

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Page 80 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

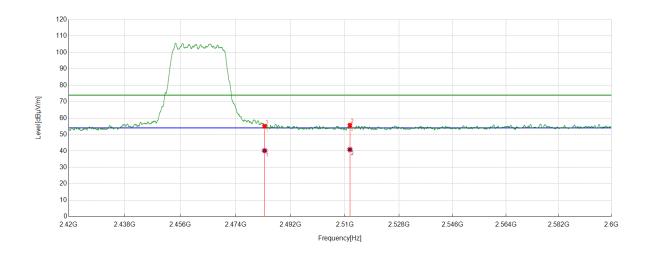


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
4	1 2483.5	43.76	11.28	55.04	74.00	-18.96	peak
		2465.5 28.90 11.28	40.18	54.00	-13.82	average	
2	2 2511.654	44.10	11.51	55.61	74.00	-18.39	peak
2		29.33	11.51	40.84	54.00	-13.16	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Page 81 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

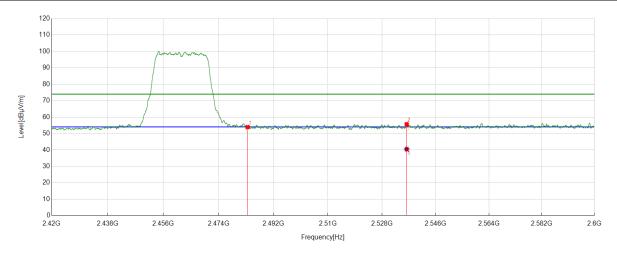

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	42.63	11.28	53.91	74.00	-20.09	peak
2	2536.272	43.75	11.86	55.61	74.00	-18.39	peak
_	2536.272	28.62	11.86	40.48	54.00	-13.52	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. Measurement = Reading Level + Correct Factor.
- 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Page 82 of 131

7.7.3. SPURIOUS EMISSIONS

Test Result Table: 1) For 1GHz~3GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	59.6%
Atmospheric Pressure:	100.4kPa
Temperature	23.1°C

Test Mode	Channel	Puw(dBm)	Verdict
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11B SISO	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11G SISO	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11N HT20	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS

2) For 3GHz~18GHz

<u> </u>		
Environment Parameter	Selected Values During Tests	
Relative Humidity	59.6%	
Atmospheric Pressure:	100.4kPa	
Temperature	23.1°C	

Test Mode	Channel	Puw(dBm)	Verdict
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11B SISO	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11G SISO	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11N HT20	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
	HCH	<limit< td=""><td>PASS</td></limit<>	PASS



Page 83 of 131

3) For 18GHz~26.5GHz

Environment Parameter	Selected Values During Tests	
Relative Humidity	59.6%	
Atmospheric Pressure:	100.4kPa	
Temperature	23.1°C	

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<limit< th=""><th>PASS</th></limit<>	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 30MHz~1GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	58.4%
Atmospheric Pressure:	101kPa
Temperature	22.8°C

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<limit< th=""><th>PASS</th></limit<>	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

5) For 9KHz~30MHz

Environment Parameter	Selected Values During Tests
Relative Humidity	58.4%
Atmospheric Pressure:	101kPa
Temperature	22.8°C

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<limit< th=""><th>PASS</th></limit<>	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.




Page 84 of 131

Part I: 1GHz~3GHz


HARMONICS AND SPURIOUS EMISSIONS

Test Mode Channel		Polarization	Verdict	
11B	LCH	Horizontal	PASS	

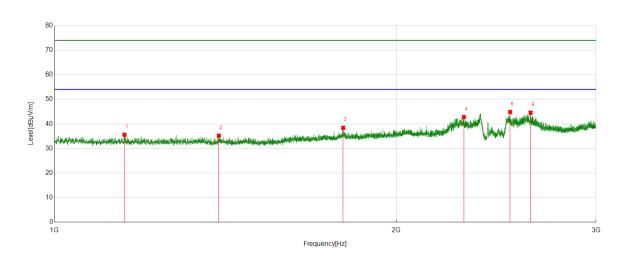


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1152.5191	41.67	-6.08	35.59	74.00	-38.41	peak
2	1395.7995	41.73	-6.53	35.20	74.00	-38.80	peak
3	1796.0995	42.70	-4.27	38.43	74.00	-35.57	peak
4	2294.4118	45.89	-3.13	42.76	74.00	-31.24	peak
5	2520.19	46.60	-1.76	44.84	74.00	-29.16	peak
6	2626.9534	46.20	-1.65	44.55	74.00	-29.45	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

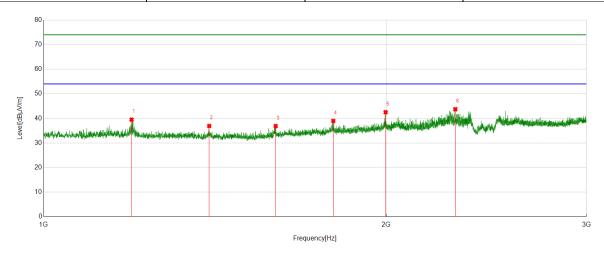


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.7743	46.14	-6.64	39.50	74.00	-34.50	peak
2	1398.0498	43.36	-6.45	36.91	74.00	-37.09	peak
3	1599.3249	42.45	-5.56	36.89	74.00	-37.11	peak
4	1797.0996	43.21	-4.25	38.96	74.00	-35.04	peak
5	1997.8747	45.57	-3.07	42.50	74.00	-31.50	peak
6	2300.6626	46.81	-3.09	43.72	74.00	-30.28	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 86 of 131

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

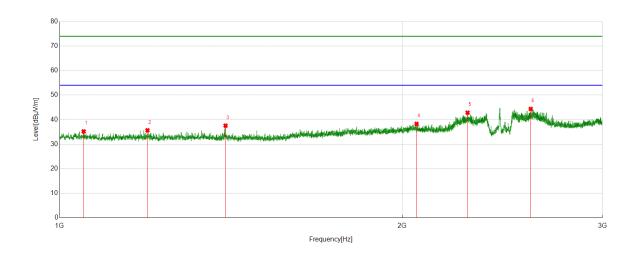


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1049.7562	40.83	-5.61	35.22	74.00	-38.78	peak
2	1194.5243	42.30	-6.64	35.66	74.00	-38.34	peak
3	1399.0499	43.98	-6.42	37.56	74.00	-36.44	peak
4	2059.3824	41.12	-2.82	38.30	74.00	-35.70	peak
5	2283.4104	46.03	-3.19	42.84	74.00	-31.16	peak
6	2594.4493	46.27	-1.90	44.37	74.00	-29.63	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 87 of 131

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

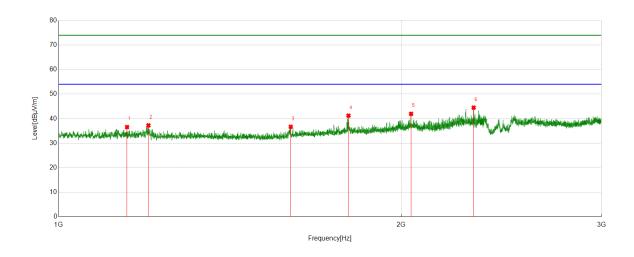


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1148.5186	42.64	-6.06	36.58	74.00	-37.42	peak
2	1199.2749	43.95	-6.68	37.27	74.00	-36.73	peak
3	1599.5749	42.24	-5.55	36.69	74.00	-37.31	peak
4	1797.8497	45.47	-4.24	41.23	74.00	-32.77	peak
5	2040.6301	44.46	-2.48	41.98	74.00	-32.02	peak
6	2316.1645	47.48	-2.99	44.49	74.00	-29.51	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 88 of 131

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

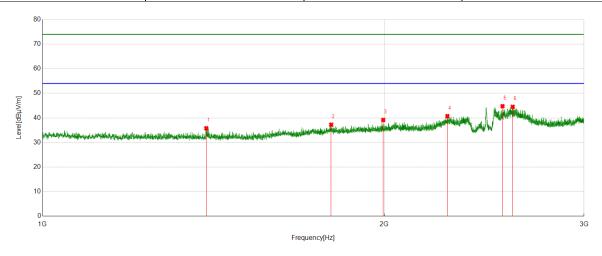


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1394.0493	42.38	-6.60	35.78	74.00	-38.22	peak
<u> </u>			-0.00				peak
2	1796.0995	41.49	-4.27	37.22	74.00	-36.78	peak
3	1996.1245	42.27	-3.10	39.17	74.00	-34.83	peak
4	2273.6592	43.94	-3.23	40.71	74.00	-33.29	peak
5	2542.6928	47.10	-2.34	44.76	74.00	-29.24	peak
6	2595.9495	46.37	-1.86	44.51	74.00	-29.49	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 89 of 131

Test Mode	Test Mode Channel		Verdict
11B	HCH	Vertical	PASS

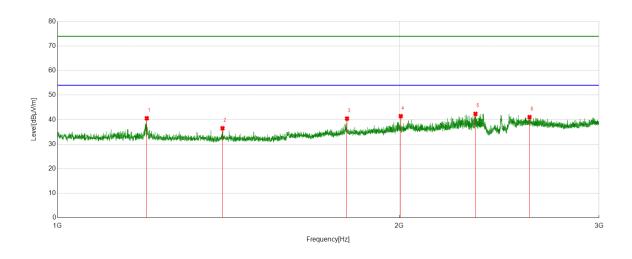


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.5248	47.24	-6.67	40.57	74.00	-33.43	peak
2	1397.5497	42.96	-6.47	36.49	74.00	-37.51	peak
3	1799.0999	44.66	-4.22	40.44	74.00	-33.56	peak
4	2006.3758	44.41	-2.98	41.43	74.00	-32.57	peak
5	2334.6668	45.51	-3.13	42.38	74.00	-31.62	peak
6	2605.4507	42.66	-1.62	41.04	74.00	-32.96	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

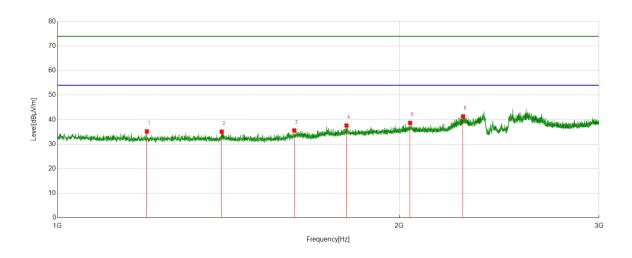


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.7748	41.90	-6.67	35.23	74.00	-38.77	peak
2	1395.2994	41.69	-6.55	35.14	74.00	-38.86	peak
3	1616.5771	41.18	-5.56	35.62	74.00	-38.38	peak
4	1797.0996	41.87	-4.25	37.62	74.00	-36.38	peak
5	2044.8806	41.18	-2.50	38.68	74.00	-35.32	peak
6	2276.6596	44.57	-3.22	41.35	74.00	-32.65	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 91 of 131

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

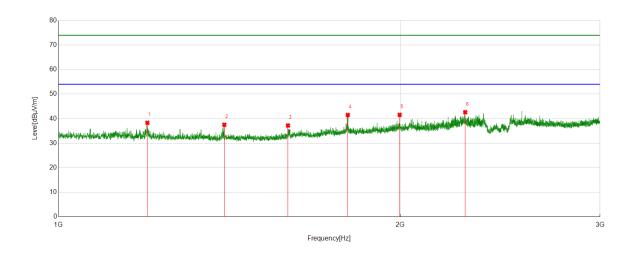


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.5247	44.97	-6.66	38.31	74.00	-35.69	peak
2	1399.8	43.91	-6.39	37.52	74.00	-36.48	peak
3	1592.8241	43.04	-5.81	37.23	74.00	-36.77	peak
4	1798.3498	45.74	-4.23	41.51	74.00	-32.49	peak
5	1997.8747	44.61	-3.07	41.54	74.00	-32.46	peak
6	2281.9102	45.83	-3.19	42.64	74.00	-31.36	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 92 of 131

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

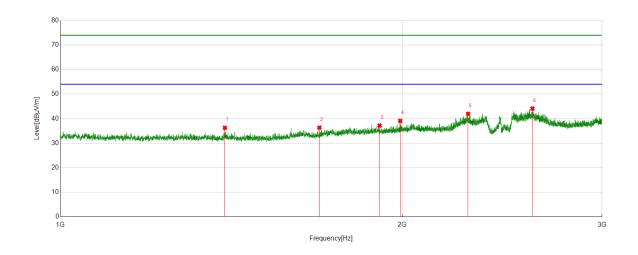


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1395.7995	42.80	-6.53	36.27	74.00	-37.73	peak
2	1690.8364	41.29	-4.94	36.35	74.00	-37.65	peak
3	1910.1138	40.79	-3.60	37.19	74.00	-36.81	peak
4	1992.124	42.28	-3.17	39.11	74.00	-34.89	peak
5	2286.1608	45.14	-3.17	41.97	74.00	-32.03	peak
6	2604.9506	45.74	-1.63	44.11	74.00	-29.89	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 93 of 131

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

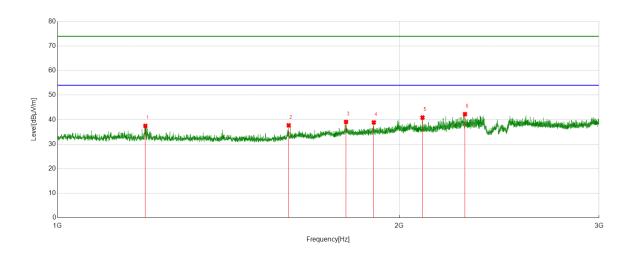


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.0244	44.13	-6.65	37.48	74.00	-36.52	peak
2	1598.3248	43.29	-5.60	37.69	74.00	-36.31	peak
3	1795.5994	43.36	-4.27	39.09	74.00	-34.91	peak
4	1899.6125	42.66	-3.78	38.88	74.00	-35.12	peak
5	2096.8871	43.82	-2.94	40.88	74.00	-33.12	peak
6	2285.6607	45.44	-3.17	42.27	74.00	-31.73	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 94 of 131

Test Mode	Test Mode Channel		Verdict	
11G	HCH	Horizontal	PASS	

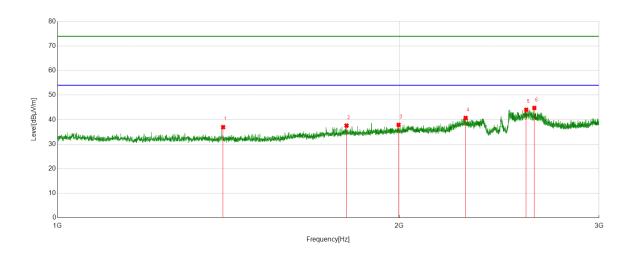


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1399.2999	43.36	-6.41	36.95	74.00	-37.05	peak
2	1797.3497	41.83	-4.25	37.58	74.00	-36.42	peak
3	1997.6247	40.97	-3.08	37.89	74.00	-36.11	peak
4	2288.6611	43.87	-3.16	40.71	74.00	-33.29	peak
5	2587.9485	46.08	-2.06	44.02	74.00	-29.98	peak
6	2630.9539	46.49	-1.73	44.76	74.00	-29.24	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 95 of 131

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

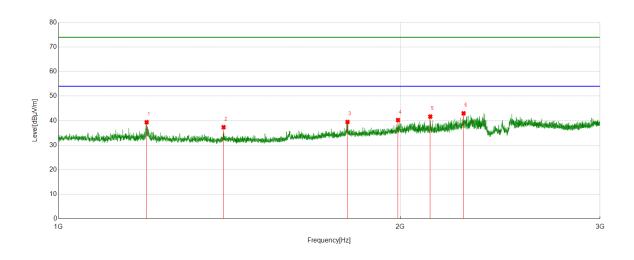


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.7745	46.02	-6.65	39.37	74.00	-34.63	peak
2	1397.7997	43.80	-6.46	37.34	74.00	-36.66	peak
3	1797.3497	43.72	-4.25	39.47	74.00	-34.53	peak
4	1991.1239	43.44	-3.19	40.25	74.00	-33.75	peak
5	2125.8907	44.57	-2.90	41.67	74.00	-32.33	peak
6	2274.4093	46.21	-3.22	42.99	74.00	-31.01	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 96 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

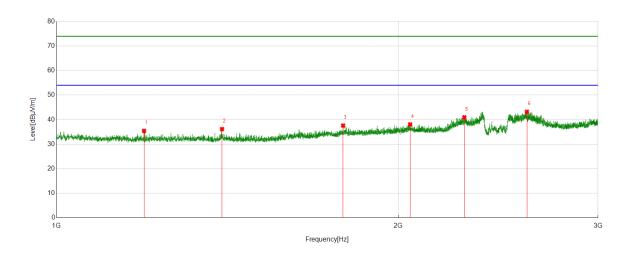


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.2743	42.06	-6.64	35.42	74.00	-38.58	peak
2	1399.0499	42.58	-6.42	36.16	74.00	-37.84	peak
3	1788.5986	41.96	-4.36	37.60	74.00	-36.40	peak
4	2048.8811	40.57	-2.52	38.05	74.00	-35.95	peak
5	2287.1609	44.12	-3.17	40.95	74.00	-33.05	peak
6	2596.9496	45.04	-1.83	43.21	74.00	-30.79	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 97 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

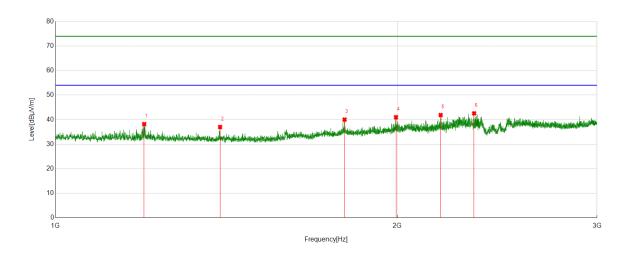


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.0246	44.85	-6.66	38.19	74.00	-35.81	peak
2	1396.2995	43.53	-6.52	37.01	74.00	-36.99	peak
3	1797.5997	44.27	-4.24	40.03	74.00	-33.97	peak
4	1995.1244	44.12	-3.12	41.00	74.00	-33.00	peak
5	2184.398	45.11	-3.23	41.88	74.00	-32.12	peak
6	2337.9172	45.69	-3.12	42.57	74.00	-31.43	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 98 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

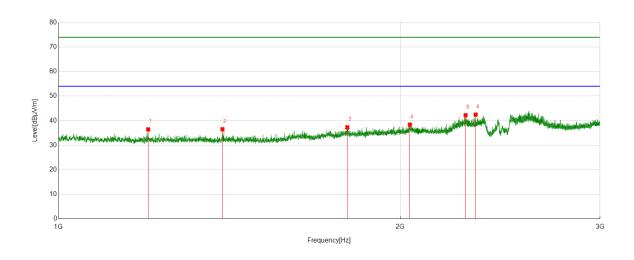


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.5249	43.14	-6.68	36.46	74.00	-37.54	peak
2	1394.5493	43.10	-6.58	36.52	74.00	-37.48	peak
3	1796.3495	41.53	-4.26	37.27	74.00	-36.73	peak
4	2039.63	40.87	-2.49	38.38	74.00	-35.62	peak
5	2283.9105	45.39	-3.18	42.21	74.00	-31.79	peak
6	2330.9164	45.57	-3.13	42.44	74.00	-31.56	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




REPORT No.: 4790446015-3 Page 99 of 131

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

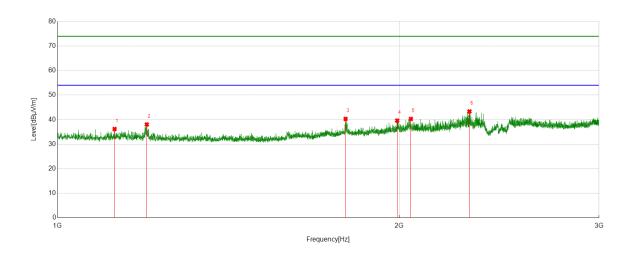


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1122.7653	42.24	-6.05	36.19	74.00	-37.81	peak
2	1198.5248	44.71	-6.67	38.04	74.00	-35.96	peak
3	1793.8492	44.62	-4.30	40.32	74.00	-33.68	peak
4	1991.874	42.79	-3.17	39.62	74.00	-34.38	peak
5	2048.131	42.81	-2.51	40.30	74.00	-33.70	peak
6	2306.4133	46.38	-3.04	43.34	74.00	-30.66	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

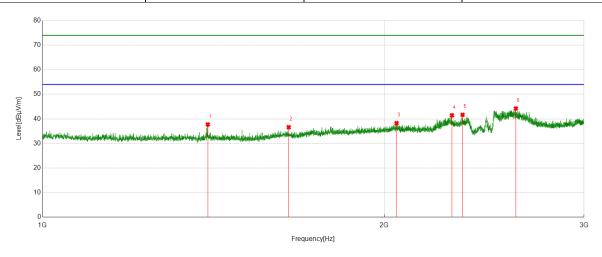


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1398.2998	44.18	-6.44	37.74	74.00	-36.26	peak
2	1647.831	41.76	-5.14	36.62	74.00	-37.38	peak
3	2050.8814	40.82	-2.55	38.27	74.00	-35.73	peak
4	2294.6618	44.58	-3.13	41.45	74.00	-32.55	peak
5	2344.9181	44.76	-3.10	41.66	74.00	-32.34	peak
6	2612.4516	45.76	-1.51	44.25	74.00	-29.75	peak

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

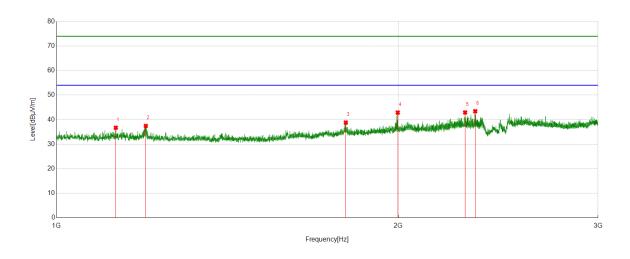

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1127.766	42.76	-6.05	36.71	74.00	-37.29	peak
2	1198.5248	44.12	-6.67	37.45	74.00	-36.55	peak
3	1798.3498	43.05	-4.23	38.82	74.00	-35.18	peak
4	1998.3748	45.96	-3.07	42.89	74.00	-31.11	peak
5	2290.9114	46.09	-3.15	42.94	74.00	-31.06	peak
6	2338.4173	46.56	-3.12	43.44	74.00	-30.56	peak


- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

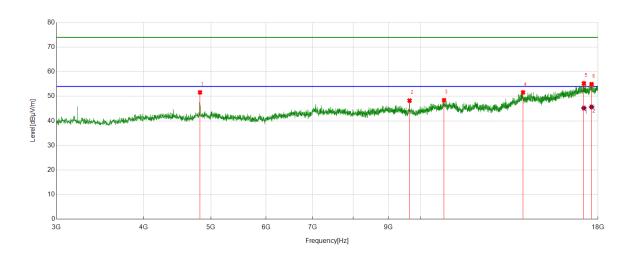


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4822.7278	46.24	5.35	51.59	74.00	-22.41	peak
2	9647.706	39.04	9.22	48.26	74.00	-25.74	peak
3	10814.1018	36.28	12.15	48.43	74.00	-25.57	peak
4	14043.2554	35.46	16.13	51.59	74.00	-22.41	peak
_	17176 7701	36.38	18.82	55.20	74.00	-18.80	peak
5	5 17176.7721	26.37	18.82	45.19	54.00	-8.81	average
6	0 47040 0074	35.68	19.27	54.95	74.00	-19.05	peak
6	17619.3274	26.40	19.27	45.67	54.00	-8.33	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

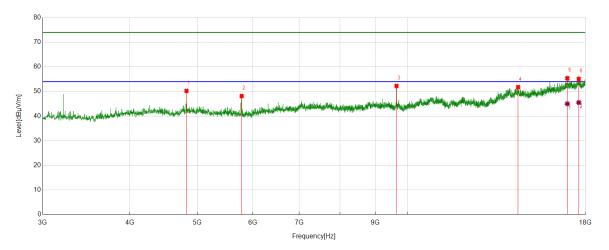

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4822.7278	44.88	5.35	50.23	74.00	-23.77	peak
2	5786.5983	43.90	4.26	48.16	74.00	-25.84	peak
3	9647.706	43.03	9.22	52.25	74.00	-21.75	peak
4	14412.6766	35.91	15.86	51.77	74.00	-22.23	peak
E	16052 6102	35.77	19.59	55.36	74.00	-18.64	peak
5	5 16953.6192	25.41	19.59	45.00	54.00	-9.00	average
6	0 47000 0000	35.44	19.61	55.05	74.00	-18.95	peak
6 17606.2008	25.89	19.61	45.50	54.00	-8.50	average	


Note: 1. Measurement = Reading Level + Correct Factor.

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

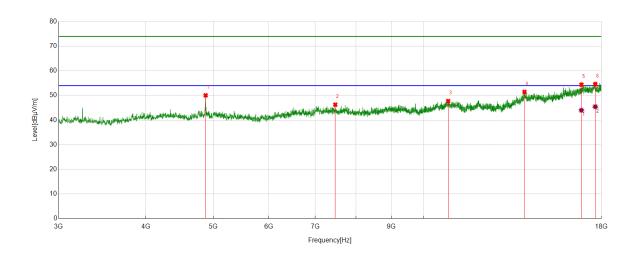

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4873.3592	44.50	5.54	50.04	74.00	-23.96	peak
2	7476.1845	37.66	8.60	46.26	74.00	-27.74	peak
3	10851.6065	35.56	12.16	47.72	74.00	-26.28	peak
4	13960.7451	35.91	15.55	51.46	74.00	-22.54	peak
E	16046 7200	36.06	18.27	54.33	74.00	-19.67	peak
5 16846.7308	25.73	18.27	44.00	54.00	-10.00	average	
0 47000 0	17626 2045	35.23	19.38	54.61	74.00	-19.39	peak
6	17636.2045	26.05	19.38	45 43	54.00	-8 57	average


- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode Channel Polarization Verdict

11B MCH Vertical PASS

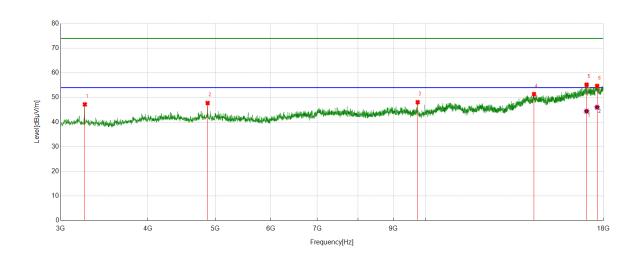


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3249.4062	45.01	2.18	47.19	74.00	-26.81	peak
2	4873.3592	42.20	5.54	47.74	74.00	-26.26	peak
3	9748.9686	38.82	9.25	48.07	74.00	-25.93	peak
4	14311.4139	35.46	15.90	51.36	74.00	-22.64	peak
E	17004 0704	35.99	19.18	55.17	74.00	-18.83	peak
5	5 17024.8781	25.23	19.18	44.41	54.00	-9.59	average
6	17606 0004	35.21	19.43	54.64	74.00	-19.36	peak
6	17626.8284	26.60	19.43	46.03	54.00	-7.97	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




REPORT No.: 4790446015-3 Page 106 of 131

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

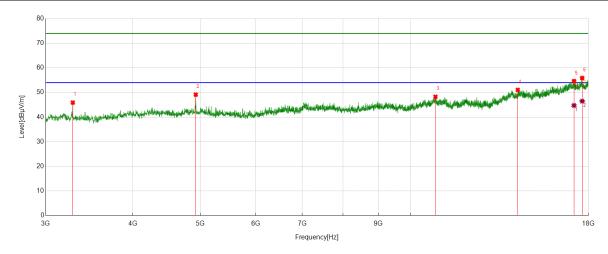


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3281.2852	42.88	3.01	45.89	74.00	-28.11	peak
2	4923.9905	43.54	5.56	49.10	74.00	-24.90	peak
3	10862.8579	36.12	12.14	48.26	74.00	-25.74	peak
4	14253.2817	35.14	15.92	51.06	74.00	-22.94	peak
E	17161 7700	35.64	18.98	54.62	74.00	-19.38	peak
5 17161.7702	25.74	18.98	44.72	54.00	-9.28	average	
6 17	17620 F700	36.35	19.50	55.85	74.00	-18.15	peak
	17630.5788	26.97	19.50	46.47	54.00	-7.53	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Test Mode Channel		Verdict	
11B	HCH	Vertical	PASS	

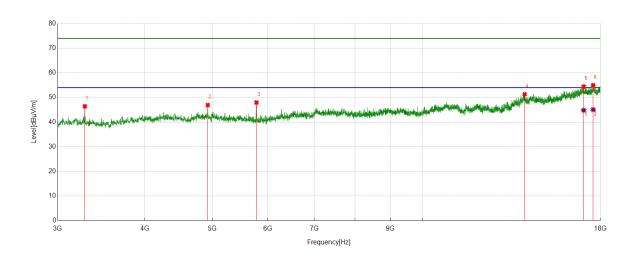


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3281.2852	43.39	3.01	46.40	74.00	-27.60	peak
2	4923.9905	41.35	5.56	46.91	74.00	-27.09	peak
3	5782.8479	43.72	4.23	47.95	74.00	-26.05	peak
4	14015.1269	35.43	15.86	51.29	74.00	-22.71	peak
E	17028.6286	35.08	19.29	54.37	74.00	-19.63	peak
5	17020.0200	25.49	19.29	44.78	54.00	-9.22	average
6	17570 5710	34.89	20.04	54.93	74.00	-19.07	peak
6	17570.5713	25.01	20.04	45.05	54 00	-8 95	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

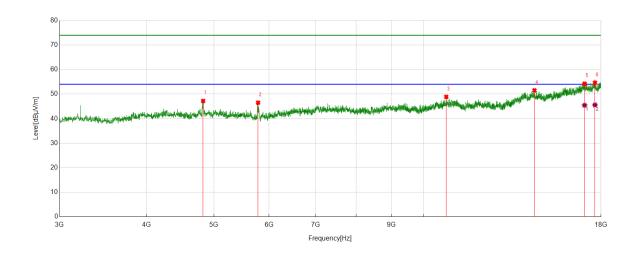


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.6031	41.86	5.36	47.22	74.00	-26.78	peak
2	5786.5983	42.26	4.26	46.52	74.00	-27.48	peak
3	10785.9732	36.88	12.02	48.90	74.00	-25.10	peak
4	14440.8051	35.48	16.06	51.54	74.00	-22.46	peak
E	5 47047.0000	34.46	19.77	54.23	74.00	-19.77	peak
5 17047.380	17047.3609	25.68	19.77	45.45	54.00	-8.55	average
0 4704	17644 0202	35.28	19.32	54.60	74.00	-19.40	peak
6	17641.8302	26.26	19.32	45.58	54.00	-8.42	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






Test Mode	Test Mode Channel		Verdict	
11G	LCH	Vertical	PASS	

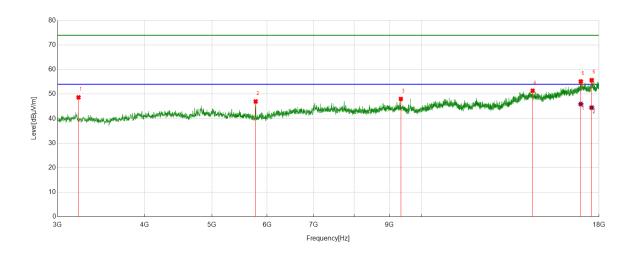


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3215.652	46.39	2.28	48.67	74.00	-25.33	peak
2	5779.0974	42.80	4.22	47.02	74.00	-26.98	peak
3	9342.0428	38.58	9.46	48.04	74.00	-25.96	peak
4	14450.1813	35.35	16.04	51.39	74.00	-22.61	peak
E	16046 1100	35.70	19.45	55.15	74.00	-18.85	peak
5 16946.1183	26.48	19.45	45.93	54.00	-8.07	average	
6 17566.82	17566 0200	35.81	19.88	55.69	74.00	-18.31	peak
	17500.8209	24.62	19.88	44.50	54.00	-9.50	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



REPORT No.: 4790446015-3 Page 110 of 131

Test Mode	Test Mode Channel		Verdict	
11G	MCH	Horizontal	PASS	

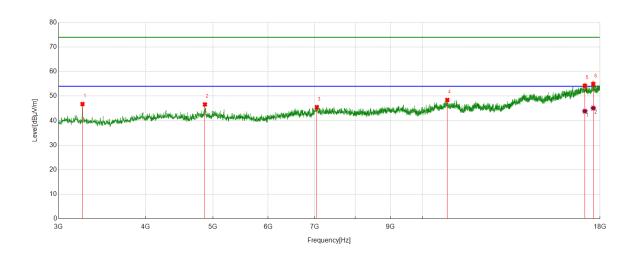

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3247.5309	44.57	2.20	46.77	74.00	-27.23	peak
2	4869.6087	41.07	5.54	46.61	74.00	-27.39	peak
3	7052.3815	36.23	9.28	45.51	74.00	-28.49	peak
4	10859.1074	36.27	12.16	48.43	74.00	-25.57	peak
E	17120.5151	35.60	18.61	54.21	74.00	-19.79	peak
5	17 120.3131	25.25	18.61	43.86	54.00	-10.14	average
_	17600.5751	35.39	19.55	54.94	74.00	-19.06	peak
6	17000.5751	25.57	19.55	45.12	54.00	-8.88	average

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 4. Peak: Peak detector.
- 5. AVG: VBW refer to section 7.2.
- 6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
- 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.